



USER’S MANUAL

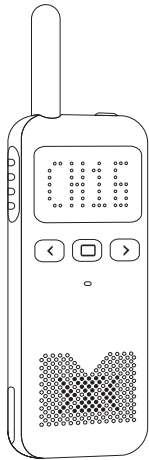


- Screen Display
- Scanning
- Monitoring
- VOX
- TOT
- Chinese/English Voice Prompt
- Keyboard Lockout
- Power Display
- Busy Channel Lockout
- Power Saving Mode
- Low Battery Warning
- Voice Companding/Scrambling Function
- Programming Encryption Function
- Special Signaling
- 50 CTCSS/208 DCS

◆◆ Standard Accessories




Radio Body




USB Cable


◆◆ Optional Accessories



Desktop Charger

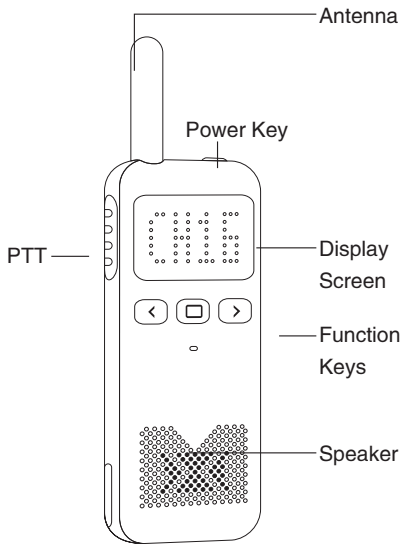


◆◆ Be Familiar With The Machine

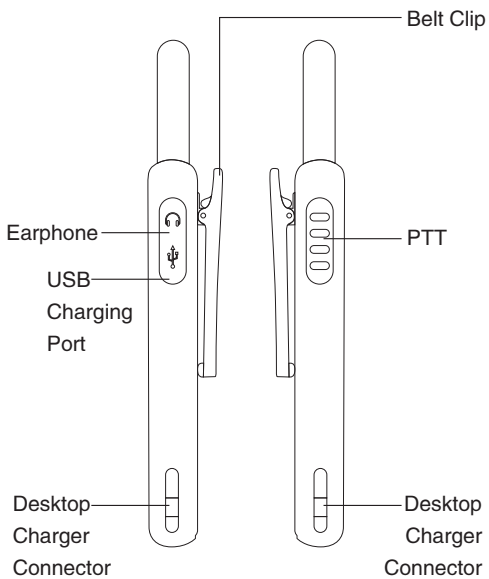


◆◆ Charging the Battery Pack

- 1.The battery is not charged in the factory,please charge the battery under the environmental temperature 5—40℃ before using.
- 2.After purchasing or long-term storage(more than two months), charging the battery for the first time can not reach its saturation capacity,repeat charge/discharge for twice or three times to make battery capacity achieve the best state.
- 3.Before charging,please power off the transceiver,using the transceiver during charging may affect correct charging.
- 4.If the battery has been charged fully,please do not charge it again,otherwise the service life of the battery may be shorten or may be damaged.
- 5.If the service time is significantly reduced even after completely correct charging,the battery can not be used any more,please replace a new battery.


◆◆ Icons



volume



scanning



channel lockout




unlocking




earphone



earphone volume




transmitting



receiving



alarm



battery level

◆◆ MENU OPERATION

- 1.Short press keys to adjust the volume.
- 2.Short press key to switch to channel mode,then short press keys to adjust the channels.
- 3.PTT: press this button whenever you wish to talk with the user of the other radio.

◆◆ Functions Operation

- **Scanning:**  
It is convenient for the user to search for calls from other channels.When “Side Key 2” in the software is programmed to the scanning function,long press key for two seconds to enter into the scanning mode,the transceiver will start to scan with the current channel;Operate it again to exit.
- **Keyboard Lockout:**  
Long press key to lock all buttons,operate it again to unlock.
- **Power Display:**  
Short press power key to display the current battery level.

◆◆ Functions Operation

- **Monitoring:**  
Long press key for two seconds to enter into the monitor mode,release it to exit.
- **VOX:**  
This function can be voice activated so the user doesn’ t have to press the PTT key.  
When “VOX level” in the software is selected,short press key twice to enter into the VOX mode,then short press key or key to turn on/off the VOX.
- **Chinese/English Voice Prompt:**  
The transceiver has a manual switching function between the Chinese and the English.Switch to Channel 16,turn off the transceiver,then press both the power key and key and meanwhile turn on the transceiver to switch between the Chinese and English.
- **Time Out Timer(TOT):**  
The purpose of the TOT is to prevent any single person from using a channel for an extended period of time.An alarm will sound if the transmission continues beyond the set time.The

◆◆ Functions Operation

- transceiver will stop transmission if this occurs.To stop the alarm,release the PTT key and the transceiver will return to
- **Busy Channel Lockout:**  
The function can prevent interference from other transceivers using the same channel.
  - **Battery Power Saving:**  
If there is no signal or operation,the radio will reduce its power consumption.The battery power-saving function activates when the channel is unoccupied or has not been in operation.
  - **Low Battery Warning:**  
If the battery power falls to the predetermined value during transmission,the transceiver will give out a voice prompt,please charge in time.
  - **Scrambling:**  
It is a voice encryption mode which is different from sub audio.

◆◆ Functions Operation

- **Companding:**  
It is a function setting which prevents the inter-channel interference.
- **CTCSS/DCS:**  
The transceiver has 50 CTCSS and 208 DCS, also non-standard subaudio can be programmed!
- **CDCSS Mode:**  
It is valid only when you program the CDCSS on the channels. This function has two selections: “normal signaling” and “special signaling”.Normal Signaling refers to the CDCSS codes on the channels is ordinary codes,we can talk to each other with the same CDCSS;Special Signaling refers to the CDCSS codes on the channels is special processed codes.When the transceivers in one company are programmed the same frequency with the same CDCSS and special signaling,they can avoid the signal interferences from the other companies’ transceivers.

◆◆ Technical Parameters

| SPECIFICATIONS          |   |
|-------------------------|---|
| Frequency Range         | 462.5500-462.7250MHz                      |
| Supply Power            | 467.5500-467.7125MHz                      |
| Memory Channel          | DC3.7V                                    |
| Antenna Configuration   | 22  |
| Work Mode               | Internal Antenna                          |
| Ground Method           | Co/Differ-frequency Simplex Communication |
| Dimension               | Cathode                                   |
| TRANSMITTER             |   |
| Output Power            | 120.2 x 53 x 14.5mm                       |
| Modulation Mode         | 30.26dBm                                  |
| Max.Frequency Deviation | FM(F3E )                                  |
| Spurious Radiation      | 2.5kHz                                    |
| Preemphasis Character   | ≤7.5 μ W                                  |
| Emission Current        | Per Octave 6dB                            |
| RECEIVER                |   |
| Sensitivity             | ≤1800mA                                   |
| Audio Power             | < 0.16 μ V ( 12dB SINAD )                 |
| Audio Distortion        | ≥300mW                                    |
| Intermodulation         | < 5%                                      |
| Interference Resistance | ≥60dB                                     |
| Receiving Current       |   |
| Standby Current         | ≤300mA                                    |
|                         | ≤20mA                                     |

▲We May Change The Specifications For Technical Improvement Without Prior Notice.

**FCC Statement:**

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

**ISED RSS Warning:**

This device complies with Innovation, Science and Economic Development Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'ISED applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

**RF Exposure Information (FCC SAR) :**

RF Exposure Information (SAR) : The SAR limit of USA (FCC) is 1.6W/Kg averaged over one gram of tissue. Product Type: two way radio, model number: KD-C70Pro (FCC ID: 2AQX5KD-C70PRO) has also been tested against this SAR limit. The device was test for typical body-worn operations and head face up operations keep the Tracker at least 25mm from the face.when worn on body must be correct back clip for this product,Use of non-approved accessories may result in exposure levels which exceed the uncontrolled environmental RF exposure limits.

**RF Exposure Information (ISED SAR) :**

The SAR limit of IC is 1.6W/Kg averaged over one gram of tissue. Product Type: two way radio, model number: KD-C70Pro (IC: 24229-KDC70PRO) has also been tested against this SAR limit. The device was test for typical body-worn operations and head face up operations keep the Tracker at least 25mm from the face.when worn on body must be correct back clip for this product,Use of non-approved accessories may result in exposure levels which exceed the uncontrolled environmental RF exposure limits.

Le SAR de IC est limité à 1.6W/Kg, avec une moyenne par gramme.Produits

Type:two way radio, type: KD-C70Pro (IC: 24229-KDC70PRO) a également été testé pour la limite SAR.Ce dispositif est utilisé pour tester des opérations d 'usure corporelle typiques et des opérations en direction du Haut de la tête, de manière à maintenir une distance d' au moins 25 mm entre le traceur et le visage.