



FCC CERTIFICATION TEST REPORT

Applicant:	Clear Touch Interactive Inc
Address:	1100 Thousand Oaks Boulevard Greenville South Carolina 29607 United States
Manufacturer:	Clear Touch Interactive Inc
Address:	1100 Thousand Oaks Boulevard Greenville South Carolina 29607 United States
Product Description:	PC27IG PC Module
Brand Name:	Clear Touch
Tested Model:	CTI-PCOPS-PC27-IG
FCC ID:	2AL27-CTI-PCOPS27IG
Report No.:	JCF240613031-010
Received Date:	Jun. 13, 2024
Tested Date:	Jun. 13, 2024 ~ Aug. 05, 2024
Issued Date:	Aug. 05, 2024
Test Standards:	FCC Rules and Regulations Part 15 Subpart E,
Test Procedure:	ANSI C63.10:2013, 789033 D02 General U-NII Test Procedures New Rules v02r01, 662911 D01 Multiple Transmitter Output v02r01
Test Result:	Pass

Prepared By:  <u>Roger Li/Engineer</u>	Date: Aug. 05, 2024
--	----------------------------

Reviewed By:  <u>Kennys Zhang/Engineer</u>	 Date: Aug. 05, 2024
--	---

Approved By:  <u>Talent Zhang/Engineer</u>	Date: Aug. 05, 2024
--	----------------------------

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Guangzhou Jingce Testing Technology Co., Ltd. the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 05, 2024	Original Report	/

Table of Contents

1. Test Report Declare	5
2. Summary of test results	6
3. Test Laboratory	6
4. Equipment Under Test	7
4.1. Description of EUT	7
4.2. Channel List	8
4.3. Test Channel Configuration	9
4.4. Test Environment Conditions	11
4.5. The Worse Case Power Setting Parameter	11
4.6. Description of Available Antennas	13
5. Description of Test Setup	14
5.1. Accessory	14
5.2. Support Equipment	14
5.3. Test Setup	14
5.4. Setup Diagram for Tests	14
6. Measurement uncertainty	14
7. Measuring Instrument and Software Used	15
8. Duty Cycle	17
8.1. Block Diagram of Test Setup	17
8.2. Limits	17
8.3. Procedure	17
8.4. Results	17
8.5. Original Test Data	21
9. 26dB Bandwidth and 6dB Bandwidth	87
9.1. Block Diagram of Test Setup	87
9.2. Limits	87
9.3. Test Procedure	87
9.4. Test Result	88
9.5. Original Test Data	97
10. Maximum Output Power	243
10.1. Block Diagram of Test Setup	243
10.2. Limits	243
10.3. Test Procedure	243
10.4. Test Result	243
11. Power Spectral Density	249
11.1. Block Diagram of Test Setup	249
11.2. Limits	249
11.3. Test Procedure	249
11.4. Test Result	250
11.5. Original Test Data	255
12. Frequency Stability Measurement	328
12.1. Block Diagram of Test Setup	328
12.2. Limit of Frequency Stability	328
12.3. Test Procedures	328
12.4. Test Result	328
13. Radiated Emission	337
13.1. Block Diagram of Test Setup	337
13.2. Limit	338
13.3. Test Procedure	339
13.4. Test Result	341
13.5. Original Test Data	341
14. AC Power Line Conducted Emissions	354

14.1. Block Diagram of Test Setup	354
14.2. Limits	354
14.3. Test Procedure	354
14.4. Test Result	355
14.5. Original Test Data	355
15. Dynamic Frequency Selection	356
15.1. Applicability of DFS Requirements	356
15.2. Limit	356
15.3. Parameters of Radar Test Waveform	357
15.4. Calibration of Radar Waveform	358
15.5. Channel Closing Transmission Time, Channel Move Time and Non-Occupancy Period	360
15.6. Test Setup	361
15.7. Test Result	361
16. Antenna Requirements	363
16.1. Applicable Requirements	363
16.2. Result	363
APPENDIX A - Radiated Emission Below 1GHz Test Data	364
APPENDIX B - Radiated Emission Above 1GHz Test Data	366
APPENDIX C - AC Power Line Conducted Emission Test Data	472

1. Test Report Declare

Applicant:	Clear Touch Interactive Inc
Address:	1100 Thousand Oaks Boulevard Greenville South Carolina 29607 United States
Manufacturer:	Clear Touch Interactive Inc
Address:	1100 Thousand Oaks Boulevard Greenville South Carolina 29607 United States
Product Name:	PC27IG PC Module
Brand Name:	Clear Touch
Model Name:	CTI-PCOPS-PC27-IG
Difference Description:	NA

We Declare:

The equipment described above is tested by Guangzhou Jingce Testing Technology Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangzhou Jingce Testing Technology Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests except as provided information by clients.

2. Summary of test results

The EUT have been tested according to the applicable standards as referenced below.

Clause	Description of Test Item	Standard	Verdict
1	6/26dB Bandwidth	FCC 15.407 (a)&(e)	Pass
2	Maximum Conducted Output Power	FCC 15.407 (a)	Pass
3	Power Spectral Density	FCC 15.407 (a)	Pass
4	Frequency Stability Measurement	FCC 15.407 (g)	Pass
5	Radiated Band edge and Spurious Emission	FCC 15.407 (b) FCC 15.209 FCC 15.205	Pass
6	Power Line Conducted Emission	FCC 15.207	Pass
7	Antenna requirement	FCC 15.203	Pass
8	Dynamic Frequency Selection	FCC 15.407 (h)	Pass

3. Test Laboratory

Guangzhou Jingce Testing Technology Co., Ltd.

Add.: No.10, Hefeng No.1 street, Huangpu District, Guangzhou, Guangdong, People's Republic of China

Association for Laboratory Accreditation(A2LA). Certificate Number: 6594.03

FCC Designation Number: CN1381. Test Firm Registration Number: 486550

IC Test Firm Registration Number: 31808

Conformity Assessment Body identifier: CN0173

4. Equipment Under Test

4.1. Description of EUT

EUT Name:	PC271G PC Module
Model Number:	CTI-PCOPS-PC27-IG
EUT Function Description:	Please refer to user manual of this device
Power Supply:	DC 12-19V 8.5A
Radio Specification:	IEEE 802.11a/n/ac/ax
Hardware Version:	NA
Software Version:	NA
Operation Frequency:	IEEE 802.11a: 5180MHz—5825MHz IEEE 802.11n HT20: 5180MHz—5825MHz IEEE 802.11n HT40: 5190MHz—5795MHz IEEE 802.11ac VHT20: 5180MHz—5825MHz IEEE 802.11ac VHT40: 5190MHz—5795MHz IEEE 802.11ac VHT80: 5210MHz—5775MHz IEEE 802.11ac VHT160: 5250MHz—5570MHz IEEE 802.11ax HE20: 5180MHz—5825MHz IEEE 802.11ax HE40: 5190MHz—5795MHz IEEE 802.11ax HE80: 5210MHz—5775MHz IEEE 802.11ax HE160: 5250MHz—5570MHz
Modulation:	IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac (VHT20/40/80/160): OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax (HE20/40/80/160): OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Data Rate:	IEEE 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps IEEE 802.11n HT20: 14.4, 28.9, 43.3, 57.8, 86.7, 115.6, 130, 144.4Mbps IEEE 802.11n HT40: 30, 60, 90, 120, 180, 240, 270, 300Mbps IEEE 802.11ac VHT20: 14.4, 28.9, 43.3, 57.8, 86.7, 115.6, 130, 144.4, 173.3Mbps IEEE 802.11ac VHT40: 30, 60, 90, 120, 180, 240, 270, 300, 360, 400Mbps IEEE 802.11ac VHT80: 65, 130, 195, 260, 390, 520, 585, 650, 780, 866.7Mbps IEEE 802.11ac VHT160: 130, 260, 390, 520, 780, 1040, 1170, 1300, 1560, 1733Mbps IEEE 802.11ax HE20: 17.2, 34.4, 51.6, 68.8, 103.2, 137.6, 154.8, 172.1, 206.5, 229.4, 258.1, 286.8Mbps IEEE 802.11ax HE40: 34.4, 68.8, 103.2, 137.6, 206.4, 275.2, 309.7, 344.1, 412.9, 458.8, 516.1, 573.5Mbps IEEE 802.11ax HE80: 72, 144.1, 216.1, 288.2, 432.3, 576.4, 648.5, 720.5, 864.7, 960.7, 1080.8, 1200.9Mbps IEEE 802.11ax HE160: 144.1, 288.2, 432.4, 576.5, 864.7, 1152.9, 1297.1, 1441.2, 1729.4, 1921.6, 2161.8, 2402Mbps
Antenna Type:	External Antenna, MAX. Gain: 4.65 dBi

Note 1: EUT is the ab. of equipment under test.

Note 2: The antenna gain is declared by the customer and the laboratory is not responsible for the accuracy of the antenna gain.

4.2. Channel List

UNII-1 (For Bandwidth = 20 MHz)		UNII-1 (For Bandwidth = 40 MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190
40	5200	46	5230
44	5220	/	/
48	5240	/	/
UNII-1 (For Bandwidth = 80 MHz)			
Channel		Frequency (MHz)	
42		5210	

UNII-2A (For Bandwidth = 20 MHz)		UNII-2A (For Bandwidth = 40 MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270
56	5280	62	5310
60	5300	/	/
64	5320	/	/
UNII-2A (For Bandwidth = 80 MHz)			
Channel		Frequency (MHz)	
58		5290	
UNII-1&UNII-2A (For Bandwidth = 160 MHz)			
Channel		Frequency (MHz)	
50		5250	

UNII-2C (For Bandwidth = 20 MHz)		UNII-2C (For Bandwidth = 40 MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510
104	5520	110	5550
108	5540	118	5590
112	5560	126	5630
116	5580	134	5670

120	5600	142	5710
124	5620	/	/
128	5640	/	/
132	5660	/	/
136	5680	/	/
140	5700	/	/
144	5720	/	/
UNII-2C (For Bandwidth = 80 MHz)			
Channel		Frequency (MHz)	
106		5530	
122		5610	
138		5690	
UNII-2C (For Bandwidth = 160 MHz)			
Channel		Frequency (MHz)	
114		5570	

UNII-3 (For Bandwidth = 20 MHz)		UNII-3 (For Bandwidth = 40 MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755
153	5765	159	5795
157	5785	/	/
161	5805	/	/
165	5825	/	/
UNII-3 (For Bandwidth = 80 MHz)			
Channel		Frequency (MHz)	
155		5775	

4.3. Test Channel Configuration

Mode	Data rate (Mbps) (see Note)	Test Channel and Frequency
802.11a TX Mode	6	CH36, 5180
	6	CH44, 5220
	6	CH48, 5240
	6	CH52, 5260
	6	CH60, 5300

	6	CH64, 5320
	6	CH100, 5500
	6	CH116, 5580
	6	CH140, 5700
	6	CH144, 5720
	6	CH149, 5745
	6	CH157, 5785
	6	CH165, 5825
802.11n HT20 TX Mode	MCS 8	CH36, 5180
	MCS 8	CH44, 5220
	MCS 8	CH48, 5240
	MCS 8	CH52, 5260
	MCS 8	CH60, 5300
	MCS 8	CH64, 5320
	MCS 8	CH100, 5500
	MCS 8	CH116, 5580
	MCS 8	CH140, 5700
	MCS 8	CH144, 5720
	MCS 8	CH149, 5745
	MCS 8	CH157, 5785
	MCS 8	CH165, 5825
802.11n HT40 TX Mode	MCS 8	CH38, 5190
	MCS 8	CH46, 5230
	MCS 8	CH54, 5270
	MCS 8	CH62, 5310
	MCS 8	CH102, 5510
	MCS 8	CH110, 5550
	MCS 8	CH134, 5670
	MCS 8	CH142, 5710
	MCS 8	CH151, 5755
	MCS 8	CH159, 5795
802.11ac VHT20 TX Mode	MCS 0	CH36, 5180
	MCS 0	CH44, 5220
	MCS 0	CH48, 5240
	MCS 0	CH52, 5260
	MCS 0	CH60, 5300
	MCS 0	CH64, 5320
	MCS 0	CH100, 5500
	MCS 0	CH116, 5580
	MCS 0	CH140, 5700
	MCS 0	CH140, 5720
	MCS 0	CH149, 5745
	MCS 0	CH157, 5785
	MCS 0	CH165, 5825
802.11ac VHT40 TX Mode	MCS 0	CH38, 5190
	MCS 0	CH46, 5230
	MCS 0	CH54, 5270
	MCS 0	CH62, 5310
	MCS 0	CH102, 5510
	MCS 0	CH110, 5550
	MCS 0	CH134, 5670
	MCS 0	CH142, 5710
	MCS 0	CH151, 5755
	MCS 0	CH159, 5795
802.11ac VHT80 TX Mode	MCS 0	CH42, 5210
	MCS 0	CH58, 5290
	MCS 0	CH106, 5530
	MCS 0	CH122, 5610
	MCS 0	CH138, 5690
	MCS 0	CH155, 5775

802.11ac VHT160 TX Mode	MCS 0	CH50, 5250
	MCS 0	CH114, 5570
802.11ax HE20 TX Mode	MCS 0	CH36, 5180
	MCS 0	CH44, 5220
	MCS 0	CH48, 5240
	MCS 0	CH52, 5260
	MCS 0	CH60, 5300
	MCS 0	CH64, 5320
	MCS 0	CH100, 5500
	MCS 0	CH116, 5580
	MCS 0	CH140, 5700
	MCS 0	CH144, 5720
	MCS 0	CH149, 5745
	MCS 0	CH157, 5785
802.11ax HE40 TX Mode	MCS 0	CH165, 5825
	MCS 0	CH38, 5190
	MCS 0	CH46, 5230
	MCS 0	CH54, 5270
	MCS 0	CH62, 5310
	MCS 0	CH102, 5510
	MCS 0	CH110, 5550
	MCS 0	CH134, 5670
	MCS 0	CH142, 5710
	MCS 0	CH151, 5755
802.11ax HE80 TX Mode	MCS 0	CH159, 5795
	MCS 0	CH42, 5210
	MCS 0	CH58, 5290
	MCS 0	CH106, 5530
	MCS 0	CH122, 5610
	MCS 0	CH138, 5690
802.11ax HE160 TX Mode	MCS 0	CH155, 5775
	MCS 0	CH50, 5250
	MCS 0	CH114, 5570

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

4.4. Test Environment Conditions

During the measurement the environmental conditions were within the listed ranges:

	Normal Conditions	Extreme Conditions
Temperature range	21-25 °C	0 °C to +40 °C
Humidity range	40-75%	N/A
Pressure range	86-106 kPa	N/A
Power supply	DC 19V	N/A

Note: The Extreme temperature range and extreme voltages are declared by the manufacturer.

4.5. The Worse Case Power Setting Parameter

The Worse Case Power Setting Parameter			
Test Software	DRTU		
Mode	Channel	Soft set value	
		ANT0	ANT1
802.11a	36	13	12
	44	13	12
	48	12	12
	52	12	12
	60	12	12

	64	12	12
	100	12	12
	116	12	12
	140	12	12
	144	12	12
	149	12	12
	157	12	12
	165	12	12
802.11n HT20	36	10	10
	44	10	10
	48	10	10
	52	10	10
	60	10	10
	64	10	10
	100	10	10
	116	10	10
	140	10	10
	144	10	10
	149	10	10
	157	10	10
	165	10	10
802.11n HT40	38	10	10
	46	10	10
	54	10	10
	62	10	10
	102	10	10
	110	10	10
	134	10	10
	142	10	10
	151	10	10
	159	10	10
802.11ac VHT20	36	10	10
	44	10	10
	48	10	10
	52	10	10
	60	10	10
	64	10	10
	100	10	10
	116	10	10
	140	10	10
	144	10	10
	149	10	10
	157	10	10
	165	10	10
802.11ac VHT40	38	10	10
	46	10	10
	54	10	10
	62	10	10
	102	10	10
	110	10	10
	134	10	10
	144	10	10
	151	10	10
	159	10	10
802.11ac VHT80	42	8	8
	58	8	8
	106	8	8
	122	8	8
	155	8	8
802.11ac VHT160	50	8	8

	114	8	8
802.11ax HE20	36	8	8
	44	8	8
	48	8	8
	52	8	8
	60	8	8
	64	8	8
	100	8	8
	116	8	8
	140	8	8
	144	8	8
	149	8	8
	157	8	8
	165	8	8
802.11ax HE40	38	8	8
	46	8	8
	54	8	8
	62	8	8
	102	8	8
	110	8	8
	134	8	8
	142	8	8
	151	8	8
802.11ax HE80	159	8	8
	42	8	8
	58	8	8
	106	8	8
	122	8	8
	138	8	8
802.11ax HE160	155	8	8
	50	8	8
	114	8	8

4.6. Description of Available Antennas

Test Mode	Transmit and Receive Mode	Description
802.11a	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11n HT20	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11n HT40	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11ac VHT20	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11ac VHT40	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11ac VHT80	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11ac VHT160	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11ax HE20	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11ax HE40	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11ax HE80	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11ax HE160	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.

5. Description of Test Setup

5.1. Accessory

Description of Accessories	Manufacturer	Model Number	Description	Remark
/	/	/	/	/

5.2. Support Equipment

Equipment	Brand Name	Model Name	P/N
PC	Lenovo	T480	/

5.3. Test Setup

The EUT can work in Fixed Frequency mode.

5.4. Setup Diagram for Tests



6. Measurement uncertainty

Test Item	Uncertainty
AC Power Conduction emission	1.37 dB
All Radiated emissions	5.4dB
Conducted emissions	3.09 dB
Occupied Channel Bandwidth	1.1%
Conducted Output power	0.82dB
Power Spectral Density	0.82dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of $k = 2$.


7. Measuring Instrument and Software Used

TS Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	Spectrum Analyzer	Keysight	N9030B	MY56320512	Sep. 12, 2023	Sep. 11, 2024
☒	Vector Signal Generator	Keysight	N5182B	MY57300334	Sep. 12, 2023	Sep. 11, 2024
☒	Signal Generator	Keysight	N5171B	MY57280639	Sep. 12, 2023	Sep. 11, 2024
☒	DC POWER	Keysight	E342A	MY59020356	Jun. 29, 2024	Jun. 28, 2025
☒	Incubator thermometer	GWS	EL-02JA	21107288	Sep. 12, 2023	Sep. 11, 2024
☒	Control unit(Power sensor)	Tonscend	JS0806-2	/	Sep. 12, 2023	Sep. 11, 2024
☒	Wideband radio communication tester	R&S	CMW500	163478	Jul. 03, 2024	Jul. 02, 2025
☒	Spectrum Analyzer	Keysight	N9020B	MY60112206	Sep. 12, 2023	Sep. 11, 2024
☒	Control unit(Power sensor)	Tonscend	JS0806-2	21H8060465	Sep. 12, 2023	Sep. 12, 2024
Software						
Used	Description	Manufacturer	Name		Version	
☒	Test software	Tonscend	JS1120-3		V3.3.10	
RSE Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	EMI Receiver	R&S	ESR	102154	Sep. 12, 2023	Sep. 11, 2024
☒	Bilog Antenna	Schwarzbeck	VULB 9163	01361	Aug. 16, 2023	Aug. 15, 2024
☒	Horn Antenna 1	Schwarzbeck	BBHA 9120 D	02411	May. 28, 2024	May. 27, 2025
☒	Horn Antenna 2	ETS	BBHA 9170	1090	Sep. 04, 2023	Sep. 03, 2024
☒	loop-antenna	Schwarzbeck	FMZB 1513-60	00030	Jan. 14, 2024	Jan. 13, 2025
☒	Signal Pre-Amplifier	Tonscend	TAP01018050	AP23I8060293	Oct. 12, 2023	Oct. 11, 2024
☒	Signal Pre-Amplifier	ETS	3116C-PA	00217677	Aug. 24, 2023	Aug. 23, 2024
☒	966 Chamber	YIHENG	9m*6m*6m	001	Sep. 05, 2023	Sep. 04, 2026
Software						
Used	Description	Manufacturer	Name		Version	
☒	Test software	Tonscend	TS+		V3.0.0.4	
Conducted Emission Test For AC Power Port						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	LISN	R&S	ENV216	102509	Sep. 12, 2023	Sep. 11, 2024
☒	EMI Receiver	R&S	ESR	102154	Sep. 12, 2023	Sep. 11, 2024
Software						
Used	Description	Manufacturer	Name		Version	
☒	Test software	EZ	EZ-EMC		EMEC-3A1	

Other Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	Temperature & Humidity	Temperature	HTC-1	/	Nov. 02, 2023	Nov. 01, 2024

8. Duty Cycle

8.1. Block Diagram of Test Setup

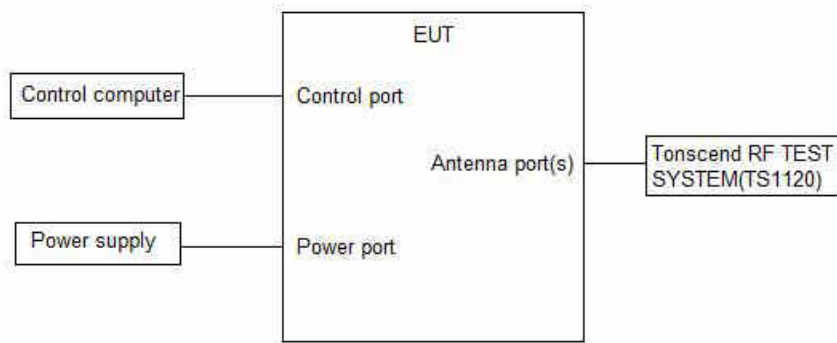

8.2. Limits

None; for reporting purposes only.

8.3. Procedure

Refer to KdB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.B.

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set RBW $\geq$ EBW if possible; otherwise,

set RBW to the largest available value. Set VBW $\geq$ RBW.

Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

8.4. Results

Test Mode	Ant.	Freq. (MHz)	Transmission Duration (ms)	Transmission Period (ms)	Duty Cycle (%)
11A	Ant1	5180	0.15	0.20	75.00
	Ant2	5180	0.14	0.19	73.68
	Ant1	5200	0.14	0.19	73.68
	Ant2	5200	0.15	0.20	75.00
	Ant1	5240	0.14	0.19	73.68
	Ant2	5240	0.14	0.19	73.68
	Ant1	5260	0.14	0.19	73.68
	Ant2	5260	0.14	0.19	73.68
	Ant1	5280	0.15	0.20	75.00
	Ant2	5280	0.14	0.19	73.68
	Ant1	5320	0.15	0.20	75.00
	Ant2	5320	0.15	0.20	75.00
	Ant1	5500	0.15	0.20	75.00
	Ant2	5500	0.14	0.19	73.68
	Ant1	5580	0.14	0.19	73.68
	Ant2	5580	0.15	0.20	75.00
	Ant1	5700	0.15	0.20	75.00
	Ant2	5700	0.14	0.19	73.68
	Ant1	5720	0.14	0.19	73.68
	Ant2	5720	0.14	0.19	73.68
	Ant1	5745	0.14	0.19	73.68
	Ant2	5745	0.15	0.20	75.00
	Ant1	5785	0.14	0.19	73.68

	Ant2	5785	0.14	0.19	73.68
	Ant1	5825	0.15	0.20	75.00
	Ant2	5825	0.15	0.20	75.00
11N20MIMO	Ant1	5180	0.26	0.31	83.87
	Ant2	5180	0.26	0.31	83.87
	Ant1	5200	0.26	0.31	83.87
	Ant2	5200	0.26	0.31	83.87
	Ant1	5240	0.26	0.31	83.87
	Ant2	5240	0.26	0.31	83.87
	Ant1	5260	0.26	0.31	83.87
	Ant2	5260	0.26	0.31	83.87
	Ant1	5280	0.26	0.31	83.87
	Ant2	5280	0.26	0.31	83.87
	Ant1	5320	0.26	0.31	83.87
	Ant2	5320	0.26	0.31	83.87
	Ant1	5500	0.26	0.31	83.87
	Ant2	5500	0.26	0.31	83.87
	Ant1	5580	0.26	0.31	83.87
	Ant2	5580	0.26	0.31	83.87
	Ant1	5700	0.26	0.31	83.87
	Ant2	5700	0.26	0.31	83.87
	Ant1	5720	0.26	0.31	83.87
	Ant2	5720	0.26	0.31	83.87
	Ant1	5745	0.26	0.31	83.87
	Ant2	5745	0.26	0.31	83.87
	Ant1	5785	0.26	0.31	83.87
	Ant2	5785	0.26	0.31	83.87
	Ant1	5825	0.26	0.31	83.87
	Ant2	5825	0.26	0.31	83.87
11N40MIMO	Ant1	5190	0.18	0.23	78.26
	Ant2	5190	0.18	0.23	78.26
	Ant1	5230	0.18	0.23	78.26
	Ant2	5230	0.18	0.23	78.26
	Ant1	5270	0.18	0.23	78.26
	Ant2	5270	0.18	0.23	78.26
	Ant1	5310	0.18	0.23	78.26
	Ant2	5310	0.18	0.23	78.26
	Ant1	5510	0.18	0.23	78.26
	Ant2	5510	0.18	0.23	78.26
	Ant1	5550	0.18	0.23	78.26
	Ant2	5550	0.18	0.23	78.26
	Ant1	5670	0.18	0.23	78.26
	Ant2	5670	0.18	0.23	78.26
	Ant1	5710	0.18	0.23	78.26
	Ant2	5710	0.18	0.23	78.26
	Ant1	5755	0.18	0.23	78.26
	Ant2	5755	0.18	0.23	78.26
	Ant1	5795	0.18	0.23	78.26
	Ant2	5795	0.18	0.23	78.26
11AC20MIMO	Ant1	5180	0.16	0.21	76.19
	Ant2	5180	0.16	0.21	76.19
	Ant1	5200	0.16	0.21	76.19
	Ant2	5200	0.16	0.21	76.19
	Ant1	5240	0.16	0.21	76.19
	Ant2	5240	0.16	0.21	76.19
	Ant1	5260	0.16	0.21	76.19
	Ant2	5260	0.17	0.22	77.27
	Ant1	5280	0.16	0.21	76.19
	Ant2	5280	0.16	0.21	76.19
	Ant1	5320	0.16	0.21	76.19

	Ant2	5320	0.16	0.21	76.19
	Ant1	5500	0.16	0.21	76.19
	Ant2	5500	0.16	0.21	76.19
	Ant1	5580	0.16	0.21	76.19
	Ant2	5580	0.16	0.21	76.19
	Ant1	5700	0.16	0.21	76.19
	Ant2	5700	0.16	0.21	76.19
	Ant1	5720	0.16	0.21	76.19
	Ant2	5720	0.16	0.21	76.19
	Ant1	5745	0.16	0.21	76.19
	Ant2	5745	0.16	0.21	76.19
	Ant1	5785	0.16	0.21	76.19
	Ant2	5785	0.16	0.21	76.19
	Ant1	5825	0.16	0.21	76.19
	Ant2	5825	0.16	0.21	76.19
11AC40MIMO	Ant1	5190	0.16	0.21	76.19
	Ant2	5190	0.17	0.22	77.27
	Ant1	5230	0.16	0.21	76.19
	Ant2	5230	0.17	0.22	77.27
	Ant1	5270	0.16	0.21	76.19
	Ant2	5270	0.16	0.21	76.19
	Ant1	5310	0.16	0.21	76.19
	Ant2	5310	0.16	0.21	76.19
	Ant1	5510	0.17	0.22	77.27
	Ant2	5510	0.16	0.21	76.19
	Ant1	5550	0.16	0.21	76.19
	Ant2	5550	0.16	0.21	76.19
	Ant1	5670	0.16	0.21	76.19
	Ant2	5670	0.16	0.21	76.19
	Ant1	5710	0.16	0.21	76.19
	Ant2	5710	0.16	0.21	76.19
	Ant1	5755	0.16	0.21	76.19
	Ant2	5755	0.16	0.21	76.19
	Ant1	5795	0.16	0.21	76.19
	Ant2	5795	0.16	0.21	76.19
11AC80MIMO	Ant1	5210	0.16	0.21	76.19
	Ant2	5210	0.16	0.21	76.19
	Ant1	5290	0.16	0.21	76.19
	Ant2	5290	0.16	0.21	76.19
	Ant1	5530	0.16	0.21	76.19
	Ant2	5530	0.16	0.21	76.19
	Ant1	5610	0.16	0.21	76.19
	Ant2	5610	0.16	0.21	76.19
	Ant1	5690	0.16	0.21	76.19
	Ant2	5690	0.16	0.21	76.19
	Ant1	5775	0.16	0.21	76.19
	Ant2	5775	0.16	0.21	76.19
11AC160MIMO	Ant1	5250	0.17	0.21	80.95
	Ant2	5250	0.16	0.21	76.19
	Ant1	5570	0.17	0.21	80.95
	Ant2	5570	0.17	0.21	80.95
11AX20MIMO	Ant1	5180	0.18	0.23	78.26
	Ant2	5180	0.18	0.23	78.26
	Ant1	5200	0.18	0.23	78.26
	Ant2	5200	0.18	0.23	78.26
	Ant1	5240	0.18	0.23	78.26
	Ant2	5240	0.18	0.23	78.26
	Ant1	5260	0.18	0.23	78.26
	Ant2	5260	0.18	0.23	78.26
	Ant1	5280	0.18	0.23	78.26

	Ant2	5280	0.18	0.23	78.26
	Ant1	5320	0.18	0.23	78.26
	Ant2	5320	0.18	0.23	78.26
	Ant1	5500	0.18	0.23	78.26
	Ant2	5500	0.18	0.23	78.26
	Ant1	5580	0.18	0.23	78.26
	Ant2	5580	0.18	0.23	78.26
	Ant1	5700	0.18	0.23	78.26
	Ant2	5700	0.18	0.23	78.26
	Ant1	5720	0.18	0.23	78.26
	Ant2	5720	0.18	0.23	78.26
	Ant1	5745	0.18	0.23	78.26
	Ant2	5745	0.18	0.23	78.26
	Ant1	5785	0.18	0.23	78.26
	Ant2	5785	0.18	0.23	78.26
	Ant1	5825	0.18	0.23	78.26
	Ant2	5825	0.18	0.23	78.26
11AX40MIMO	Ant1	5190	0.18	0.23	78.26
	Ant2	5190	0.18	0.23	78.26
	Ant1	5230	0.19	0.23	82.61
	Ant2	5230	0.18	0.23	78.26
	Ant1	5270	0.19	0.23	82.61
	Ant2	5270	0.18	0.23	78.26
	Ant1	5310	0.18	0.23	78.26
	Ant2	5310	0.18	0.23	78.26
	Ant1	5510	0.18	0.23	78.26
	Ant2	5510	0.18	0.23	78.26
	Ant1	5550	0.19	0.23	82.61
	Ant2	5550	0.18	0.23	78.26
	Ant1	5670	0.19	0.23	82.61
	Ant2	5670	0.19	0.23	82.61
	Ant1	5710	0.19	0.23	82.61
	Ant2	5710	0.18	0.23	78.26
	Ant1	5755	0.18	0.23	78.26
	Ant2	5755	0.18	0.23	78.26
	Ant1	5795	0.18	0.23	78.26
	Ant2	5795	0.19	0.23	82.61
11AX80MIMO	Ant1	5210	0.16	0.21	76.19
	Ant2	5210	0.16	0.21	76.19
	Ant1	5290	0.16	0.21	76.19
	Ant2	5290	0.16	0.21	76.19
	Ant1	5530	0.16	0.21	76.19
	Ant2	5530	0.16	0.21	76.19
	Ant1	5610	0.16	0.21	76.19
	Ant2	5610	0.17	0.22	77.27
	Ant1	5690	0.16	0.21	76.19
	Ant2	5690	0.16	0.21	76.19
	Ant1	5775	0.16	0.21	76.19
	Ant2	5775	0.16	0.21	76.19
11AX160MIMO	Ant1	5250	0.18	0.23	78.26
	Ant2	5250	0.17	0.22	77.27
	Ant1	5570	0.17	0.22	77.27
	Ant2	5570	0.17	0.22	77.27

8.5. Original Test Data















