

Regulatory WWAN Antenna Information

Platform information						
Brand	ODM	Platform model name		Platform type (ex: regular NB, convertible PC, AIO...etc)		*SAR minimum separation (mm)
HP Inc.	Inventec	Cannonball 2.0 (HSC-I006R)		Tablet		2.5mm
Antenna information						Maximum Peak gain
Vendor	Type	Antenna Part number (Ant5 TX/RX)	Antenna Part number (Ant6 RX)	Antenna Part number (Ant7 RX)	Antenna Part number (Ant8 RX)	ANT5 1850 MHz
WNC	PIFA	6036B0323801 (81ELA215.G57)	6036B0324201 (81ELA215.G59)	6036B0323801 (81ELA215.G57)	6036B0324001 (81ELA215.G60)	2.30 dBi
Module information						
Model	Form factor and suffixes (NGW/ HMW AND AN/ NB/ BN....)					
Patron	Fibocom L860R WWAN 4x4 LTE radio module					

Antenna Sample / Antenna Data

Requirements for worldwide regulatory approval

Section	Description of Required OEM / ODM Antenna Information	US / IC	EU	Japan	Taiwan	S.Korea
1A	Part Number for Antenna Assembly	Required	Required	Required	Required	Required
1B	Antenna Manufacturer Name	Required	Required	Required	Required	Required
1C	Description of Antenna Type	Required	N/A	N/A	N/A	N/A
1D	Tx antenna Gain(Peak Gain W/ cable loss) *	Required	Required	Required	Required	Required
2	Dimensioned Photographs and Drawings of Tx and Rx antennas	Required	Required	Required	Required	Required
3	Radiation patterns of antennas loaded in the host platform.	N/A	Required	Required	Required	N/A
4	Platform model name / number - correlated to antenna manufacturer and antenna part number	Required	Required	Desired	Required	Desired
5	Photograph(s) or Drawings showing location of antennas in platform. (S. Korea requires photographs of antennas for approval submission). Taiwan requires pictures of each antenna type shown in the system.	Required	Required	Desired	<u>Required (Photos)</u>	<u>Required (Photos)</u>
6	Mech. drawings / photos with dimensions of antenna locations and distance from end-user (For evaluation of SAR testing requirement).	Required	N/A	N/A	N/A	N/A
7	Photograph(s) or Drawings showing the location of all antennas (WLAN, other) and distance between those transmitting antennas. Information will be used to evaluate whether co-location testing is required.	Required	N/A	N/A	N/A	N/A
8	Local representative contact information for LMA/ PARS process.	Required	N/A	N/A	N/A	N/A

Antenna Information

Section 1. Antenna Assembly Specifications

Communication System	Band	Frequency(MHz) from low to high spectrum		1A Part Number for Antenna Assembly	1B Antenna Manufacturer Name	1C Description of Antenna Type	1D Tx Antenna Gain(dBi) Ant5
WCDMA/ LTE	1	1920	1980	Ant5 : 81ELA215.G57	WNC	PIFA	1.73
WCDMA/ LTE	2	1850	1910				2.30
LTE	3	1710	1785				1.29
WCDMA/ LTE	4	1710	1755				0.66
WCDMA/ LTE	5	824	849				-1.56
LTE	7	2500	2570				-2.64
WCDMA/ LTE	8	880	915				-2.01
LTE	12	699	716				-0.36
LTE	13	777	787				-2.25
LTE	14	788	798				-2.75
LTE	17	704	716				-0.36
LTE	18	815	830				-1.56
LTE	19	830	845				-1.56
LTE	20	832	862				-1.61
LTE	25	1850	1915				2.30
LTE	26	814	849				-1.56
LTE	28	703	748				-0.09
LTE	30	2305	2315				0.19
LTE	34	2010	2025				2.04
LTE	38	2570	2620				-2.05
LTE	39	1880	1920				1.81
LTE	40	2300	2400				0.34
LTE	41	2496	2690				0.94
LTE	42	3400	3600				2.00
LTE	43	3600	3800				1.72
LTE	48	3550	3700				0.54
LTE	66	1710	1780				1.25
LTE	71	663	698				-1.32


- Antenna Peak Gain required being test in system basis.

Section 2. Dimensioned Photos or Drawings of Antennas


	Ant supplier	Part number	Drawing	Photo
Ant5	6036B0323801	81ELA215.G57	V	V
Ant6	6036B0324201	81ELA215.G59	V	V
Ant7	6036B0323801	81ELA215.G57	V	V
Ant8	6036B0324001	81ELA215.G60	V	V

The listed frequency 2D radiation pattern is required

● Ant5:

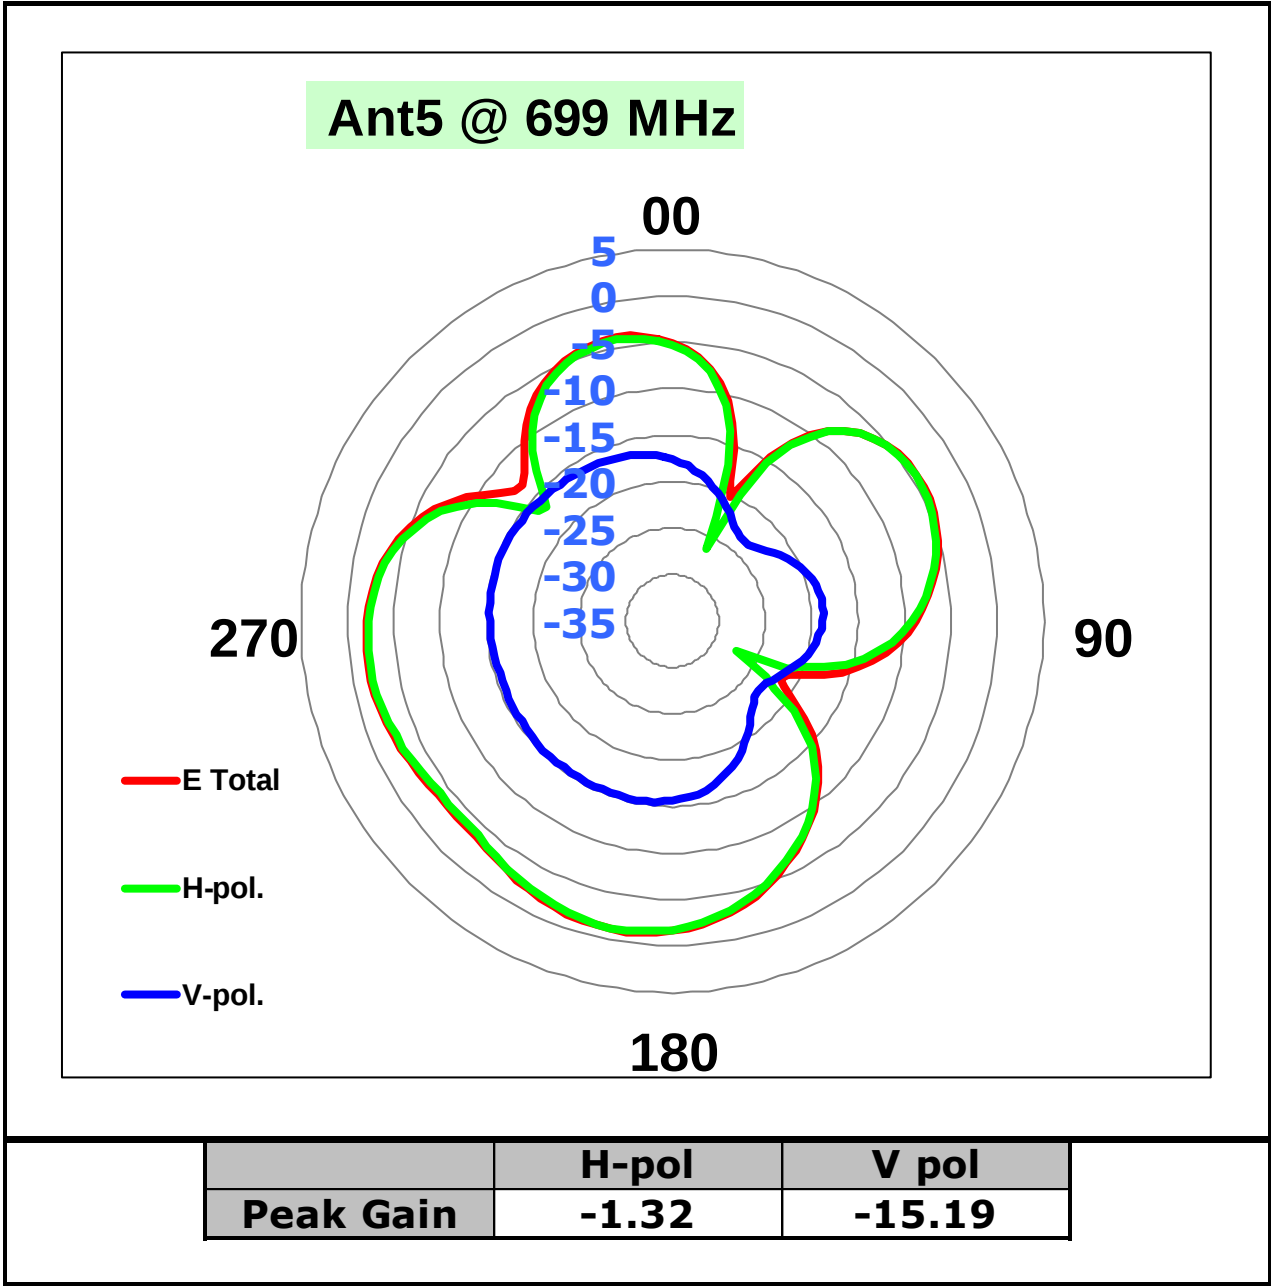


Ant5 @ 703 MHz

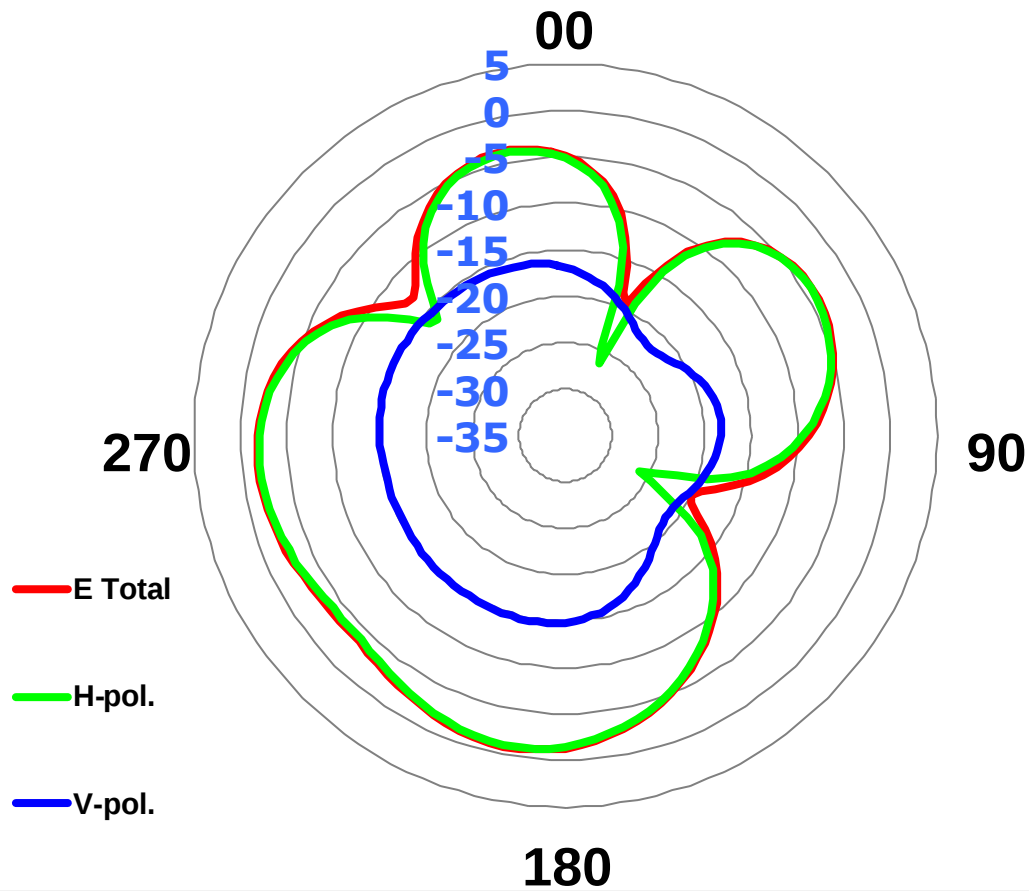


	H-pol	V pol
Peak Gain	-1.08	-14.67

Ant5 @ 707 MHz

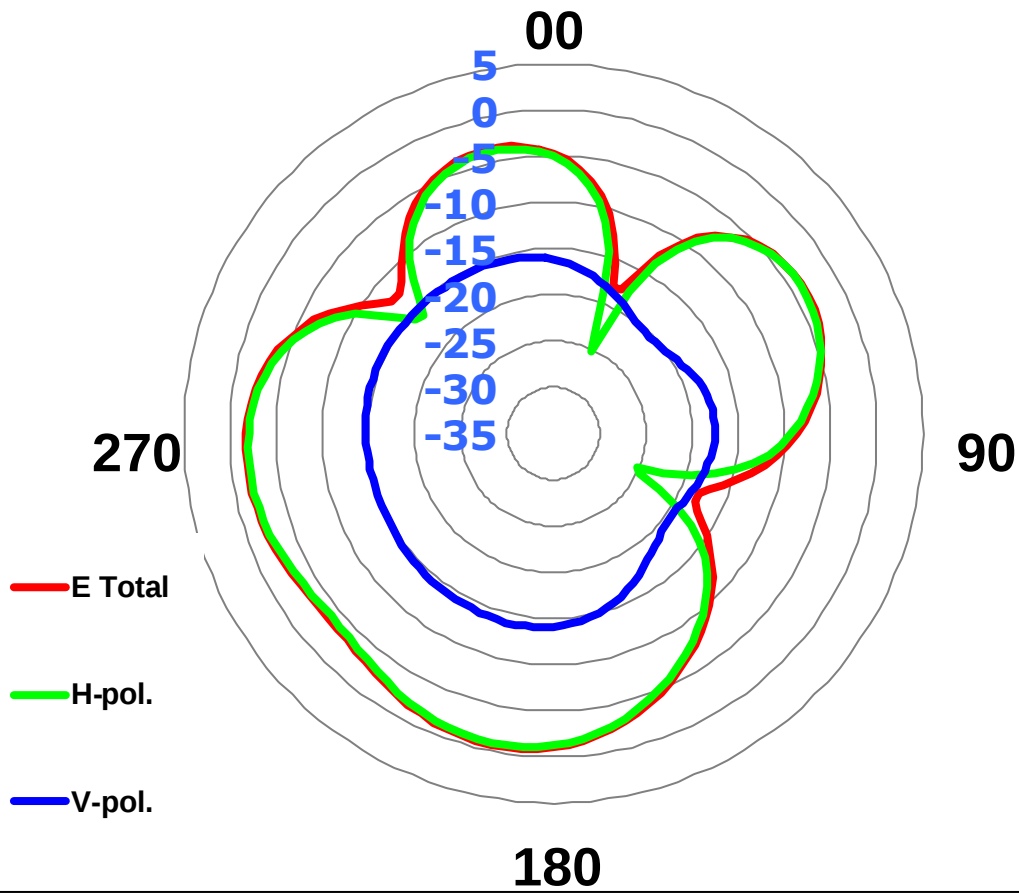


	H-pol	V pol
Peak Gain	-0.82	-13.91

Ant5 @ 710 MHz

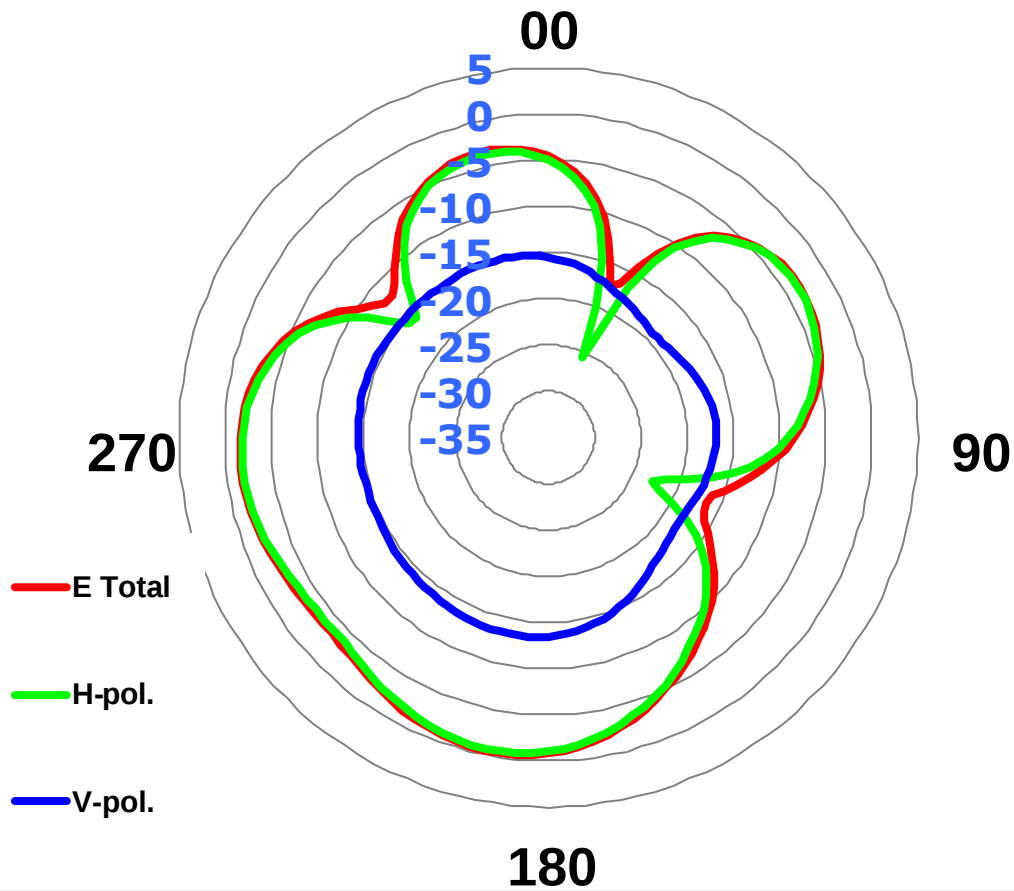


	H-pol	V pol
Peak Gain	-0.62	-13.31

Ant5 @ 715 MHz

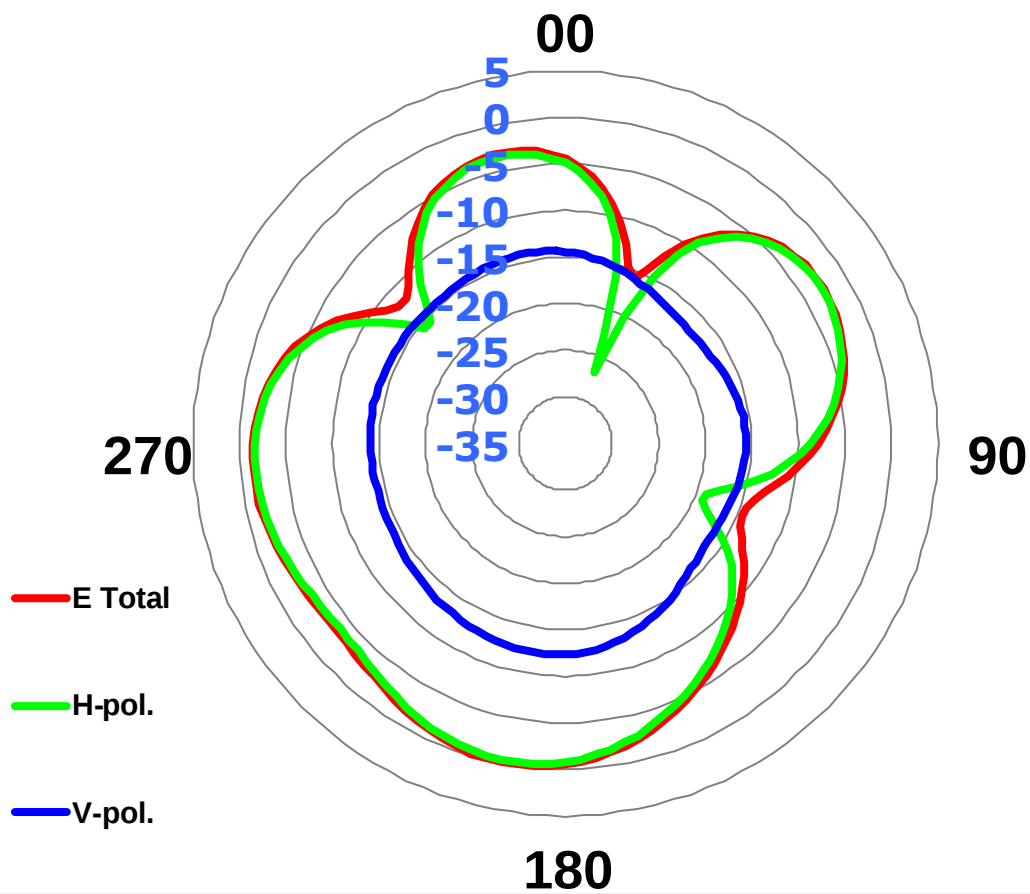


	H-pol	V pol
Peak Gain	-0.36	-12.28

Ant5 @ 722 MHz

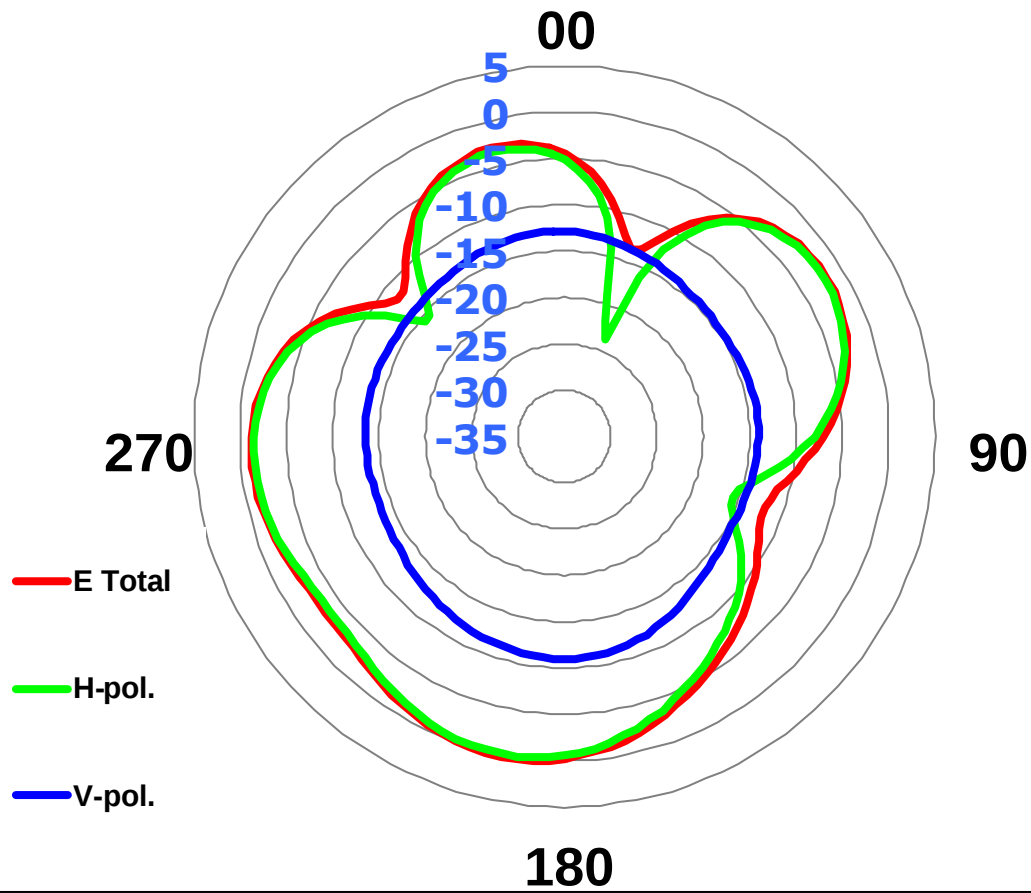


	H-pol	V pol
Peak Gain	-0.09	-10.97

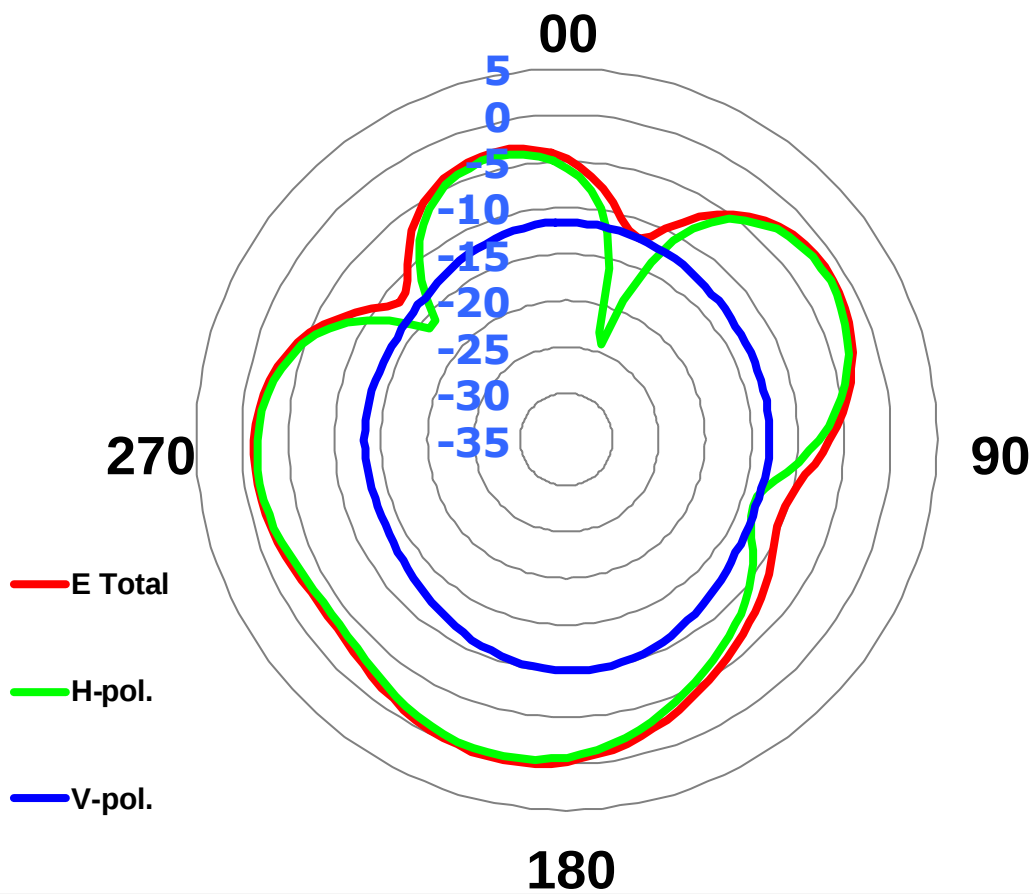Ant5 @ 728 MHz


	H-pol	V pol
Peak Gain	-0.13	-9.99

Ant5 @ 734 MHz

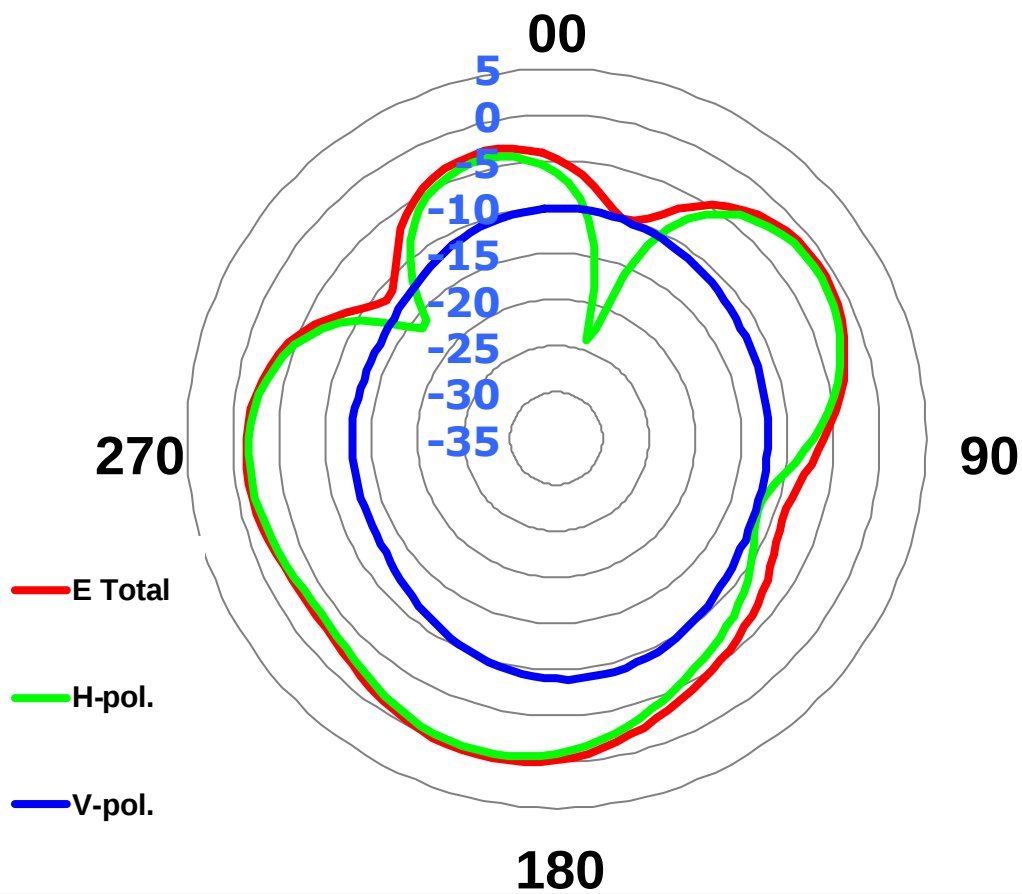


	H-pol	V pol
Peak Gain	-0.15	-8.89

Ant5 @ 737 MHz

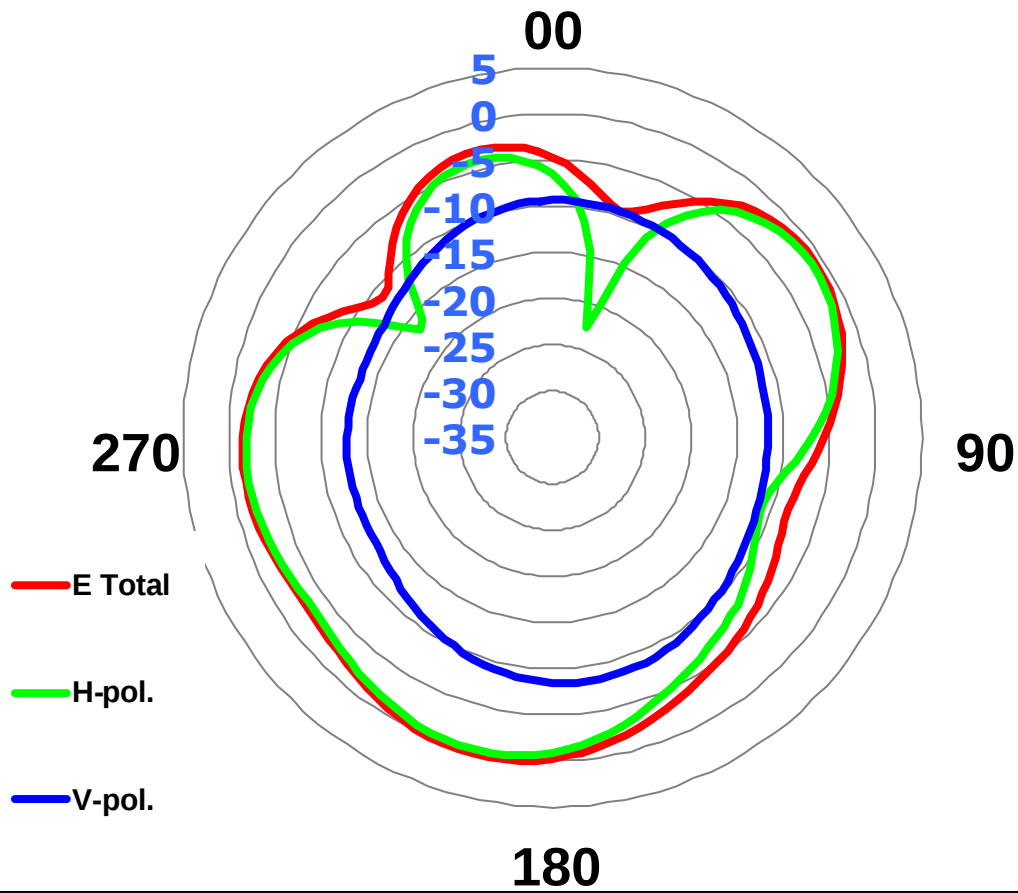


	H-pol	V pol
Peak Gain	-0.21	-8.34

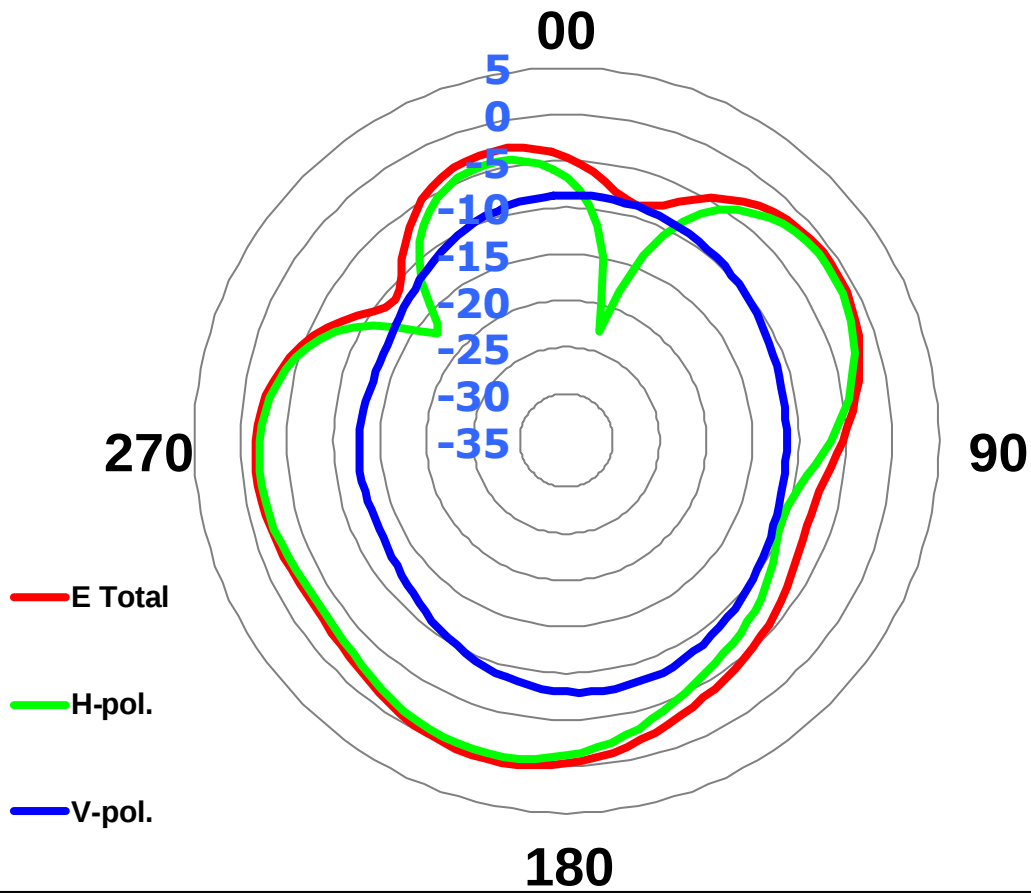
Ant5 @ 740 MHz

	H-pol	V pol
Peak Gain	-0.35	-7.81

Ant5 @ 745 MHz

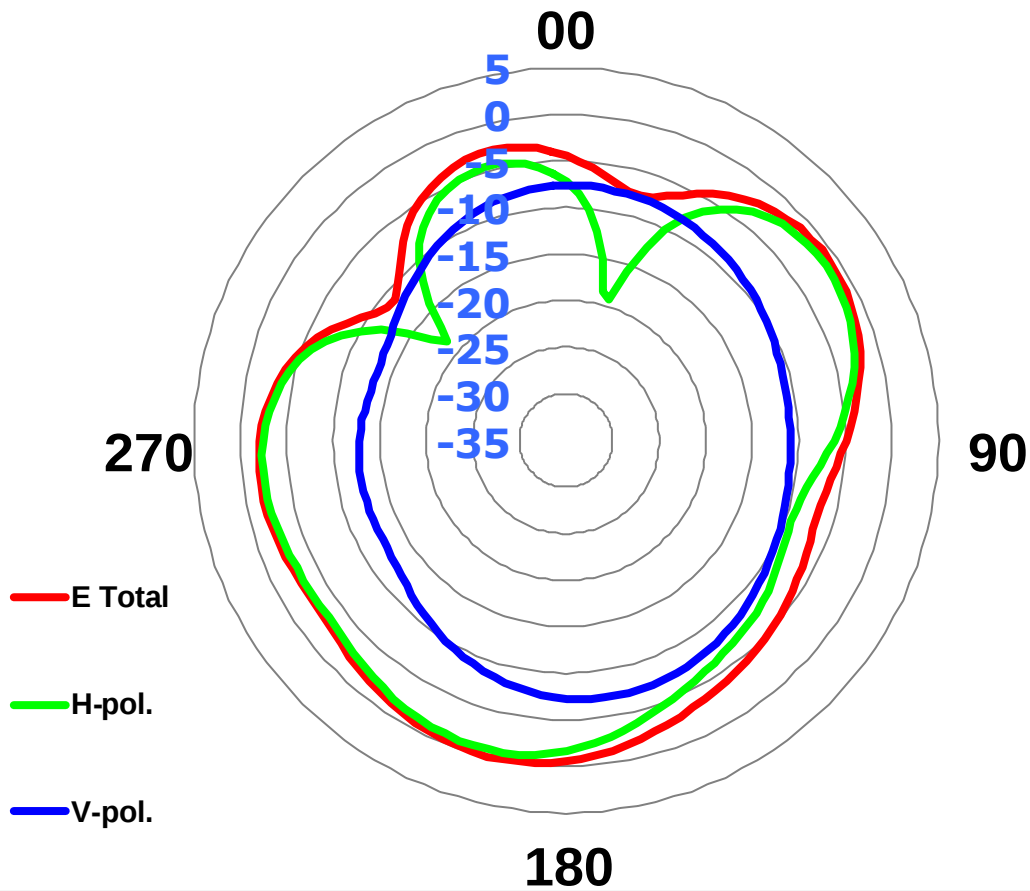


	H-pol	V pol
Peak Gain	-0.75	-7.03

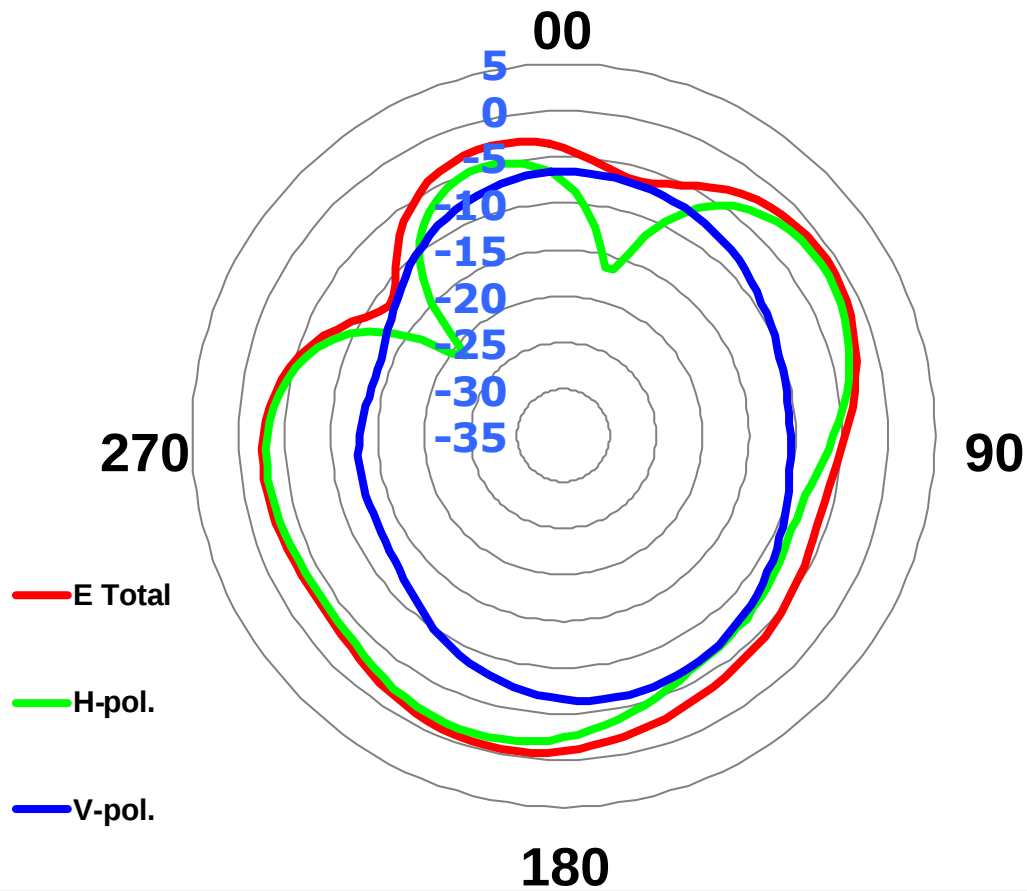
Ant5 @ 751 MHz

	H-pol	V pol
Peak Gain	-1.48	-6.17

Ant5 @ 756 MHz

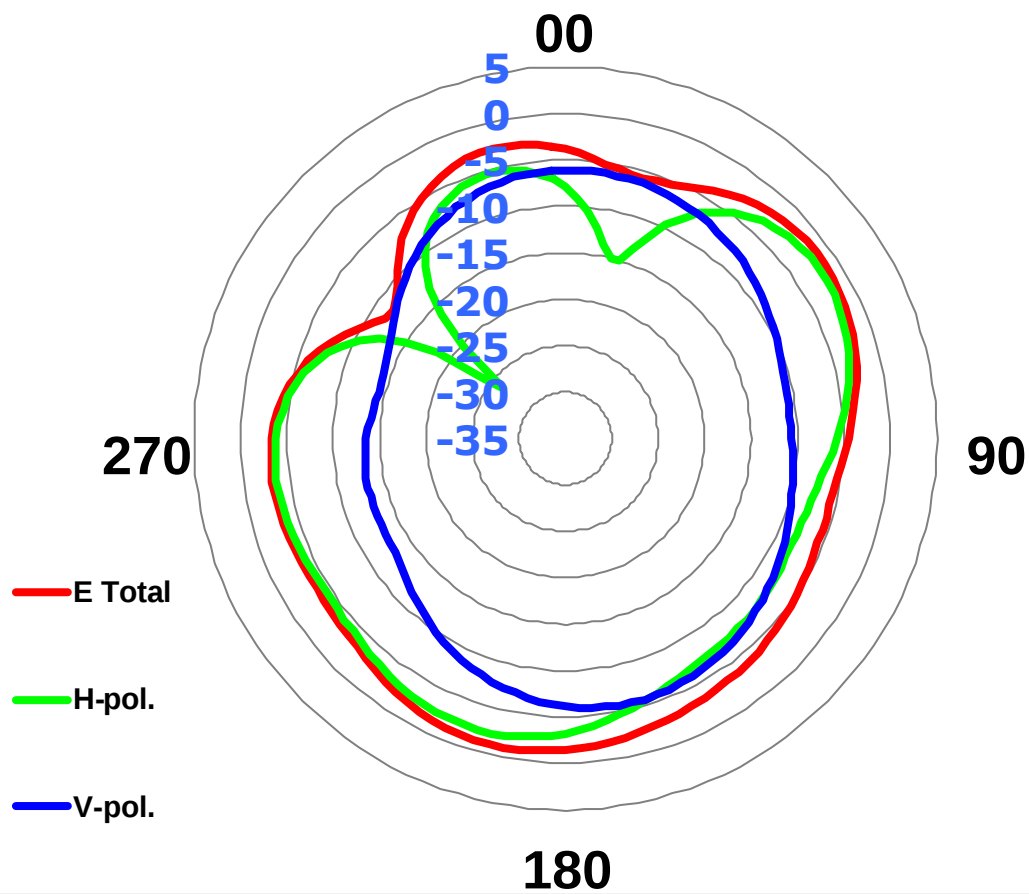


	H-pol	V pol
Peak Gain	-2.12	-5.67

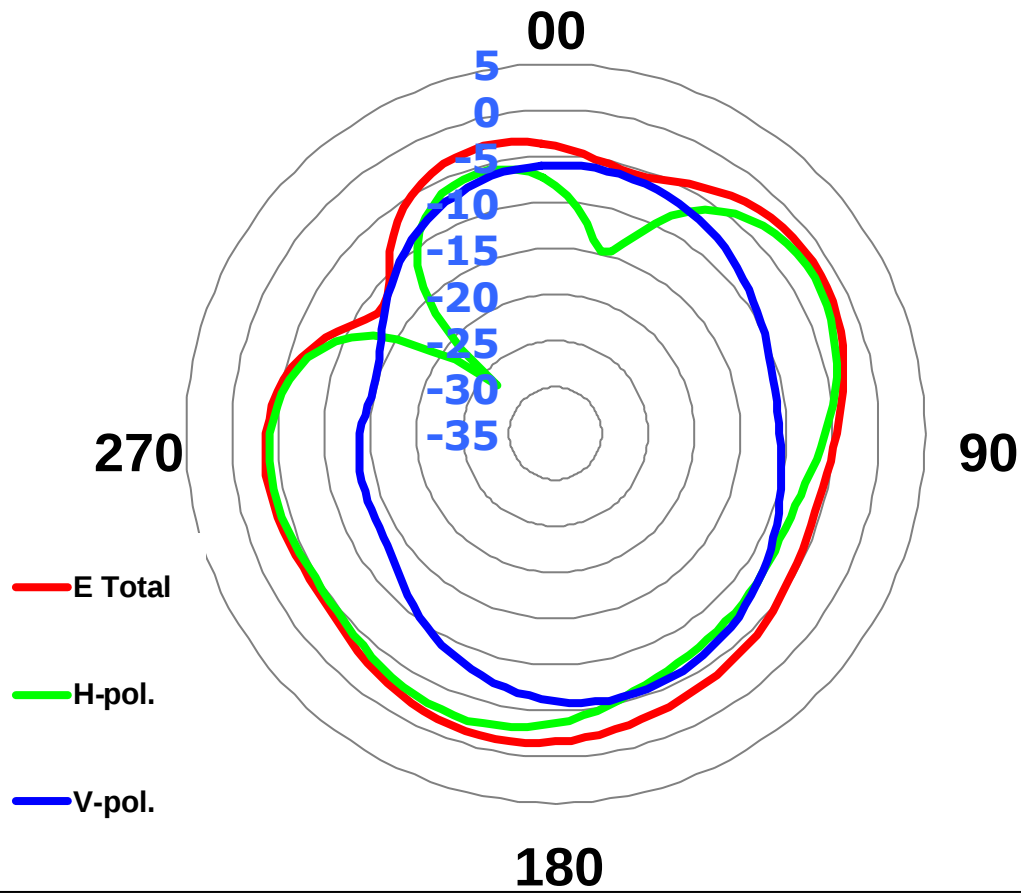Ant5 @ 758 MHz


	H-pol	V pol
Peak Gain	-2.35	-5.53

Ant5 @ 763 MHz

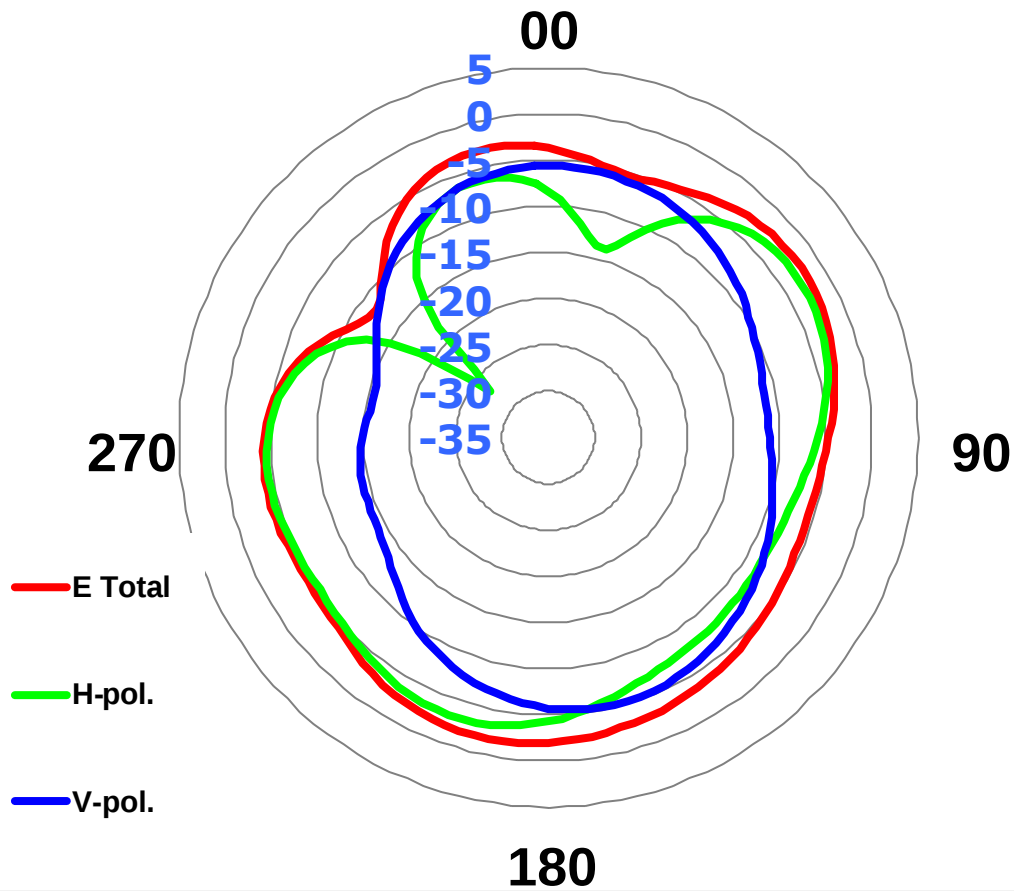


	H-pol	V pol
Peak Gain	-2.88	-5.20

Ant5 @ 768 MHz

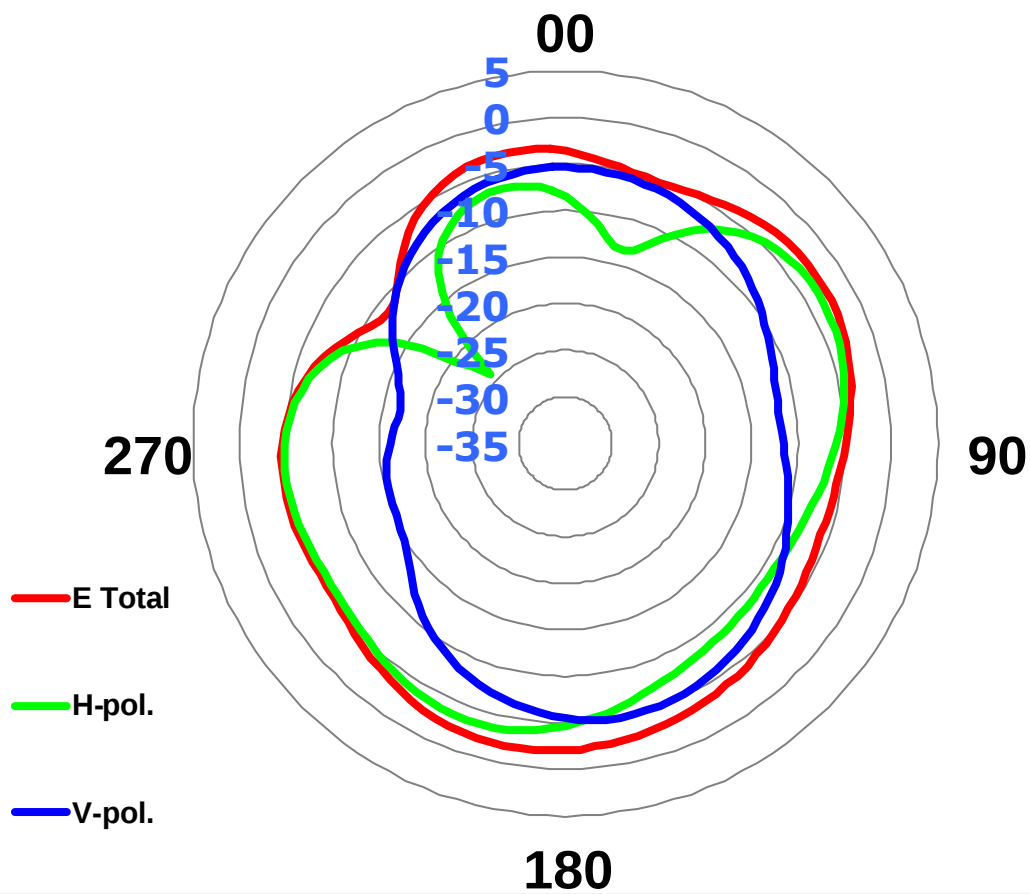


	H-pol	V pol
Peak Gain	-3.41	-4.98


Ant5 @ 777 MHz

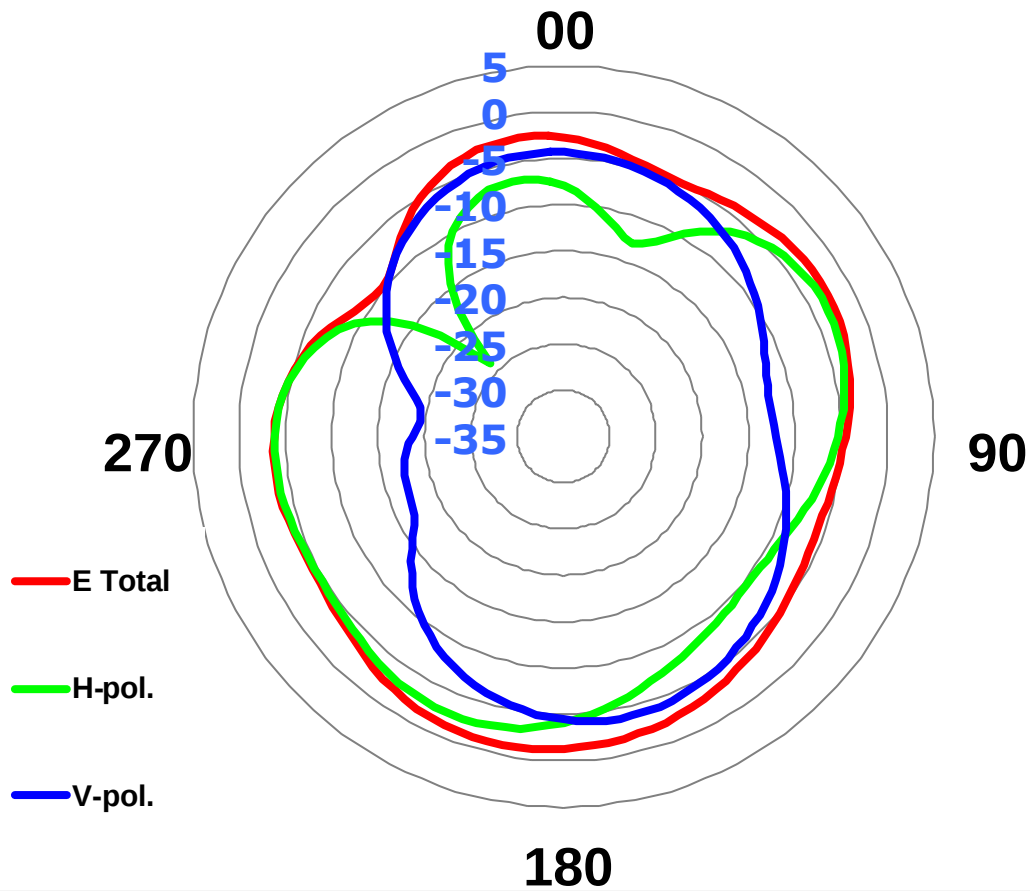

	H-pol	V pol
Peak Gain	-2.61	-3.97

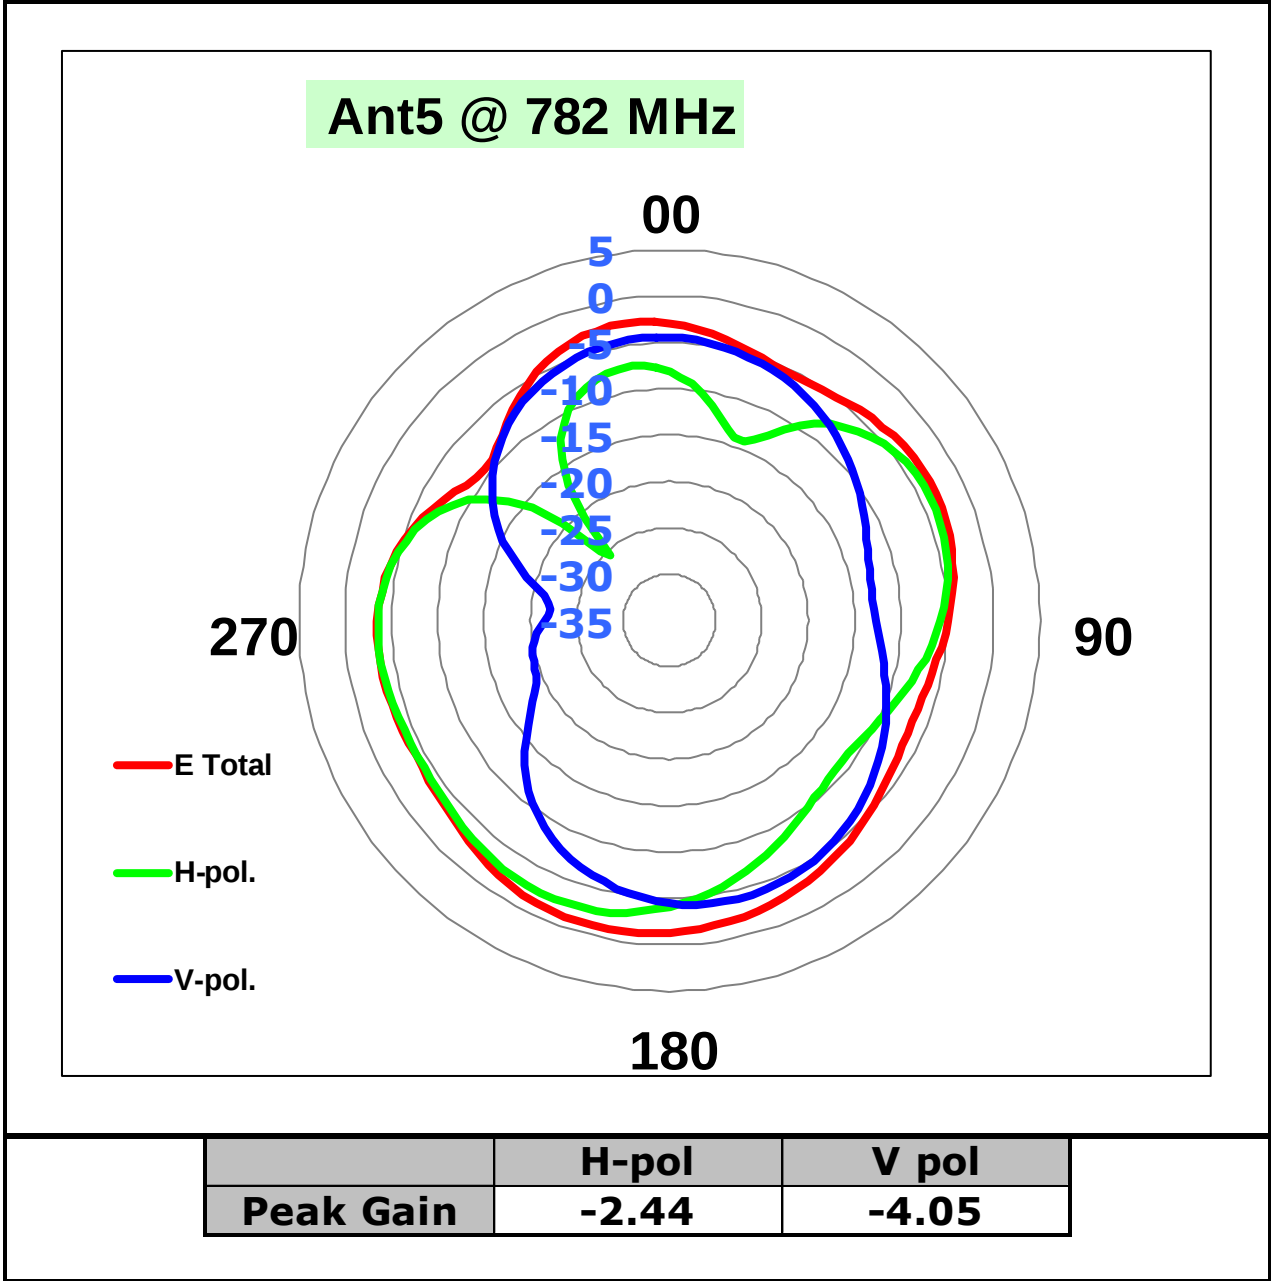


Ant5 @ 786 MHz

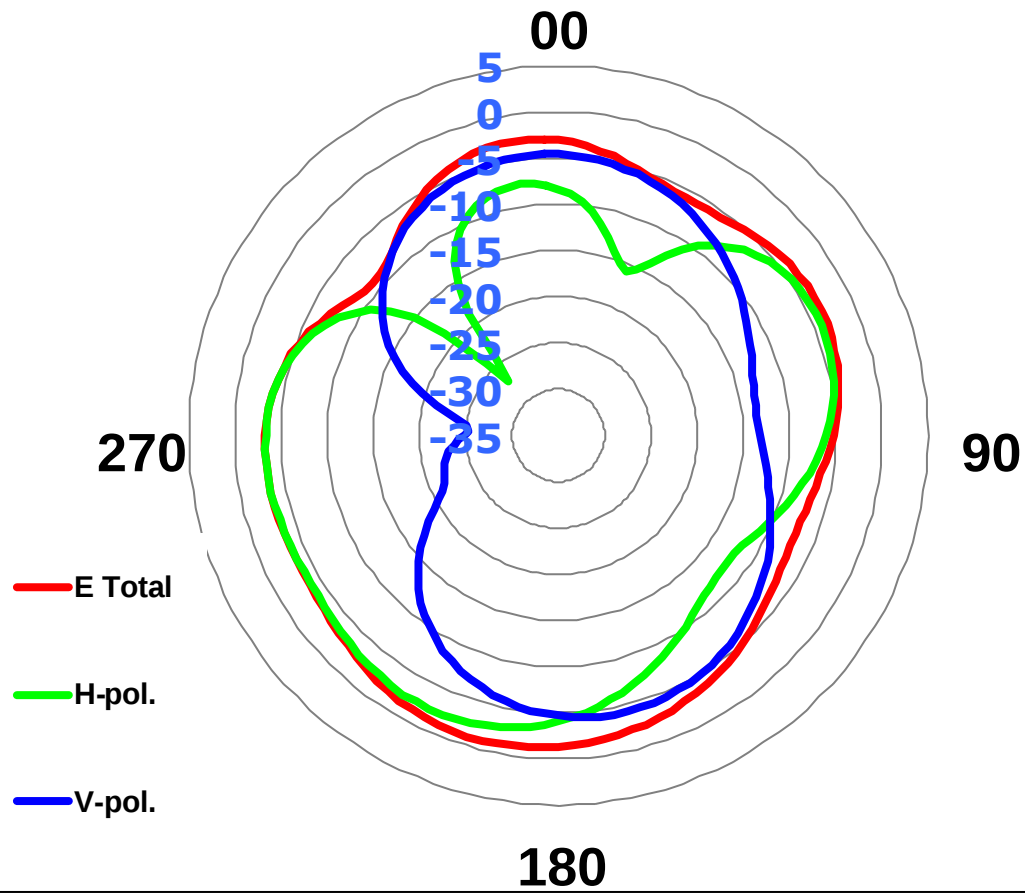


	H-pol	V pol
Peak Gain	-2.25	-4.20


Ant5 @ 791 MHz

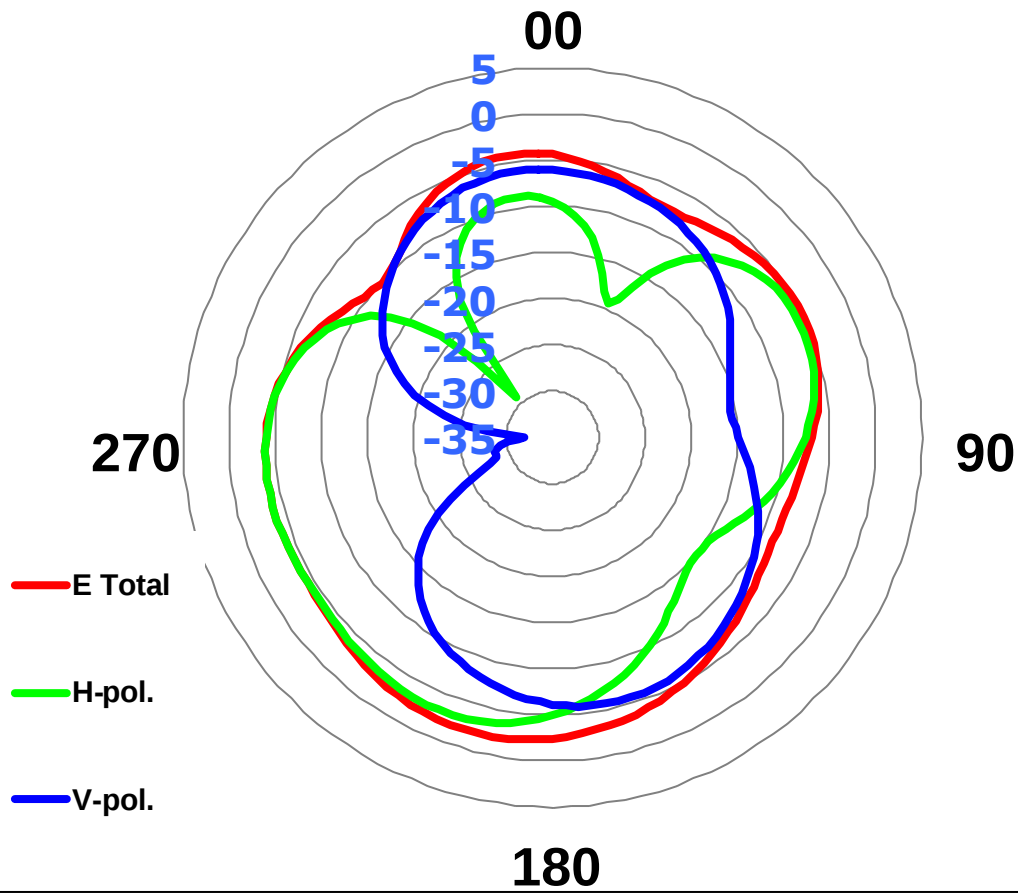

	H-pol	V pol
Peak Gain	-3.06	-5.56

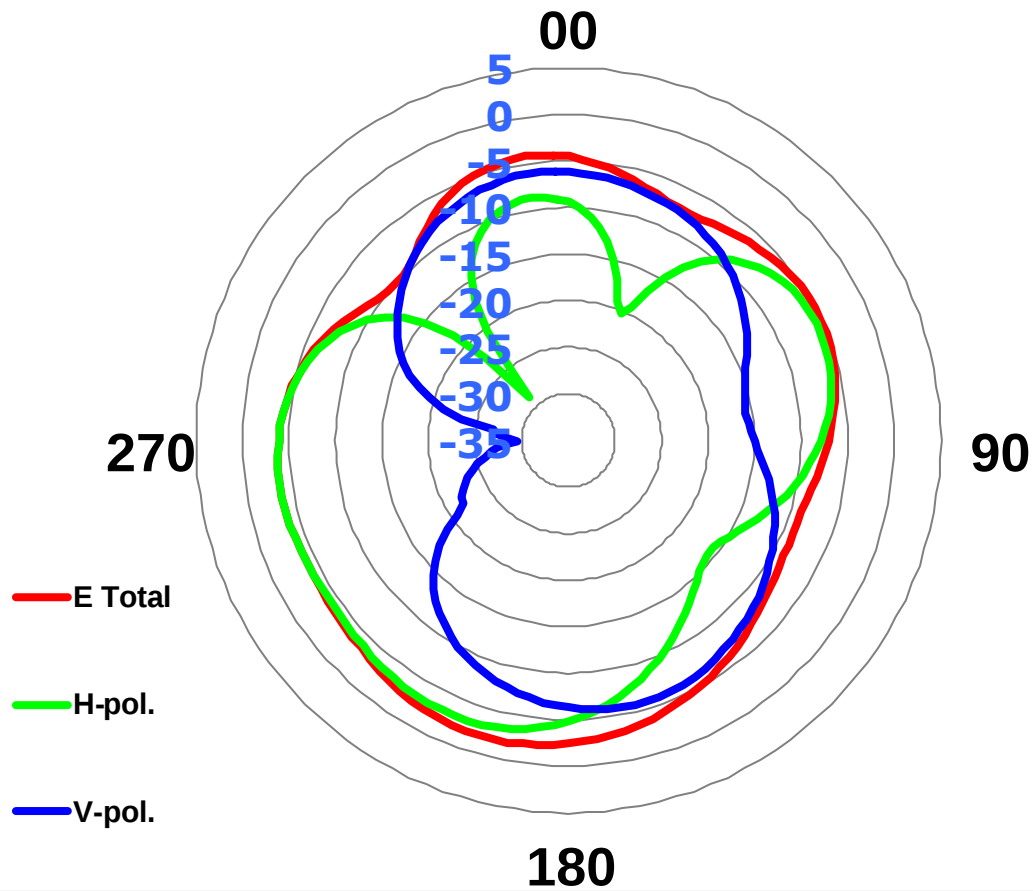
Ant5 @ 793 MHz

	H-pol	V pol
Peak Gain	-2.97	-5.70

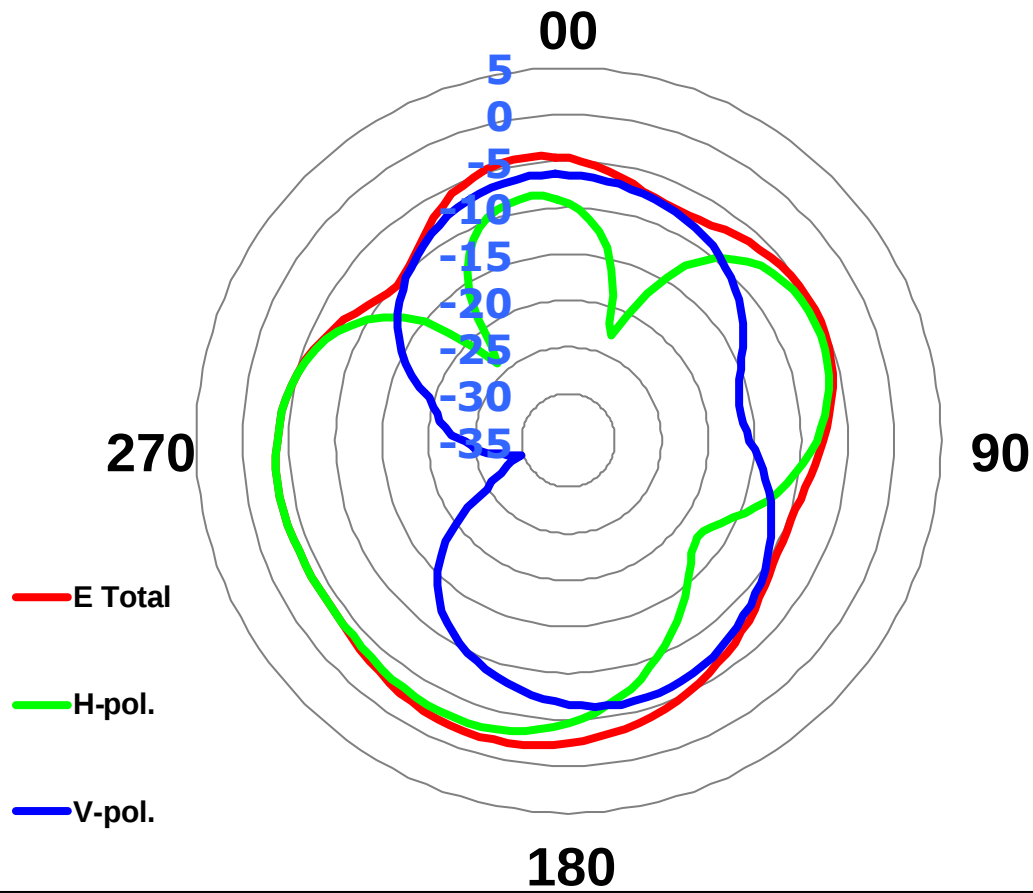
Ant5 @ 798 MHz

	H-pol	V pol
Peak Gain	-2.75	-6.10


Ant5 @ 803 MHz

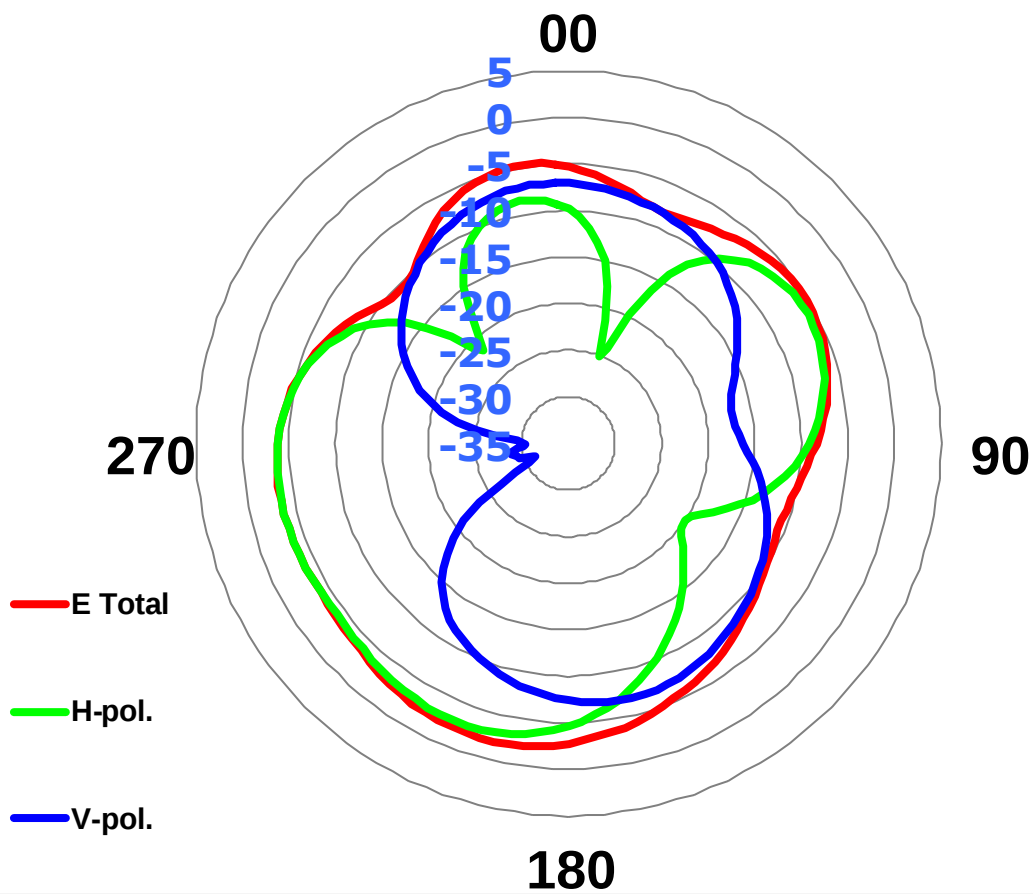


	H-pol	V pol
Peak Gain	-2.79	-6.86

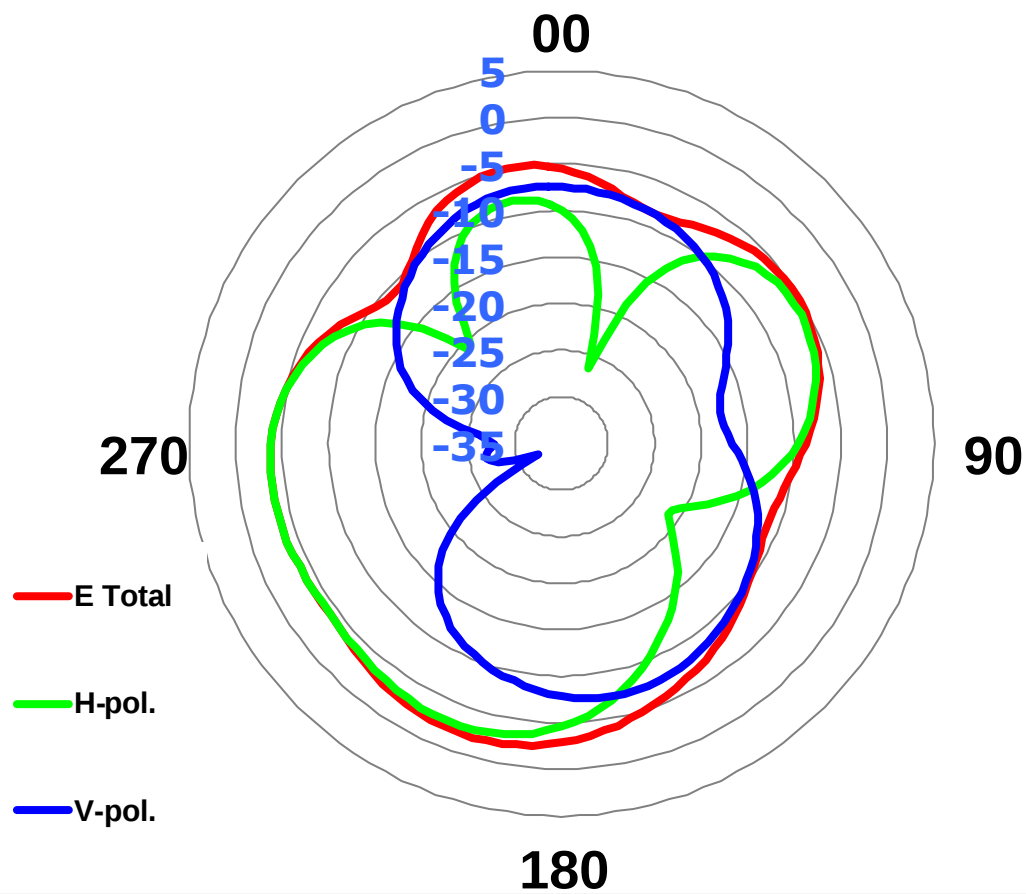Ant5 @ 806 MHz

	H-pol	V pol
Peak Gain	-2.76	-7.29

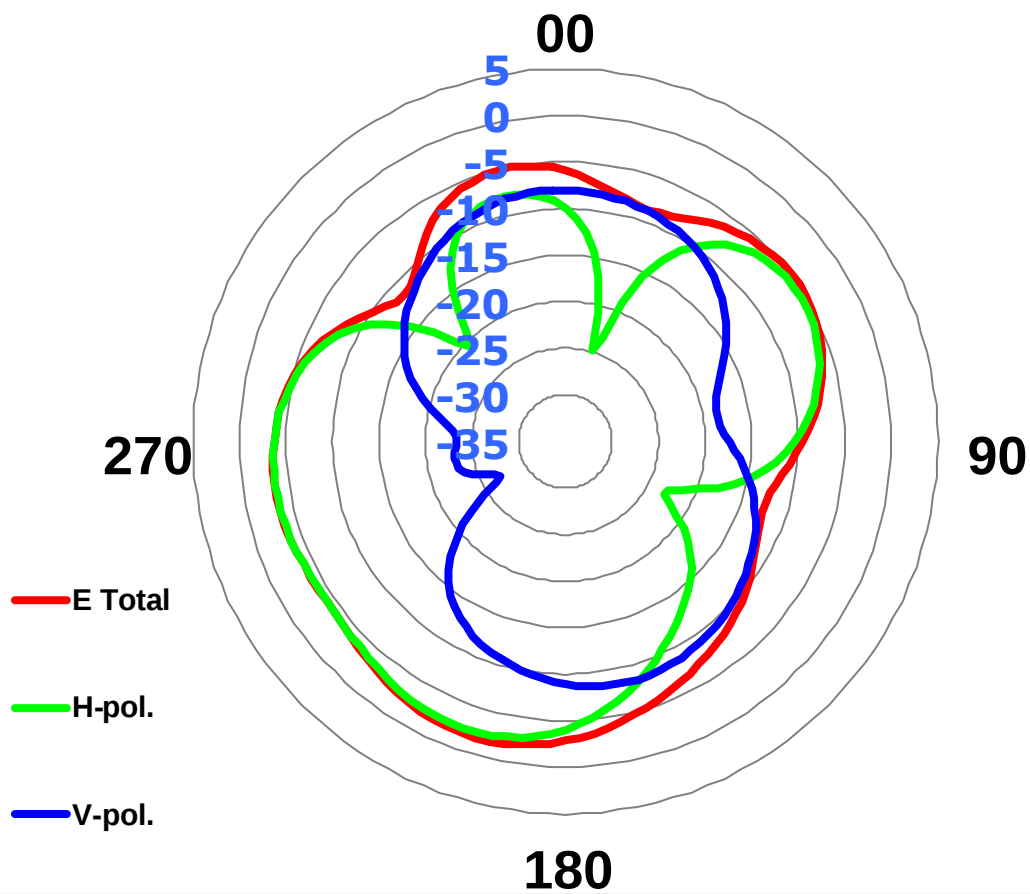
Ant5 @ 814 MHz

	H-pol	V pol
Peak Gain	-2.32	-8.00

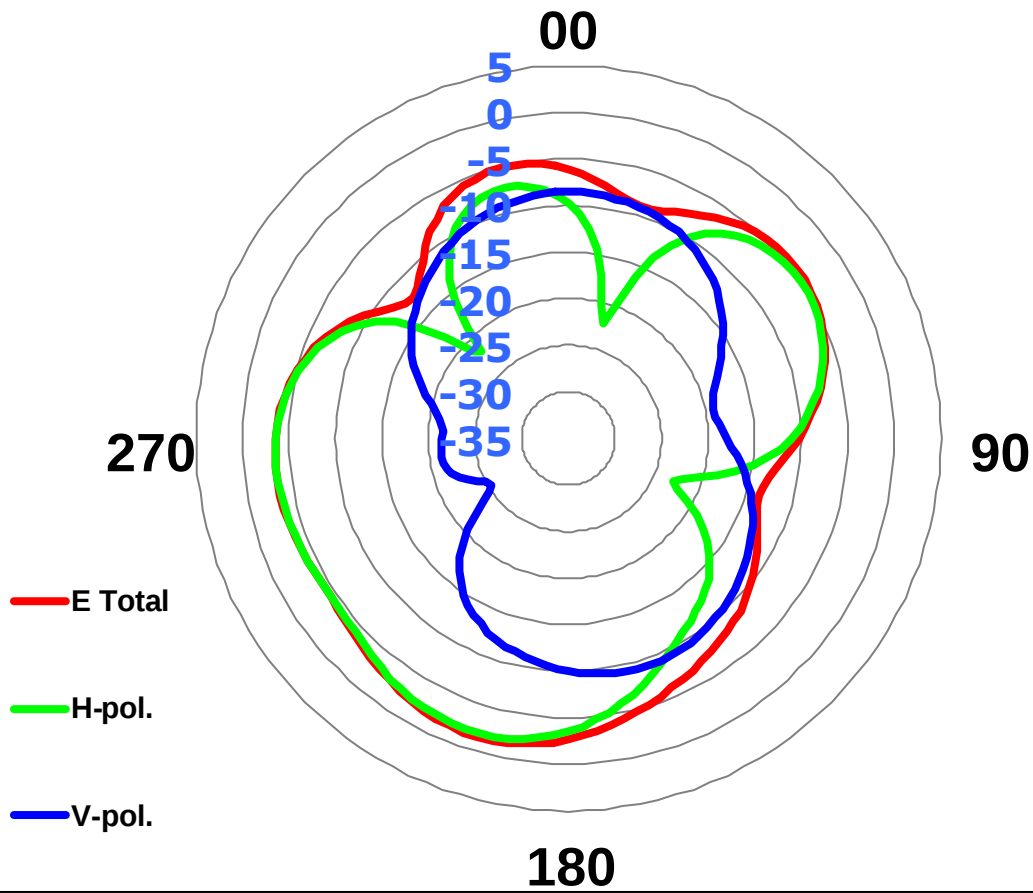Ant5 @ 821 MHz


	H-pol	V pol
Peak Gain	-1.90	-8.56

Ant5 @ 824 MHz

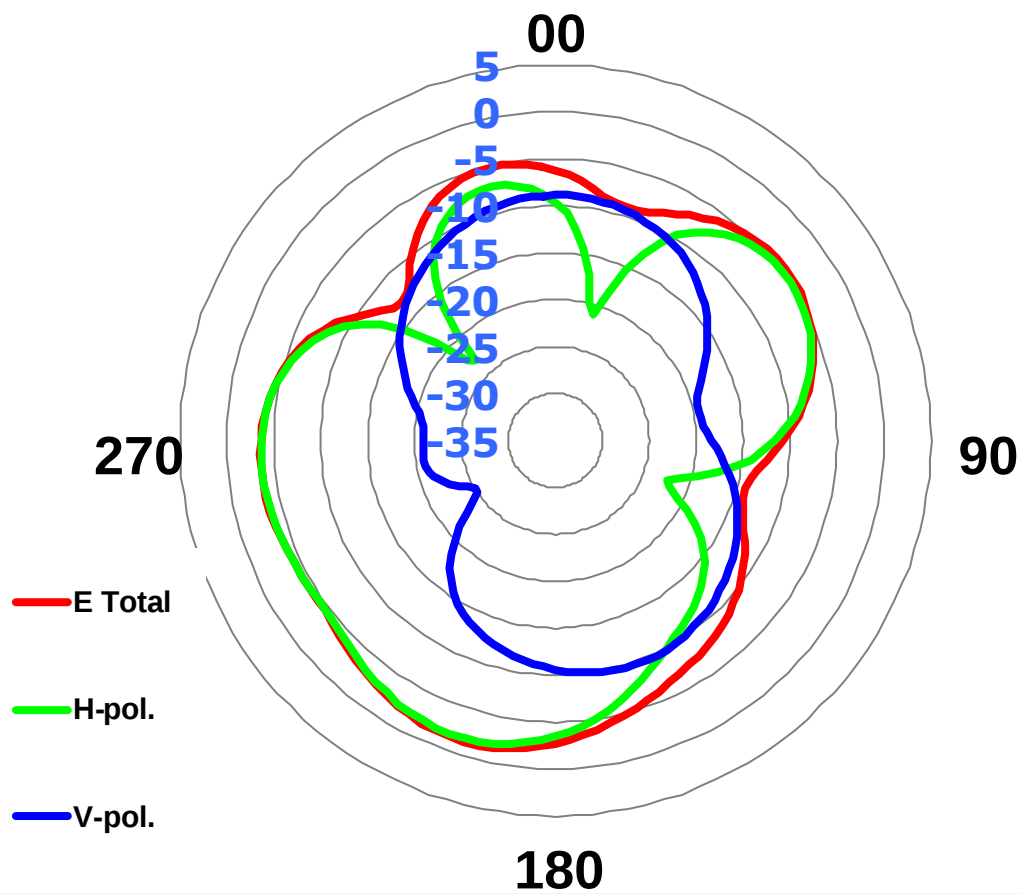


	H-pol	V pol
Peak Gain	-1.82	-8.90


Ant5 @ 830 MHz

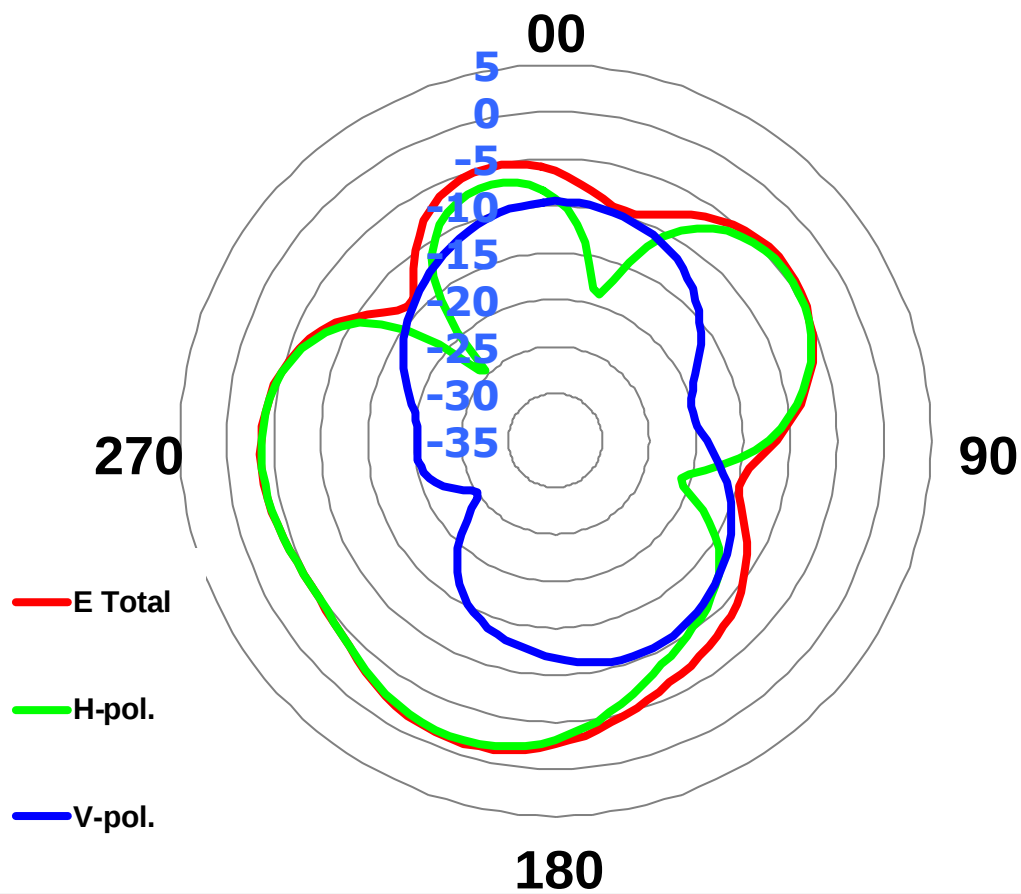

	H-pol	V pol
Peak Gain	-1.56	-9.55

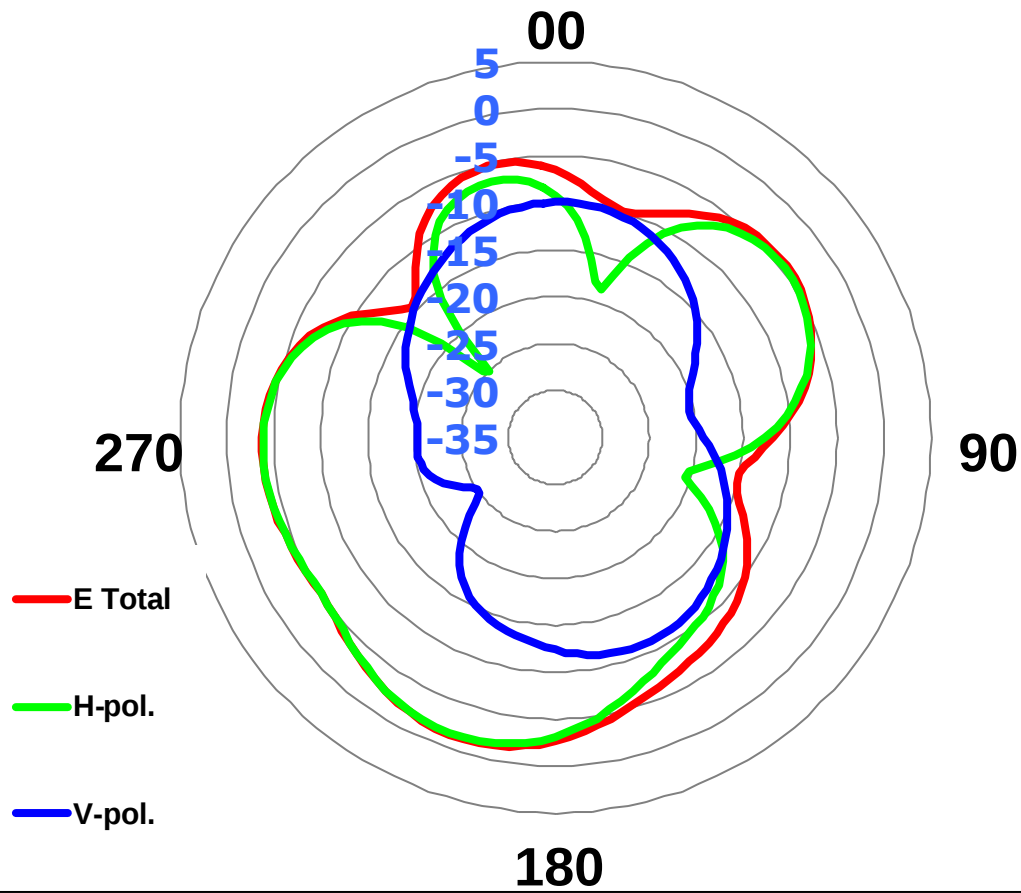
Ant5 @ 832 MHz

	H-pol	V pol
Peak Gain	-1.61	-9.93

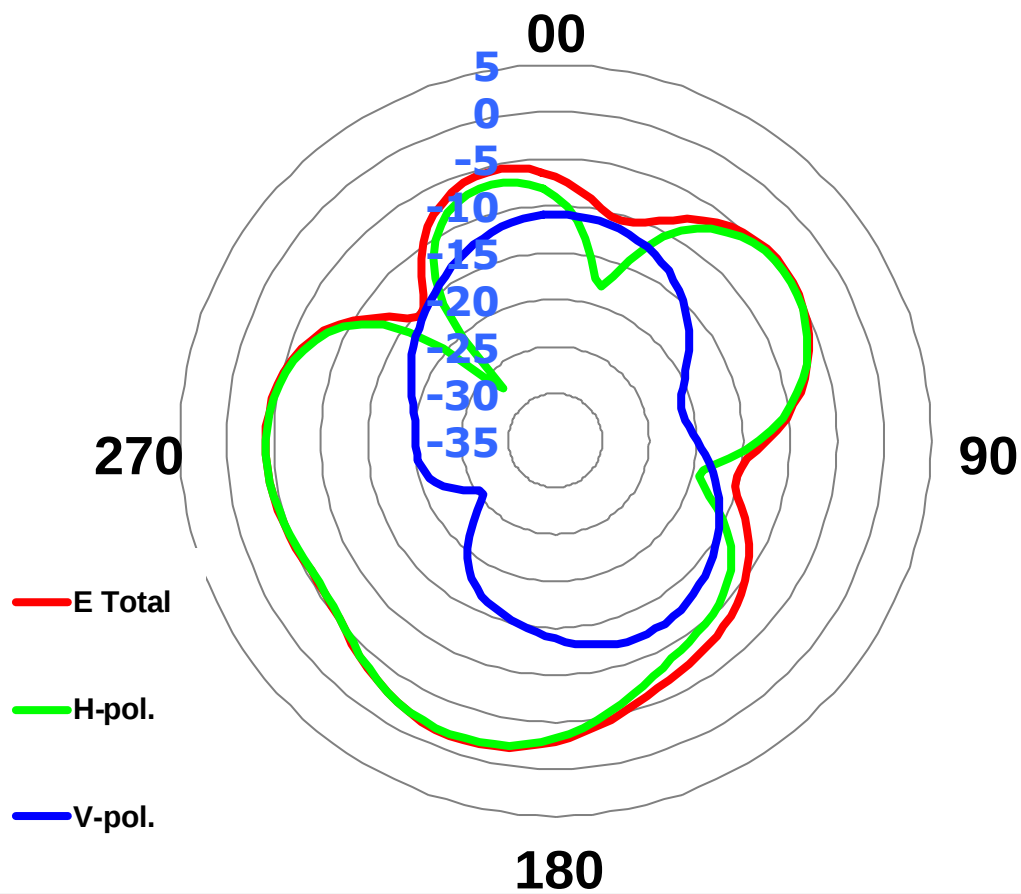
Ant5 @ 837 MHz


	H-pol	V pol
Peak Gain	-1.76	-10.95


Ant5 @ 845 MHz

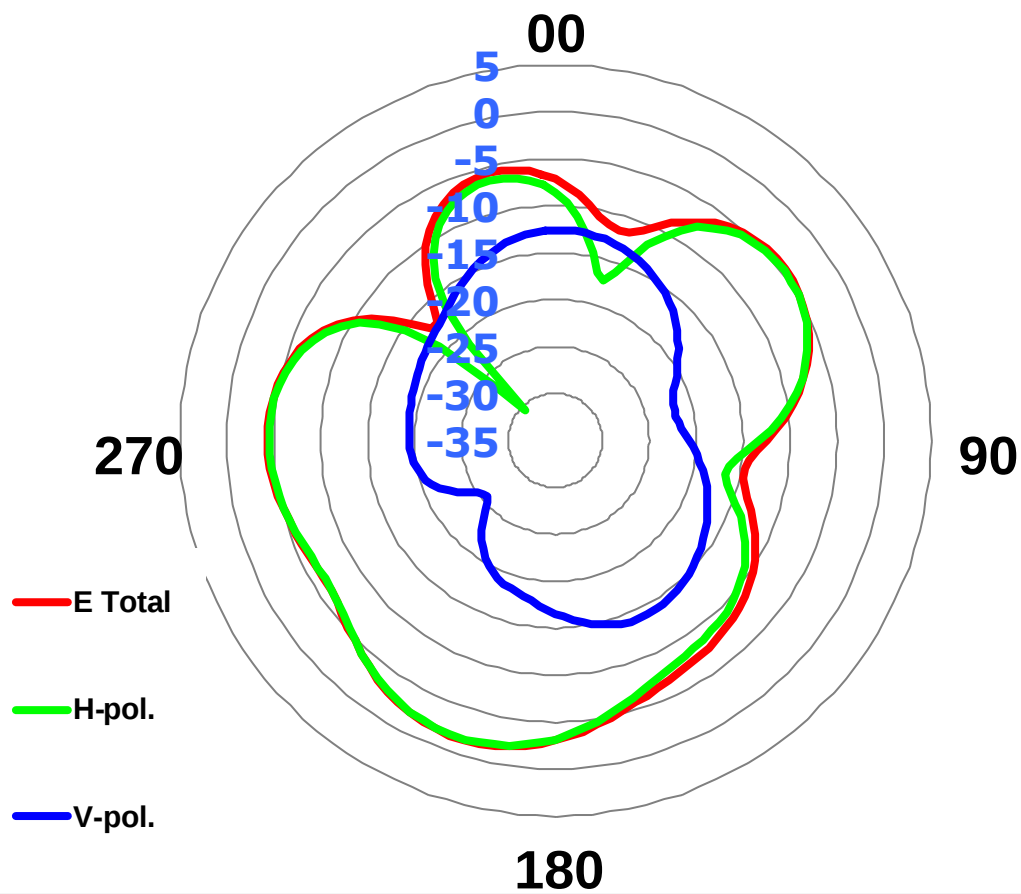


	H-pol	V pol
Peak Gain	-1.74	-12.60

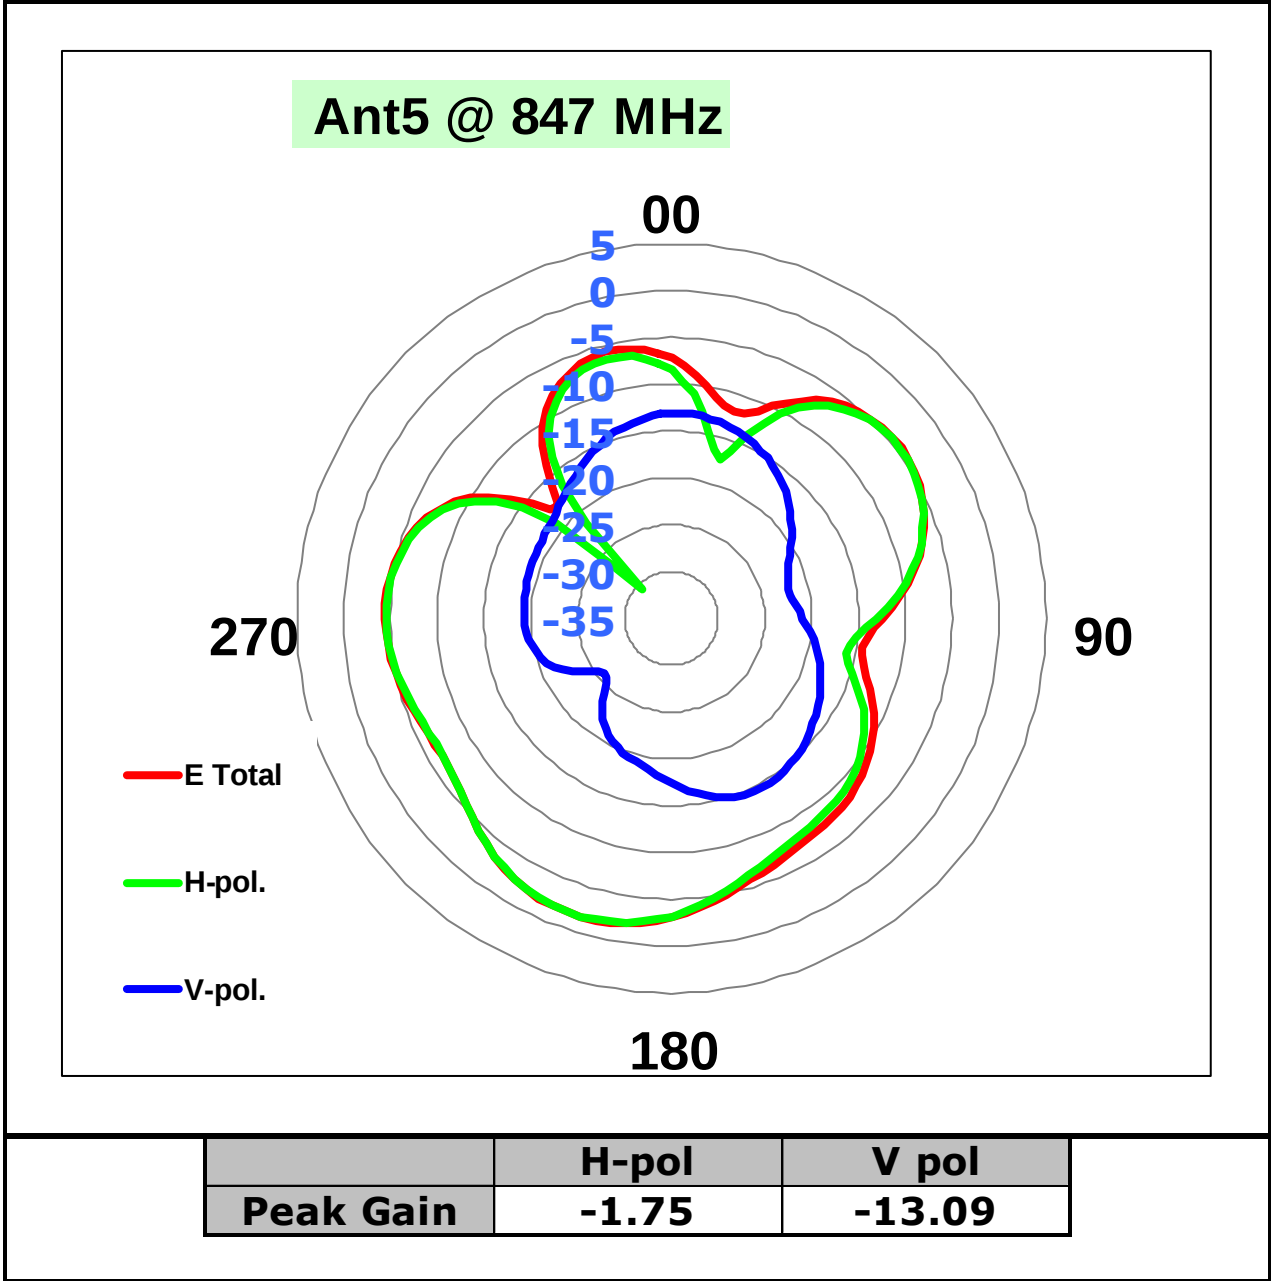


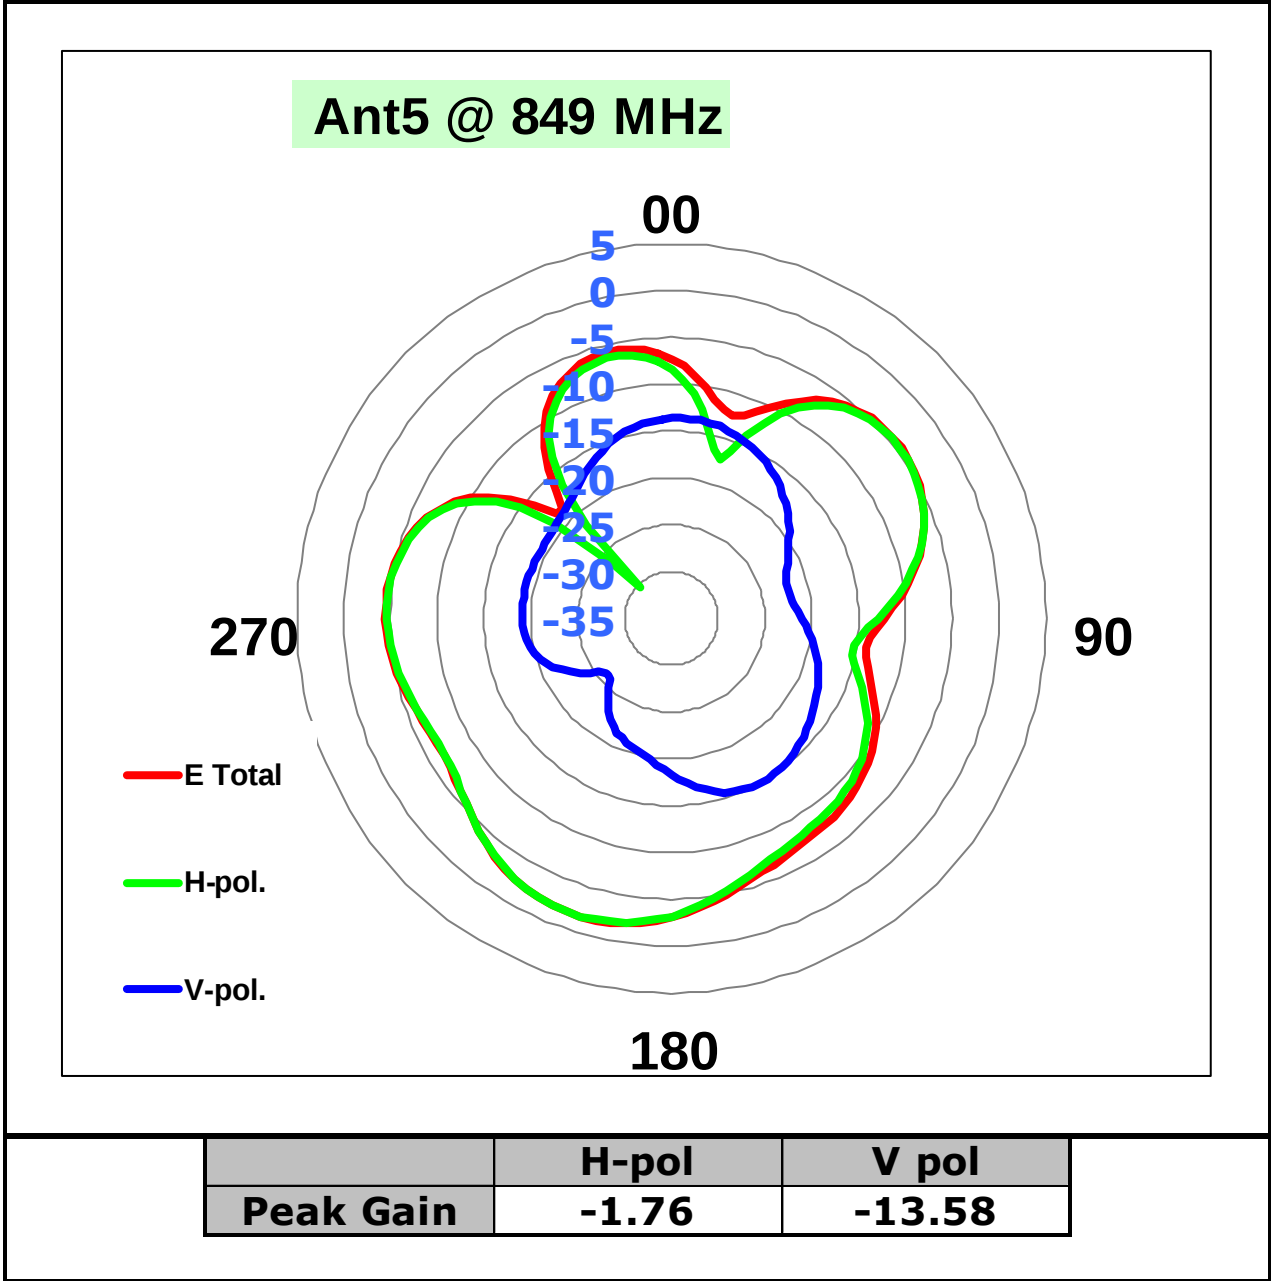

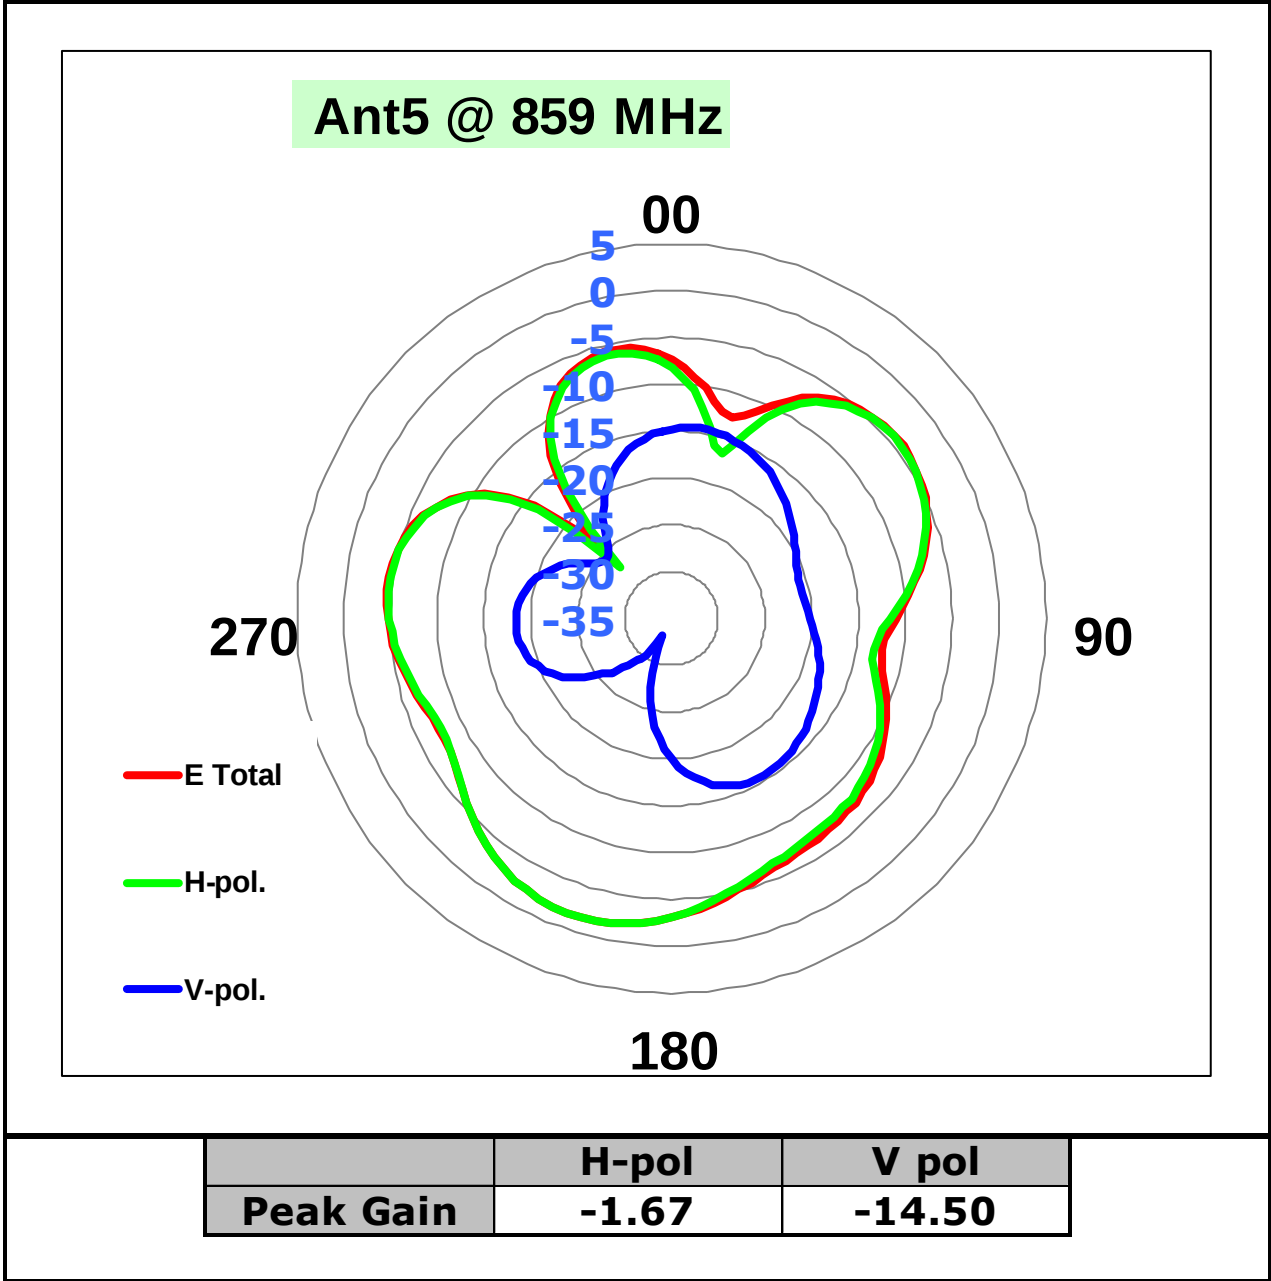

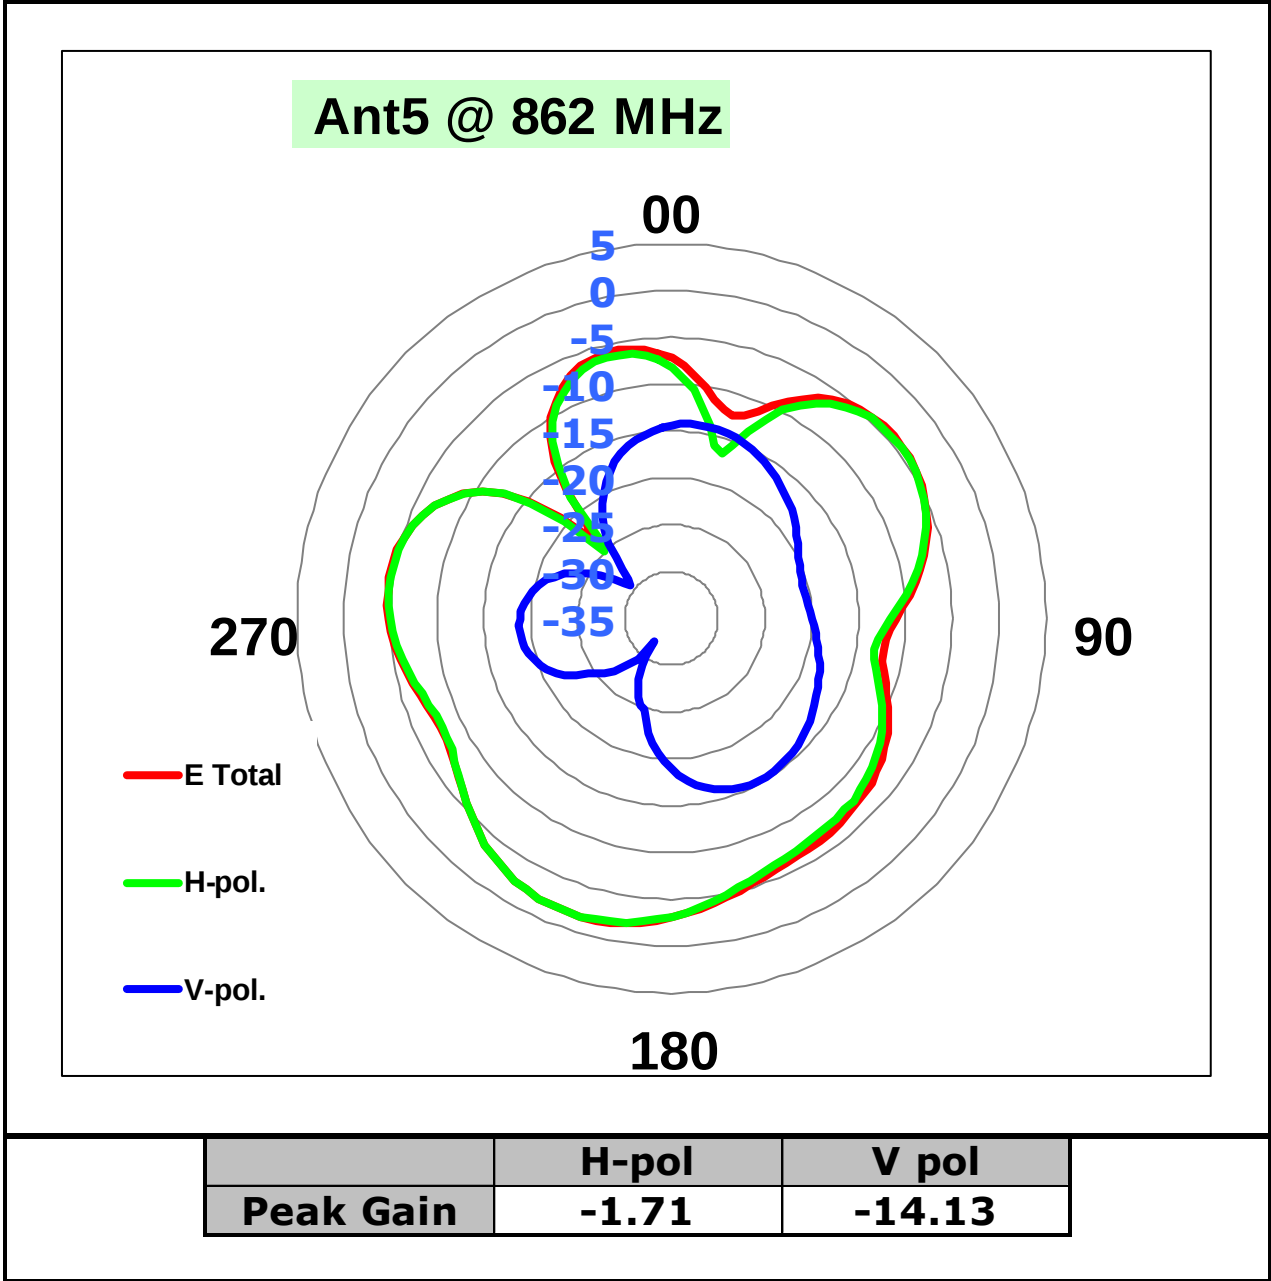


Ant5 @ 868 MHz

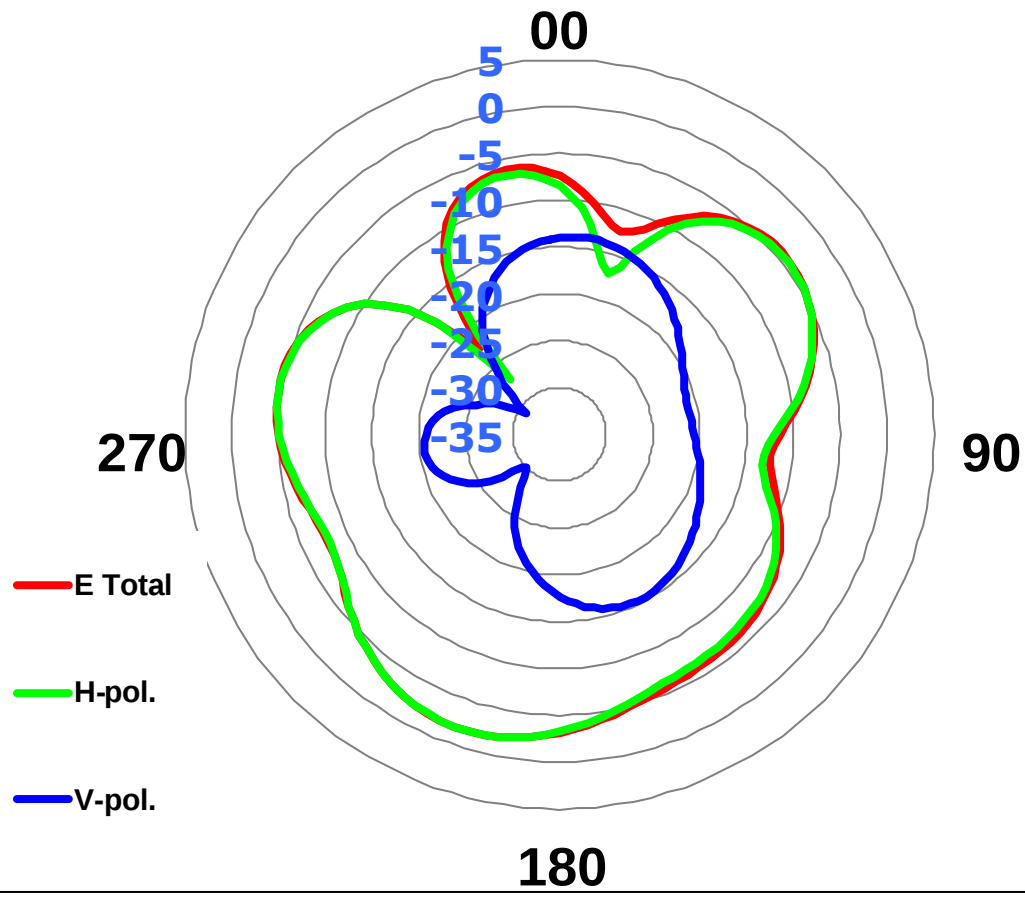



	H-pol	V pol
Peak Gain	-1.90	-13.81


Ant5 @ 875 MHz

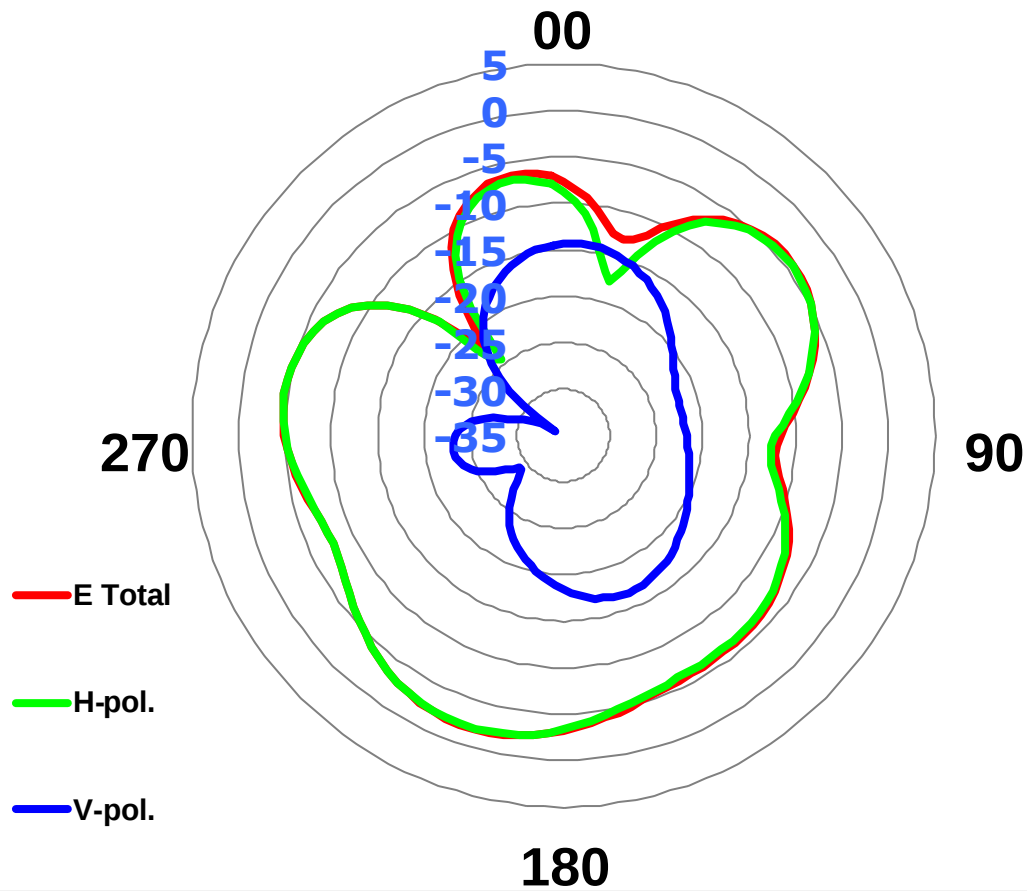


	H-pol	V pol
Peak Gain	-2.03	-14.27

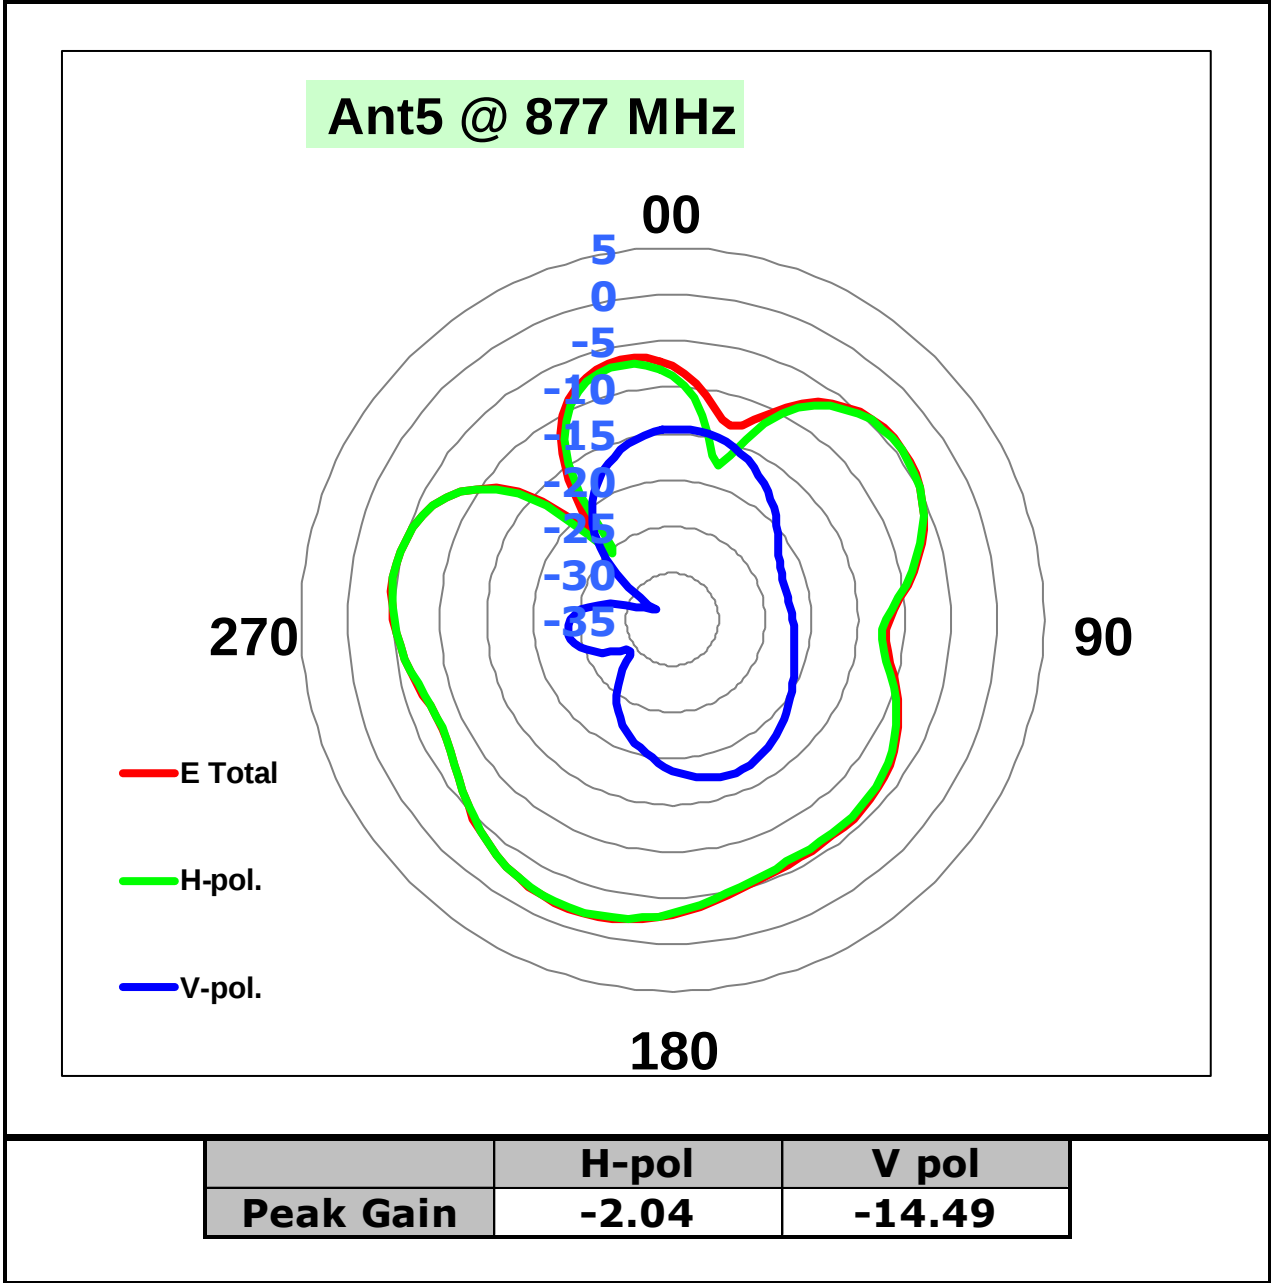


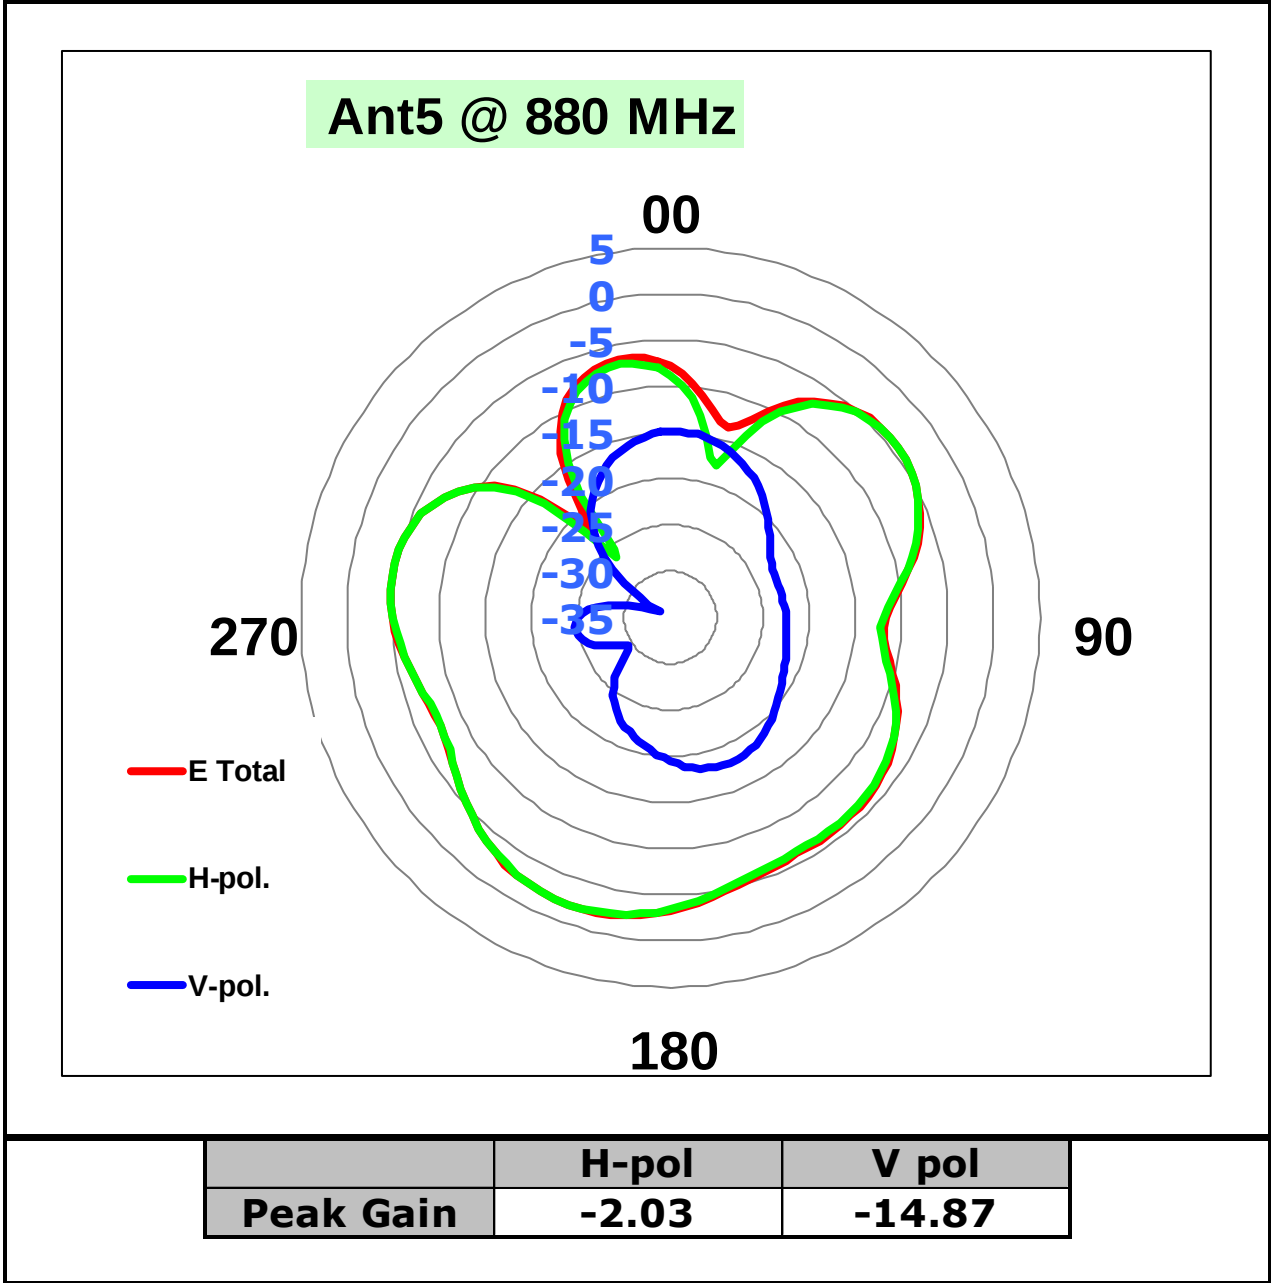

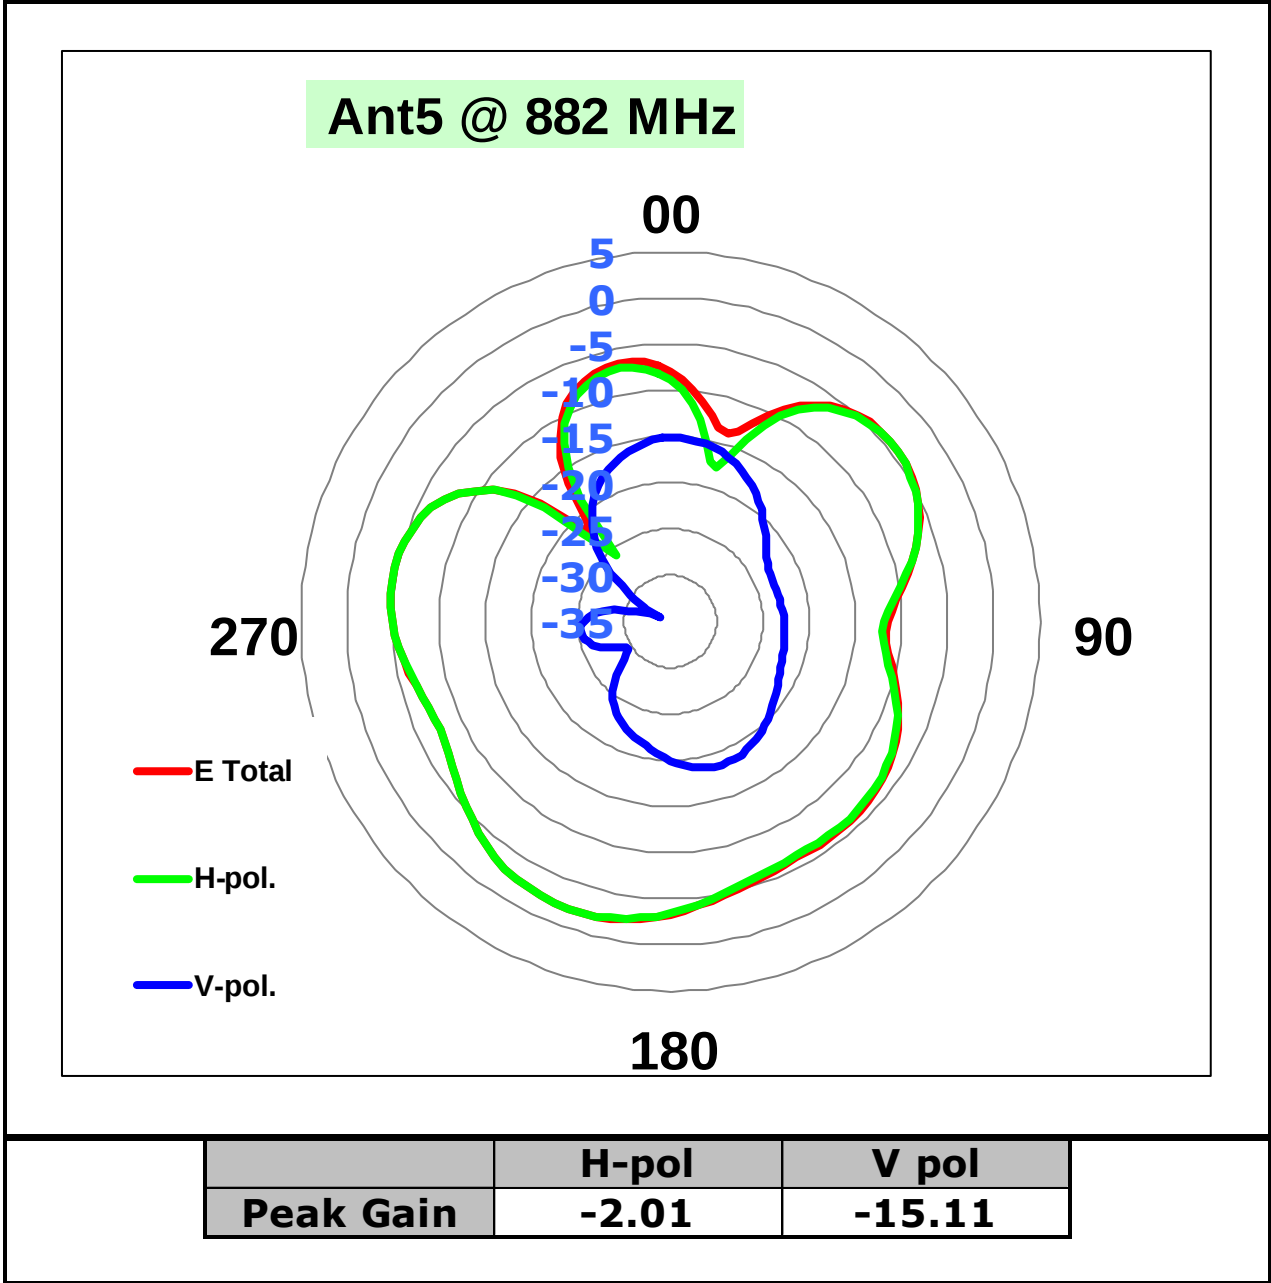


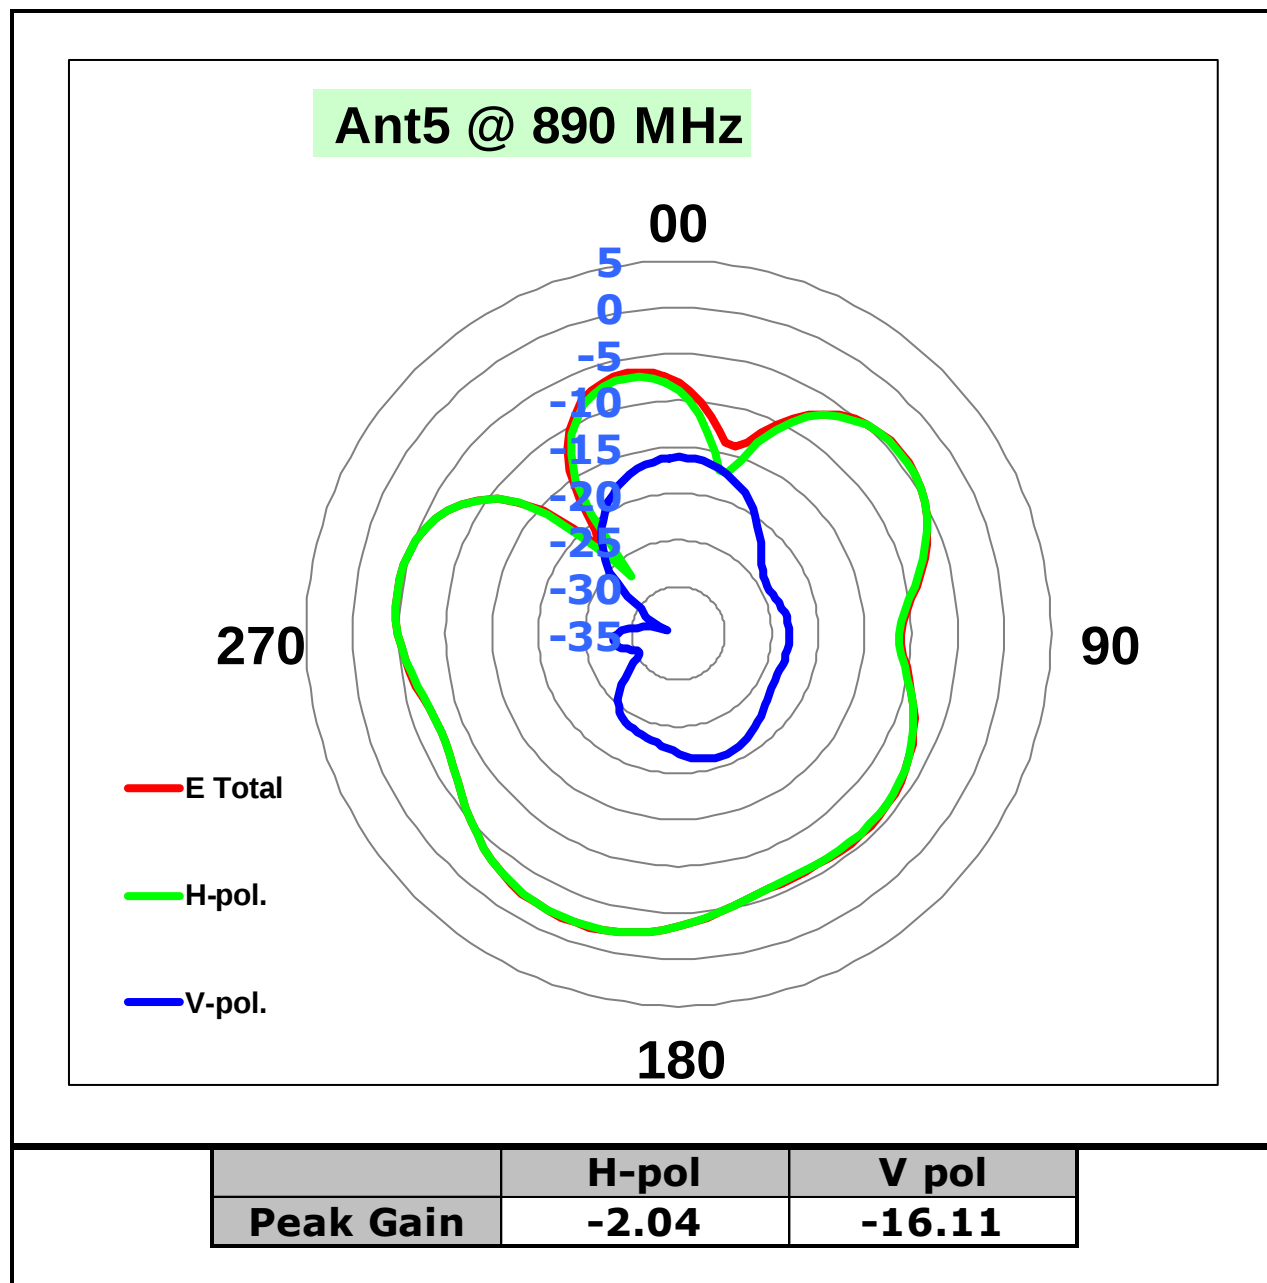


Ant5 @ 894 MHz

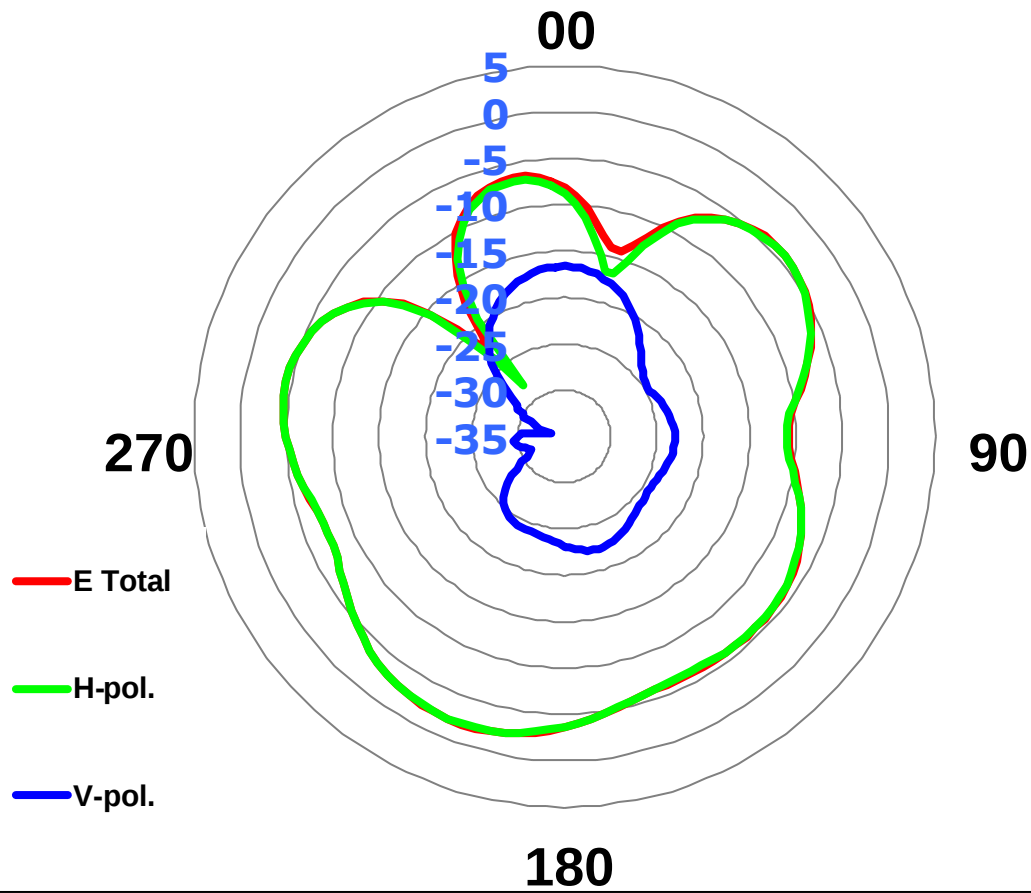


	H-pol	V pol
Peak Gain	-2.05	-16.66

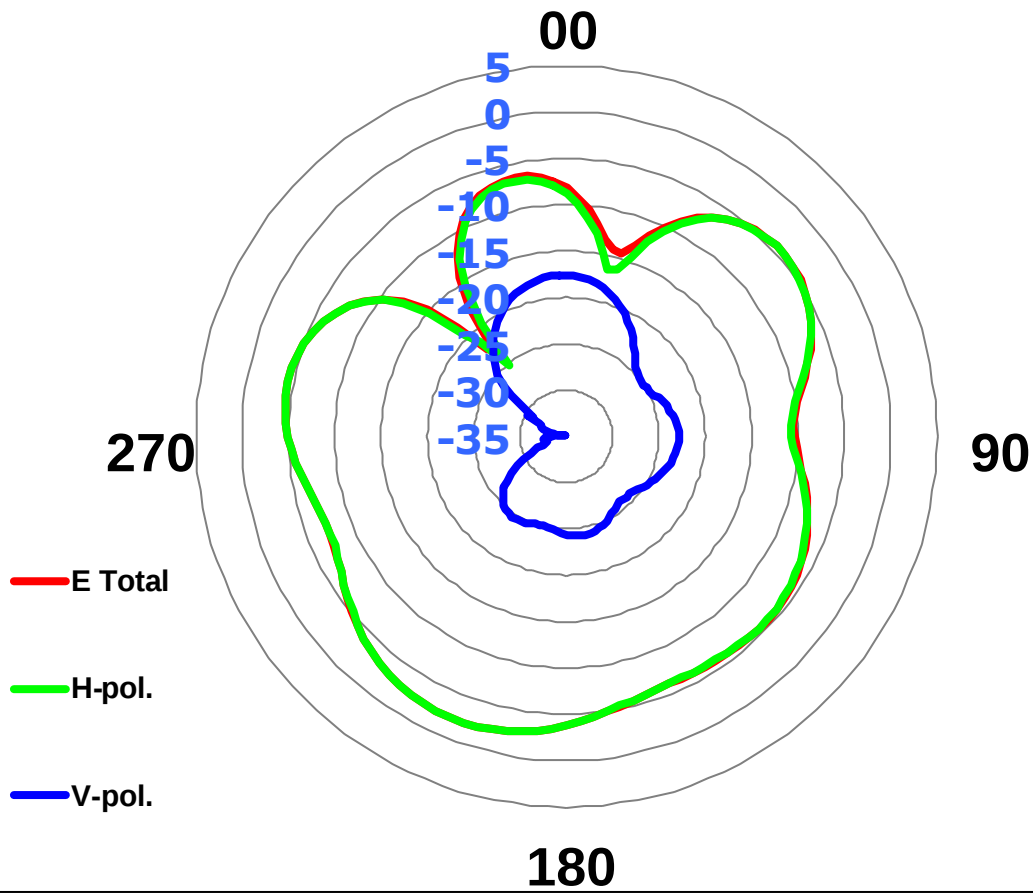
Ant5 @ 900 MHz

	H-pol	V pol
Peak Gain	-2.15	-17.60

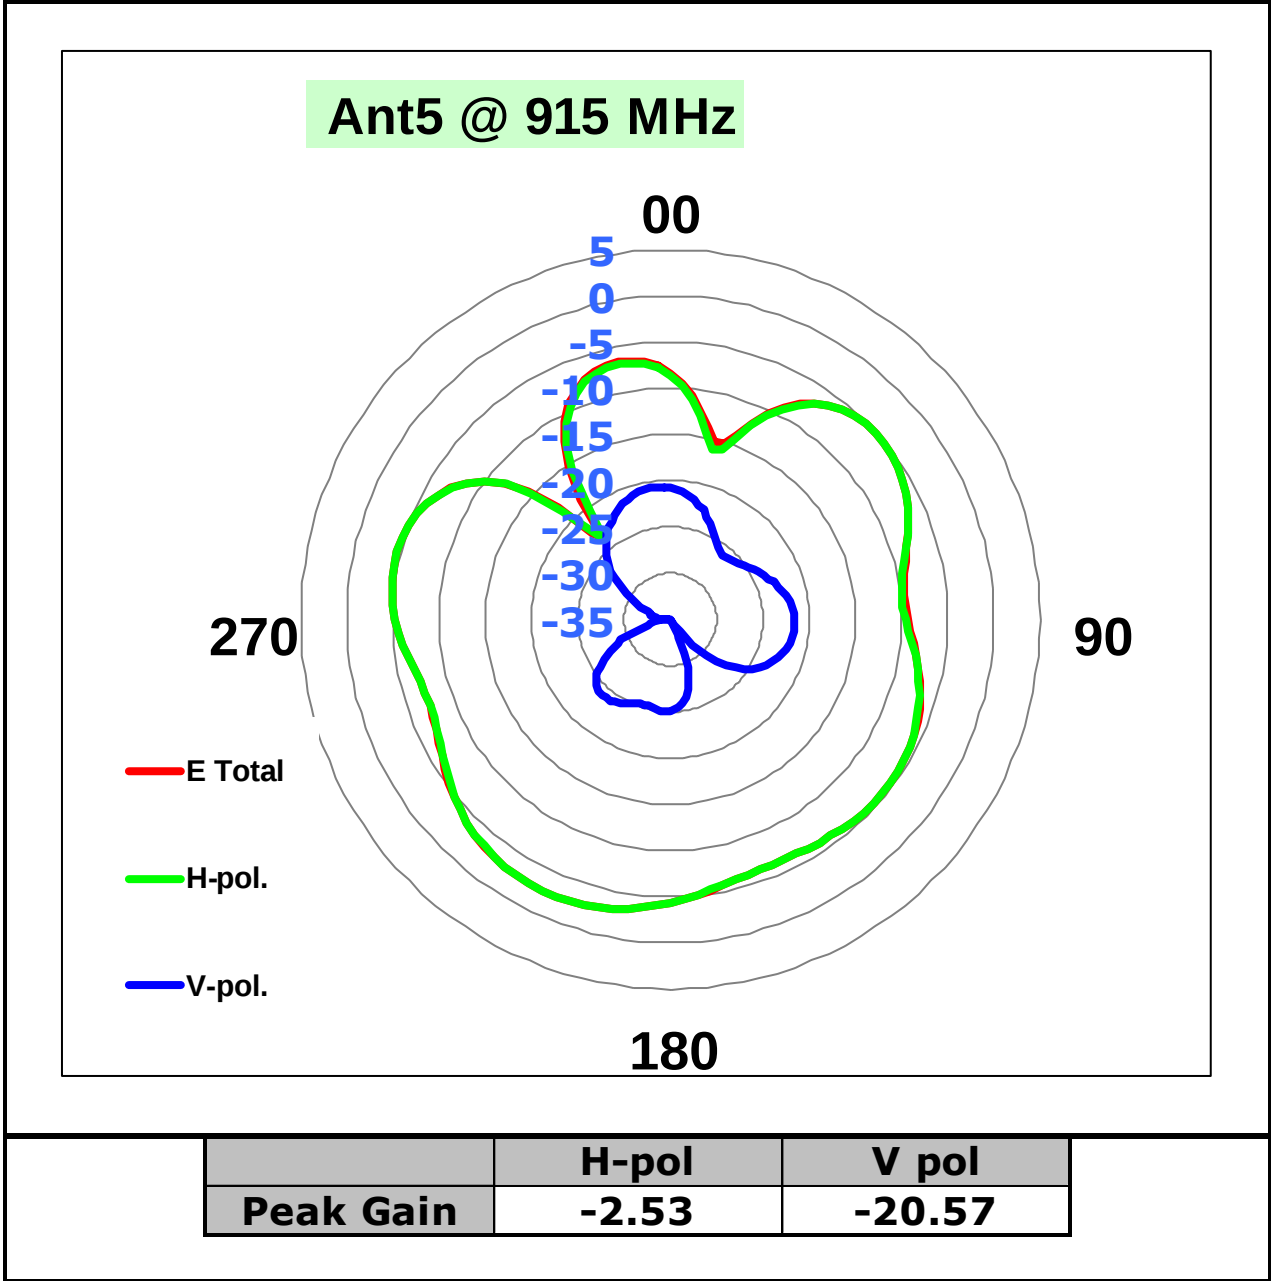


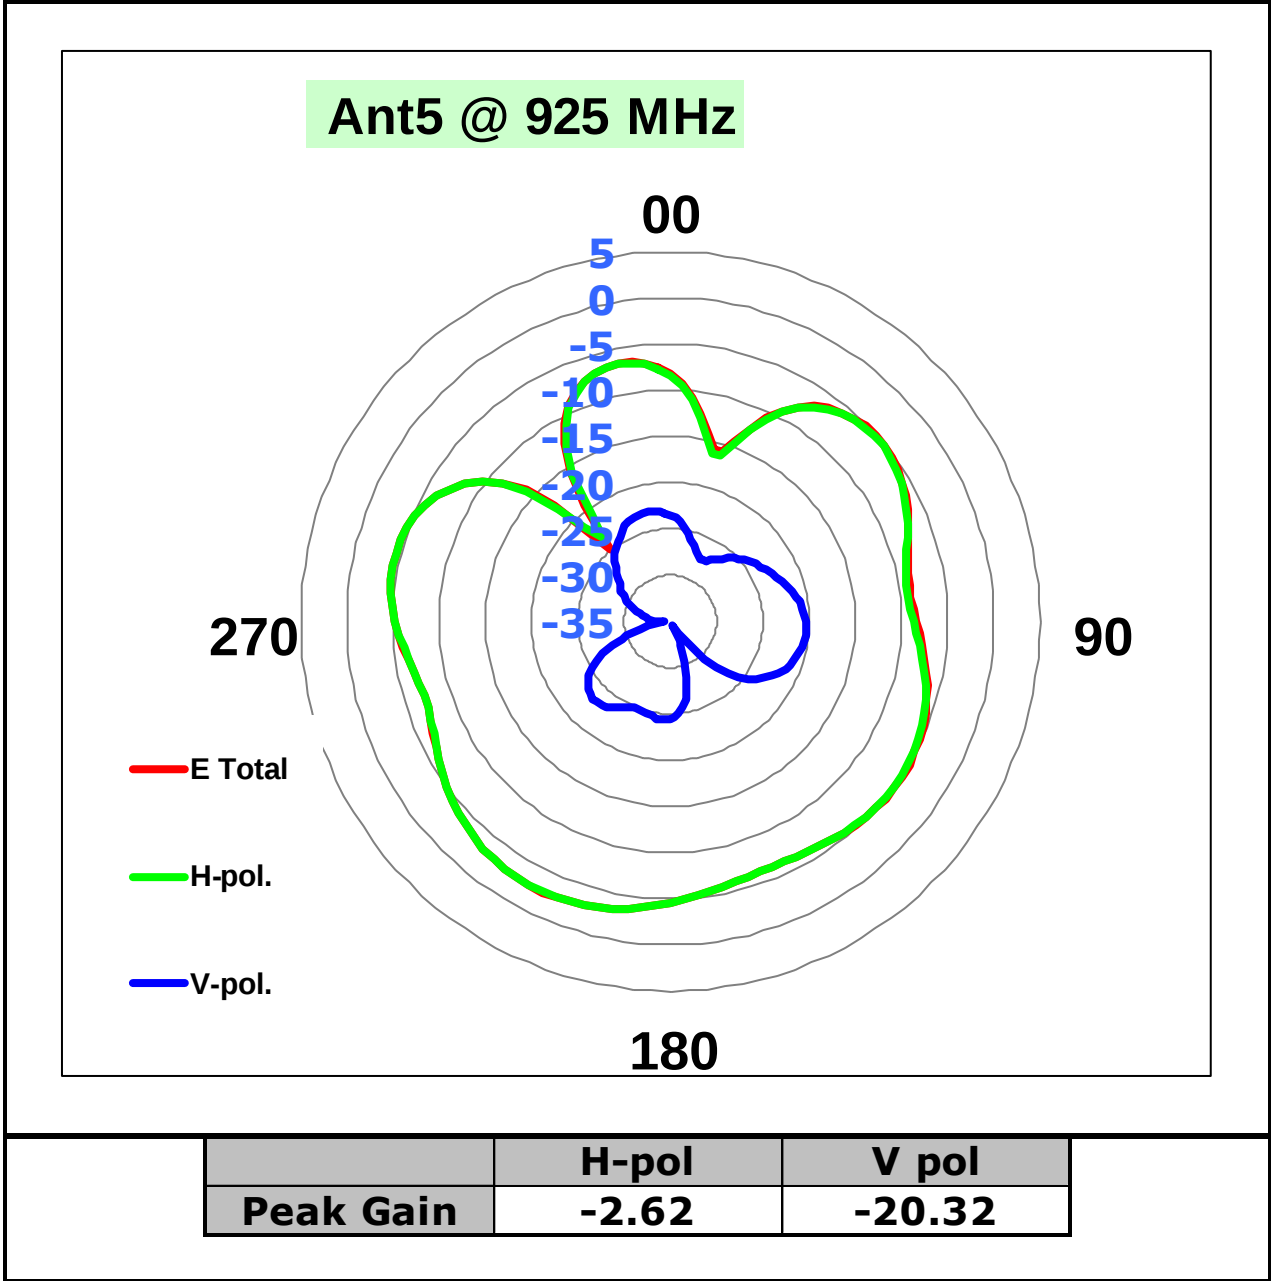


Ant5 @ 940 MHz

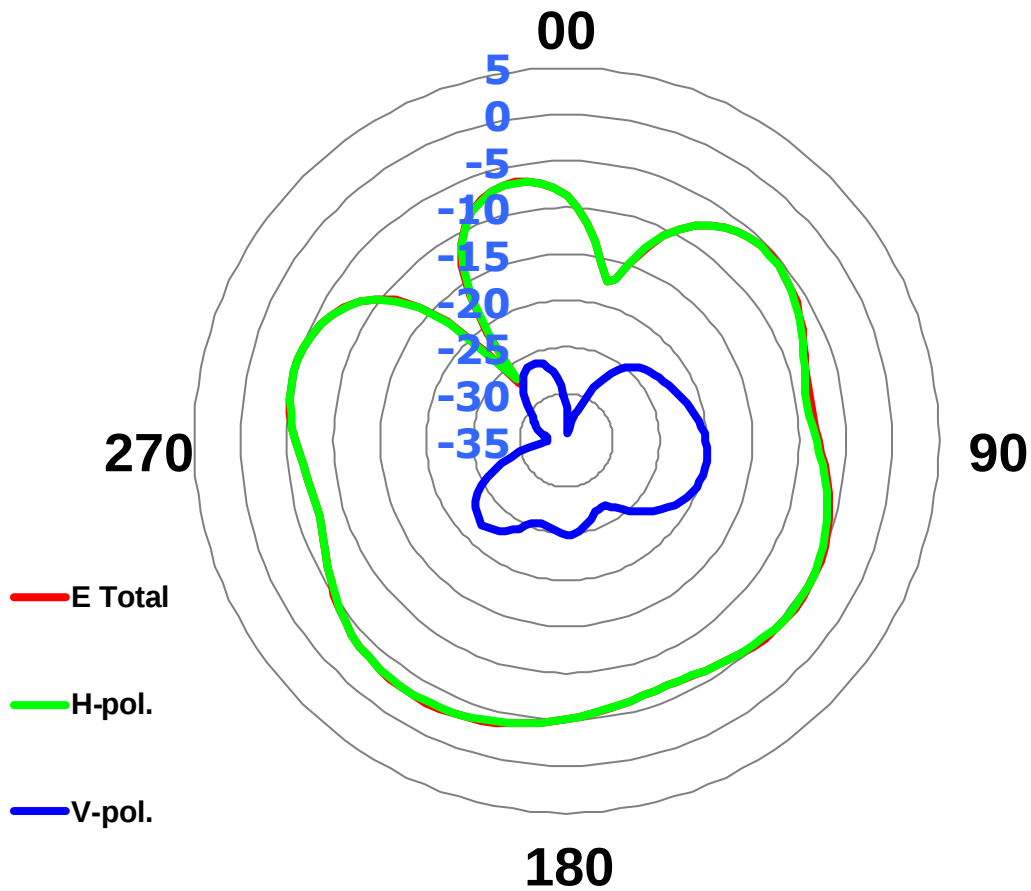


	H-pol	V pol
Peak Gain	-3.14	-19.79

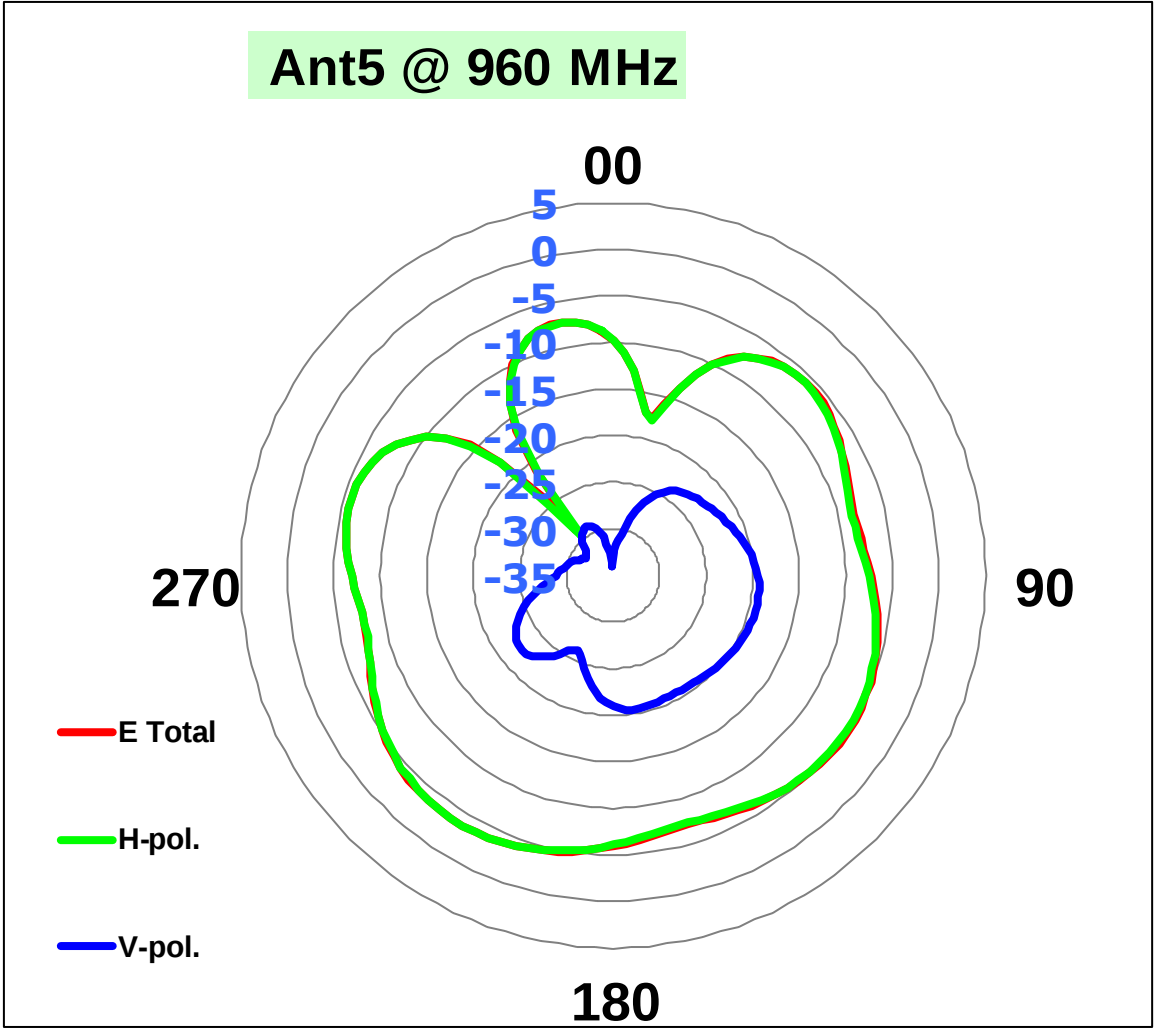


	H-pol	V pol
Peak Gain	-3.70	-19.17

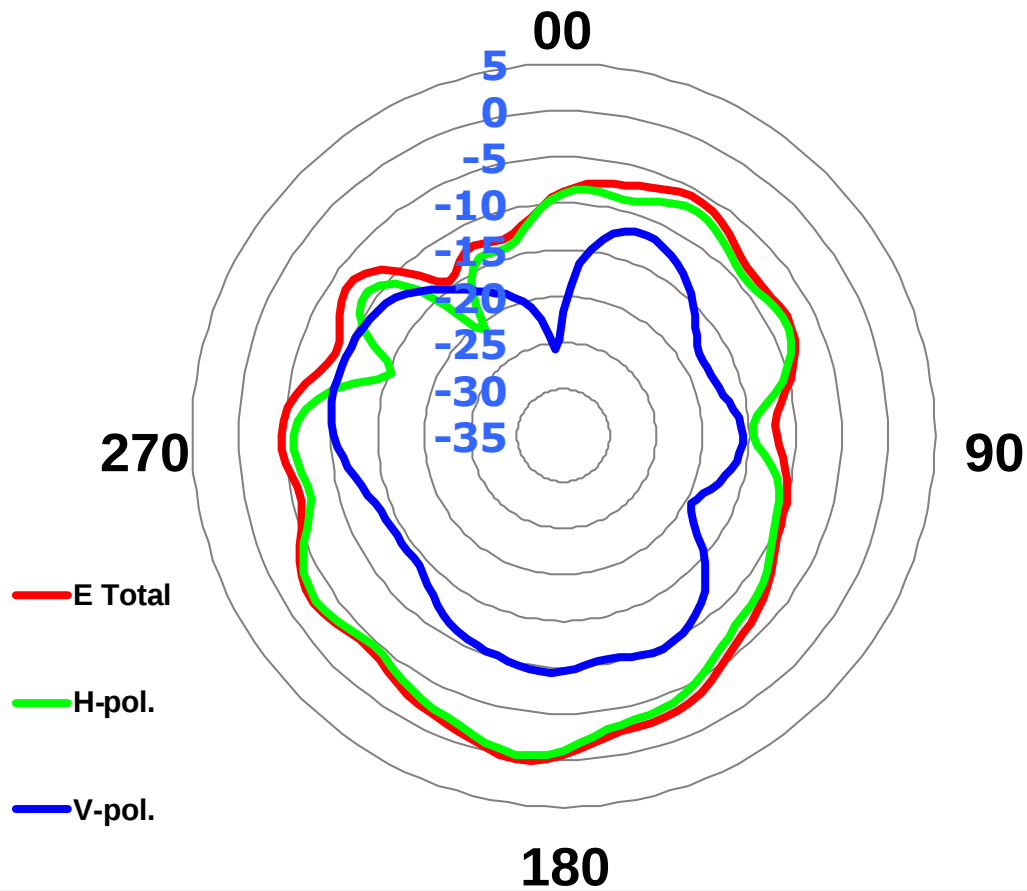
Ant5 @ 1710 MHz

	H-pol	V pol
Peak Gain	-0.29	-9.46

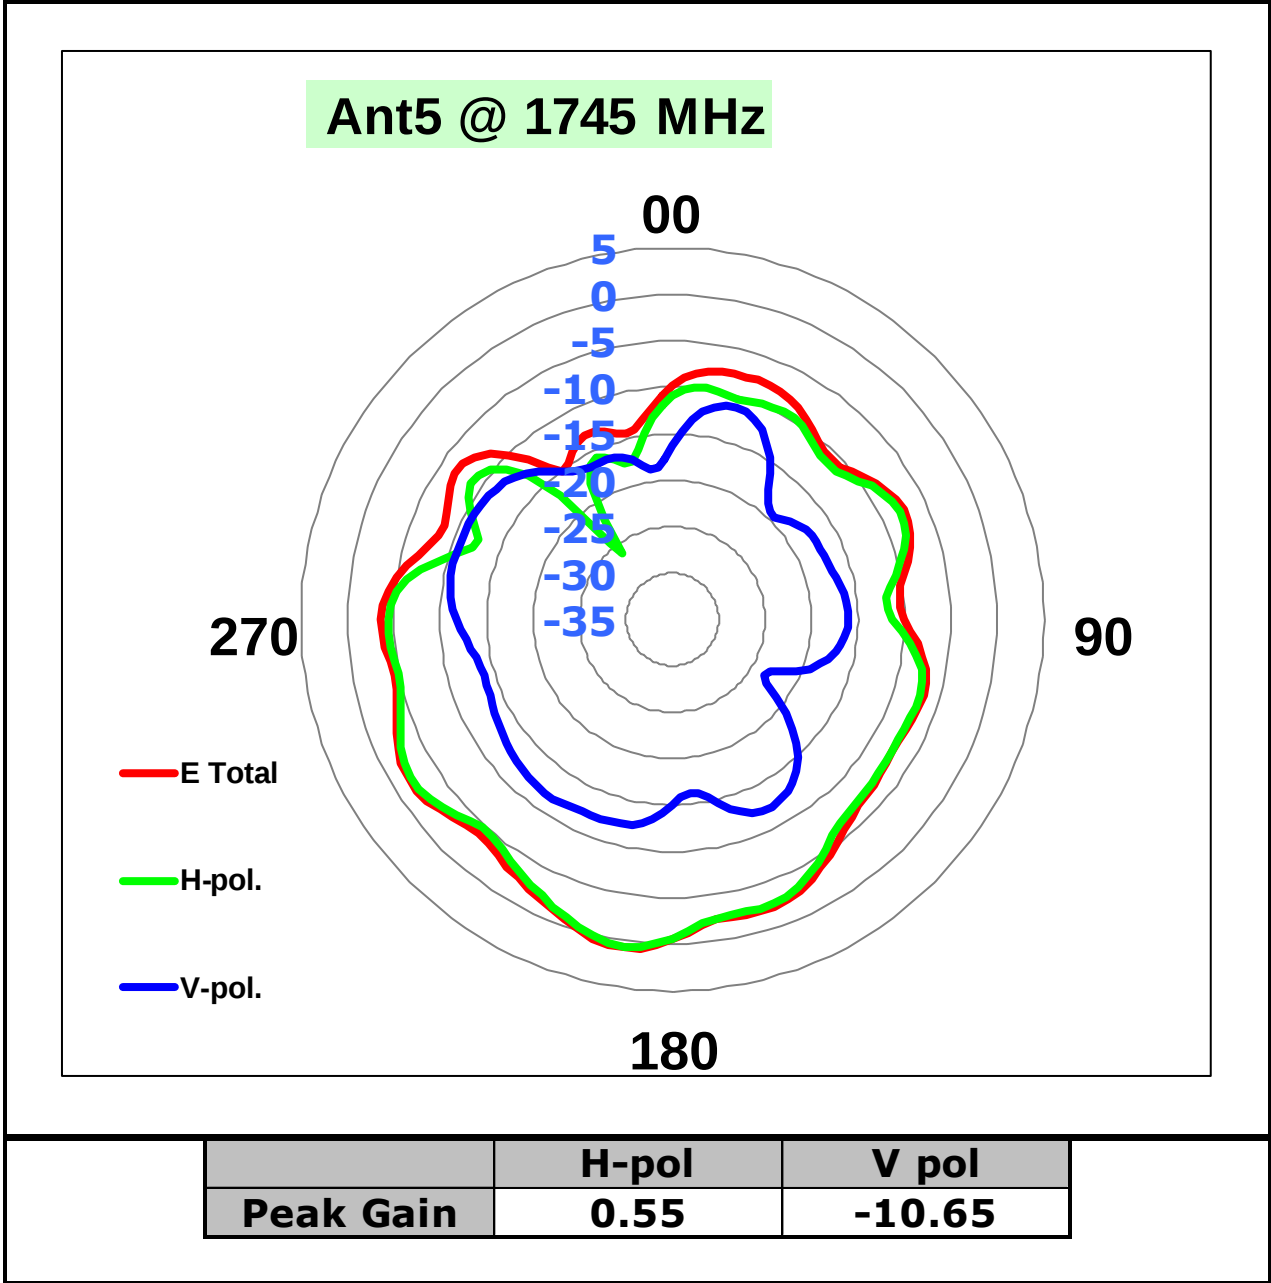

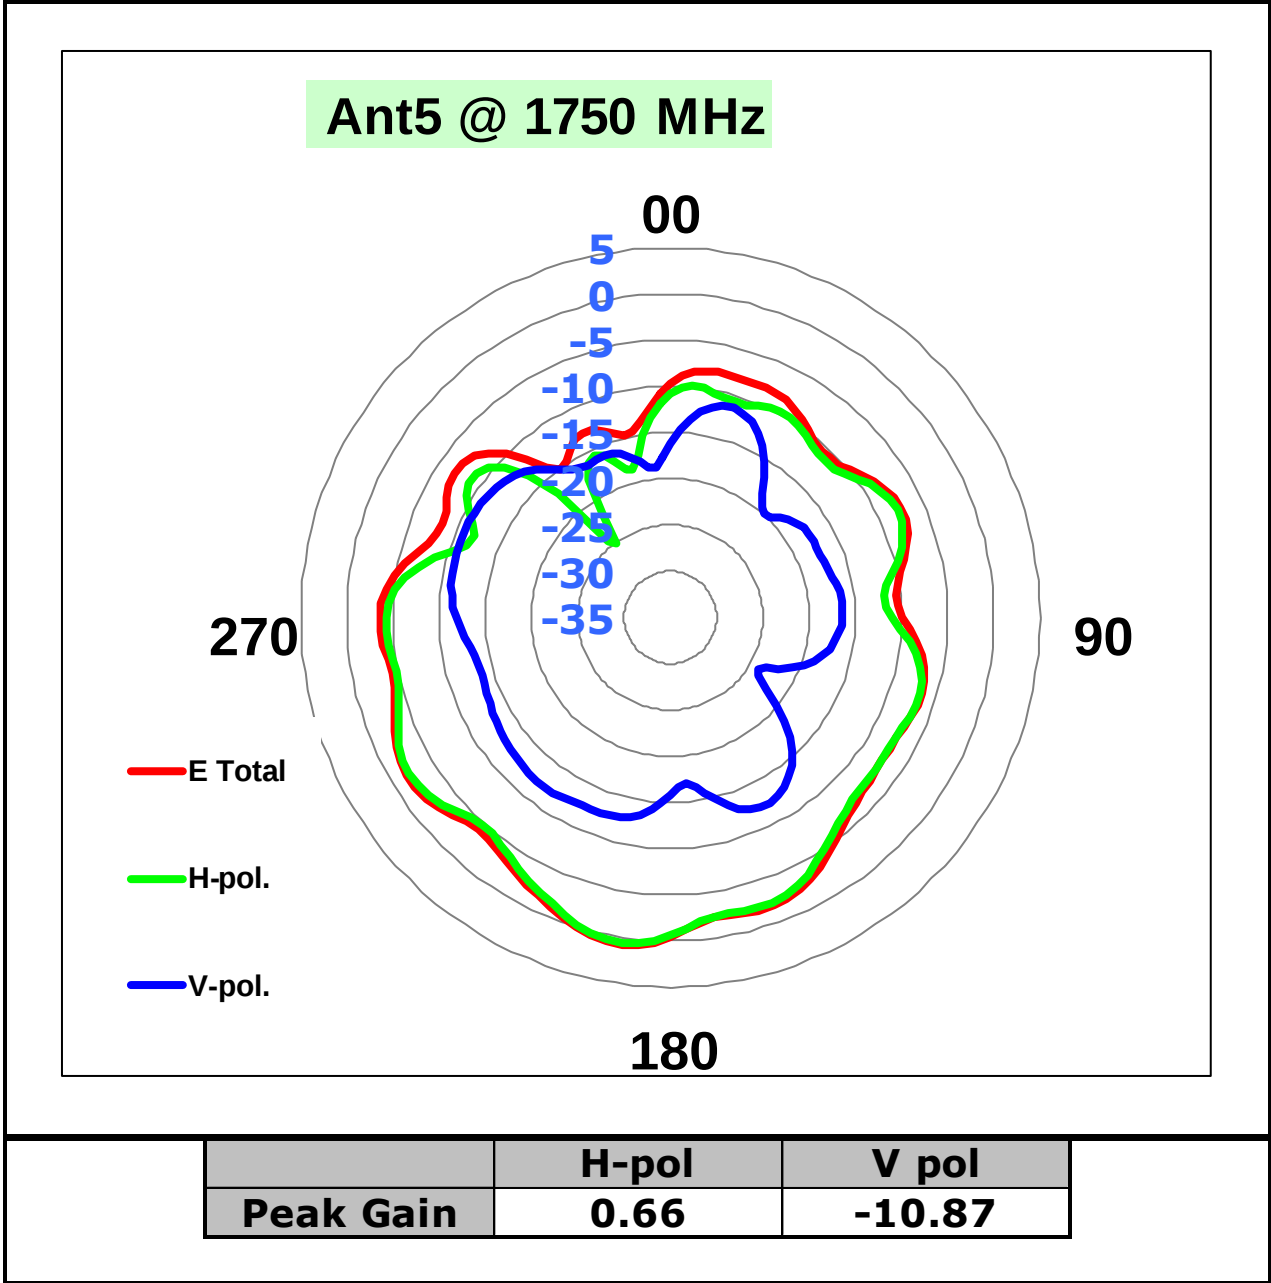


Ant5 @ 1780 MHz

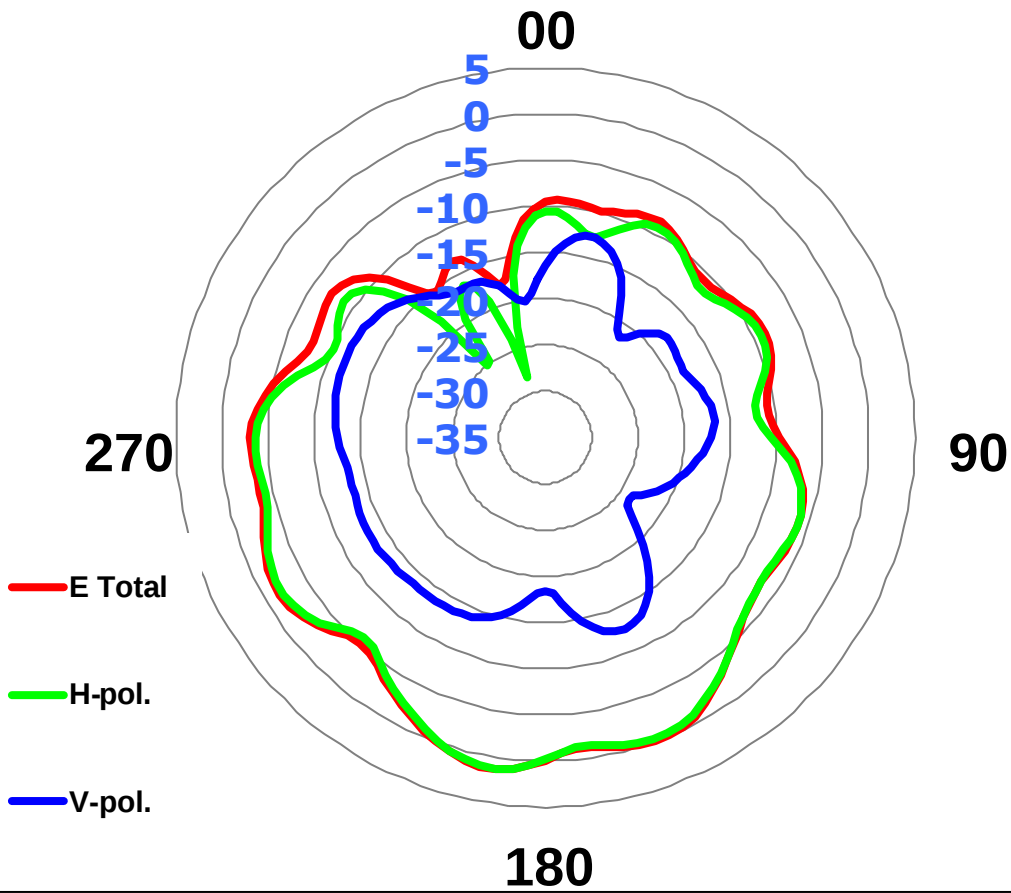


	H-pol	V pol
Peak Gain	1.25	-11.72

Ant5 @ 1785 MHz

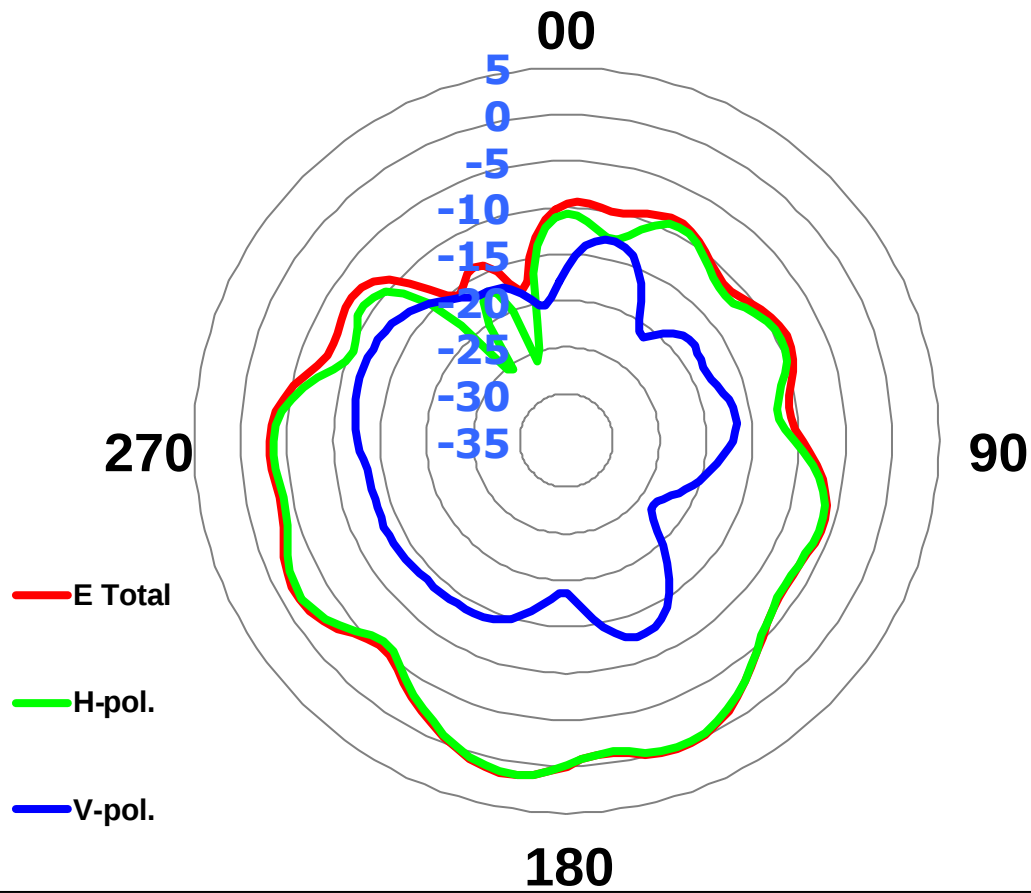



	H-pol	V pol
Peak Gain	1.29	-11.85

Ant5 @ 1805 MHz

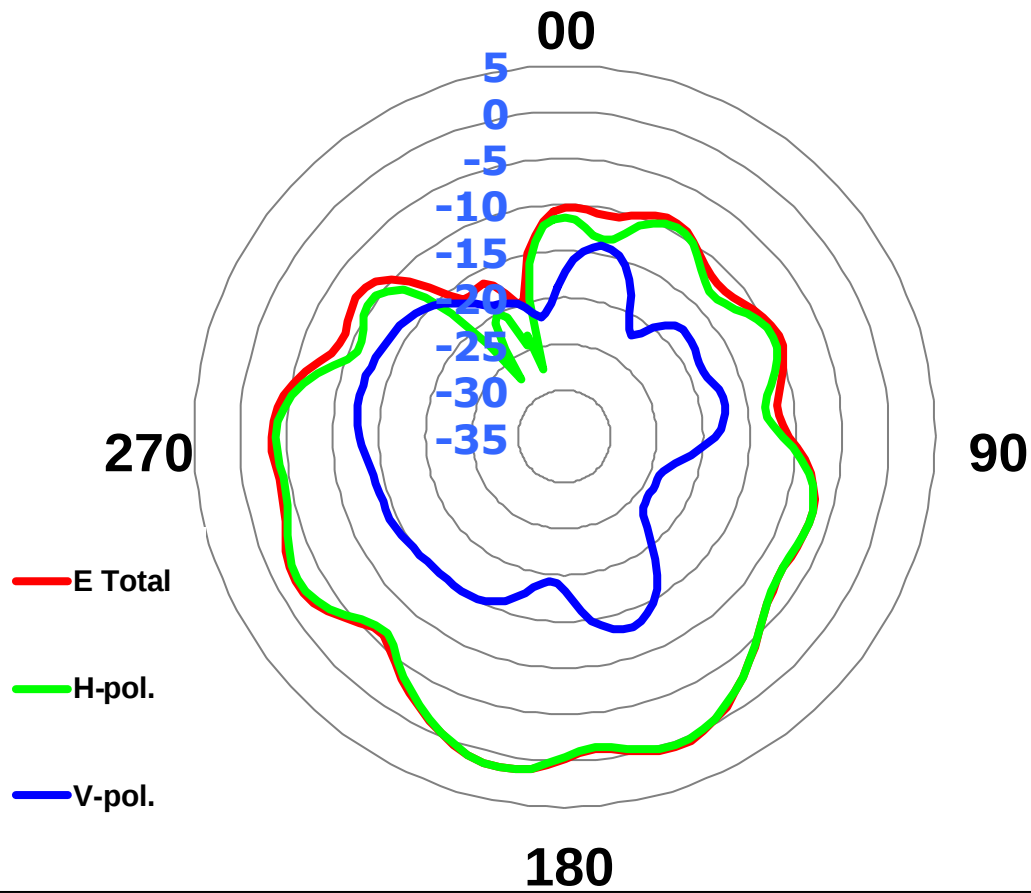


	H-pol	V pol
Peak Gain	1.42	-12.51

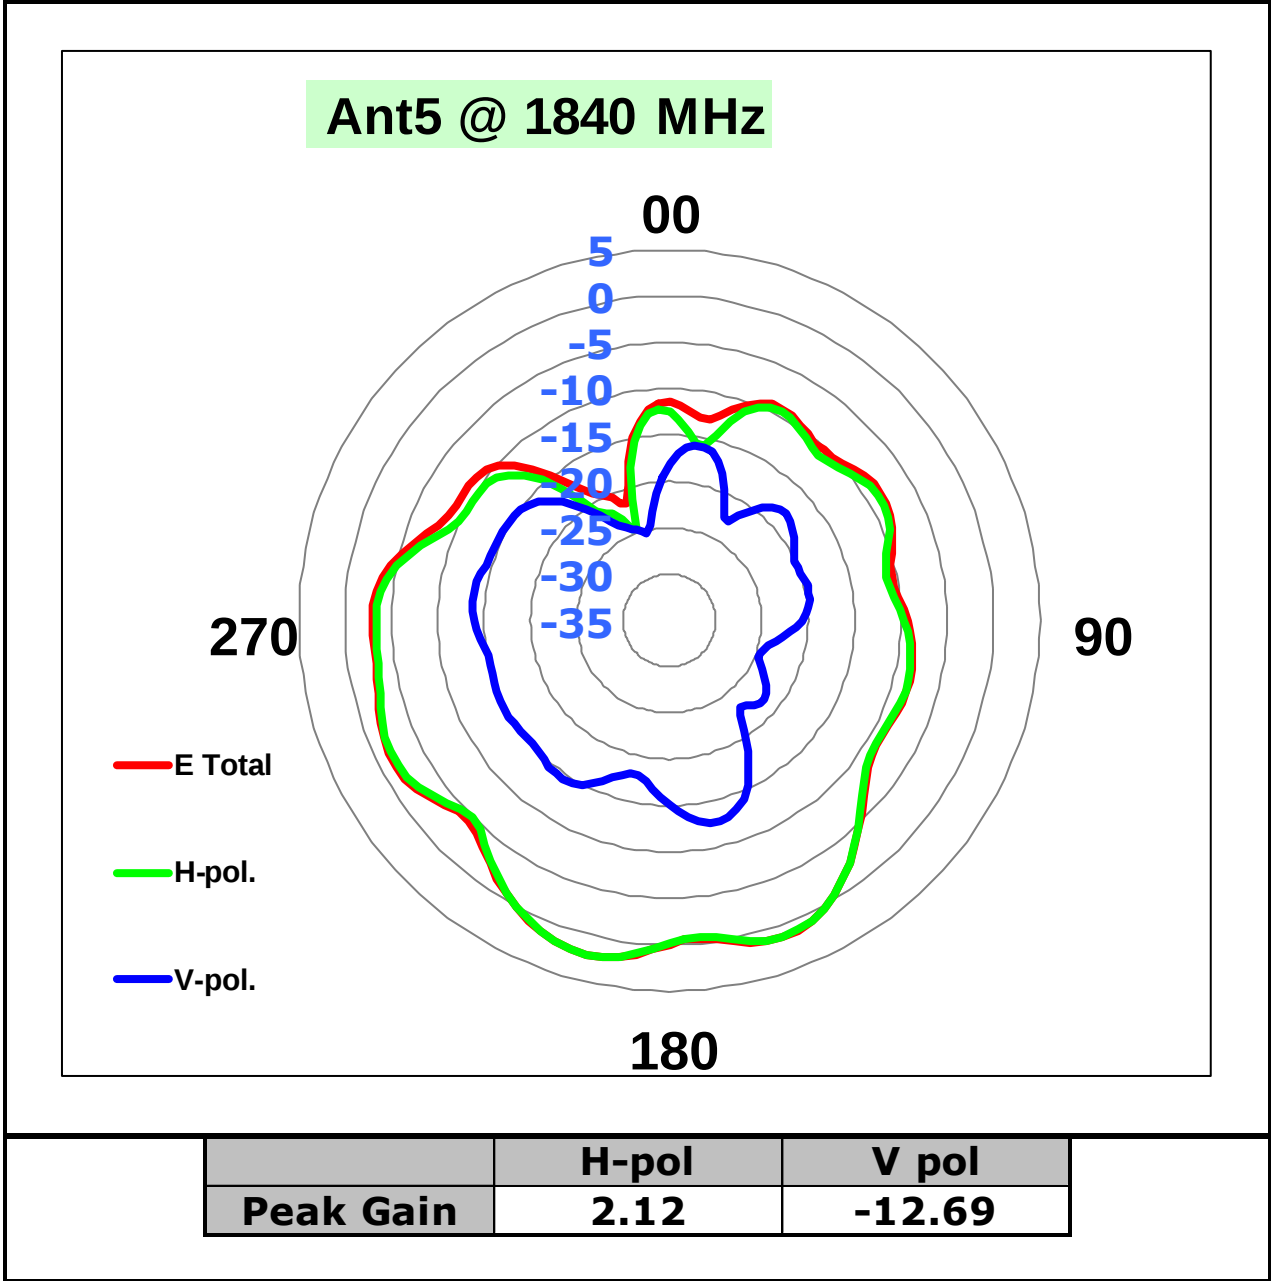

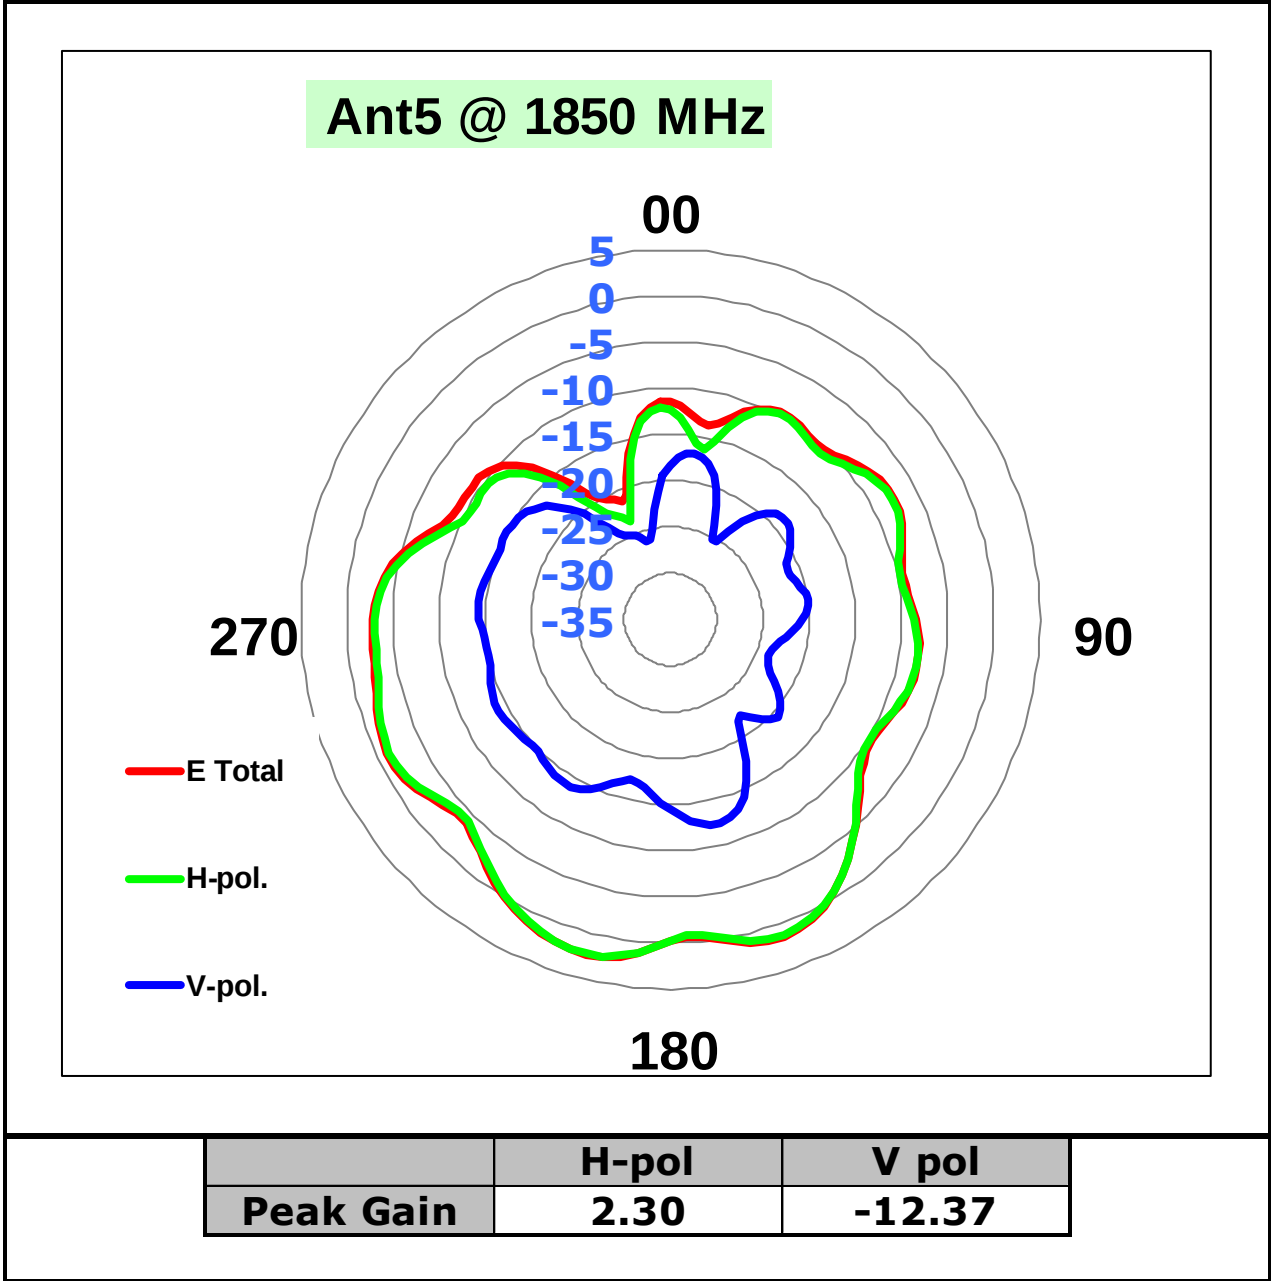


Ant5 @ 1880 MHz

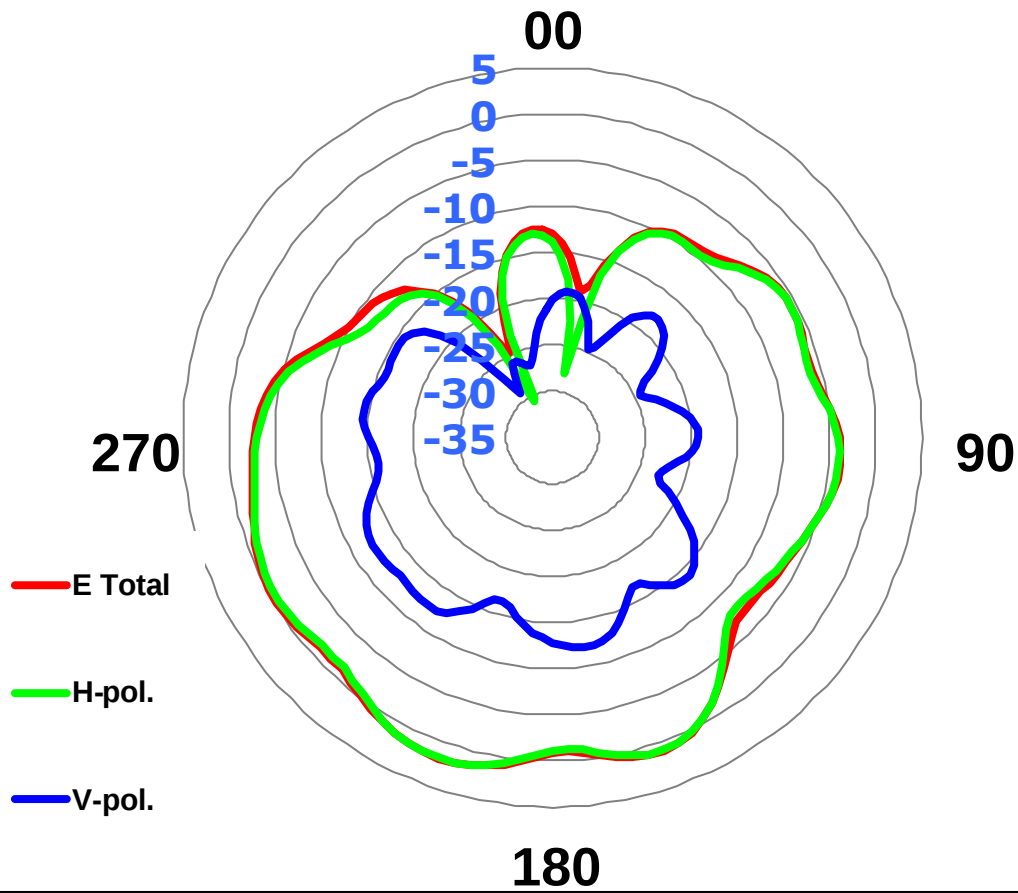


	H-pol	V pol
Peak Gain	1.81	-12.06


Ant5 @ 1882 MHz

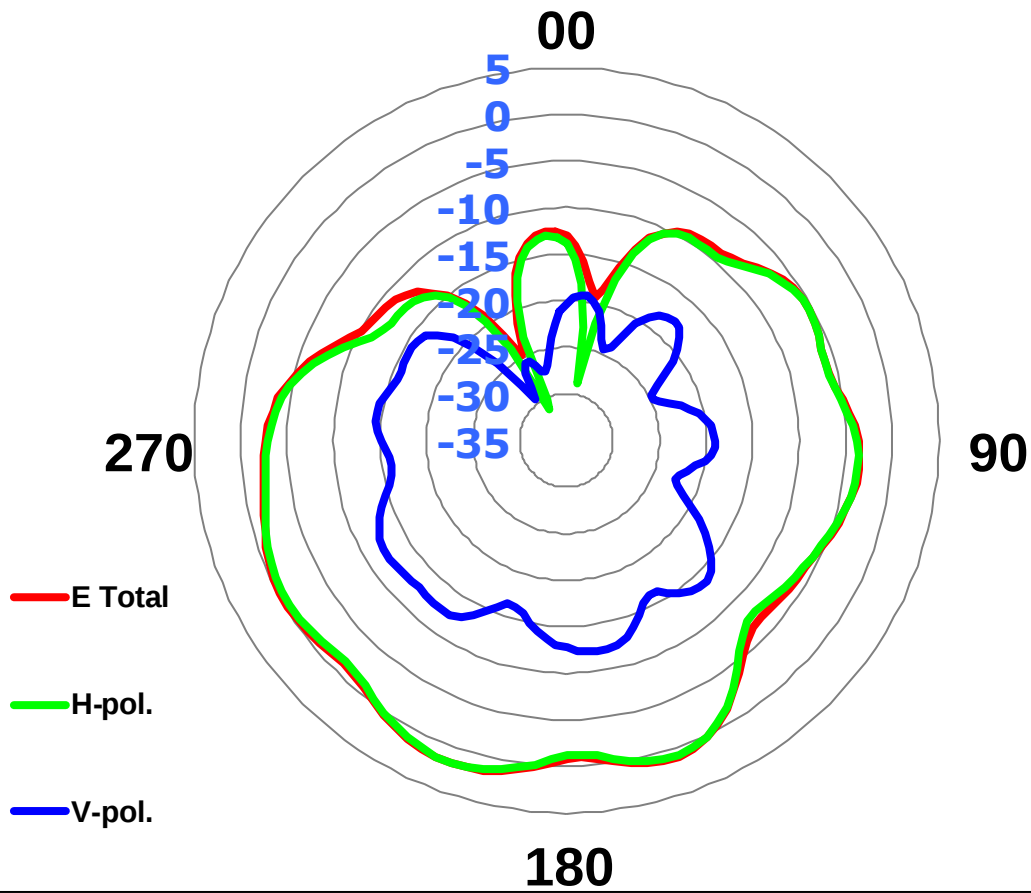

	H-pol	V pol
Peak Gain	1.75	-12.02

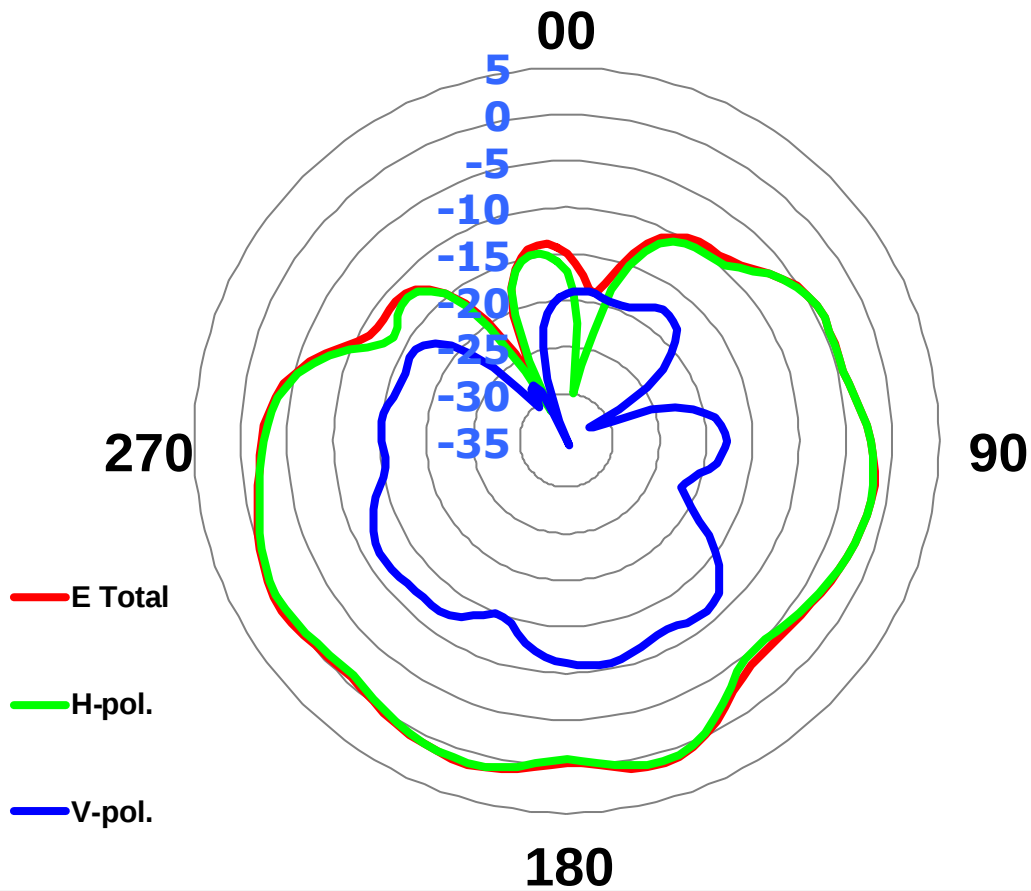
Ant5 @ 1900 MHz

	H-pol	V pol
Peak Gain	1.21	-10.61

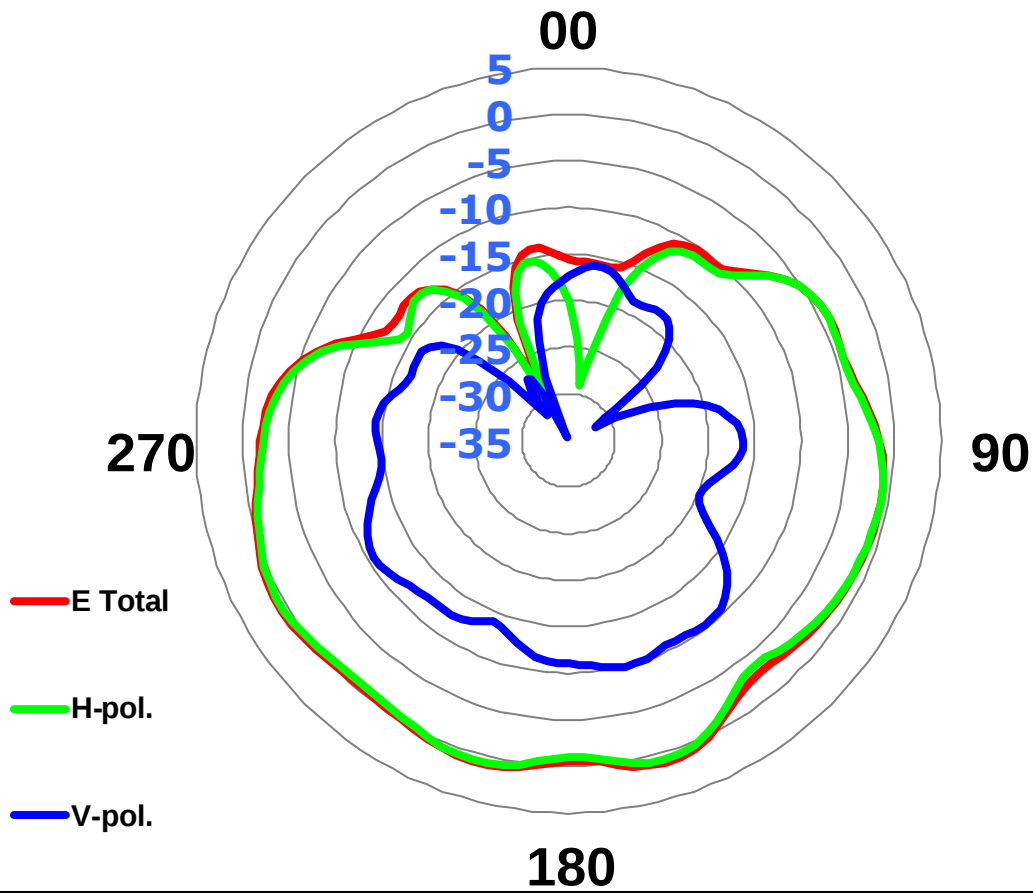
Ant5 @ 1915 MHz

	H-pol	V pol
Peak Gain	0.84	-9.97

Ant5 @ 1920 MHz

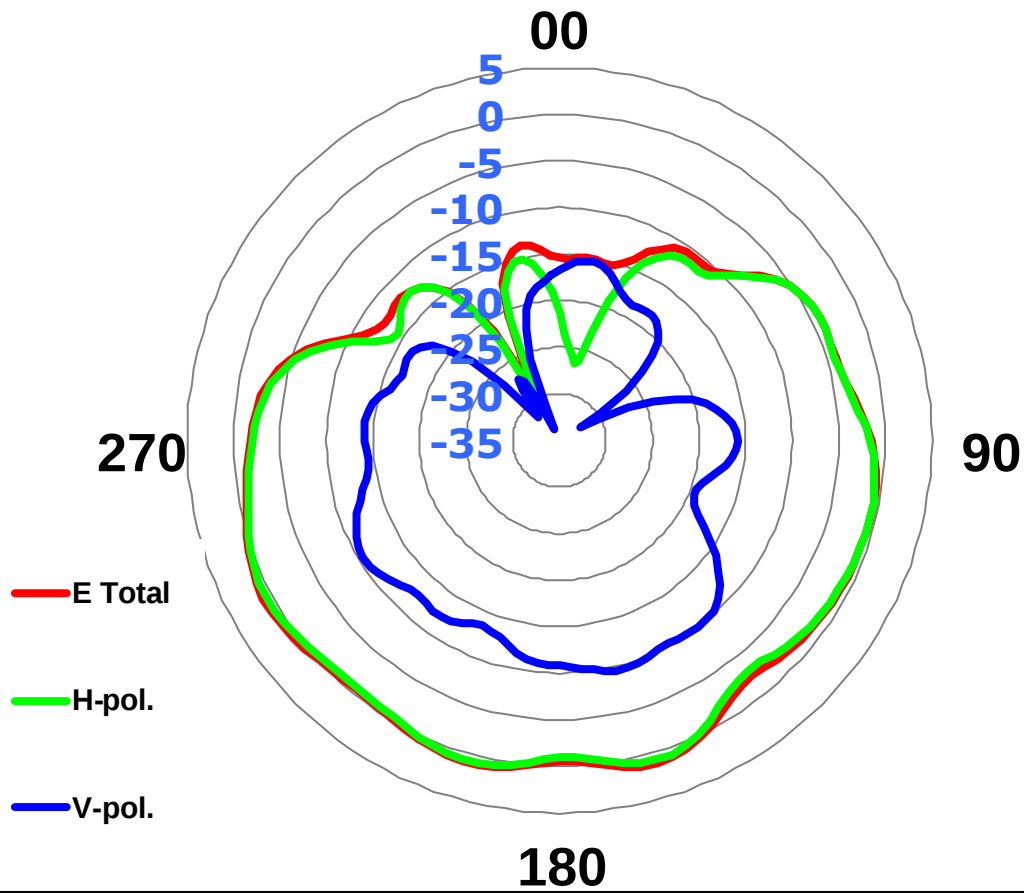


	H-pol	V pol
Peak Gain	0.85	-9.53

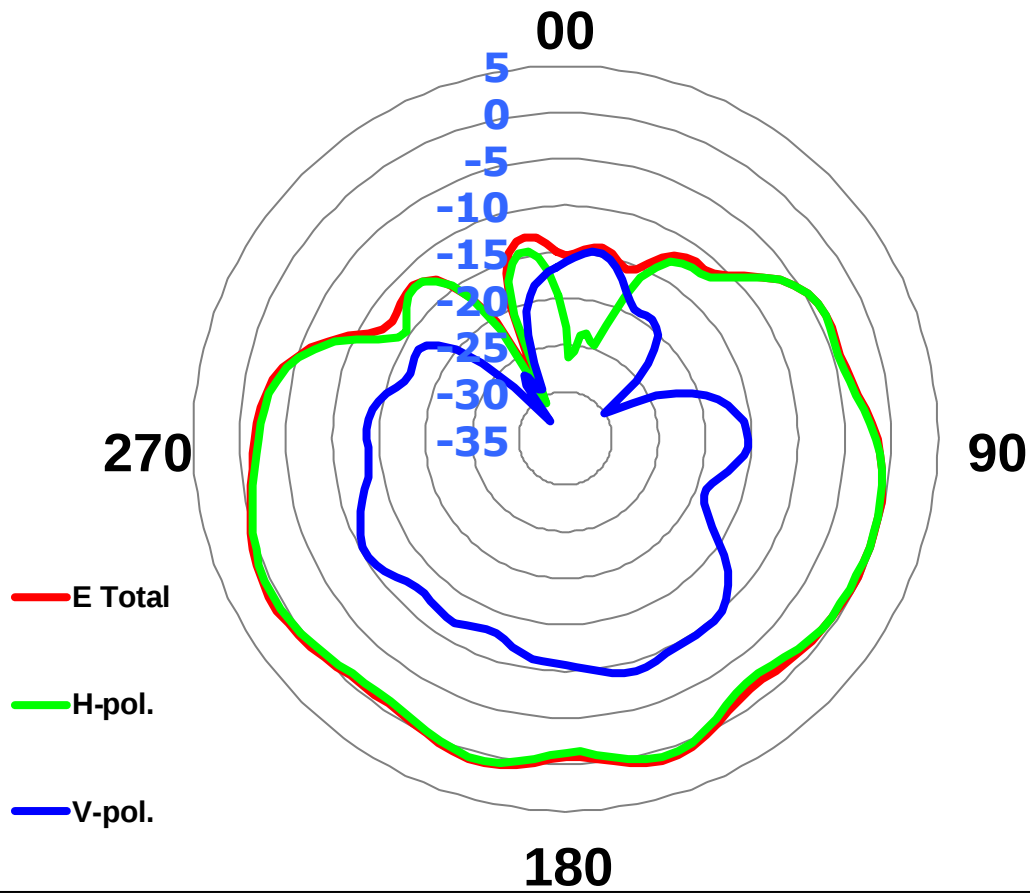
Ant5 @ 1930 MHz

	H-pol	V pol
Peak Gain	0.75	-8.93


Ant5 @ 1950 MHz

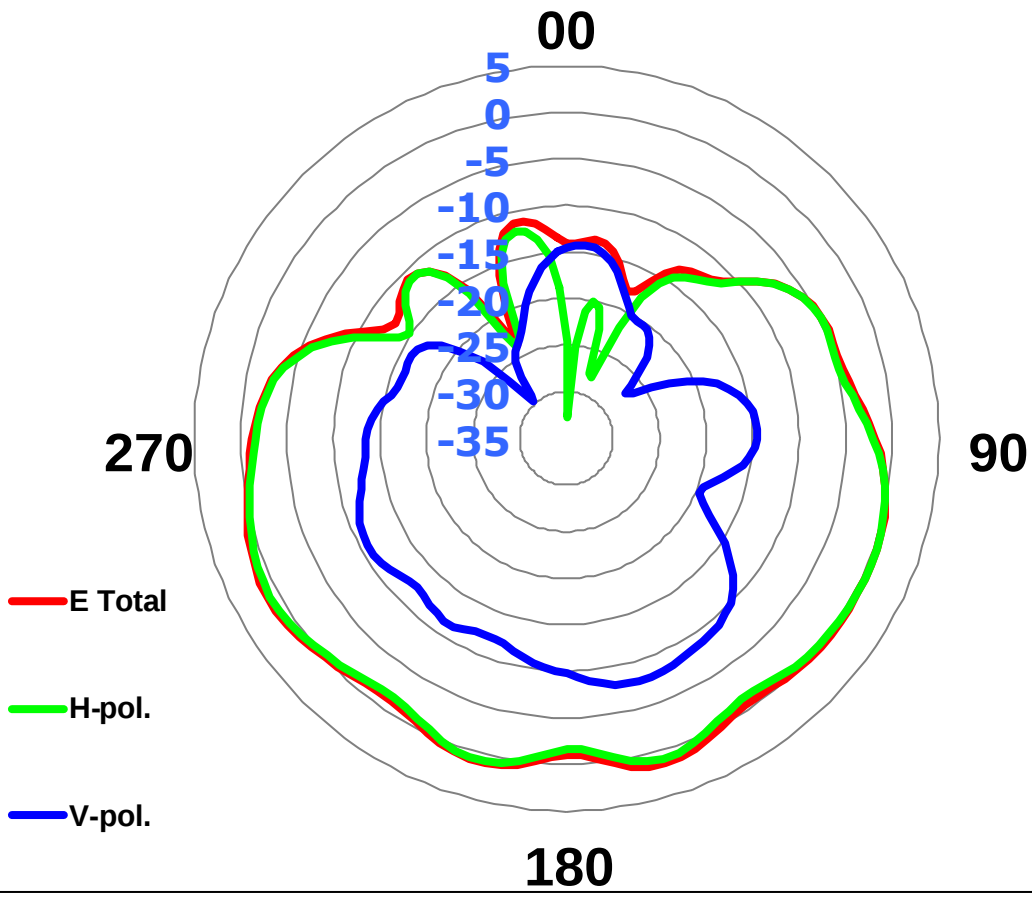


	H-pol	V pol
Peak Gain	1.08	-7.72

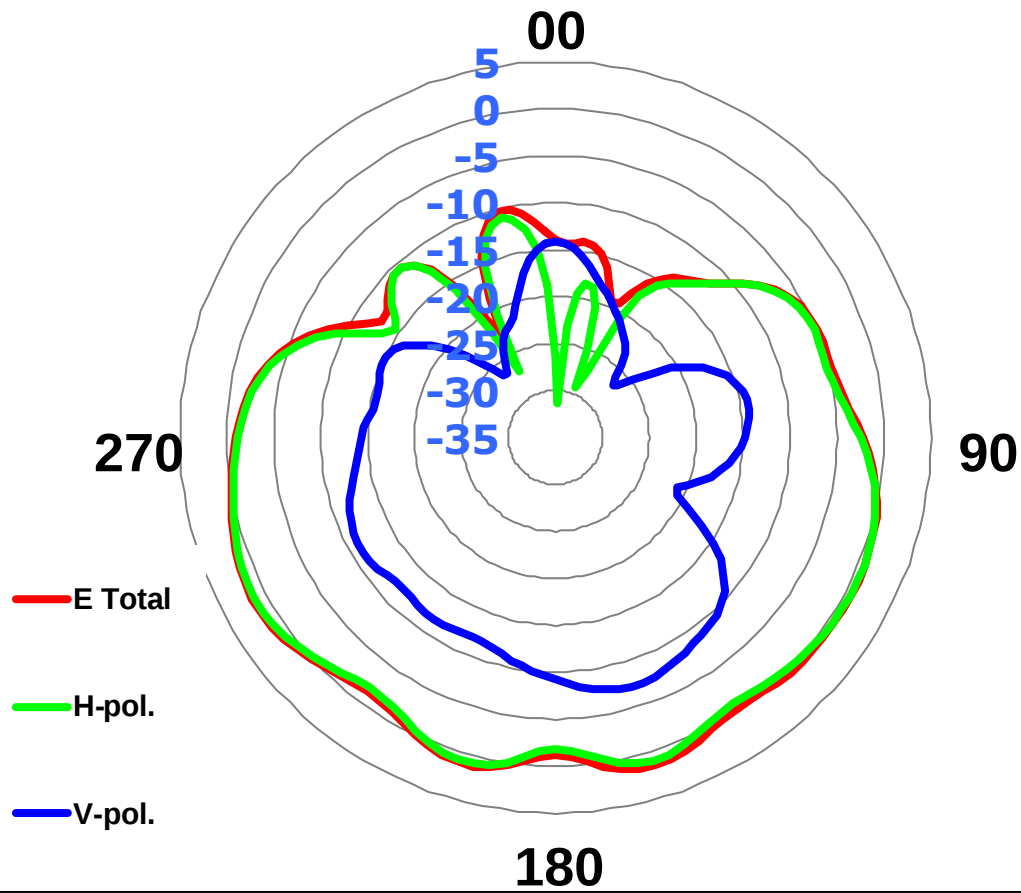Ant5 @ 1962 MHz


	H-pol	V pol
Peak Gain	1.32	-7.25

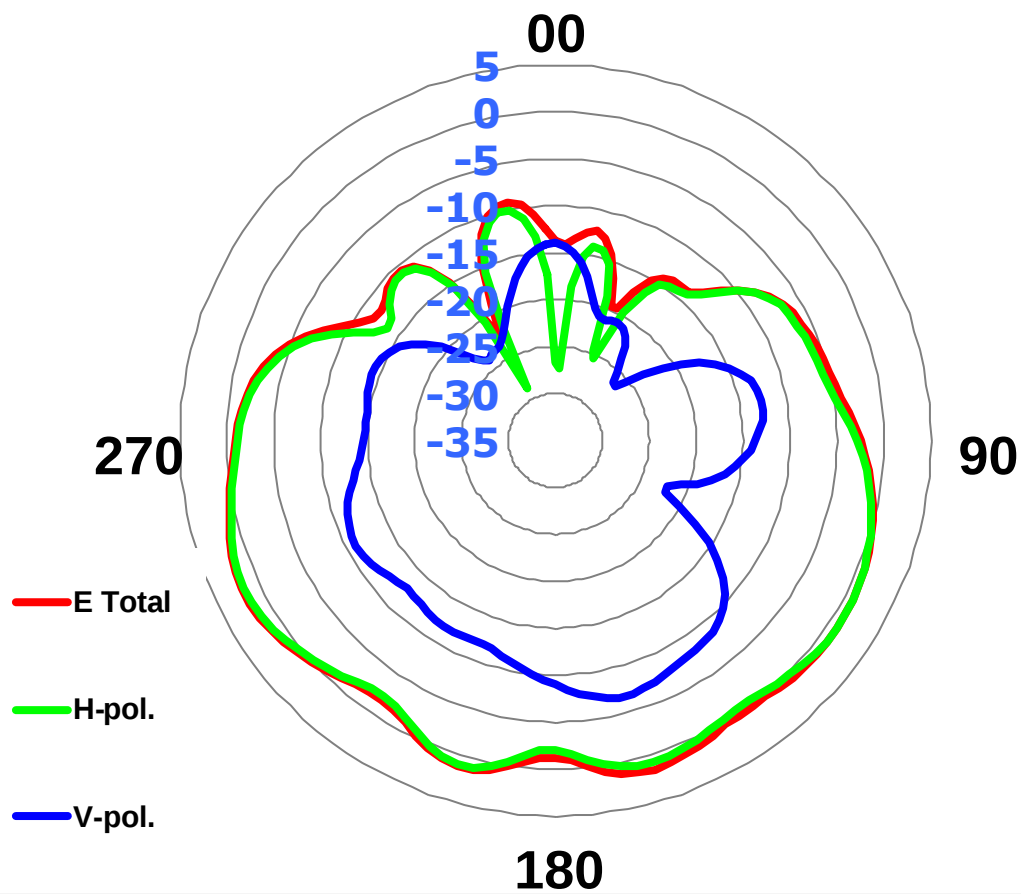Ant5 @ 1980 MHz


	H-pol	V pol
Peak Gain	1.73	-6.76

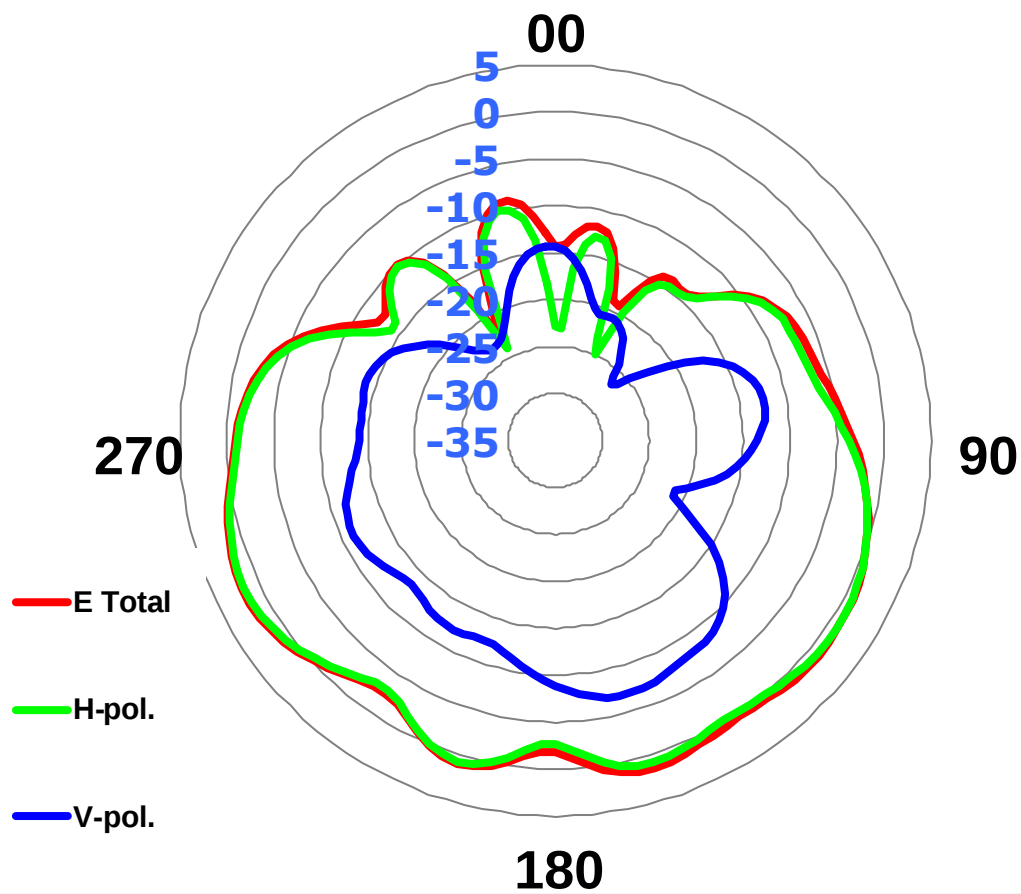Ant5 @ 1995 MHz

	H-pol	V pol
Peak Gain	1.68	-6.91

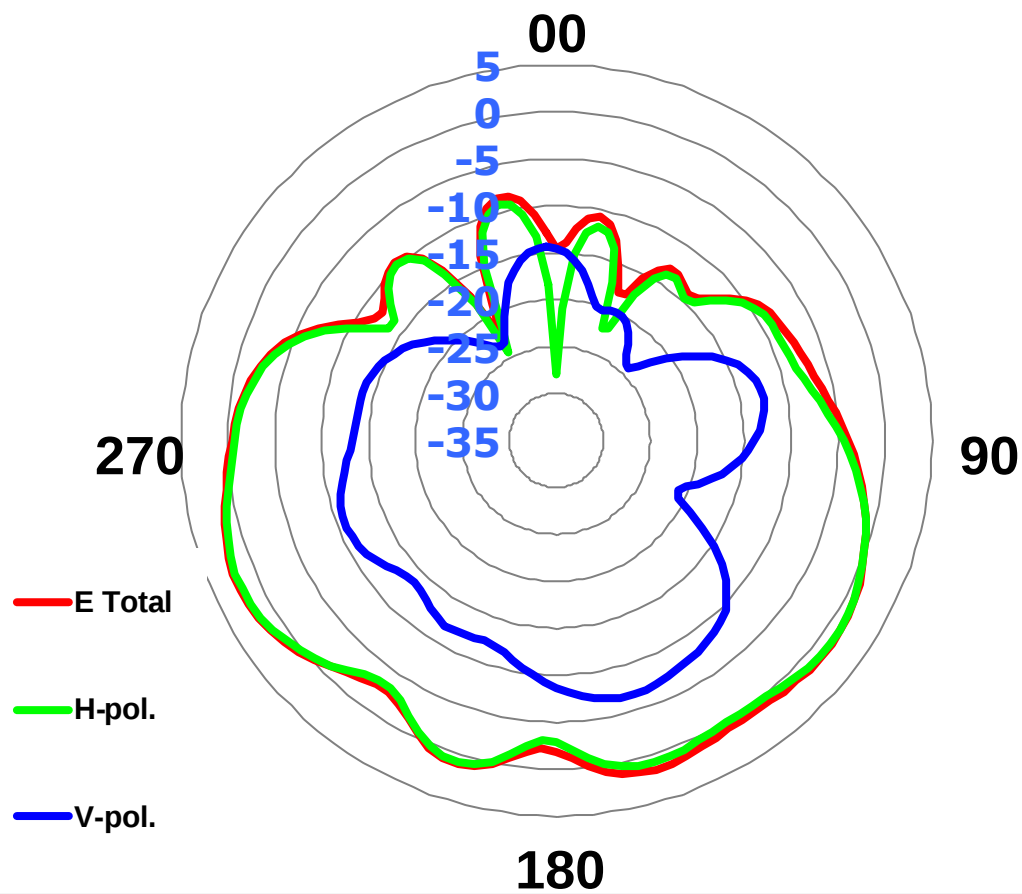
Ant5 @ 2010 MHz

	H-pol	V pol
Peak Gain	2.01	-6.71

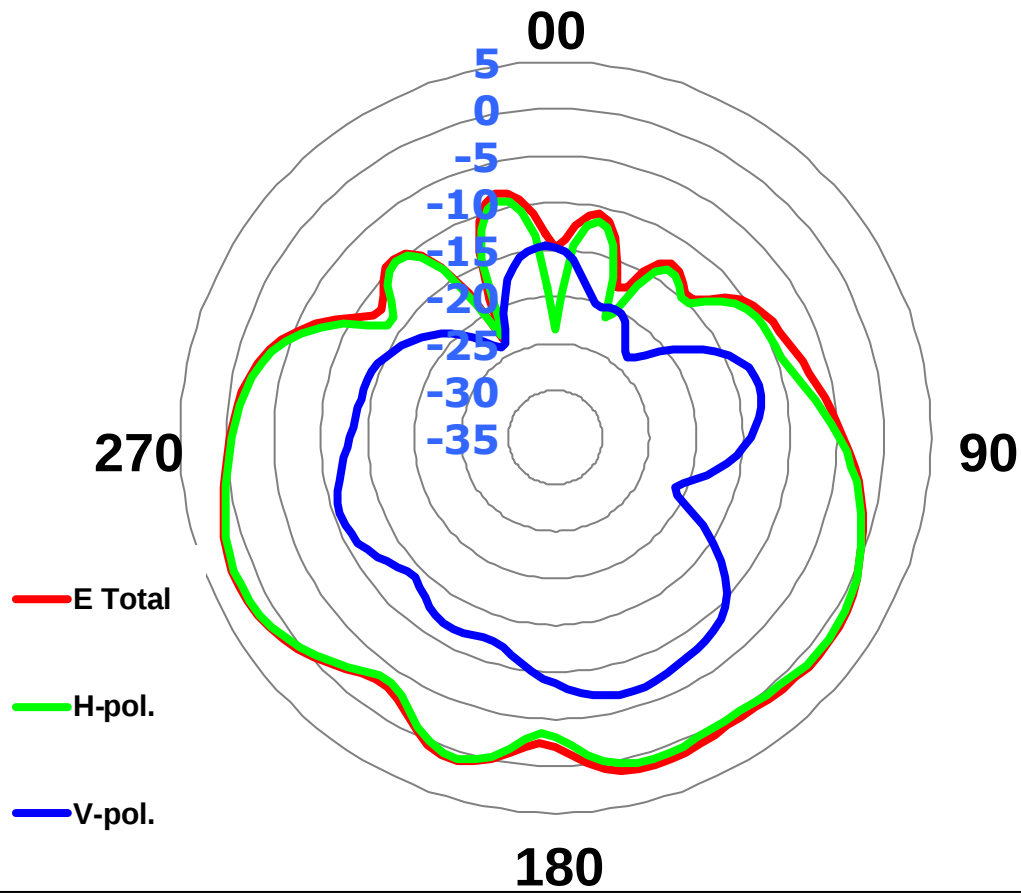Ant5 @ 2017 MHz


	H-pol	V pol
Peak Gain	2.03	-6.68

Ant5 @ 2025 MHz

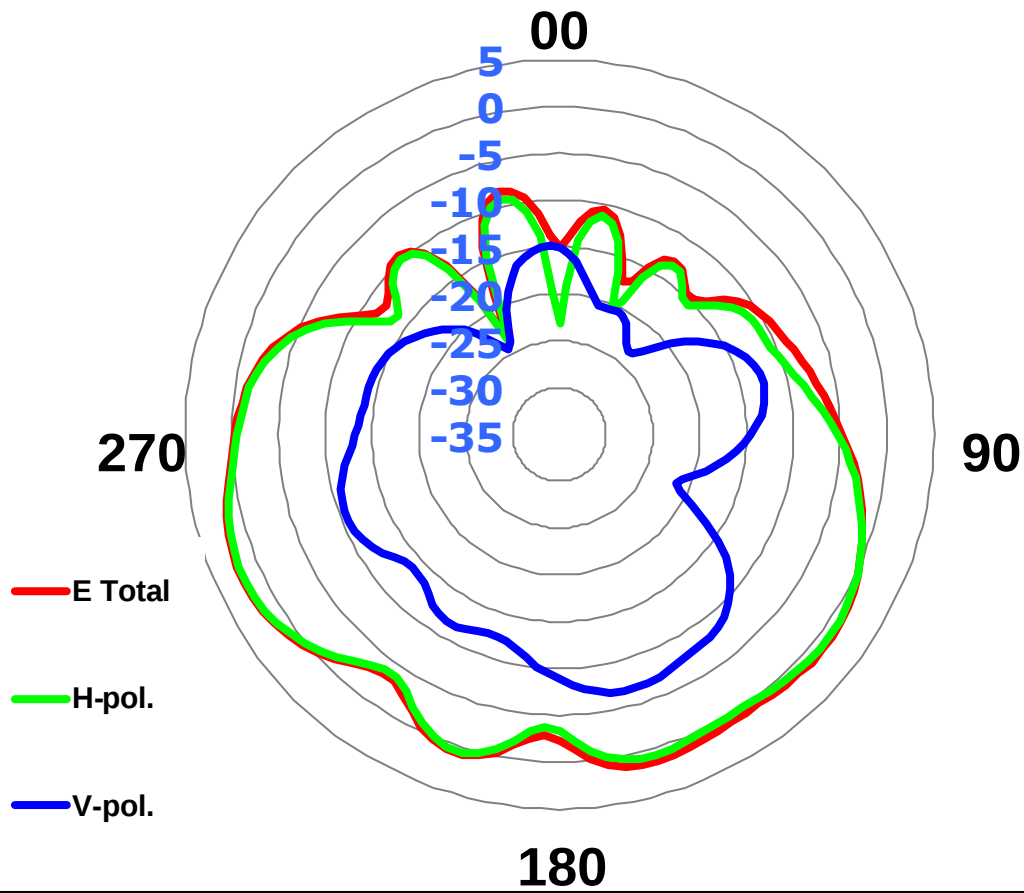


	H-pol	V pol
Peak Gain	2.04	-6.70

Ant5 @ 2110 MHz

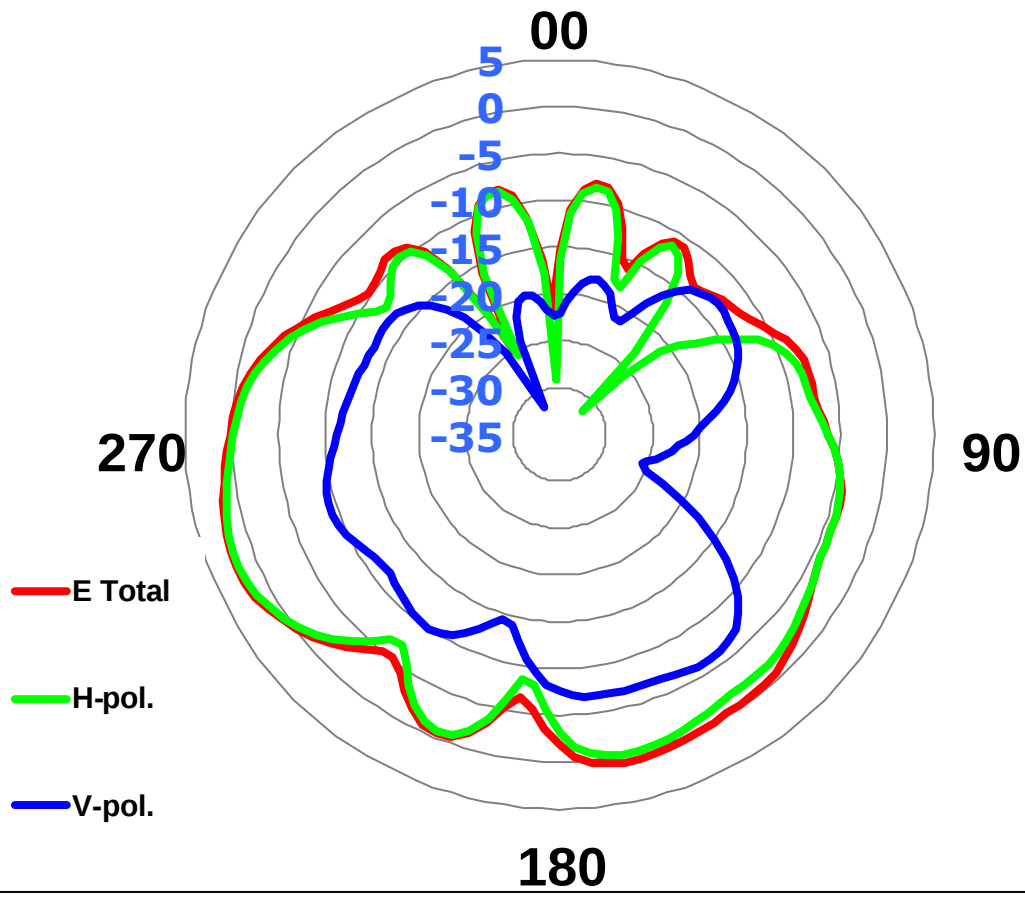


	H-pol	V pol
Peak Gain	2.06	-6.04

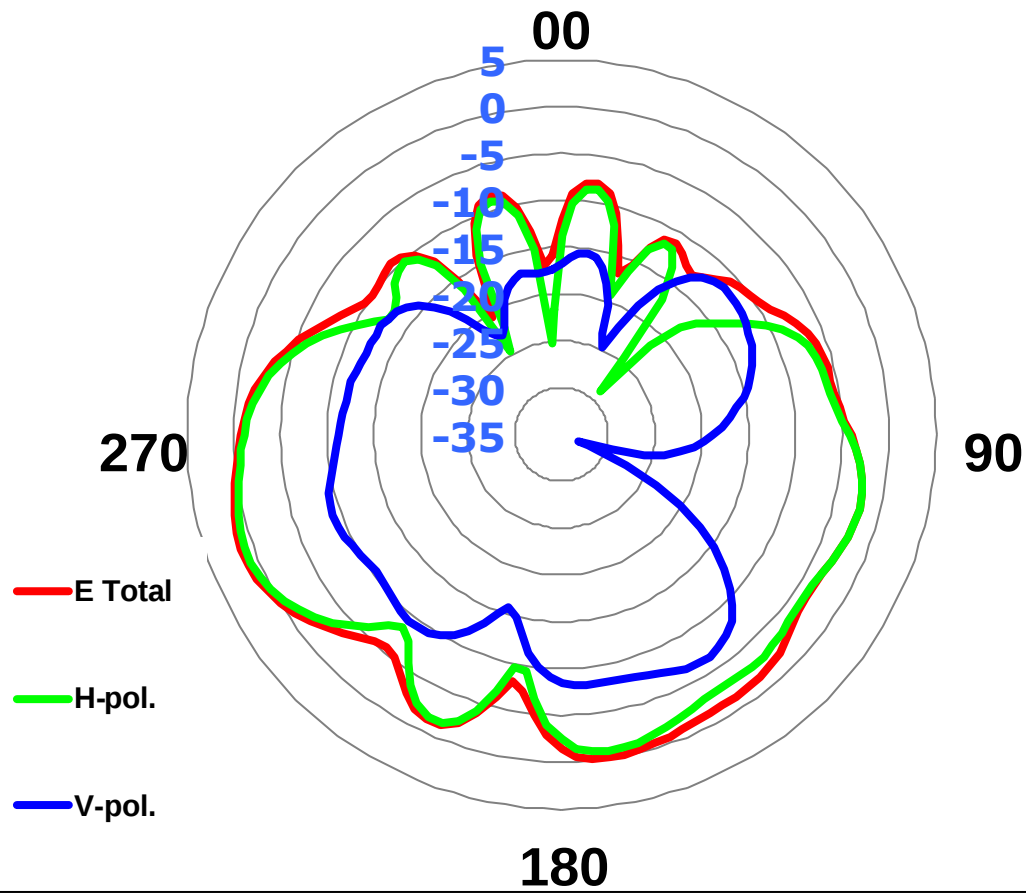Ant5 @ 2140 MHz


	H-pol	V pol
Peak Gain	0.89	-6.51

Ant5 @ 2155 MHz

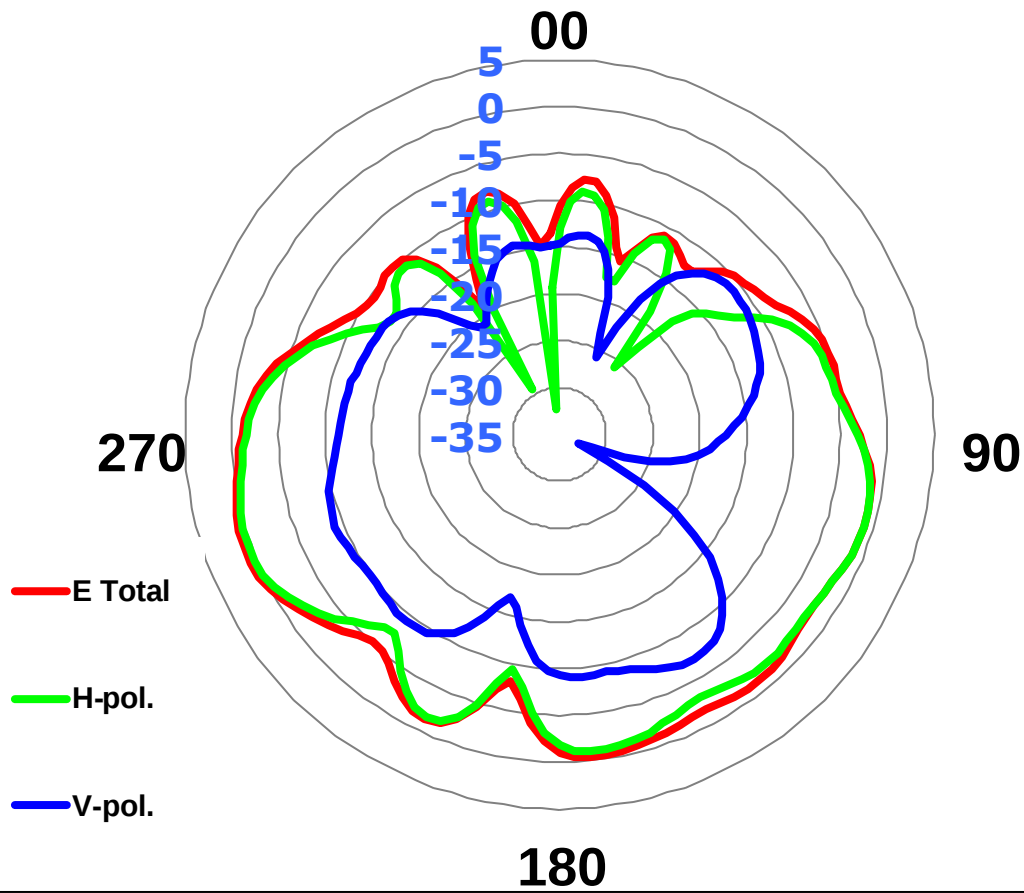


	H-pol	V pol
Peak Gain	0.33	-7.02

Ant5 @ 2170 MHz

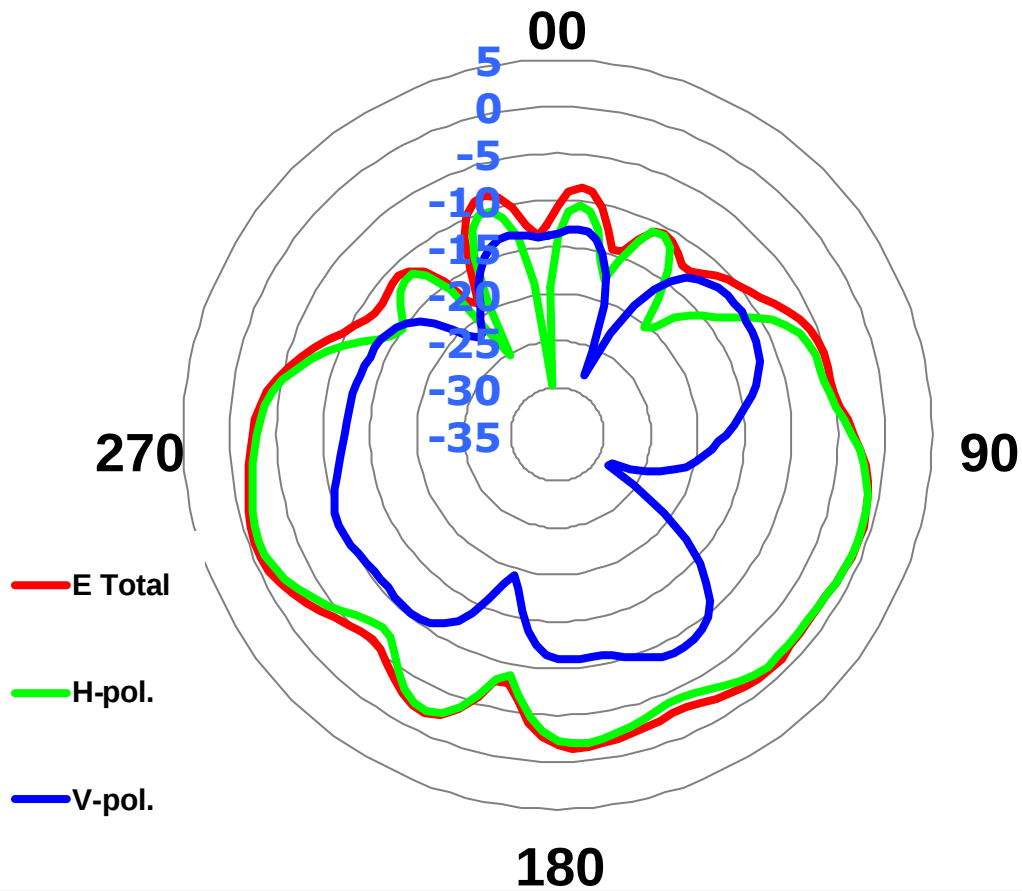


	H-pol	V pol
Peak Gain	-0.91	-8.46

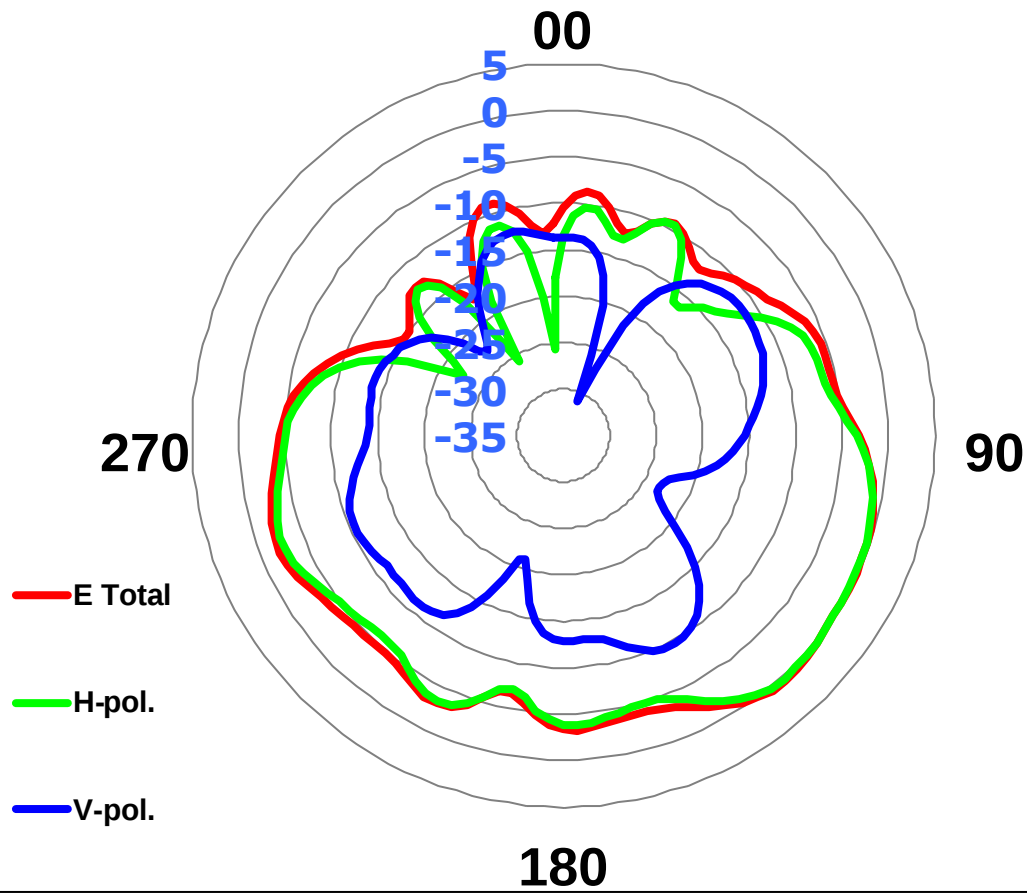
Ant5 @ 2200 MHz

	H-pol	V pol
Peak Gain	0.42	-9.57


Ant5 @ 2300 MHz

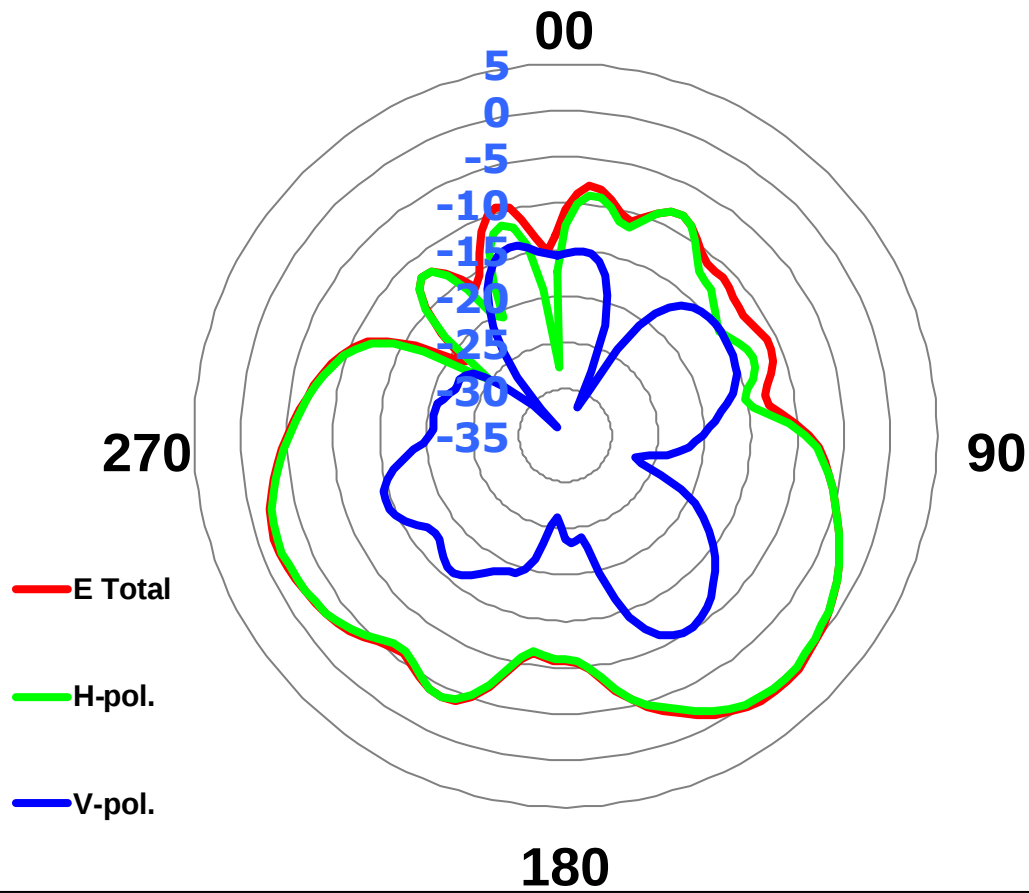


	H-pol	V pol
Peak Gain	0.34	-10.26

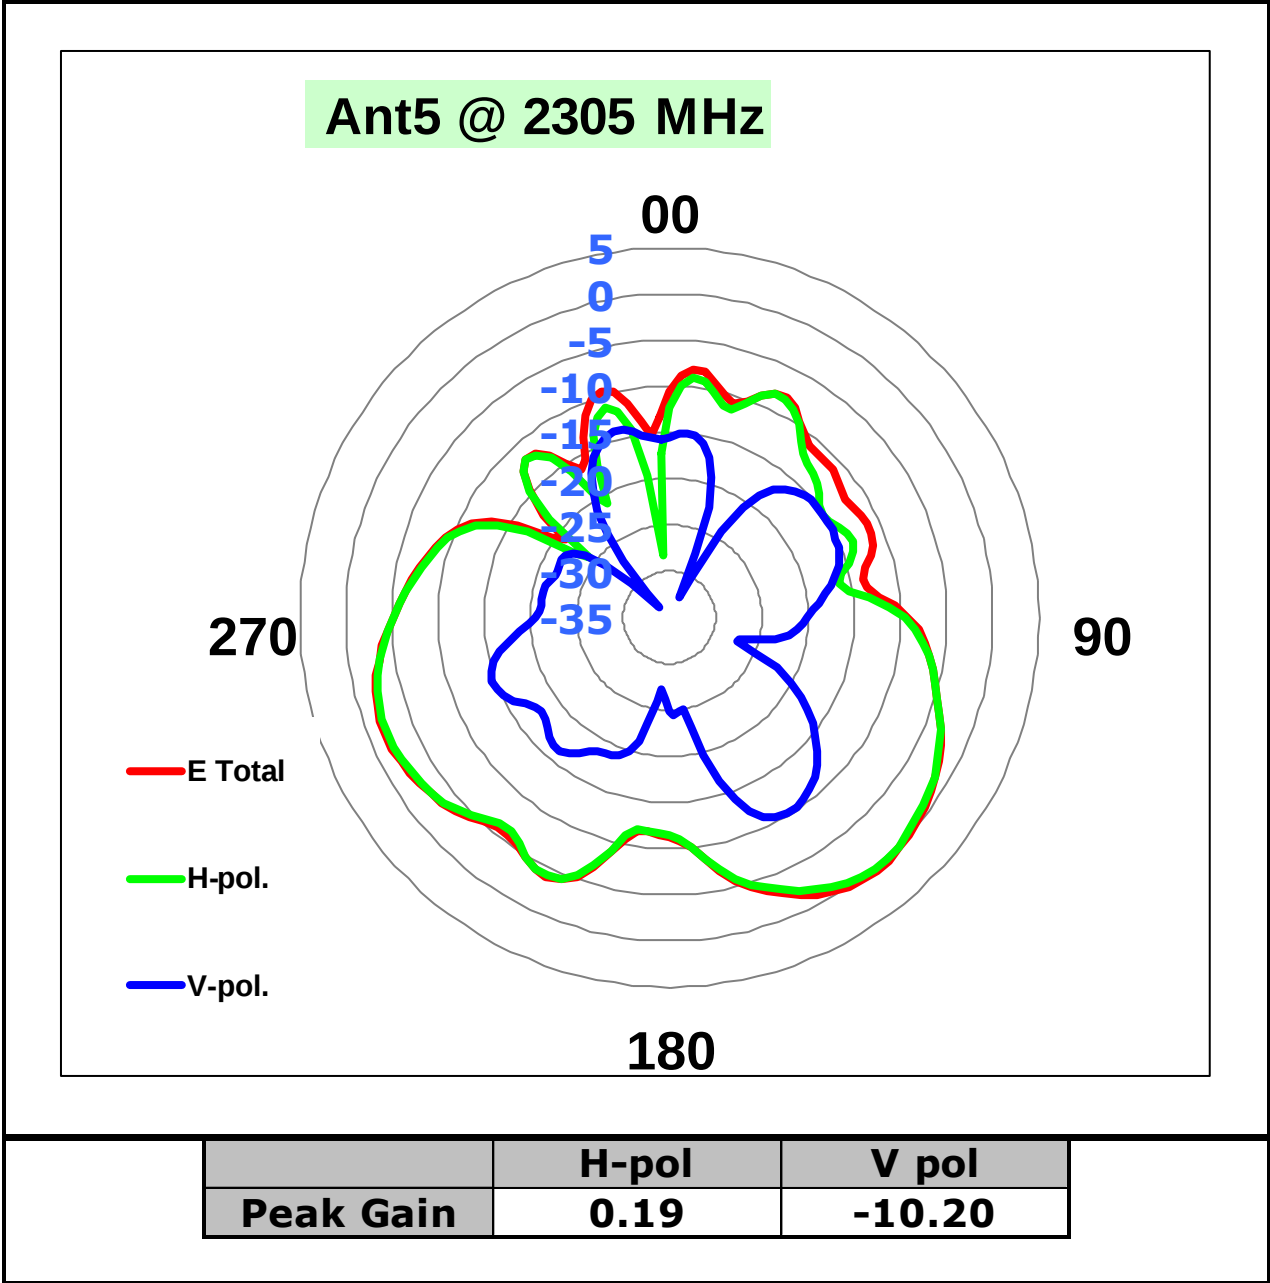

Ant5 @ 2310 MHz

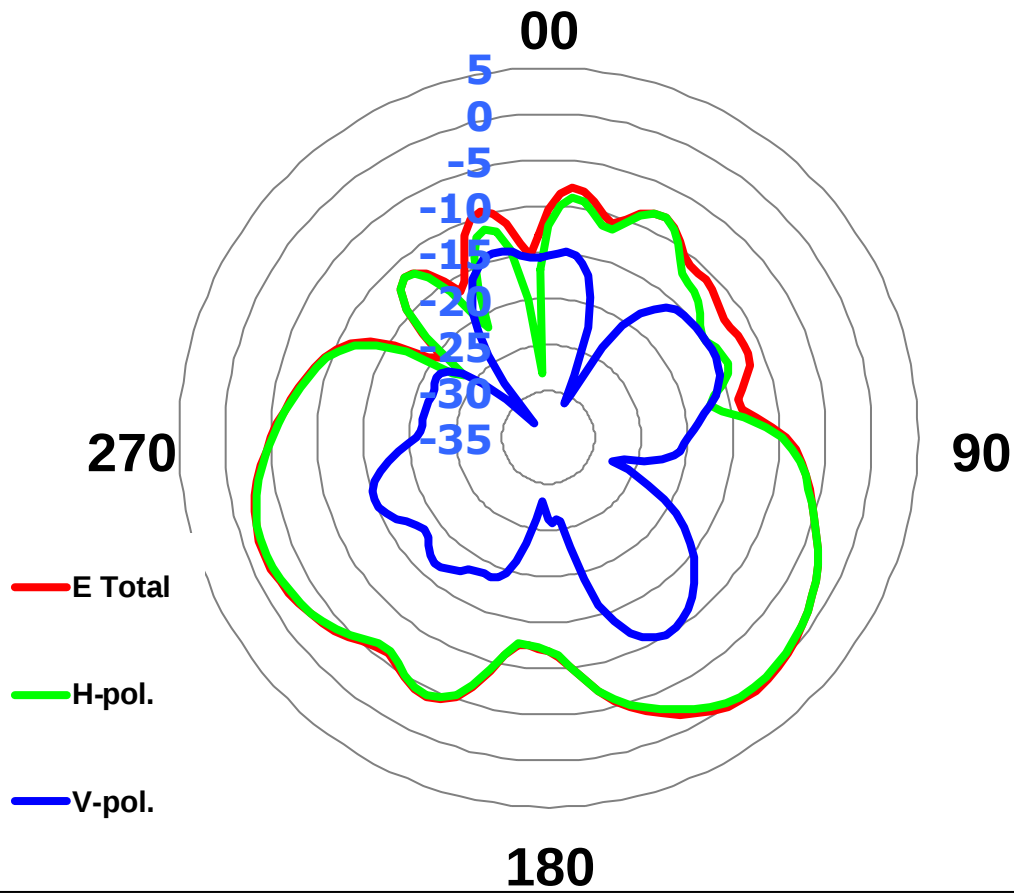


	H-pol	V pol
Peak Gain	0.10	-10.12

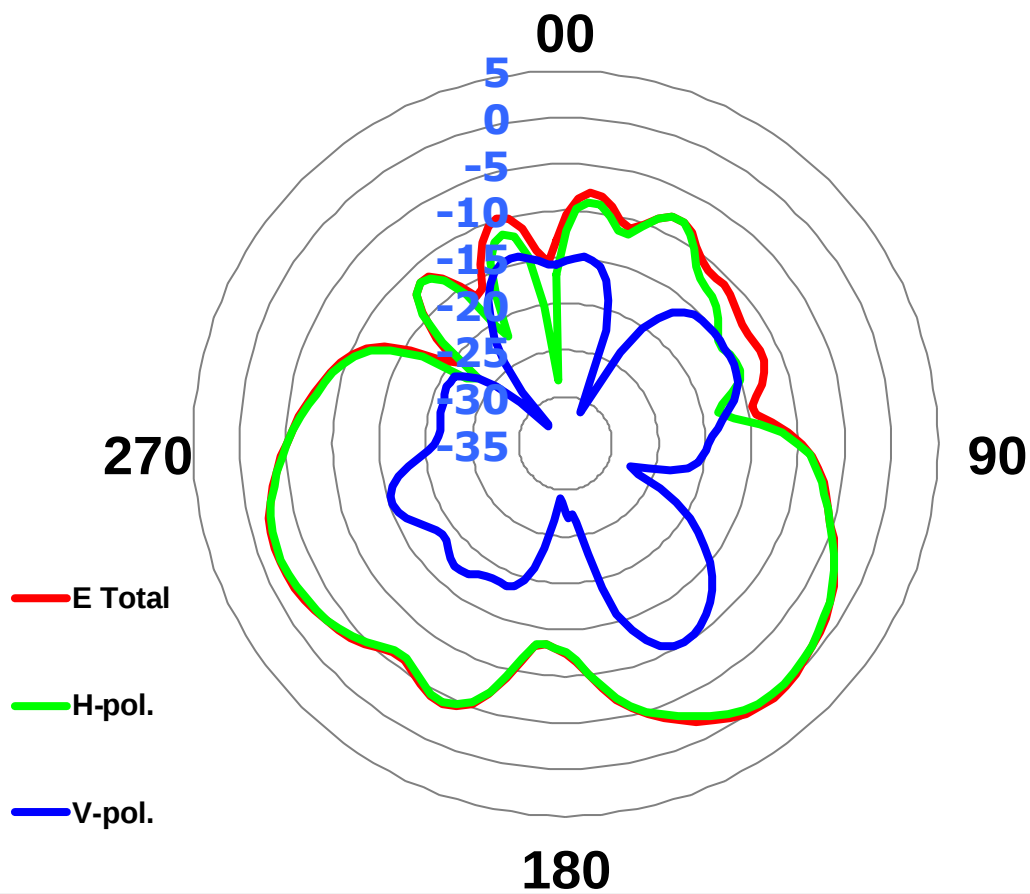Ant5 @ 2315 MHz


	H-pol	V pol
Peak Gain	-0.09	-10.17

Ant5 @ 2350 MHz

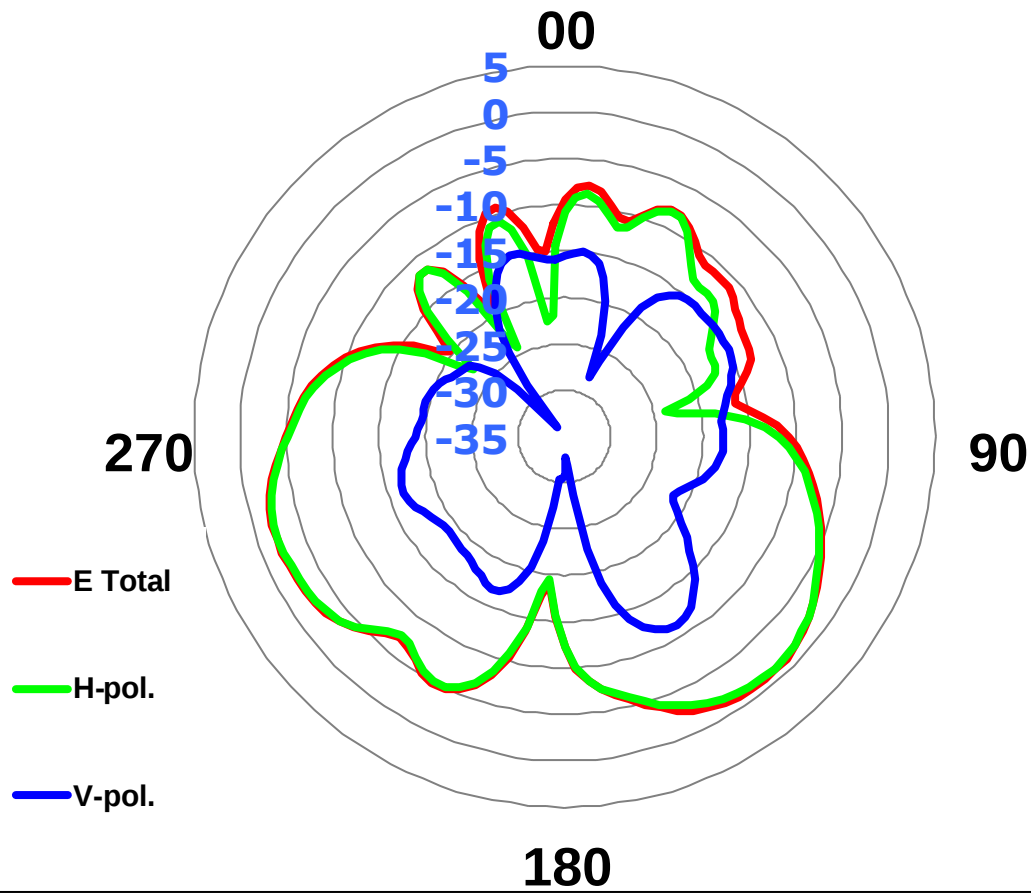


	H-pol	V pol
Peak Gain	-1.24	-11.28

Ant5 @ 2355 MHz

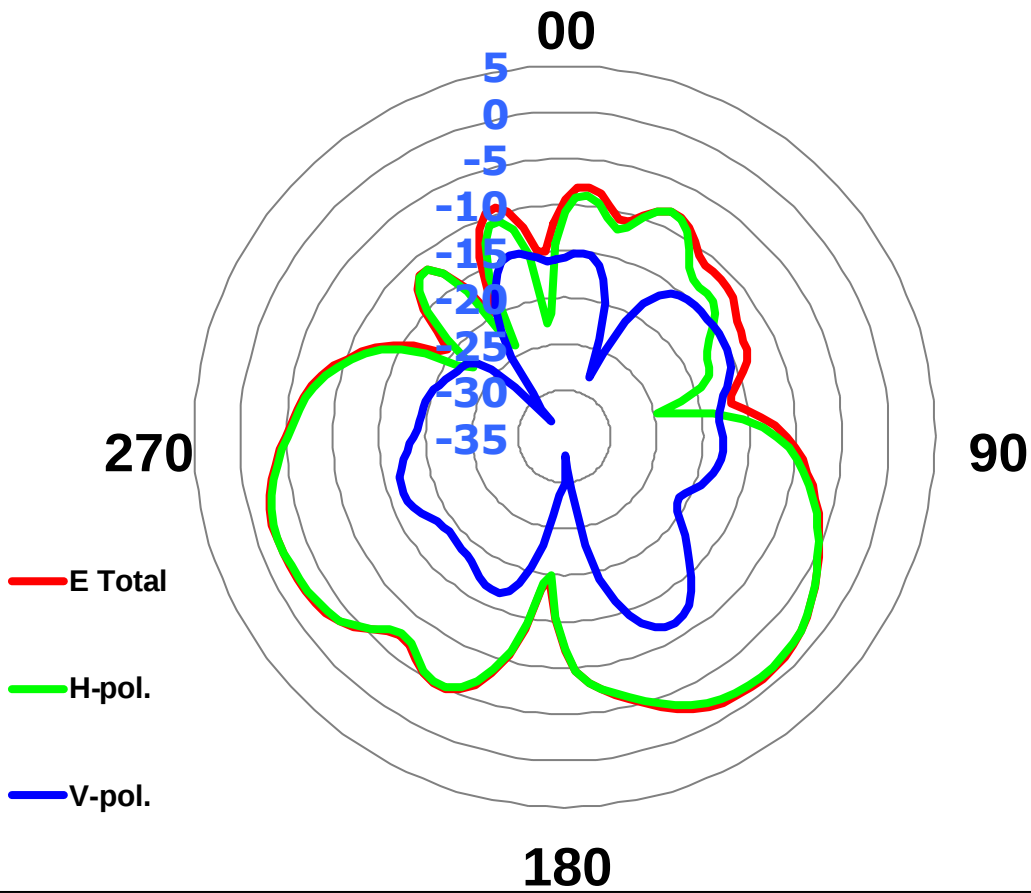


	H-pol	V pol
Peak Gain	-1.45	-11.57

Ant5 @ 2360 MHz

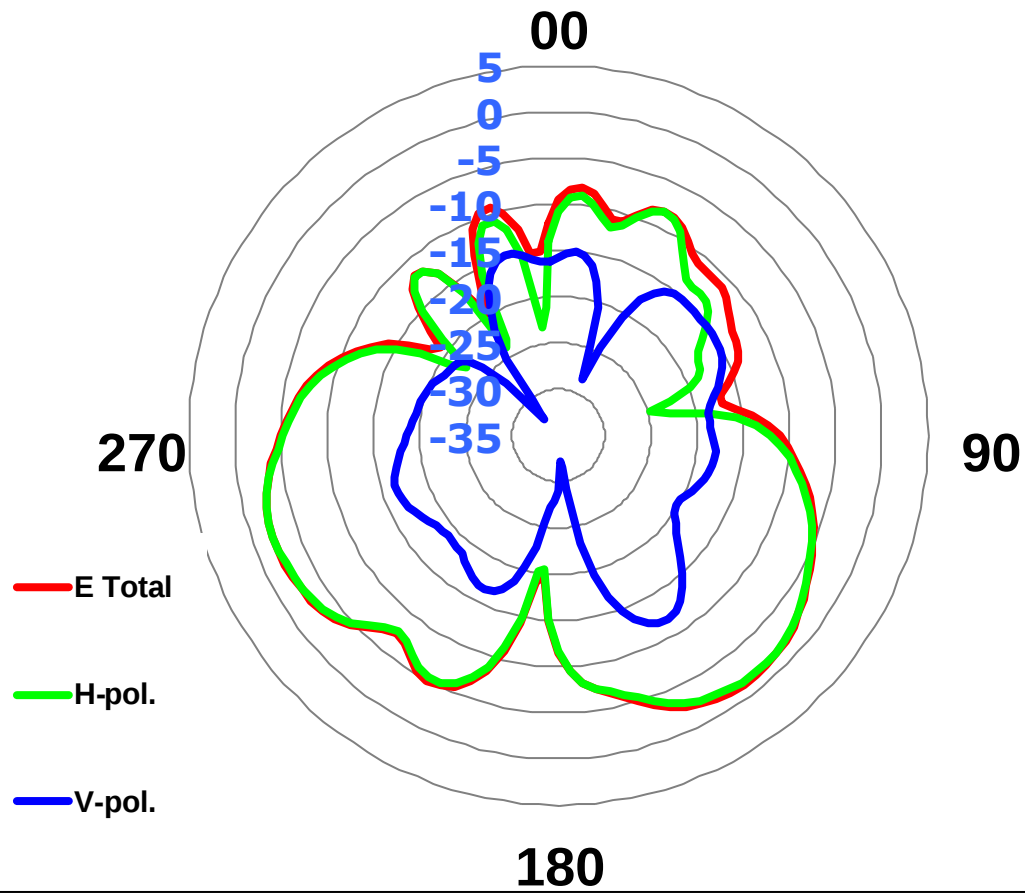


	H-pol	V pol
Peak Gain	-1.63	-11.83

Ant5 @ 2400 MHz

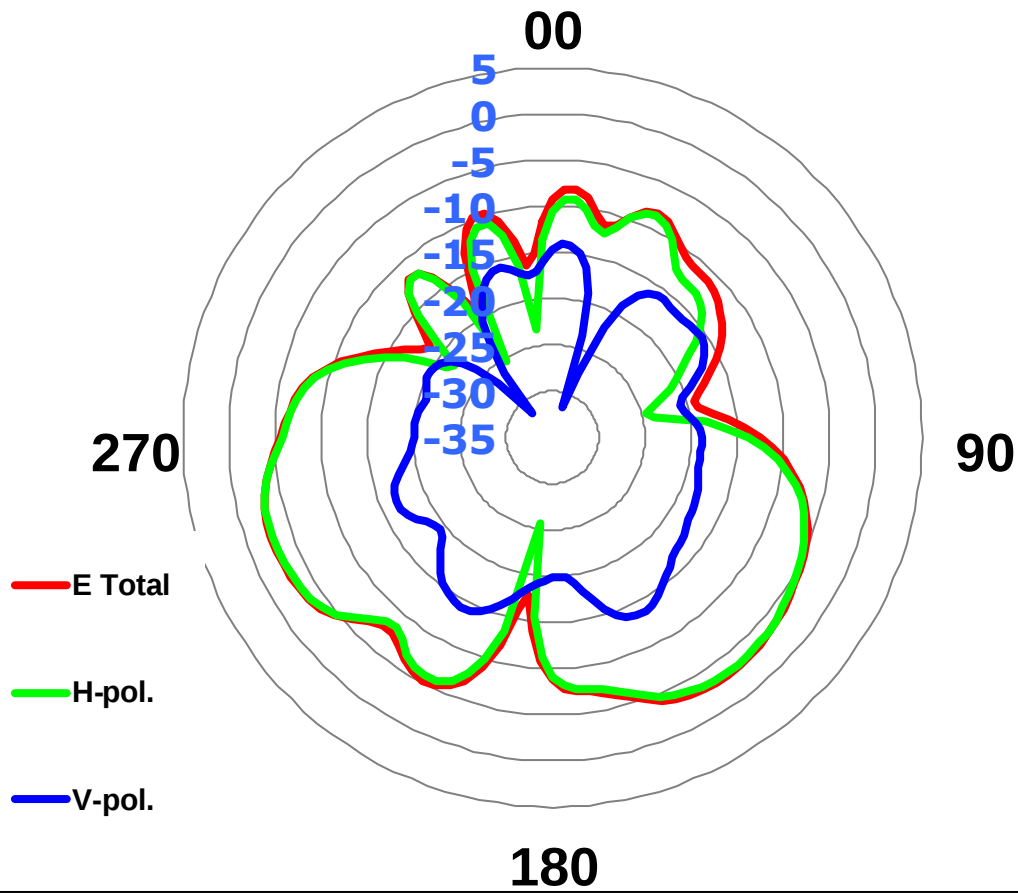


	H-pol	V pol
Peak Gain	-2.82	-13.61

Ant5 @ 2496 MHz

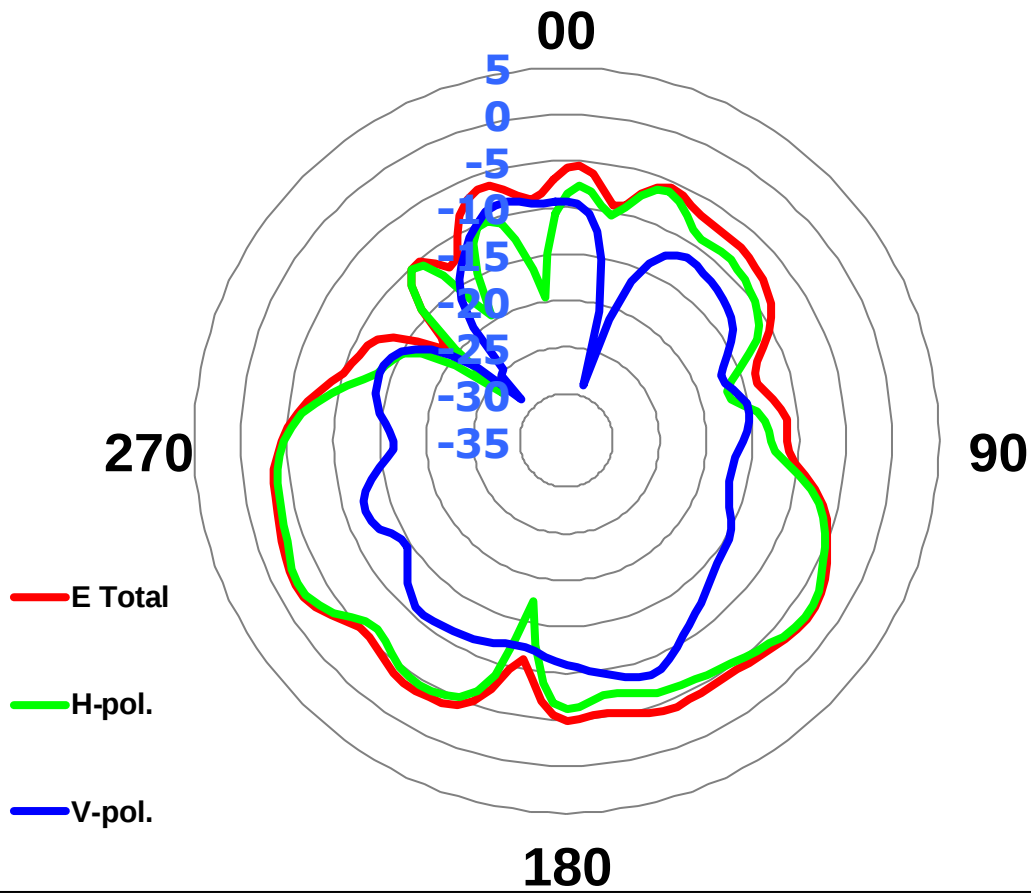


	H-pol	V pol
Peak Gain	-2.31	-8.26

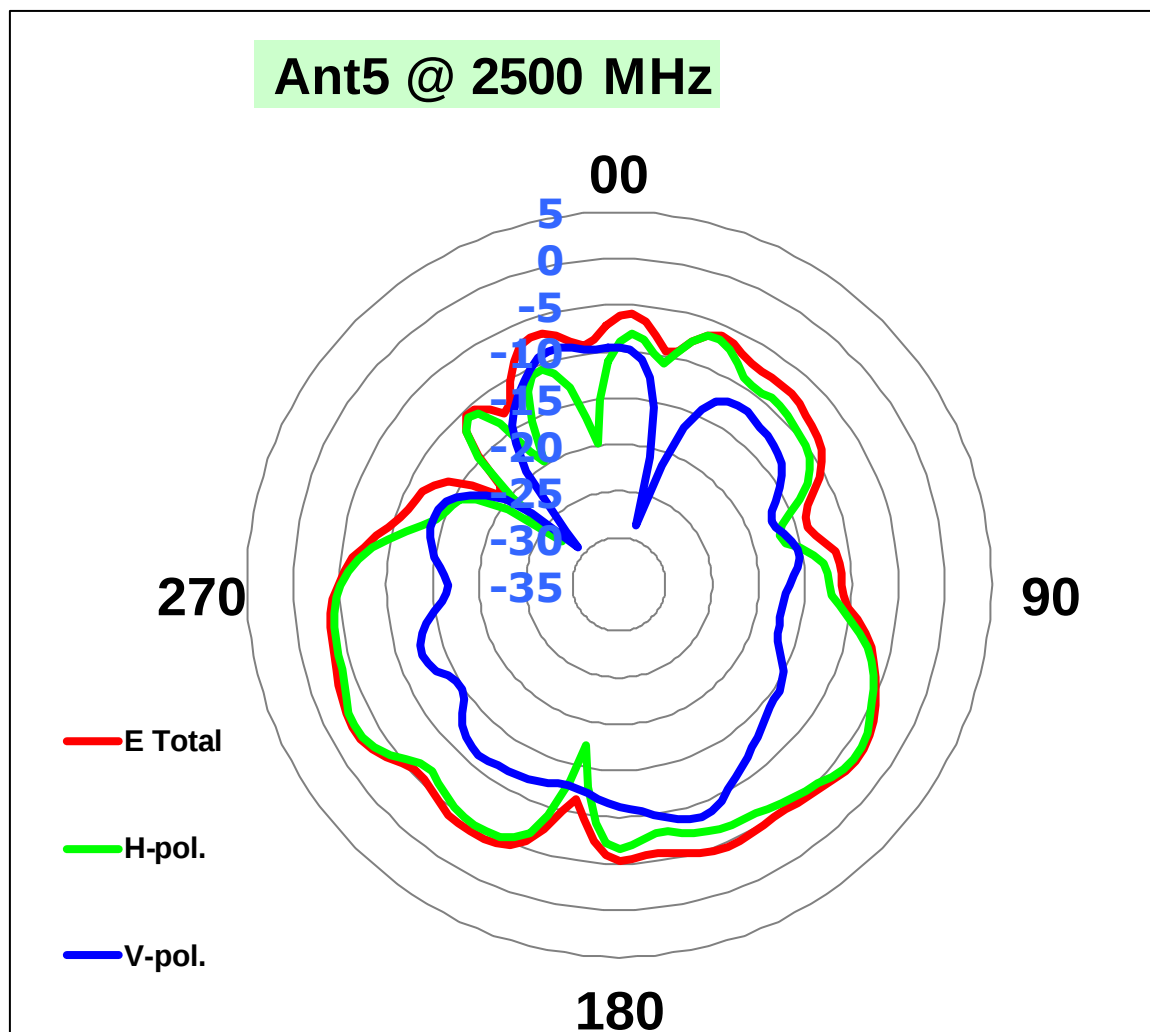


	H-pol	V pol
Peak Gain	-2.73	-8.49


Ant5 @ 2535 MHz

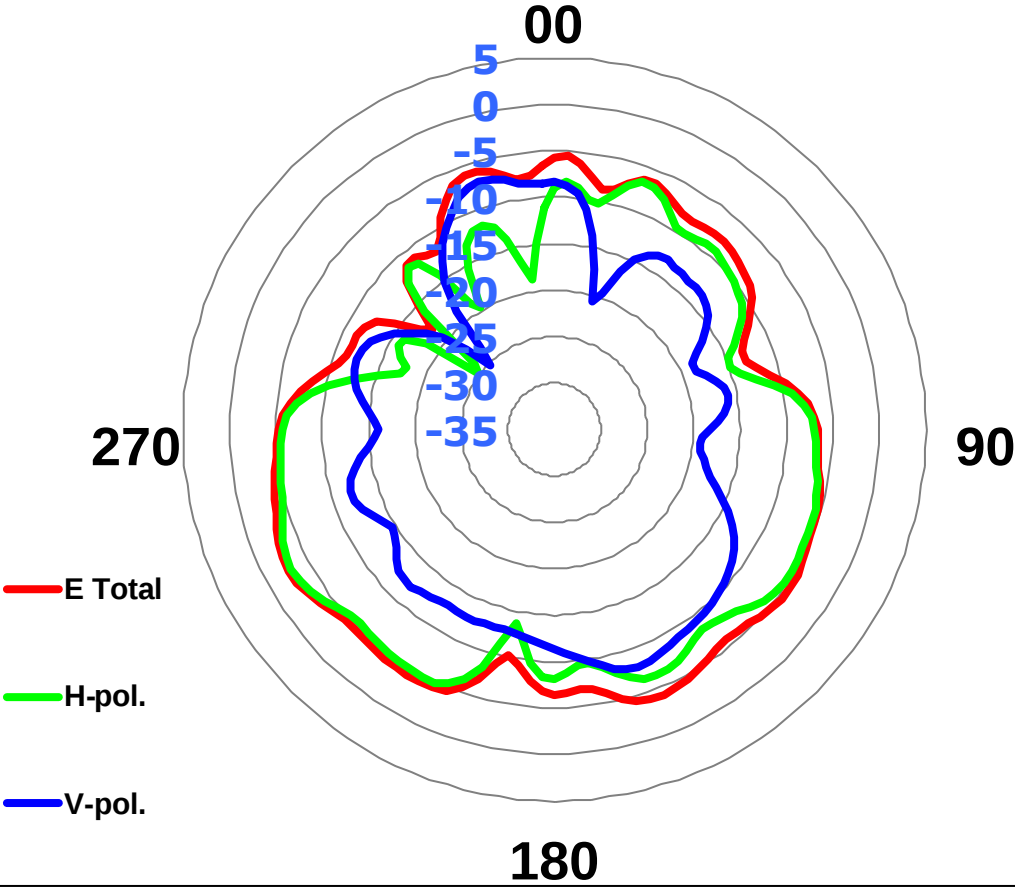

	H-pol	V pol
Peak Gain	-2.91	-7.08

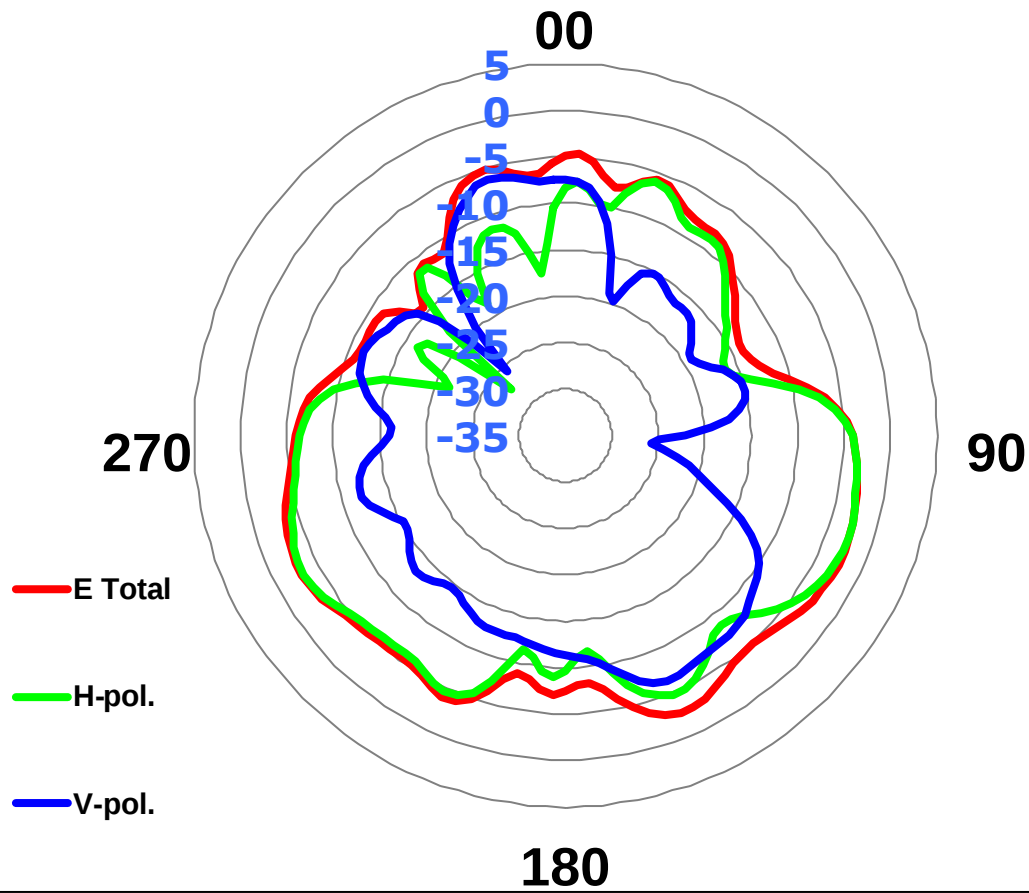
Ant5 @ 2570 MHz

	H-pol	V pol
Peak Gain	-2.64	-6.29

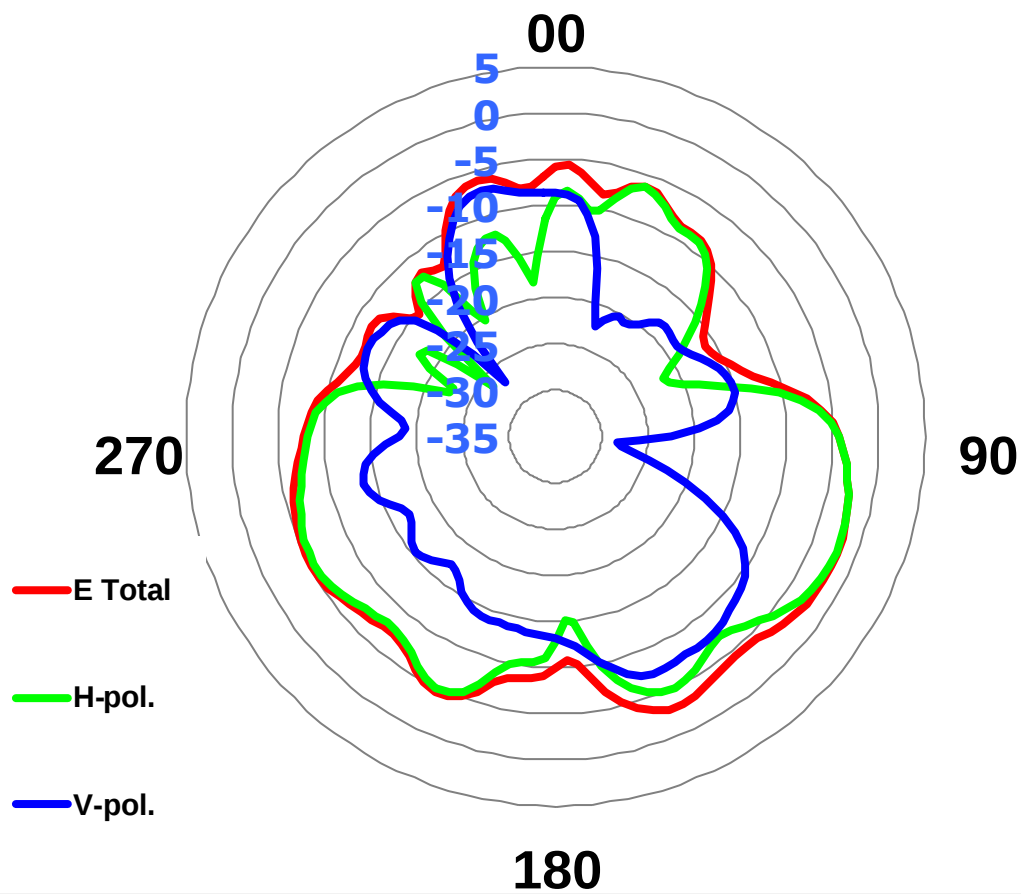
Ant5 @ 2593 MHz

	H-pol	V pol
Peak Gain	-2.05	-7.20

Ant5 @ 2595 MHz

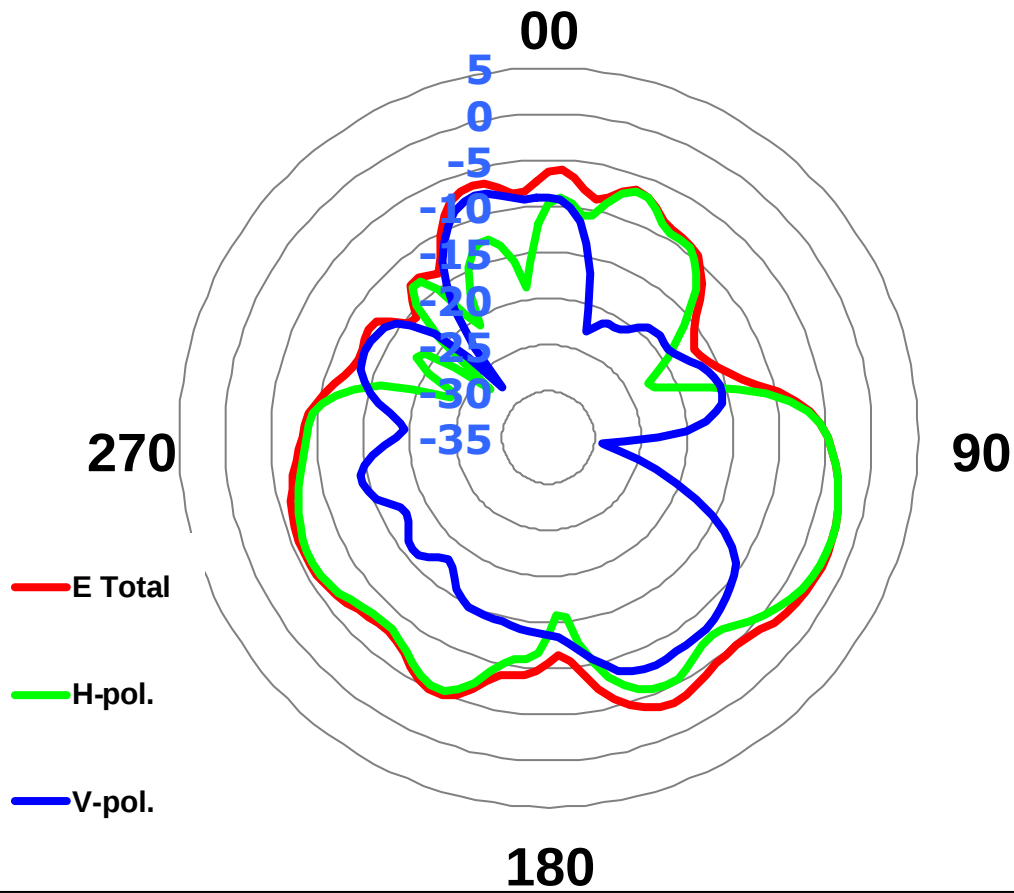


	H-pol	V pol
Peak Gain	-2.39	-7.66

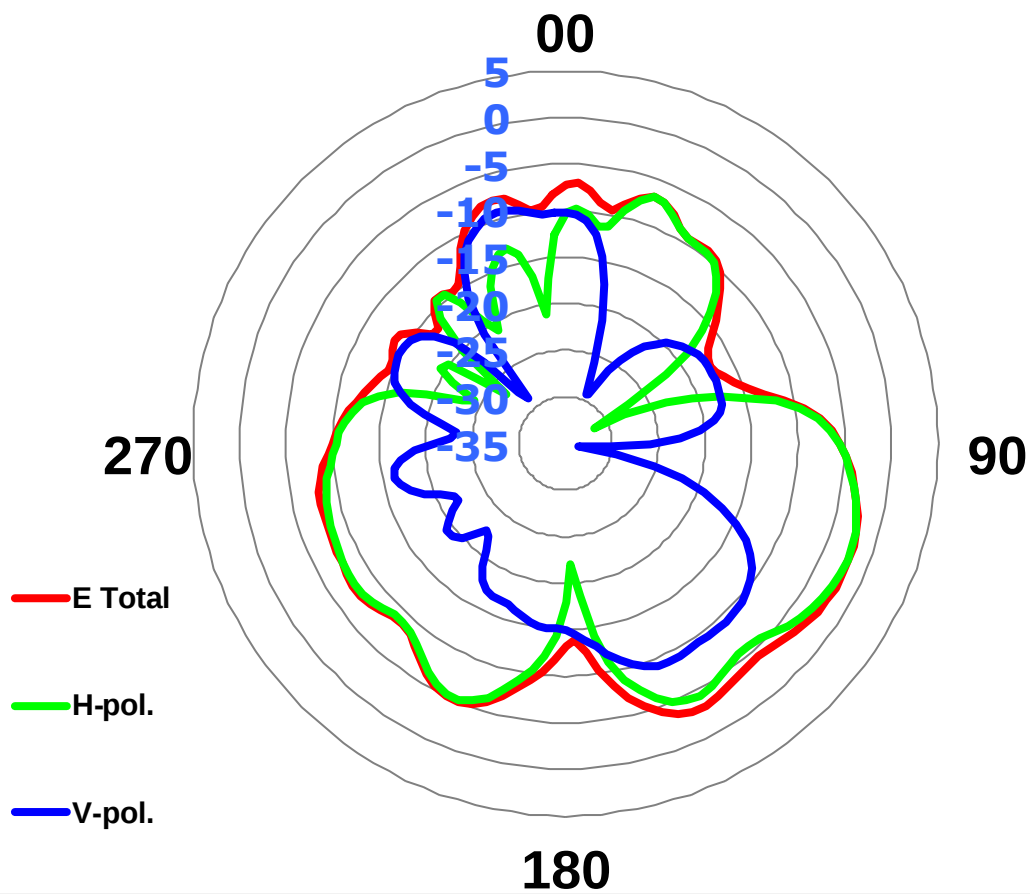Ant5 @ 2620 MHz


	H-pol	V pol
Peak Gain	-2.23	-9.02

Ant5 @ 2655 MHz

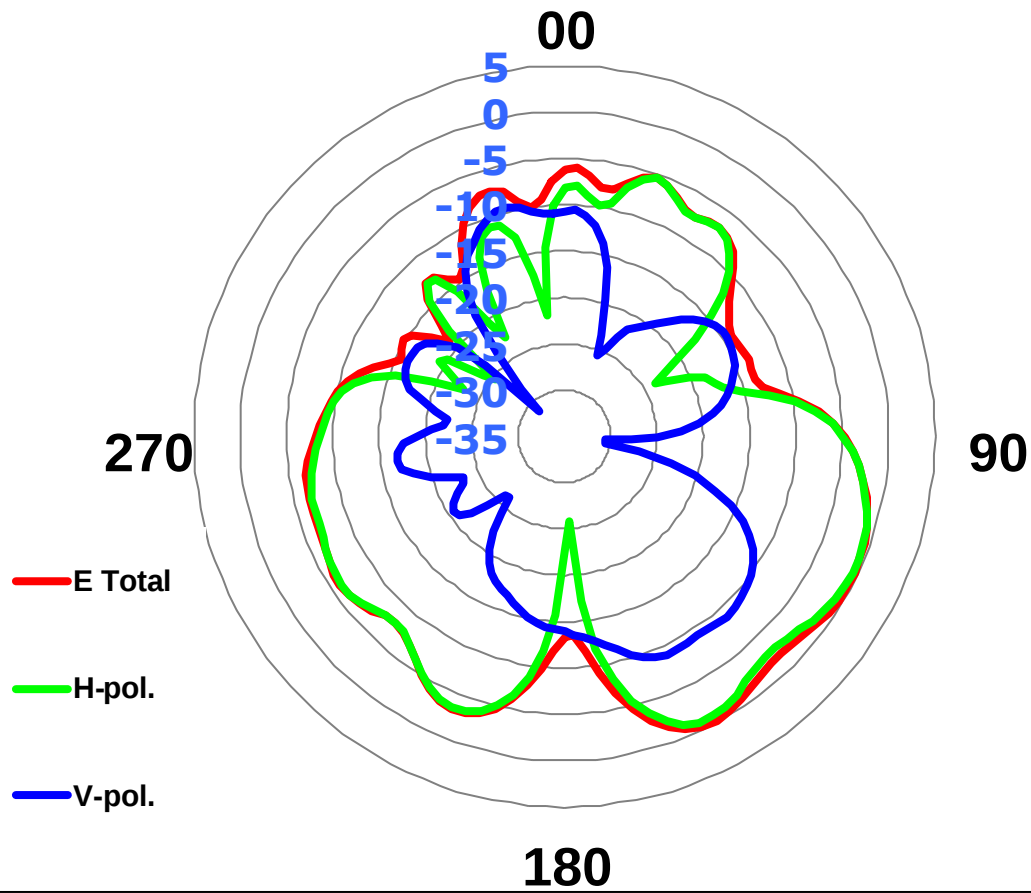


	H-pol	V pol
Peak Gain	-0.62	-8.74

Ant5 @ 2690 MHz

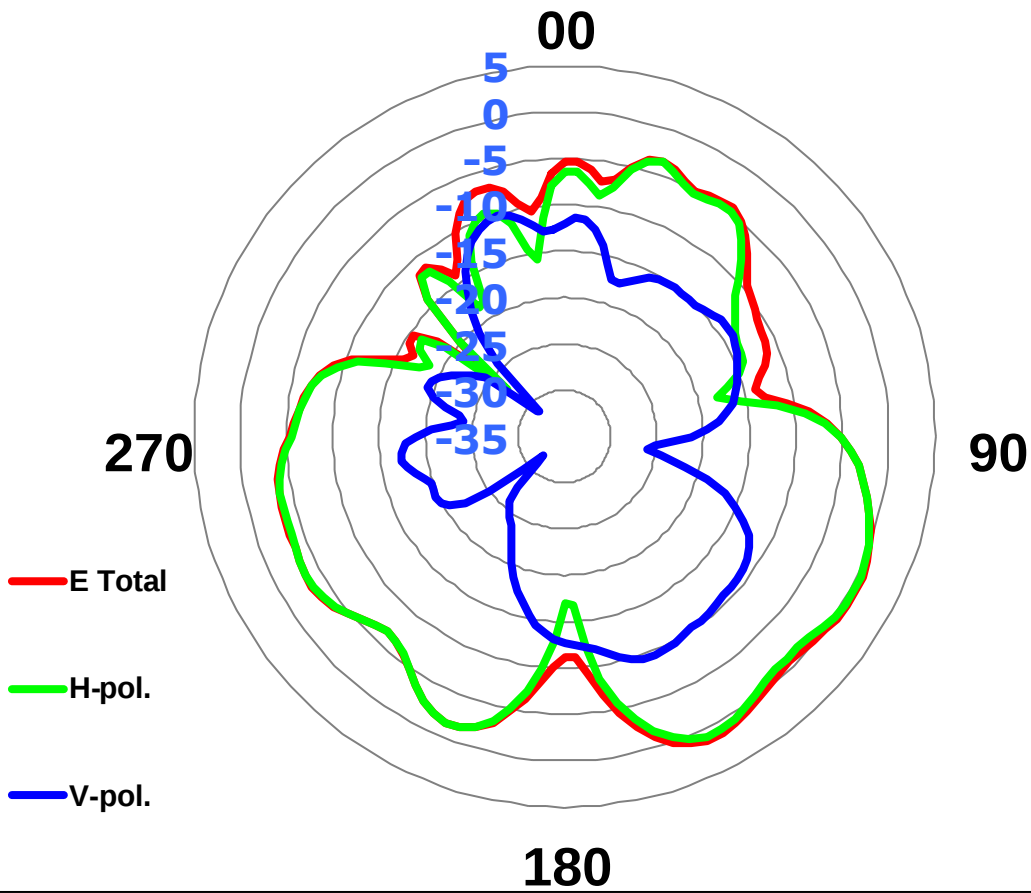


	H-pol	V pol
Peak Gain	0.94	-9.43


Ant5 @ 3300 MHz

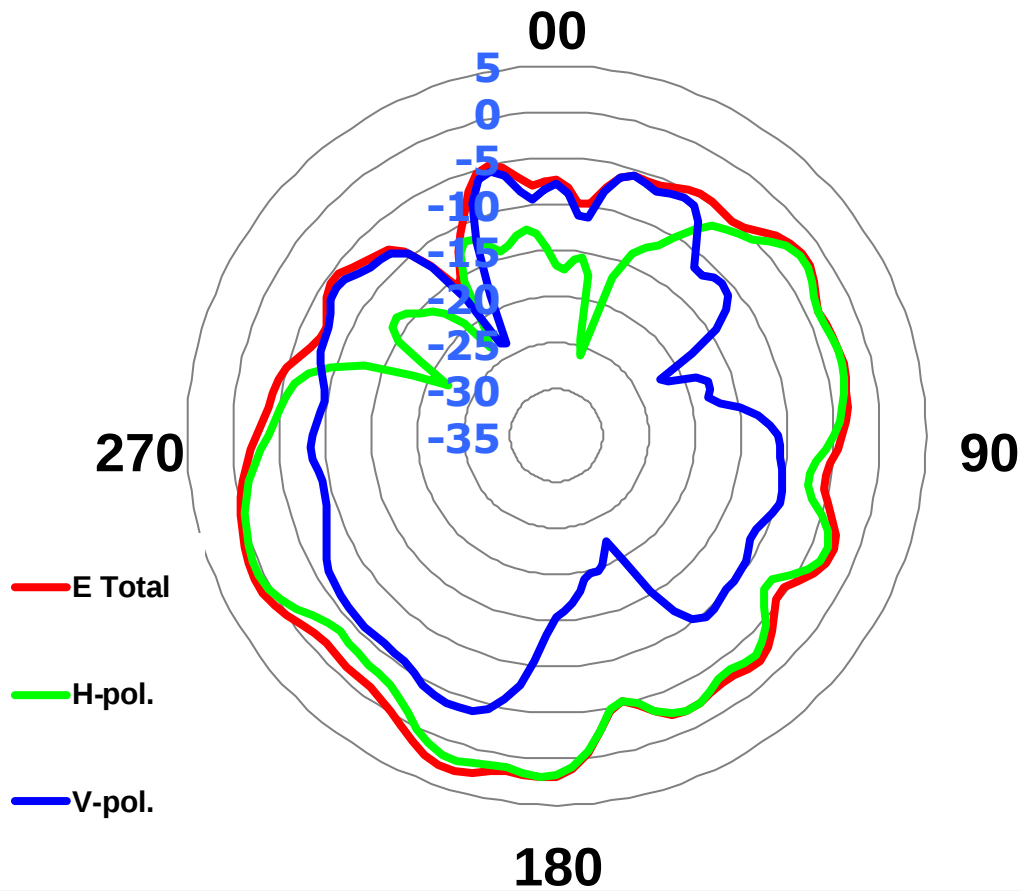


	H-pol	V pol
Peak Gain	1.98	-3.68

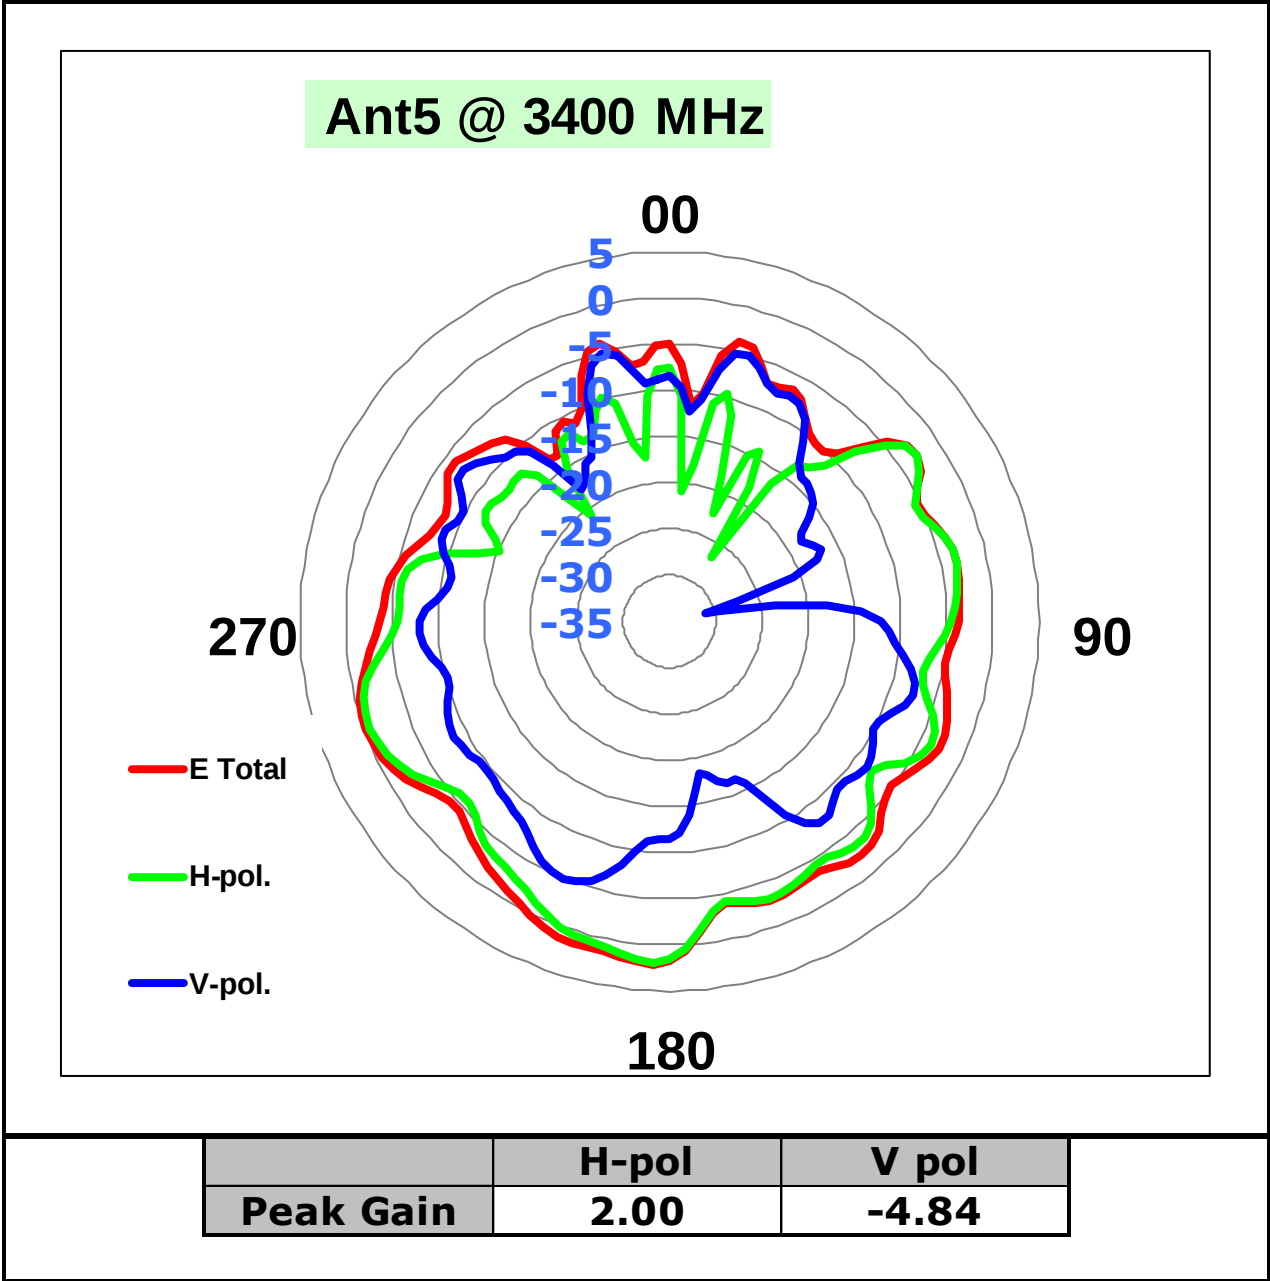

Ant5 @ 3500 MHz

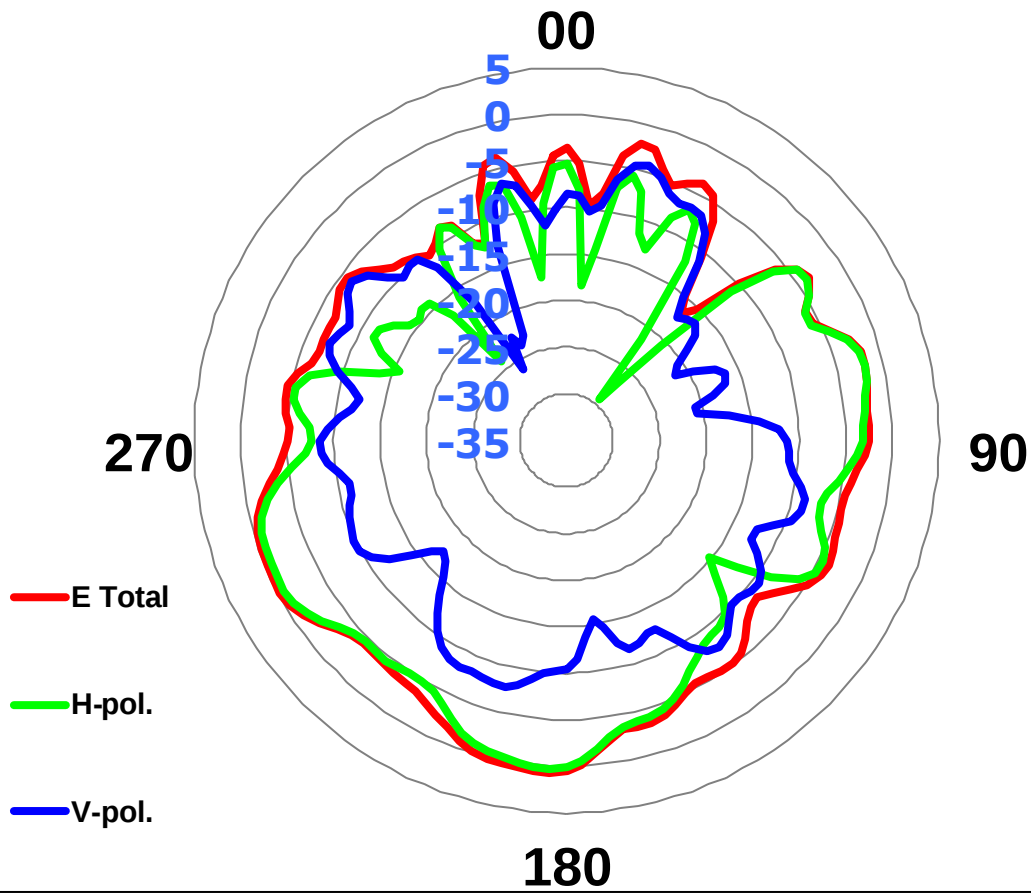


	H-pol	V pol
Peak Gain	0.36	-4.13

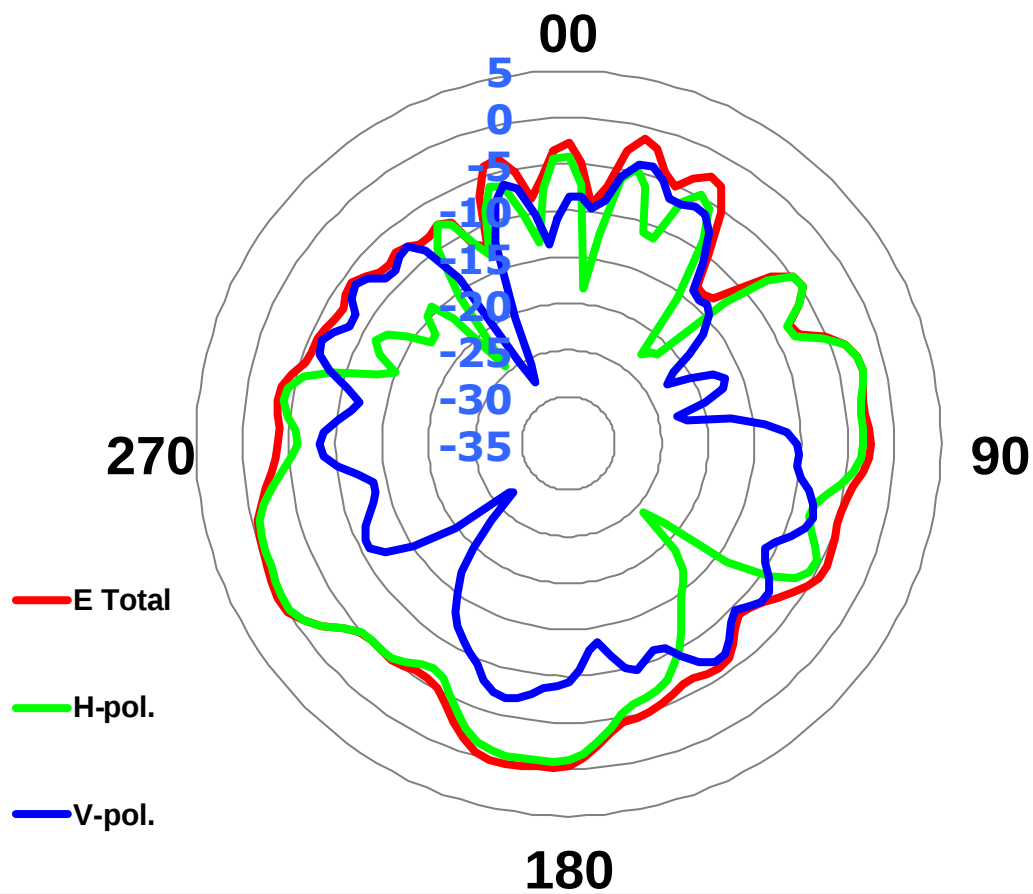Ant5 @ 3550 MHz


	H-pol	V pol
Peak Gain	-0.06	-3.91

Ant5 @ 3600 MHz

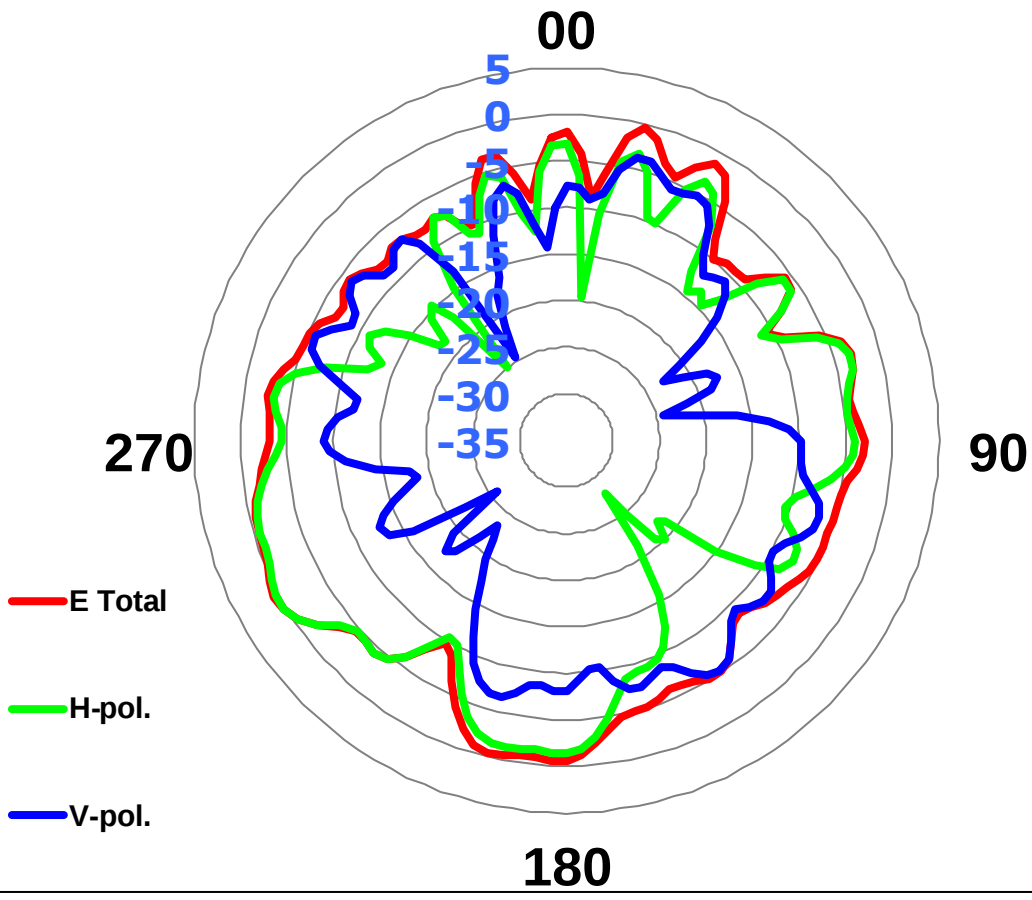


	H-pol	V pol
Peak Gain	0.35	-3.69

Ant5 @ 3625 MHz

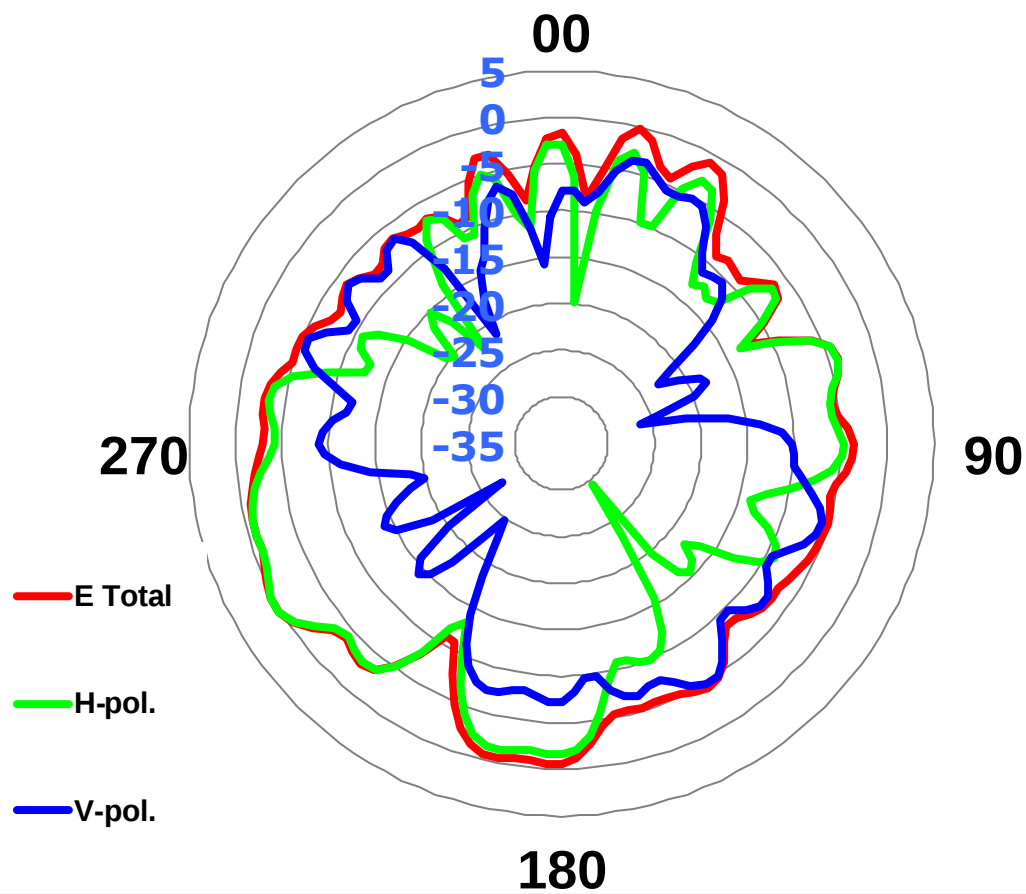


	H-pol	V pol
Peak Gain	0.29	-3.54

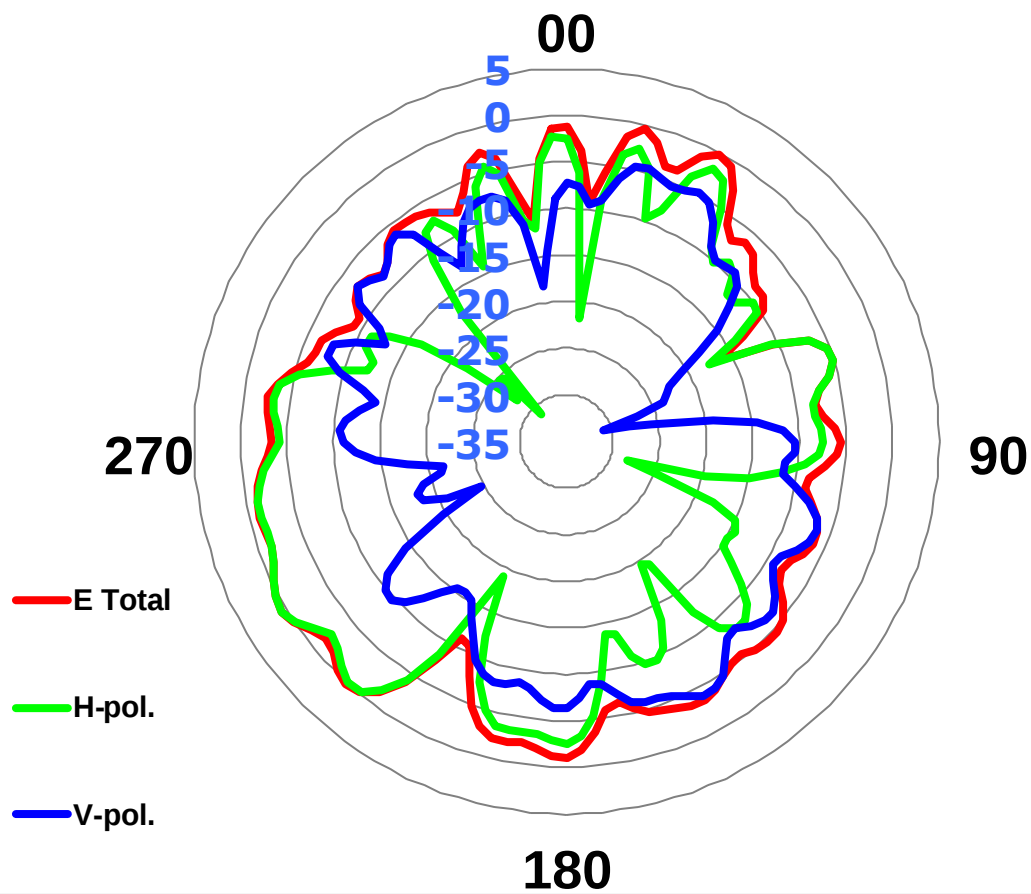
Ant5 @ 3700 MHz

	H-pol	V pol
Peak Gain	0.54	-4.01


Ant5 @ 3750 MHz

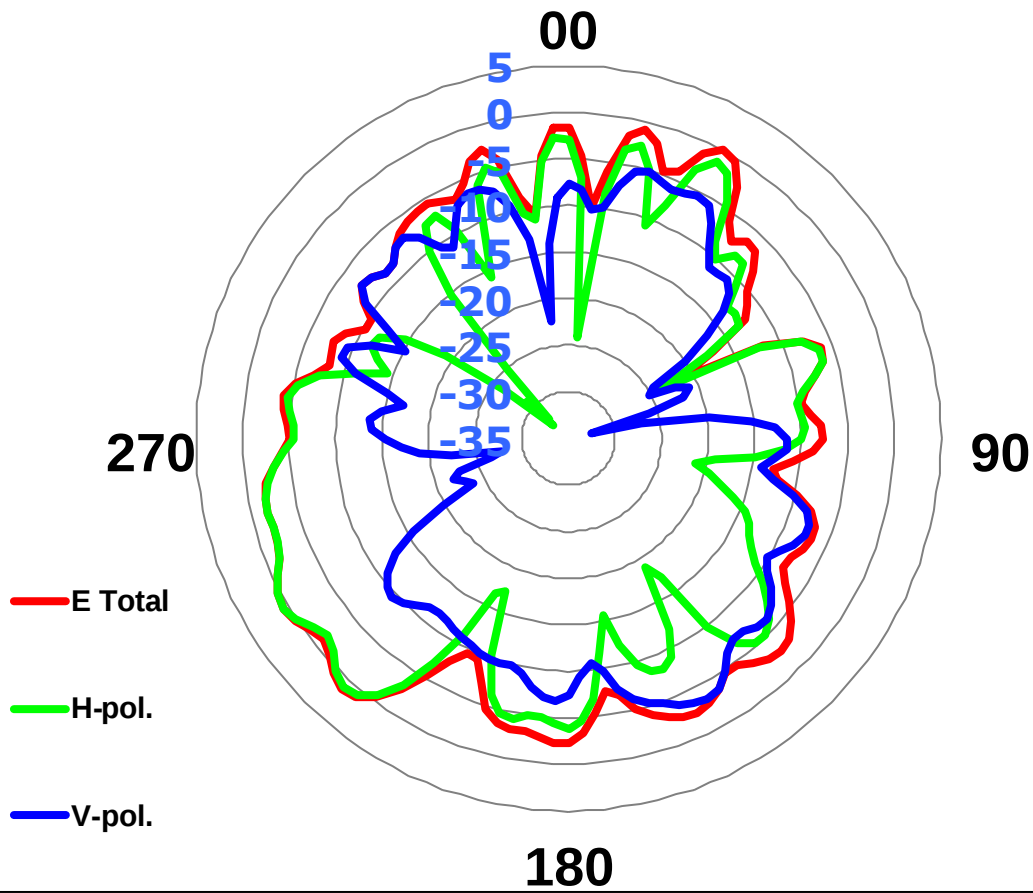


	H-pol	V pol
Peak Gain	0.97	-3.26

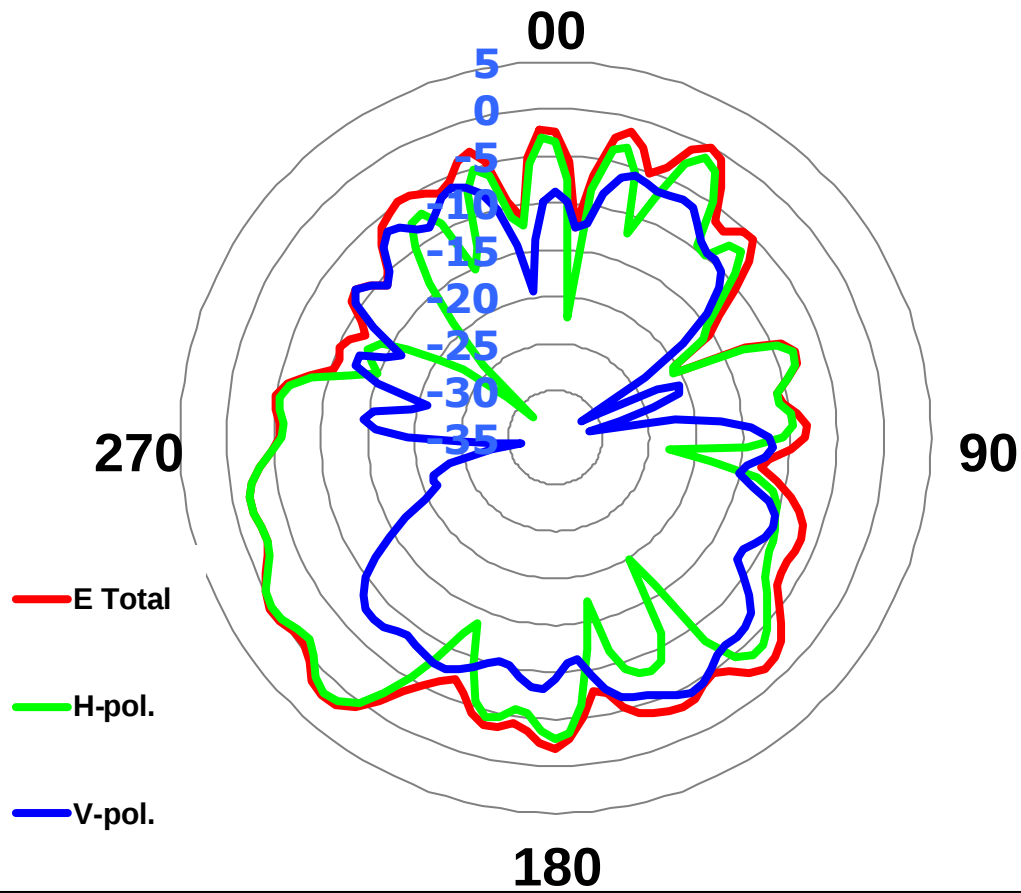Ant5 @ 3800 MHz

	H-pol	V pol
Peak Gain	1.72	-4.23

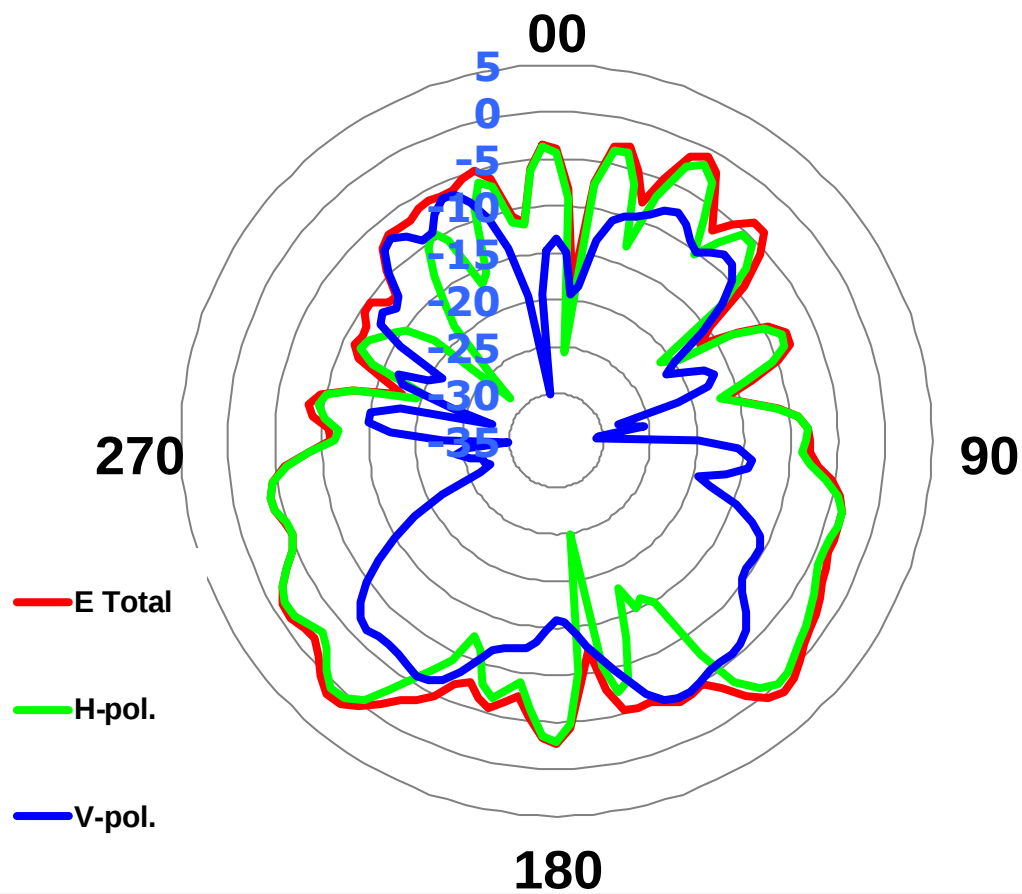
Ant5 @ 3900 MHz

	H-pol	V pol
Peak Gain	0.71	-4.61

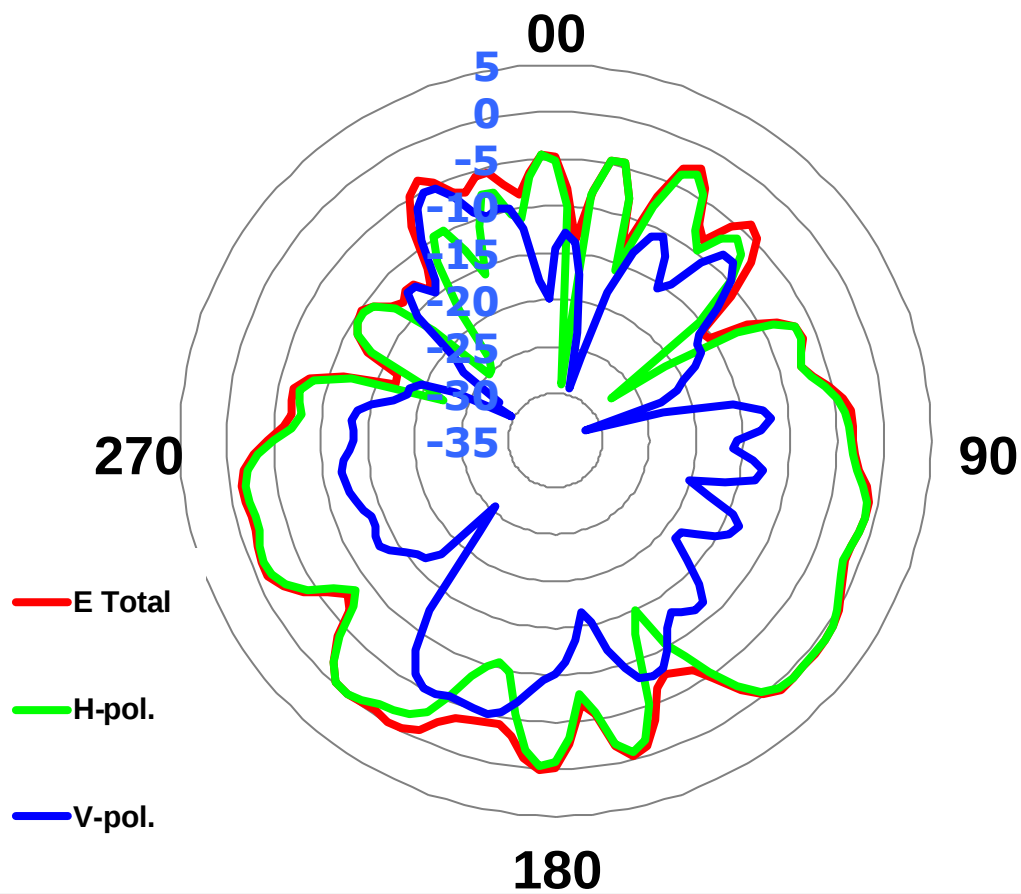
Ant5 @ 4000 MHz

	H-pol	V pol
Peak Gain	0.76	-5.03

Ant5 @ 4100 MHz

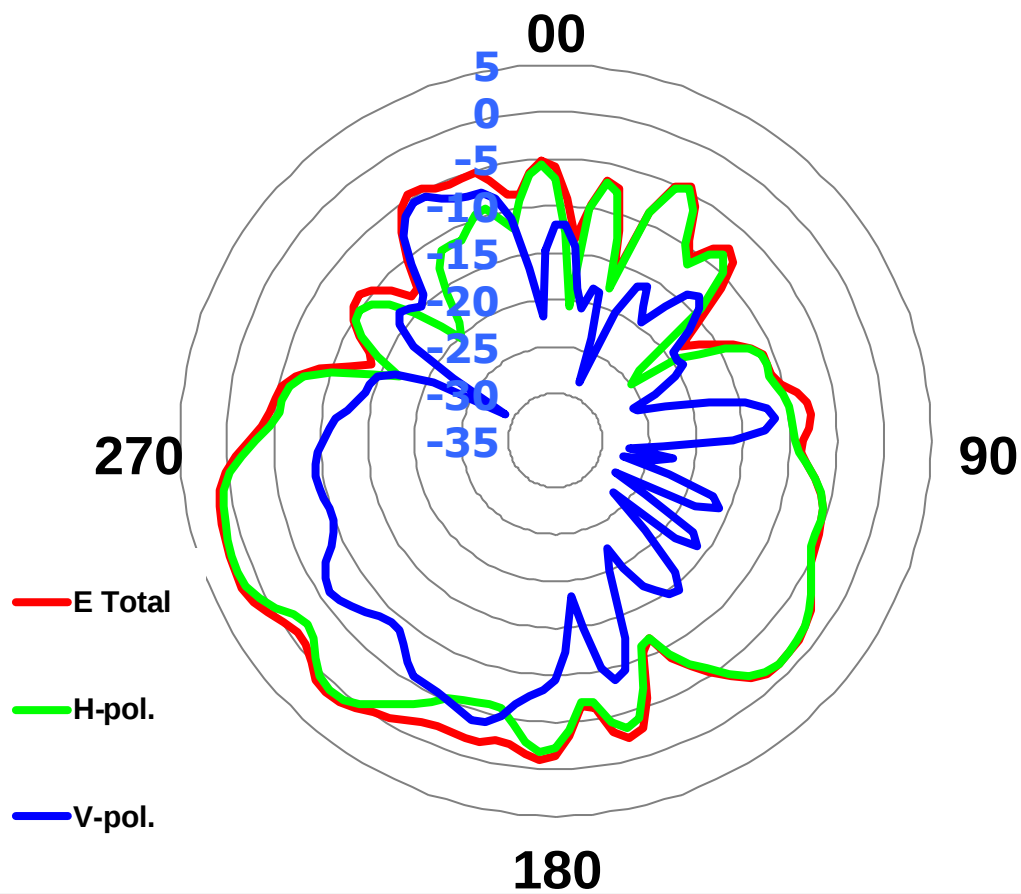


	H-pol	V pol
Peak Gain	1.62	-3.92

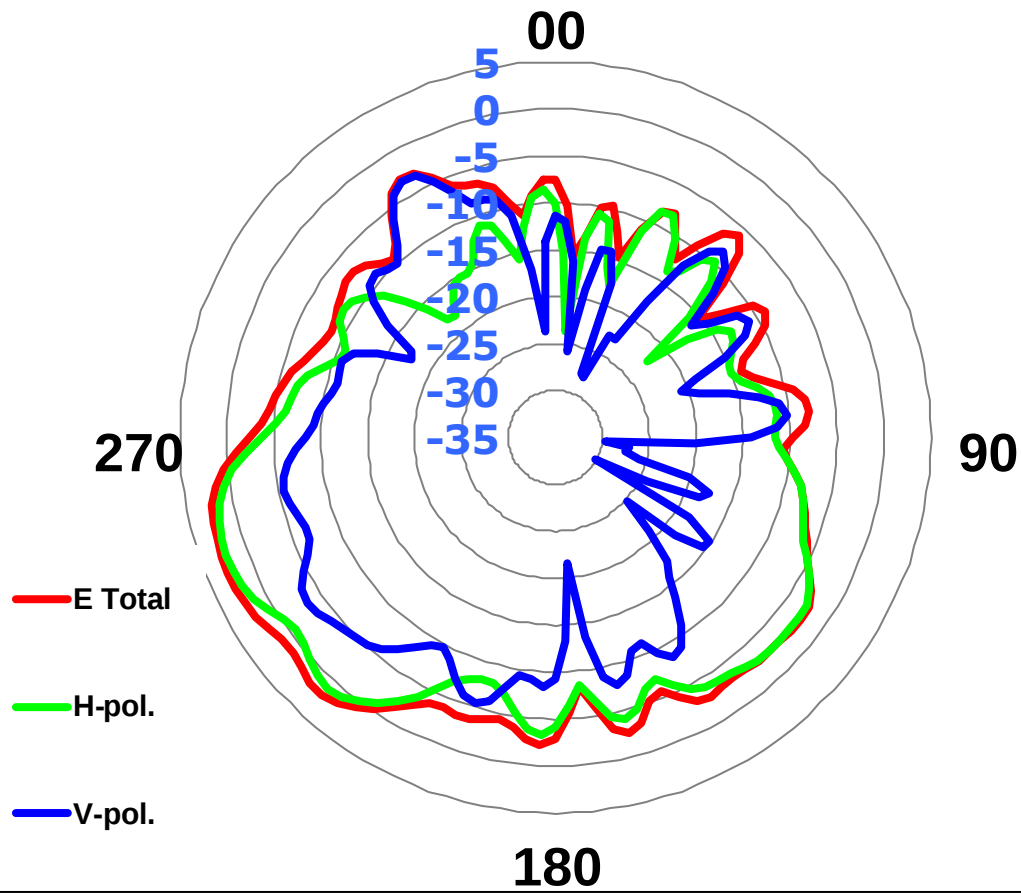Ant5 @ 4200 MHz


	H-pol	V pol
Peak Gain	2.18	-3.16

Ant5 @ 4300 MHz

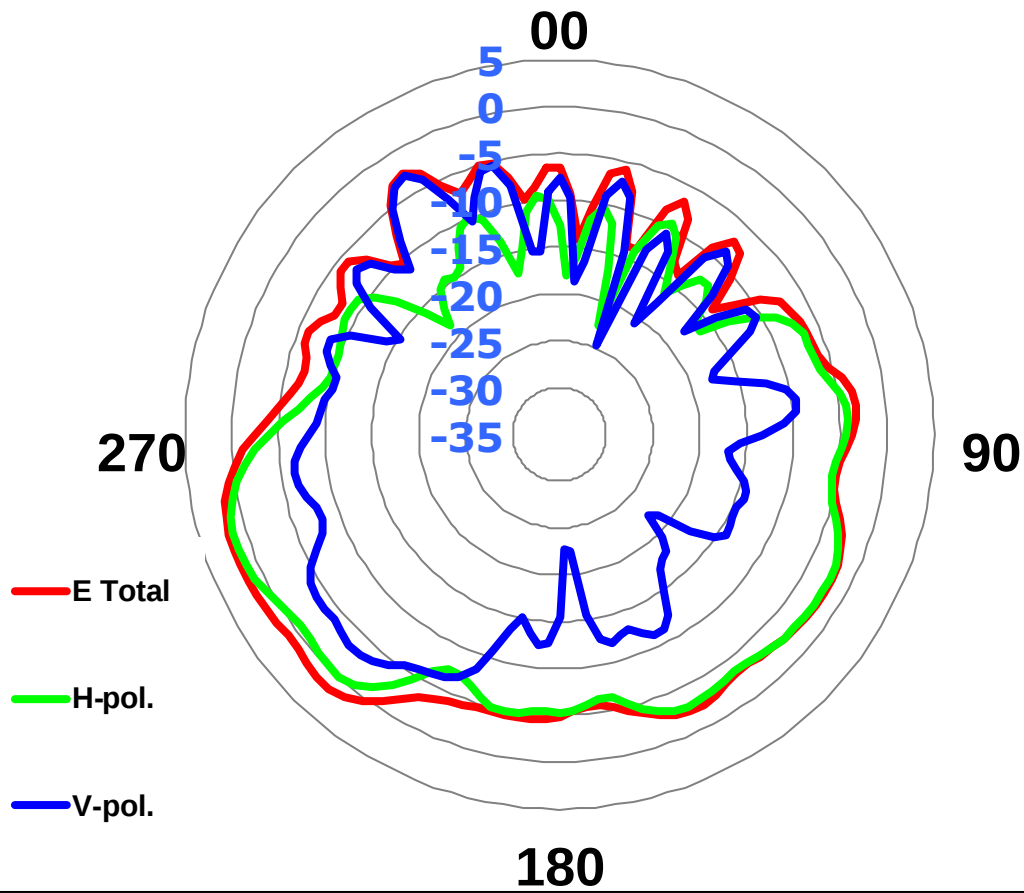


	H-pol	V pol
Peak Gain	1.38	-2.85


Ant5 @ 4400 MHz

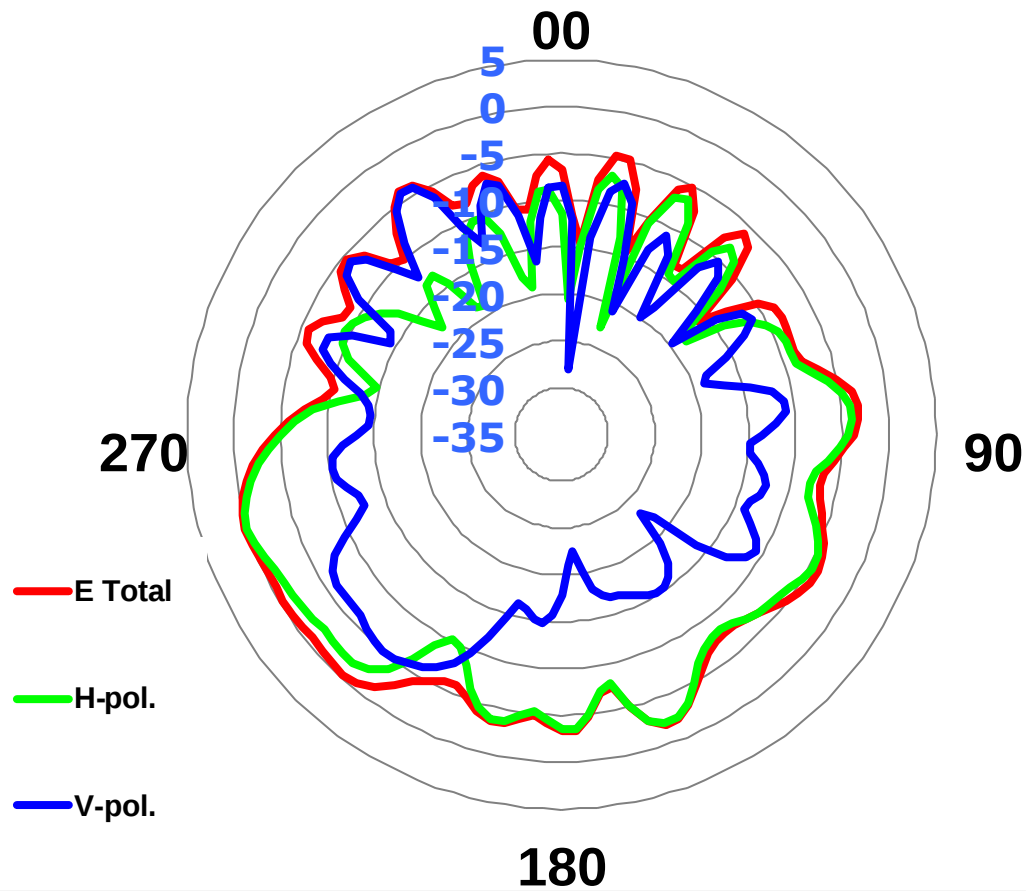

	H-pol	V pol
Peak Gain	0.01	-3.98

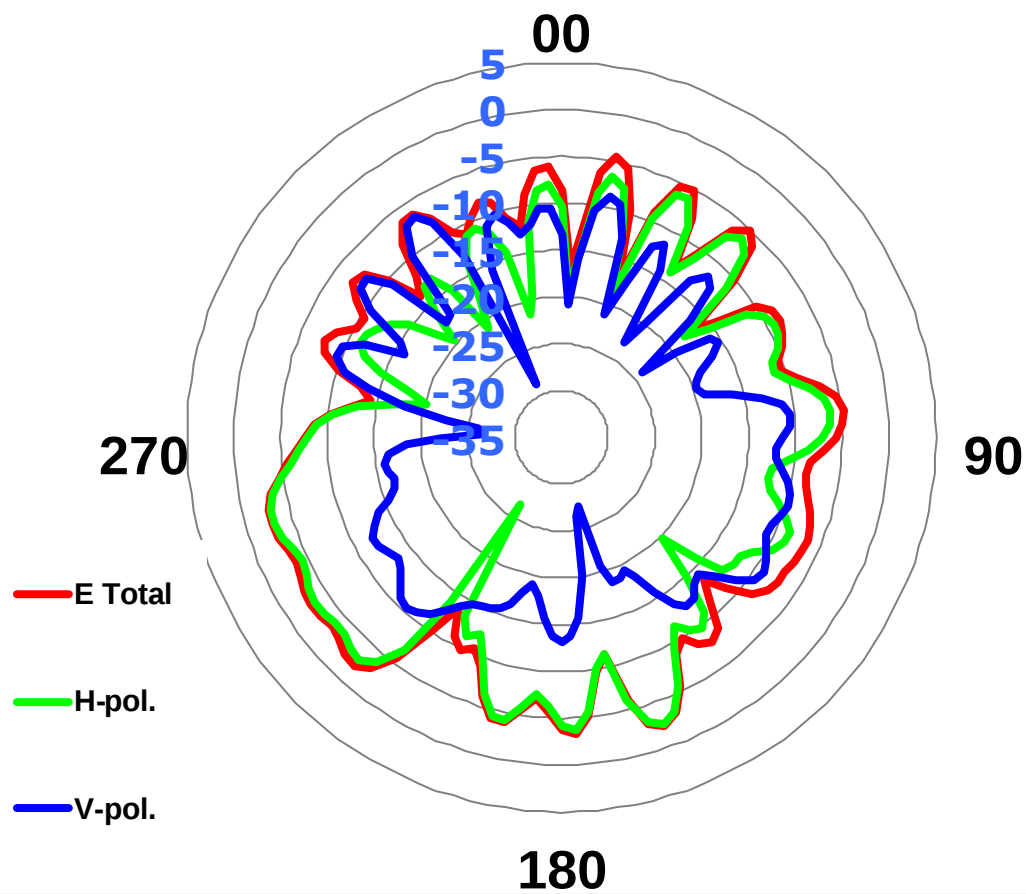
Ant5 @ 4500 MHz

	H-pol	V pol
Peak Gain	-2.40	-6.60

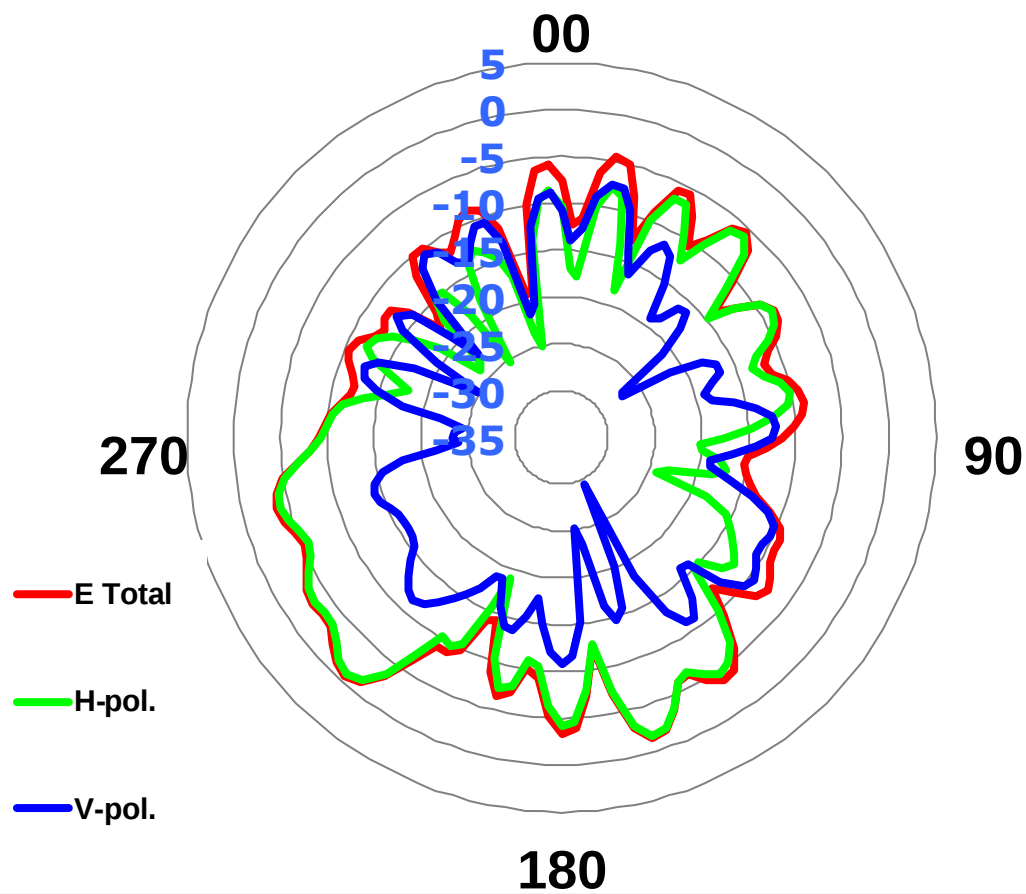
Ant5 @ 4600 MHz

	H-pol	V pol
Peak Gain	-0.87	-7.39

Ant5 @ 4700 MHz

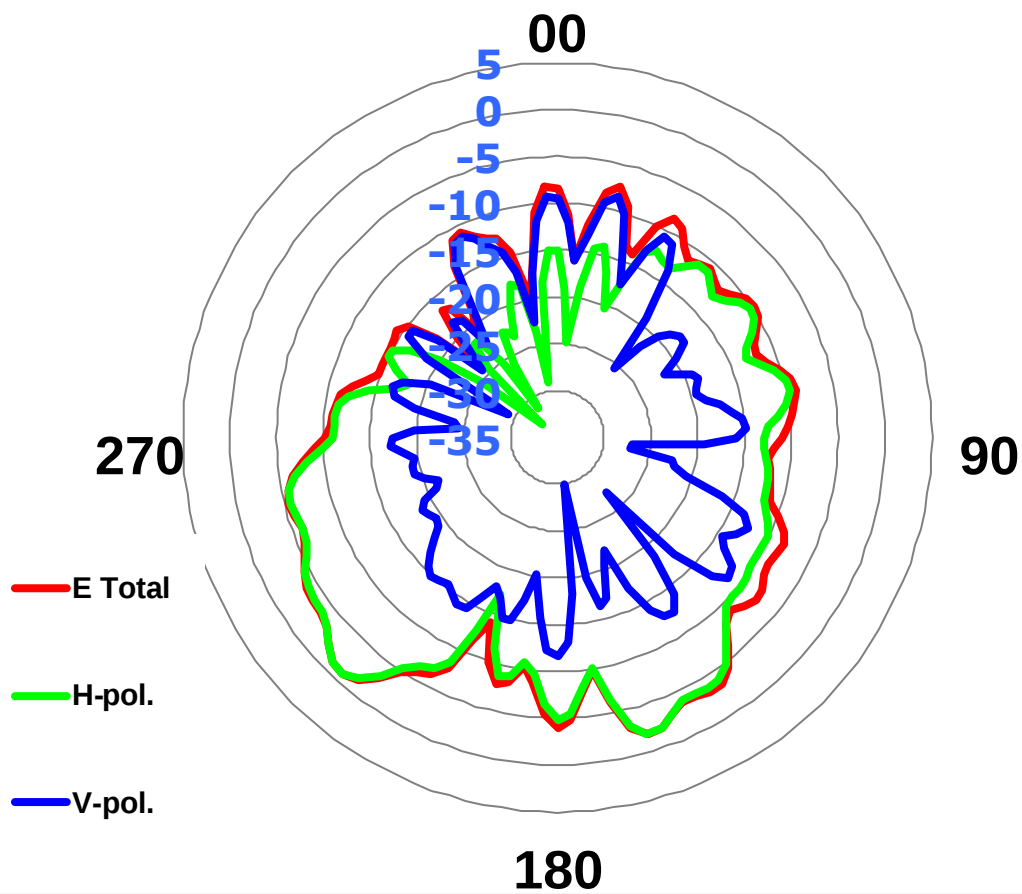


	H-pol	V pol
Peak Gain	-0.93	-8.58

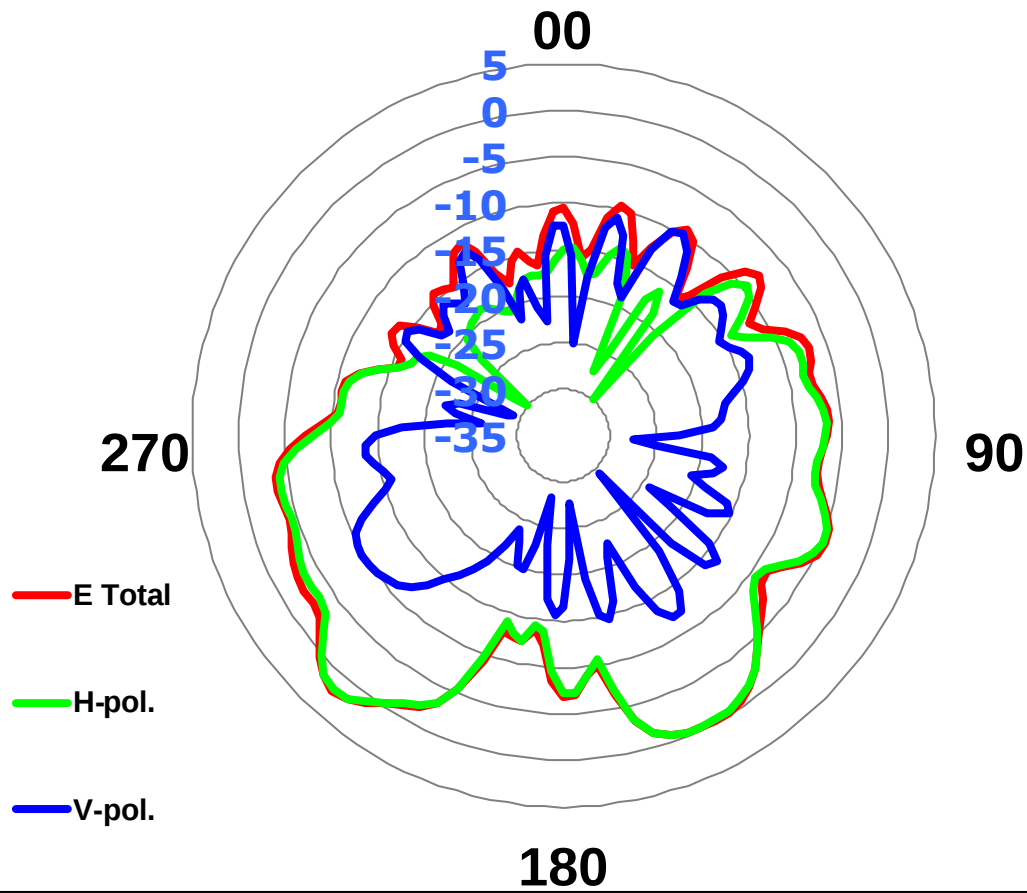Ant5 @ 4800 MHz


	H-pol	V pol
Peak Gain	1.88	-9.77

Ant5 @ 4900 MHz

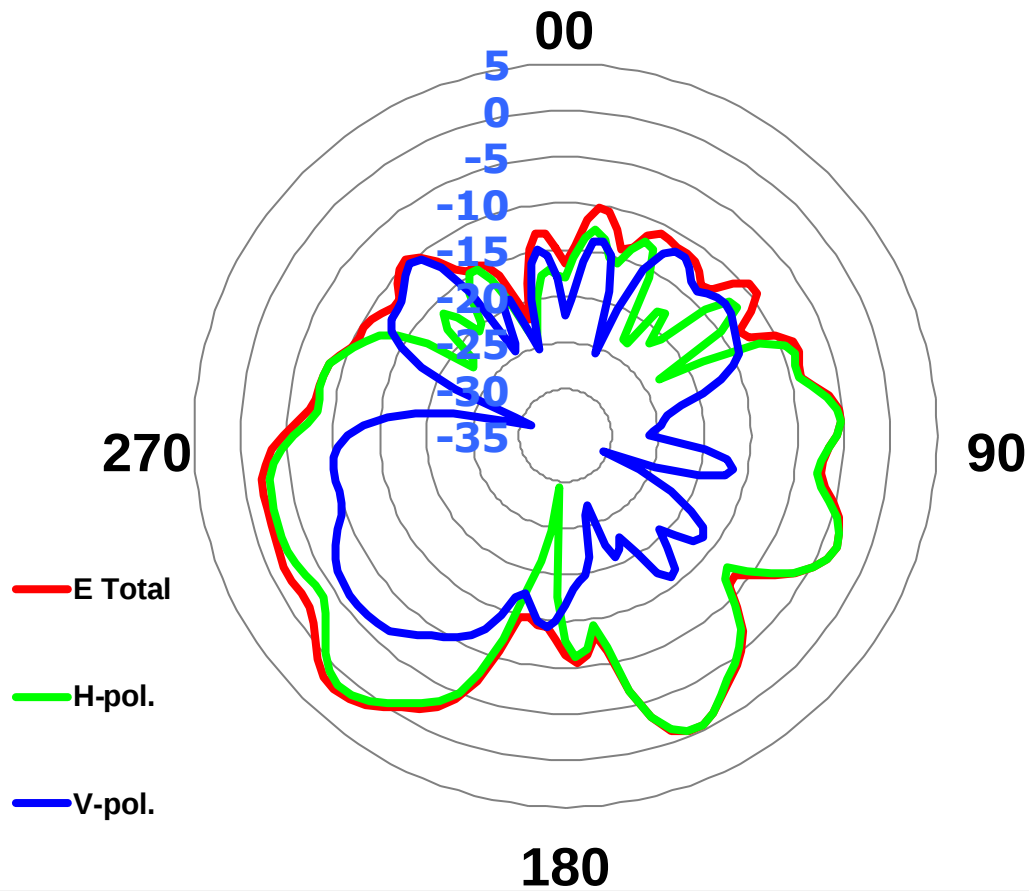


	H-pol	V pol
Peak Gain	1.37	-6.13

Ant5 @ 5000 MHz

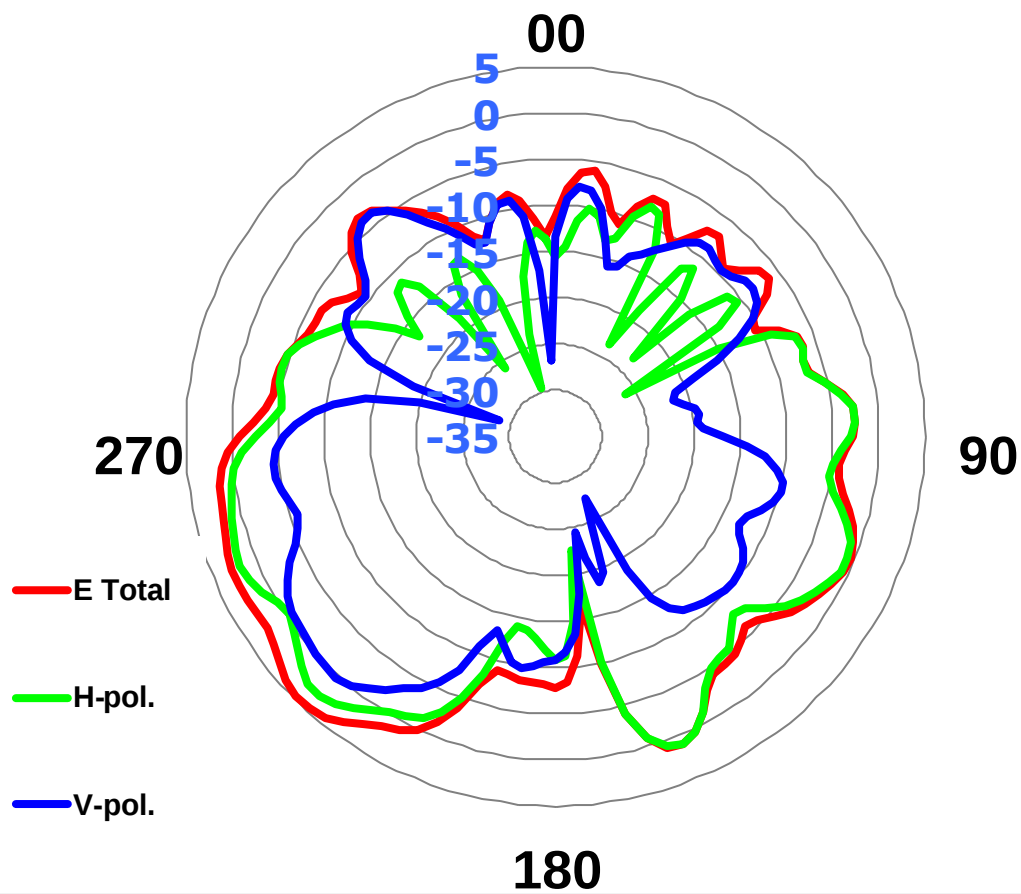


	H-pol	V pol
Peak Gain	2.85	0.30

Ant5 @ 5150 MHz

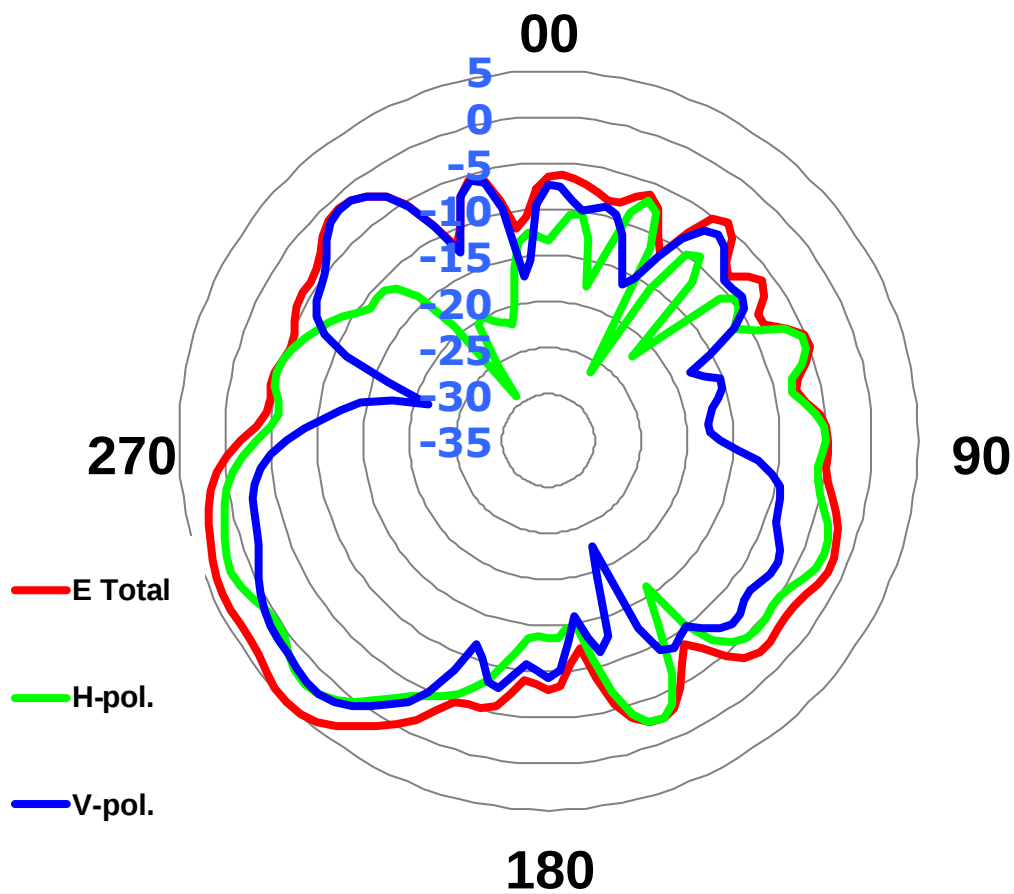


	H-pol	V pol
Peak Gain	2.16	2.10

Ant5 @ 5537 MHz

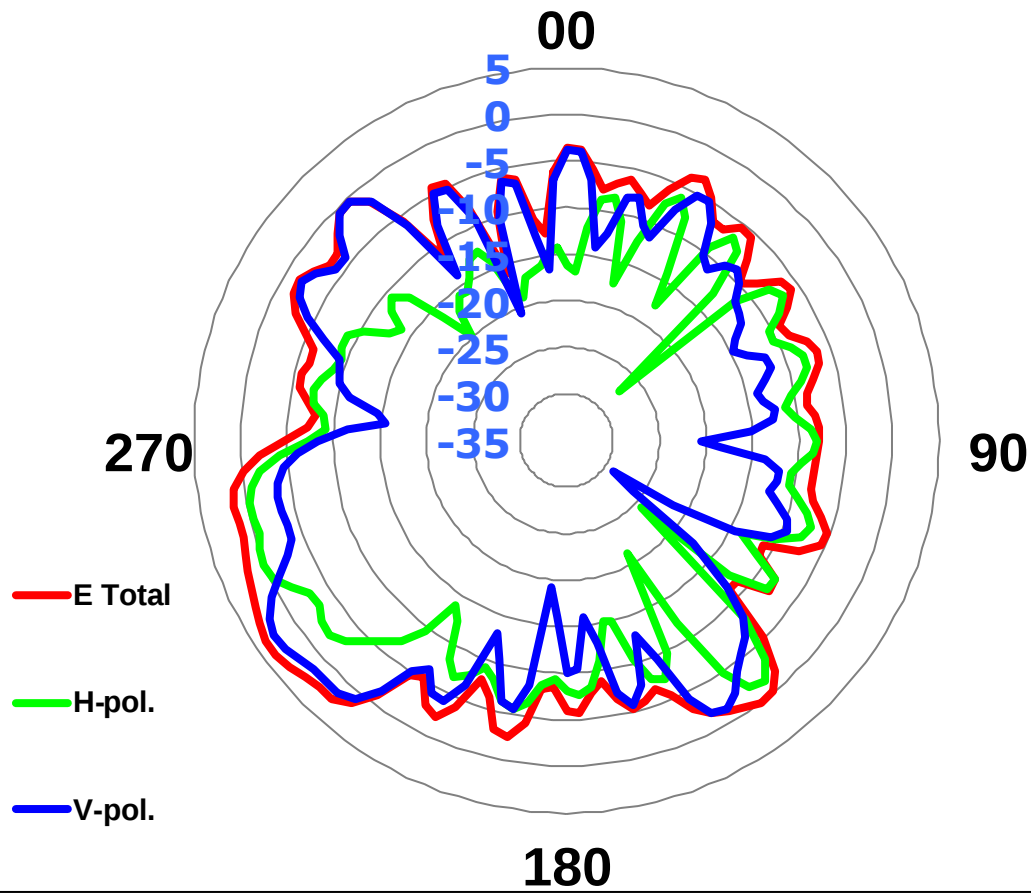

	H-pol	V pol
Peak Gain	0.17	2.74

Ant5 @ 5925 MHz

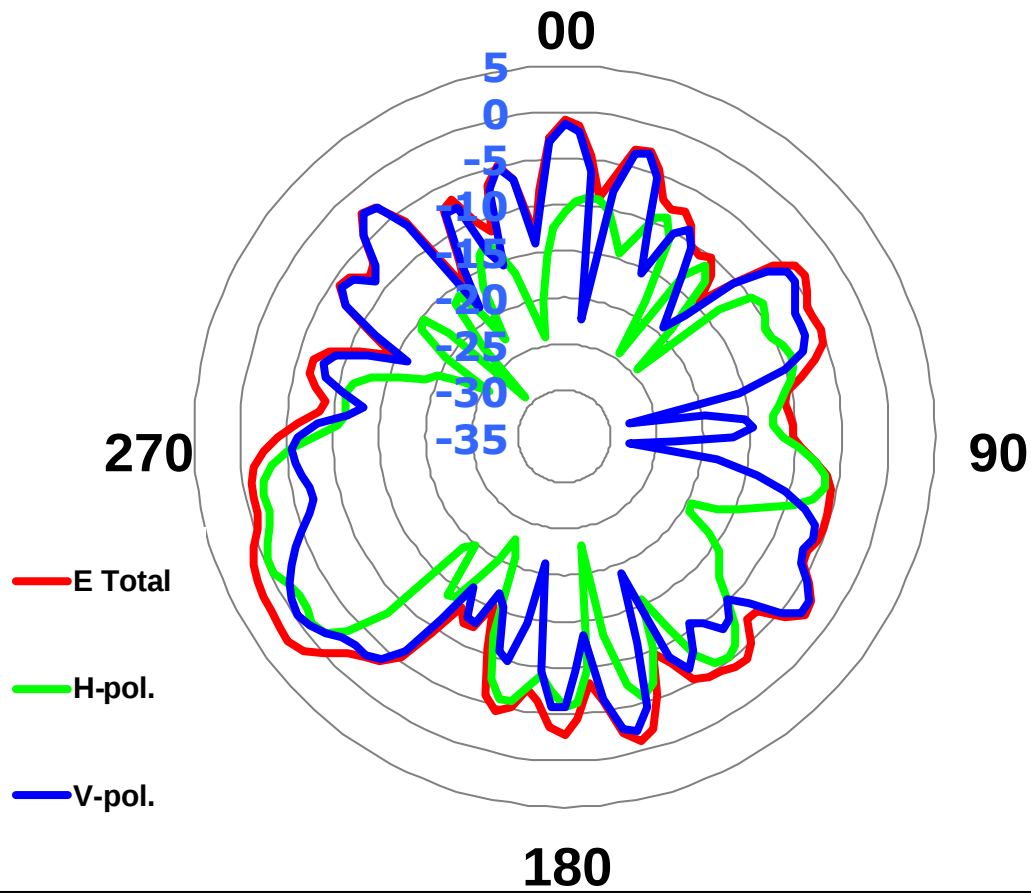

	H-pol	V pol
Peak Gain	-0.29	-0.42

Section 8. Local representative contact information

Local representative contact information is required for regulatory support for target countries below.

	Local company name	Contact name	Phone number	FAX Number	e-Mail Address	Notes
Argentina						
Azerbaijan						
Cambodia						
Indonesia						
Israel						
Malaysia						
Philippines						
Singapore						Telecommunication Equipment Dealer License Required
South Africa						
USA, Canada						
Vietnam						