



FCC PART 15C TEST REPORT No.I23Z70136-IOT03

for

Samsung Electronics Co., Ltd.

Multi-band GSM/WCDMA/LTE Tablet with Bluetooth, WLAN

SM-X115

With

FCC ID: ZCASM115

Hardware Version: REV1.0

Software Version: X115.001

Issued Date: 2023-08-04

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I23Z70136-IOT03	Rev.0	1st edition	2023-07-31
I23Z70136-IOT03	Rev.1	Update the Transmitter Spurious Emission– Conducted 、 the Band Edges Compliance 、 the DTS 6-dB Signal Bandwidth 、 the Peak Power Spectral Density result.	2023-08-04

CONTENTS

1. TEST LABORATORY	5
1.1. INTRODUCTION & ACCREDITATION	5
1.2. TESTING LOCATION	5
1.3. TESTING ENVIRONMENT.....	6
1.4. PROJECT DATE	6
1.5. SIGNATURE	6
2. CLIENT INFORMATION	7
2.1. APPLICANT INFORMATION	7
2.1. MANUFACTURER INFORMATION	7
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
3.1. ABOUT EUT	8
3.2. INTERNAL IDENTIFICATION OF EUT	8
3.3. INTERNAL IDENTIFICATION OF AE.....	8
3.4. GENERAL DESCRIPTION.....	9
3.5. INTERPRETATION OF THE TEST ENVIRONMENT.....	9
4. REFERENCE DOCUMENTS	9
4.1. DOCUMENTS SUPPLIED BY APPLICANT	9
4.2. REFERENCE DOCUMENTS FOR TESTING.....	9
5. TEST RESULTS	10
5.1. SUMMARY OF TEST RESULTS.....	10
5.2. STATEMENTS.....	10
5.3. TEST CONDITIONS	10
6. TEST FACILITIES UTILIZED	11
7. MEASUREMENT UNCERTAINTY	12
7.1. MAXIMUM OUTPUT POWER.....	12
7.2. PEAK POWER SPECTRAL DENSITY	12
7.3. DTS 6-DB SIGNAL BANDWIDTH.....	12
7.4. BAND EDGES COMPLIANCE	12
7.5. TRANSMITTER SPURIOUS EMISSION	12
7.6. AC POWER-LINE CONDUCTED EMISSION	12
ANNEX A: DETAILED TEST RESULTS.....	13
A.1. MEASUREMENT METHOD.....	13
A.2. MAXIMUM OUTPUT POWER.....	14
A.2.1. PEAK OUTPUT POWER-CONDUCTED	14



A.3. PEAK POWER SPECTRAL DENSITY	16
A.4. DTS 6-DB SIGNAL BANDWIDTH	22
A.5. BAND EDGES COMPLIANCE	28
A.6. TRANSMITTER SPURIOUS EMISSION	32
A.6.1 TRANSMITTER SPURIOUS EMISSION – CONDUCTED	32
A.6.2 TRANSMITTER SPURIOUS EMISSION - RADIATED	48
A.7. AC POWER-LINE CONDUCTED EMISSION	60
ANNEX B: EUT PARAMETERS.....	64
ANNEX C: ACCREDITATION CERTIFICATE	64

1. Test Laboratory

1.1.Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (ISED#: 24849). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Radiated testing Location:

CTTL (BDA)

Address: No. 18A, Kangding Street, Beijing Economic-Technology
Development Area, Beijing, 100176, P.R. China

CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
100191, P. R. China

1.3. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.4. Project date


Testing Start Date: 2023-06-05

Testing End Date: 2023-07-31

1.5. Signature



Dong Jiaxuan
(Prepared this test report)



Zheng Wei
(Reviewed this test report)



Pang Shuai
(Approved this test report)

2. Client Information

2.1.Applicant Information

Company Name: Samsung Electronics Co., Ltd.
Address: 19 Chapin Rd.,Building D Pine Brook, NJ 07058
City: New Jersey
Postal Code: /
Country: United States
Telephone: +1-201-937-4203
Fax: /

2.1. Manufacturer Information

Company Name: Samsung Electronics Co., Ltd.
Address: Samsung R5, Maetan dong 129, Samsung ro
Youngtong gu, Suwon city 443 742, Korea
City: Suwon
Postal Code: /
Country: Korea
Telephone: +82-10-4376-0326
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Multi-band GSM/WCDMA/LTE Tablet with Bluetooth, WLAN
Model name	SM-X115
FCC ID	ZCASM115
With WLAN Function	Yes
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation	DSSS/CCK/OFDM
Number of Channels	11
Antenna	-0.5dBi
MAX Conducted Power	25.25dBm
Power Supply	3.82V

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version
UT02a	2370136UT02a	REV1.0	X115.001
UT07a	2370136UT07a	REV1.0	X115.001

*EUT ID: is used to identify the test sample in the lab internally.

UT02 is used for Conduction test, UT07a is used for Radiation test.

3.3. Internal Identification of AE

AE ID*	Name	Model	Manufacturer
AE1	Battery	HQ-3565S	SCUD(Fujian) Electronics Co., LTD.
AE2	Adapter	EP-T1510	DONGYANG
AE3	Date Cable C-C	EP-DN980BWE	Samsung Electronics Co.,Ltd
AE5	Headset	ESH61ASFWE	/

*AE ID: is used to identify the test sample in the lab internally.

*AE2 and A5 are not the AE for EUT, provided by the client for relevant tests.

3.4. General Description

The Equipment under Test (EUT) is a model of Multi-band GSM/WCDMA/LTE Tablet with Bluetooth, WLAN with integrated antenna and inbuilt battery.

It has Bluetooth (EDR) function.

It consists of normal options: travel charger, USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

3.5. Interpretation of the Test Environment

For the test methods, the test environment uncertainty figures correspond to an expansion factor $k=2$.

Measurement Uncertainty

Parameter	Uncertainty
temperature	0.48°C
humidity	2 %
DC voltages	0.003V

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C:	2021
	15.205 Restricted bands of operation;	
	15.209 Radiated emission limits, general requirements;	
ANSI C63.10	15.247 Operation within the bands 902-928MHz, 2400-2483.5 MHz, and 5725-5850 MHz.	2013
	American National Standard of Procedures for Compliance	
	Testing of Unlicensed Wireless Devices	
KDB 558074 D01	Federal Communications Commission Office of Engineering and Technology Laboratory Division	2019
	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON	
	DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES	

5. Test Results

5.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247 (b)	/	P
Peak Power Spectral Density	15.247 (e)	/	P
Occupied 6dB Bandwidth	15.247 (a)	/	P
Band Edges Compliance	15.247 (d)	/	P
Transmitter Spurious Emission - Conducted	15.247 (d)	/	P
Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NP	Not Perform, The test was not performed by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

5.2. Statements

The test cases as listed in section 5.1 of this report for the EUT specified in section 3 was performed by CTTL and according to the standards or reference documents listed in section 4.2

The EUT met all requirements of the standards or reference documents, and only the WLAN function was tested in this report.

5.3. Test Conditions

T nom	Normal Temperature
T min	Low Temperature
T max	High Temperature
V nom	Normal Voltage

For this report, if the test cases listed above are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	T nom	26°C
Voltage	V nom	3.82V
Humidity	H nom	20-75%

6. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2024-07-04
2	Test Receiver	ESCI	100344	Rohde & Schwarz	1 year	2024-02-21
3	LISN	ENV216	101200	Rohde & Schwarz	1 year	2024-07-04
4	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100376	R&S	1 year	2023-09-22
2	Test Receiver	FSV40	101047	R&S	1 year	2024-06-25
3	Test Receiver	ESW44	103144	R&S	1 year	2023-10-25
4	Loop Antenna	HFH2-Z2	829324/007	R&S	1 year	2023-12-22
5	EMI Antenna	VULB9163	01177	Schwarzbeck	1 year	2023-08-03
6	EMI Antenna	3117	00119021	ETS-Lindgren	1 year	2024-06-24
7	EMI Antenna	LB-180400-25-C-KF	2110084000006	A-INFO	1 year	2024-03-02

AC Power Line Conducted Emission

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	LISN	ENV216	101459	R&S	1 year	2024-02-29
2	Test Receiver	ESCI	100766	R&S	1 year	2024-03-30

7. Measurement Uncertainty

7.1. Maximum Output Power

Measurement Uncertainty: 0.387dB,k=1.96

7.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

7.3. DTS 6-dB Signal Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

7.4. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

7.5. Transmitter Spurious Emission

Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

Radiated (k=2)

Frequency Range	Uncertainty(dB)
9kHz-30MHz	4.92
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.73
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.58
$18\text{GHz} \leq f \leq 40\text{GHz}$	3.37

7.6. AC Power-line Conducted Emission

Measurement Uncertainty: 3.10dB, k=2.

ANNEX A: Detailed Test Results

A.1. Measurement Method

A.1.1. Conducted Measurements

Connect the EUT to the test system as Fig.A.1.1.1 shows.

Set the EUT to the required work mode.

Set the EUT to the required channel.

Set the Vector Signal Analyzer and start measurement.

Record the values. Vector Signal Analyzer

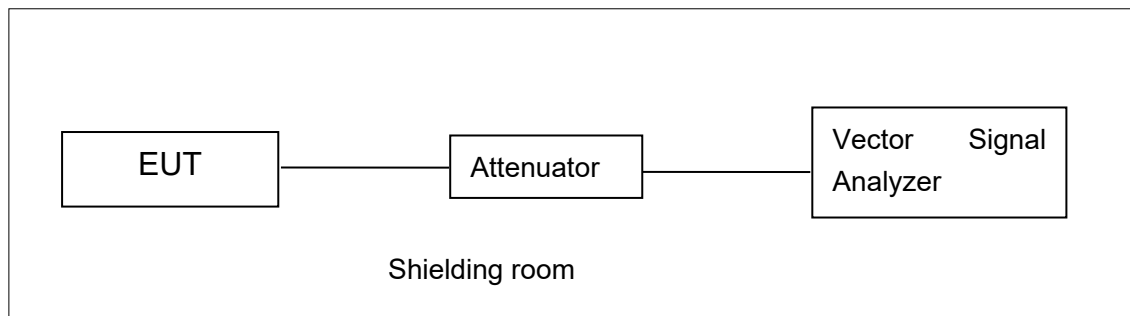


Fig.A.1.1.1: Test Setup Diagram for Conducted Measurements

A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 3MHz;

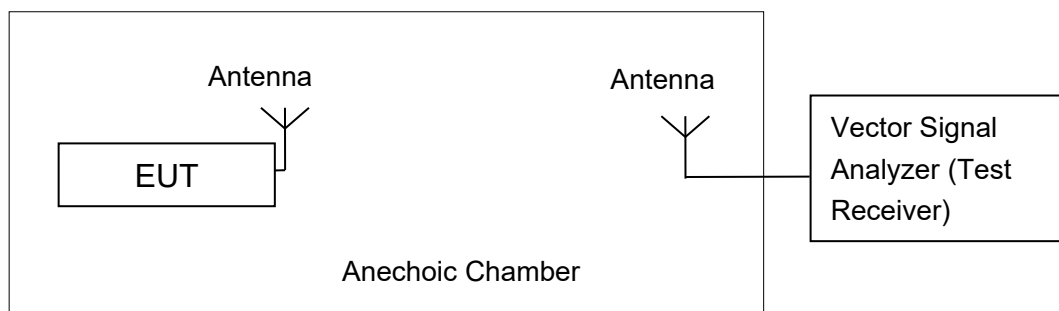


Fig.A.1.2.1: Test Setup Diagram for Radiated Measurements

A.2. Maximum Output Power

Method of Measurement: See ANSI C63.10-2013-clause 11.9.1.1

- a) Set the RBW $\geq$ DTS bandwidth.
- b) Set VBW $\geq [3 \times \text{RBW}]$.
- c) Set span $\geq [3 \times \text{RBW}]$.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

Measurement Limit:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

EUT ID: UT02a

A.2.1. Peak Output Power-conducted

Measurement Results:

802.11b/g mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	1	20.14	20.17	20.71
802.11g	6	25.10	24.98	25.25

The data rate 1Mbps and 6Mbps are selected as worst condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11n (20MHz)	MCS0	24.10	24.85	24.51

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

Duty Cycle

Mode	802.11b	802.11g	802.11n20
Duty Cycle	100%	100%	100%

Conclusion: Pass

A.3. Peak Power Spectral Density

Method of Measurement: See ANSI C63.10-2013-clause 11.10.2

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to RBW = 3 kHz.
- Set the VBW = 10 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

Measurement Limit:

Standard	Limit
FCC CRF Part 15.247(e)	< 8 dBm/3 kHz

Measurement Results:

802.11b/g mode

Mode	Channel	Power Spectral Density (dBm/3 kHz)		Conclusion
802.11b	1	Fig.A.3.1	-5.33	P
	6	Fig.A.3.2	-6.10	P
	11	Fig.A.3.3	-4.99	P
802.11g	1	Fig.A.3.4	-8.78	P
	6	Fig.A.3.5	-9.24	P
	11	Fig.A.3.6	-8.85	P

802.11n-HT20 mode

Mode	Channel	Power Spectral Density (dBm/3 kHz)		Conclusion
802.11n (HT20)	1	Fig.A.3.7	-8.80	P
	6	Fig.A.3.8	-10.08	P
	11	Fig.A.3.9	-9.64	P

Conclusion: Pass

Test graphs as below:

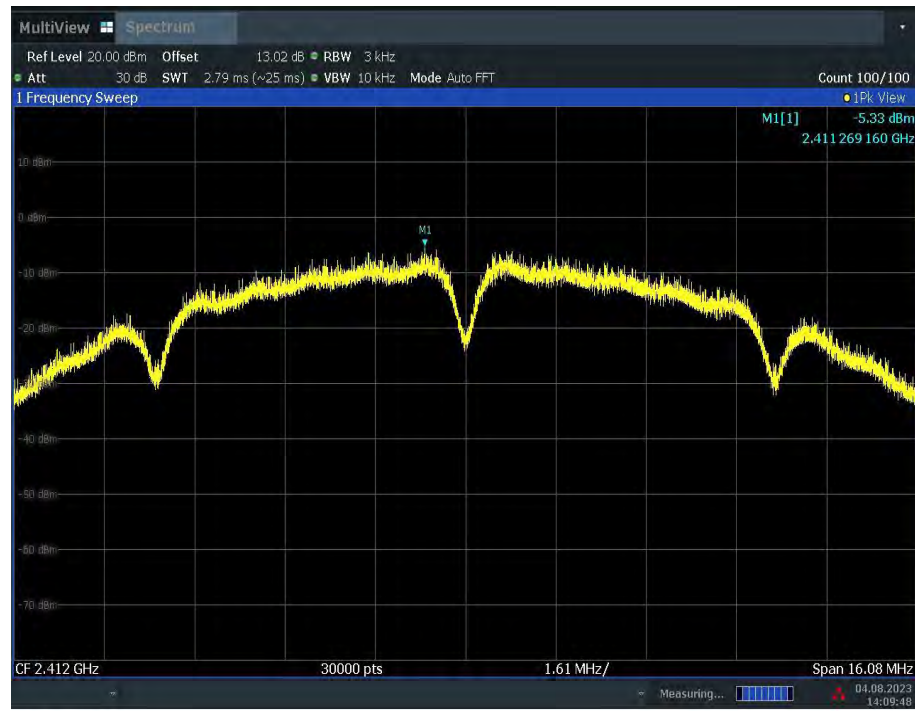


Fig.A.3.1 Power Spectral Density(802.11b,Ch1)


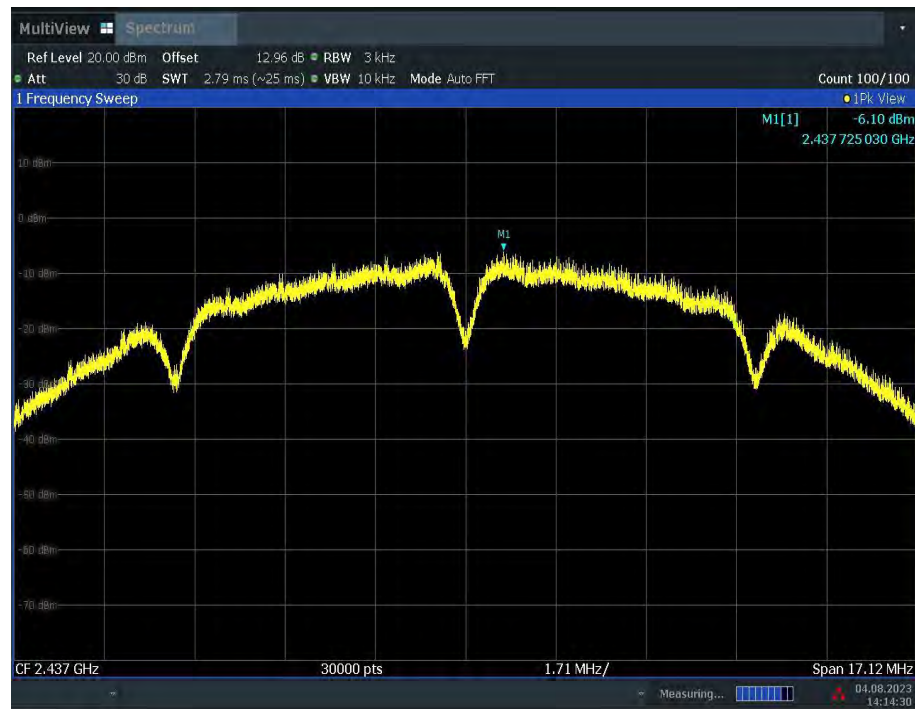


Fig.A.3.2 Power Spectral Density (802.11b, Ch 6)




14:16:15 04.08.2023

Fig.A.3.3 Power Spectral Density (802.11b, Ch 11)

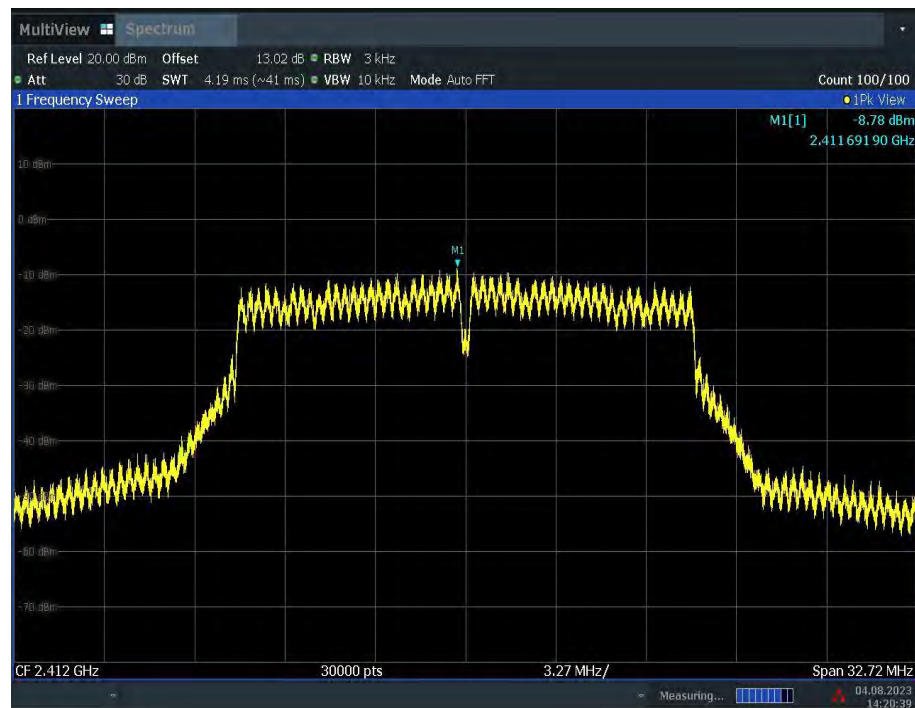


14:20:39 04.08.2023

Fig.A.3.4 Power Spectral Density (802.11g, Ch 1)

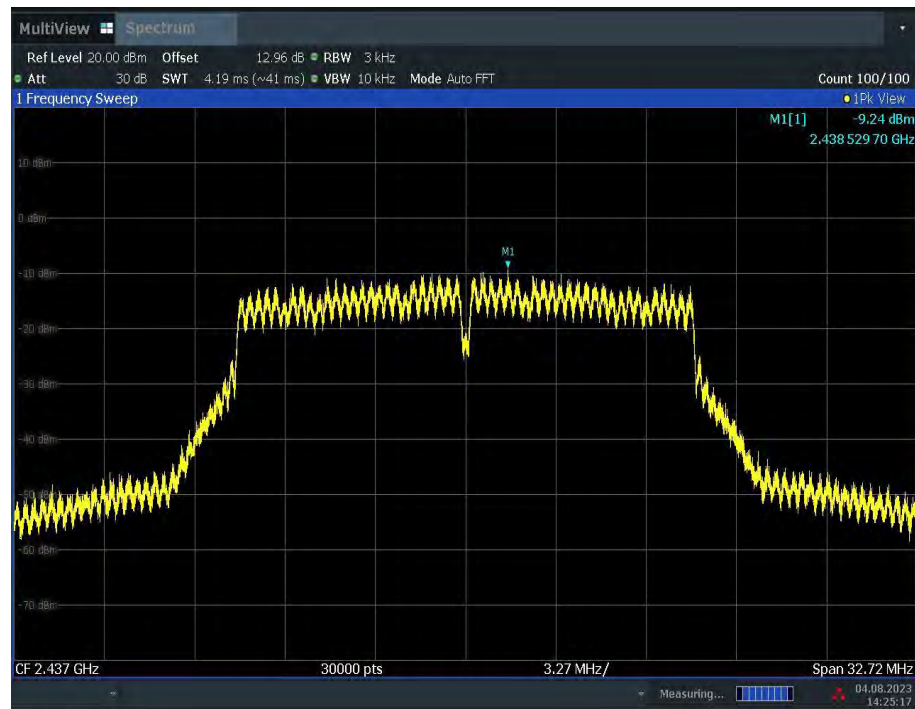


14:25:17 04.08.2023

Fig.A.3.5 Power Spectral Density (802.11g, Ch 6)

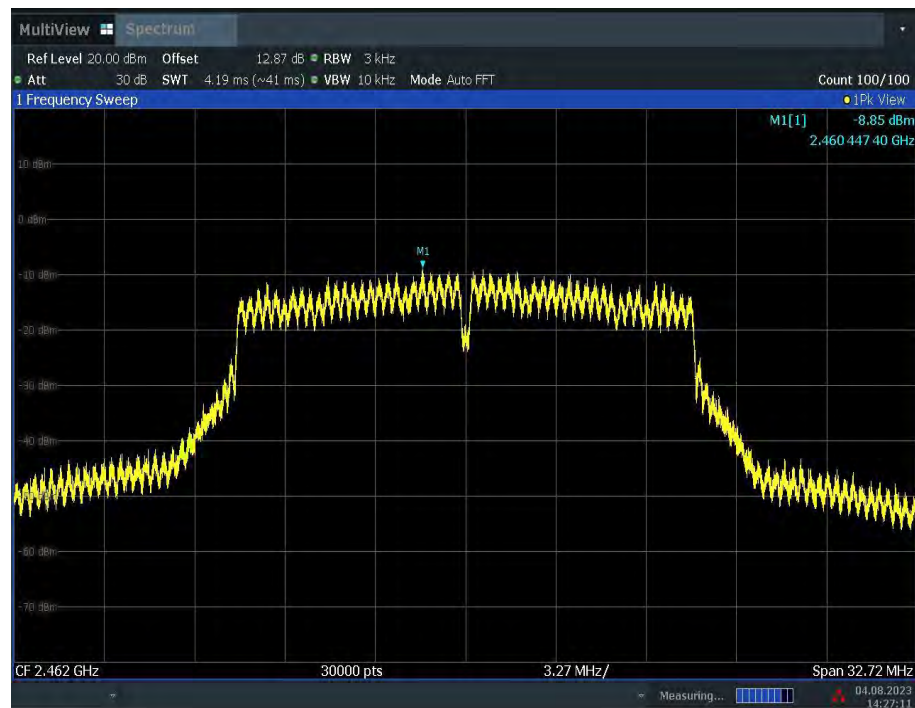


14:27:12 04.08.2023

Fig.A.3.6 Power Spectral Density (802.11g, Ch 11)

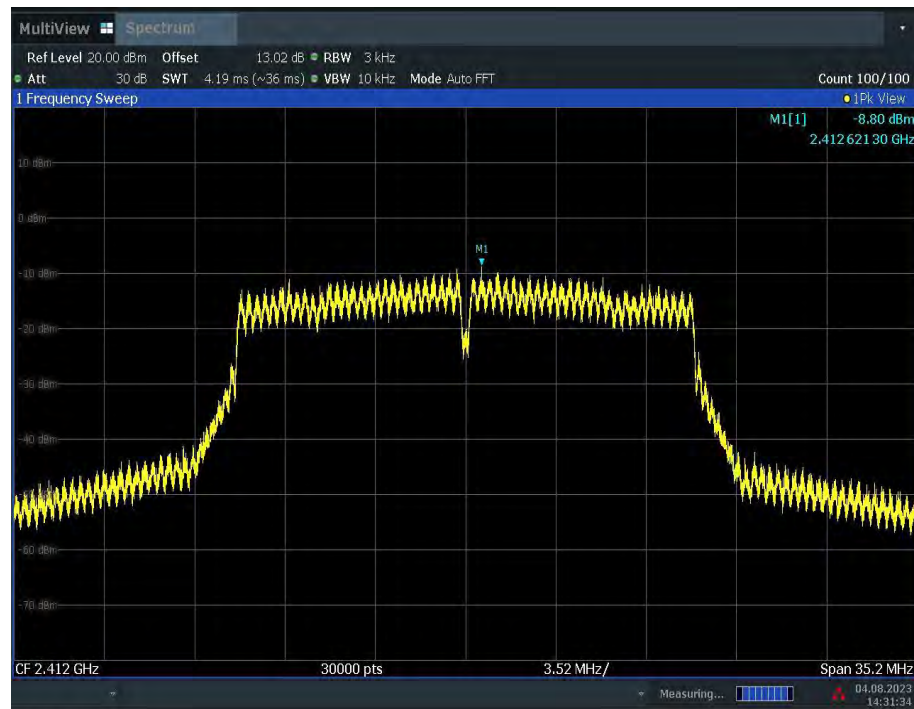


14:31:34 04.08.2023

Fig.A.3.7 Power Spectral Density (802.11n-HT20, Ch 1)

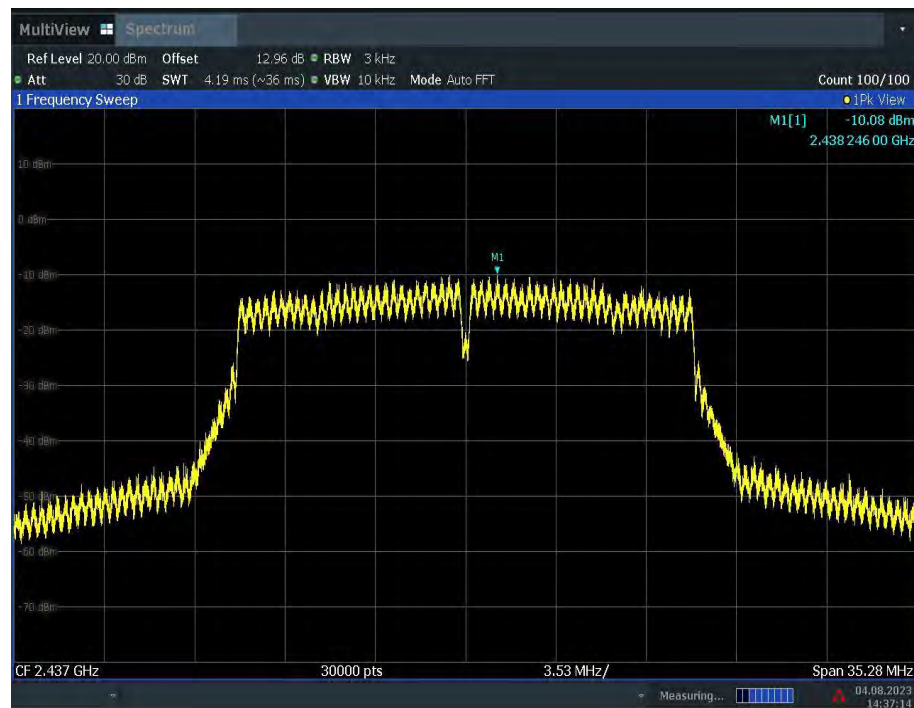

14:37:14 04.08.2023

Fig.A.3.8 Power Spectral Density (802.11n-HT20, Ch 6)

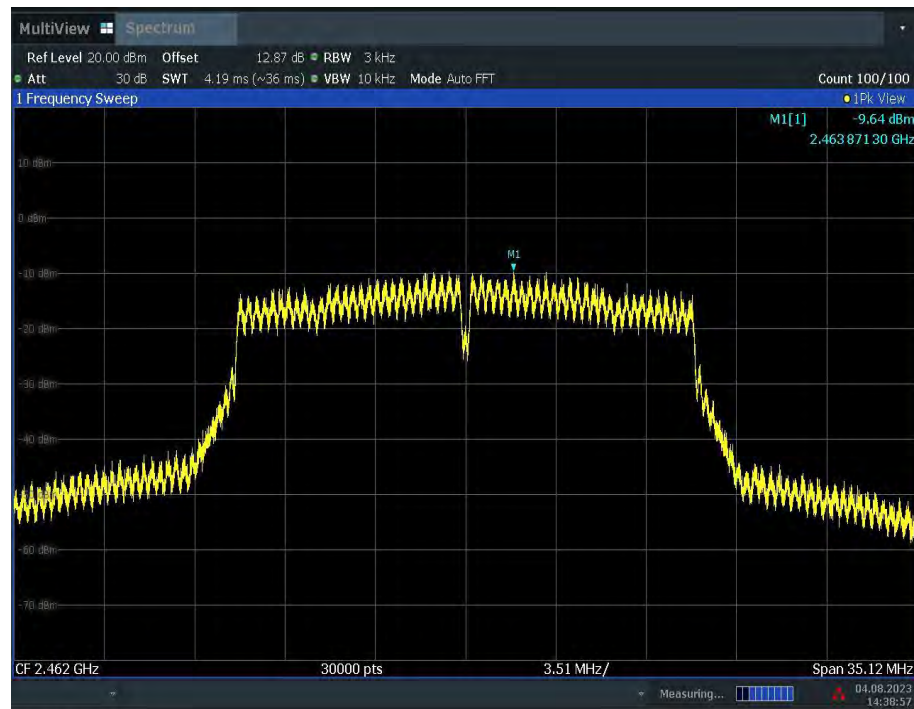

14:38:57 04.08.2023

Fig.A.3.9 Power Spectral Density (802.11n-HT20, Ch 11)

A.4. DTS 6-dB Signal Bandwidth

Method of Measurement: See ANSI C63.10-2013 section 11.8.1.

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) = 300 kHz.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

EUT ID: UT02a

Measurement Result:

802.11b/g mode

Mode	Channel	Occupied 6dB Bandwidth (MHz)		conclusion
802.11b	1	Fig.A.4.1	8.04	P
	6	Fig.A.4.2	8.56	P
	11	Fig.A.4.3	8.04	P
802.11g	1	Fig.A.4.4	16.36	P
	6	Fig.A.4.5	16.36	P
	11	Fig.A.4.6	16.36	P

802.11n-HT20 mode

Mode	Channel	Occupied 6dB Bandwidth (MHz)		conclusion
802.11n (HT20)	1	Fig.A.4.7	17.60	P
	6	Fig.A.4.8	17.64	P
	11	Fig.A.4.9	17.56	P

Conclusion: Pass

Test graphs as below:



14:09:32 04.08.2023

Fig.A.4.1 Occupied 6dB Bandwidth(802.11b,Ch 1)



14:14:15 04.08.2023


Fig.A.4.2 Occupied 6dB Bandwidth (802.11b, Ch 6)



Fig.A.4.3 Occupied 6dB Bandwidth (802.11b, Ch 11)




Fig.A.4.4 Occupied 6dB Bandwidth (802.11g, Ch 1)

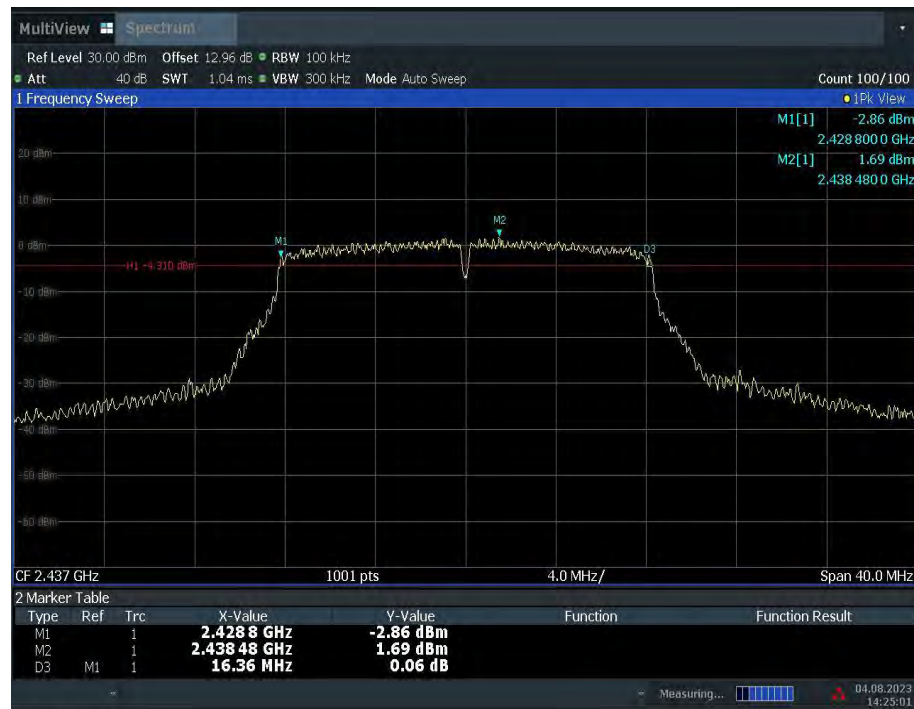


14:25:02 04.08.2023

Fig.A.4.5 Occupied 6dB Bandwidth (802.11g, Ch 6)

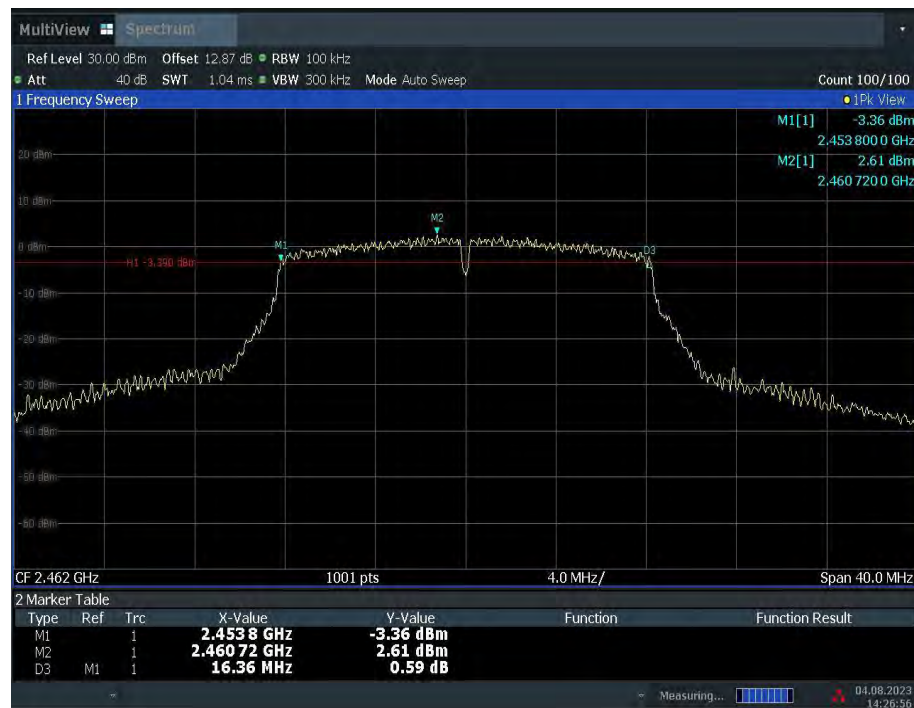


14:26:56 04.08.2023

Fig.A.4.6 Occupied 6dB Bandwidth (802.11g, Ch 11)

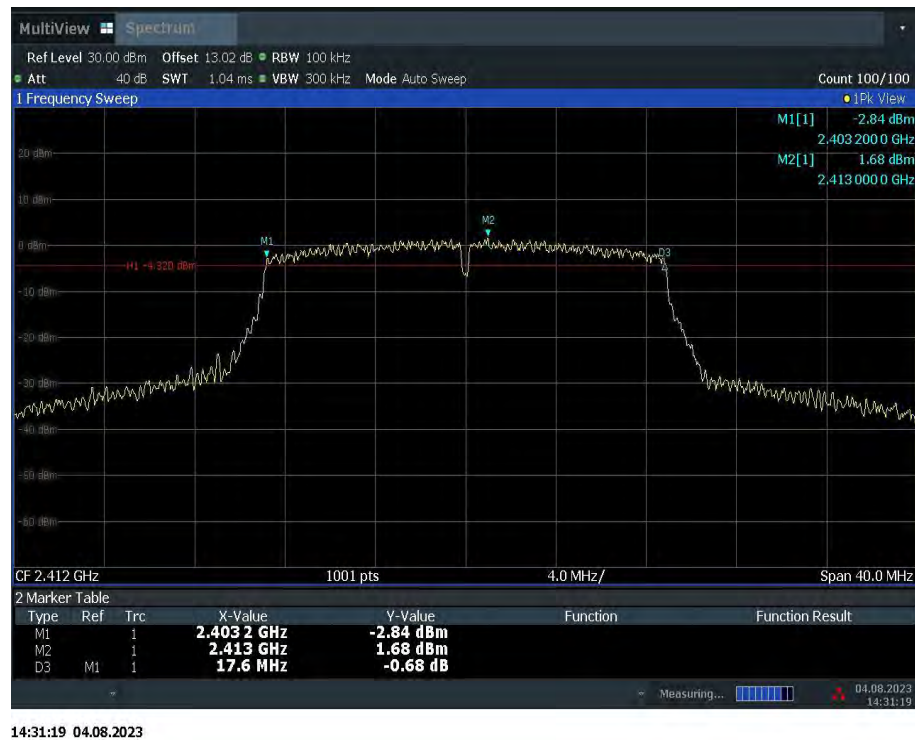

14:31:19 04.08.2023

Fig.A.4.7 Occupied 6dB Bandwidth (802.11n-HT20, Ch 1)

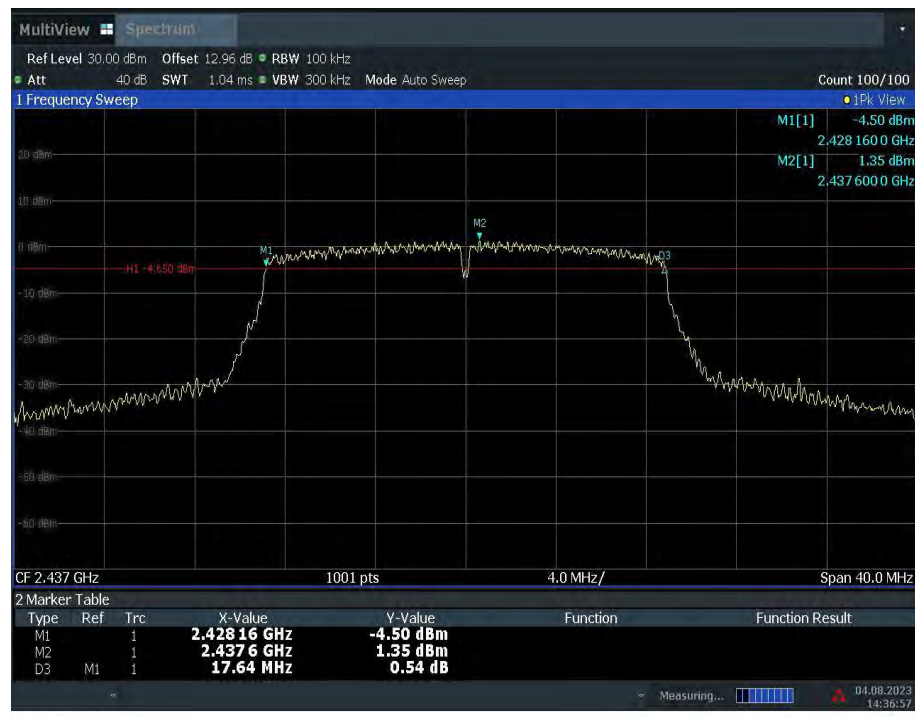

14:36:58 04.08.2023

Fig.A.4.8 Occupied 6dB Bandwidth (802.11n-HT20, Ch 6)



14:38:42 04.08.2023

Fig.A.4.9 Occupied 6dB Bandwidth (802.11n-HT20, Ch 11)

A.5. Band Edges Compliance

Method of Measurement: See ANSI C63.10-2013-clause 6.10.4

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below.

- a) Set Span = 100MHz
- b) Sweep Time: coupled
- c) Set the RBW= 100 kHz
- c) Set the VBW= 300 kHz
- d) Detector: Peak
- e) Trace: Max hold

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

EUT ID: UT02a

Measurement Result:

802.11b/g mode

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.A.5.1	P
	11	Fig.A.5.2	P
802.11g	1	Fig.A.5.3	P
	11	Fig.A.5.4	P

802.11n-HT20 mode

Mode	Channel	Test Results	Conclusion
802.11n (HT20)	1	Fig.A.5.5	P
	11	Fig.A.5.6	P

Conclusion: Pass

Test graphs as below:



14:09:56 04.08.2023

Fig.A.5.1 Band Edges (802.11b, Ch 1)



14:16:23 04.08.2023

Fig.A.5.2 Band Edges (802.11b, Ch 11)



Fig.A.5.3 Band Edges (802.11g, Ch 1)



Fig.A.5.4 Band Edges (802.11g, Ch 11)



Fig.A.5.5 Band Edges (802.11n-HT20, Ch 1)



Fig.A.5.6 Band Edges (802.11n-HT20, Ch 11)

A.6. Transmitter Spurious Emission

A.6.1 Transmitter Spurious Emission – Conducted

Method of Measurement: See ANSI C63.10-2013-clause 11.11

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency
- b) Set the span to ≥ 1.5 times the DTS bandwidth
- c) Set the RBW= 100 kHz
- d) Set the VBW= 300 kHz
- e) Detector = Peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW = 300 kHz.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

EUT ID: UT02a

Measurement Results:

802.11b mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.412 GHz	Fig.A.6.1.1	P
		30 MHz ~ 1 GHz	Fig.A.6.1.2	P
		1 GHz ~ 26.5 GHz	Fig.A.6.1.3	P
	6	2.437 GHz	Fig.A.6.1.4	P
		30 MHz ~ 1 GHz	Fig.A.6.1.5	P
		1 GHz ~ 26.5 GHz	Fig.A.6.1.6	P
	11	2.462 GHz	Fig.A.6.1.7	P
		30 MHz ~ 1 GHz	Fig.A.6.1.8	P
		1 GHz ~ 26.5 GHz	Fig.A.6.1.9	P

802.11g mode


MODE	Channel	Frequency Range	Test Results	Conclusion
802.11g	1	2.412 GHz	Fig.A.6.1.10	P
		30 MHz ~ 1 GHz	Fig.A.6.1.11	P
		1 GHz ~ 26.5 GHz	Fig.A.6.1.12	P
	6	2.437 GHz	Fig.A.6.1.13	P
		30 MHz ~ 1 GHz	Fig.A.6.1.14	P
		1 GHz ~ 26.5 GHz	Fig.A.6.1.15	P
	11	2.462 GHz	Fig.A.6.1.16	P
		30 MHz ~ 1 GHz	Fig.A.6.1.17	P
		1 GHz ~ 26.5 GHz	Fig.A.6.1.18	P

802.11n-HT20 mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	1	2.412 GHz	Fig.A.6.1.19	P
		30 MHz ~ 1 GHz	Fig.A.6.1.20	P
		1 GHz ~ 26.5 GHz	Fig.A.6.1.21	P
	6	2.437 GHz	Fig.A.6.1.22	P
		30 MHz ~ 1 GHz	Fig.A.6.1.23	P
		1 GHz ~ 26.5 GHz	Fig.A.6.1.24	P
	11	2.462 GHz	Fig.A.6.1.25	P
		30 MHz ~ 1 GHz	Fig.A.6.1.26	P
		1 GHz ~ 26.5 GHz	Fig.A.6.1.27	P


Conclusion: Pass

Test graphs as below:

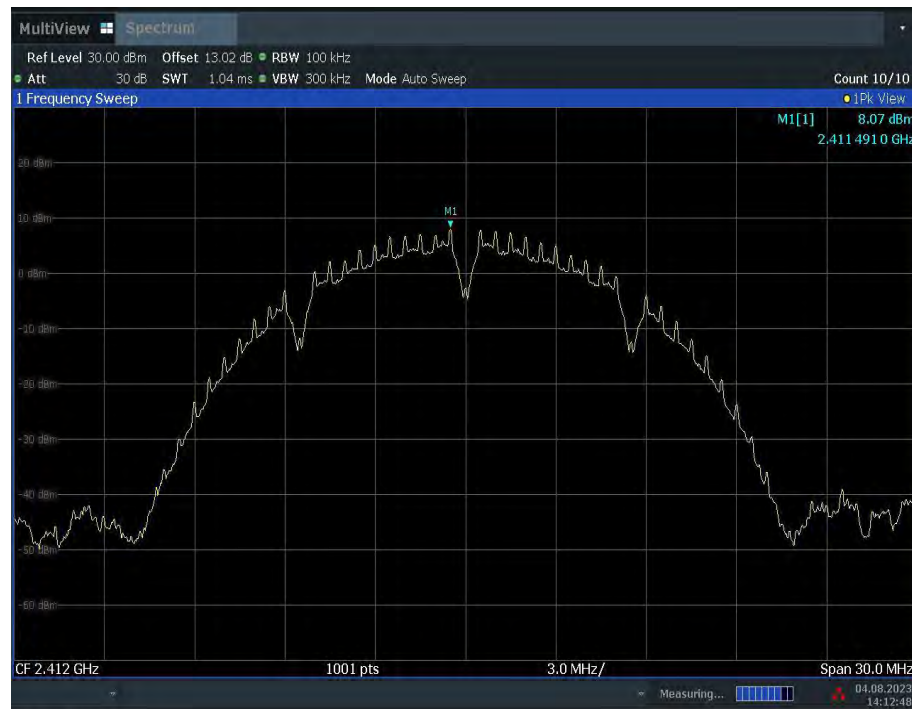

14:12:49 04.08.2023

Fig.A.6.1.1 Transmitter Spurious Emission - Conducted (802.11b, Ch1, Center Frequency)

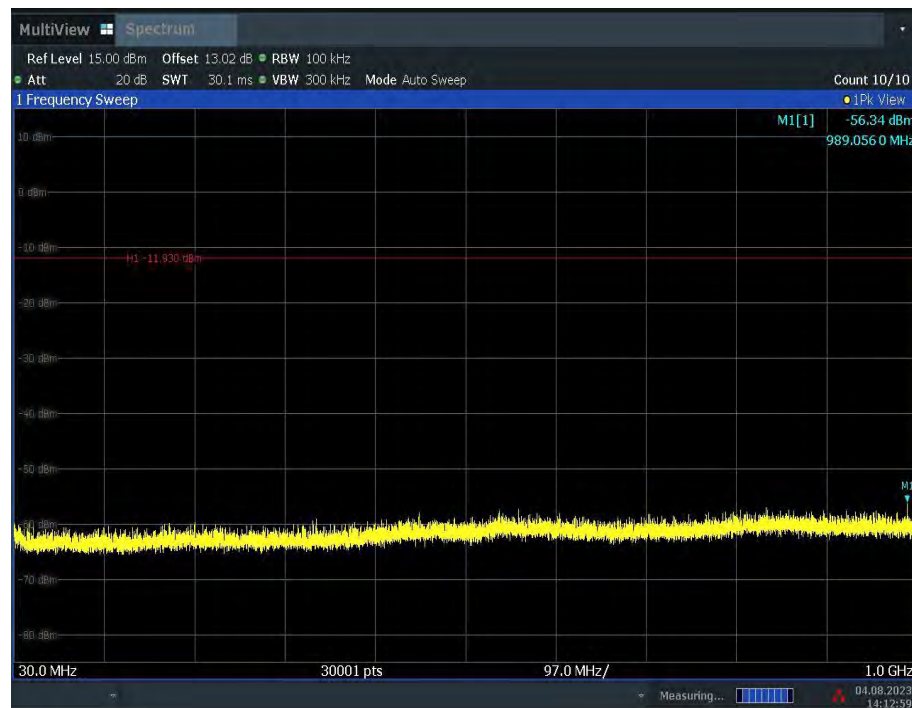


14:13:00 04.08.2023

Fig.A.6.1.2 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 30 MHz-1 GHz)



14:13:36 04.08.2023

Fig.A.6.1.3 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 1 GHz-26.5 GHz)

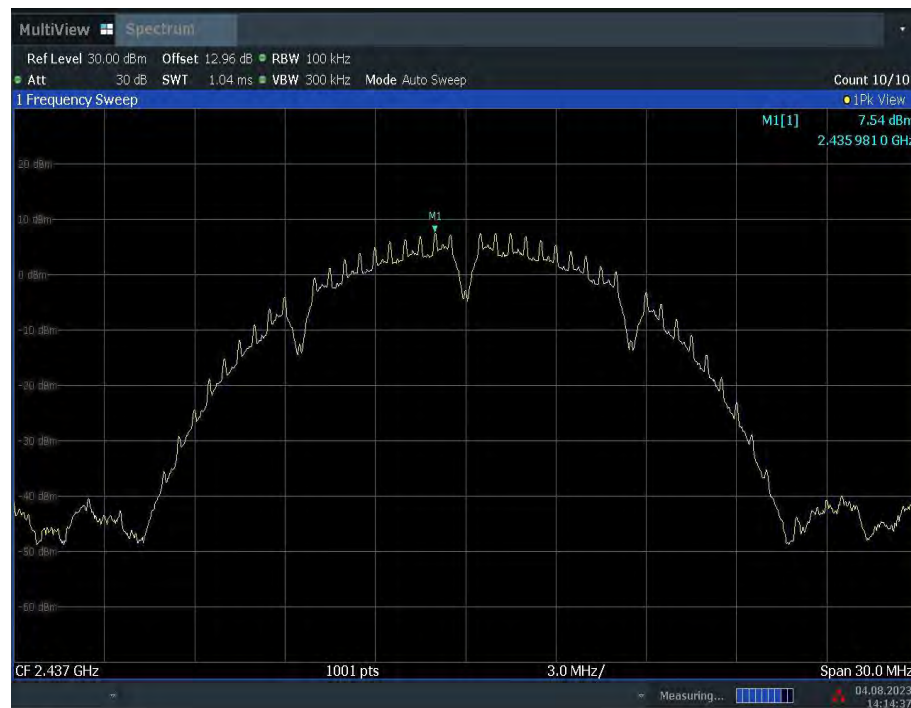

14:14:38 04.08.2023

Fig.A.6.1.4 Transmitter Spurious Emission - Conducted (802.11b, Ch6, Center Frequency)



Fig.A.6.1.5 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 30 MHz-1 GHz)



Fig.A.6.1.6 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 1 GHz-26.5 GHz)

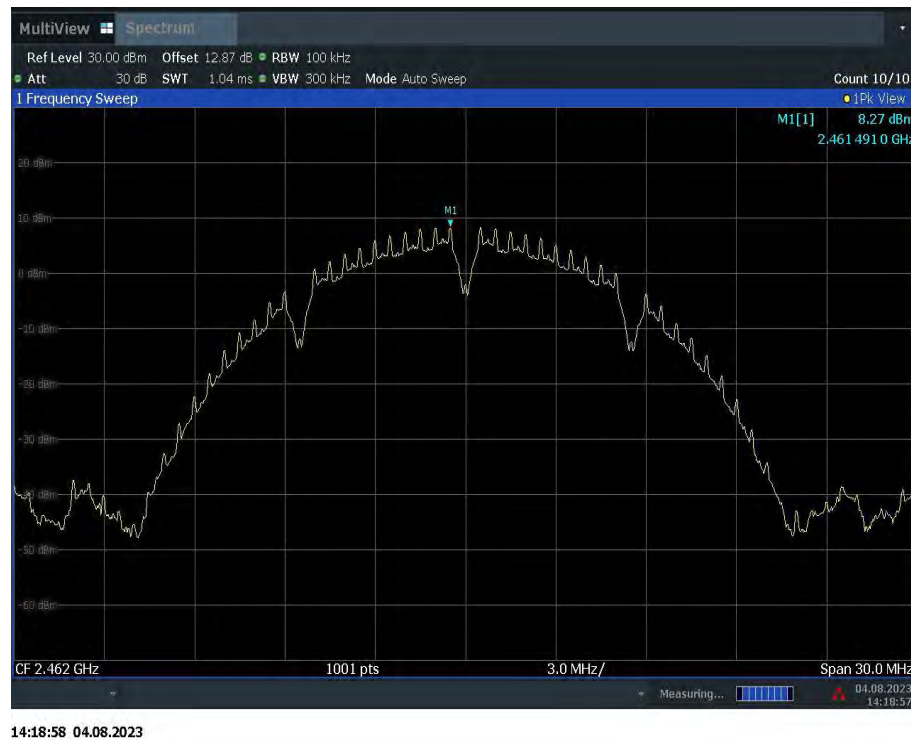


Fig.A.6.1.7 Transmitter Spurious Emission - Conducted (802.11b, Ch11, Center Frequency)




Fig.A.6.1.8 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 30 MHz-1 GHz)



Fig.A.6.1.9 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 1 GHz-26.5 GHz)



Fig.A.6.1.10 Transmitter Spurious Emission - Conducted (802.11g, Ch1, Center Frequency)

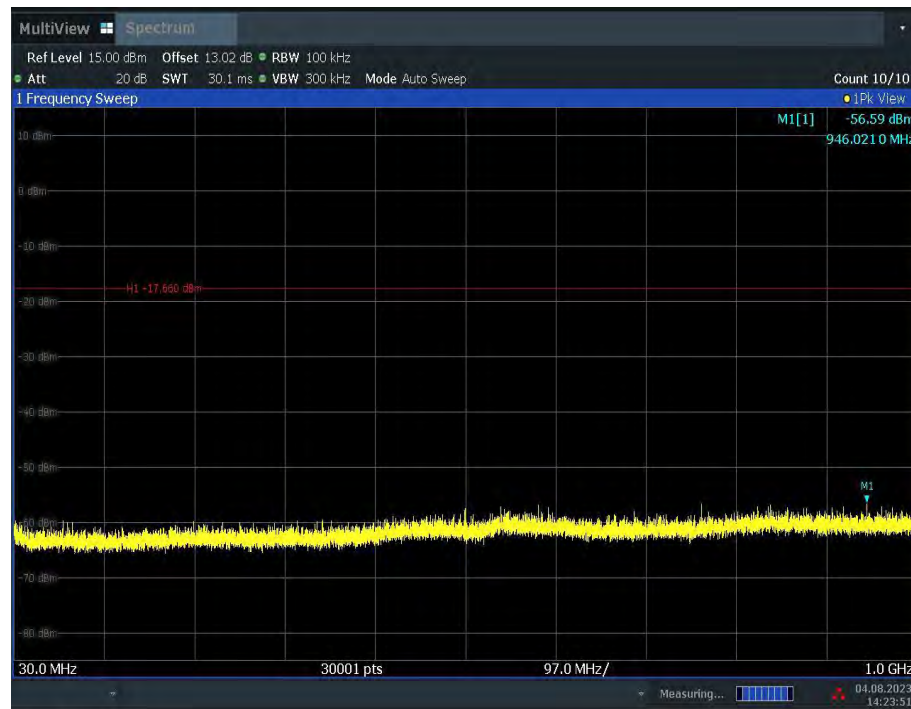

14:23:52 04.08.2023

Fig.A.6.1.11 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 30 MHz-1 GHz)




14:24:28 04.08.2023

Fig.A.6.1.12 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 1 GHz-26.5 GHz)



14:25:24 04.08.2023

Fig.A.6.1.13 Transmitter Spurious Emission - Conducted (802.11g, Ch6, Center Frequency)

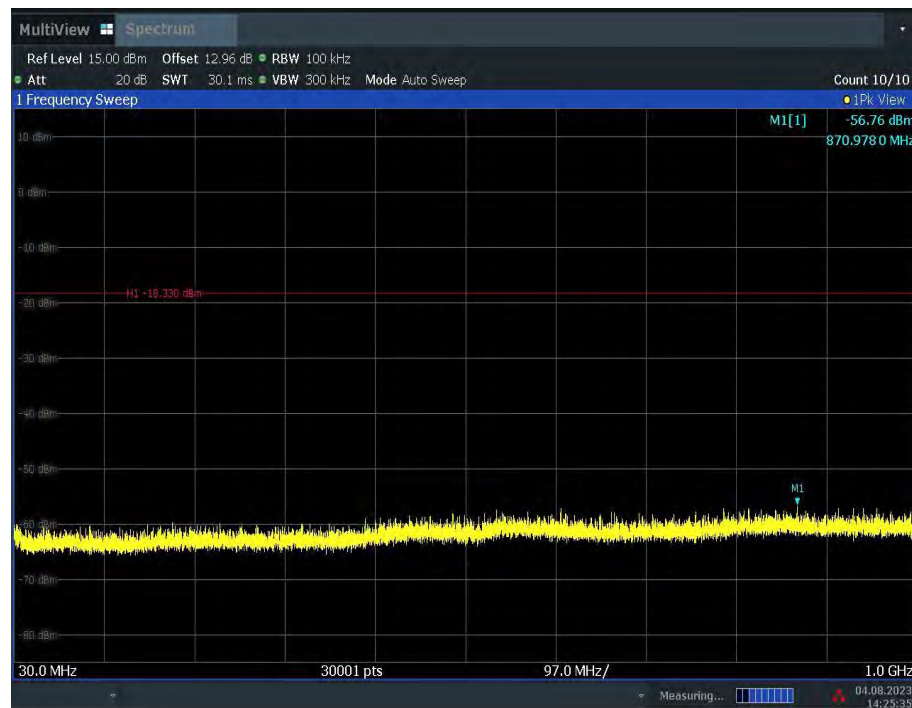


14:25:35 04.08.2023

Fig.A.6.1.14 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 30 MHz-1 GHz)



14:26:11 04.08.2023

Fig.A.6.1.15 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 1 GHz-26.5 GHz)

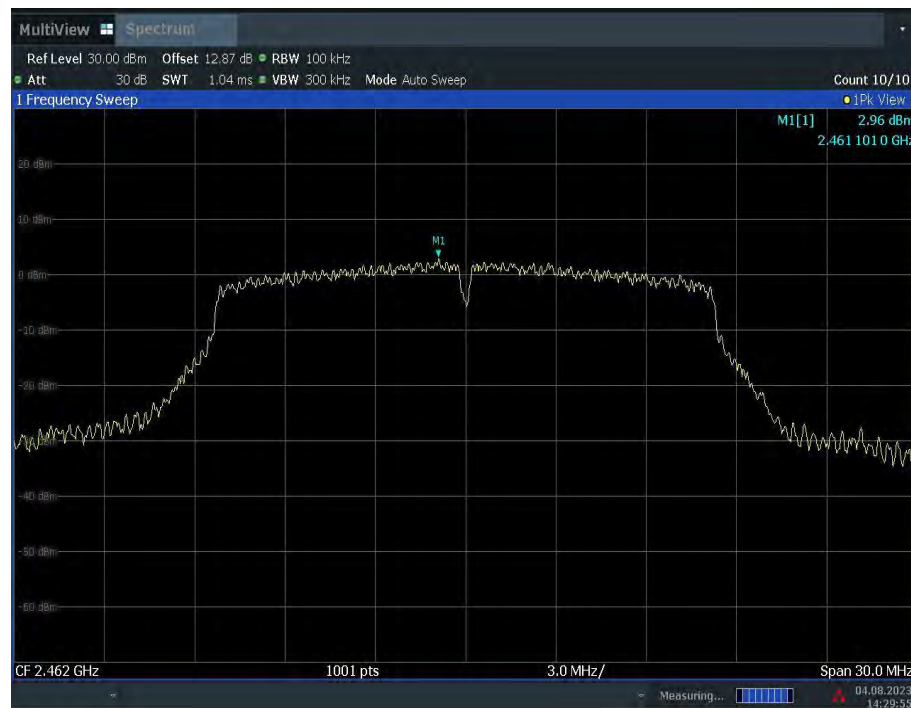

14:29:55 04.08.2023

Fig.A.6.1.16 Transmitter Spurious Emission - Conducted (802.11g, Ch11, Center Frequency)

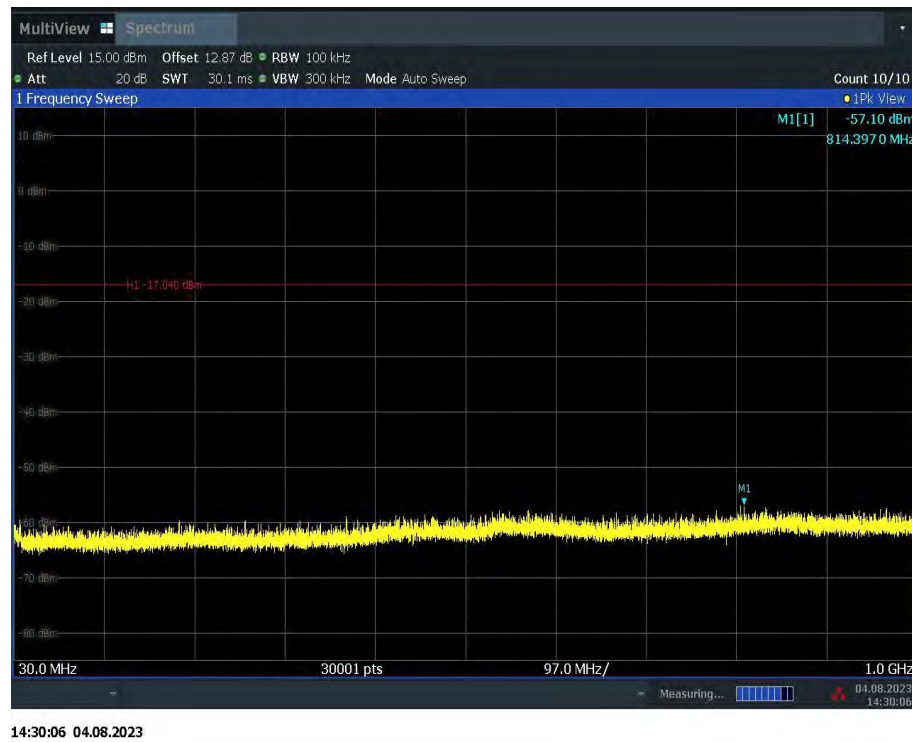


Fig.A.6.1.17 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 30 MHz-1 GHz)



Fig.A.6.1.18 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 1 GHz-26.5 GHz)

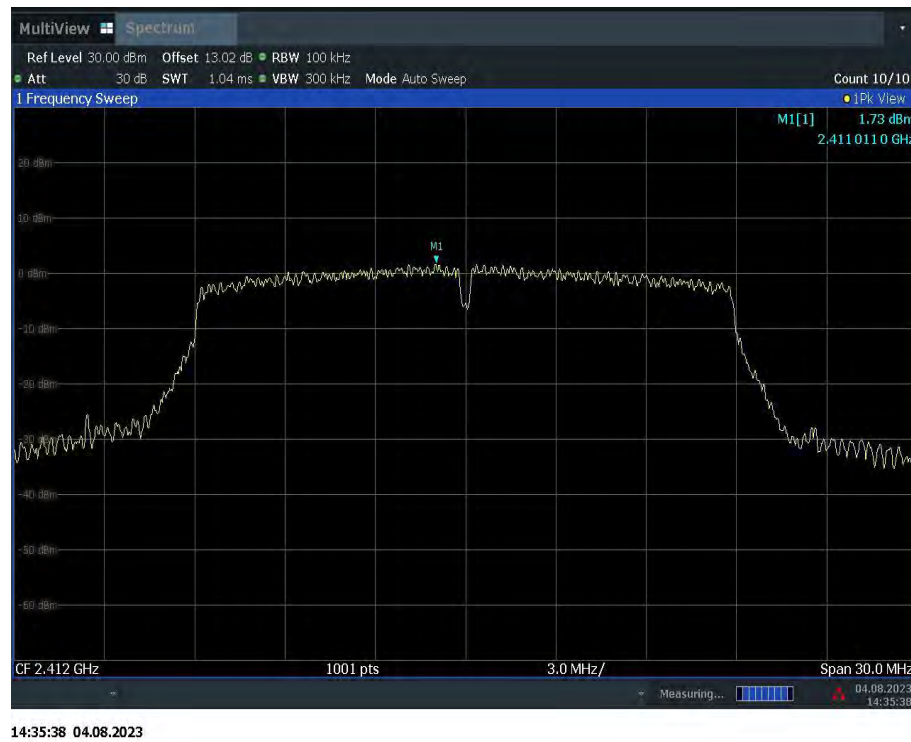


Fig.A.6.1.19 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, Center Frequency)

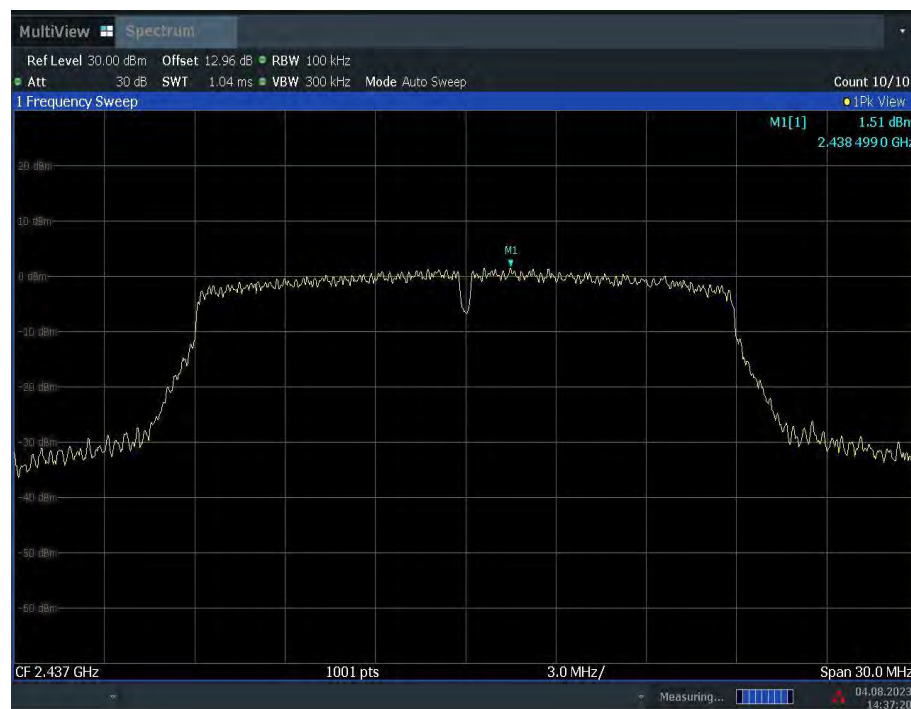


Fig.A.6.1.20 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 30 MHz-1 GHz)



14:36:25 04.08.2023

Fig.A.6.1.21 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 1 GHz-26.5 GHz)



14:37:21 04.08.2023

Fig.A.6.1.22 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, Center Frequency)




14:37:32 04.08.2023

Fig.A.6.1.23 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 30 MHz-1 GHz)




14:38:08 04.08.2023

Fig.A.6.1.24 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 1 GHz-26.5 GHz)

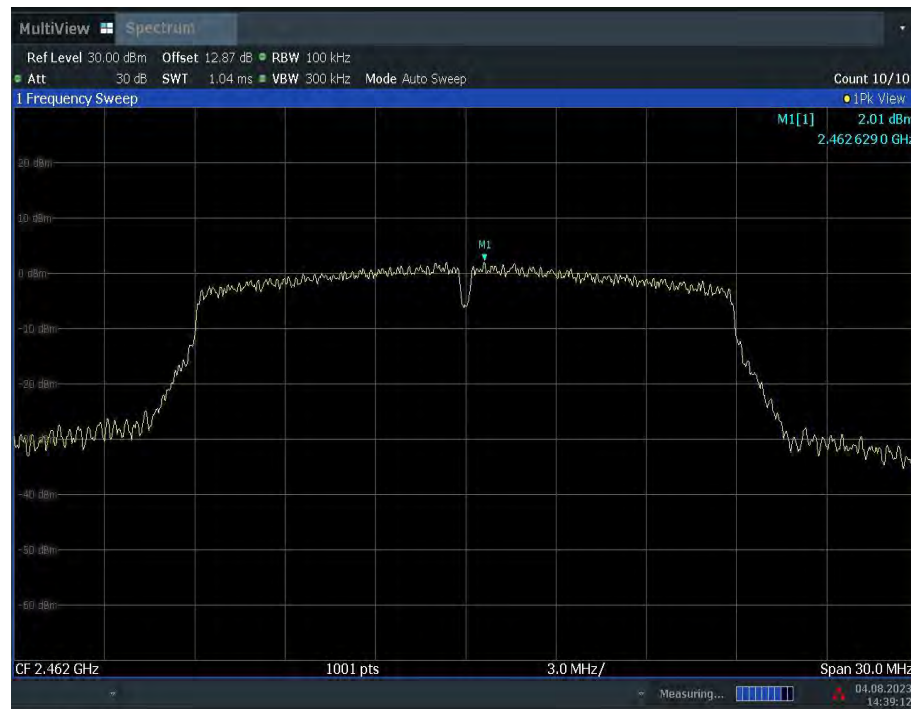

14:39:13 04.08.2023

Fig.A.6.1.25 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, Center Frequency)

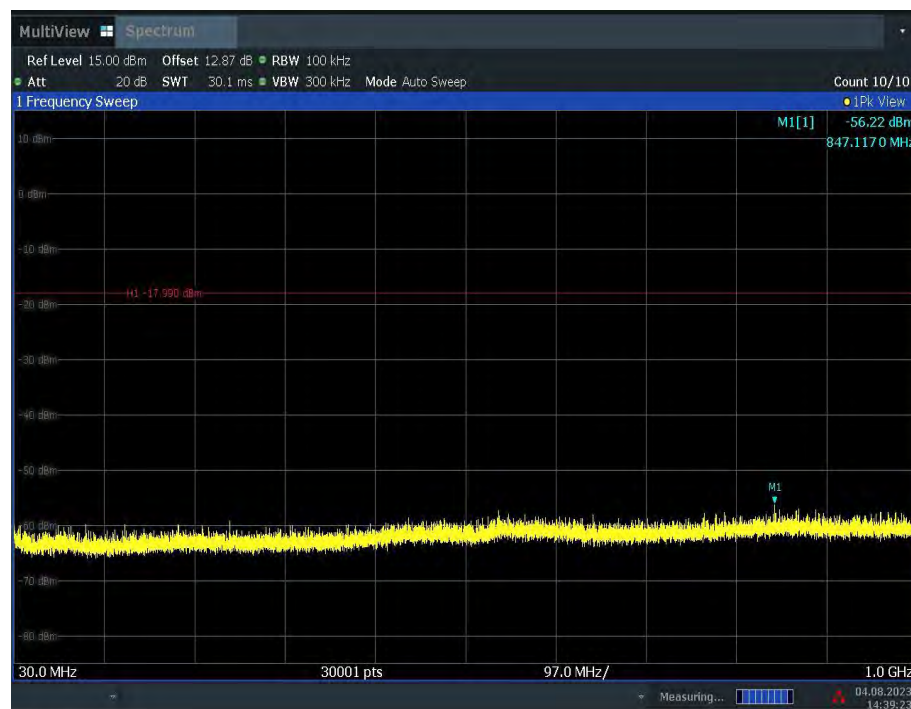

14:39:24 04.08.2023

Fig.A.6.1.26 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 30 MHz-1 GHz)



14:40:00 04.08.2023

Fig.A.6.1.27 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 1 GHz-26.5 GHz)

A.6.2 Transmitter Spurious Emission - Radiated

Method of Measurement: See ANSI C63.10-clause 6.4 & 6.5 & 6.6

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength (uV/m)	Field strength (dBuV/m)	Measurement distance (m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Frequency (MHz)	Field strength(μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Set up:

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m

The EUT and transmitting antenna shall be centered on the turntable.

Test Procedure

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The receiver references:

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100kHz/300kHz	5
1000-3000	1MHz/3MHz	15
3000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

Measurement results:
802.11b mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.31GHz~2.43GHz---L	Fig.A.6.2.1	P
	11	2.45GHz~2.50GHz---H	Fig.A.6.2.2	P

802.11g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11g	1	2.31GHz~2.43GHz---L	Fig.A.6.2.3	P
	11	2.45GHz~2.50GHz---H	Fig.A.6.2.4	P

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	1	2.31GHz~2.43GHz---L	Fig.A.6.2.5	P
	2	2.31GHz~2.43GHz---L	Fig.A.6.2.6	P
	10	2.45GHz~2.50GHz---H	Fig.A.6.2.7	P
	11	2.45GHz~2.50GHz---H	Fig.A.6.2.8	P

Conclusion: Pass
Note:

1. A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result= $P_{Mea}+A_{Rpl}= P_{Mea}+Cable\ Loss+Antenna\ Factor$

2. The range of evaluated frequency is from 9 kHz to 26GHz. Measurement value show only up to 6 maximum emissions noted.

Peak
802.11b
Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.436	61.41	4.61	31.67	25.12	74.00	12.59	V
2389.926	61.14	4.62	31.68	24.84	74.00	12.86	V
4824.000	52.92	-35.02	33.86	54.08	74.00	21.08	H
7236.000	42.88	-33.18	35.64	40.41	74.00	31.12	V
9648.000	44.30	-32.05	36.40	39.95	74.00	29.70	V
12060.000	47.51	-29.99	38.80	38.69	74.00	26.49	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2360.400	44.08	-35.77	31.33	48.52	74.00	29.92	H
2509.800	46.19	-35.77	32.44	49.52	74.00	27.81	H
4874.000	52.85	-34.48	33.80	53.53	74.00	21.15	V
7311.000	42.67	-33.10	35.40	40.38	74.00	31.33	V
9748.000	44.66	-31.86	36.60	39.92	74.00	29.34	H
12185.000	48.55	-29.45	38.80	39.20	74.00	25.45	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2484.865	63.01	4.65	32.31	26.05	74.00	10.99	H
2485.190	63.02	4.65	32.31	26.06	74.00	10.98	V
4924.000	52.48	-34.80	33.85	53.43	74.00	21.52	V
7386.000	44.14	-32.81	35.47	41.47	74.00	29.86	H
9848.000	44.97	-32.00	36.60	40.37	74.00	29.03	H
12310.000	47.33	-29.70	38.60	38.43	74.00	26.67	H

802.11g

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.870	65.05	4.62	31.68	28.76	74.00	8.95	V
2389.996	64.85	4.62	31.68	28.56	74.00	9.15	V
4824.000	45.88	-35.02	33.86	47.04	74.00	28.12	H
7236.000	43.41	-33.18	35.64	40.94	74.00	30.59	V
9648.000	45.52	-32.05	36.40	41.18	74.00	28.48	H
12060.000	48.04	-29.99	38.80	39.22	74.00	25.96	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2367.200	44.17	-35.63	31.41	48.39	74.00	29.83	V
2503.600	45.16	-35.49	32.41	48.23	74.00	28.84	V
4874.000	47.51	-34.48	33.80	48.19	74.00	26.49	H
7311.000	43.72	-33.10	35.40	41.42	74.00	30.28	H
9748.000	46.20	-31.86	36.60	41.46	74.00	27.80	V
12185.000	47.67	-29.45	38.80	38.32	74.00	26.33	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.615	64.81	4.65	32.30	27.86	74.00	9.19	V
2483.695	64.62	4.65	32.30	27.67	74.00	9.38	V
4930.000	47.18	-34.88	33.84	48.22	74.00	26.82	H
7386.000	43.72	-32.81	35.47	41.06	74.00	30.28	V
9848.000	44.76	-32.00	36.60	40.17	74.00	29.24	V
12310.000	47.55	-29.70	38.60	38.65	74.00	26.45	H

802.11n-HT20
Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.330	67.06	4.61	31.67	30.78	74.00	6.94	V
2388.792	69.00	4.61	31.67	32.72	74.00	5.00	V
4824.000	45.05	-35.02	33.86	46.21	74.00	28.95	H
7236.000	42.63	-33.18	35.64	40.17	74.00	31.37	H
9648.000	45.03	-32.05	36.40	40.69	74.00	28.97	V
12060.000	47.07	-29.99	38.80	38.26	74.00	26.93	V

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2363.800	45.08	-35.70	31.37	49.41	74.00	28.92	H
2509.400	45.83	-35.75	32.44	49.14	74.00	28.17	V
4874.000	47.65	-34.48	33.80	48.34	74.00	26.35	V
7311.000	43.21	-33.10	35.40	40.91	74.00	30.79	V
9748.000	45.09	-31.86	36.60	40.35	74.00	28.91	H
12185.000	48.25	-29.45	38.80	38.90	74.00	25.75	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.585	65.67	4.65	32.30	28.72	74.00	8.33	H
2483.955	66.82	4.65	32.30	29.86	74.00	7.18	H
4924.000	44.52	-34.80	33.85	45.48	74.00	29.48	H
7386.000	44.64	-32.81	35.47	41.98	74.00	29.36	H
9848.000	44.09	-32.00	36.60	39.49	74.00	29.91	V
12310.000	46.55	-29.70	38.60	37.65	74.00	27.45	V

Average

802.11b

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.950	48.32	4.62	31.68	12.02	54.00	5.68	V
2389.980	48.32	4.62	31.68	12.02	54.00	5.68	V
4824.000	49.81	-35.02	33.86	50.97	54.00	4.19	H
7236.000	31.13	-33.18	35.64	28.67	54.00	22.87	H
9648.000	33.00	-32.05	36.40	28.65	54.00	21.00	V
12060.000	35.85	-29.99	38.80	27.04	54.00	18.15	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2420.100	48.71	4.65	31.92	12.14	54.00	5.29	V
2453.970	48.82	4.67	32.12	12.02	54.00	5.18	V
4873.500	49.73	-34.49	33.79	50.43	54.00	4.27	V
7311.000	31.28	-33.10	35.40	28.98	54.00	22.72	H
9748.000	33.09	-31.86	36.60	28.35	54.00	20.91	V
12185.000	35.94	-29.45	38.80	26.59	54.00	18.06	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.580	48.93	4.65	32.30	11.97	54.00	5.07	V
2483.700	48.90	4.65	32.30	11.94	54.00	5.10	V
4924.000	49.93	-34.80	33.85	50.89	54.00	4.07	V
7386.000	32.08	-32.81	35.47	29.41	54.00	21.92	V
9848.000	32.98	-32.00	36.60	28.38	54.00	21.02	H
12310.000	35.47	-29.70	38.60	26.57	54.00	18.53	H

802.11g

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.950	49.16	4.62	31.68	12.87	54.00	4.84	V
2389.980	49.19	4.62	31.68	12.89	54.00	4.81	V
4824.000	34.92	-35.02	33.86	36.08	54.00	19.08	V
7236.000	30.82	-33.18	35.64	28.36	54.00	23.18	H
9648.000	32.86	-32.05	36.40	28.51	54.00	21.14	H
12060.000	35.65	-29.99	38.80	26.84	54.00	18.35	V

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2418.180	48.57	4.65	31.91	12.02	54.00	5.43	V
2455.230	48.72	4.67	32.13	11.92	54.00	5.28	V
4871.500	34.86	-34.52	33.79	35.59	54.00	19.14	V
7311.000	31.24	-33.10	35.40	28.94	54.00	22.76	H
9748.000	33.07	-31.86	36.60	28.33	54.00	20.93	H
12185.000	36.00	-29.45	38.80	26.65	54.00	18.00	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.520	50.32	4.65	32.30	13.36	54.00	3.68	V
2483.550	50.28	4.65	32.30	13.33	54.00	3.72	V
4923.000	33.59	-34.79	33.85	34.53	54.00	20.41	H
7386.000	31.90	-32.81	35.47	29.23	54.00	22.10	H
9848.000	32.91	-32.00	36.60	28.31	54.00	21.09	H
12310.000	35.36	-29.70	38.60	26.46	54.00	18.64	V

802.11n-HT20
Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.470	50.05	4.61	31.67	13.76	54.00	3.95	V
2389.890	50.31	4.62	31.68	14.01	54.00	3.69	V
4824.000	33.90	-35.02	33.86	35.07	54.00	20.10	V
7236.000	30.78	-33.18	35.64	28.31	54.00	23.22	V
9648.000	32.50	-32.05	36.40	28.16	54.00	21.50	V
12060.000	35.17	-29.99	38.80	26.35	54.00	18.83	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2419.710	48.63	4.65	31.92	12.07	54.00	5.37	V
2452.260	48.90	4.67	32.11	12.11	54.00	5.10	V
4873.000	35.50	-34.50	33.79	36.21	54.00	18.50	H
7311.000	31.00	-33.10	35.40	28.70	54.00	23.00	H
9748.000	32.80	-31.86	36.60	28.06	54.00	21.20	H
12185.000	35.70	-29.45	38.80	26.36	54.00	18.30	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.520	50.43	4.65	32.30	13.47	54.00	3.57	V
2483.610	50.34	4.65	32.30	13.39	54.00	3.66	V
4924.000	32.65	-34.80	33.85	33.61	54.00	21.35	H
7386.000	31.60	-32.81	35.47	28.93	54.00	22.40	V
9848.000	32.51	-32.00	36.60	27.91	54.00	21.49	H
12310.000	34.83	-29.70	38.60	25.93	54.00	19.17	V

Test graphs as below:

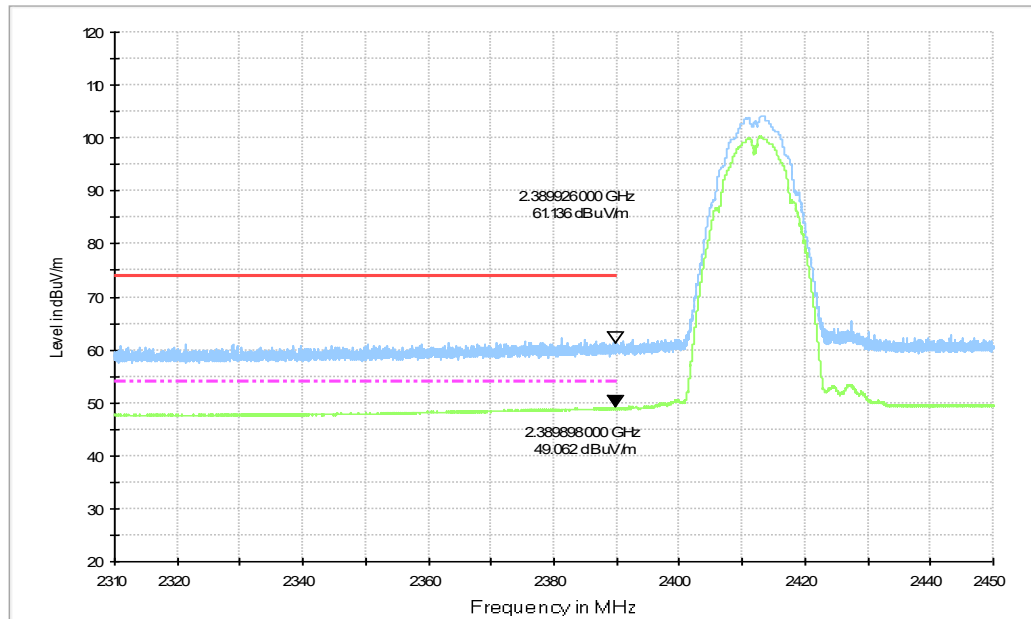


Fig.A.6.2.1 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch1, 2.31 GHz – 2.45GHz

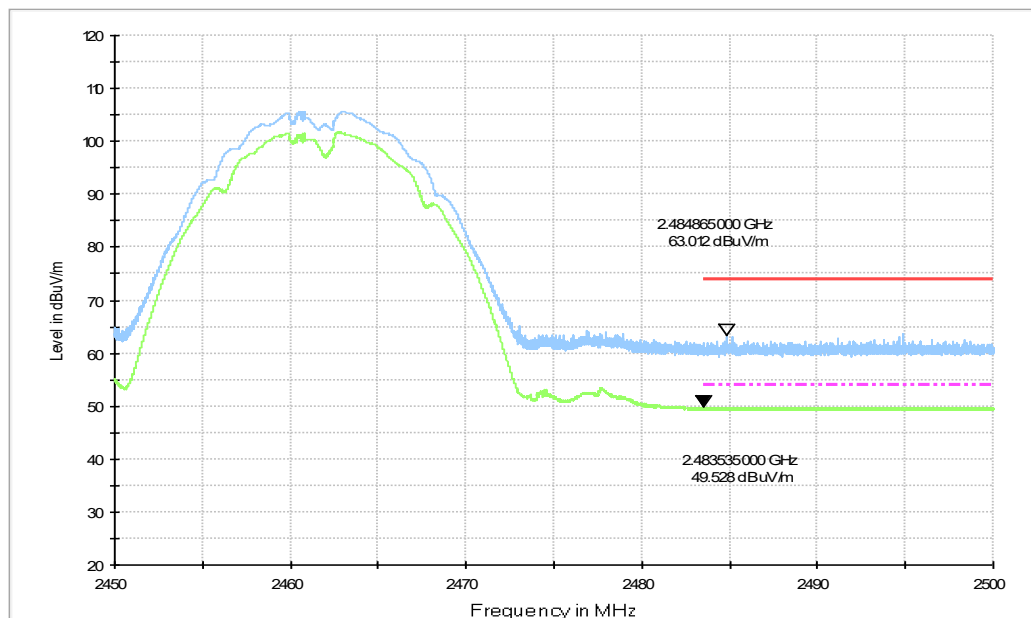


Fig.A.6.2.2 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz

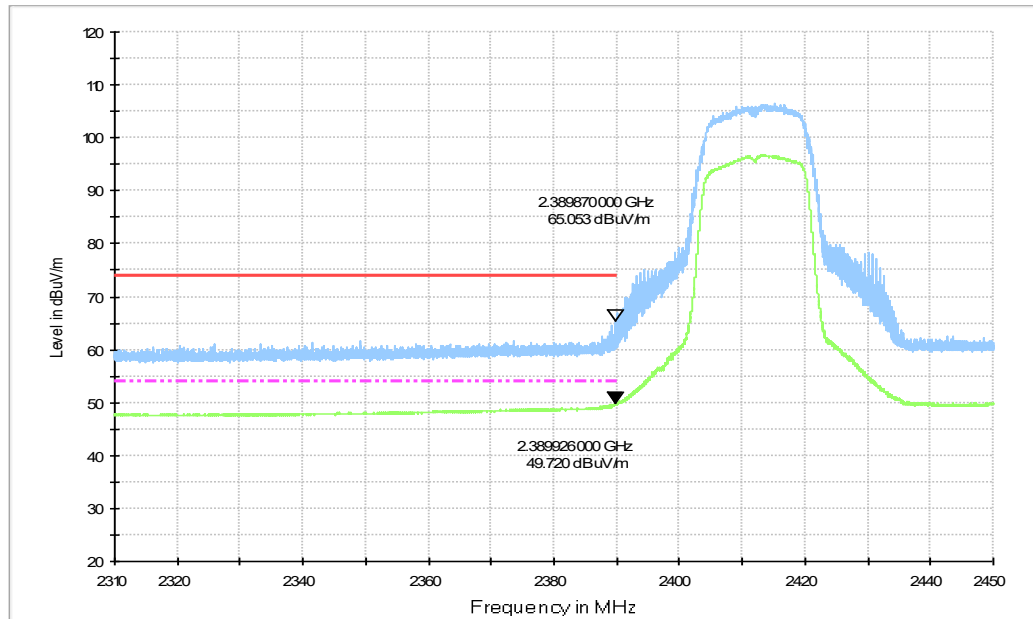


Fig.A.6.2.3 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch1, 2.31 GHz - 2.45GHz

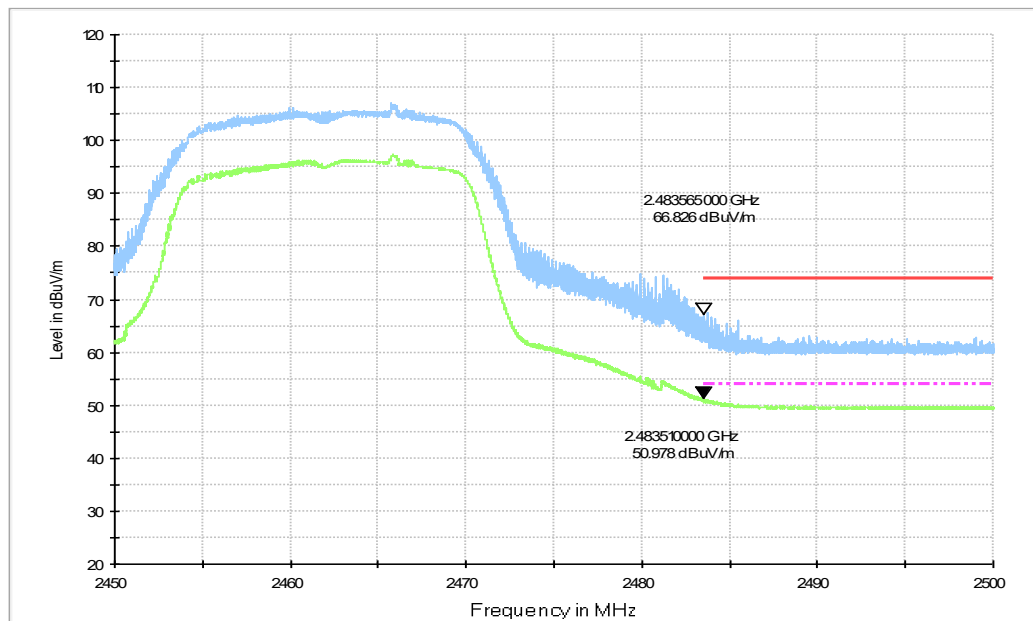


Fig.A.6.2.4 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz

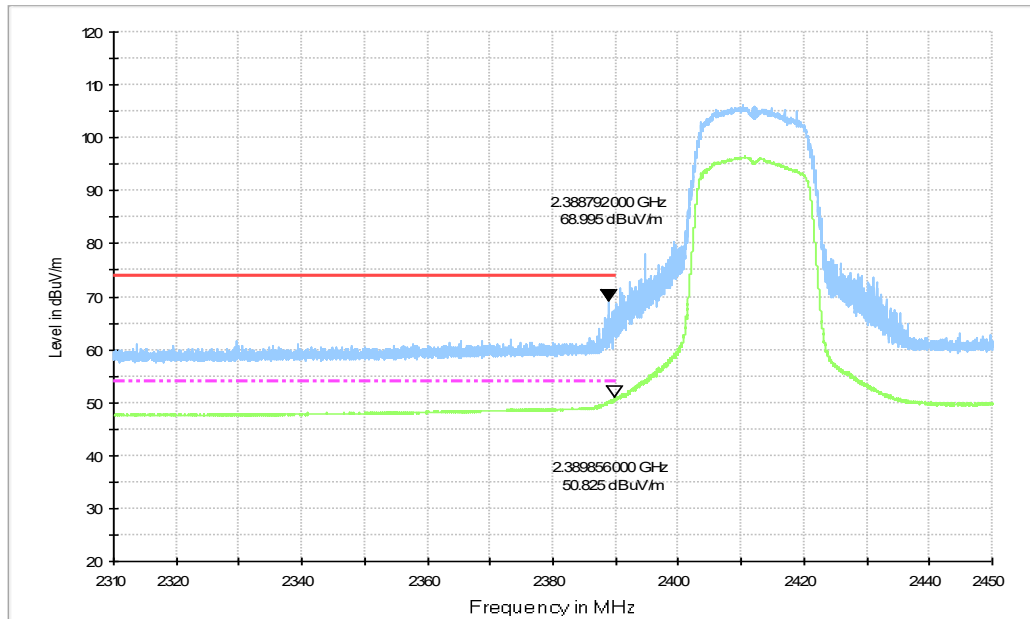


Fig.A.6.2.5 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch1, 2.31 GHz - 2.45GHz

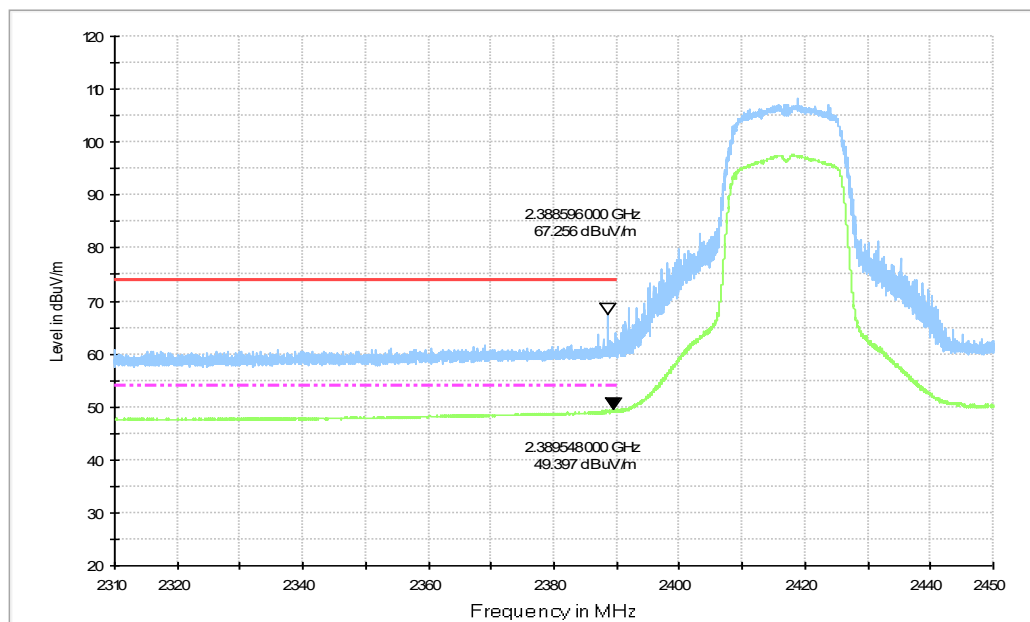


Fig.A.6.2.6 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch2, 2.31 GHz - 2.45GHz

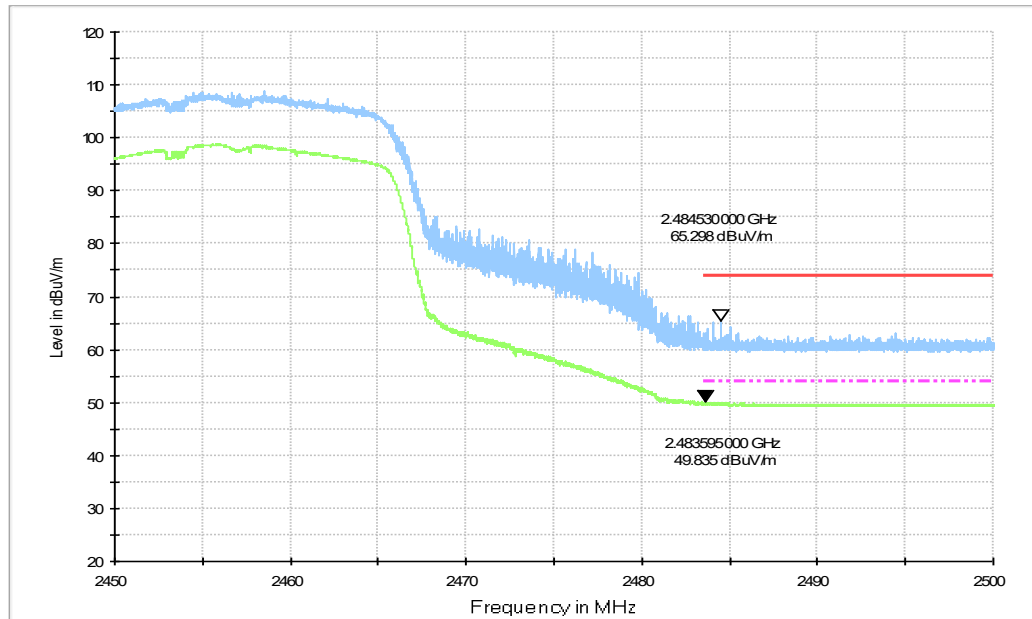


Fig.A.6.2.7 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch10, 2.45 GHz - 2.50GHz

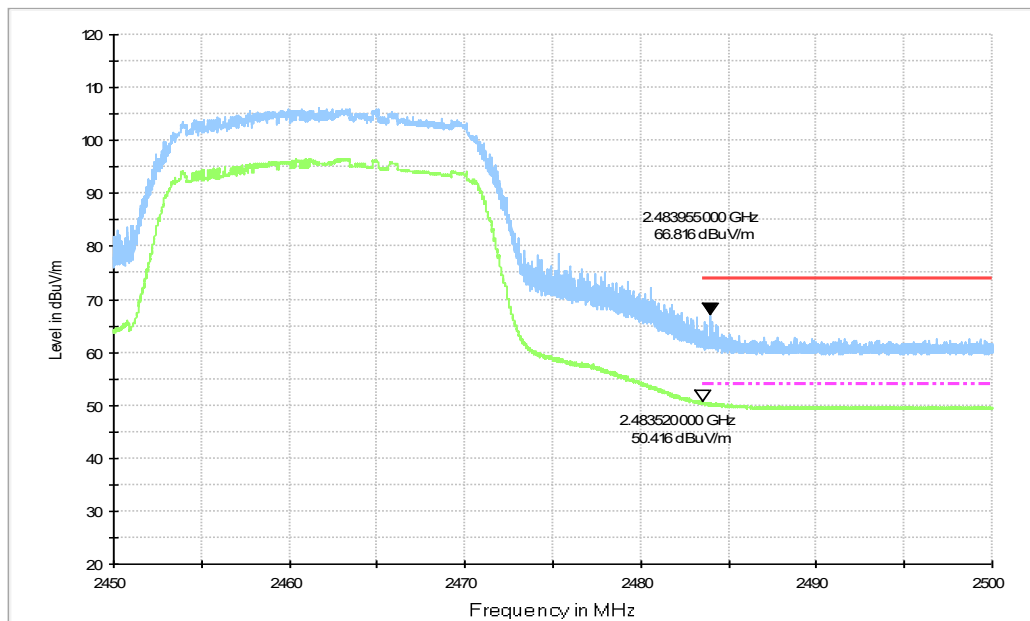


Fig.A.6.2.8 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz

A.7. AC Power-line Conducted Emission

Summary

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section

Method of Measurement:

See Clause 6.2 of ANSI C63.10 specifically.

See Clause 4 and Clause 5 of ANSI C63.10 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver:
Quasi-Peak / Average Detector.


The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/IF bandwidth
0.15-30	9kHz

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Setup

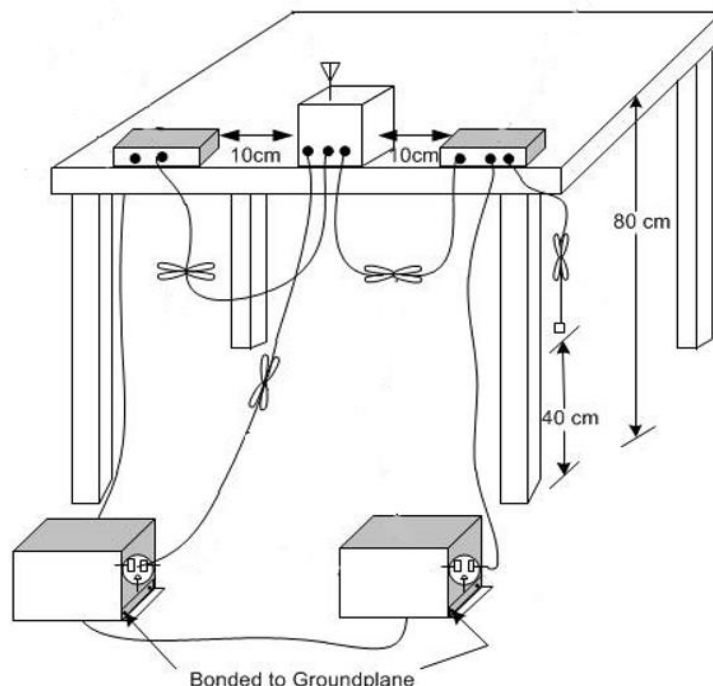

Measurement Result and limit:
WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	66 to 56	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	56 to 46	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: Pass

Test graphs as below:

Result for Traffic:

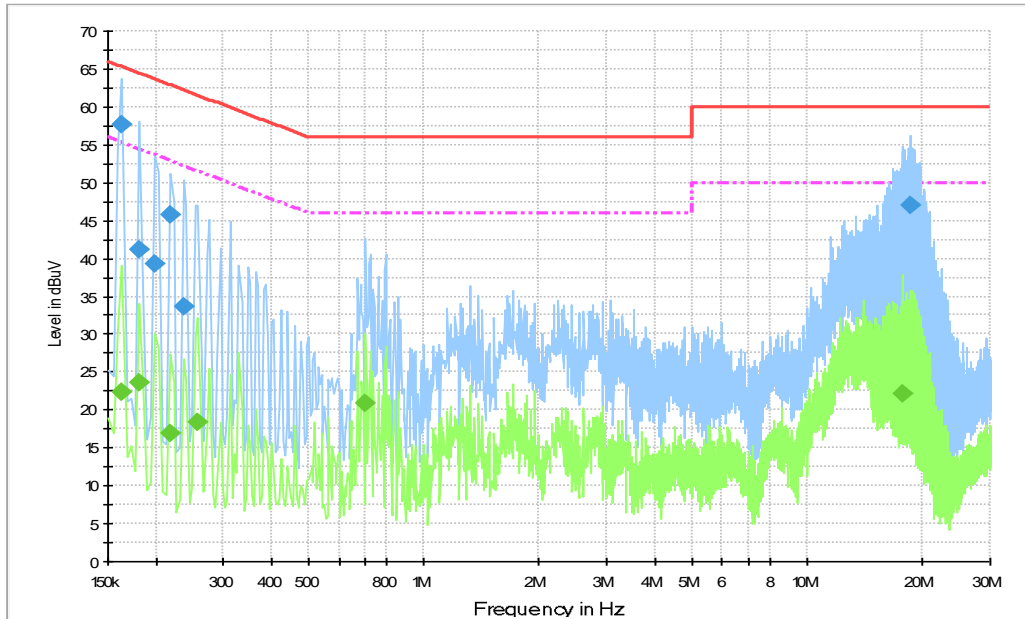


Fig.A.7.1 AC Powerline Conducted Emission-802.11b

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.163500	57.6	2000.	9.000	L1	26.0	7.7	65.3
0.181500	41.2	2000.	9.000	N	22.7	23.2	64.4
0.199500	39.2	2000.	9.000	N	19.8	24.4	63.6
0.217500	45.7	2000.	9.000	L1	19.7	17.2	62.9
0.235500	33.7	2000.	9.000	N	19.7	28.5	62.3
18.663000	47.0	2000.	9.000	N	19.9	13.0	60.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.163500	22.4	2000.0	9.000	N	26.0	32.9	55.3
0.181500	23.7	2000.0	9.000	L1	22.7	30.7	54.4
0.217500	17.0	2000.0	9.000	L1	19.7	35.9	52.9
0.258000	18.4	2000.0	9.000	L1	19.7	33.1	51.5
0.703500	21.0	2000.0	9.000	L1	19.7	25.0	46.0
17.709000	22.1	2000.0	9.000	L1	19.9	27.9	50.0

Result for Idle:

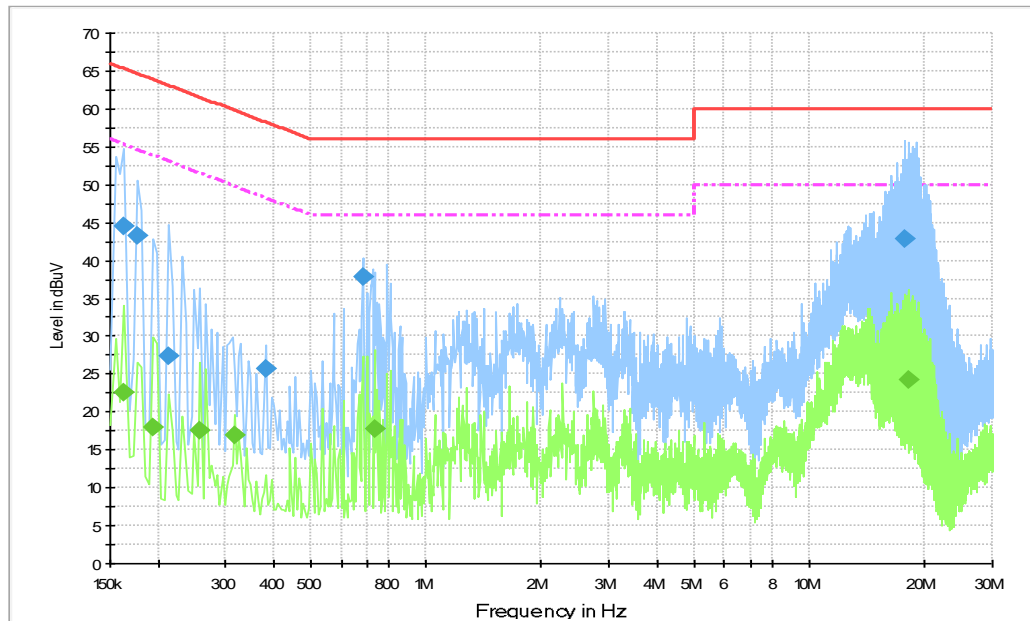


Fig.A.7.2 AC Powerline Conducted Emission-Idle

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.163500	44.4	2000.	9.000	N	26.0	20.9	65.3
0.177000	43.2	2000.	9.000	L1	23.5	21.5	64.6
0.213000	27.4	2000.	9.000	N	19.7	35.7	63.1
0.384000	25.8	2000.	9.000	N	19.7	32.4	58.2
0.685500	37.8	2000.	9.000	N	19.7	18.2	56.0
17.646000	42.8	2000.	9.000	L1	19.9	17.2	60.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.163500	22.5	2000.0	9.000	N	26.0	32.8	55.3
0.195000	17.9	2000.0	9.000	N	20.5	35.9	53.8
0.258000	17.6	2000.0	9.000	N	19.7	33.9	51.5
0.316500	16.9	2000.0	9.000	N	19.7	32.9	49.8
0.735000	17.8	2000.0	9.000	N	19.7	28.2	46.0
18.249000	24.3	2000.0	9.000	N	19.9	25.7	50.0

ANNEX B: EUT parameters

Disclaimer: The antenna gain provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX C: Accreditation Certificate



END OF REPORT