


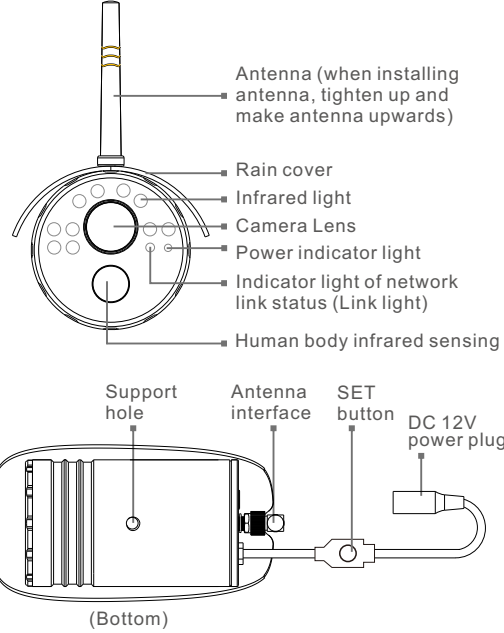
HD Outdoor WiFi Camera



Quick Start Guide
Model: T5923HAA

Before using the product, please read the guide carefully to avoid any damages to the product in virtue of faulty operation or misuse.

1 Appearance




(Bottom)

-1-

2 Installation


Preparation prior to Installation

1. 2.4G wireless router is required.
2. Support Android 4.4 and above, iOS 8.0 and above
3. Download and install the APP.
A. Open the App Store , search "GOSCOM" and install.
B. Open the Google Play Store , search "GOSCOM" and install.
4. Here is an operation example of Android APP, and it can serve as a reference for the iOS APP.
5. Power-on camera and red link indicator remains, power indicator remains.



Register/Login

Step 1: Tap the "GOSCOM" APP icon to open it (figure 1);
Step 2: Use email address for user ID registration (figure 2-3);
Step 3: After registration, enter the email address and then password to log in (figure 2)

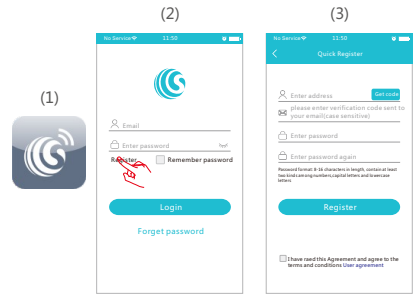


TIP: For user ID registration, please use an effective email address, (example XXXX@qq.com), in order to retrieve the password.

-3-


Scan QR Code to Add

1. Click "Add Camera" (figure 4) → Click "scan the QR code to add" (figure 5)
2. Configure WiFi, enter WiFi name and password, and click "Confirm" after that. (figure 6)P.S:Device does not support 5G Wi-Fi network; if this is not your desired network, tap to toggle. (figure 7)




-4-

3.Please press the "SET" key for 1 second, and then red link indicator flashes, power indicator remains.(figure 8)




4. Click the QR code icon (Figure 9) , switch to the QR code scanning mode, and scan the ID QR code
●QR Code on the camera sticker (Figure 10) ;
●Or choose the QR code picture from the album for ID scanning (Figure 11)

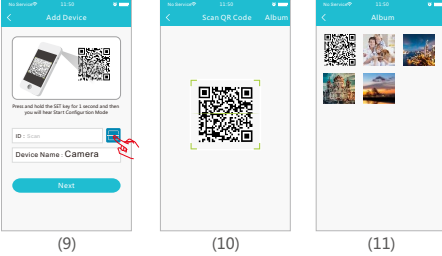

5. When the APP switch to the precaution page before scanning, please read the prompts carefully and click "Next step"(Figure 12) When the mobile phone shows a QR code interface, please align the QR code to the camera, with a distance of about 10 ~ 20cm (Figure 13); if scanning succeeds, red link indicator turns to green.

-5-


6. After scan the QR code, and when you see the link indicator turns to green light, click "I Have Heard It"(Figure 14), and now the camera is connecting to the router WiFi. When you see that the indicator on the device turns from blinking green to be steady on, it indicates that the device is connected and will automatically skip to the device list. (Figure 15)Click the device to enter the real-time monitoring interface. (Figure 16)




-6-

Add by WiFi

1. Click "Add Camera"(Figure 17) → Click "Add by WiFi" (Figure 18) → Configure WiFi, enter WiFi name and password, and click "Confirm" after that.(Figure 19)P.S:Device does not support 5G Wi-Fi network; if this is not your desired network, Click to toggle

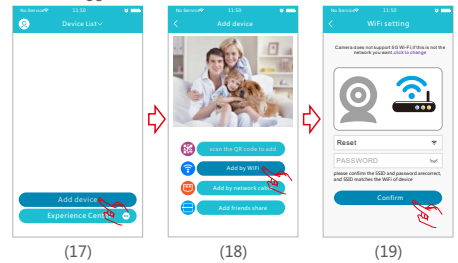


2. Please press and hold the "SET" key for 1 second, and then red link indicator flashes.(Figure 20)



3. Click the QR code icon (Figure 21) , switch to the QR code scanning mode, and scan the ID QR code
●QR code on the camera sticker (Figure 22) ;
●Or choose the QR code picture from the album for ID scanning (Figure 23)

-7-


4. After you click "Confirm", when red link indicator turns to green, indicates that the camera is connecting to the router.(Figure 24) When you see that the indicator on the device turns from blinking green to be steady on, it indicates that the device is connected and will automatically skip to the device list. (Figure 25) Click the device to enter the real-time monitoring interface. (Figure 26)

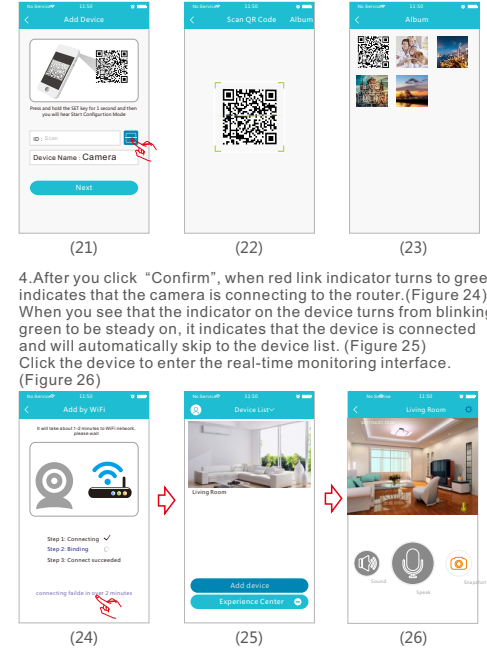

-8-

3 View Monitoring and Operate

After the device is connected, you can view real-time monitoring, and take a picture, record a video, speak, set up and make other operations on your mobile phone

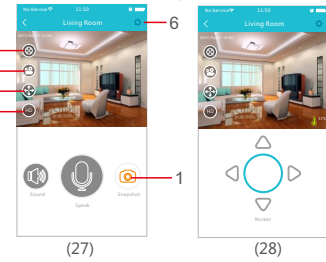


1. Capture button: click to fast capture (save in the settings directory Album Book option).
2. Playback button: Click to enter the playback page, you can view the camera SD card video file.
3. Record button: Click to start recording, click the button again (stored in the set. the directory of the album option).
4. PTZ button: Click this button, APP pop-up PTZ control interface for Head level \ vertical angle to adjust (Figure 28).
5. Sharpness button: Click to adjust the Resolution pixel for real-time video monitoring (HD/SD)
6. Set button: Click this button to set the camera-related functions.

-9-

4 Features

Software Upgrade


1. Click "Settings" icon(Figure 29) → Click "Device Information" (Figure 30) → Click "System Firmware" (Figure 31) → Click "Update Now" (Figure 32)(It can only be upgraded if there is a small red spot on the top right corner of the application firmware)

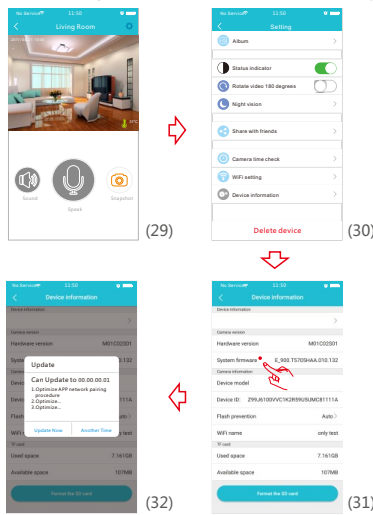

-10-

Device Unbinding


1. Click "Settings" icon(Figure 33) → Click "Delete Device"(Figure 34) APP will automatically switch to camera list, delete the camera you want to Unbundled it from the APP

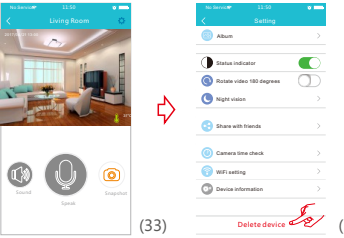

Add Friends to Share

Generate a QR code for sharing(can share this QR Code to multi- users)

1. Click "setting" icon(Figure 35) → Click "share with friends" (Figure 36)→ you can have the QR code(Figure 37)

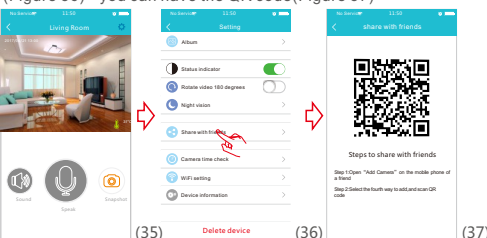

-11-

5 Camera Indicator Instruction

| | |
|--|---|
| Course of powering on start | Red light keeps on after link light waiting for 10s: power indicator light keeps on |
| Configuration mode / connection to router | Link red light flashing, power indicator light keeps on |
| Wifi signal / scan has been found successful | Link red light keeps on, power indicator light keeps on |
| Connect to router | Link green light flashing, power indicator light keeps on |
| Successful connection to network platform | Link green light keeps on, power indicator light keeps on |

-12-


6 Technical parameters

- Imaging sensor: 1/4 inch, CMOS
- Camera resolution: 720P high definition
- View angle: 61°
- Night vision range: <5m
- Waterproof grade: IP66
- Working voltage: DC +12V /1A
- Working temperature: -10℃~+35℃
- Working humidity: 15%~85%RH
- Product dimension (LxWxH): 130x69x56mm(excluding support)
- Product weight:345g (including support)

※ No additional notice will be made in case of any minor change. Our company reserves the right of final interpretation.

-13-

8 Packing list



※Pictures are for reference only, and the real object prevails.

-14-

9 Tips

1. Infrared detection: when thermal radiation source is detected within the scope of camera, the camera will record video and take photos automatically. Videos and photos will be saved in built-in micro-SD card.

2. Share your camera to friends: Share QR code of the device with your friends.

3. Cancel "Share your camera to friends": Delete the camera and cancel Sharing your camera to friends. (You have to re-add the camera to use it again)

4. Push message: when thermal source is detected, alarm message can be sent to server and pushed to your phone

-15-

10 Troubleshooting

1. Wi-Fi cannot be connected
a) Ensure that the antenna of camera is fixed well.
b) Ensure that camera is in range of router. Keep the distance less than 40fts between router and indoor camera, less than 65fts for outdoor camera.

-16-


11 FCC/CE Certification Information

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

-17-

EU Environmental Provisions

E-waste cannot be mixed with household garbage; corresponding local government sector or recycling stations shall be responsible for circular process.



-17-

SIMPLIFIED EU DECLARATION OF CONFORMITY

Hereby, [ShenZhen Gospell Smarthome Electronic Co., Ltd.] declares that the radio equipment type [T5923HAA] is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:(www.goscam.com)

Richie Xiao

Richie Xiao