

## HOW TO USE THE MIC WITH A SPEAKER

To operate this mic, a speaker or amp with 1/4" (Ø6.35mm) standard mic input is required.

1. Turn down the volume on the speaker.



2. Plug the receiver into the 1/4" mic jack of the speaker (Make sure the receiver is "off" when you do this.)



3. Turn on the microphone set and then slightly adjust the output volume on the speaker until you get the best effect. That's done.

7

## NOTE:

There might be some feedback when you are too close to the speaker using the mic. The best distance between the transmitter and the speaker is 10 feet to 50 feet. Pull out the antenna on receiver can extend the range and get better connection with microphone.

## SPECIFICATION

### Receiver

Frequency: 565.000-584.000MHz

Sensitivity: -95db

S/N Ratio: More than 58dB

Frequency Response: 40Hz-15KHz

Power Supply: 2\*AAA Batteries

### Microphone

Type: Dynamic

Model number: K035


Standard impedance: 600Ω±30%

Sensitivity: -50.50±1db (At 1KHz)


Frequency response: 50~16KHz

8

Direction: Uni-direction  
Operating temperature range: -60℃~70℃  
Construction: Suspension type  
Power Supply: 2\*AA Batteries  
Response curve: (shown below)  
Curve

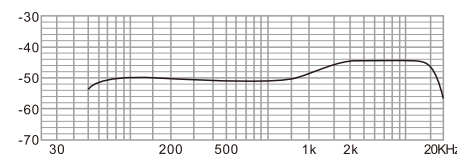

### Test Range

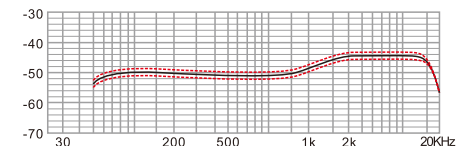

## WIDE COMPATIBILITY

The mic is wide compatible with speakers, mixers, wireless mic systems that is designed to accept microphone inputs (1/4" MIC IN).

9

And we don't recommend to use it with SMART PHONES, LAPTOPS, DESKTOPS, TABLETS, CAMERAS and APPLE PRODUCTS, even with a proper adapter.

## FEATURES

1. UHF(Ultra-High-Frequency) microphone with powerful signal and good connection.
2. Working signal range normally more than 20m, with external antenna.
3. Easy operation, with LCD screen showing the battery level and frequency.
4. Support several microphones work together at the same time with 20 frequency for option.
5. Sensitive and high quality microphone core with noise cancelling and makes your voice clear.

10

6. With Treble, Alto and bass, K035 microphone can show out your real nice voice.
7. Fashionable design, made by metal and feel good surface treatment, k035 suitable for different occasions.

## WHAT'S IN THE BOX?

1 x Receiver 1 x Microphone  
1 x User manual

## Contact Us

Get Social:

Facebook page: <http://bit.ly/FifinePage>

Contact Info:

Email Address: [web@fifine.cc](mailto:web@fifine.cc)

Company Website: [www.fifine.cc](http://www.fifine.cc)

Please take some time to watch operation video before use: <http://bit.ly/fifine035>

11

# FIFINE<sup>®</sup> TECHNOLOGY

## K035-TX USER'S GUIDE



## PRODUCT DISPLAY


### 1. Microphone



- ① LCD Screen
- ② The combined button 2-in-1 On-off Button (Press and hold the button and release it when microphone turned on/off) Channel button (one click for 1MHz increment)
- ③ Frequency
- ④ Power Level (When the battery icon becomes blank, pls replace batteries)
- ⑤ Channel

1


### 3. Receiver

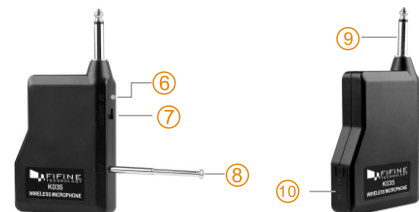

- ⑥ Signal Indicator (The indicator is green when pairing with transmitter. It turns RED when paired successfully)
- ⑦ On-off Button
- ⑧ Antenna (Pull it out to extend the range of signal transmission and get better connection with transmitter.)
- ⑨ Quarter Inch Jack-plug
- ⑩ Battery Compartment

## OPERATION GUIDE

1. AA batteries for microphone battery compartment.




2

AAA batteries for receiver battery compartment



2. Make sure to connect the receiver with devices (mixer, amplifier, speaker etc) with the 6.35 output first, and then turn the receiver on.
3. Keep the microphone away from the receiver with some distance in case howling, and turn it on. When the light turns from green to RED, they are successfully paired. The light stays on RED when it is properly functioning.

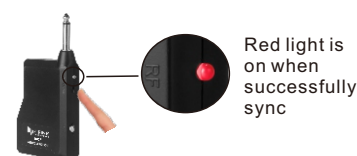


4. The extended antenna will effectively increase the transmission distance.

3



5. LCD screen darkens after a few minutes. You can wake it up by one click of the microphone button (1MHz increment with the click), and the receiver indicator flashes green to red.

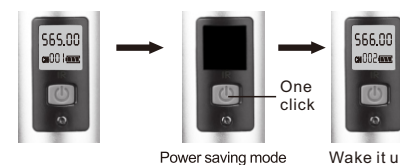

## WHY DO YOU NEED TO CHANGE FREQUENCY?

1. When multiple microphones are used simultaneously or if there is any interference in your location, please try other available channels by the below procedure:  
One click on channel button for 1 MHz increment. The receiver will pair with it again after the microphone changes to a

4

new frequency. When paired, the light on the receiver turns from green to RED. (Note: We suggest to change the frequency at least 2 MHz different from the previous one that receives interference.)

## 2. Wireless Frequency And Channel Guide

565.000	566.000	567.000	568.000
569.000	570.000	571.000	572.000
573.000	574.000	575.000	576.000
577.000	578.000	579.000	580.000
581.000	582.000	583.000	584.000

## HOW TO ENTER RESET MODE?

If the microphone doesn't pair with the receiver successfully (The indicator on the receiver stays on green.), please reset the unit as following:

- A. Turn off both microphone and receiver.
- B. Turn on the microphone and triple click in rapid succession within 30 seconds to enter reset mode. The frequency 564.00MHz flashes on the screen if you do it right.
- C. Turn the receiver on. Pick up the microphone again, one click on its

5

channel button to confirm setting. The frequency on the screen is fixed with its current channel and stops flashing.


- D. The indicator of the receiver turns red when successfully paired.

## WARNING OF LOW BATTERY POWER

1. Please change the microphone battery when the battery symbol flashes.



2. The battery of the receiver needs to be changed when the indicator blinks green.

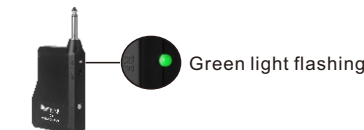

3. To save power, please turn off the microphone and the receiver after use. Take out the batteries if you don't use the mic frequently.

6

## **FCC Warning:**

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

The device complies with RF specifications when the device used at 0mm from your body.