

Honeywell

H138994

CT40 Series

powered by Android™

Quick Start Guide

Not for Production

01:17:16

06/24/2020

Printed On:

CT40-A-EN-QS-01 Rev E
06/20

Honeywell Proprietary & Confidential

PDM Document Status: Prod Check



Out of the Box

Make sure that your shipping box contains these items:

- Mobile Computer
Model CT40-LON, CT40-L1N, CT40P-LON, or CT40P-L1N
- Rechargeable Li-ion battery (see page 7)
- Hand strap
- Product documentation


If you ordered accessories for your mobile computer, verify that they are also included with the order. Be sure to keep the original packaging in case you need to return the mobile computer for service.

Note: CT40-LON/CT40P-LON models do not include a WWAN radio.


Memory Card Specifications

Honeywell recommends the use of Single Level Cell (SLC) industrial grade microSD™ or microSDHC™ memory cards with mobile computers for maximum performance and durability. Contact a Honeywell sales representative for additional information on qualified memory card options.

Mobile Computer Features

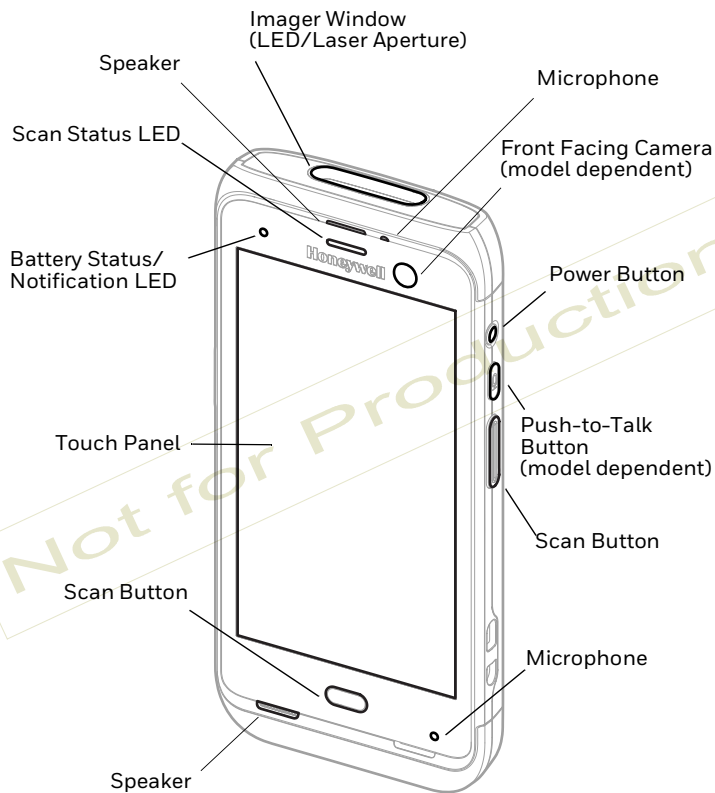

Note: Hand strap not shown.

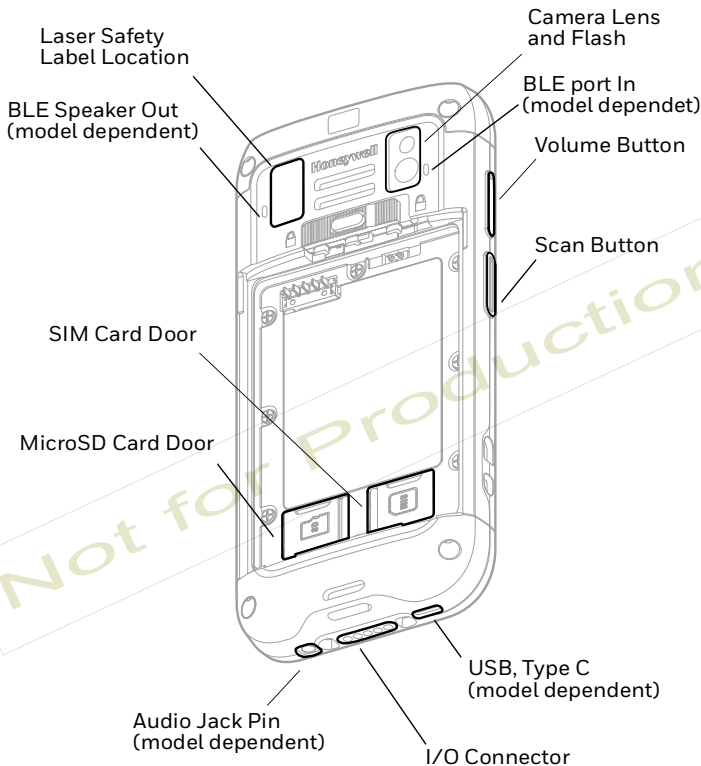


H138994


01:17:16

06/24/2020

Printed On:




Battery Latch (Model CT40-xxx-xxxx0x)








Battery Latch (Models CT40-L0N-xxxxxAx, CT40-xxx-xxxxxBx, CT40-xxx-xxxxxHx, CT40P-L0N-xxxxxAx, CT40P-xxx-xxxxxBx, CT40P-xxx-xxxxxHx)

Battery
(Refer to [page 7](#))

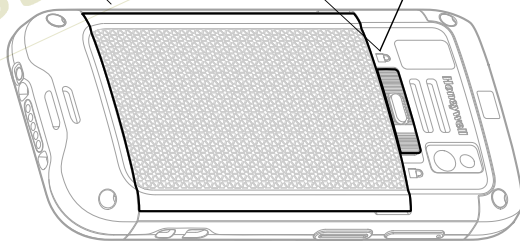

Install a microSD Card (Optional)


Note: Format the microSD card before initial use.



Note: Always power off the computer before attempting to install or remove a card.

Install a microSIM Card

Note: Phone feature is only available on CT40-L1N/CT40P-L1N models. On all models, the SIM slot supports use of a UICC card for NFC Secure Element NFC link encryption.

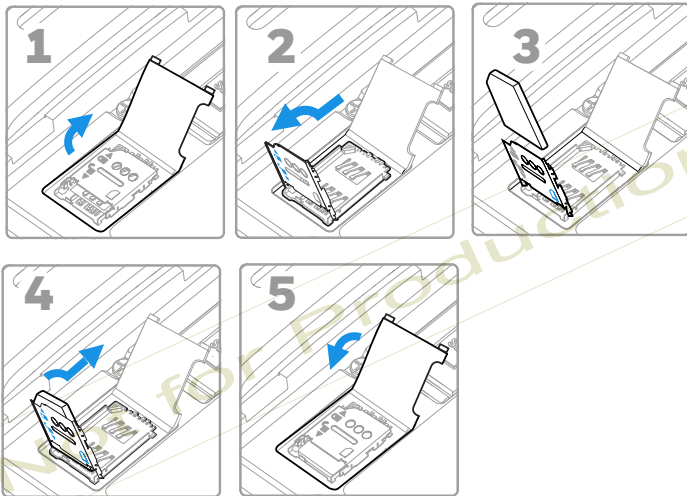

Note: Always power off the computer before attempting to install or remove a card.

About the Battery

The mobile computer ships with a Li-ion battery manufactured for Honeywell International Inc.

Model Configuration	Battery P/N	Power
CT40-xxx-xxxxx0x	318-005-011	3.8 VDC, 15.5 watt-hour
CT40-xxx-xxxxxHx	318-055-017	3.8 VDC, 15.5 watt-hour
CT40-LON-xxxxxAx	318-055-015	3.85 VDC, 15.5 watt-hour
CT40-xxx-xxxxxBx		
CT40P-xxx-xxxxxHx	TBD	3.85 VDC, 15.5 watt-hour
CT40P-LON-xxxxxAx	318-055-067	3.85 VDC, 15.5 watt-hour
CT40P-xxx-xxxxxBx		

Configuration number (CN) is located on the label in the battery well of the mobile computer.



We recommend use of Honeywell Li-ion battery packs. Use of any non-Honeywell battery may result in damage not covered by the warranty.




Nous recommandons l'utilisation de batteries Li-ion de la marque Honeywell. L'utilisation d'une batterie d'un autre fabricant est susceptible de provoquer des dommages non couverts par la garantie.




Ensure all components are dry prior to placing the battery in the computer. Mating wet components may cause damage not covered by the warranty.

Assurez-vous que tous les composants sont secs avant d'insérer la batterie dans l'ordinateur. L'insertion de composants humides risque de provoquer des dommages non couverts par la garantie.





Install Battery (Model CT40-xxx-xxxxxx0x)

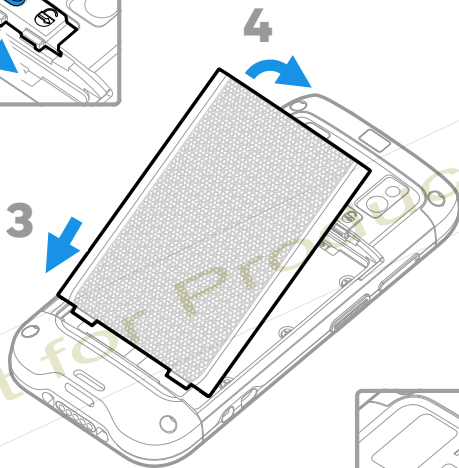

Install Battery (Models CT40-LON-xxxxxAx,
CT40-xxx-xxxxxBx, CT40-xxx-xxxxxHx,
CT40P-LON-xxxxxAx, CT40P-xxx-xxxxxBx,
CT40P-xxx-xxxxxHx)

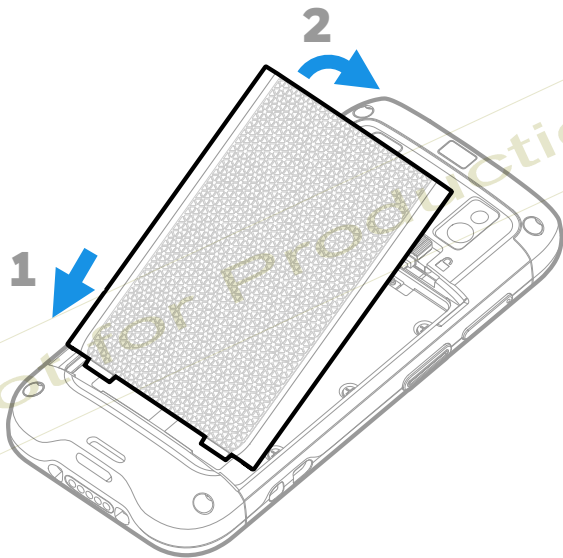

Install the Hand Strap



Charge the Mobile Computer

The mobile computer ships with a partially charged battery. Charge the battery with a CT40 series charging device for a minimum of **4 hours**. Using the computer while charging the battery increases the time required to reach a full charge.



We recommend the use of Honeywell accessories and power adapters. Use of any non-Honeywell accessories or power adapters may cause damage not covered by the warranty.

Nous recommandons d'utiliser des accessoires et des adaptateurs secteur de marque Honeywell. L'utilisation de tout accessoire ou adaptateur secteur d'une autre marque est susceptible de provoquer des dommages non couverts par la garantie.

CT40 series mobile computers are designed for use with the following CT40 charging accessories: HomeBase, Ethernet HomeBase, ChargeBase, NetBase, Quad Battery Charger, Vehicle Power Adapter, Vehicle Dock, and USB Adapter.



Ensure all components are dry prior to mating the computers and batteries with peripheral devices. Mating wet components may cause damage not covered by the warranty.

Assurez-vous que tous les composants sont secs avant de raccorder les ordinateurs et les batteries à des périphériques. L'insertion de composants humides risque de provoquer des dommages non couverts par la garantie.

H138994

01:17:16

06/24/2020

Printed On:

Turn Power On/Off

The first time you power on the computer, a Welcome screen appears. You can either scan a configuration barcode or use the Wizard to manually set up the computer. Once setup is complete, the Welcome screen no longer appears on startup and Provisioning mode is automatically turned off (disabled).

To turn the computer on:

- Press and hold the **Power** button for approximately 3 seconds, and then release.

To turn the computer off:

1. Press and hold the **Power** button until the options menu appears.
2. Touch **Power Off**.

Battery Replacement

Before removing the battery, always do one of the following:

- Power off the computer.
- Place the unit in Swap Battery mode (feature availability is model dependent).

Swap Battery Mode

Swap Battery mode places the computer in a low power state so that the battery can be removed for a short time. This feature is not available on all models.

To activate Swap Battery mode:

1. Press and hold the **Power** button until the options menu appears.
2. Touch **Swap Battery** and follow the on-screen instructions.
3. Once you replace the battery, press the **Power** button.

Sleep Mode

Sleep mode automatically turns the touch panel display off and locks the computer to save battery power when the computer is inactive for a programmed period of time.


1. Press and release the **Power** button to wake the computer.
2. Drag the  toward the top of the display to unlock the computer.

Adjust the Display Sleep Time

To adjust the amount of time before the display sleeps after inactivity:

1. Swipe up on the touch screen.
2. Select **Settings > Display > Advanced > Sleep**.
3. Select the amount of time before the display goes to sleep.
4. Touch  to return to the Home screen.

About the Home Screen

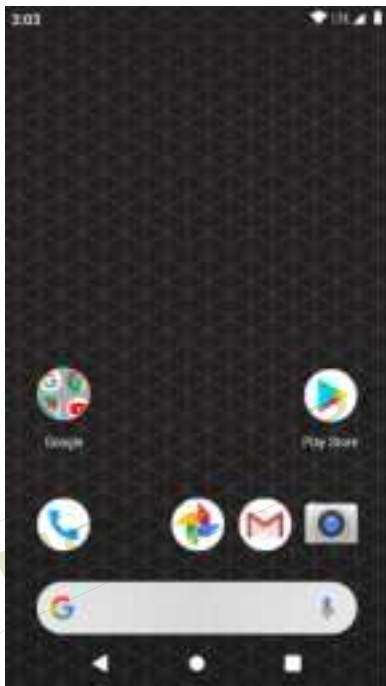

Notification /
Status Bar

Home Screen Panel

Favorites Tray

Search Bar

Navigation Buttons

To learn how to customize the Home screen, see the user guide.

H138994

01:17:16

06/24/2020

Printed On:

Navigation and Function Buttons

Button	Description	
	Back	Return to the previous screen.
	Home	Return to the Home screen.
	Recent Apps	View and switch between recently used apps.
	Scan	Touch the front (on-screen) Scan button to trigger the scanner.
	Volume	Press the top of the button to raise the speaker volume. Press the bottom of button to lower the speaker volume.
	Scan	Press left or right Scan button to trigger the scanner.
	Power	See page 13.
	Push-to-Talk	Push-to-Talk button is model dependent.

For button locations, see [Mobile Computer Features](#) on page 2.
To learn more about how to re-map a button, see the user guide.


About Provisioning Mode

After completing the out-of-box set up process, Provisioning mode is automatically turned off. Scanning a barcode to install applications, certificates, configuration files, and licenses on the computer is restricted unless you enable Provisioning mode in the Settings app. To learn more, see the user guide.

Scan a Barcode with the Scan Demo

For optimum performance, avoid reflections by scanning the barcode at a slight angle.

1. Swipe up on the screen.
2. Select **Demos > Scan Demo**.
3. Point the computer at the barcode.
4. Touch **Scan** on the screen or press and hold any Scan button. Center the aiming beam over the barcode.



The decode results appear on the screen.

Note: In the Scan Demo app, not all barcode symbologies are enabled by default. If a barcode does not scan, the correct symbology may not be enabled. To learn how to modify the default app settings, see the user guide.

Sync Data

To move files between your CT40 and a computer:

1. Connect the CT40 to your computer using a USB charge/communication accessory.
2. On the CT40, swipe down from the top of the screen to see the notifications panel.
3. Touch the Android System notification twice, to open the options menu.
4. Select either **File Transfer** or **PTP**.
5. Open the file browser on your computer.
6. Browse to the CT40. You can now copy, delete, and move files or folders between your computer and CT40 as you would with any other storage drive (e.g., cut and paste or drag and drop).

Note: *When Provisioning mode is turned off, some folders are hidden from view in the file browser.*

Restart the Mobile Computer

You may need to restart the mobile computer to correct conditions where an application stops responding to the system or the computer seems to be locked up.

1. Press and hold the **Power** button until the options menu appears.
2. Select **Restart**.

To restart the computer if the touch panel display is unresponsive:

- Press and hold the **Power** button for approximately 8 seconds until the computer restarts.

Note: To learn about advanced reset options, see the user guide.

Support

To search our knowledge base for a solution or log into the Technical Support Portal and report a problem, go to www.hsmcontactsupport.com.

Documentation

Product documentation is available at www.honeywellaidc.com.

Limited Warranty

For warranty information, go to www.honeywellaidc.com and click **Resources > Product Warranty**.

Patents

For patent information, see www.hsmpats.com.

Trademarks

Android is a trademark of Google LLC.

Disclaimer

Honeywell International Inc. ("HII") reserves the right to make changes in specifications and other information contained in this document without prior notice, and the reader should in all cases consult HII to determine whether any such changes have been made. The information in this publication does not represent a commitment on the part of HII.

HII shall not be liable for technical or editorial errors or omissions contained herein; nor for incidental or consequential damages resulting from the furnishing, performance, or use of this material. HII disclaims all responsibility for the selection and use of software and/or hardware to achieve intended results.

This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this document may be photocopied, reproduced, or translated into another language without the prior written consent of HII.

Copyright © 2018–2020 Honeywell International Inc. All rights reserved.

CT40XP-ML-RS-01



CT40 XP Mobile Computer

Agency Models: CT40P-L0N, CT40P-L1N

Publicly downloadable certificates are available at www.honeywellaidc.com/compliance .	Les certificats téléchargeables accessibles au public sont disponibles à www.honeywellaidc.com/compliance .	Les certificats téléchargeables accessibles sont disponibles sur www.honeywellaidc.com/compliance .	I certificati pubblicamente scaricabili sono disponibili sul sito Web www.honeywellaidc.com/compliance .	Zertifikate stehen unter www.honeywellaidc.com/compliance öffentlich zum Download zur Verfügung.	Hay certificados descargables disponibles públicamente en www.honeywellaidc.com/compliance .	Puede descargar los certificados de acceso público en www.honeywellaidc.com/compliance .
Certificados disponíveis ao público para download em: www.honeywellaidc.com/compliance .	如需公开下载的书，请访问 www.honeywellaidc.com/compliance 。	如需可公開下載的證書，請造訪 www.honeywellaidc.com/compliance 。	一般にダウンロード可能な証明書は、 www.honeywellaidc.com/compliance で利用可能です。	공격적으로 다운로드 가능한 인증서는 www.honeywellaidc.com/compliance 에서 구할 수 있습니다.	Публичные сертификаты доступны на странице www.honeywellaidc.com/compliance .	الشهادات القابلة للتحميل متاحة للعمامة على الموقع www.honeywellaidc.com/compliance
Product documentation is available at www.honeywellaidc.com .	La documentation sur le produit est disponible à www.honeywellaidc.com .	La documentation du produit est disponible sur le site www.honeywellaidc.com .	La documentazione sul prodotto è disponibile sul sito www.honeywellaidc.com .	Die Produktdokumentation ist unter www.honeywellaidc.com verfügbar.	La documentación del producto está disponible en www.honeywellaidc.com .	La documentación del producto está disponible en www.honeywellaidc.com .
A documentação do produto está disponivel em www.honeywellaidc.com .	产品文档请参见 www.honeywellaidc.com 。	產品文件集請參見 www.honeywellaidc.com 。	製品ドキュメントは www.honeywellaidc.com で利用可能です。	제품 설명서는 www.honeywellaidc.com 에서 확인할 수 있습니다.	Документацию по изделию можно найти на сайте www.honeywellaidc.com .	توفر وثائق المنتج على الموقع التالي www.honeywellaidc.com .
 Caution: Any changes or modifications made to this equipment not expressly approved by Honeywell International Inc. may void the authorization to operate this equipment.	 MISE EN GARDE: Tout changement ou modification apportée à cet équipement qui n'est pas expressément approuvée(e) par Honeywell International Inc. peut annuler l'autorisation d'utiliser cet équipement.	 Mise en garde : tous les changements ou les modifications apportés à cet équipement non expressément approuvés par Honeywell International Inc. peuvent annuler l'autorisation d'utiliser cet équipement.	 Attenzione: qualsiasi variazione o modifica apportata a questa apparecchiatura, non espressamente approvata da Honeywell International Inc., potrebbe annullare l'autorizzazione concessa all'utente per utilizzare l'apparecchiatura.	 Vorsicht: Von Honeywell International Inc. nicht ausdrücklich genehmigte Veränderungen an diesem Gerät können dazu führen, dass die Betriebsgenehmigung für dieses Gerät erlischt.	 Precaución: Cualquier modificación o cambio realizado en este equipo, no expresamente aprobado por Honeywell International Inc., puede anular la autorización para utilizar este equipo.	 Precaución: cualquier cambio o modificación a este equipo que no esté expresamente aprobado por Honeywell International Inc. puede invalidar la autorización para usarlo.
 Atenção: qualquer alteração ou modificação não aprovada expressamente pela Honeywell International Inc. neste equipamento poderá invalidar a autorização de operá-lo.	 注意：对本设备进行任何未经 Honeywell International Inc. 明确准许的更改或修改，可能会使操作本设备的授权失效。	 注意：凡未經 Honeywell International Inc. 明確准許即擅自變更或改造本設備者，可能無權再操作本設備。	 警告：Honeywell International Inc. の明示的な承認なしに、この機器を変更または改造すると、この機器を操作する権限が無効になる場合があります。	 주의：Honeywell International Inc. 에 의해 확실한 승인을 받지 않은 방법으로 본 장비를 변경 또는 개조하는 경우 장비를 작동할 수 있는 승인이 취소될 수 있습니다.	 Внимание! Любые изменения или модификации данного оборудования без одобрения компании Honeywell International Inc. могут привести к запрету эксплуатации данного оборудования.	 تحذير: قد تؤدي أي تغييرات أو تعديلات على هذا الجهاز غير مصرح بها من Honeywell International Inc. شركة إلى إلغاء ترخيص تشغيل هذا الجهاز.

For body worn operation, this device has been tested and meets the limits regarding human exposure to electromagnetic radiation set forth in related FCC, IC and CE rules, guidelines and standards for use with the following body worn accessory: holster. Use of other accessories may not ensure compliance with the mentioned rules.

Fonctionnement près du corps: ce dispositif a été testé et s'avère conforme aux règles et lignes directrices des normes FCC, IC et CE, relatives aux limites d'une exposition humaine sécuritaire au rayonnement électromagnétique pour une utilisation près du corps de l'accessoire suivant: holster. L'utilisation d'autres accessoires peut ne pas assurer la conformité avec les règles mentionnées.

 802.11 Caution: A Wireless Network Administrator should review the operating restrictions and use with a properly configured access point.

**Models: CT40P-L0N, CT40P-L1N**
FCC Part 15 Subpart B Class B

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio or television technician for help.

If necessary, the user should consult the dealer or an experienced radio/television technician for additional suggestions. Honeywell International Inc. is not responsible for any radio or television interference caused by unauthorized modifications of this equipment or the substitution or attachment of connecting cables and equipment other than those specified by Honeywell International Inc. The correction is the responsibility of the user.

Use only shielded data cables with this system.	Utiliser uniquement des câbles de données blindés avec ce système.	Utilisez uniquement des câbles de données blindés avec ce système.	Utilizzare solo cavi dati schermati con questo sistema.	Für dieses System nur abgeschirmte Datenkabel verwenden.	Utilice sólo cables de datos blindados con este sistema.	Use únicamente cables protegidos para datos con este sistema.
Use somente cabos de dados blindados com este sistema.	此系统仅能使用屏蔽数据电缆。	此系統只能使用包裹的資料傳輸線。	このシステムにはシールド付きデータケーブルのみを使用してください。	이 시스템에는 차폐된 데이터 케이블만 사용하십시오.	Используйте с этой системой только экранированные кабели передачи данных.	استخدم فقط كابلات البيانات المصحح مع هذا النظام.

Models: CT40P-L0N, CT40P-L1N Canadian Compliance This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: 1. This device may not cause harmful interference. 2. This device must accept any interference received, including interference that may cause undesired operation. CAN ICES-3 (B) / NMB-3 (B)	Models: CT40P-L0N, CT40P-L1N Conformité à la réglementation canadienne Cet appareil est conforme aux normes RSS avec exemption de licence d'Industrie Canada. Son fonctionnement est assujéti aux conditions suivantes: 1. Cet appareil ne doit pas causer de brouillage préjudiciable. 2. Cet appareil doit pouvoir accepter tout brouillage reçu, y compris le brouillage pouvant causer un fonctionnement indésirable. CAN ICES-3 (B) / NMB-3 (B)
--	---

Models: CT40P-L0N, CT40P-L1N 802.11a Radio Precaution Statements (North America) 802.11a wireless LAN 5150 to 5250 MHz (5.15 to 5.25 GHz) (5 GHz radio channels 36 - 48) is restricted to indoor operations to reduce harmful interference to co-channel Mobile Satellite System (MSS) operations. • The maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall comply with the EIRP limit. • The maximum antenna gain permitted for devices in the band 5725-5850 MHz shall comply with the EIRP limits specified for point-to-point and non-point-to-point operation as appropriate. • Be advised that high-power radars are allocated as primary users (i.e., priority users) of the bands 5250-5350 MHz and 5650-5850 MHz and that these radars could cause interference and/or damage to LE-LAN devices.	Models: CT40P-L0N, CT40P-L1N 802.11a Énoncé de mise en garde radio (Amérique du Nord) Mise en garde : 802.11a sans fil LAN 5150 à 5250 MHz (5,15 à 5,25 GHz) (fréquences radio 36 à 48 de 5 GHz) est limité aux opérations en intérieur pour réduire les interférences nuisibles aux opérations du système mobile par satellite (MSS) dans le même canal. • Mise en garde : Le gain en puissance d'antenne maximal autorisé pour les périphériques dans les bandes 5250 à 5350 MHz et 5470 à 5725 MHz doit respecter la limite EIRP • Mise en garde : Le gain en puissance d'antenne maximal autorisé pour les périphériques dans les bandes 5725 à 5850 MHz doit respecter les limites EIRP spécifiées pour les opérations point à point et non point à point le cas échéant. • Mise en garde : Sachez que les radars de haute puissance sont désignés comme utilisateurs principaux (c.-à-d. utilisateurs prioritaires) des bandes 5250 à 5350 MHz et 5650 à 5850 MHz, et que ces radars peuvent causer des interférences ou endommager les périphériques LE-LAN.
--	---

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter, except tested built-in radios.	Cet appareil et son antenne ne doivent pas être situés ou fonctionner en conjonction avec une autre antenne ou un autre émetteur, exception faites des radios intégrées qui ont été testées.
The County Code Selection feature is disabled for products marketed in the US/Canada.	La fonction de sélection de l'indicatif du pays est désactivée pour les produits commercialisés aux États-Unis et au Canada.

Models: CT40P-L0N, CT40P-L1N Para su uso en México, la operación de este equipo está sujeta a las siguientes dos condiciones: 1. es posible que este equipo o dispositivo no cause interferencia perjudicial y 2. este equipo o dispositivo debe aceptar cualquier interferencia, incluyendo la que pueda causar su operación no deseada.	
---	--

 Honeywell International Inc. hereby declares that the radio equipment types, non-specific SRD (Models: CT40P-L0N, CT40P-L1N) and cellular (Model: CT40P-L1N), are in compliance with the following directives: • 2014/53/EU Radio Equipment • 2011/65/EU RoHS (Recast) The full text of the EU declaration of conformity is available at the following internet address: www.honeywellaidc.com/compliance. European contact: Honeywell Productivity Solutions BV Lagelandseweg 70 6545CG Nijmegen The Netherlands	 Honeywell International Inc. déclare par la présente que les types d'équipement radio, SRD non spécifiques (modèles : CT40P-L0N, CT40P-L1N) et cellulaires (modèle : CT40P-L1N) sont conformes aux directives suivantes : • Equipement radio 2014/53/UE • 2011/65/UE – RoHS (Refonte) Le texte intégral de la déclaration de conformité de l'UE est disponible à l'adresse Internet suivante : www.honeywellaidc.com/compliance. Personne-ressource en Europe : Honeywell Productivity Solutions BV Lagelandseweg 70 6545CG Nijmegen Les Pays-Bas	 Honeywell International Inc. dichiara che i tipi di apparecchiature radioeletttriche di faible portée non spécifiques (Modèles : CT40P-L0N, CT40P-L1N) et portables (Modèle : CT40P-L1N) sont conformes aux directives suivantes : • 2014/53/UE Équipement radio • RoHS 2011/65/UE (rifiutone) Il testo completo della Dichiarazione di conformità UE è disponibile al seguente indirizzo Internet: www.honeywellaidc.com/compliance. Contact in Europe : Honeywell Productivity Solutions BV Lagelandseweg 70 6545CG Nijmegen Paesi Bassi	 Honeywell International Inc. dichiara che i tipi di apparecchiature radio, SRD (dispositivi a corto raggio) non specifici (Modelli: CT40P-L0N, CT40P-L1N) e cellulari (Modello: CT40P-L1N), sono conformi alle seguenti direttive: • 2014/53/UE - Apparecchiature radio • RoHS 2011/65/UE (rifiutone) Il testo completo della Dichiarazione di conformità UE è disponibile al seguente indirizzo Internet: www.honeywellaidc.com/compliance. Contatto in Europa: Honeywell Productivity Solutions BV Lagelandseweg 70 6545CG Nijmegen Paesi Bassi	 Honeywell International Inc. erklärt hiermit, dass das nicht näher spezifizierte SRD (Modelle: CT40P-L0N, CT40P-L1N) bzw. Mobilfunkgerät (Modell: CT40P-L1N) folgende Richtlinien erfüllt: • Richtlinie 2014/53/EU (Funkanlagen) • 2011/65/EU RoHS (Recast) Die vollständige UE-Konformitätserklärung finden Sie im Internet unter: www.honeywellaidc.com/compliance. Ansprechpartner Europa: Honeywell Productivity Solutions BV Lagelandseweg 70 6545CG Nijmegen Niederlande	 Honeywell International Inc. declara que los tipos de equipo de radio, dispositivos de corto alcance (SRD) no específicos (modelos: CT40P-L0N, CT40P-L1N) y móviles (modelo: CT40P-L1N), cumplen con las directivas siguientes: • 2014/53/UE sobre equipos de radio • 2011/65/UE RoHS (Refundida) El texto completo de la declaración de conformidad de la UE está disponible en la siguiente dirección de internet: www.honeywellaidc.com/compliance. Contacto europeo: Honeywell Productivity Solutions BV Lagelandseweg 70 6545CG Nijmegen Países Bajos	 Honeywell International Inc. يعلن شركة International أن أنواع المعدات اللاسلكية والأجهزة النقطية المدى ближнего действия (модели (CT40P-L1N, CT40P-L0N) и селулярные (модель: CT40P-L1N), estão em conformidade com as seguintes diretivas: • Equipamento de rádio 2014/53/UE • 2011/65/UE RoHS (Reformulação) O texto completo da declaração de conformidade da União Europeia está disponivel em www.honeywellaidc.com/compliance. Contato na Europa: Honeywell Productivity Solutions BV Lagelandseweg 70 6545CG Nijmegen Holanda	 Honeywell International Inc. declara que los tipos de equipo de radio, SRD no específicos (modelos: CT40P-L0N, CT40P-L1N) y celulares (modelo: CT40P-L1N), son conforme a las siguientes directivas: • Normativa 2014/53/UE sobre equipos radioeléctricos • 2011/65/UE RoHS (Reformulada) El texto completo de la declaración de conformidad UE está disponible en la siguiente dirección de internet: www.honeywellaidc.com/compliance. Contacto europeo: Honeywell Productivity Solutions BV Lagelandseweg 70 6545CG Nijmegen Países Bajos
---	--	---	--	---	---	---	---

The equipment is intended for use throughout the European Community.

Operating Frequency Ranges

Model: CT40P-L0N

•13-14 MHz (NFC): -20.53 dB μ A/m @10m EIRP

•2400-2483.5 MHz (PAN Bluetooth): 6.85 dBm EIRP

•2400-2483.5 MHz (Bluetooth Low Energy): 2.12 dBm EIRP

•2400-2483.5 MHz (WLAN IEEE 802.11b/g/n): 18.83 dBm EIRP

•5150-5350 MHz, 5470-5725 MHz and 5725-5850 MHz (WLAN/RLAN IEEE 802.11a/n/ac): 17.68 dBm and 13.92 dBm (5G B4) EIRP

802.11a/b/g/n/ac, Bluetooth and NFC

European Community Restrictions: 5150-5350 MHz is for indoor use only.

	AT	BE	BG	HR	CY	CZ	DK	EE	FI	FR	DE	GR	HU	IS	IE	IT
	LV	LI	LT	LU	MT	NL	NO	PL	PT	RO	SK	SI	ES	SE	CH	GB
											RU		RS	TR		

Restrictions (Revision ERC/REC 70-03 E 2017-02, Annex 13 Band E1: 5150-5350 MHz, Band E2: 5470-5725 MHz):	
AZ	No license needed if used indoor and power not exceeding 30 mW

Restrictions (Revision ERC/REC 70-03 E 2017-02, Annex 9 Band J2: 13553-13567 kHz):	
AZ	Not implemented or no information.
BY	Not implemented.
GE	Not implemented.
RU	Maximum magnetic field strength is +42 dB μ A/m at 10 m.
UA	The maximal strength of magnetic field on the distance of 10 m from a construction where the radiator is placed is 42 dB μ A/m.

Restrictions (Revision ERC/REC 70-03 E 2017-02, Annex 3 Band A: 2400-2483.5 MHz):	
AZ	No license needed if used indoor and power not exceeding 30 mW.
IT	The public use is subject to general authorization by the respective service provider.
RU	SRD with FHSS modulation • Maximum 2.5 mW EIRP. • Maximum 100 mW EIRP. Permitted for use SRD for outdoor applications without restriction on installation height only for purposes of gathering telemetry information for automated monitoring and resources accounting systems. Permitted to use SRD for other purposes for outdoor applications only when the installation height is not exceeding 10 m above the ground surface. • Maximum 100 mW EIRP. Indoor applications SRD with DSSS and other than FHSS wideband modulation • Maximum mean EIRP density is 2 mW/MHz. Maximum 100 mW EIRP. • Maximum mean EIRP density is 20 mW/MHz. Maximum 100 mW EIRP. It is permitted to use SRD for outdoor applications only for purposes of gathering telemetry information for automated monitoring and resources accounting systems or security systems. • Maximum mean EIRP density is 10 mW/MHz. Maximum 100 mW EIRP. Indoor applications
UA	EIRP =100 mW with built-in antenna with amplification factor up to 6 dBi

