

SQDLK




T200PLUS

Outdoor Wireless Speaker User Manual


Accessories




Ordinary Version



Luxury Version(Equipped with
wireless Microphone)




Type-C Charging
cable



3.5mm Audio
Cable


Illustration

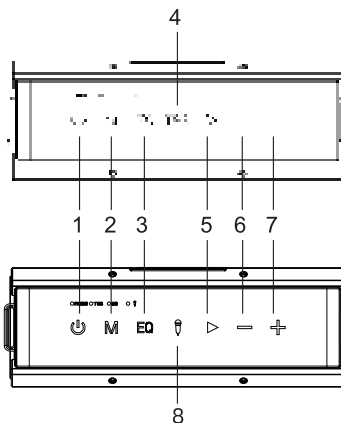

- 1.On/off
- 2.Mode Switching
- 3.RGB/EQ Button
- 4.TWS Mode
- 5.Play/Pause/Calls Answering
- 6.Volume down/Previous Track
- 7.Volume up/Next track
- 8.Microphone connection

Parameters

BT Version:5.0
DSP technology: Deep bass strengthen
Rated output power:100W
Maximum output power : 120W
Input:DC 5V/2.1A
Charging time:≥6hours
TWS working distance : ≤6m
BT working distance : ≤18m
AUX Mode : 3.5mm audio port
TF card Mode : Maximum 128GB
USB Mode : Maximum 128GB
Driver unit size:78mm*2+52mm*2
Battery capacity:16800mah
(automobile dynamics)
Product size:292*112*101mm
Product weigh:2685g
Charging: Type-c 5V/3A
Impedance:4 ± 15%



Operation

Button	function	operation	LED indicator
1 POWER	Turn on	Long press the "POWER" button for 3s, speaker will turn on and go into pairing mode automatically.	BT indicator flashing waiting for BT indicator steps in solid blue connection completed
	Turn on/off RGB light	When speaker is on, short press the "POWER" button one time to turn on/off the RGB light	RGB light on/off
	Turn off	Long press "POWER" button for 2s	Indicator light goes off
	Forward shadow	When the speaker enabled, long press the "POWER" button for 4s to forward shadow	Indicator light goes off
2 M	BT indicator off	Short press "MODE" button to switch BT /TF/USB/AUX Mode	
	BT connection	In BT paired mode, long press the button for 3s to disconnect the BT	
	Rear speaker	Long press the button for 5s to reset the speaker	
3 EQ	EQ MODES	Short press the button for switching EQ from deep bass to vocal sound and short press again change into surround sound. Long press the button for 2s to control the LED light	Indicator off/Deep bass mode: Indicator is green "vocal" mode: Indicator in blue/ID mode
	TWS connection	Short press "TWS" button to enter TWS pairing Under TWS connection, short press "TWS" button again to exit TWS MODE TWS Connection: 1.Turn on the two speaker and make sure they are not connected with any device 2.Short press the "TWS" button of one speaker, you will hear a voice prompt and the indicator will go flashing yellow to enter TWS pairing. 3.When the two speaker connect with each other successfully the indicator of the primary speaker will go flashing and the subsidiary speaker's indicator will go off. The primary speaker is waiting for BT connection. 4.Short press "TWS" button again to disconnect the speaker and exit TWS Mode	Indicator in flashing yellow: TWS waiting for connection Indicator in solid yellow: TWS connection completed Primary indicator flashing waiting for BT connection and the subsidiary speaker's indicator is off
4 MIC	Karaoke mode	Long press TWS button for 2s to enter Karaoke mode. Turn on the wireless microphone, the mic will automatically connect to the speaker	Indicator of the Mic is on
	Pause/play	Short press play/pause button Under AUX mode, short press "play/pause" button to mute the speaker	Under BT mode indicator steps on When playing, indicator flashes slowly When speaker's muted indicator steps in solid blue
5 PLAY/PAUSE	Answer a call	Short press play/pause button to answer a call, when a call is coming	
	End a call	Short press play/pause button to end a call, when hearing a call	
	Decline a call	Long press play/pause button for 2s to decline a call, when a call is coming	

PLAY/PAUSE	Radio a call	Disable press play/pause button to radial	
6 -	Volume down	Long press play/pause button for 2s to Activate vocal sound Short press "-" button to decrease the volume for 1 scale (total 16 scales)	
	Previous track	When playing music, long press "-" button for 1.5s to skip to previous track	
7 +	Volume up	Short press "+" button to increase the volume for 1 scale (total 16 scales)	
	Next track	When playing music, long press "+" button for 1.5s to skip to next track	
8 EQ+	Mic Volume up	Keep Pressing the EQ button and press "+" button to increase Microphone's volume	
	Mic Volume down	Keep Pressing the EQ button and press "-" button to decrease Microphone's volume	
10	charging	5V/3A intelligent charging	Charging indicator is red Charging completed indicator off
11	Intelligent power saving	Speaker will go off if no BT connection in 10 minutes	
12	Low battery warning	When speaker is low battery, the speaker will automatically go off	Indicator in flashing red
13	AUX MODE	Insert 3.5mm audio cable, the music will automatically read and play	Indicator flashes slowly when playing Indicator in solid blue when playing
14	USB MODE	Insert U disk, the music will automatically read and play	Indicator flashes slowly when playing Indicator in solid blue when playing
15	TF MODE	Insert TF card, the music will automatically read and play	Indicator flashes slowly when playing Indicator in solid blue when playing
16	USB power bank	To charge your devices when needed	

FCC Statement

- This device complies with Part 15 of the FCC rules.
- Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.
- This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the installation, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try correct the interference by one or more of the following measures:

- Reorient the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

- Changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

- The distance between user and products should be no less than 20cm.

- The EUT is Indoor use only

PRODUCT INSPECTION CERTIFICATE

Quality inspection:
Inspector: **TPD** Quantity: _____
Code: **2021.04.03** Date in manufacture: _____
Executive Stander: **FCC 008**

Warranty Card (please keep this card for warranty services)

User profiles Date _____

Name:	
Address	
Contact number:	
Product name and Specification	
Signature of the agency:	

- Warranty clause
- If the product is not specially marked, users can choose to return the product due to its own quality problems (not product software faults) from the date of purchase. The return period is 7 days; the replacement period is 15 days; and the warranty period is 12 months.
 - If the product is not specially marked, users can choose to return the product due to its own quality problems (not product software faults) from the date of purchase. The return period is 7 days; the replacement period is 15 days; and the warranty period is 12 months.
 - When the user requests the warranty service, he/she shall actively provide the valid warranty service certificate or invoice; Additional services beyond the warranty shall be charged in accordance with relevant regulations, and the warranty period of the products shall be 3 months from the date of picking up or delivery.
 - The warranty services provided by our company is limited to products with quality problems, and does not include compensation for buyers' loss of interests, loss caused by accidents and any other indirect or direct loss;
 - The user should take the initiative to buy in the seller place according to the requirements to fill in necessary information in the warranty card.



Manufacturer: Shenzhen Hutianmei Technology CO., LTD
Website: WWW.hutntech.com
Service Hotline: 13798197588
Address: 32 Building, the third Industrial Park, Houting, Shajing, Baoan District, Shenzhen, China
Executive Stander: GBT 7313-1987; GB17625.1-2012; GB8898-2011