


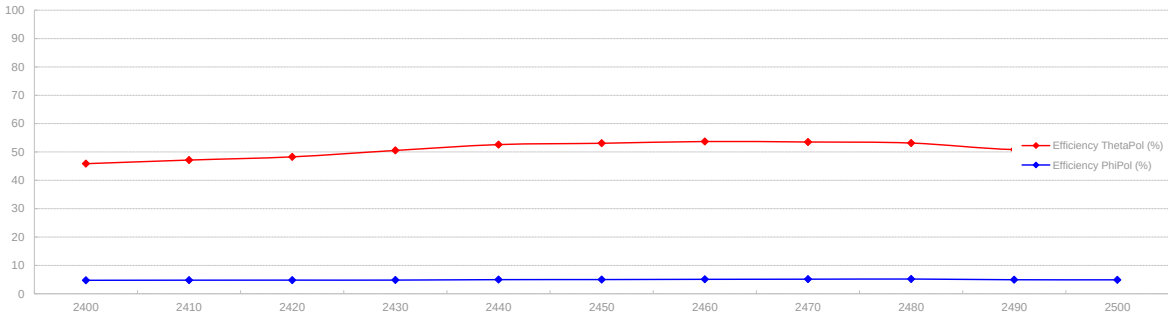
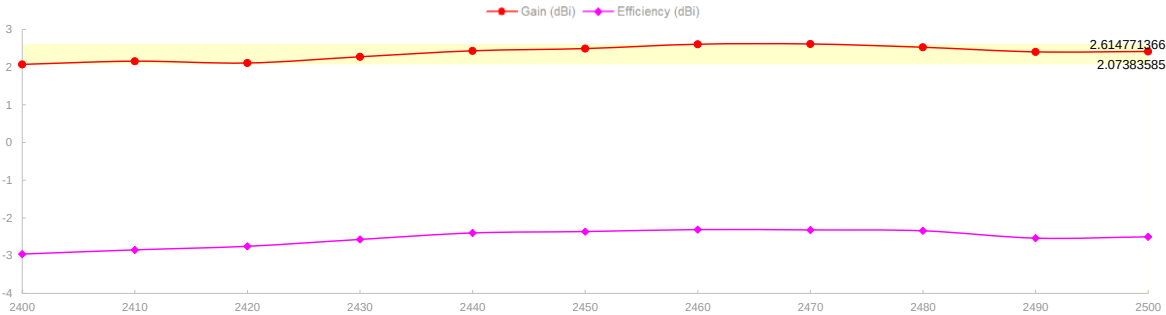
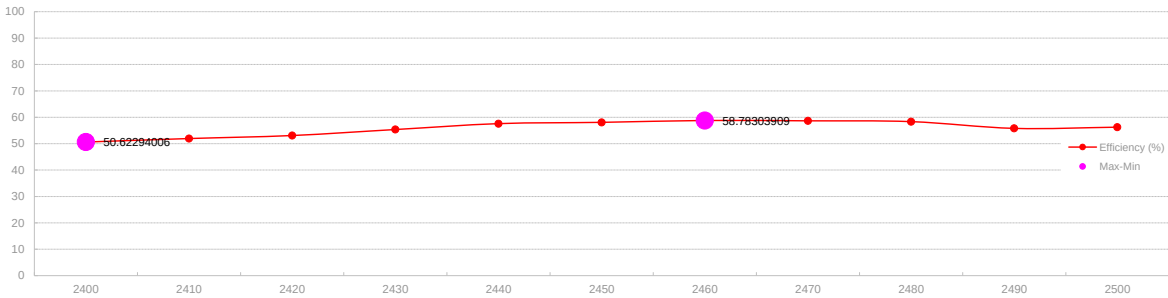


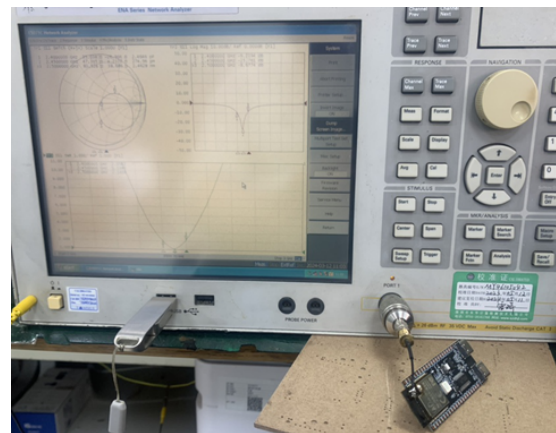



博安通科技

Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Efficiency (dBi)	-2.96	-2.84	-2.75	-2.57	-2.40	-2.36	-2.31	-2.32	-2.34	-2.53	-2.50
Gain (dBi)	2.07	2.16	2.11	2.28	2.43	2.49	2.61	2.61	2.53	2.41	2.42
Efficiency (%)	50.62	51.94	53.09	55.36	57.59	58.08	58.78	58.66	58.35	55.79	56.25
Directivity (dB)	5.03	5.00	4.86	4.84	4.83	4.85	4.92	4.93	4.87	4.94	4.91
Peak Gain Position (Theta)	105.00	105.00	105.00	105.00	105.00	105.00	105.00	105.00	120.00	120.00	120.00
Peak Gain Position (Phi)	135.00	135.00	135.00	255.00	255.00	165.00	135.00	120.00	225.00	225.00	225.00
Efficiency ThetaPol (%)	45.88	47.15	48.28	50.54	52.60	53.07	53.69	53.52	53.16	50.85	51.34
Efficiency PhiPol (%)	4.75	4.79	4.81	4.82	4.98	5.01	5.09	5.13	5.19	4.94	4.91
Upper Hem. Efficiency (%)	12.81	13.02	12.96	13.05	13.21	13.01	13.01	12.90	12.75	12.06	12.04
Lower Hem. Efficiency (%)	37.81	38.92	40.13	42.31	44.38	45.06	45.77	45.76	45.60	43.74	44.21
T90(H)圓度	7.52	7.60	7.77	7.77	7.74	7.54	7.57	7.80	7.91	7.98	7.71
Gain 15deg (dBi)											
E1(XZ)波瓣宽度	54.00	54.00	53.00	51.00	51.00	51.00	52.00	53.00	52.00	53.00	52.00
E1(XZ)前后比	1.85	1.76	1.92	2.02	2.15	2.32	2.39	2.52	2.61	2.55	2.64
E2(YZ)波瓣宽度	32.00	31.00	29.00	29.00	28.00	28.00	44.00	44.00	46.00	46.00	46.00
E2(YZ)前后比	4.20	4.12	4.32	4.45	4.51	4.56	4.79	4.90	5.04	5.07	5.09
最大增益处轴比(P)	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
仰角10度最差(大)轴比(P)	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
Hc(XY)波瓣宽度	254.00	253.00	249.00	247.00	246.00	246.00	246.00	247.00	242.00	237.00	237.00
Hc(XY)前后比	0.62	0.57	0.56	0.52	0.60	0.45	0.38	0.26	0.15	0.16	0.06
Empty											

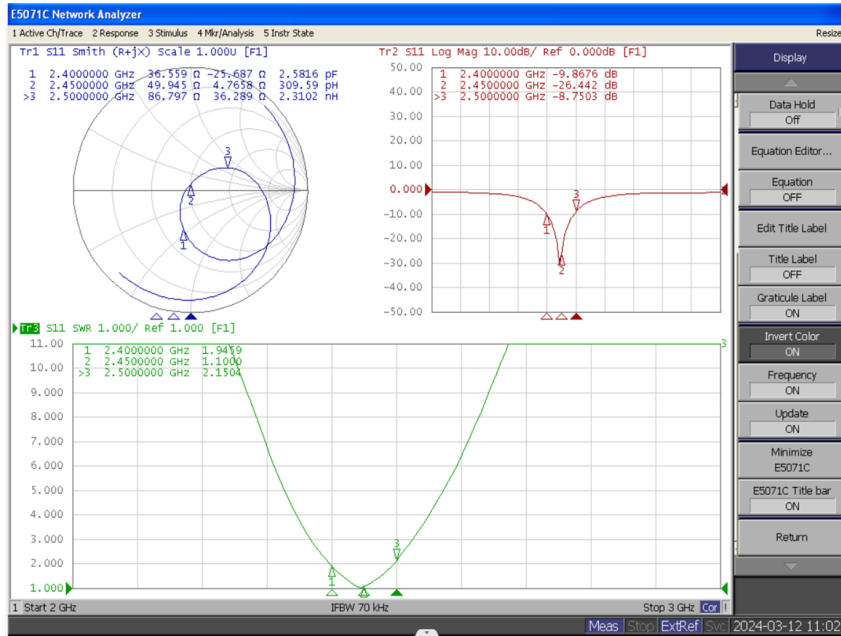

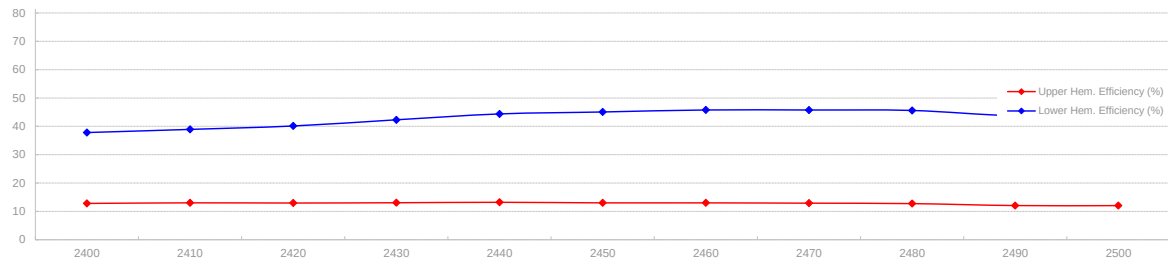

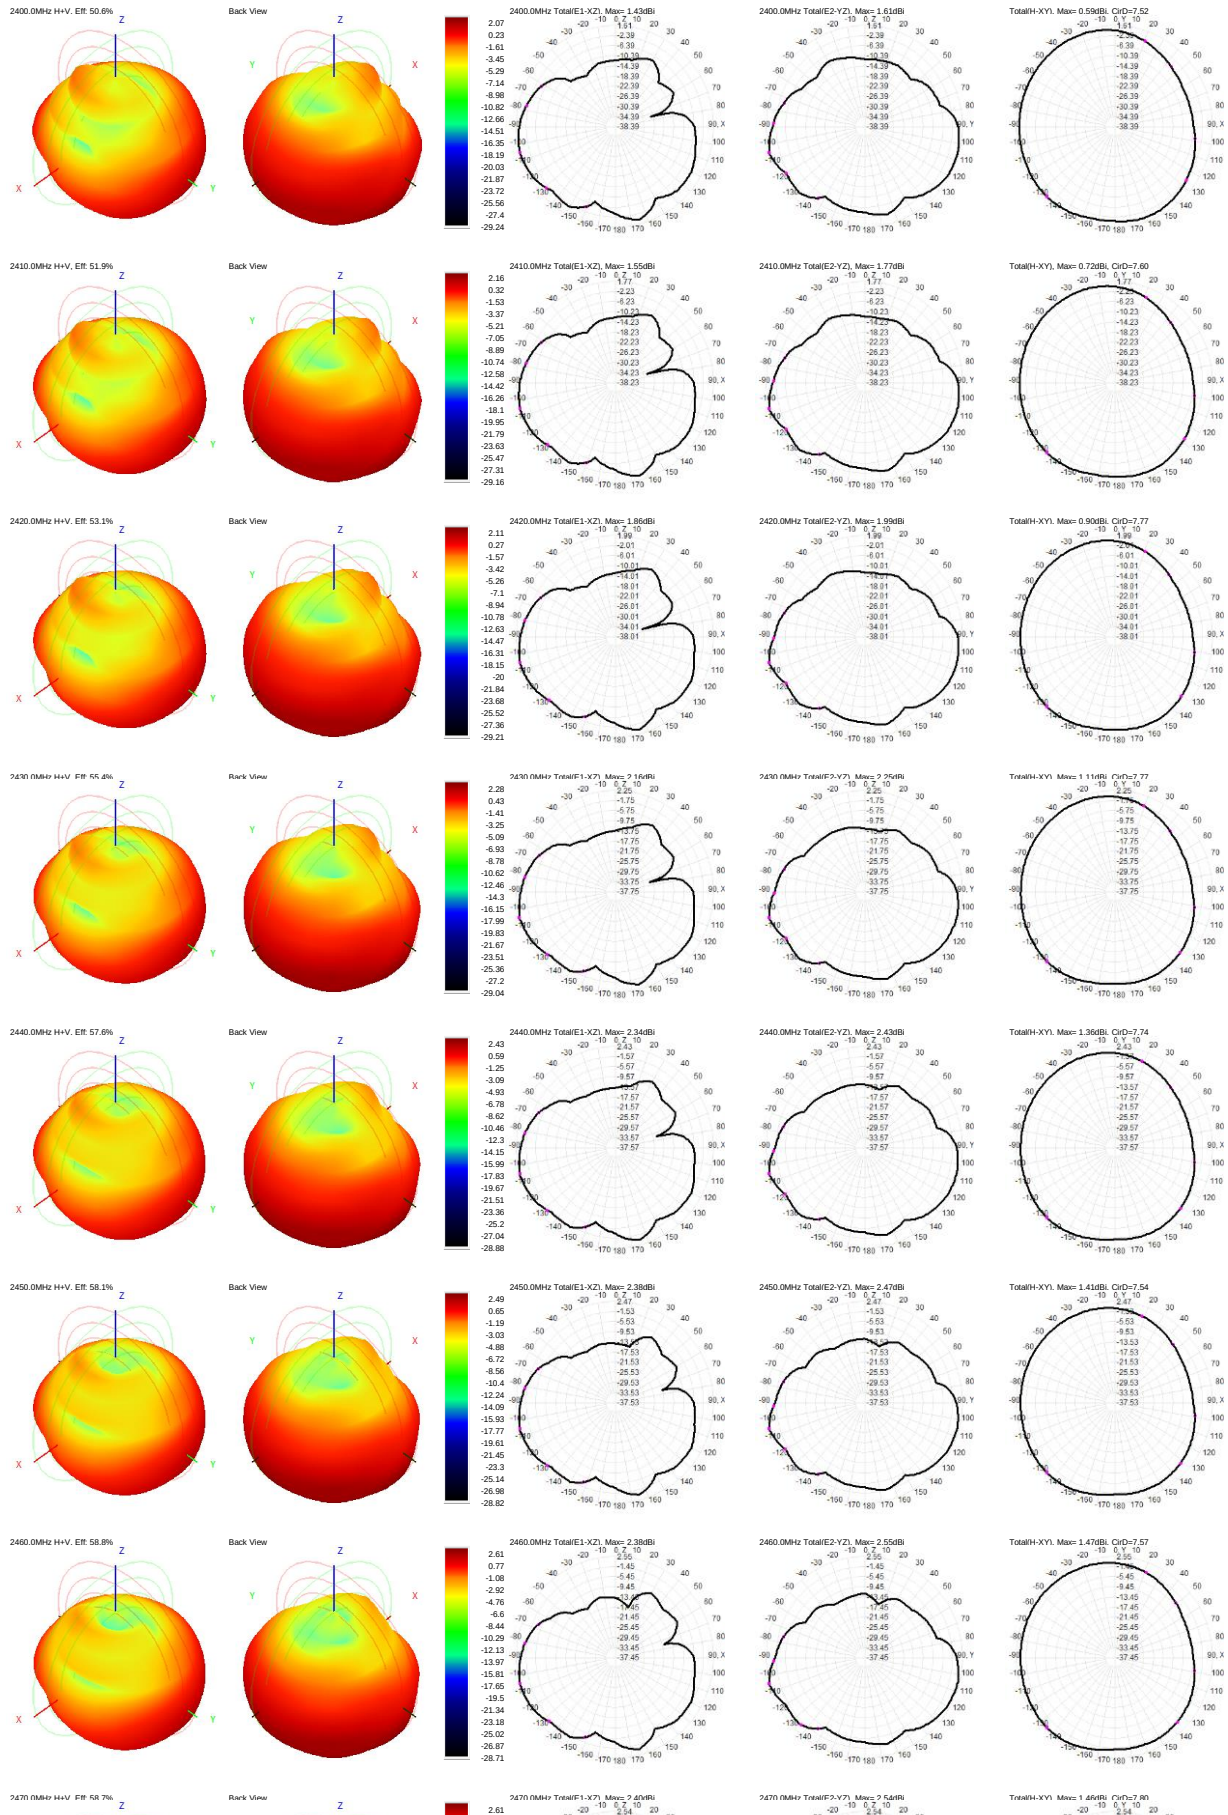

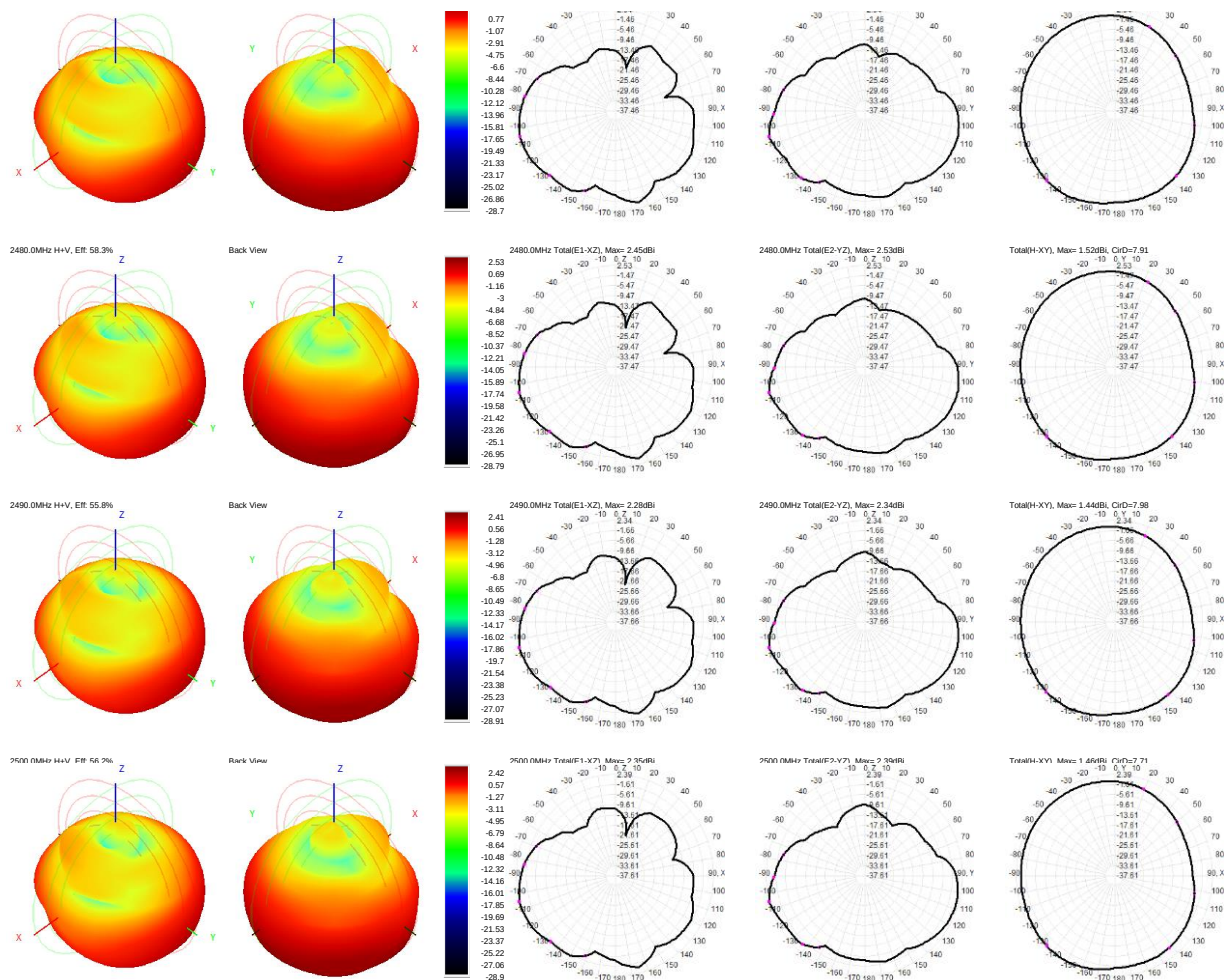

Manufacturer: Shenzhen Ai-Thinker Technology Co., Ltd

Address: 410, Block C, Huafeng Smart Innovation Port. Gushu 2nd Road, Gushu Community, Xixiang Street, Baoan District, Shenzhen, China