



Appendix for Test report

Appendix A: DTS (6 dB) Bandwidth

In this document, the "DTS6dBBW" refers to the measured "DTS (6 dB) Bandwidth" value. In this Appendix, the "fc(DTS6dBBW)" refers to the centre of the measured "DTS6dBBW". The introduction of the "fc(DTS6dBBW)" is due to that other measurements use it as the spectrum analyzer setting.


For measurements on smart antenna systems (devices with multiple transmit chains), the test is performed at each chain, and used as respective results for each chain.

Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Ant	DTS6dBBW[MHz]	Verdict
11B	L	2412	Ant 1	7.14	pass
11B	M	2437	Ant 1	7.16	pass
11B	H	2462	Ant 1	7.59	pass
11G	L	2412	Ant 1	15.84	pass
11G	L	2417	Ant 1	15.95	pass
11G	M	2437	Ant 1	15.96	pass
11G	H	2462	Ant 1	16.07	pass
11N20	L	2412	Ant 1	16.54	pass
11N20	M	2437	Ant 1	16.17	pass
11N20	H	2462	Ant 1	16.64	pass
11N40	L	2422	Ant 1	35.17	pass
11N40	M	2437	Ant 1	35.57	pass
11N40	H	2452	Ant 1	35.24	pass




2.1 11B_L@Ant 1






2.2 11B_M@Ant 1

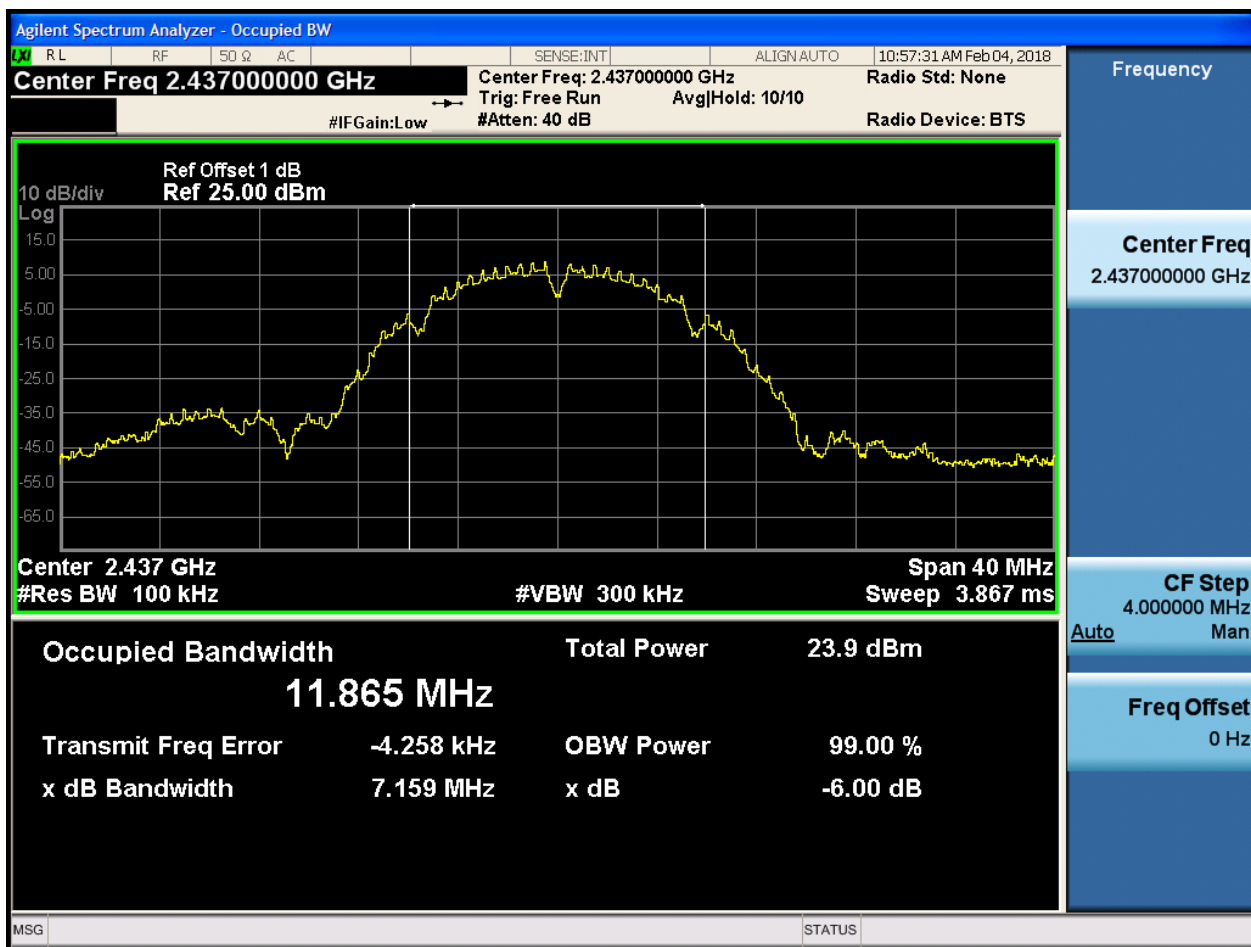




2.3 11B_H@Ant 1

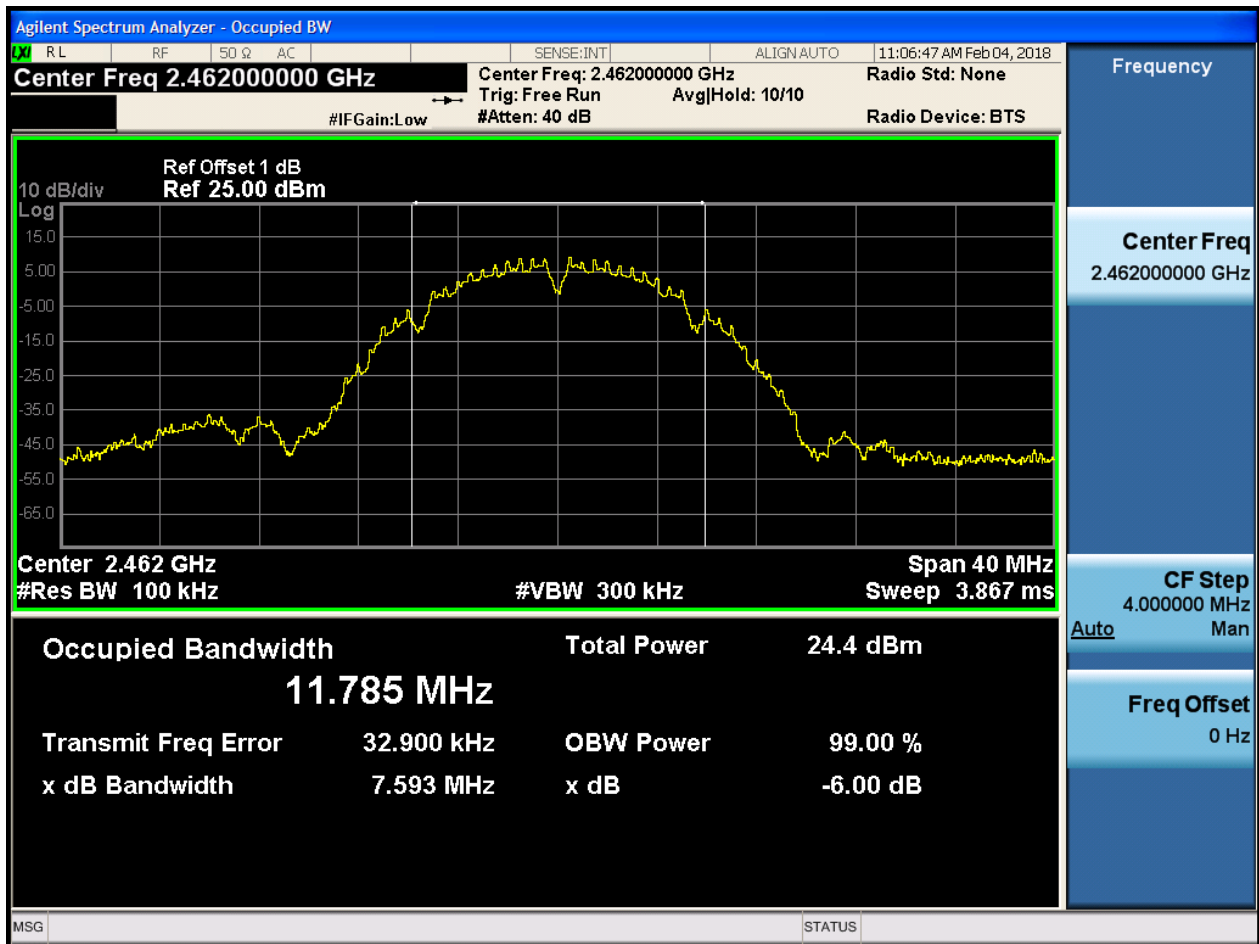




2.4 11G_L_2412@Ant 1

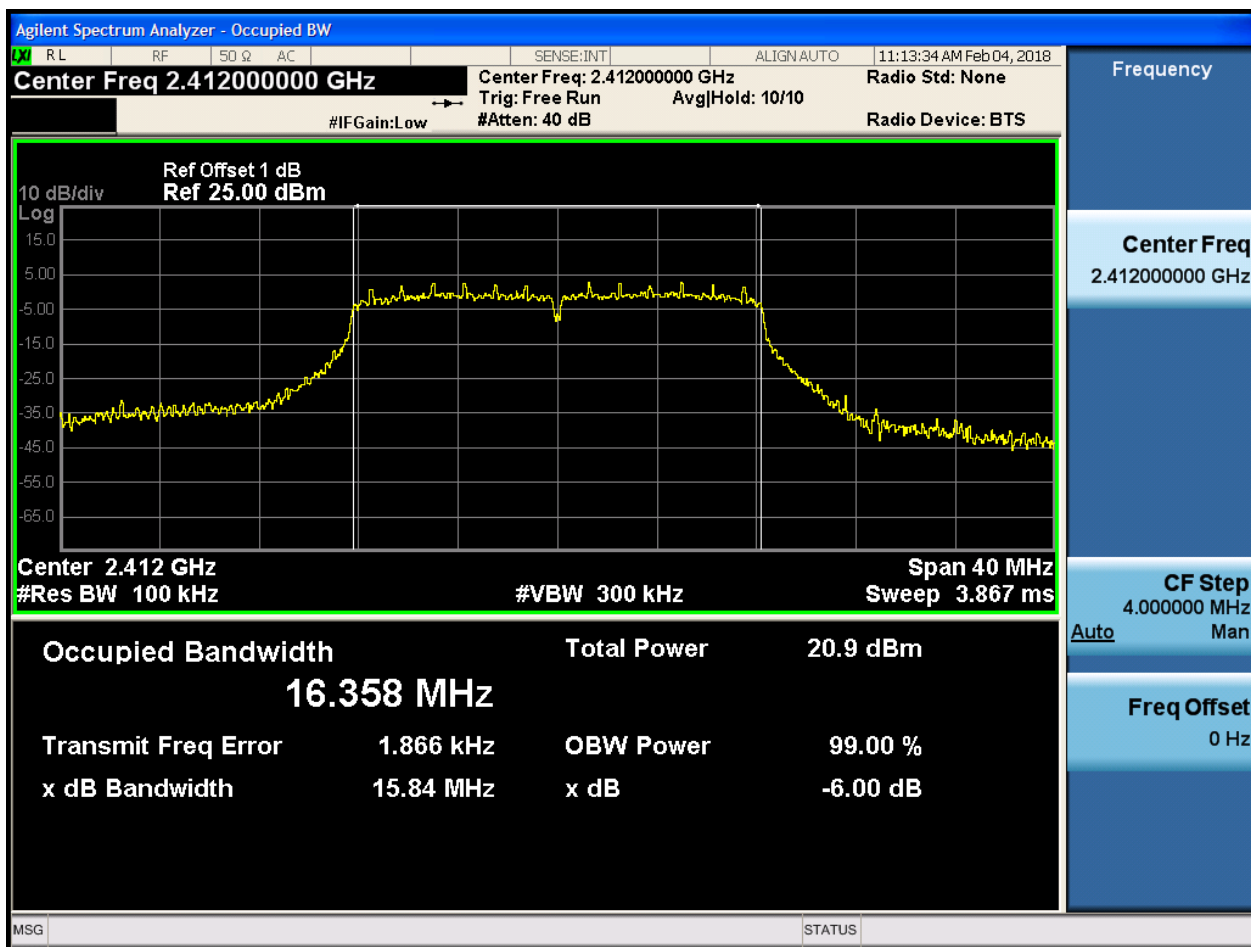




2.5 11G_L_2417@Ant 1

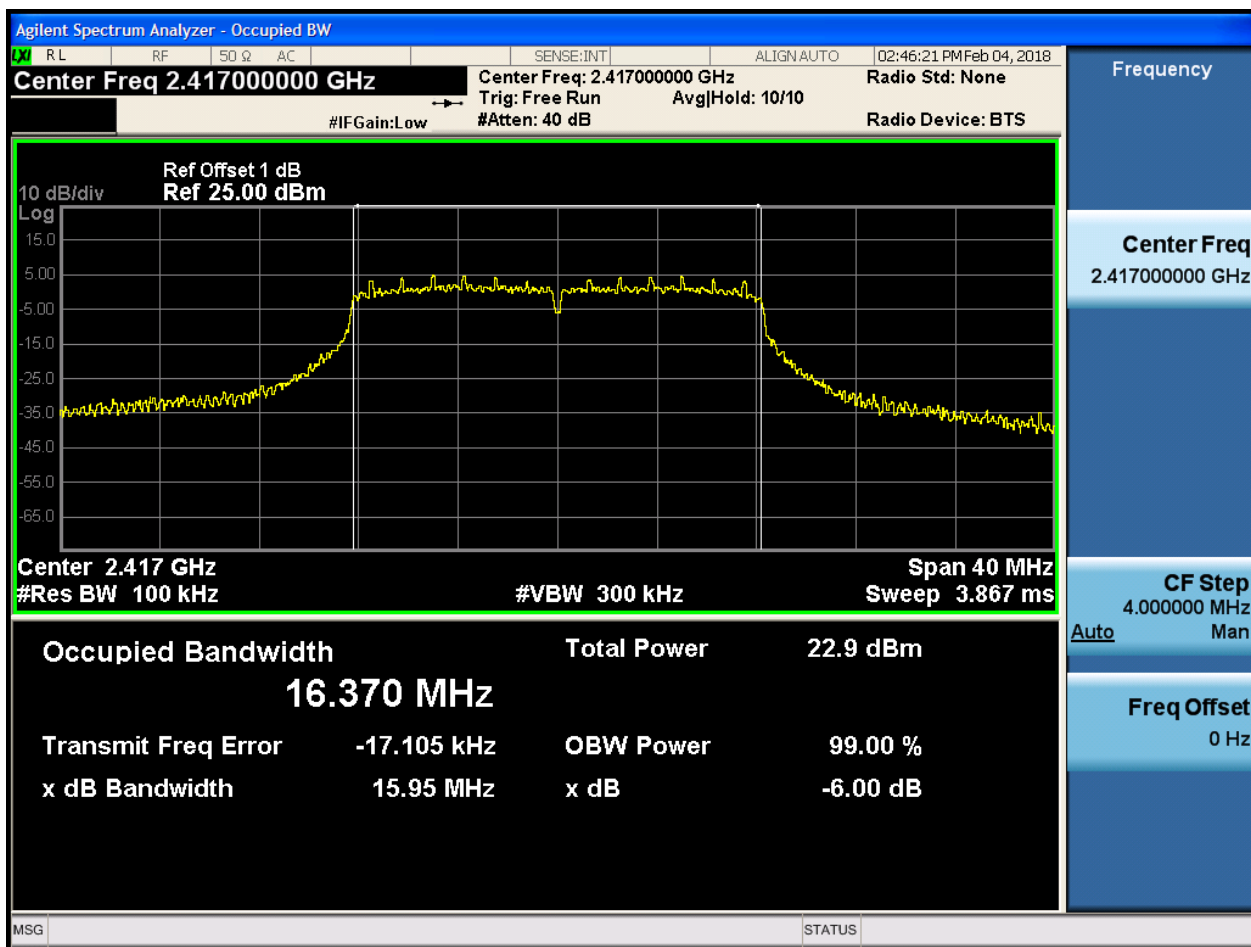



2.6 11G_M@Ant 1

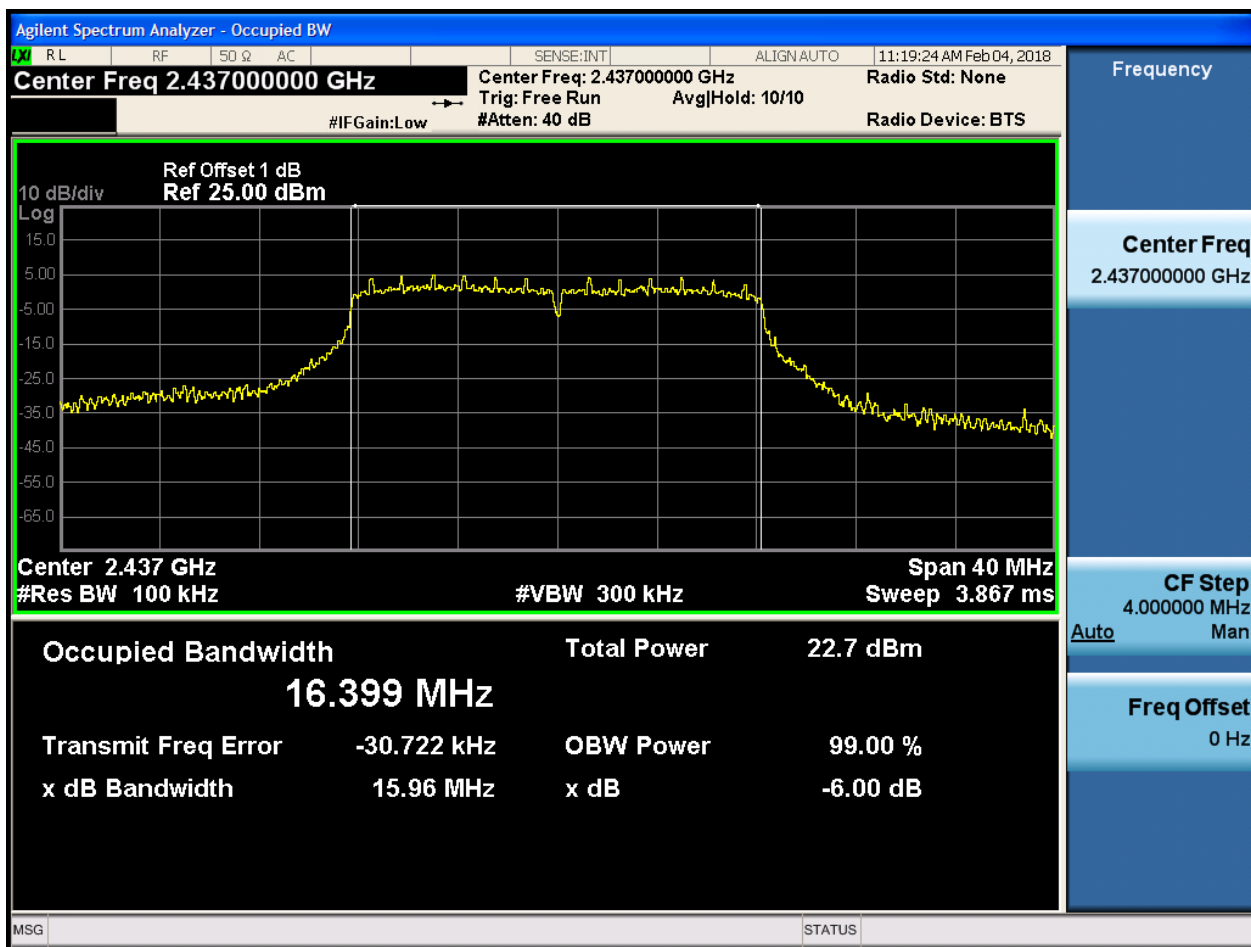



Agilent Spectrum Analyzer - Occupied BW

Center Freq 2.46200000 GHz

Center Freq: 2.46200000 GHz
 Trig: Free Run
 #Atten: 40 dB

Radio Std: None
 Radio Device: BTS

#IFGain: Low

Ref Offset 1 dB
 Ref 25.00 dBm

10 dB/div
 Log

Center 2.462 GHz
 #Res BW 100 kHz

Span 40 MHz
 Sweep 3.867 ms

#VBW 300 kHz

Occupied Bandwidth		Total Power	
16.365 MHz		23.0 dBm	

Transmit Freq Error		OBW Power	
-17.213 kHz		99.00 %	

x dB Bandwidth		x dB	
16.07 MHz		-6.00 dB	

Frequency

Center Freq
 2.46200000 GHz


CF Step
 4.000000 MHz
 Auto Man

Freq Offset
 0 Hz

MSG STATUS




2.8 11N20_L@Ant 1

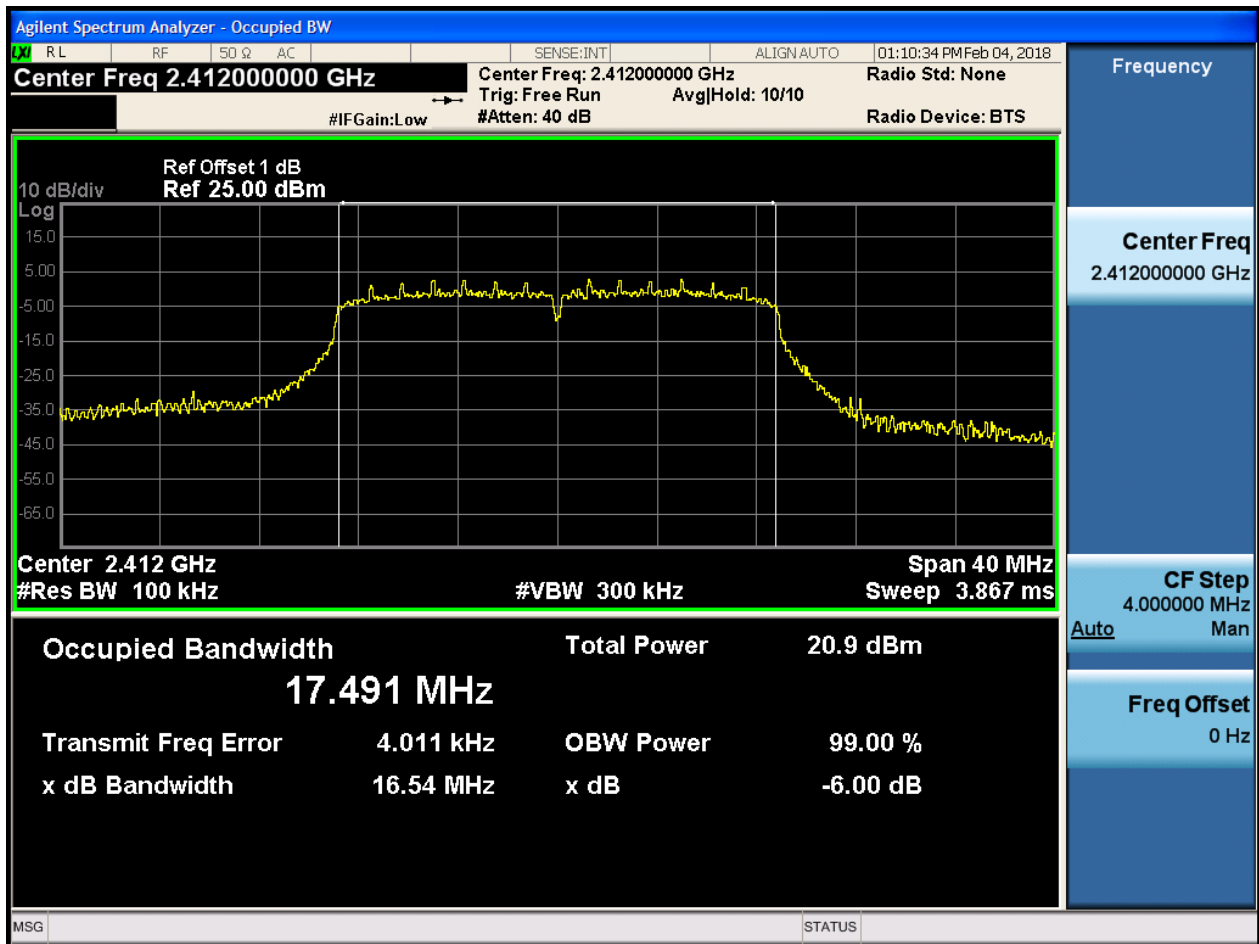




2.9 11N20_M@Ant 1

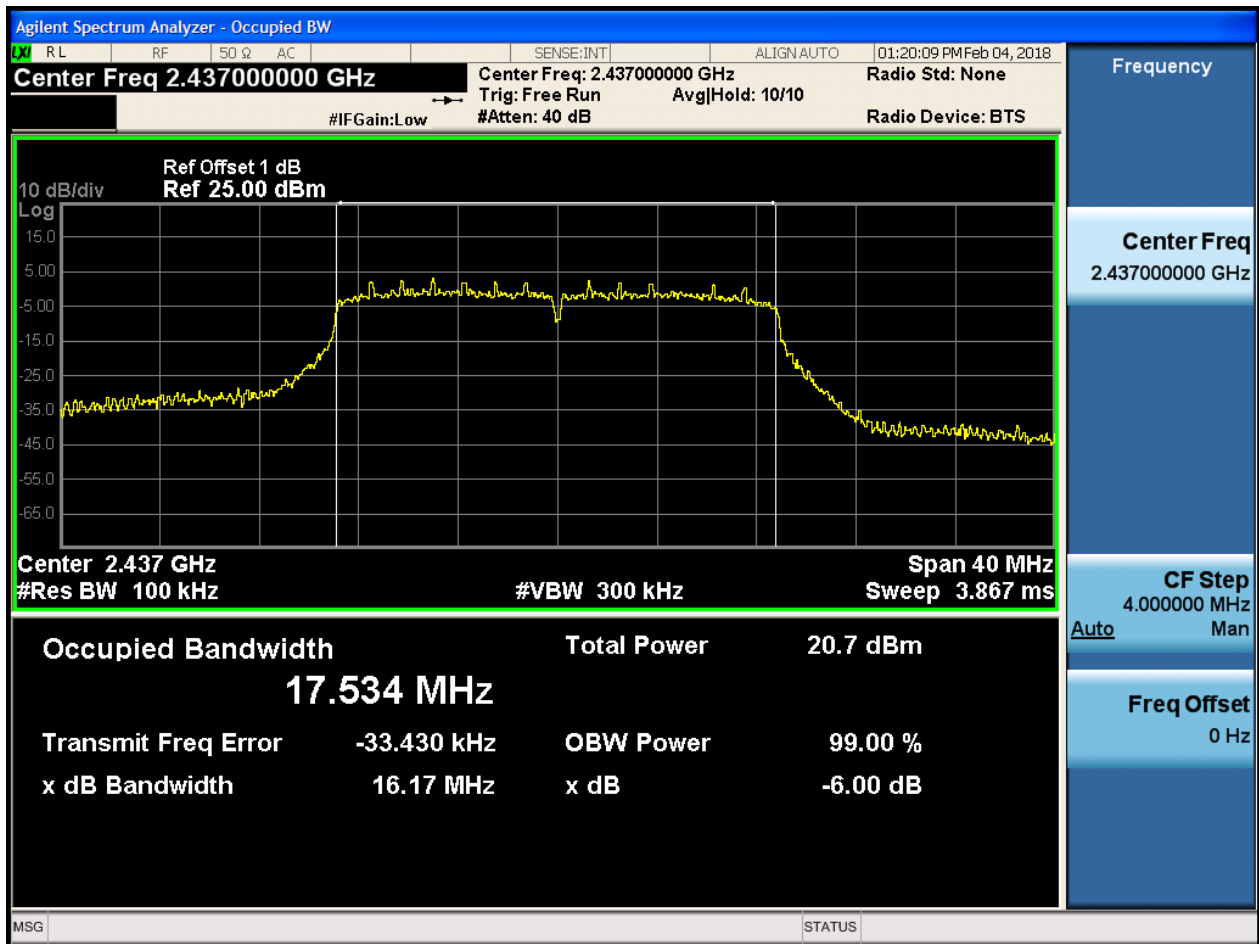




2.10 11N20_H@Ant 1

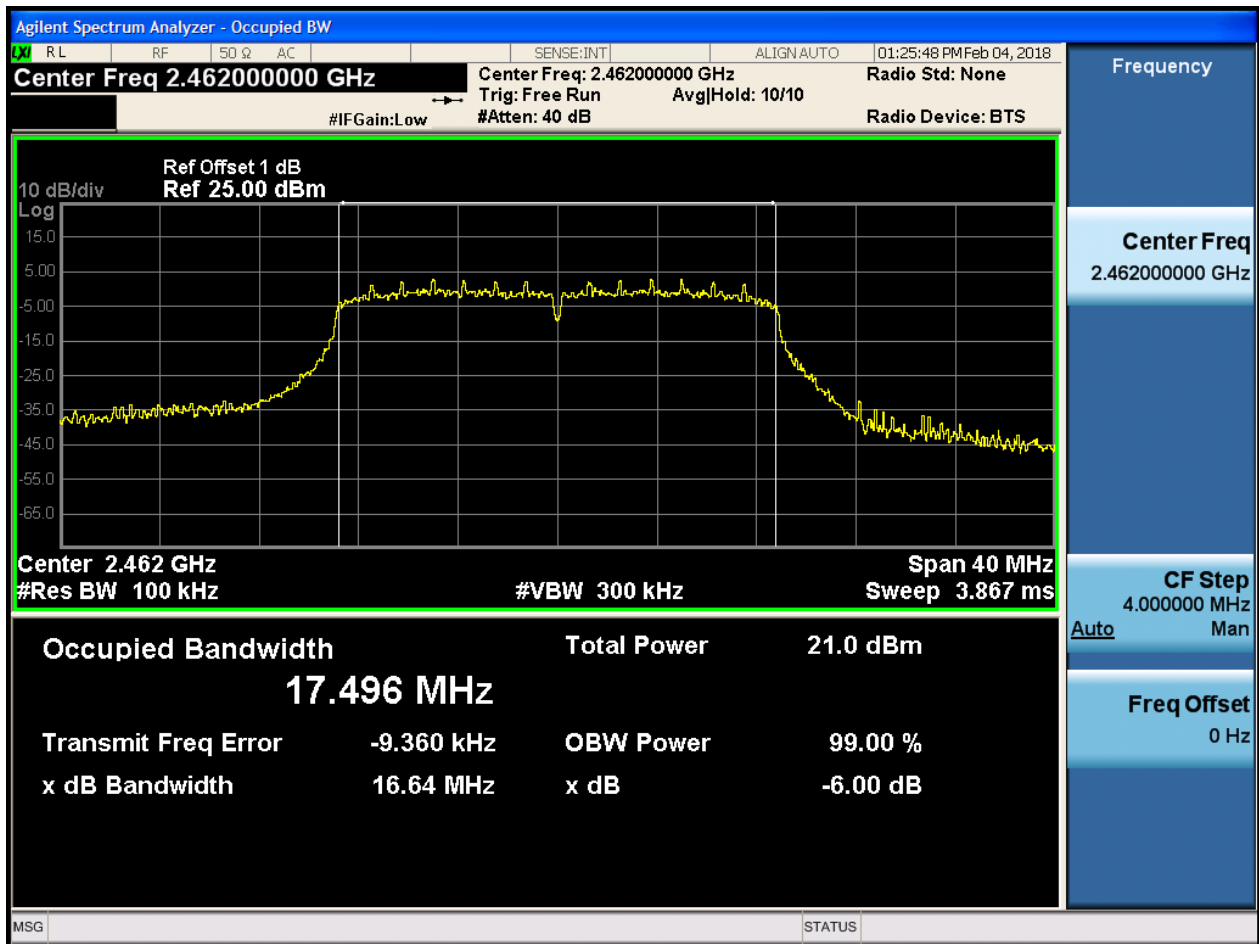




2.11 11N40_L@Ant 1

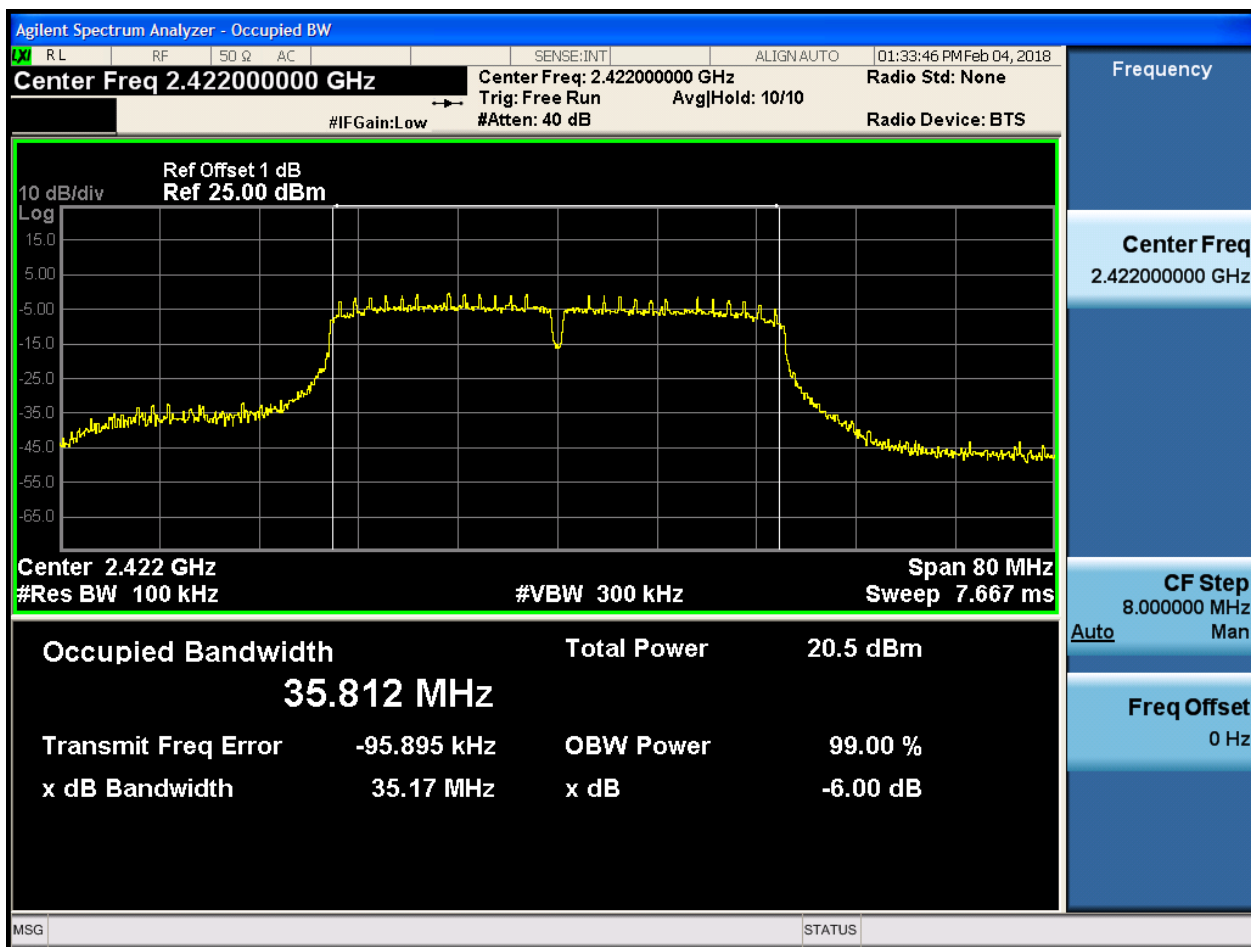




2.12 11N40_M@Ant 1

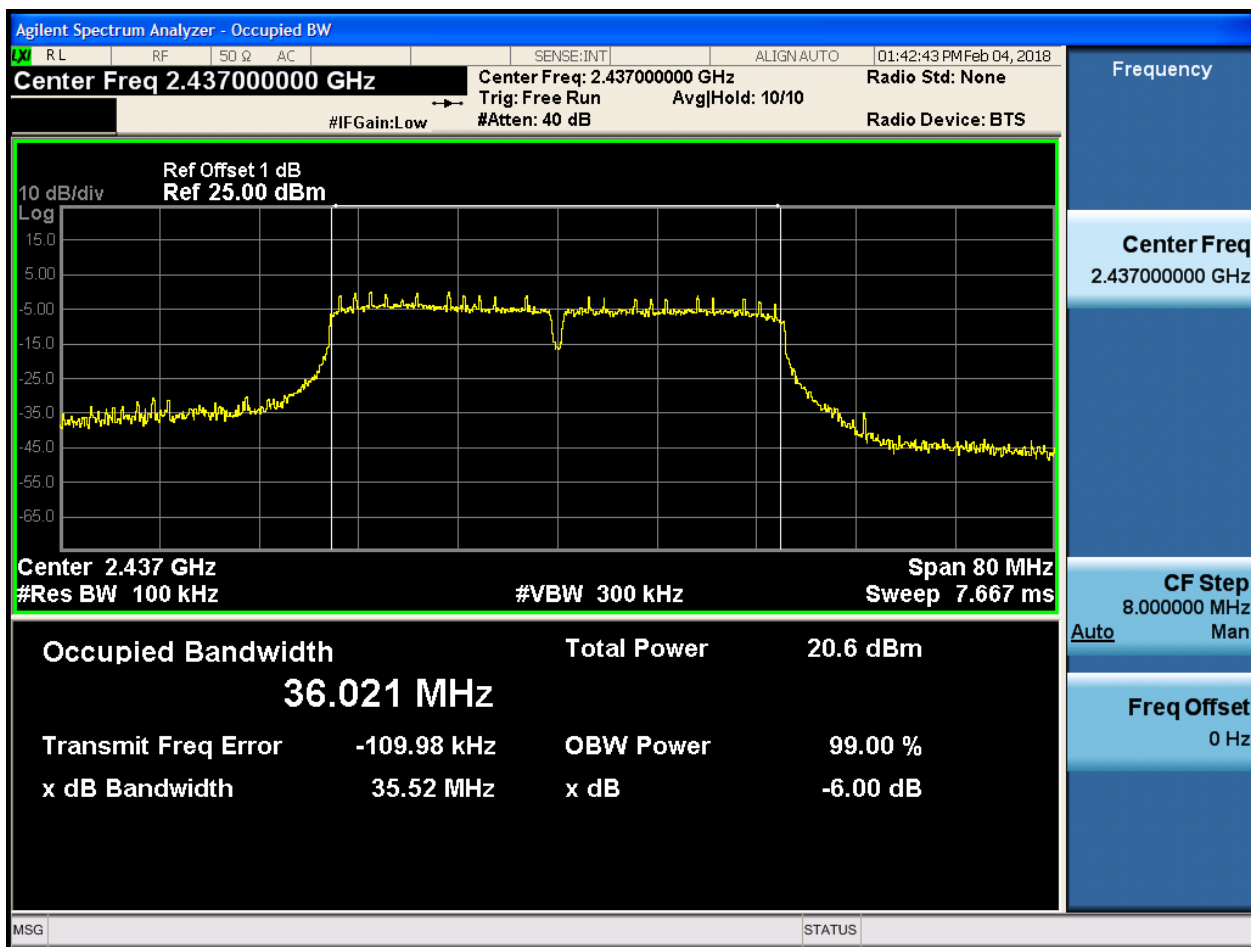



2.13 11N40_H@Ant 1

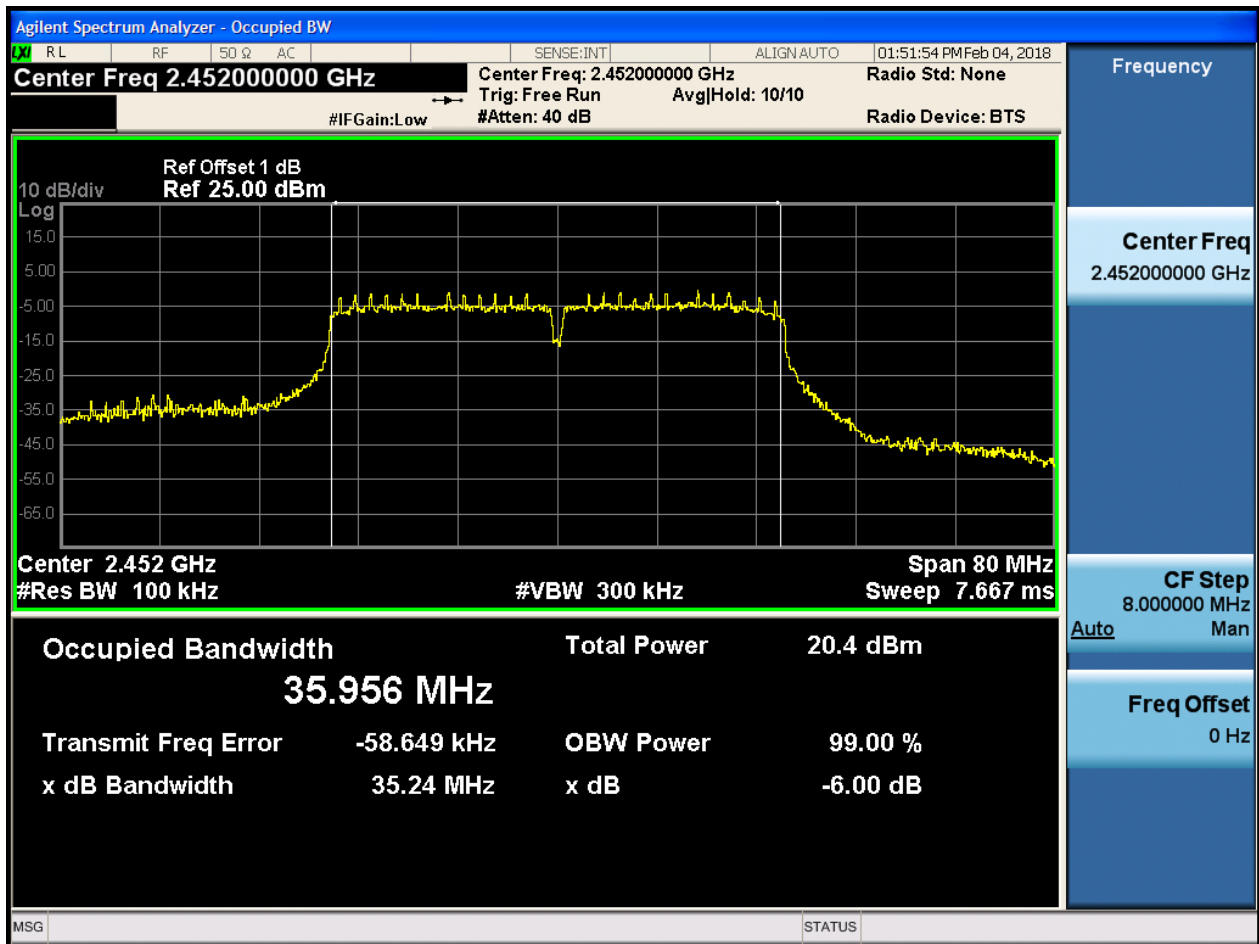

Appendix B: Occupied Bandwidth


For measurements on smart antenna systems (devices with multiple transmit chains), the test is performed at each chain, and used as respective results for each chain.

Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Ant	Occupied Bandwidth [MHz]	Verdict
11B	L	2412	Ant 1	11.69	pass
11B	M	2437	Ant 1	11.87	pass
11B	H	2462	Ant 1	11.79	pass
11G	L	2412	Ant 1	16.45	pass
11G	L	2417	Ant 1	16.37	pass
11G	M	2437	Ant 1	16.50	pass
11G	H	2462	Ant 1	16.45	pass
11N20	L	2412	Ant 1	17.53	pass
11N20	M	2437	Ant 1	17.58	pass
11N20	H	2462	Ant 1	17.51	pass
11N40	L	2422	Ant 1	36.02	pass
11N40	M	2437	Ant 1	36.31	pass
11N40	H	2452	Ant 1	36.21	pass


Part II - Test Plots

2.1 11B_L@Ant 1

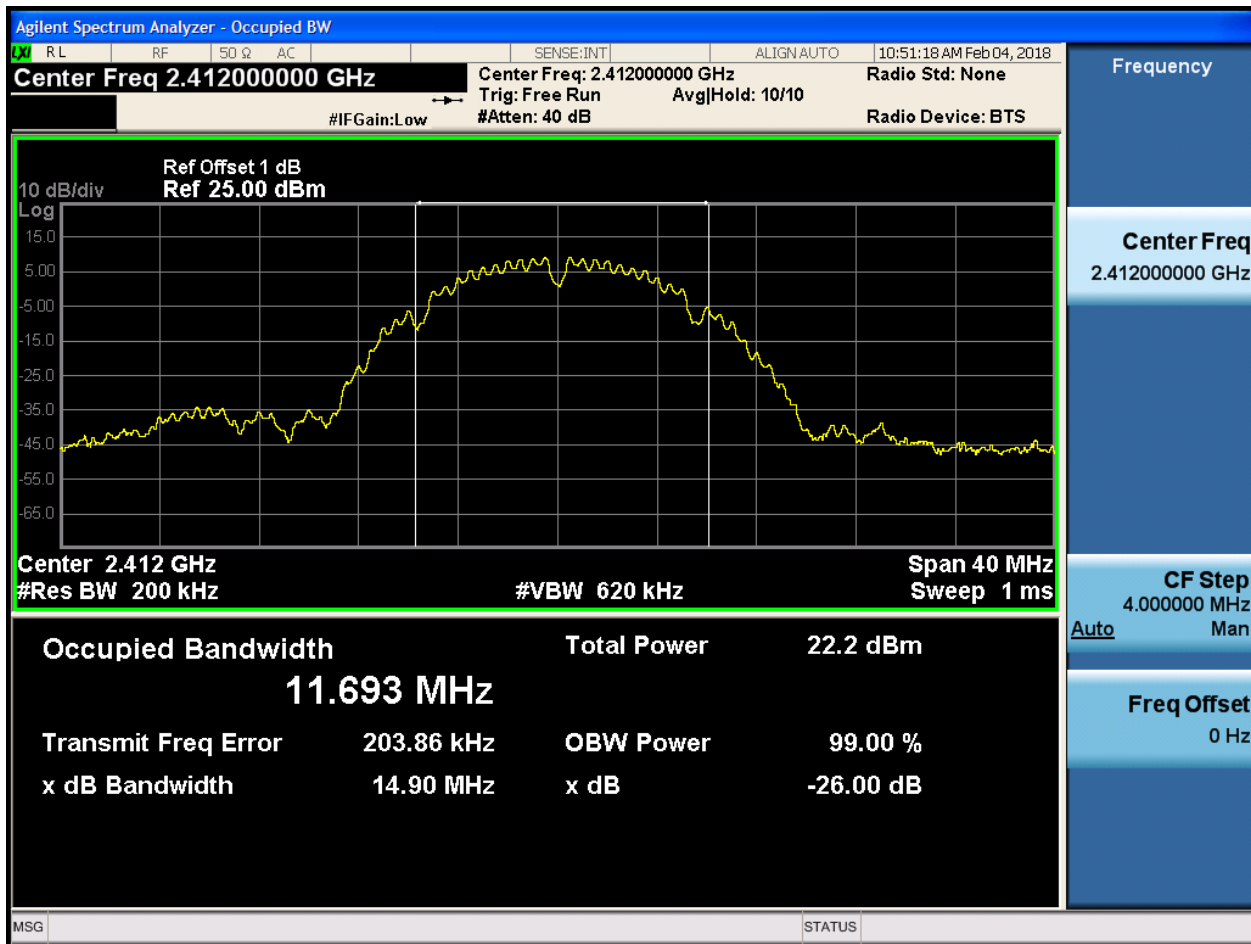




2.2 11B_M@Ant 1

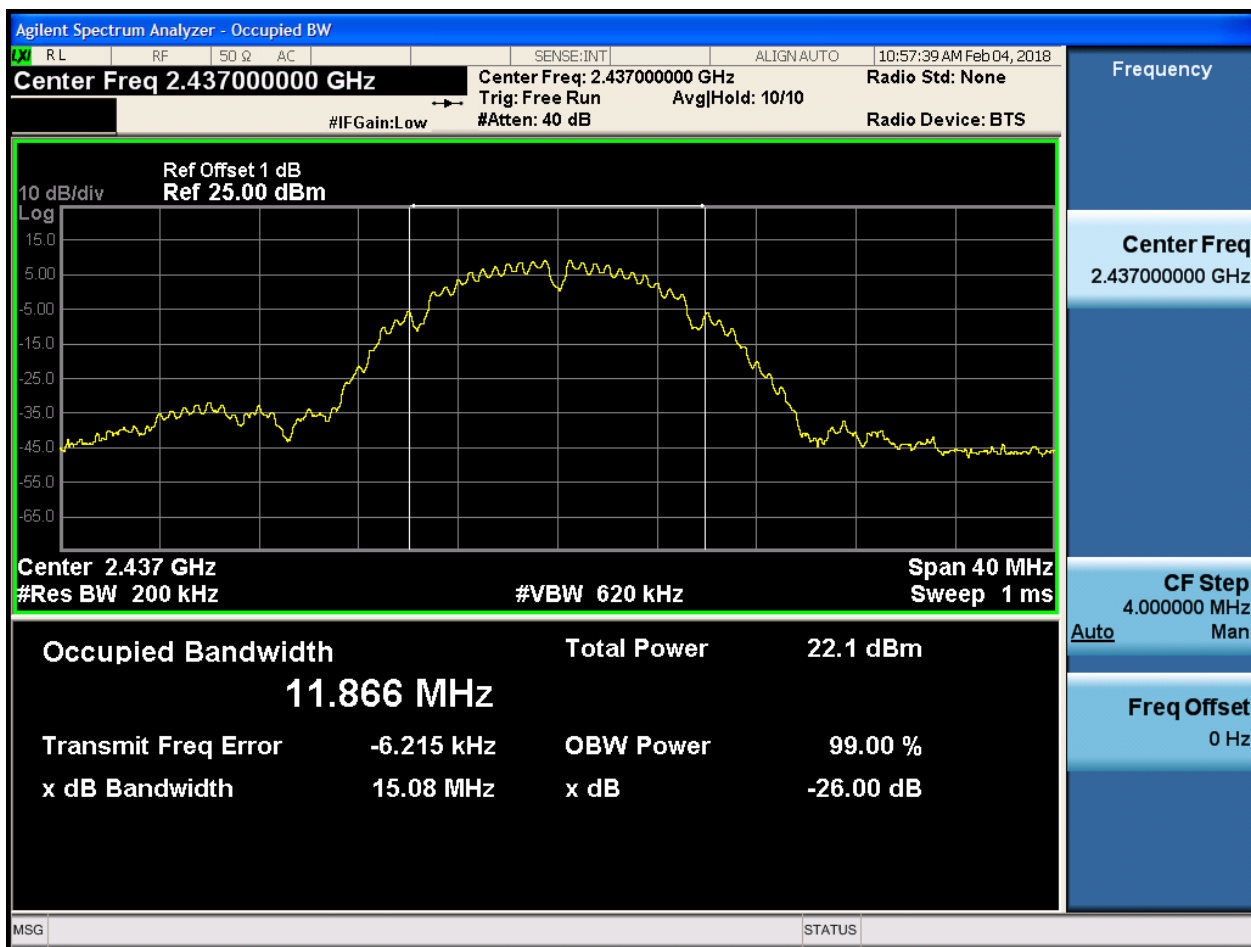




2.3 11B_H@Ant 1

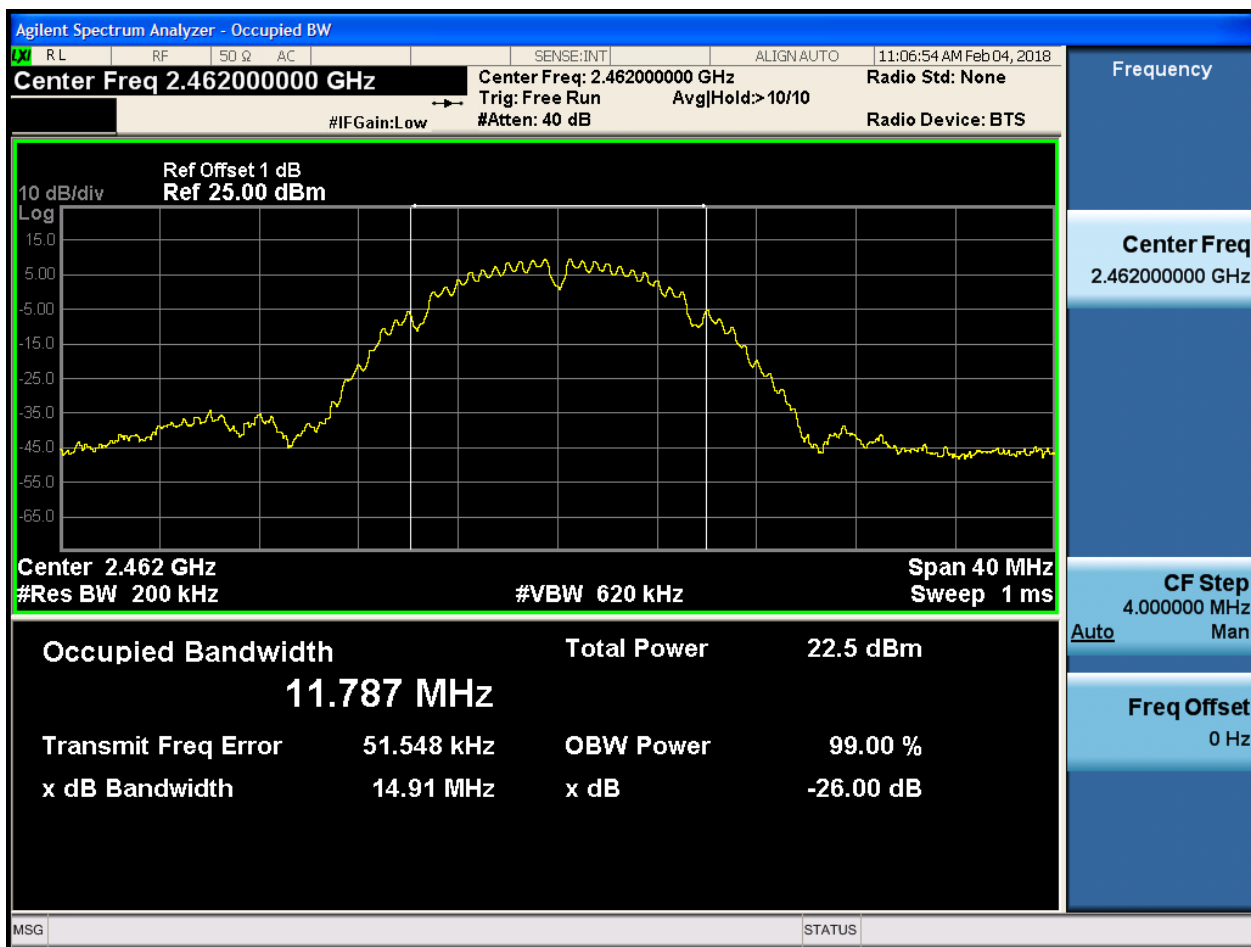




2.4 11G_L_2412@Ant 1

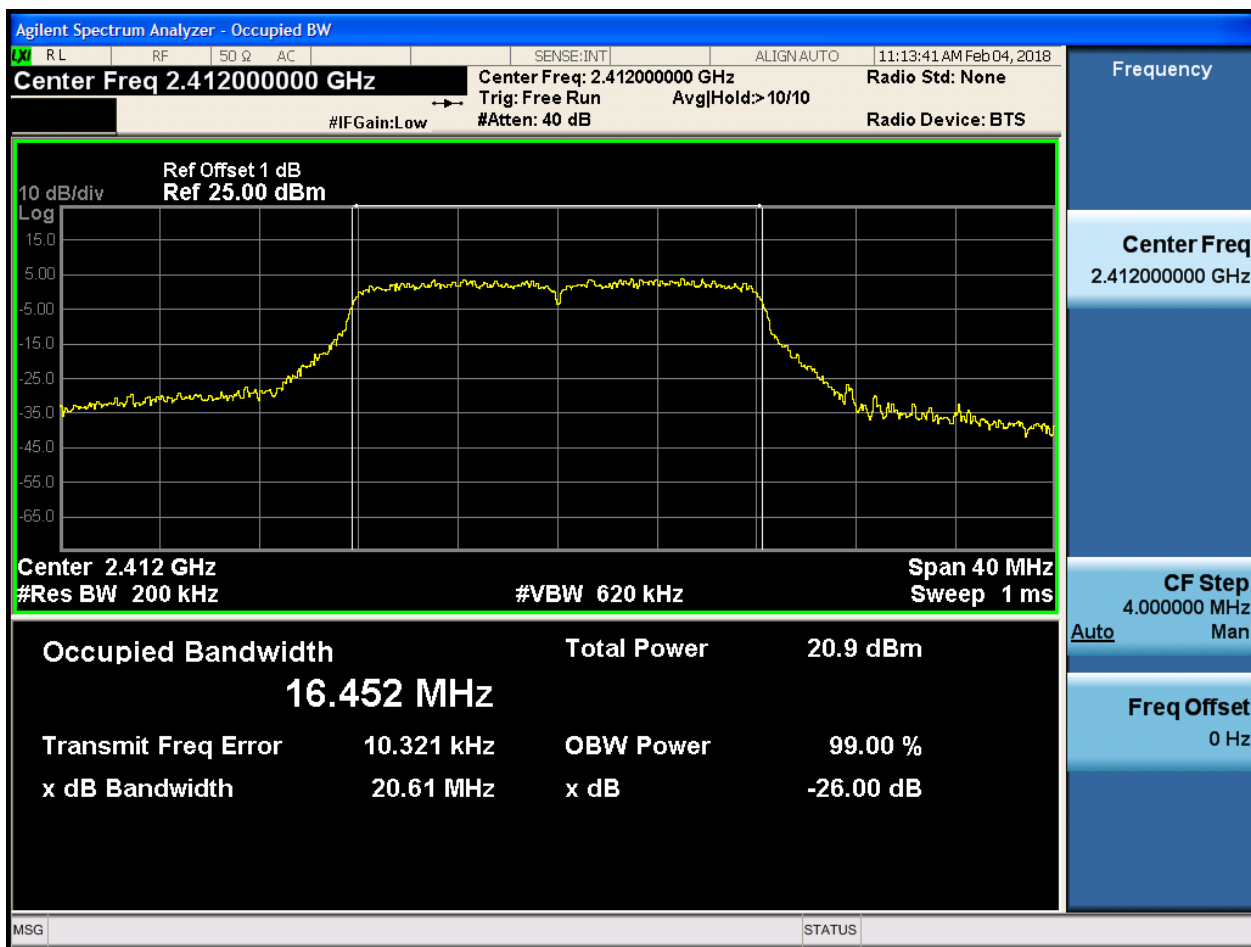



2.5 11G_L_2417@Ant 1

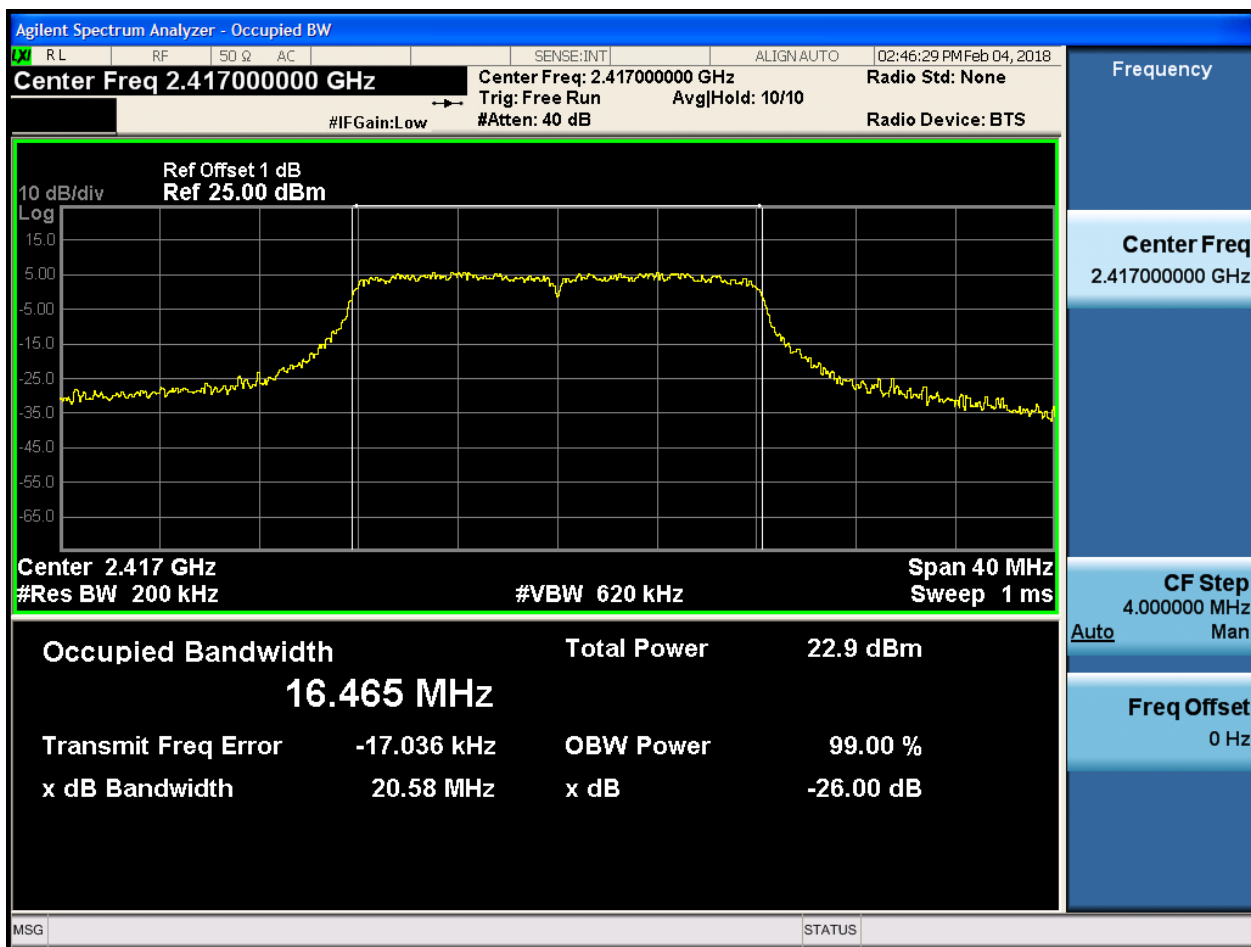



Agilent Spectrum Analyzer - Occupied BW

RL RF 50 Ω AC SENSE:INT ALIGN: AUTO 11:19:31 AM Feb 04, 2018

Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Radio Std: None
 Trig: Free Run Avg/Hold: 10/10
 #IFGain: Low #Atten: 40 dB Radio Device: BTS

Ref Offset 1 dB
 Ref 25.00 dBm

10 dB/div
 Log

Center 2.437 GHz Span 40 MHz
 #Res BW 200 kHz #VBW 620 kHz Sweep 1 ms

Occupied Bandwidth		Total Power	
16.499 MHz		22.8 dBm	

Transmit Freq Error		OBW Power	
-49.133 kHz		99.00 %	

x dB Bandwidth		x dB	
20.78 MHz		-26.00 dB	

Frequency

Center Freq
 2.437000000 GHz

CF Step
 4.000000 MHz
 Auto Man

Freq Offset
 0 Hz

MSG STATUS



Agilent Spectrum Analyzer - Occupied BW

RL RF 50 Ω AC SENSE:INT ALIGN AUTO 11:25:32 AM Feb 04, 2018

Center Freq 2.46200000 GHz Center Freq: 2.46200000 GHz Radio Std: None
 Trig: Free Run Avg|Hold> 10/10
 #IFGain:Low #Atten: 40 dB Radio Device: BTS

Ref Offset 1 dB
 Ref 25.00 dBm

10 dB/div
 Log

Center 2.462 GHz Span 40 MHz
 #Res BW 200 kHz #VBW 620 kHz Sweep 1 ms

Occupied Bandwidth		Total Power	
16.453 MHz		23.1 dBm	
Transmit Freq Error	-11.256 kHz	OBW Power	99.00 %
x dB Bandwidth	20.45 MHz	x dB	-26.00 dB

MSG STATUS

Frequency


Center Freq
 2.46200000 GHz

CF Step
 4.000000 MHz
 Auto Man

Freq Offset
 0 Hz




2.8 11N20_L@Ant 1

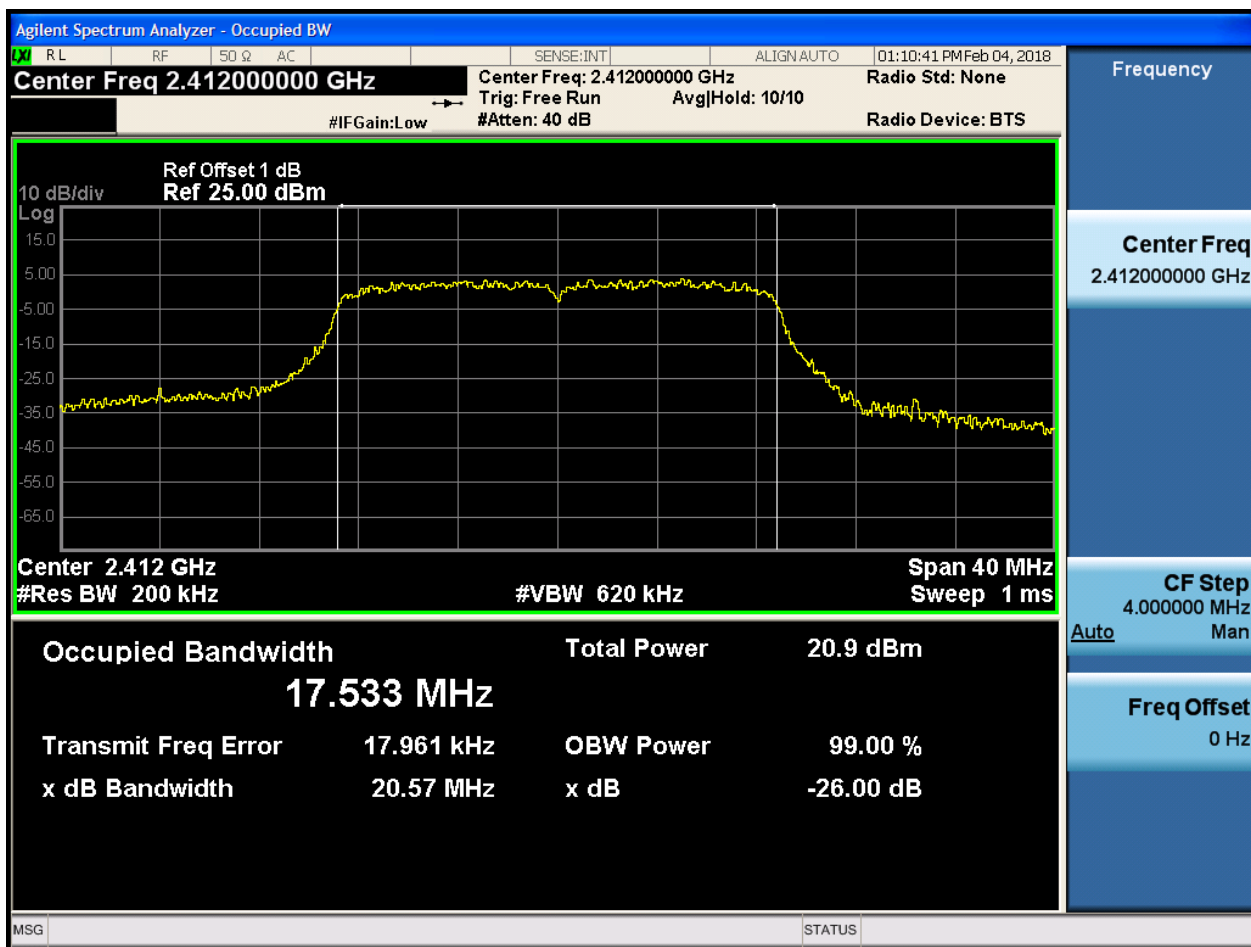




2.9 11N20_M@Ant 1

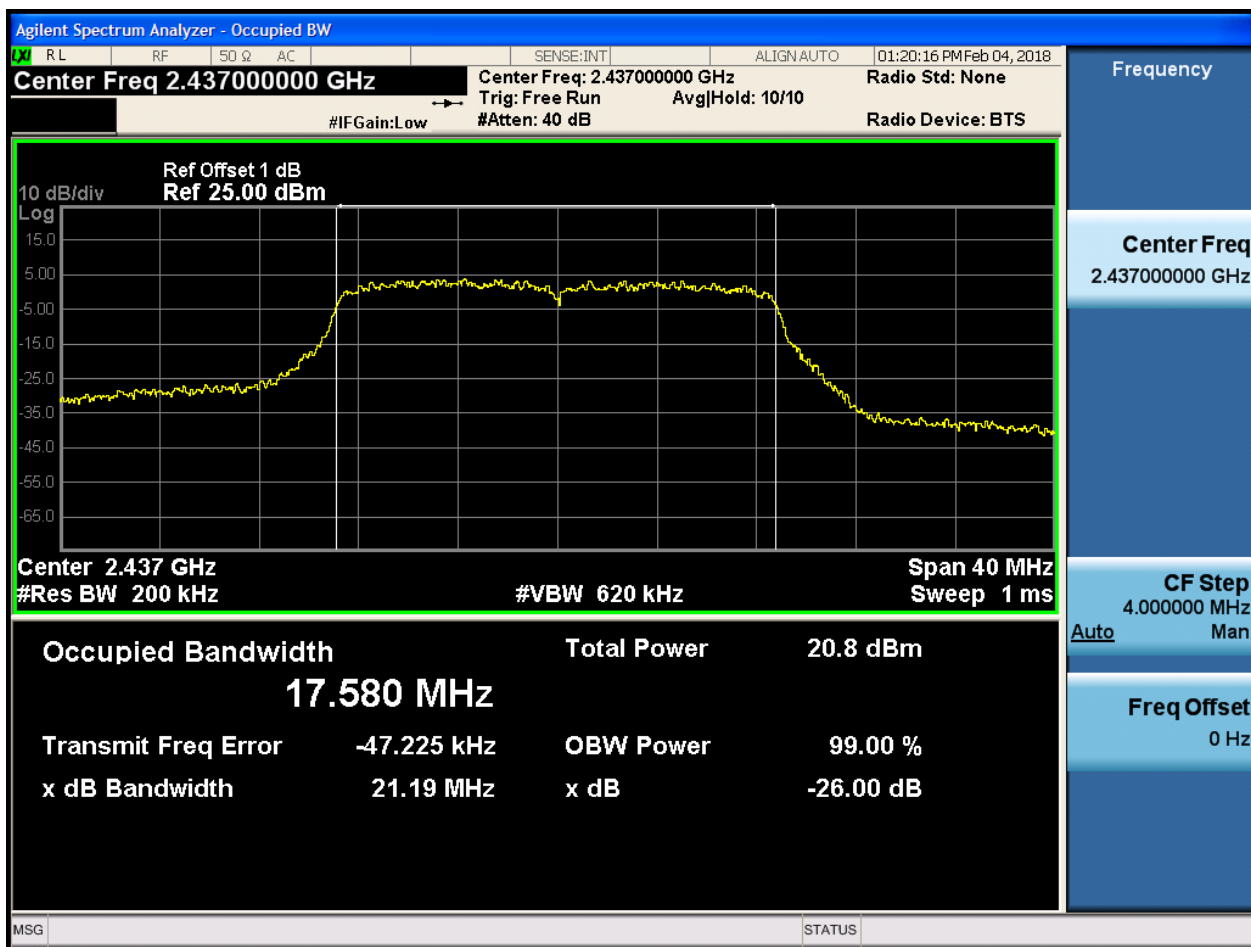




2.10 11N20_H@Ant 1

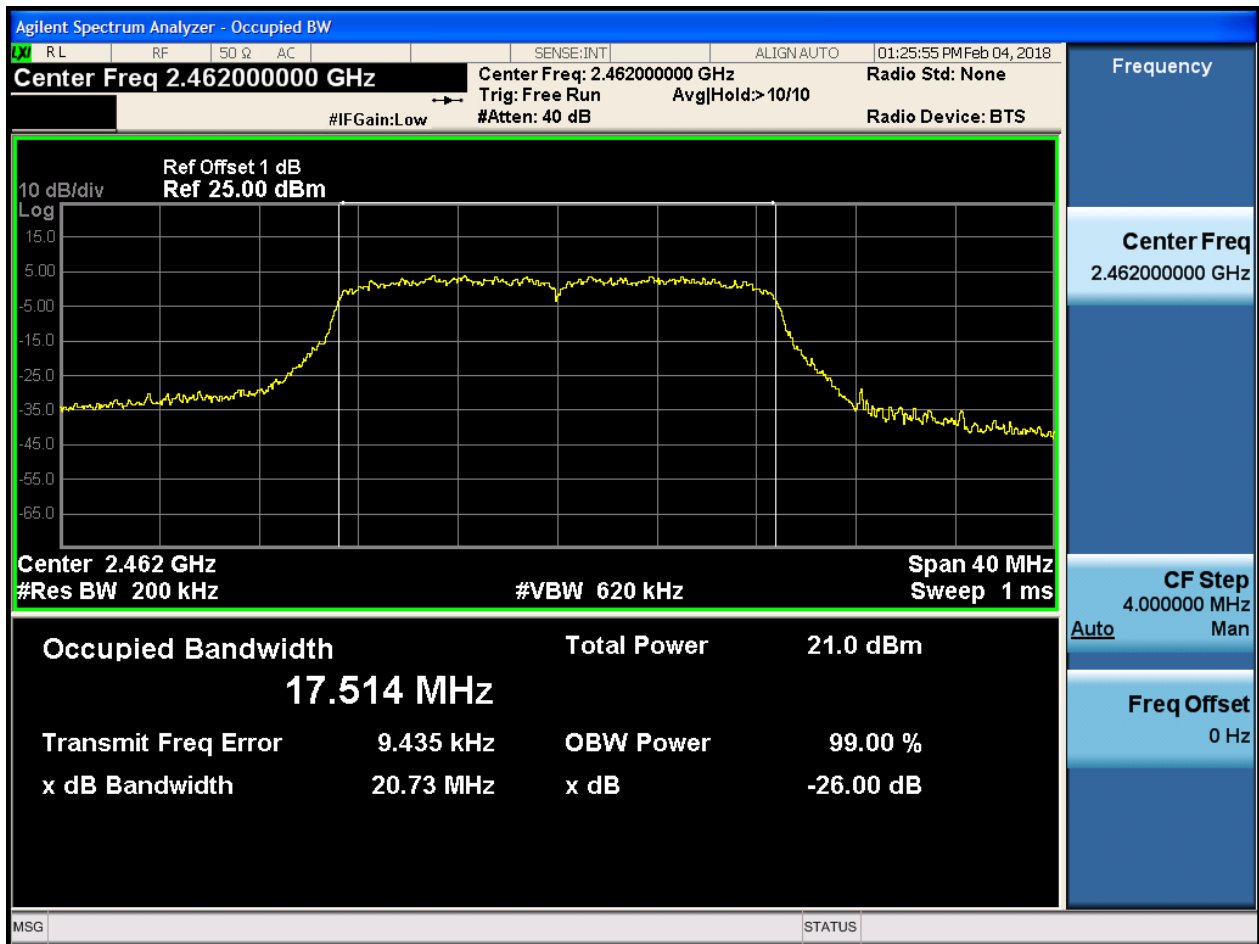




2.11 11N40_L@Ant 1

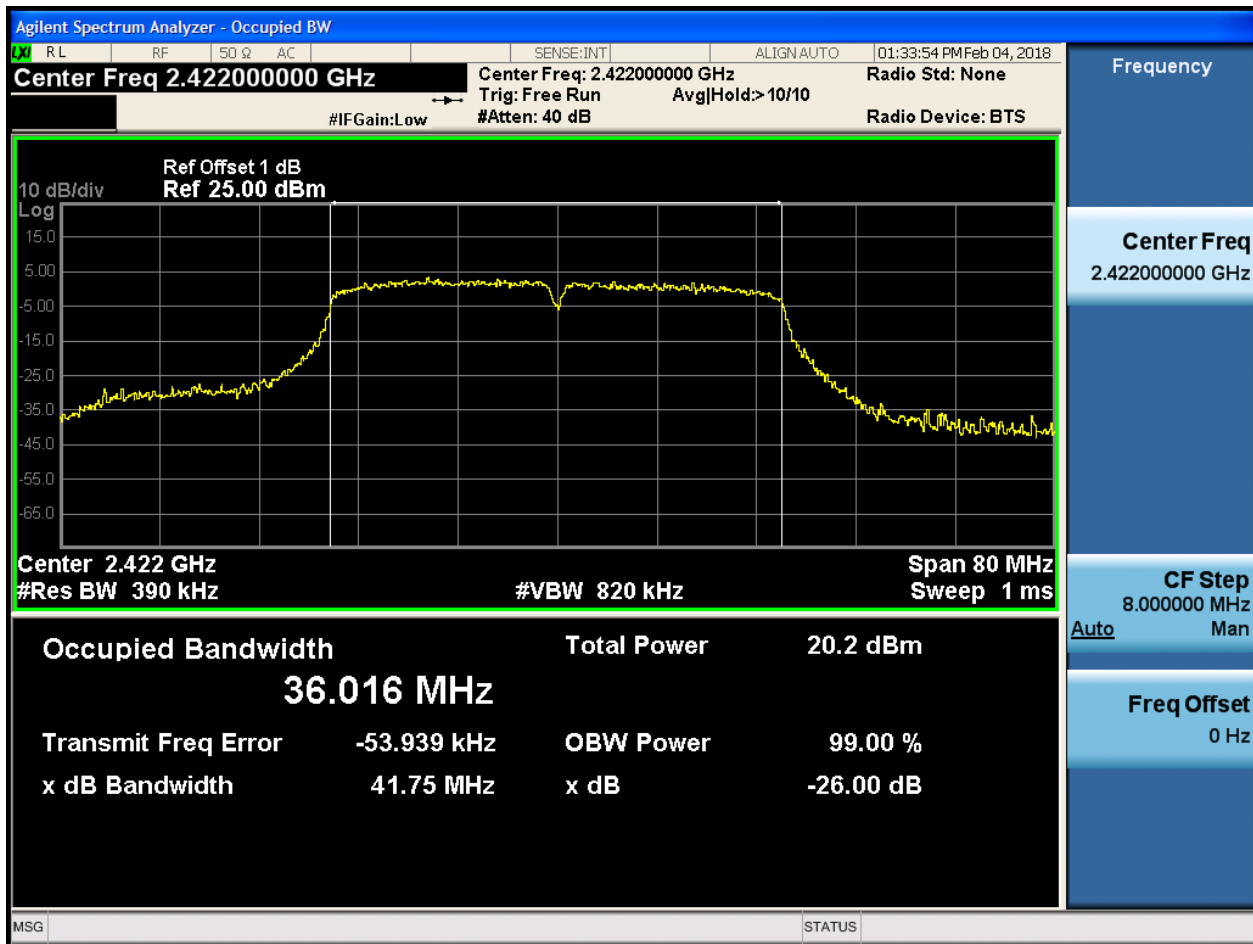




2.12 11N40_M@Ant 1

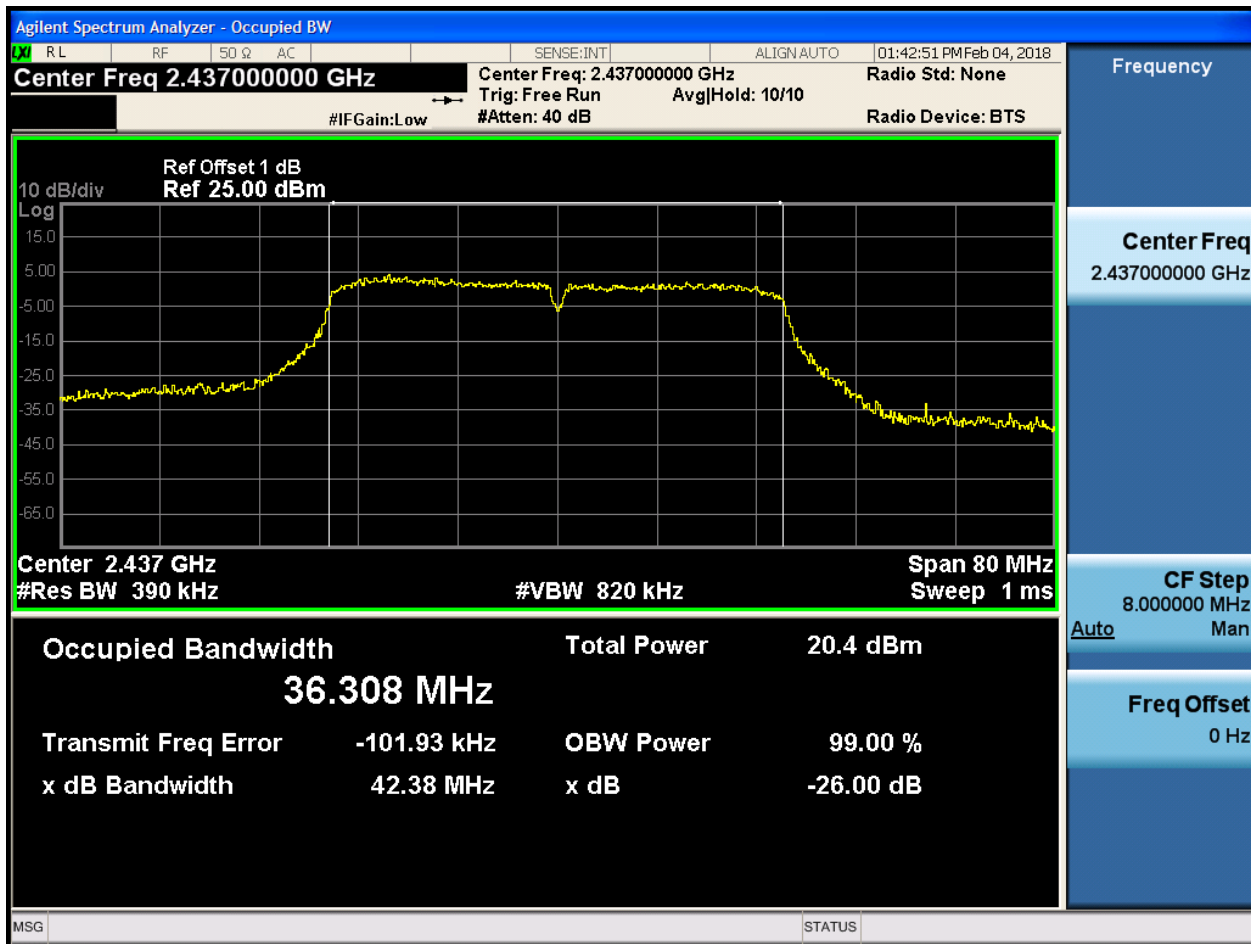



2.13 11N40_H@Ant 1

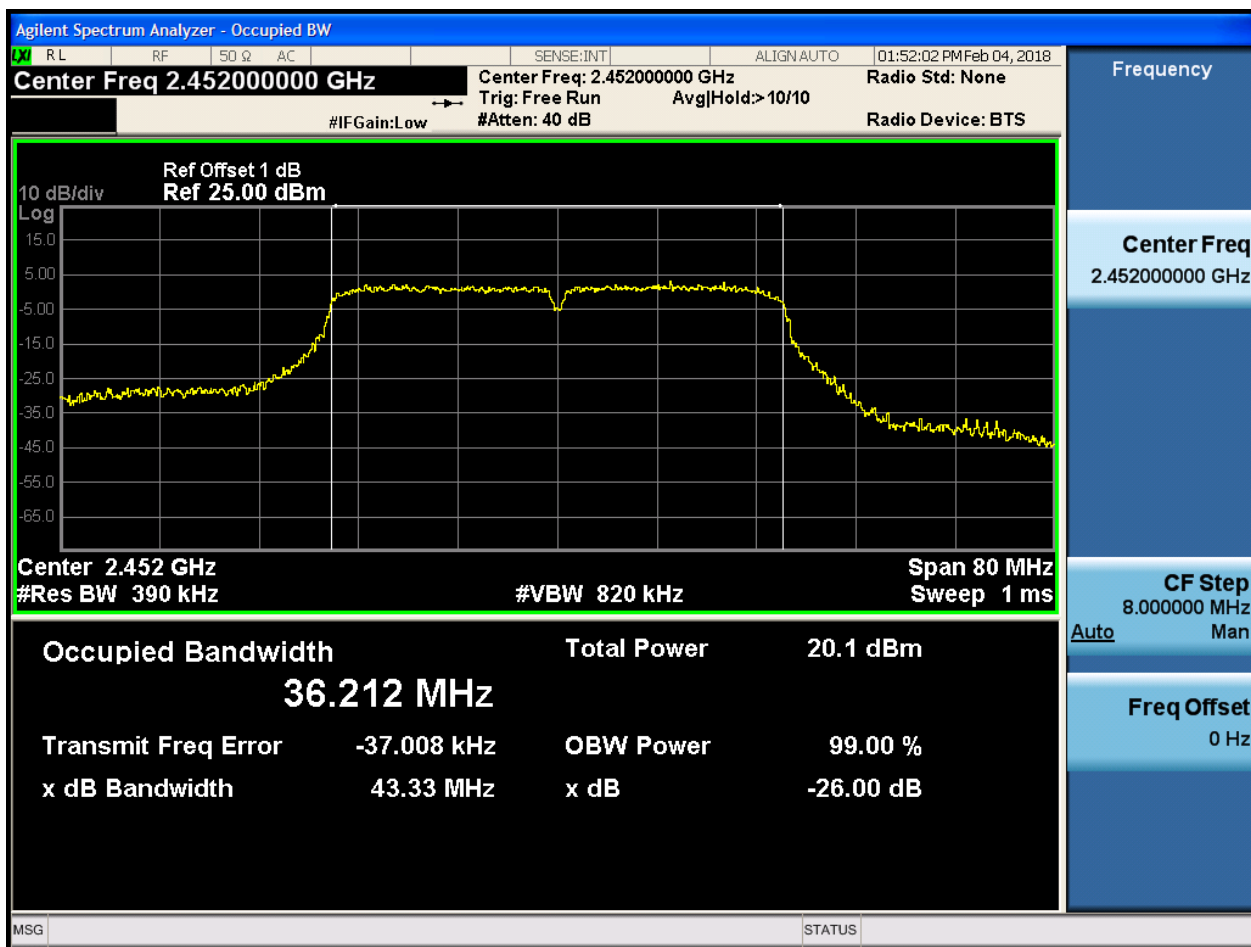

Appendix C: Duty Cycle


Part I - Test Results

Test Mode	TX Freq. [MHz]	Duty cycle [%]
11B	Ant1:CH1,CH6,CH11	97.5
11G	Ant1:CH1,CH2,CH6,CH11	87.2
11N20M	Ant1:CH1,CH2,CH6,CH11	86.4
11N40M	Ant1:CH3, CH6,CH9	75.5




Part II - Test Plots

2.1 11B @Ant 1

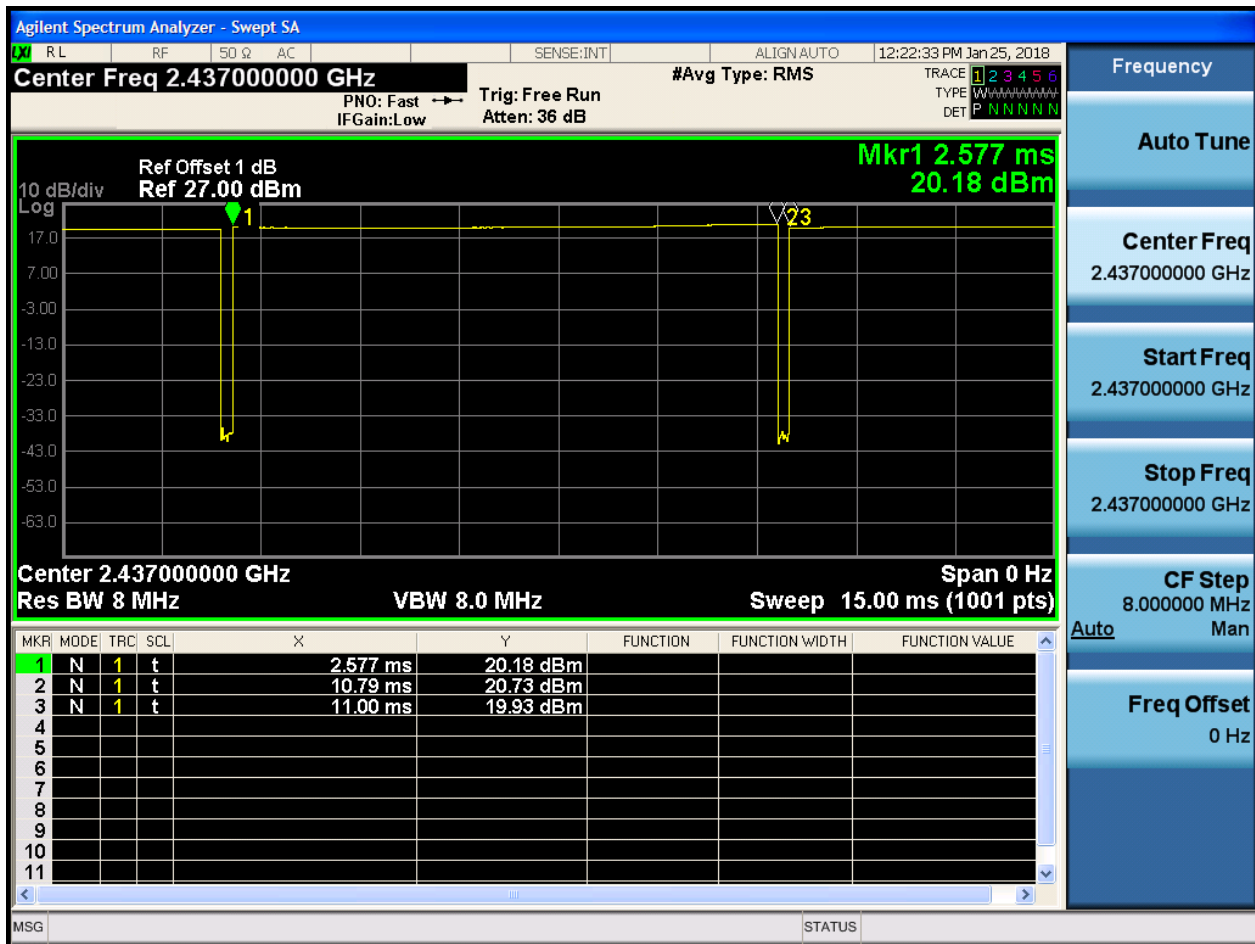




2.2 11G @Ant 1

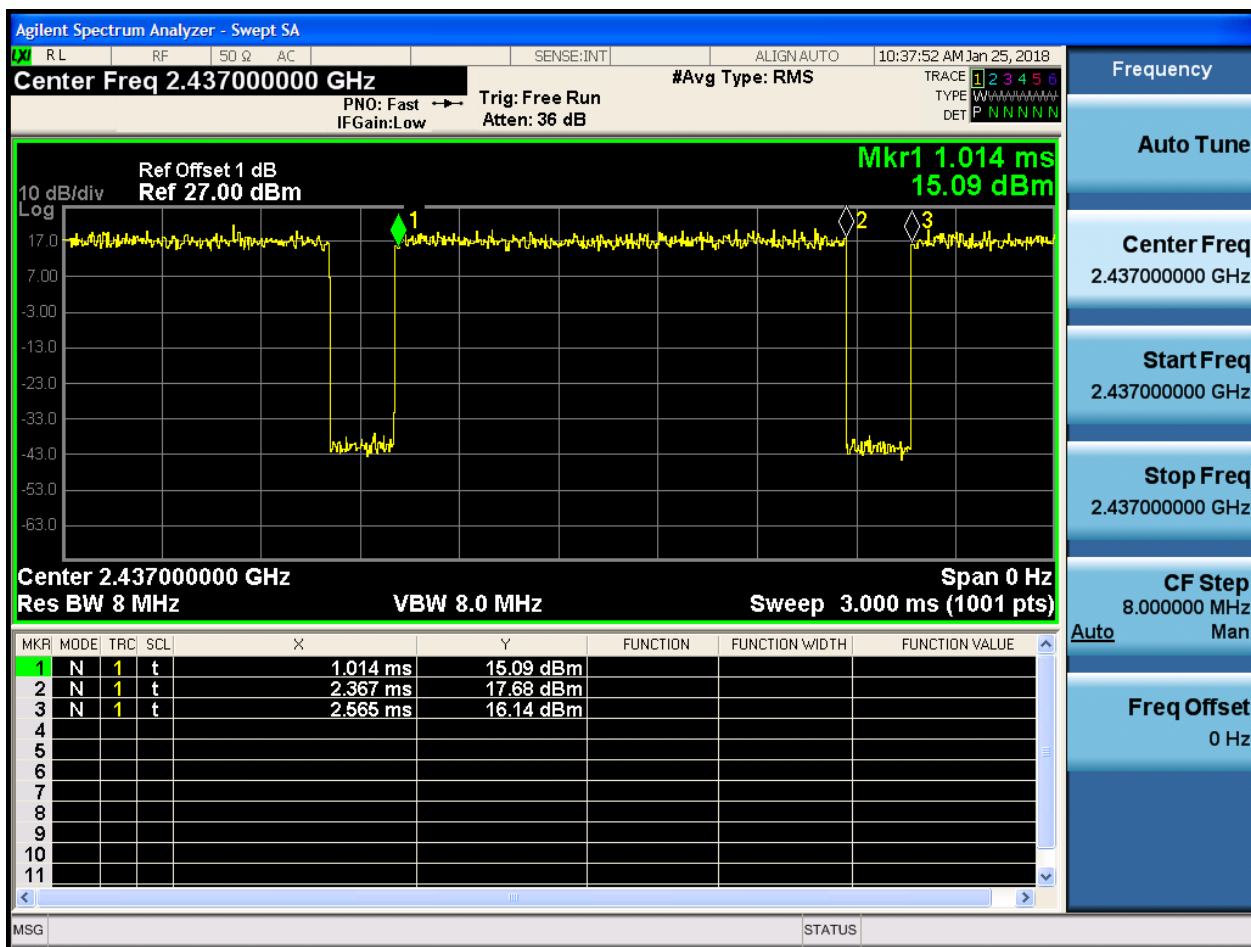




2.3 11N20M @Ant 1

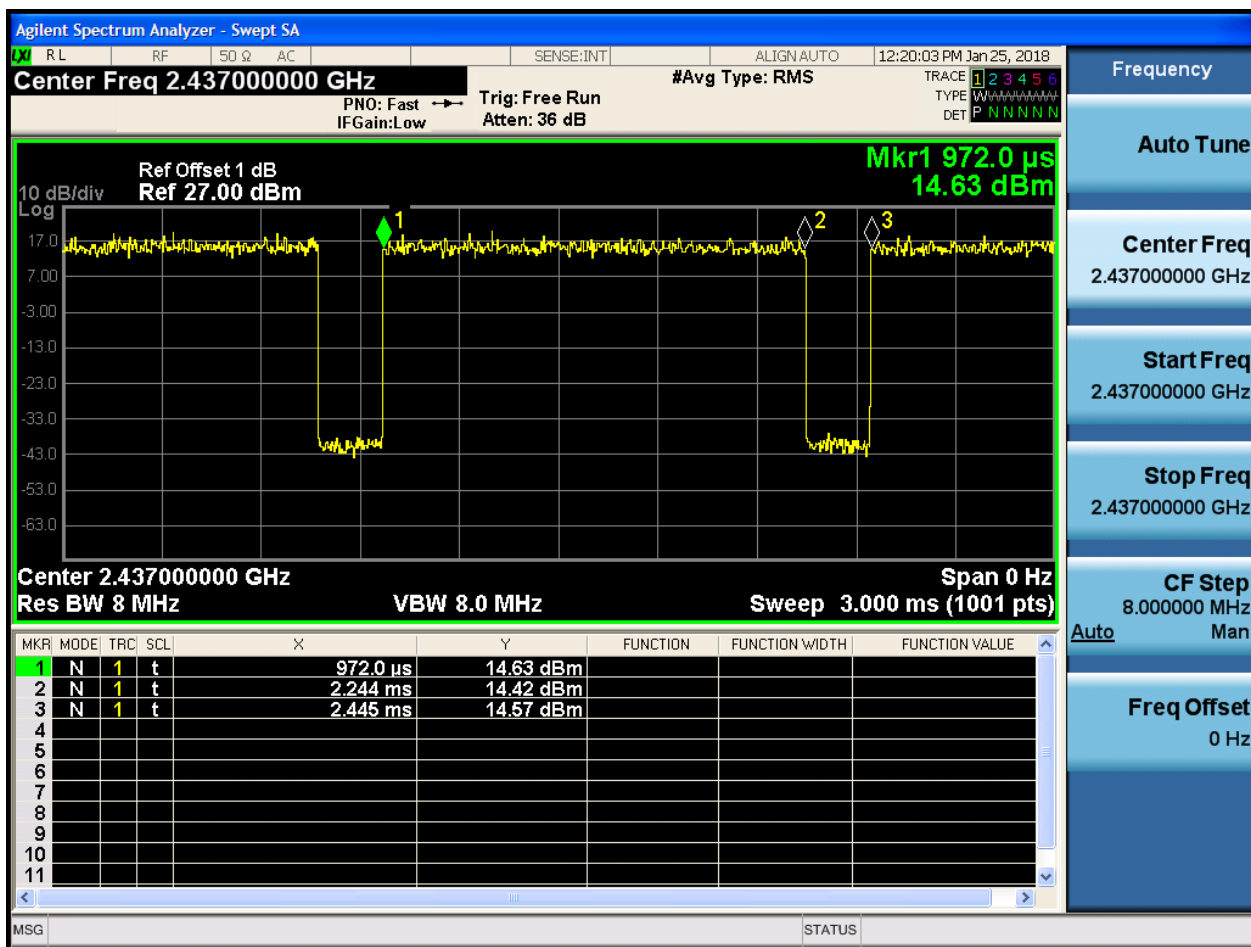



2.4 11N40M @Ant 1

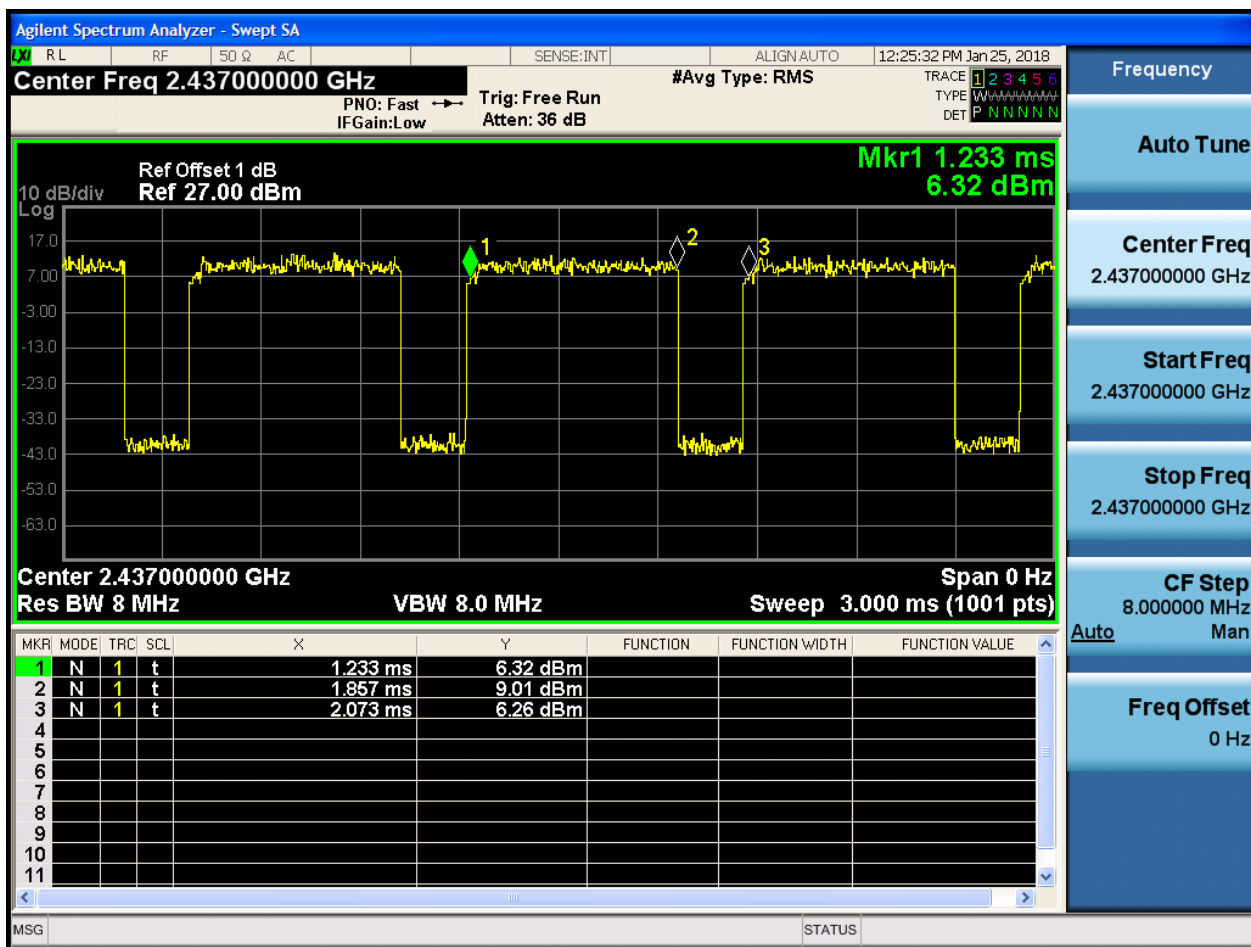

Appendix D: Maximum Conducted Average Output Power


Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Ant	Duty Cycle [%]	Power[dBm]	Verdict
11B	L	2412	Ant 1	97.5	16.61	pass
11B	M	2437	Ant 1	97.5	16.55	pass
11B	H	2462	Ant 1	97.5	16.93	pass
11G	L	2412	Ant 1	87.2	13.97	pass
11G	L	2417	Ant 1	87.2	15.60	pass
11G	M	2437	Ant 1	87.2	15.91	pass
11G	H	2462	Ant 1	87.2	16.04	pass
11N20	L	2412	Ant 1	86.4	13.74	pass
11N20	M	2437	Ant 1	86.4	13.64	pass
11N20	H	2462	Ant 1	86.4	13.91	pass
11N40	L	2422	Ant 1	75.5	13.12	pass
11N40	M	2437	Ant 1	75.5	13.31	pass
11N40	H	2452	Ant 1	75.5	13.12	pass



Part II - Test Plots

2.1 11B_L@Ant 1

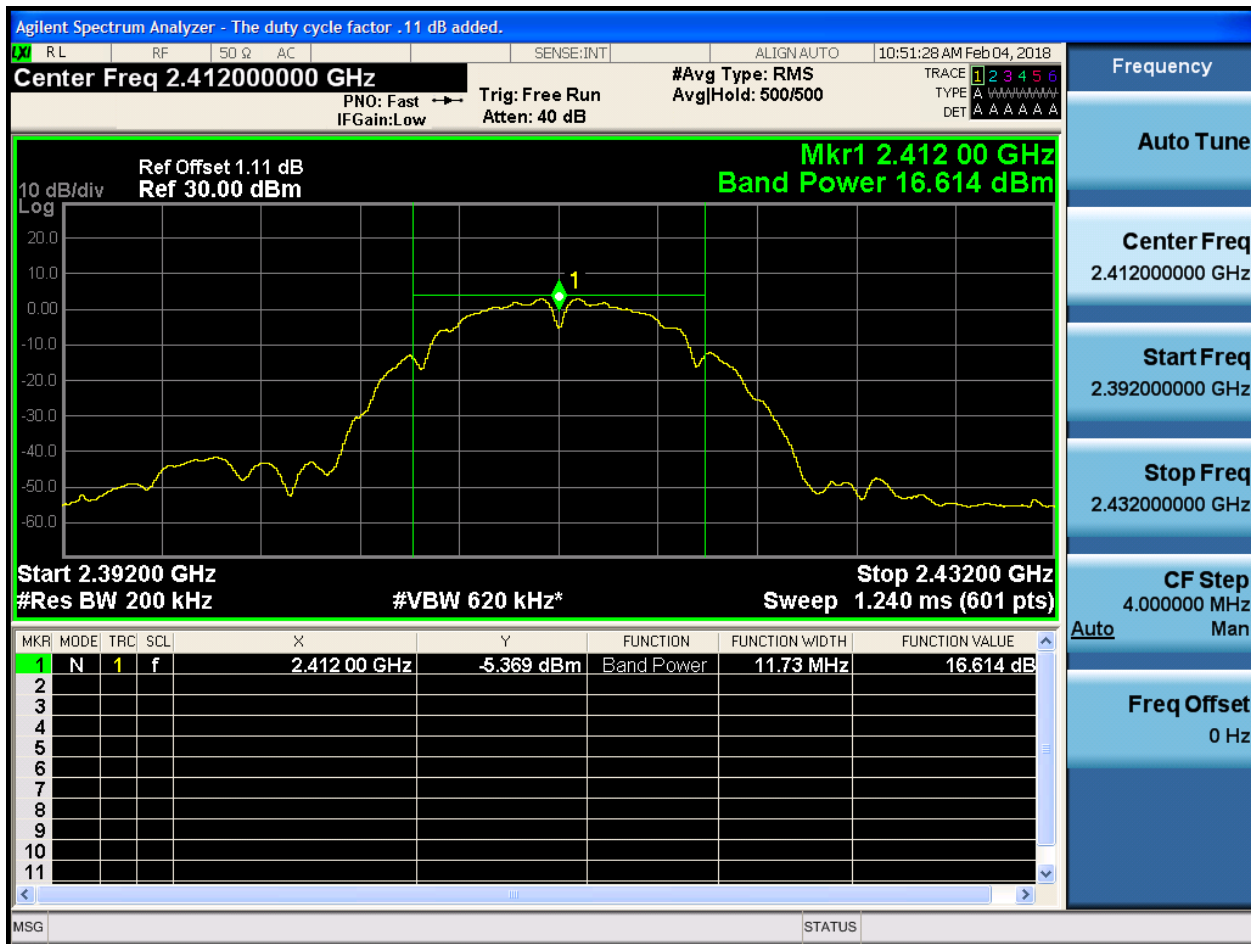




2.2 11B_M@Ant 1






2.3 11B_H@Ant 1

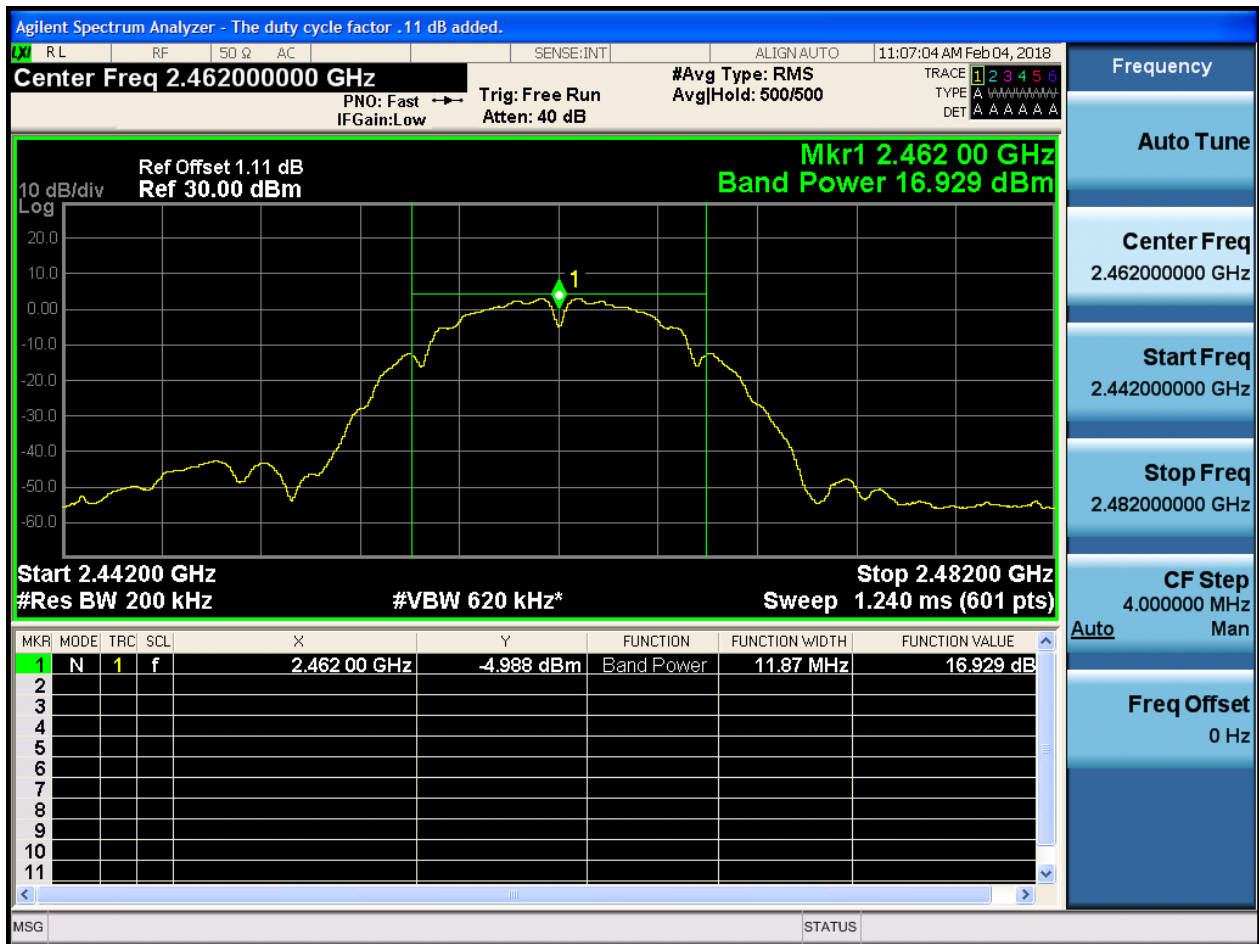



2.4 11G_L_2412@Ant 1

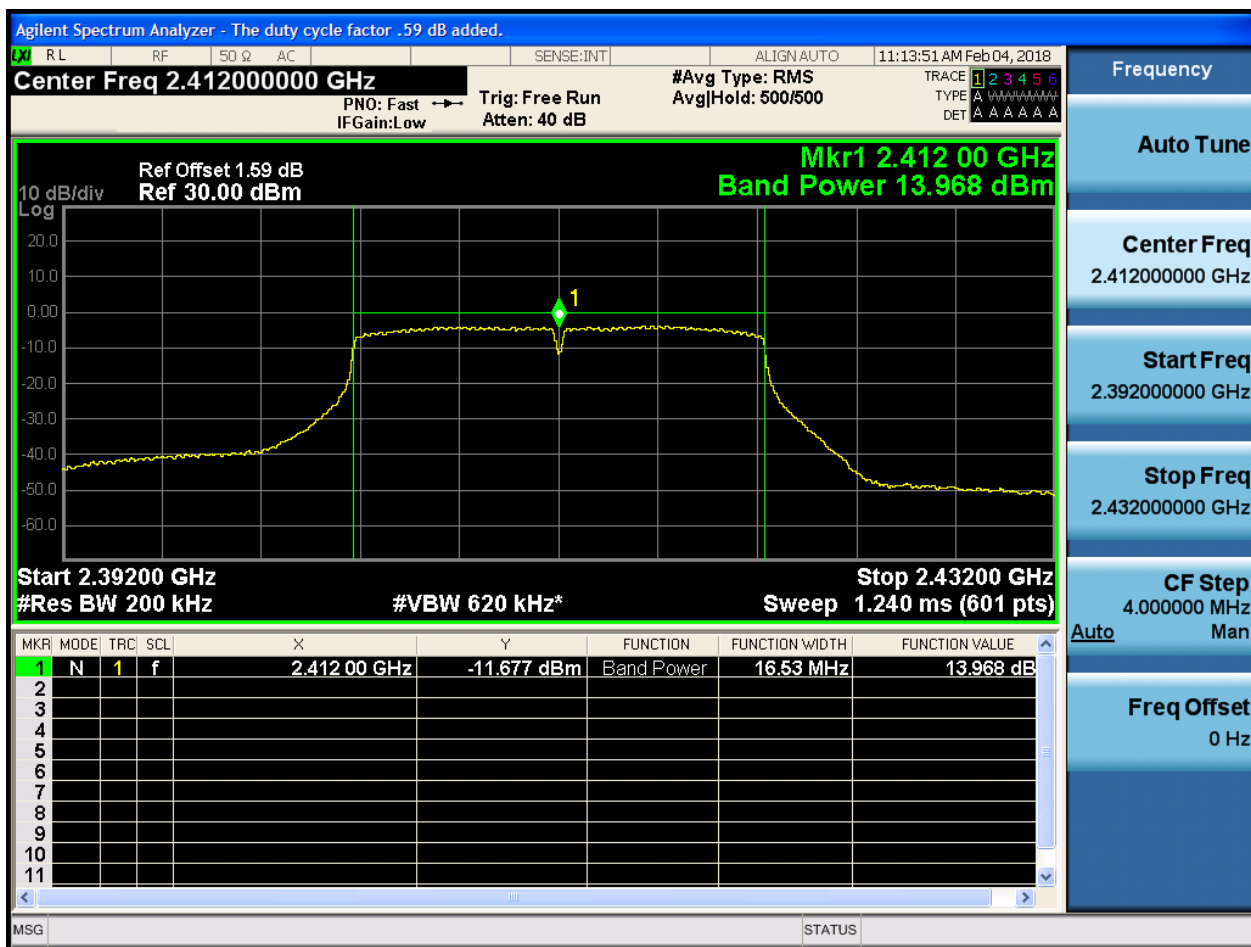



Agilent Spectrum Analyzer - The duty cycle factor .59 dB added.

Center Freq 2.41700000 GHz

#Avg Type: RMS
AvgHold: 500/500

02:46:39 PM Feb 04, 2018

TRACE 1 2 3 4 5 6
TYPE A W W W W W W W W
DET A A A A A A

PNO: Fast → Trig: Free Run
IFGain: Low Atten: 40 dB

Ref Offset 1.59 dB
Ref 30.00 dBm

Mkr1 2.417 00 GHz
Band Power 15.596 dBm

Start 2.39700 GHz
#Res BW 200 kHz

Stop 2.43700 GHz
Sweep 1.240 ms (601 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.417 00 GHz	-10.359 dBm	Band Power	16.53 MHz	15.596 dB
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								

MSG STATUS

Frequency

Auto Tune

Center Freq
2.41700000 GHz

Start Freq
2.39700000 GHz

Stop Freq
2.43700000 GHz


CF Step
4.000000 MHz
Man

Auto

Freq Offset
0 Hz




2.6 11G_M@Ant 1

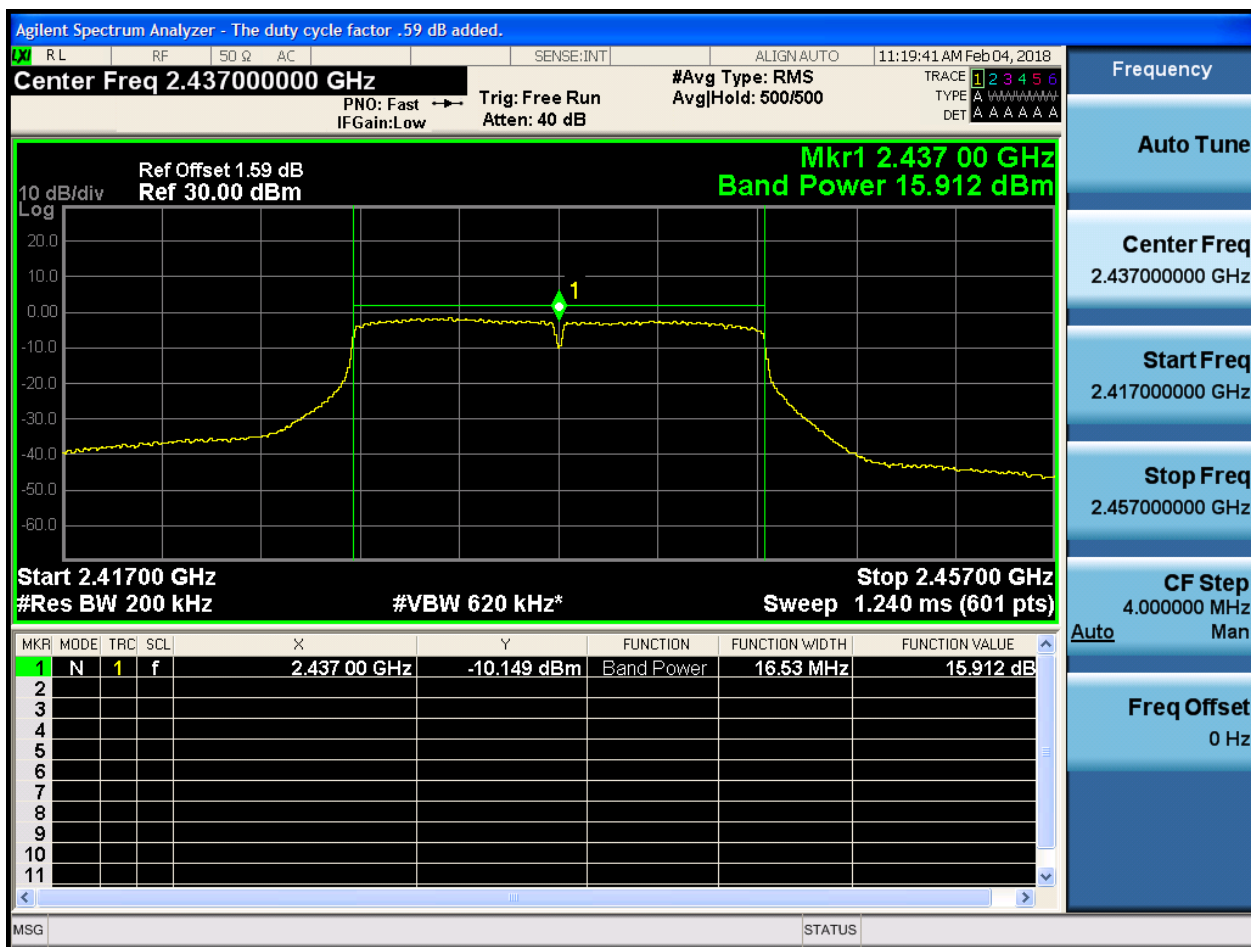




2.7 11G_H@Ant 1

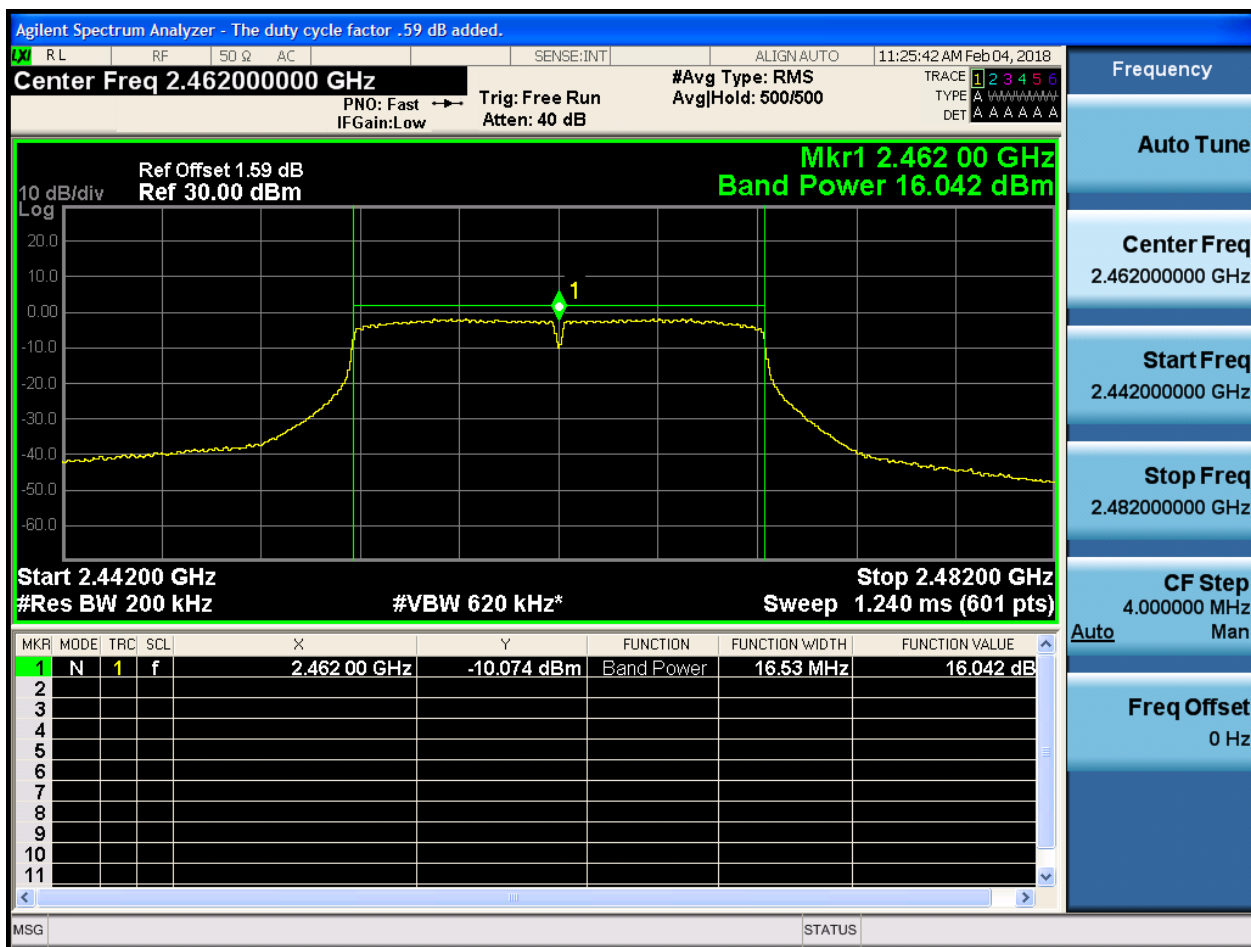



2.8 11N20_L@Ant 1

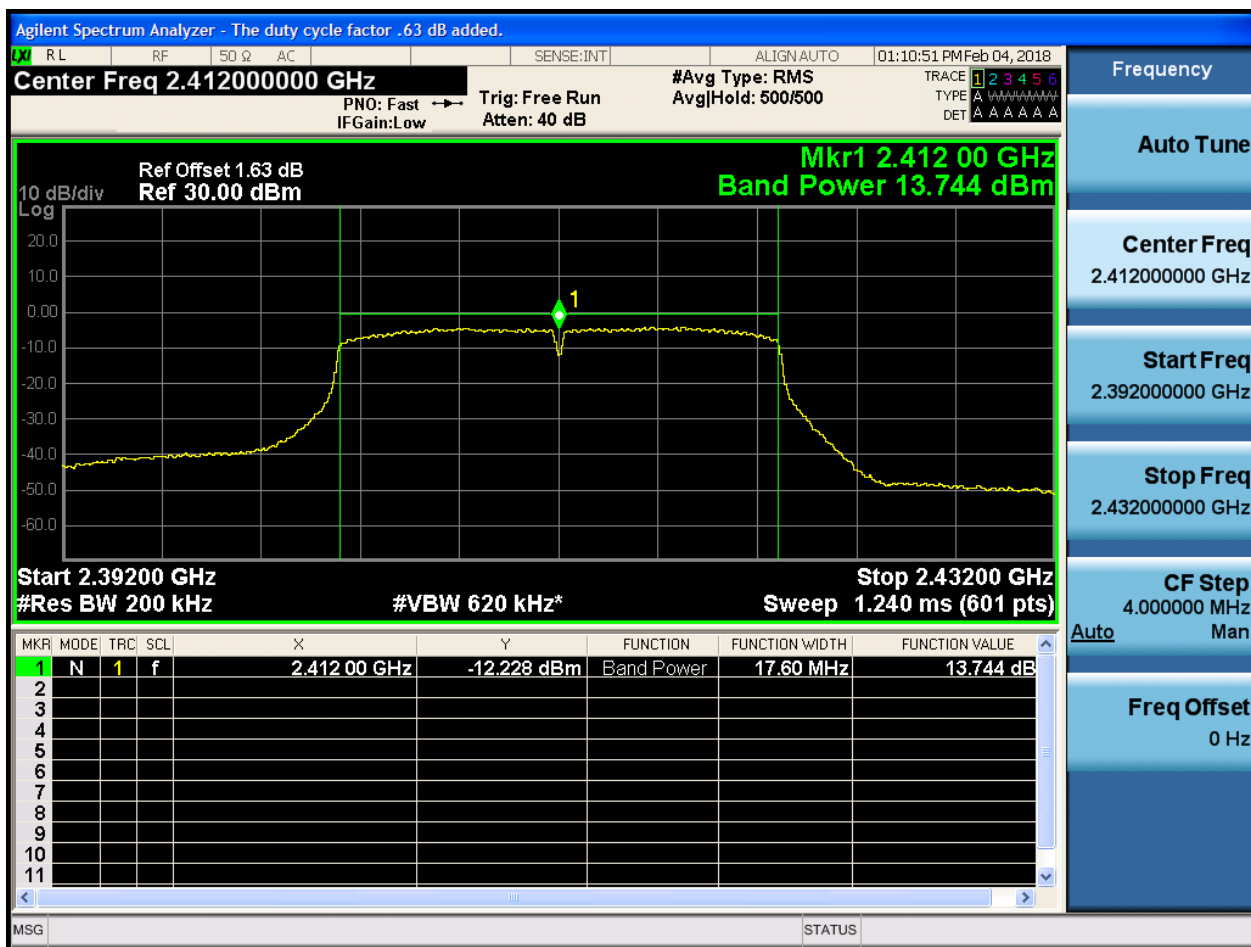



Agilent Spectrum Analyzer - The duty cycle factor .63 dB added.

Center Freq 2.437000000 GHz

#Avg Type: RMS
Avg|Hold: 500/500

Ref Offset 1.63 dB
Ref 30.00 dBm

Mkr1 2.437 00 GHz
Band Power 13.639 dBm

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.437 00 GHz	-12.562 dBm	Band Power	17.60 MHz	13.639 dB
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								

Start 2.41700 GHz
#Res BW 200 kHz

Stop 2.45700 GHz
Sweep 1.240 ms (601 pts)

#VBW 620 kHz*

Frequency

Auto Tune

Center Freq
2.437000000 GHz

Start Freq
2.417000000 GHz

Stop Freq
2.457000000 GHz

CF Step
4.000000 MHz

Auto


Freq Offset
0 Hz

MSG

STATUS




2.10 11N20_H@Ant 1

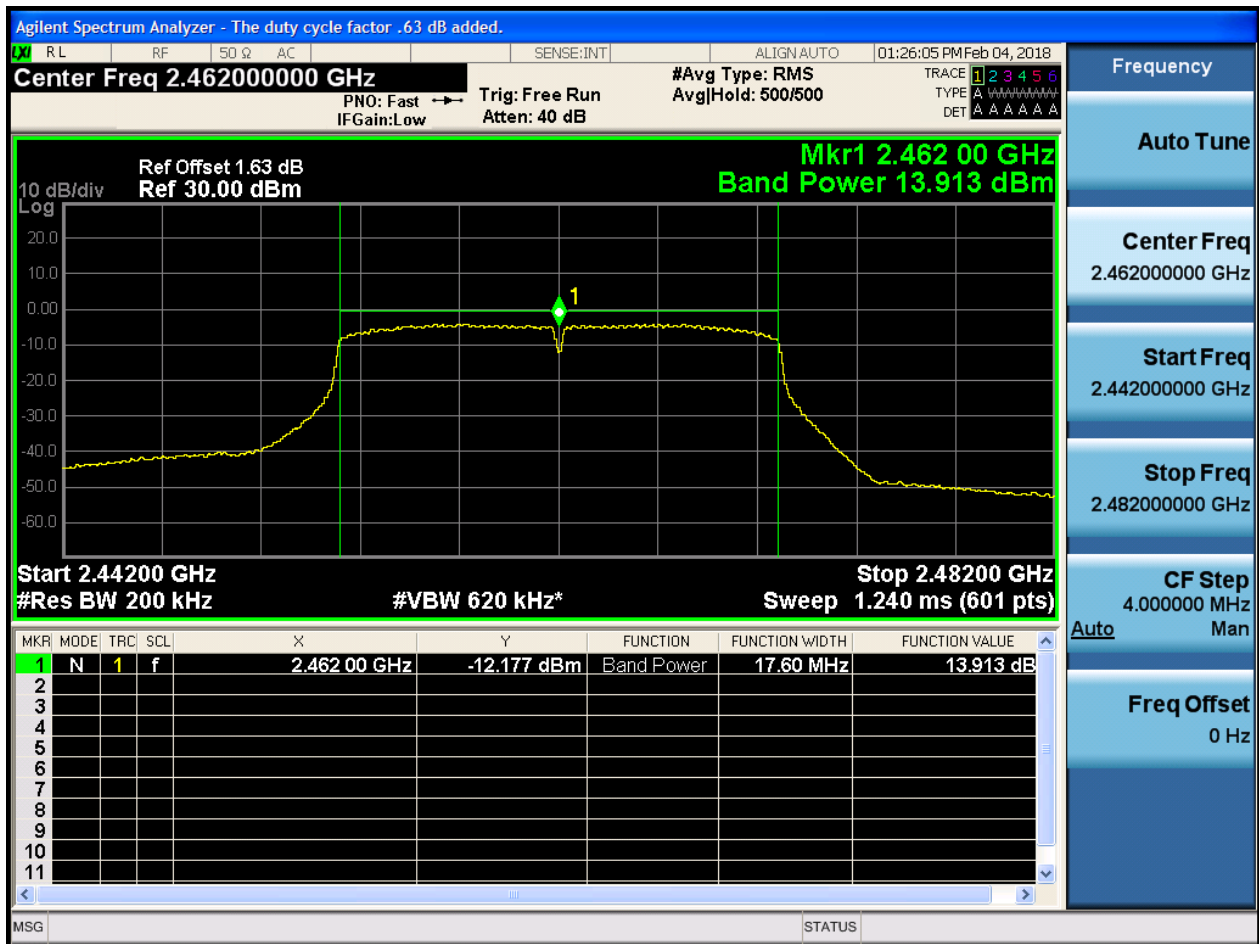



2.11 11N40_L@Ant 1

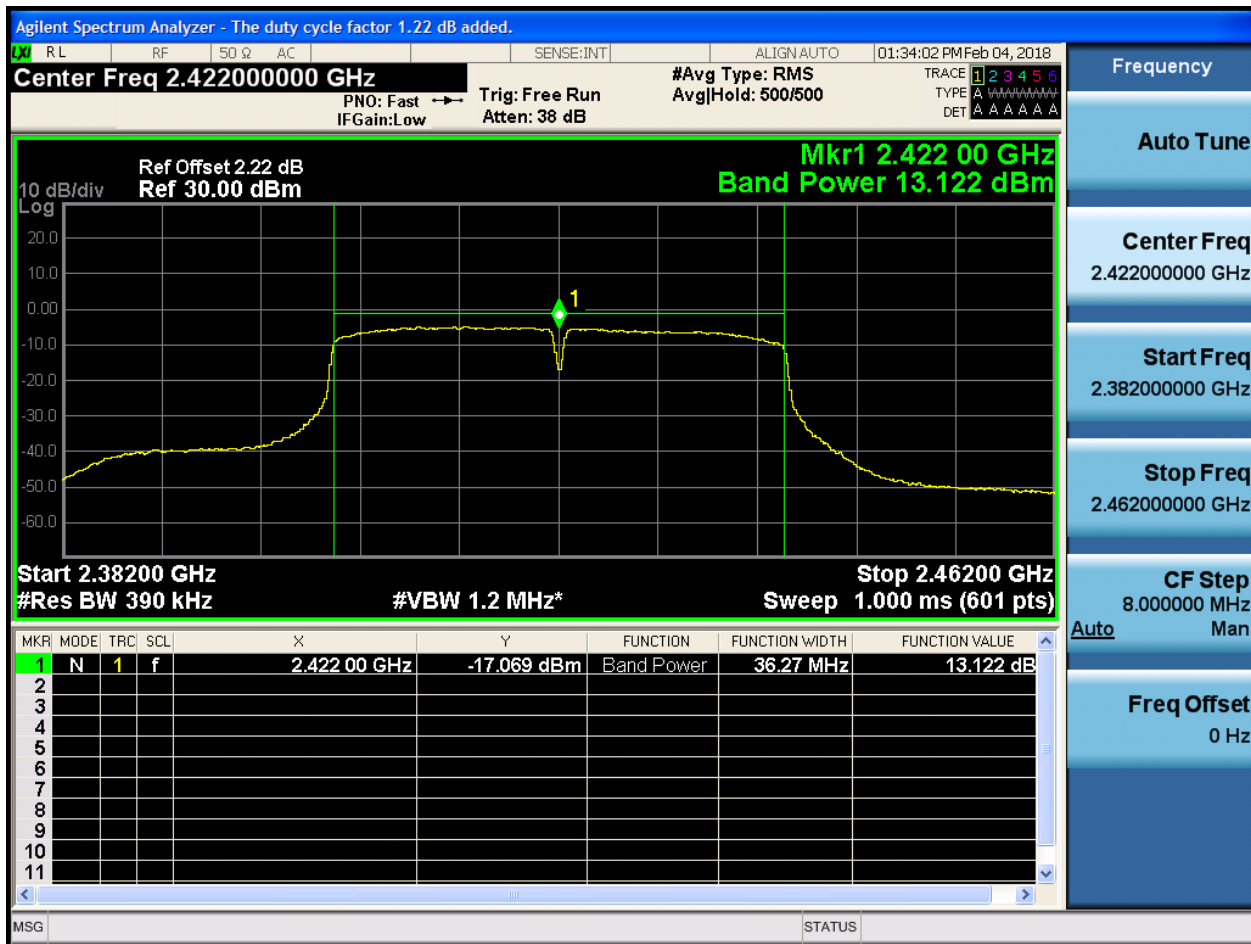



Agilent Spectrum Analyzer - The duty cycle factor 1.22 dB added.

Center Freq 2.43700000 GHz

PNO: Fast → Trig: Free Run
IFGain:Low Atten: 38 dB

#Avg Type: RMS
AvgHold: 500/500

01:43:01 PM Feb 04, 2018

TRACE 1 2 3 4 5 6
TYPE A W W W W W W W W
DET A A A A A A

Ref Offset 2.22 dB
Ref 30.00 dBm

Mkr1 2.437 00 GHz
Band Power 13.308 dBm

10 dB/div
Log

Start 2.39700 GHz
#Res BW 390 kHz

Stop 2.47700 GHz
Sweep 1.000 ms (601 pts)

#VBW 1.2 MHz*

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.437 00 GHz	-17.416 dBm	Band Power	36.53 MHz	13.308 dB
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								

Auto Tune

Center Freq
2.437000000 GHz

Start Freq
2.397000000 GHz

Stop Freq
2.477000000 GHz


CF Step
8.000000 MHz
Auto Man

Freq Offset
0 Hz

MSG STATUS



2.13 11N40_H@Ant 1

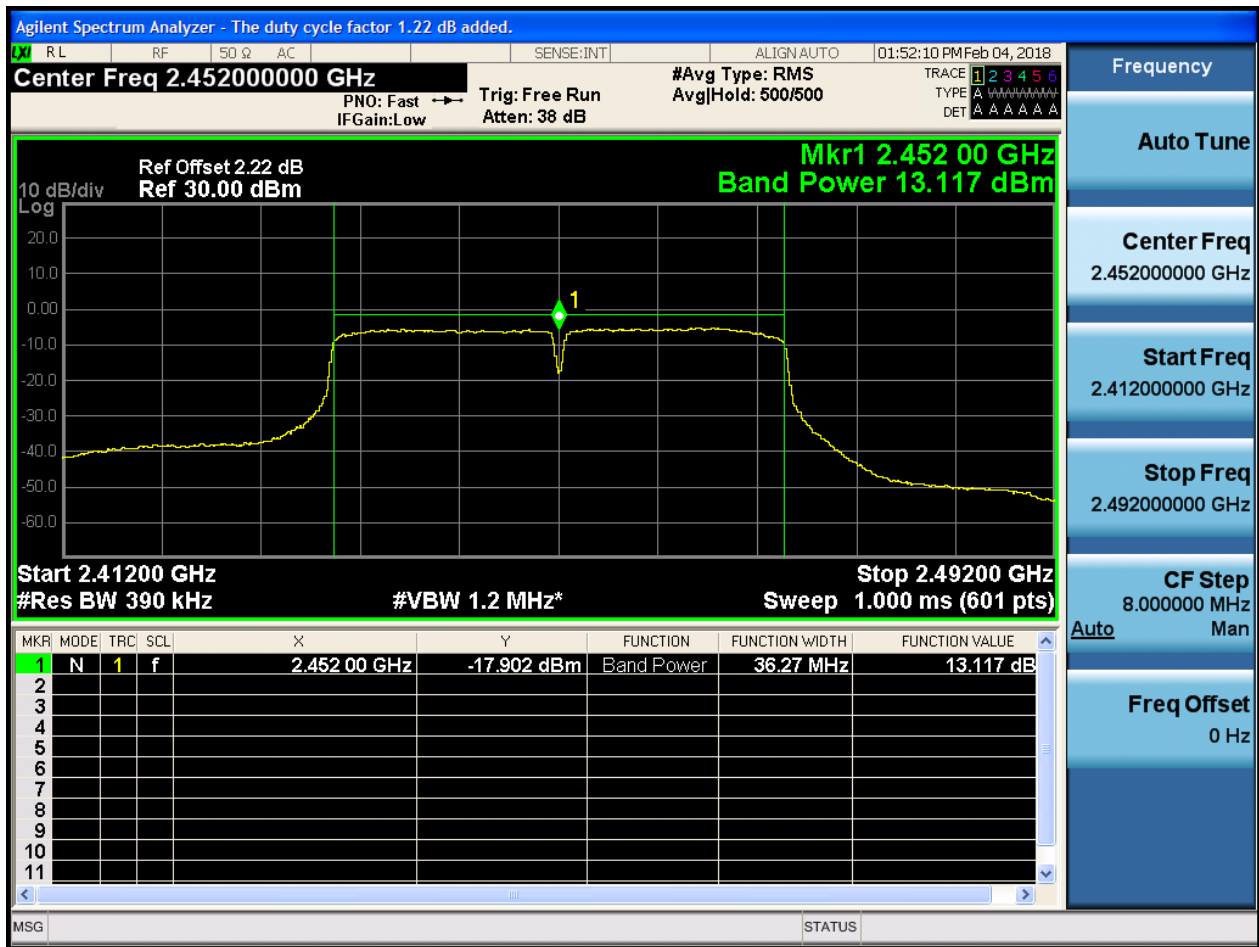

Appendix E: Maximum Power Spectral Density Level


Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Ant	Duty Cycle [%]	PSD[dBm/10 kHz]	Verdict
11B	L	2412	Ant 1	97.5	-9.30	pass
11B	M	2437	Ant 1	97.5	-9.31	pass
11B	H	2462	Ant 1	97.5	-9.04	pass
11G	L	2412	Ant 1	87.2	-15.25	pass
11G	L	2417	Ant 1	87.2	-13.30	pass
11G	M	2437	Ant 1	87.2	-13.20	pass
11G	H	2462	Ant 1	87.2	-13.09	pass
11N20	L	2412	Ant 1	86.4	-15.38	pass
11N20	M	2437	Ant 1	86.4	-15.25	pass
11N20	H	2462	Ant 1	86.4	-15.26	pass
11N40	L	2422	Ant 1	75.5	-17.22	pass
11N40	M	2437	Ant 1	75.5	-17.61	pass
11N40	H	2452	Ant 1	75.5	-18.41	pass




Part II - Test Plots

2.1 11B_L@Ant 1

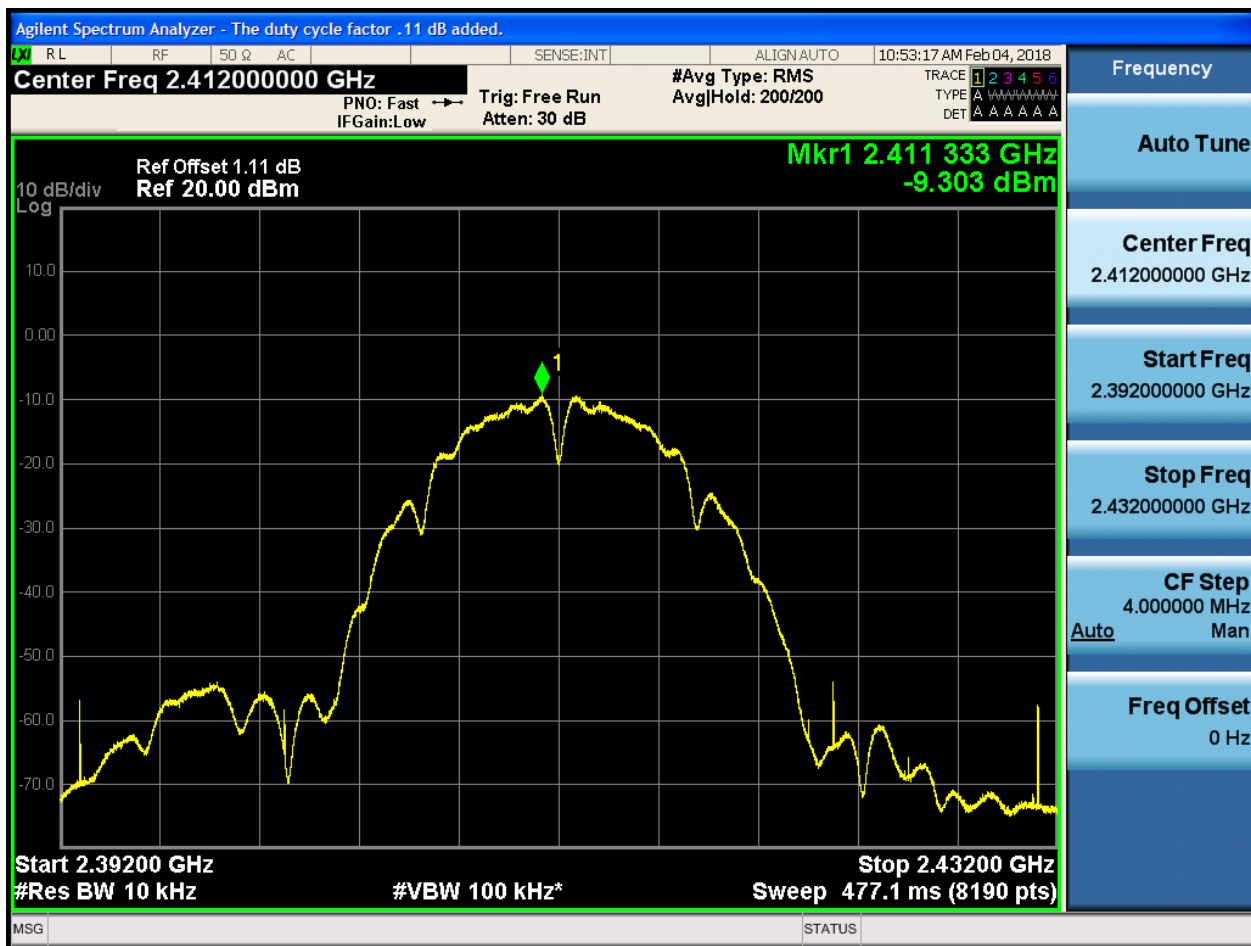




2.2 11B_M@Ant 1

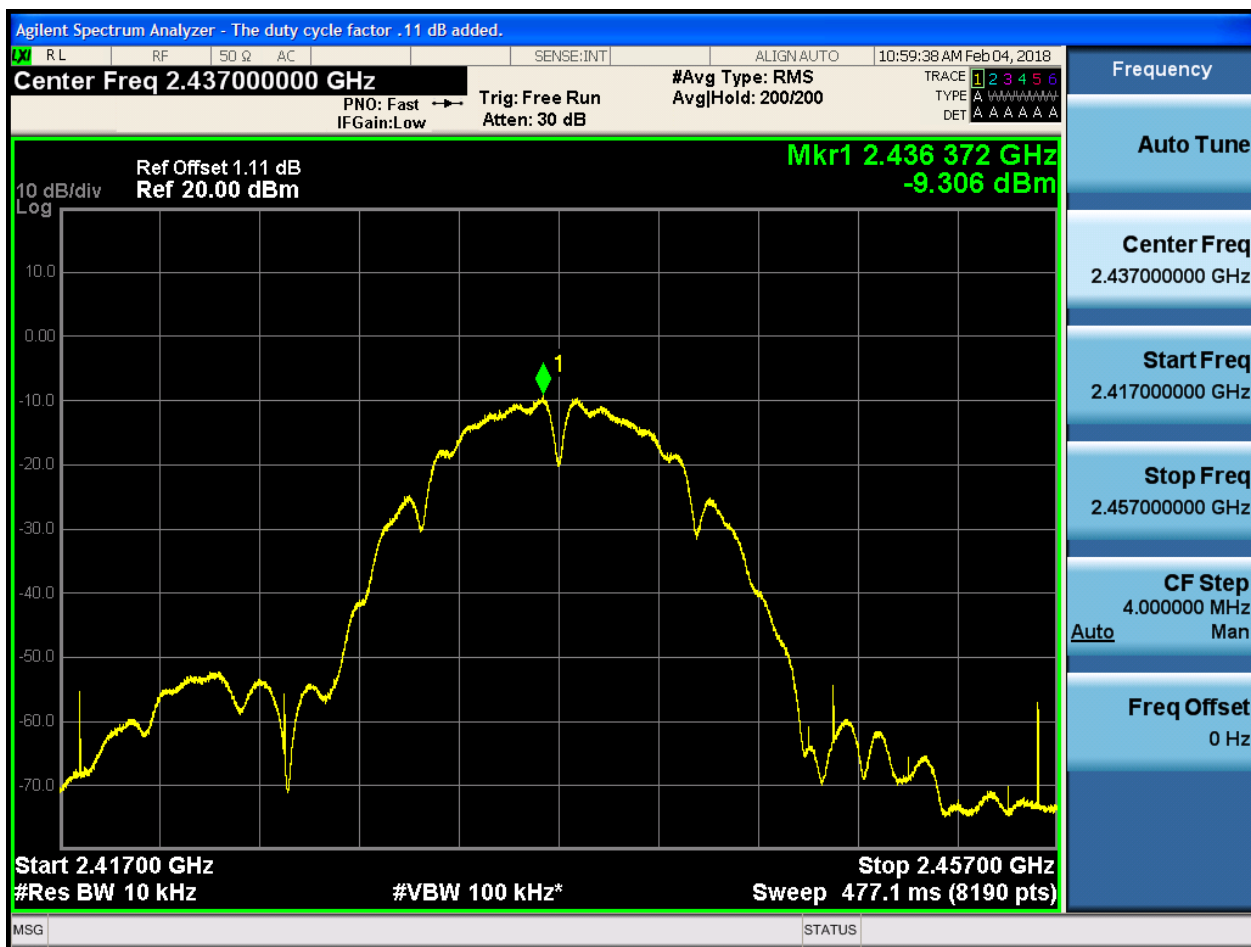




2.3 11B_H@Ant 1

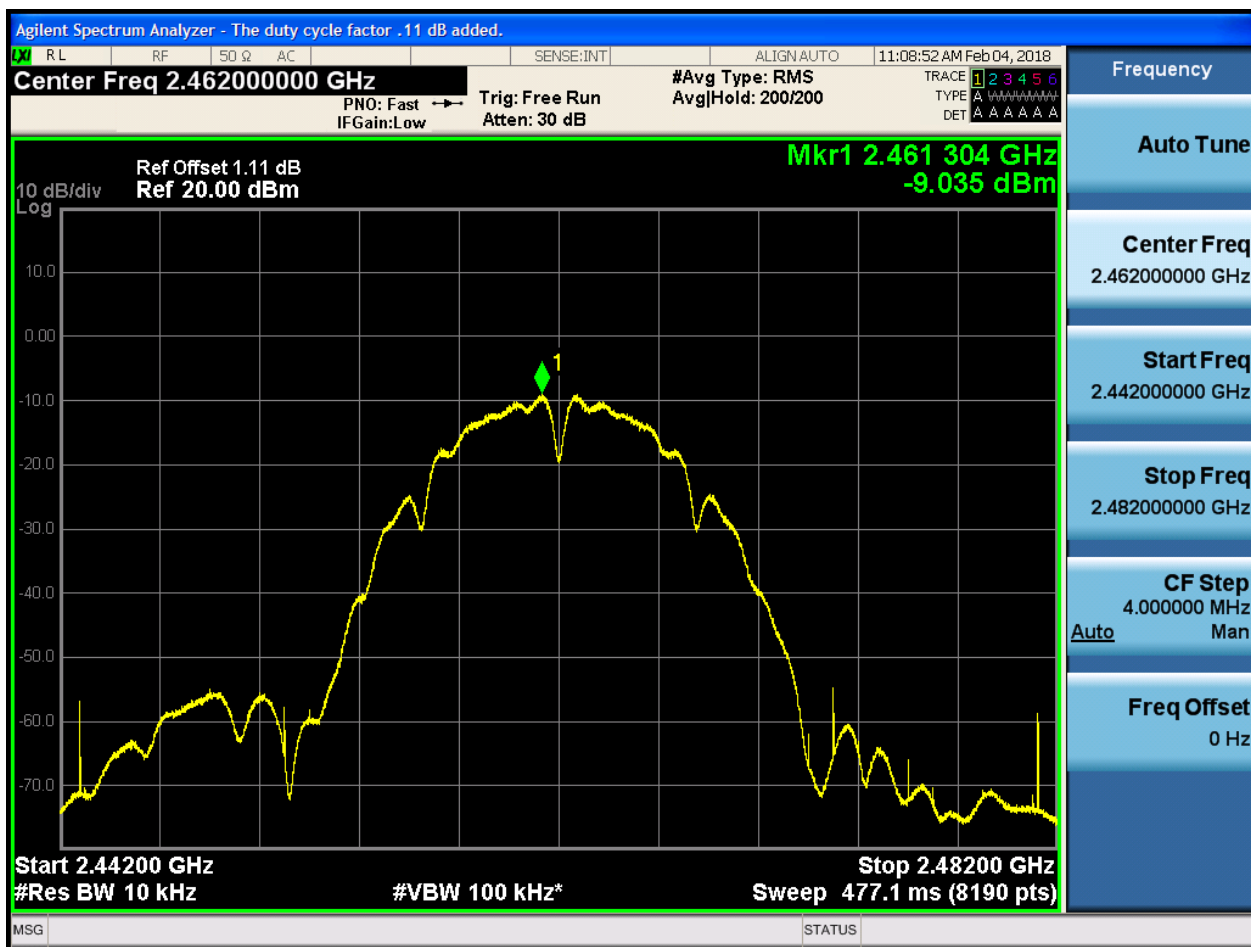


2.4 11G_L_2412@Ant 1

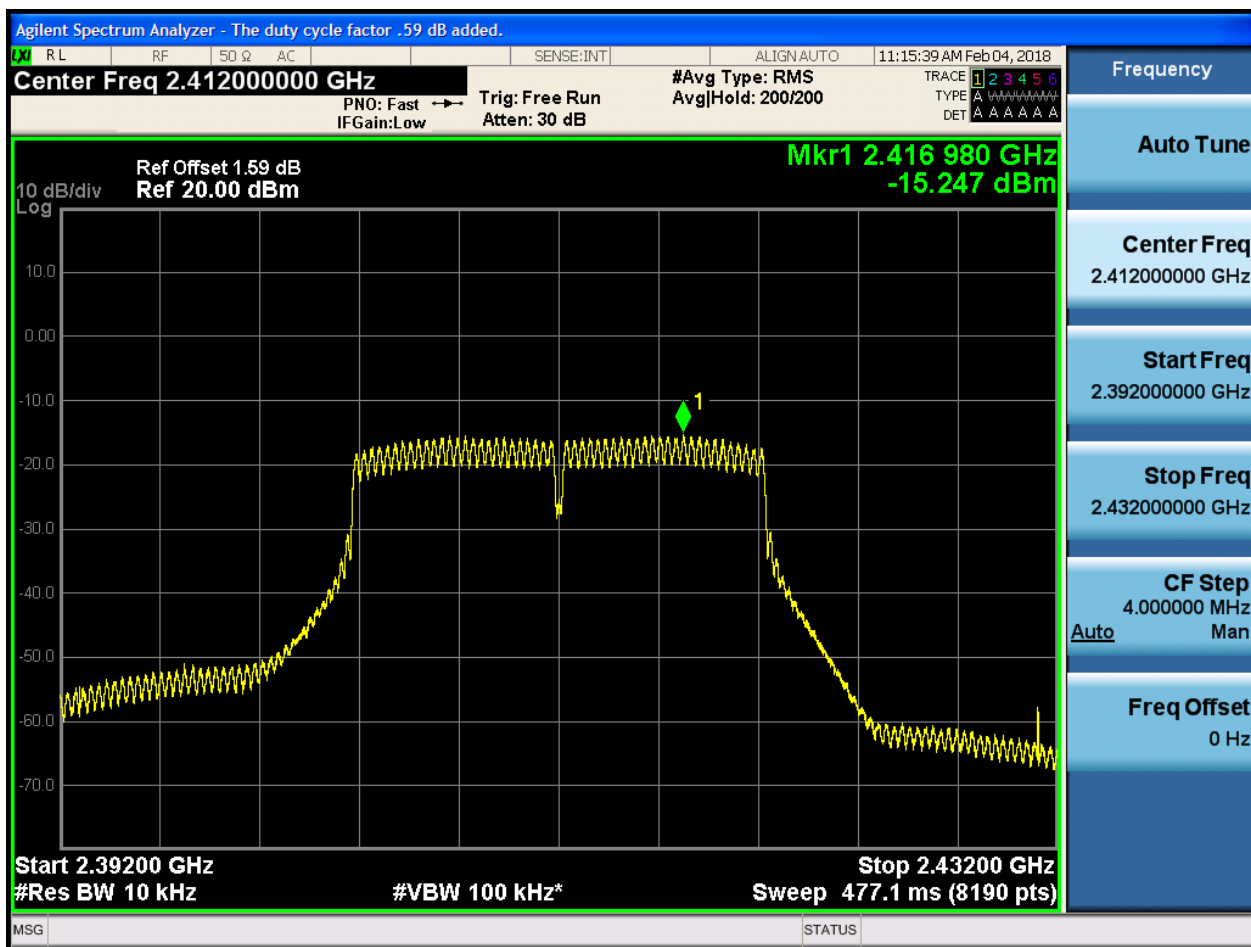




2.5 11G_L_2417@Ant 1

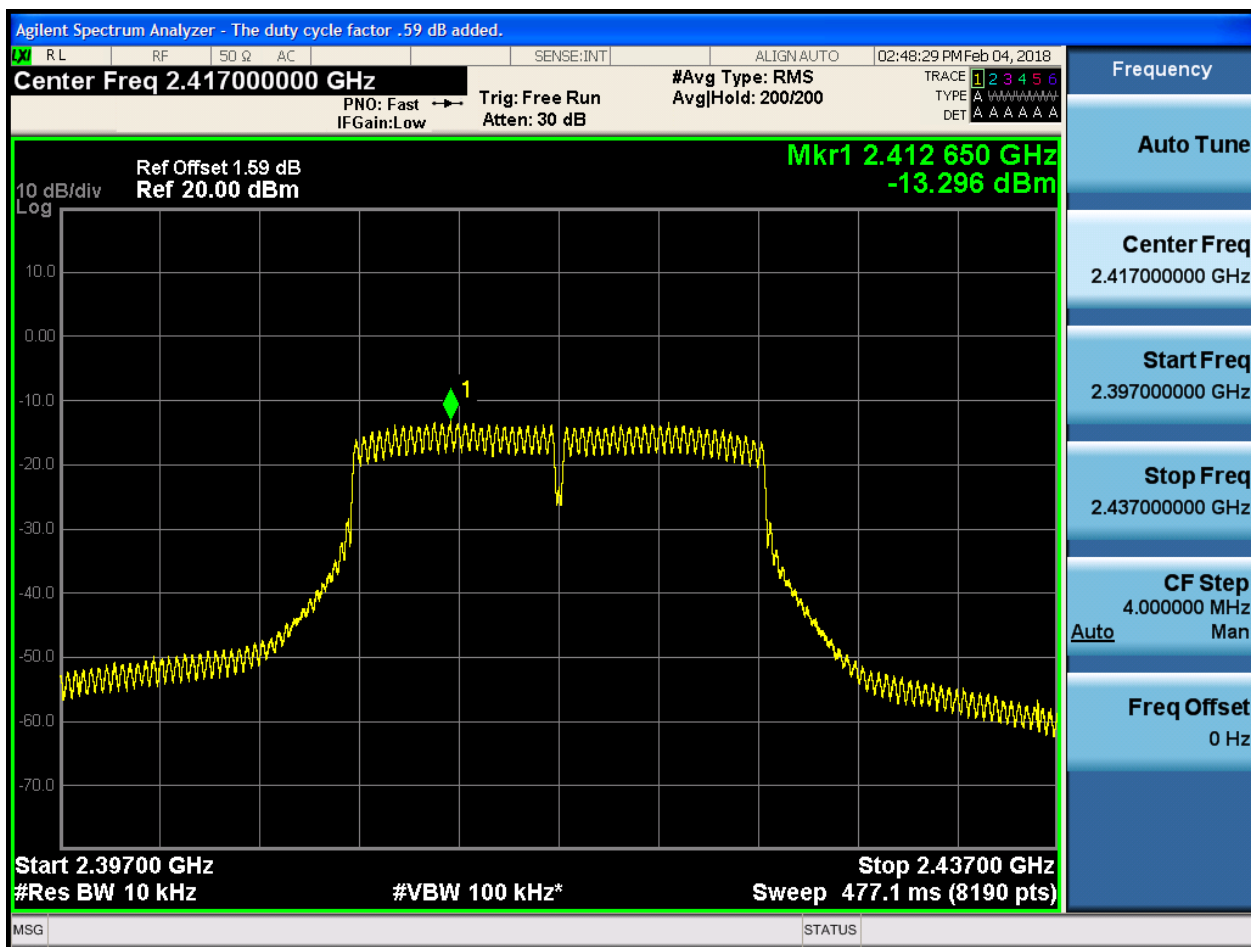





2.6 11G_M@Ant 1

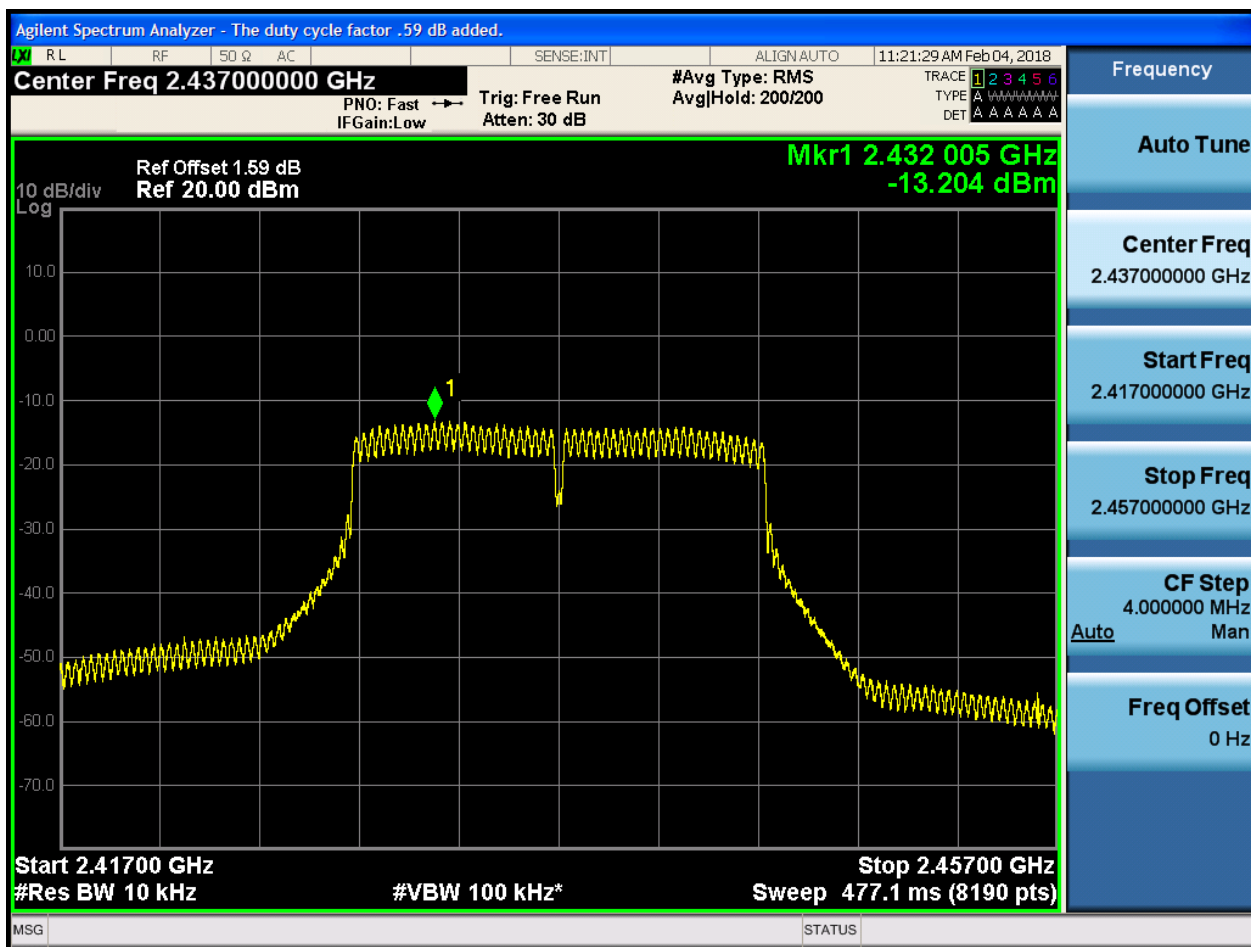


2.7 11G_H@Ant 1

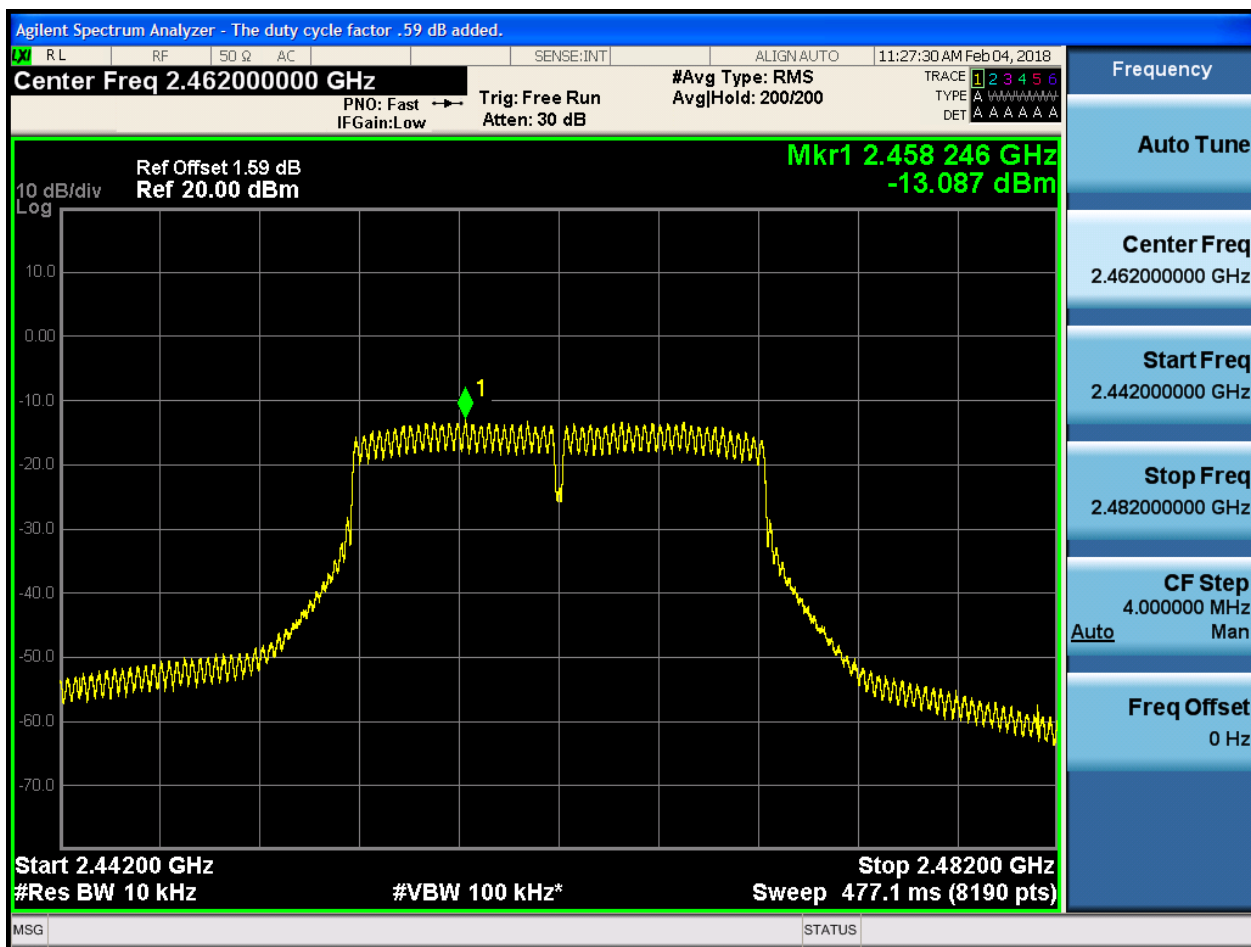

2.8 11N20_L@Ant 1

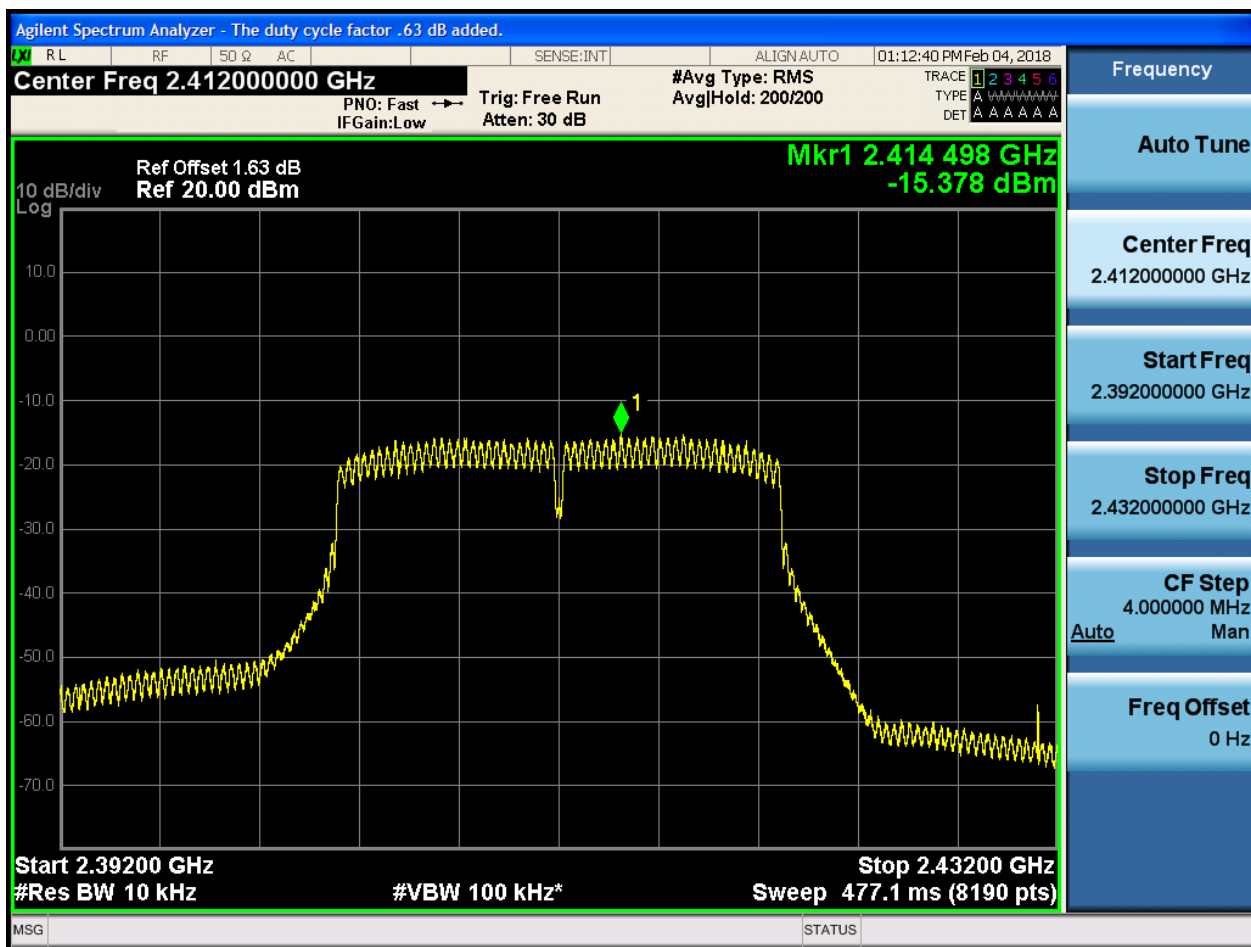

2.9 11N20_M@Ant 1

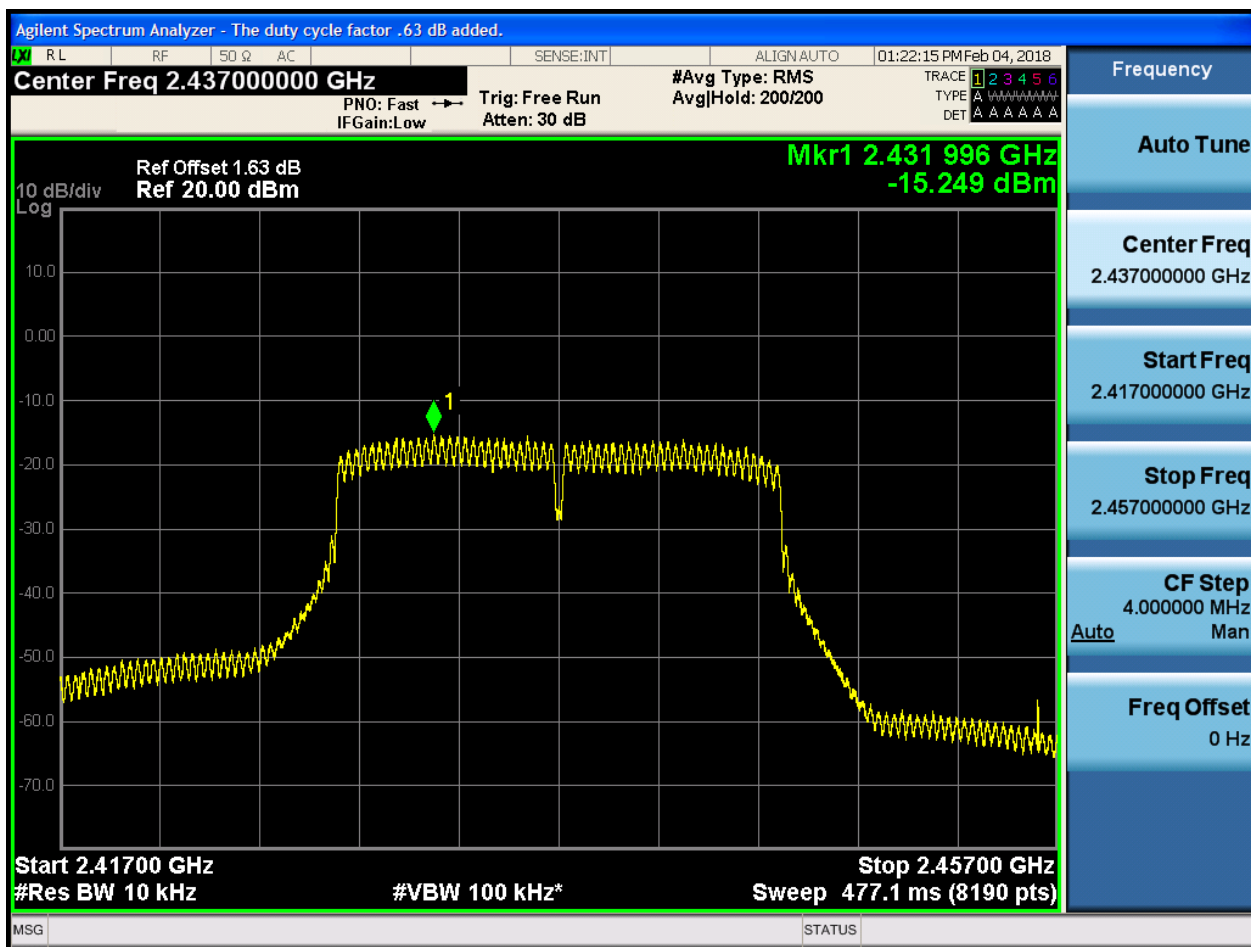



Agilent Spectrum Analyzer - The duty cycle factor .63 dB added.

RL RF 50 Ω AC SENSE:INT ALIGN AUTO 01:27:54 PM Feb 04, 2018

Center Freq 2.462000000 GHz #Avg Type: RMS Avg/Hold: 200/200
PNO: Fast IFGain:Low Trig: Free Run Atten: 30 dB
TRACE 1 2 3 4 5 6
TYPE A W W W W W W W W
DET A A A A A A

Ref Offset 1.63 dB
Ref 20.00 dBm

**Mkr1 2.458 280 GHz
-15.261 dBm**

10 dB/div
Log

Start 2.44200 GHz #Res BW 10 kHz #VBW 100 kHz* Stop 2.48200 GHz
Sweep 477.1 ms (8190 pts)

MSG STATUS

Frequency

Auto Tune

Center Freq
2.462000000 GHz

Start Freq
2.442000000 GHz


Stop Freq
2.482000000 GHz

CF Step
4.000000 MHz
Auto Man

Freq Offset
0 Hz




2.11 11N40_L@Ant 1

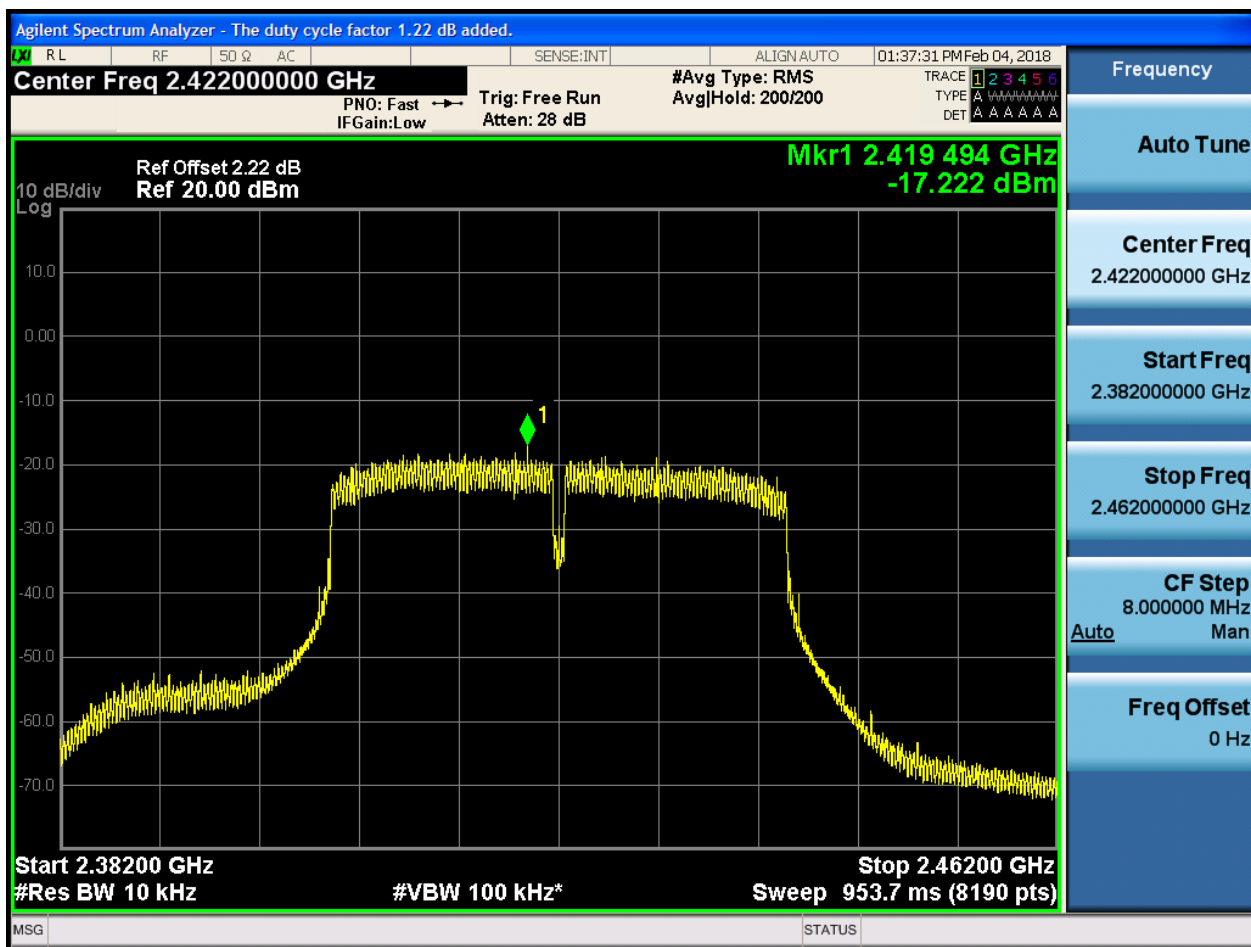




2.12 11N40_M@Ant 1

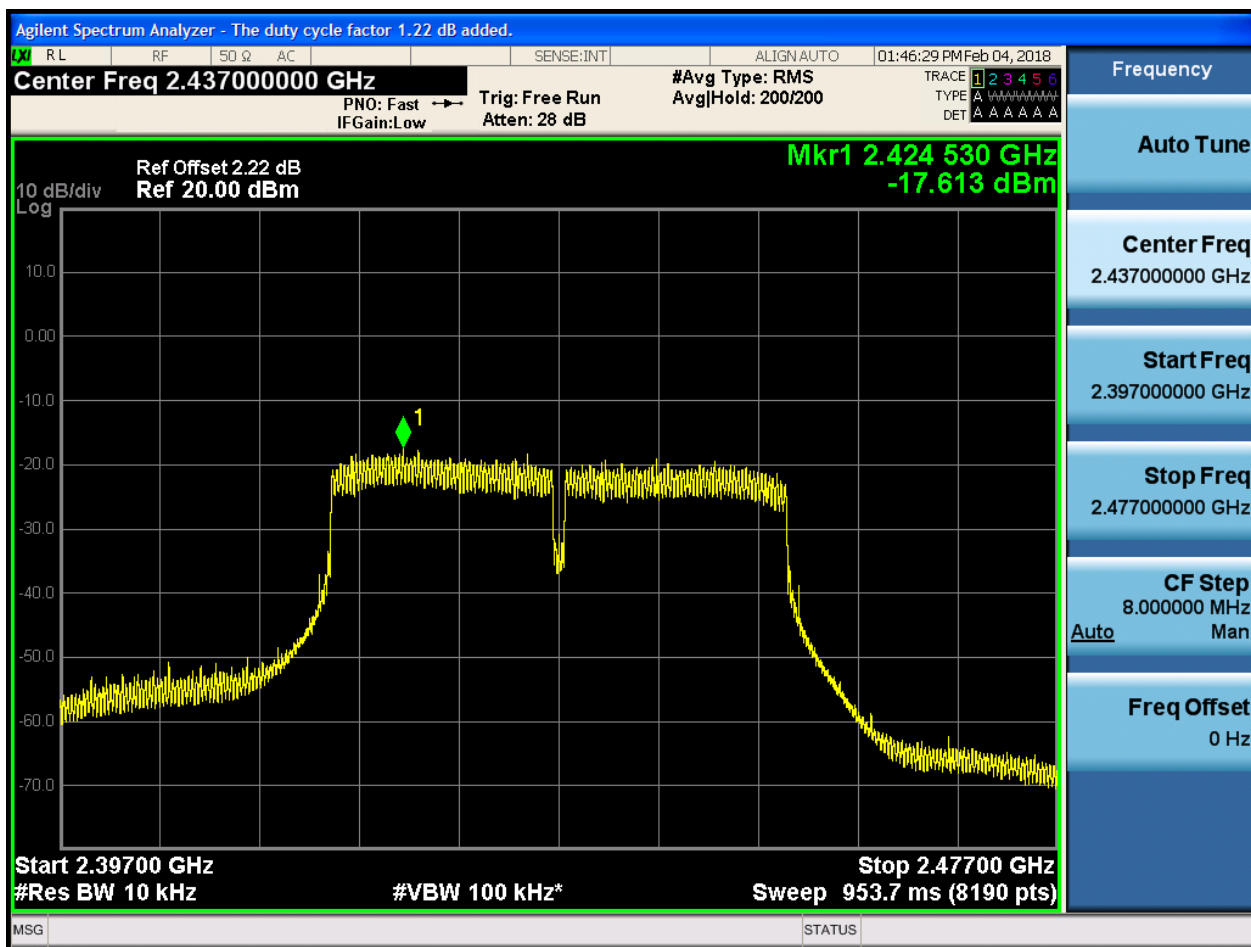



2.13 11N40_H@Ant 1

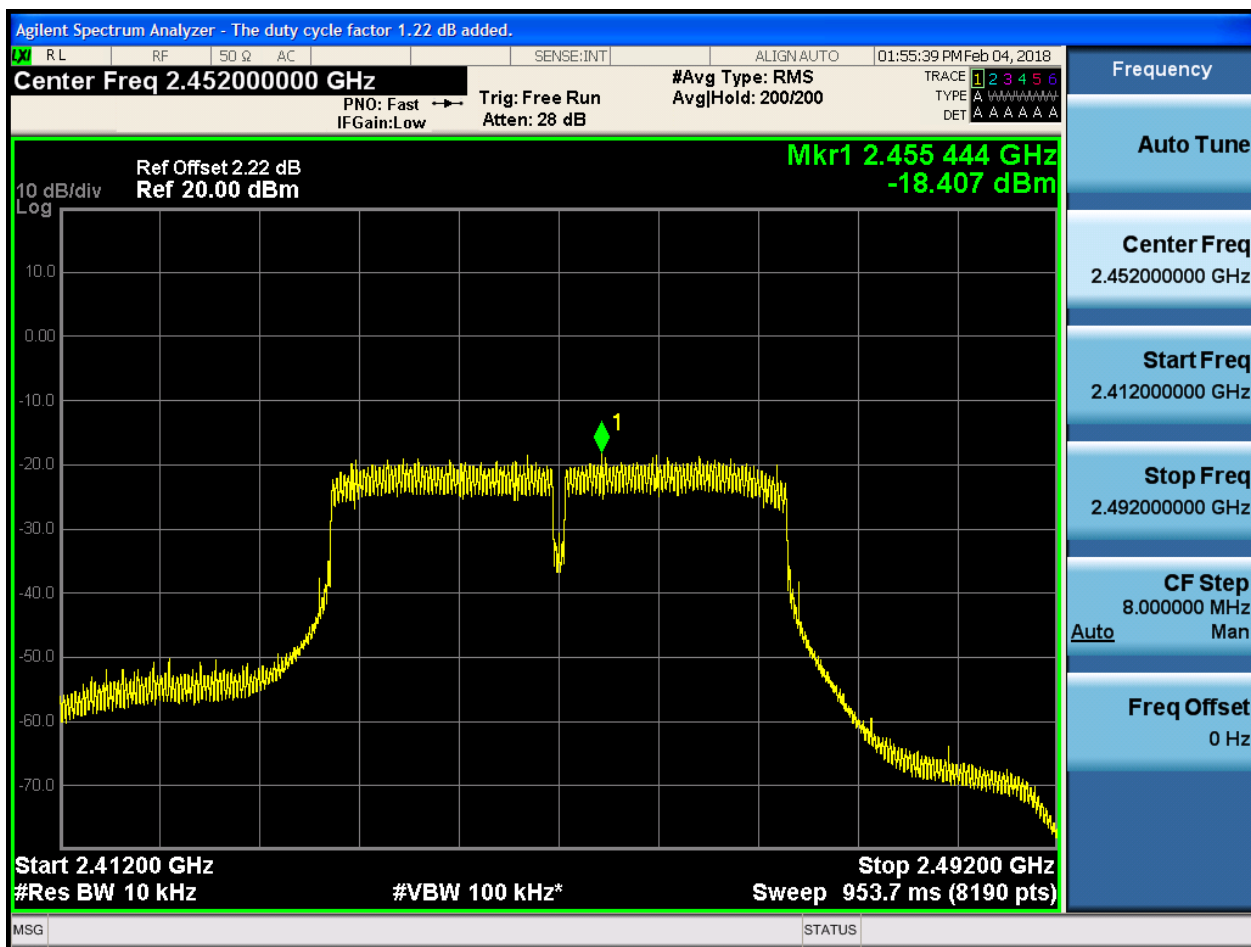

Appendix F: Band Edges Compliance

Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Ant	Carrier Power[dBm]	Max.Spurious Level[dBm]	Verdict
11B	L	2412	Ant 1	9.02	-37.27	pass
11B	H	2462	Ant 1	9.05	-48.53	pass
11G	L	2412	Ant 1	2.84	-33.49	pass
11G	L	2417	Ant 1	2.84	-32.58	pass
11G	H	2462	Ant 1	4.85	-42.38	pass
11N20	L	2412	Ant 1	2.83	-31.09	pass
11N20	H	2462	Ant 1	2.83	-44.68	pass
11N40	L	2422	Ant 1	-0.59	-33.45	pass
11N40	H	2452	Ant 1	-0.90	-44.98	pass



Part II - Test Plots

2.1 11B_L@Ant 1






2.2 11B_H@Ant 1






2.3 11G_L_2412@Ant 1

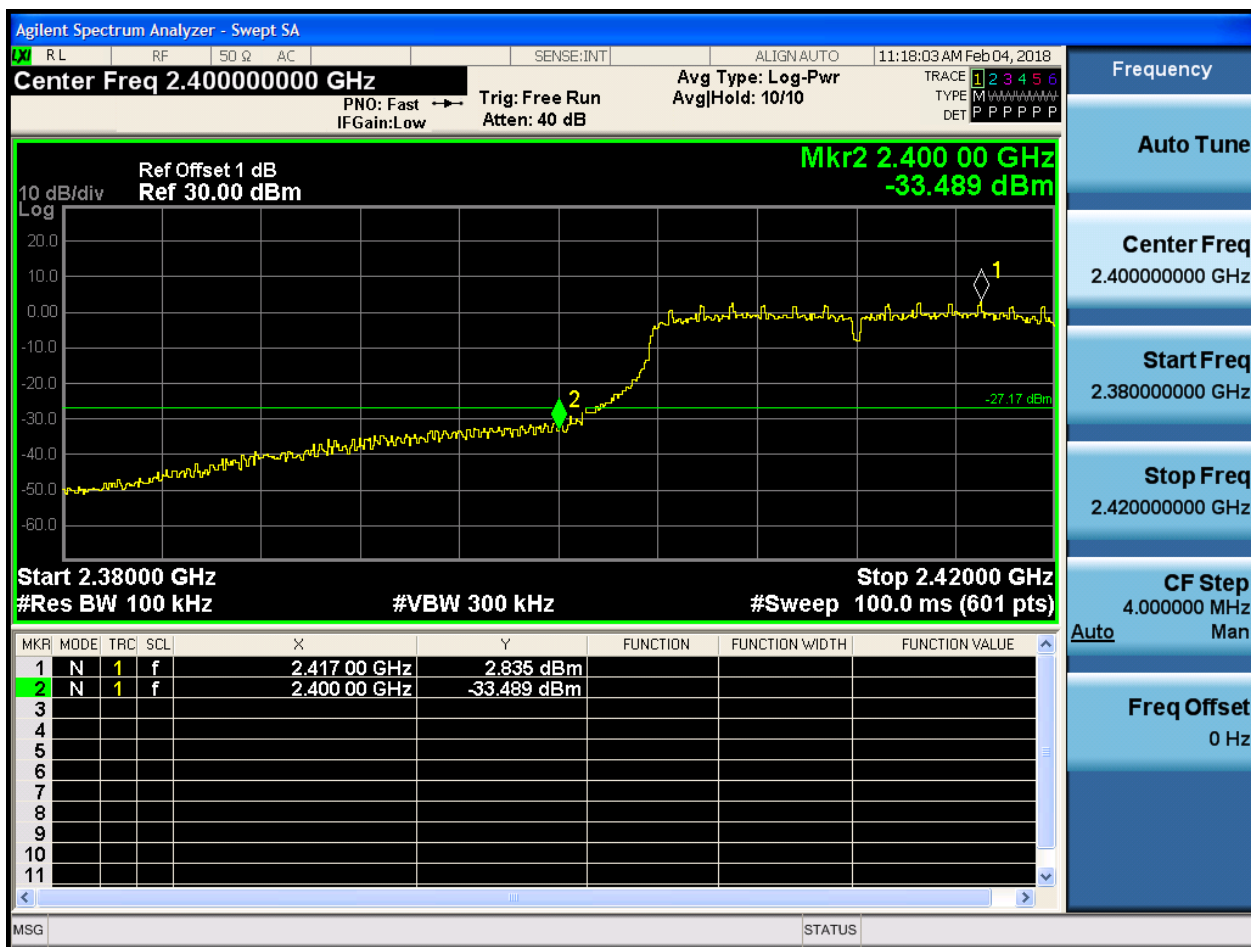



2.411G_L_2417@Ant1

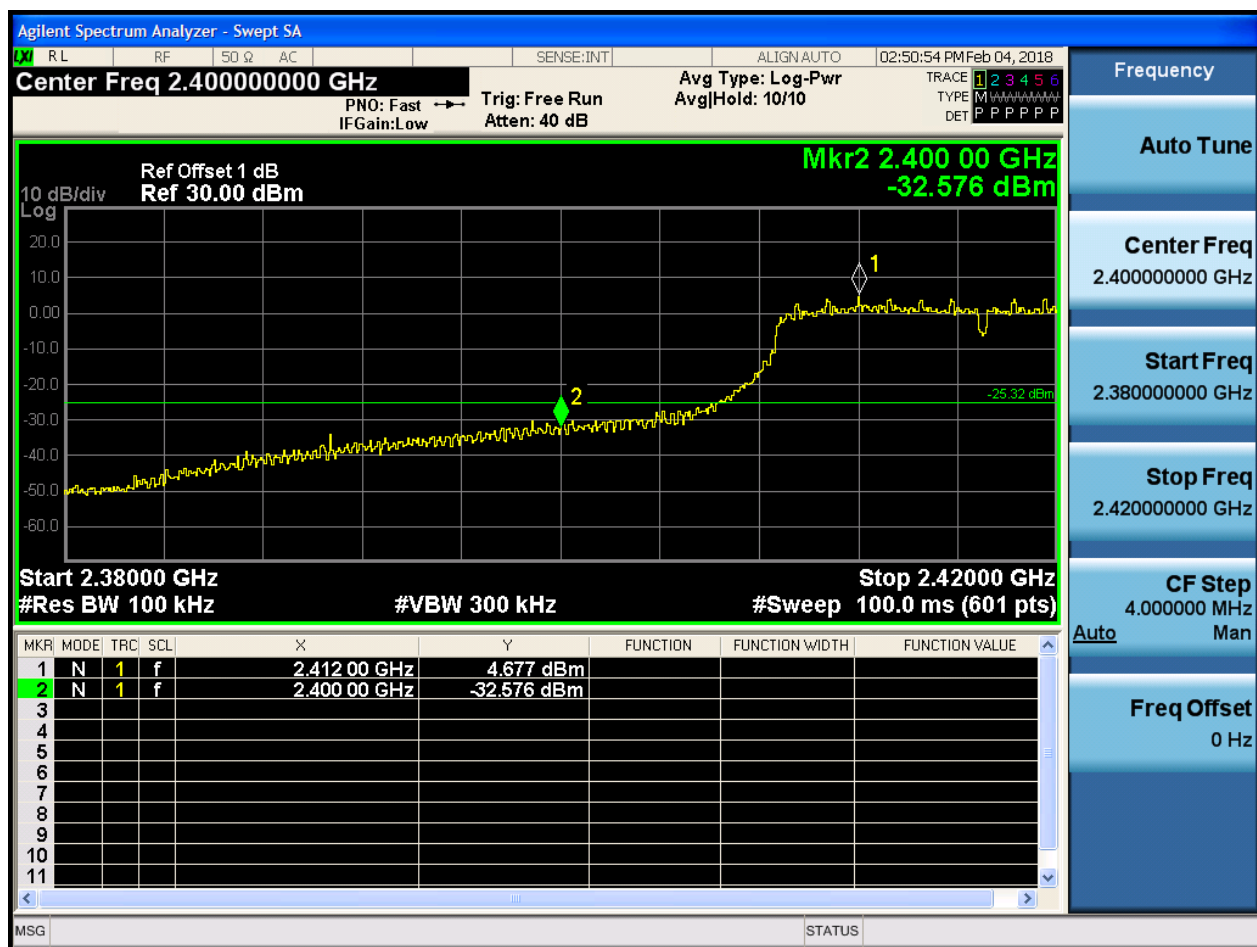



Agilent Spectrum Analyzer - Swept SA

Center Freq 2.473500000 GHz

Ref Offset 1 dB
Ref 30.00 dBm

Mkr2 2.483 50 GHz
-42.381 dBm

Start 2.45350 GHz
#Res BW 100 kHz

Stop 2.49350 GHz
#Sweep 100.0 ms (601 pts)

#VBW 300 kHz

Trig: Free Run
Atten: 40 dB

Avg Type: Log-Pwr
Avg/Hold: 100/100

Frequency

Auto Tune

Center Freq
2.473500000 GHz

Start Freq
2.453500000 GHz

Stop Freq
2.493500000 GHz

CF Step
4.000000 MHz
Man

Freq Offset
0 Hz

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.457 03 GHz	4.852 dBm			
2	N	1	f	2.483 50 GHz	-42.381 dBm			
3								
4								
5								
6								
7								
8								
9								
10								
11								

MSG

STATUS



Agilent Spectrum Analyzer - Swept SA

Center Freq **2.40000000 GHz** Avg Type: Log-Pwr TRAC 1 2 3 4 5 6
PNO: Fast → Trig: Free Run Avg/Hold: 10/10 TYPE M W W W W W W W W W
IFGain: Low Atten: 40 dB DET P P P P P P

Ref Offset 1 dB
Ref 30.00 dBm

Mkr2 2.400 00 GHz
-31.088 dBm

Start 2.38000 GHz Stop 2.42000 GHz
#Res BW 100 kHz #VBW 300 kHz #Sweep 100.0 ms (601 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.417 00 GHz	-28.28 dBm			
2	N	1	f	2.400 00 GHz	-31.088 dBm			
3								
4								
5								
6								
7								
8								
9								
10								
11								

Frequency Auto Tune Center Freq 2.40000000 GHz Start Freq 2.380000000 GHz Stop Freq 2.420000000 GHz CF Step 4.000000 MHz Man Freq Offset 0 Hz

[illegible]



Agilent Spectrum Analyzer - Swept SA

Center Freq 2.40000000 GHz

Ref Offset 1 dB
Ref 30.00 dBm

Mkr2 2.400 00 GHz
-33.448 dBm

Start 2.38000 GHz
#Res BW 100 kHz

Stop 2.42000 GHz
#Sweep 100.0 ms (601 pts)

#VBW 300 kHz

10 dB/div
Log

20.0
10.0
0.00
-10.0
-20.0
-30.0
-40.0
-50.0
-60.0

2.413 27 GHz
-0.588 dBm

2.400 00 GHz
-33.448 dBm

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.413 27 GHz	-0.588 dBm			
2	N	1	f	2.400 00 GHz	-33.448 dBm			
3								
4								
5								
6								
7								
8								
9								
10								
11								

Frequency

Auto Tune

Center Freq
2.400000000 GHz

Start Freq
2.380000000 GHz

Stop Freq
2.420000000 GHz

CF Step
4.000000 MHz

Auto

Freq Offset
0 Hz

MSG

STATUS

2.9 11N40_H@Ant 1



Appendix G: Unwanted Emissions into Non-Restricted Frequency

Bands

In this Appendix, the "Pref", which is used as the reference level, refers to the peak power level in any 100 kHz bandwidth within the fundamental emission, the "Puw" refers to the maximum emission power in 100 kHz band segments outside of the authorized frequency band.

Considering that the higher ratio of RBW to the span for the frequency ranges below 30 MHz makes the results determination be complicated, a narrower RBW other than 100 kHz is used for these ranges. The measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \times \lg(100 [kHz]/\text{narrower RBW} [kHz])$. As to this Appendix, the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

For measurements on smart antenna systems (devices with multiple transmit chains), the test is performed at each chain and used as respective results for each chain, due to the relative-limit requirement.

In the result table, the "< Limit" denotes that "The Puw [dBm] is less than Pref[dBm]-30[dBm], see test plots for detailed".

Part I - Test Results


Test Mode	Test Channel	Frequency[MHz]	Ant	Pref[dBm]	Puw[dBm]	Verdict
11B	L	2412	Ant 1	9.05	<limit	pass
11B	M	2437	Ant 1	9.02	<limit	pass
11B	H	2462	Ant 1	9.41	<limit	pass
11G	L	2412	Ant 1	2.95	<limit	pass
11G	L	2417	Ant 1	4.59	<limit	pass
11G	M	2437	Ant 1	5.05	<limit	pass
11G	H	2462	Ant 1	4.94	<limit	pass
11N20	L	2412	Ant 1	2.90	<limit	pass
11N20	M	2437	Ant 1	2.95	<limit	pass
11N20	H	2462	Ant 1	2.97	<limit	pass
11N40	L	2422	Ant 1	-0.06	<limit	pass
11N40	M	2437	Ant 1	-0.09	<limit	pass
11N40	H	2452	Ant 1	-0.29	<limit	pass



Part II - Test Plots


2.1 11B_L@Ant 1


Pref:

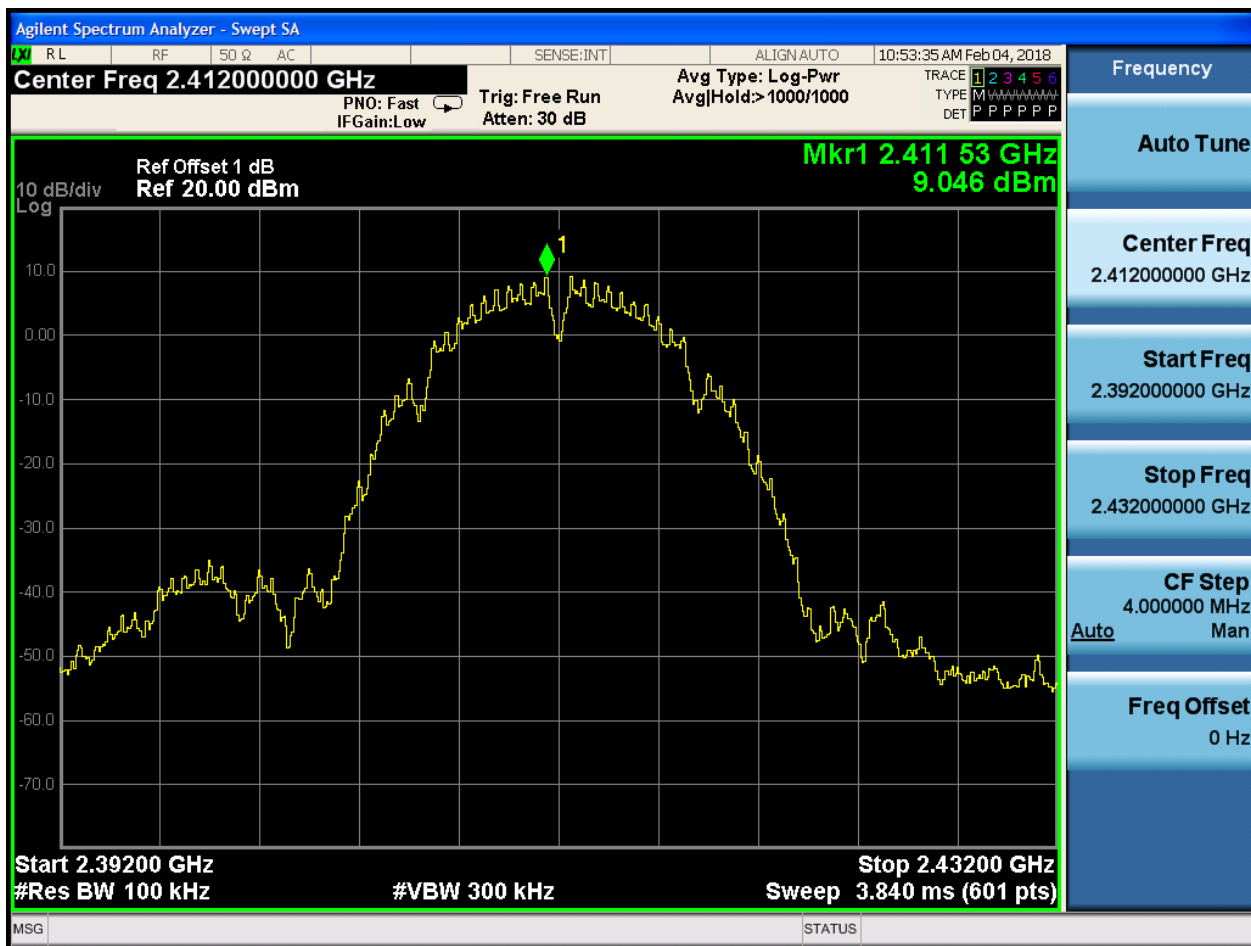






Puw:

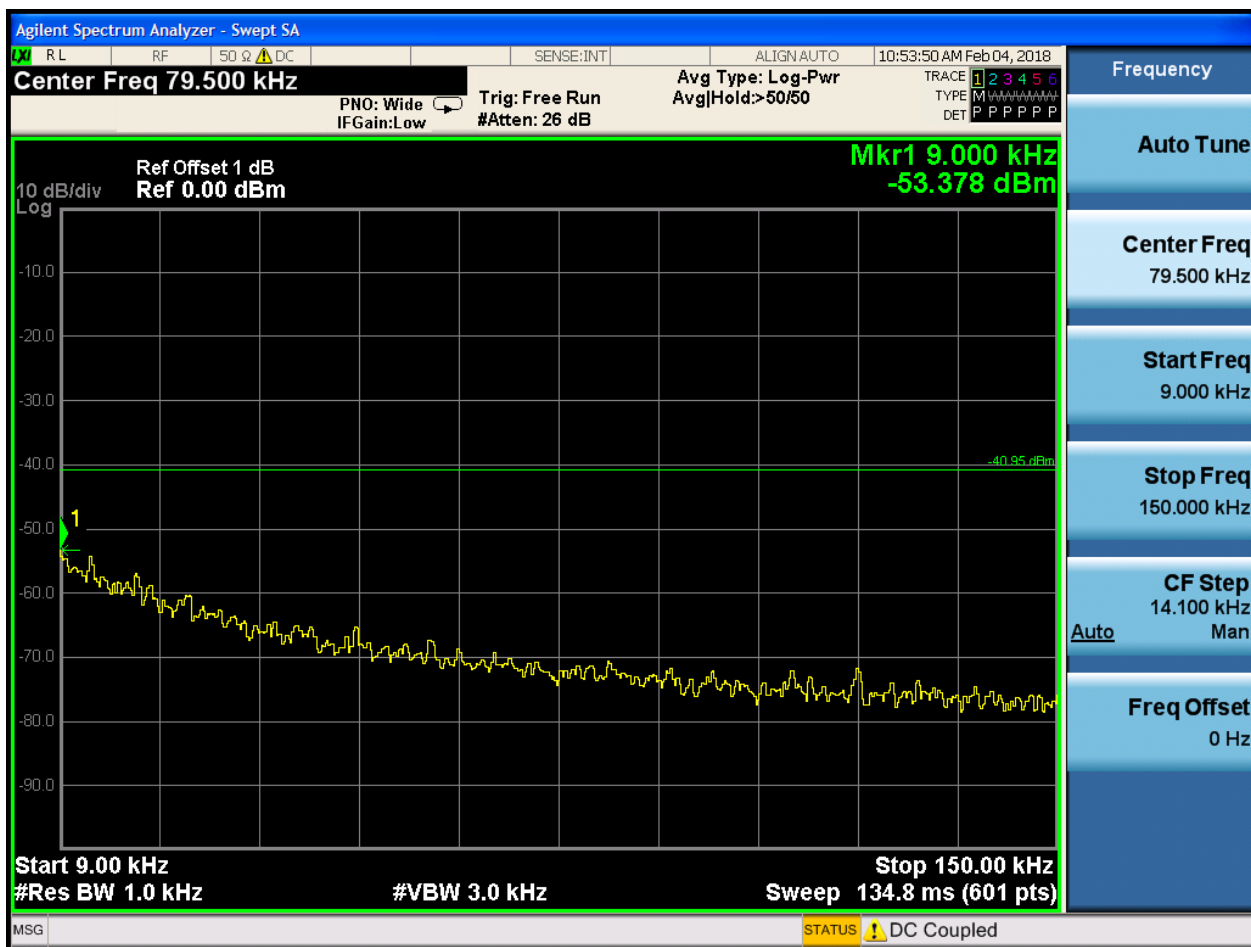


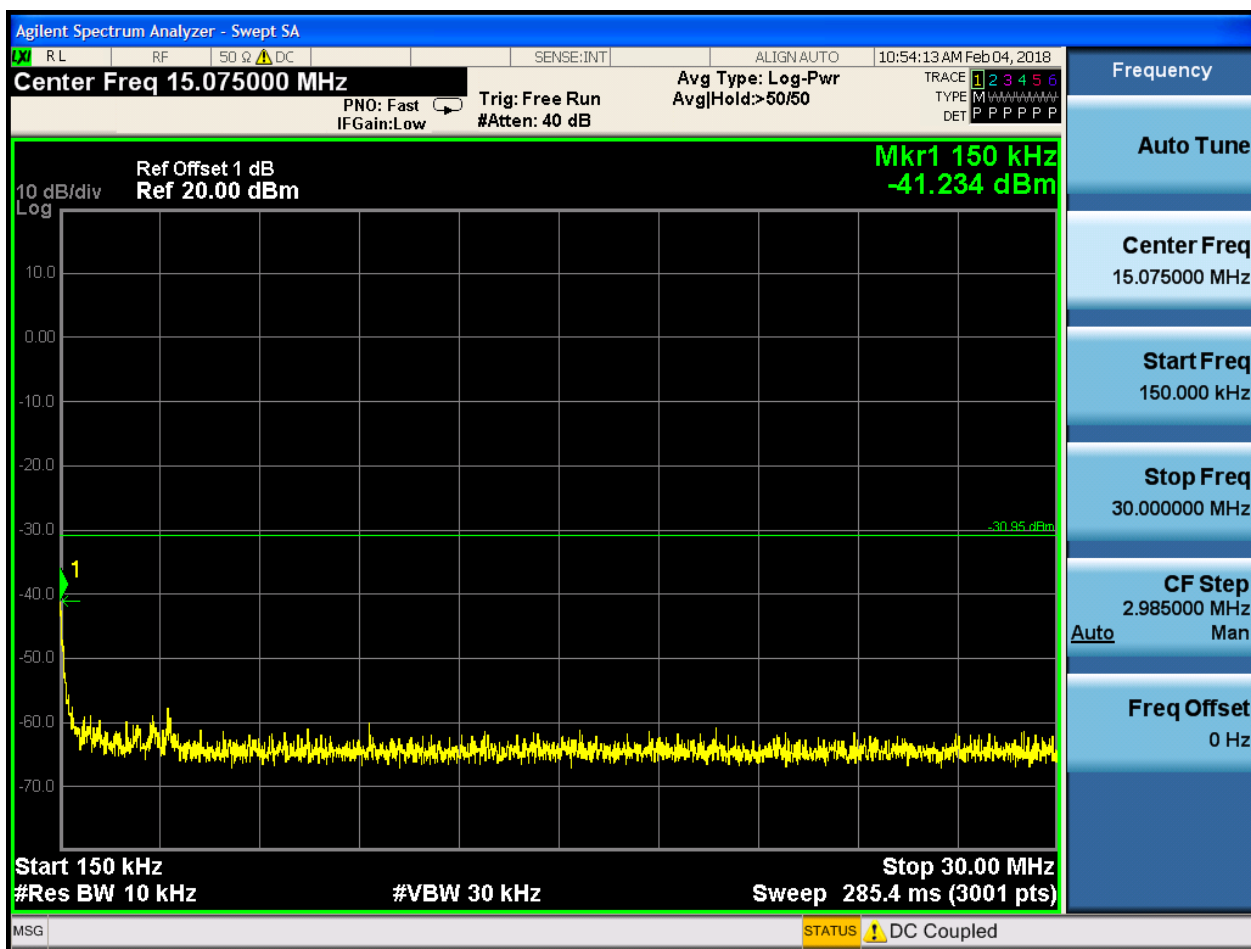

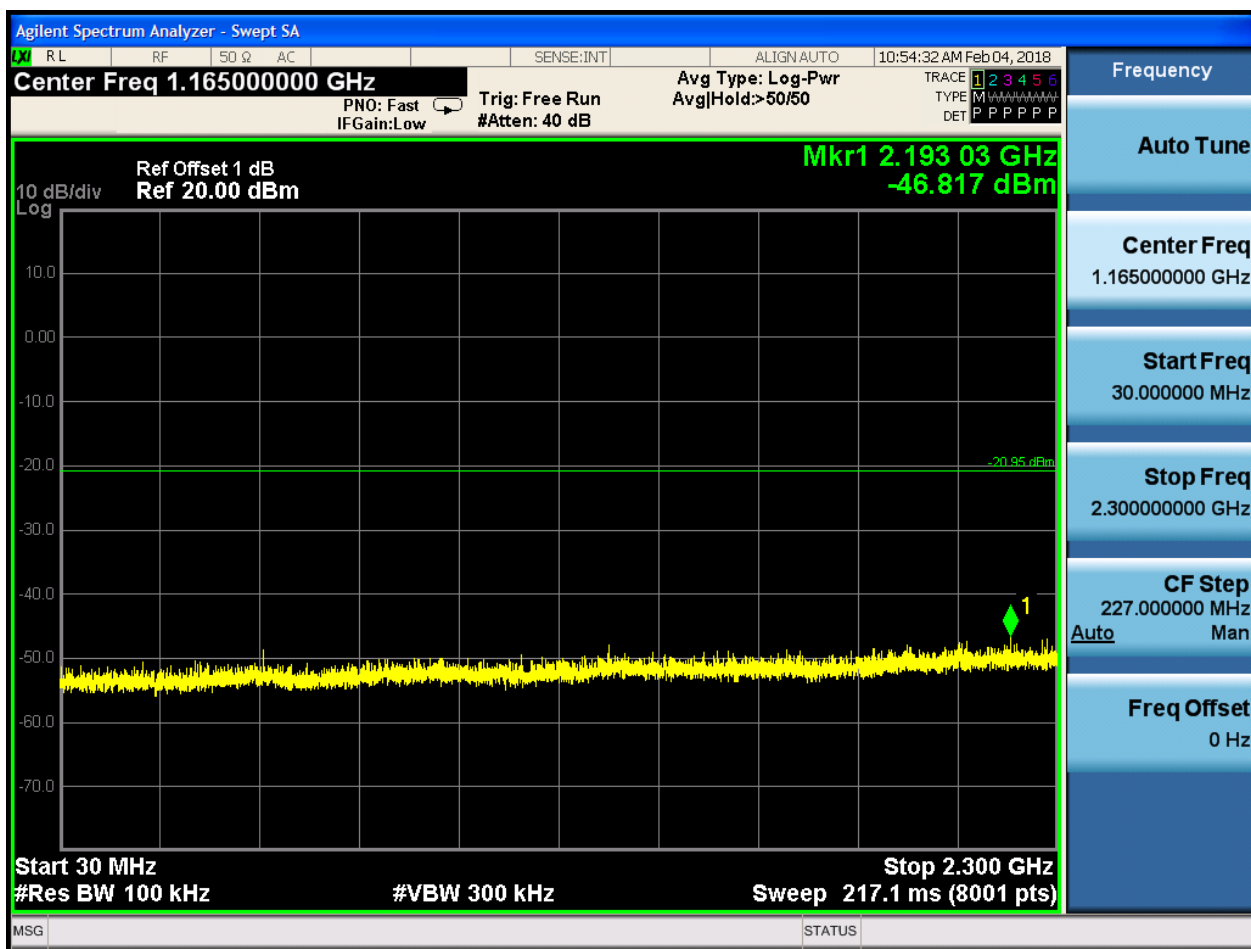

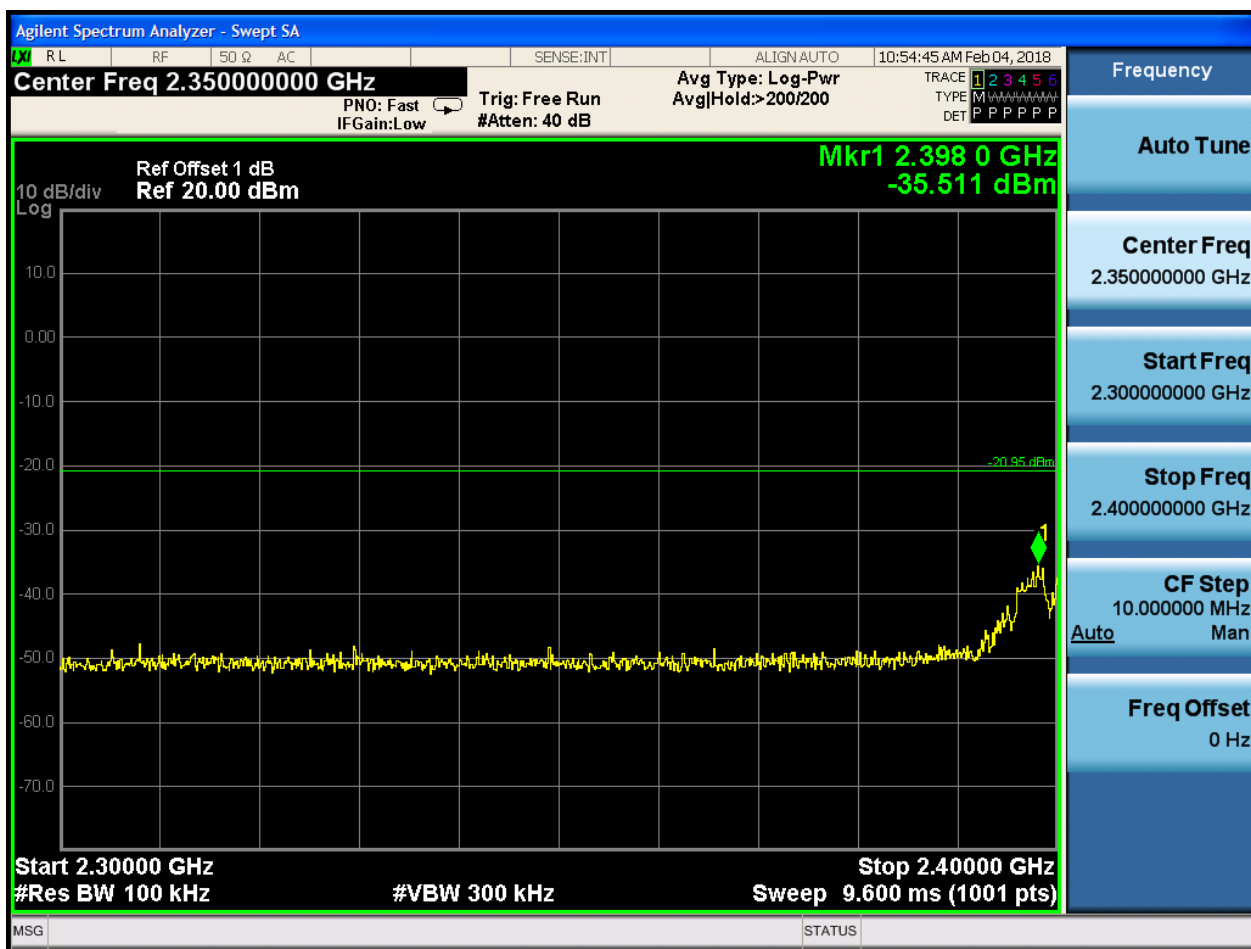

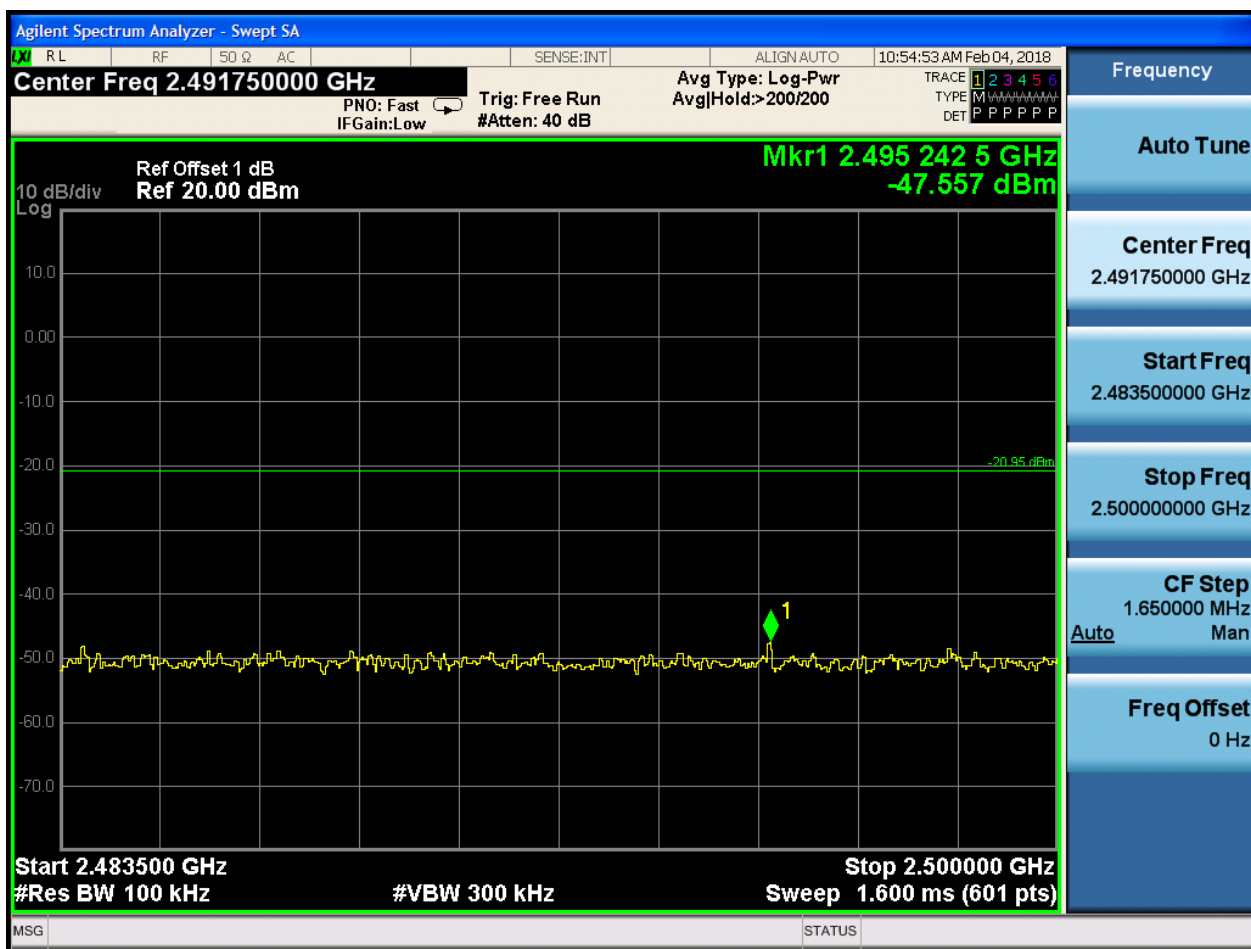


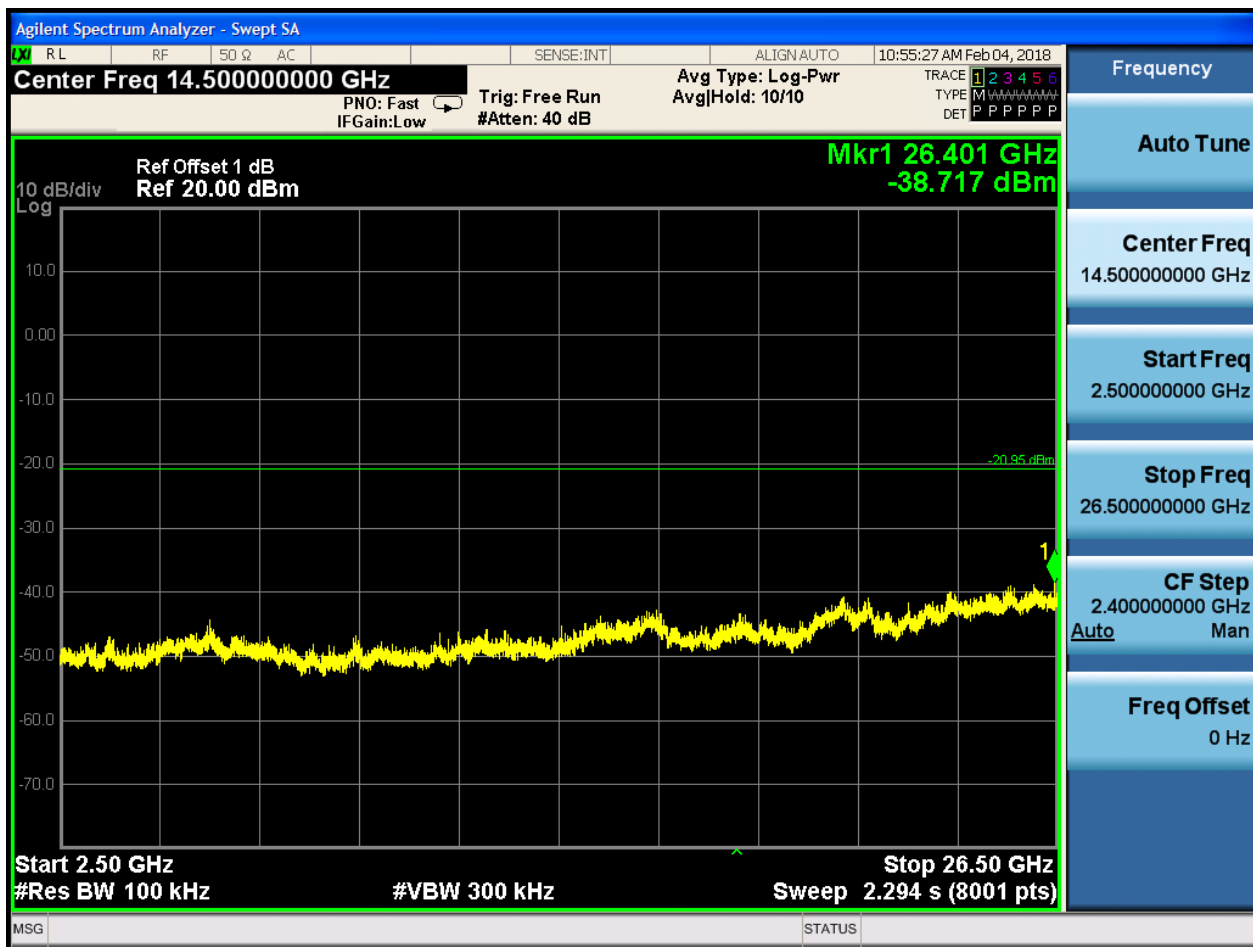



2.2 11B_M@Ant 1

Pref:

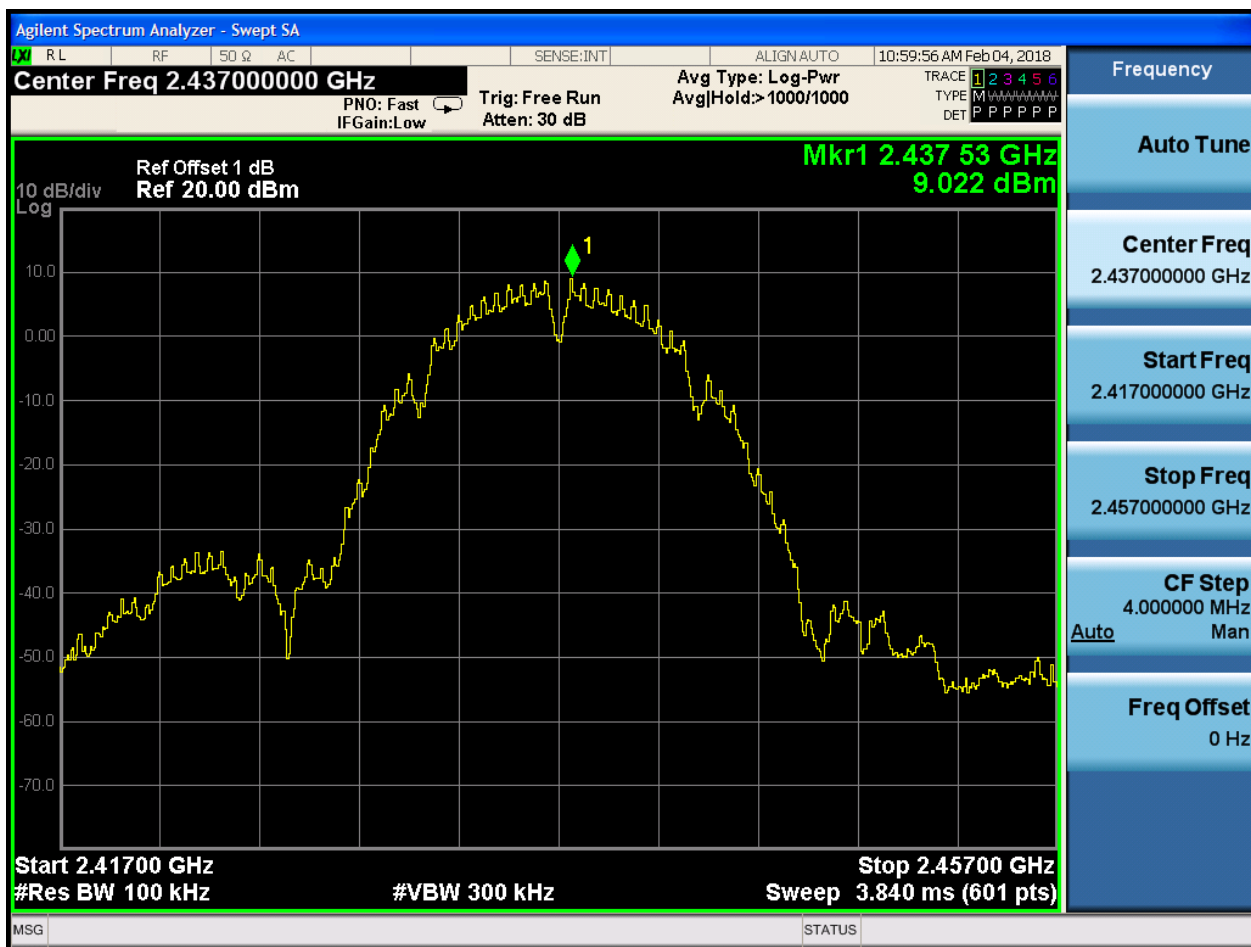



Agilent Spectrum Analyzer - Swept SA

R/L RF 50 Ω DC SENSE:INT ALIGN:AUTO 11:00:11 AM Feb 04, 2018

Center Freq 79.500 kHz Avg Type: Log-Pwr Avg/Hold:>50/50
PNO: Wide IFGain:Low Trig: Free Run #Atten: 26 dB TRACE 1 2 3 4 5 6
TYPE M TYPE P DET P P P P P

Mkr1 9.470 kHz -53.466 dBm

Ref Offset 1 dB Ref 0.00 dBm


10 dB/div Log


Start 9.00 kHz Stop 150.00 kHz
#Res BW 1.0 kHz #VBW 3.0 kHz Sweep 134.8 ms (601 pts)


MSG STATUS ! DC Coupled


Frequency

- Auto Tune
- Center Freq 79.500 kHz
- Start Freq 9.000 kHz
- Stop Freq 150.000 kHz
- CF Step 14.100 kHz Man Auto
- Freq Offset 0 Hz

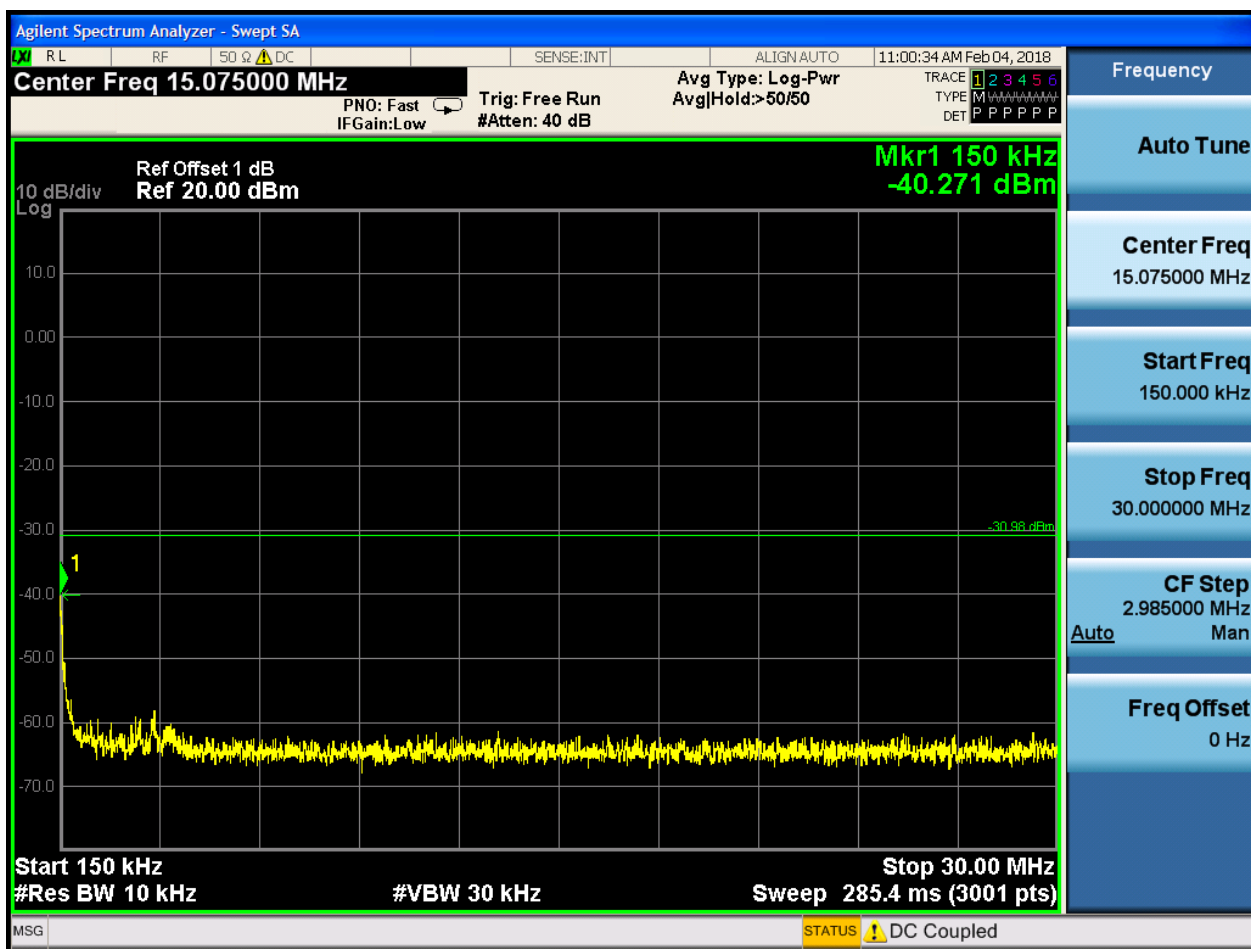

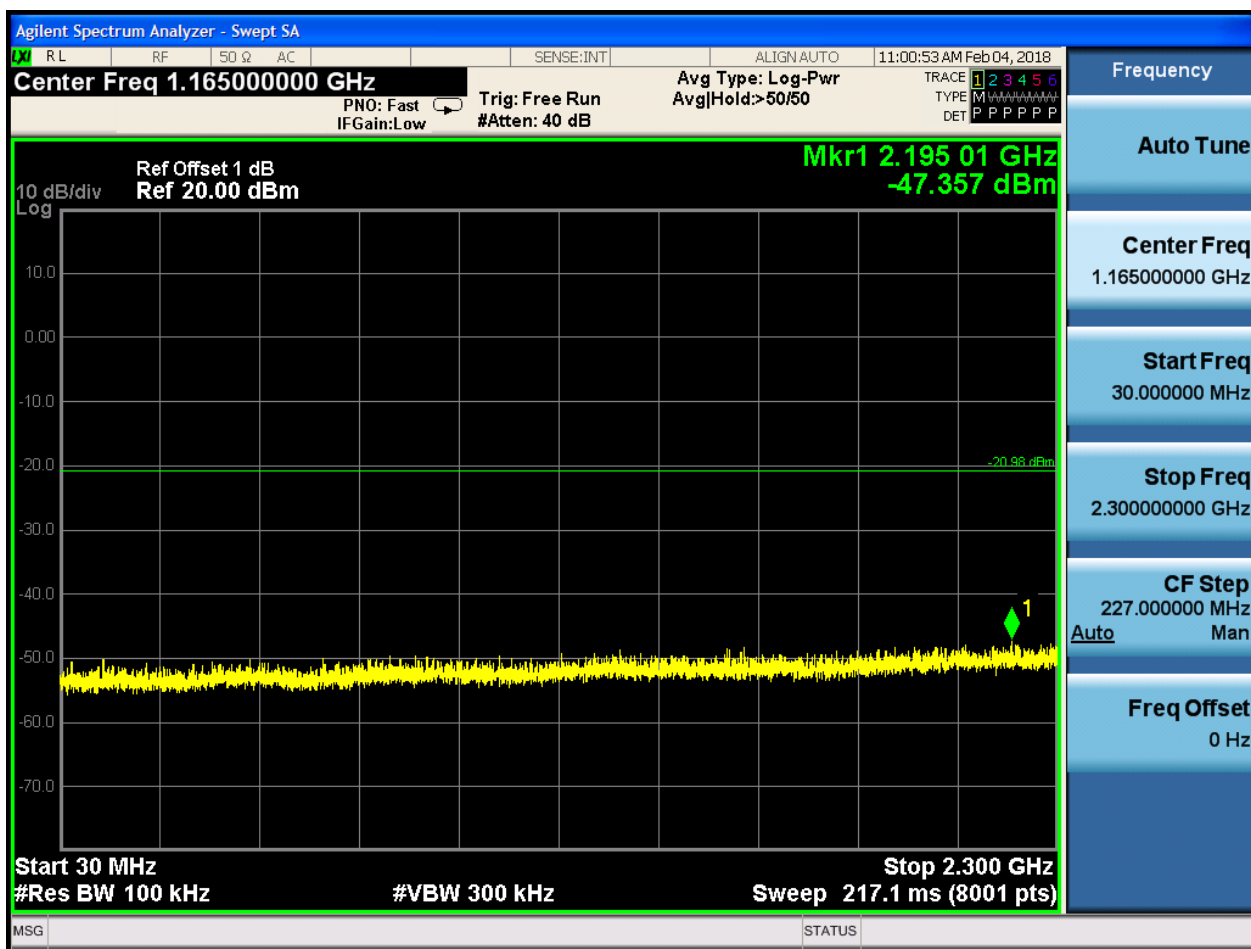

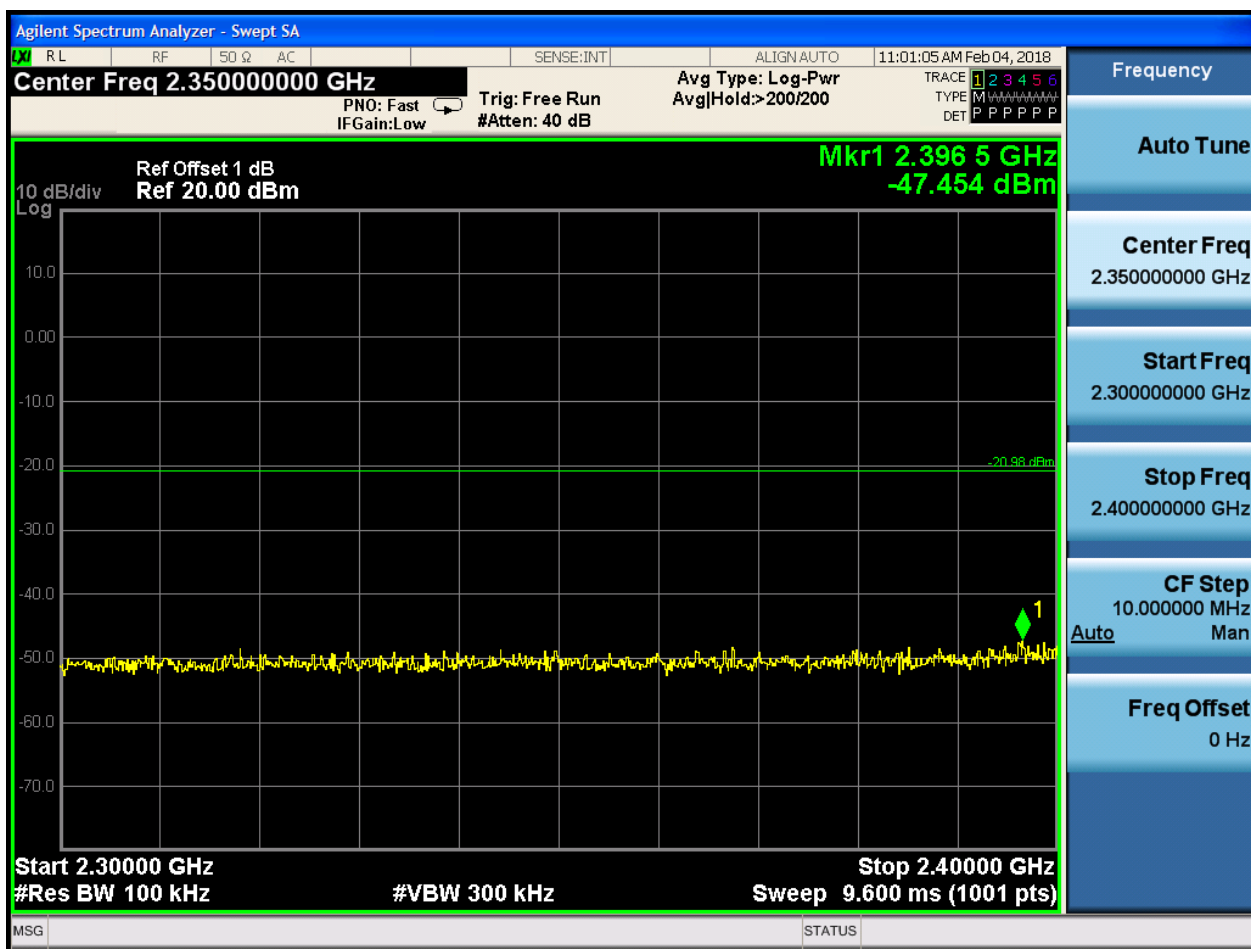

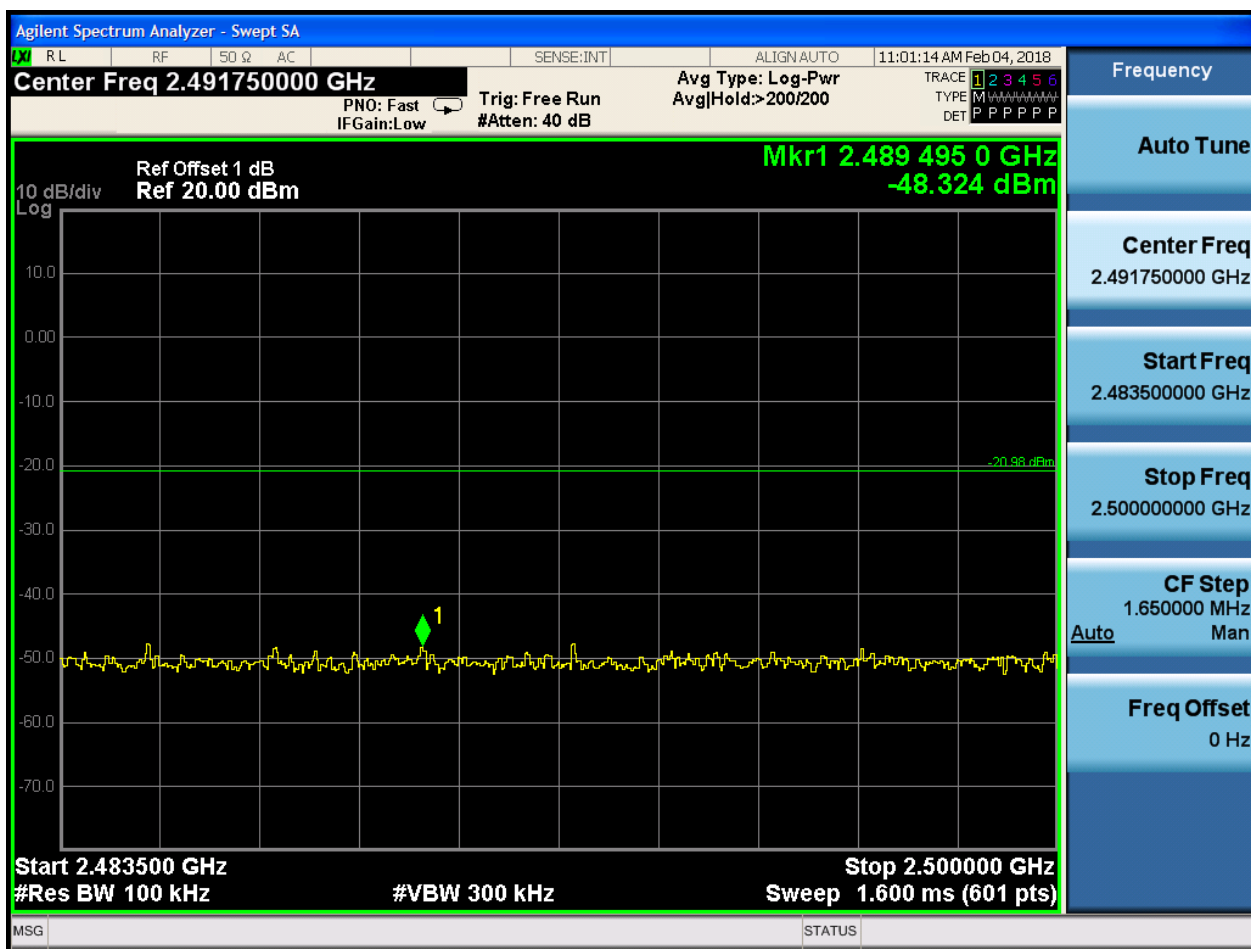







2.3 11B_H@Ant 1


Pref:

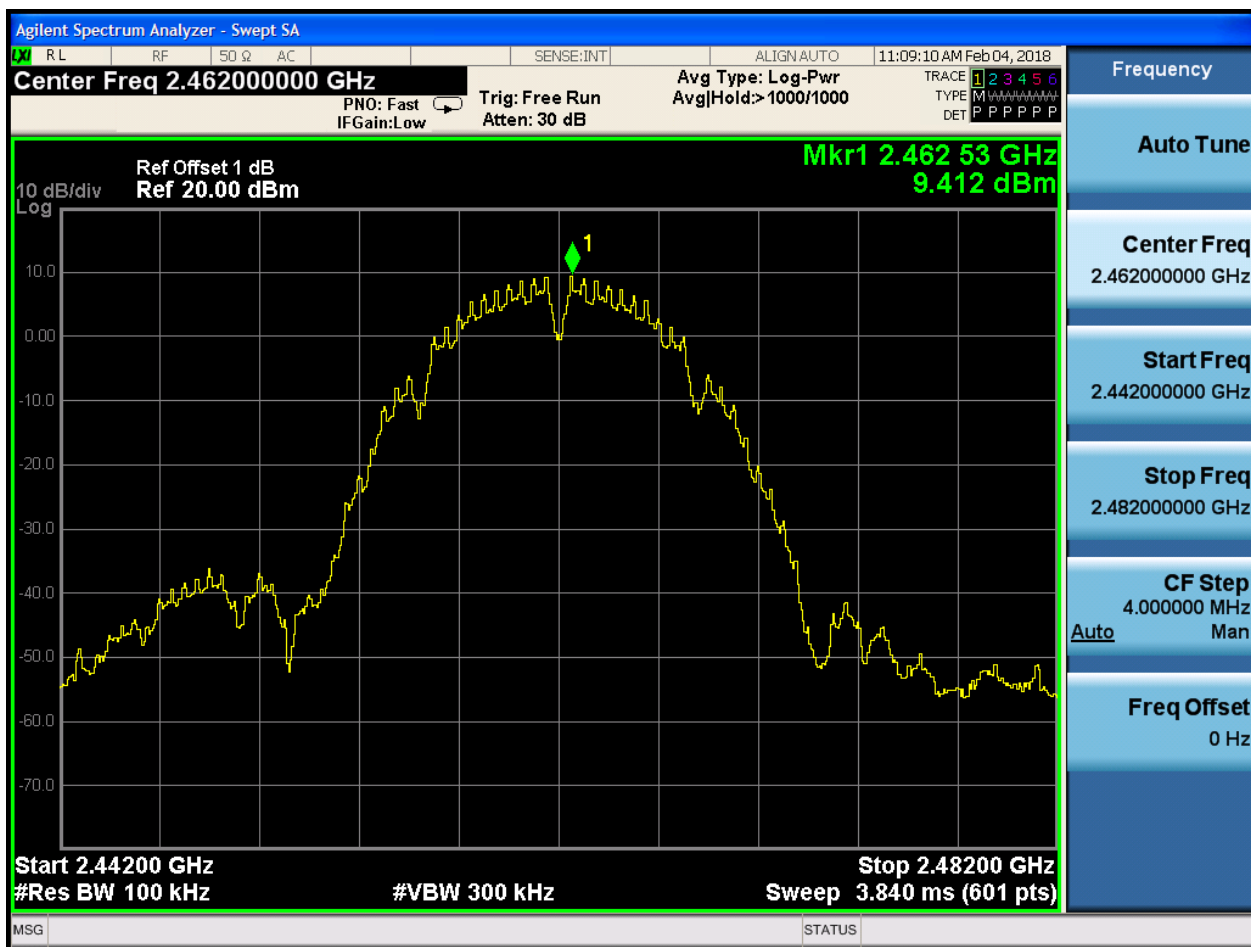






Puw:

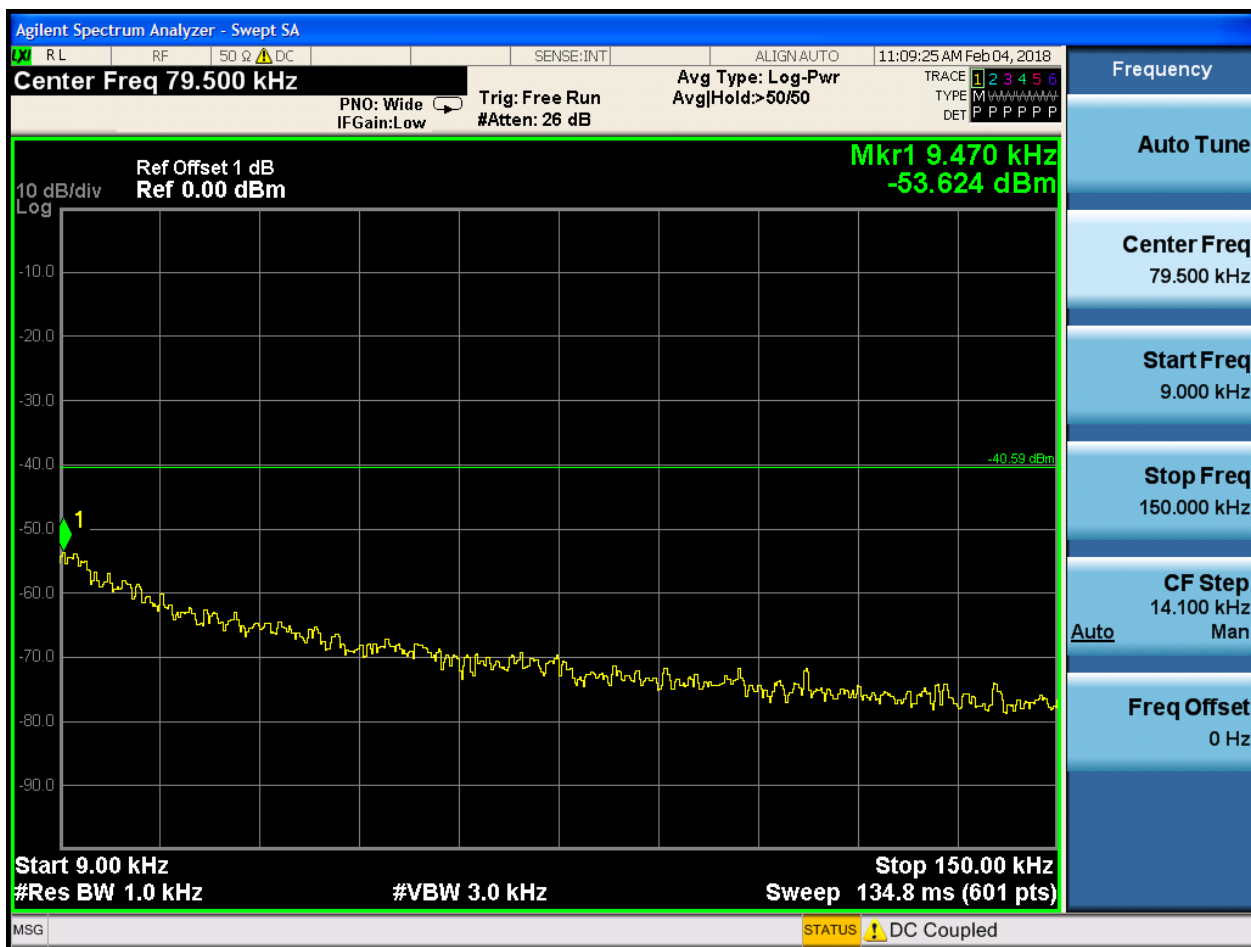


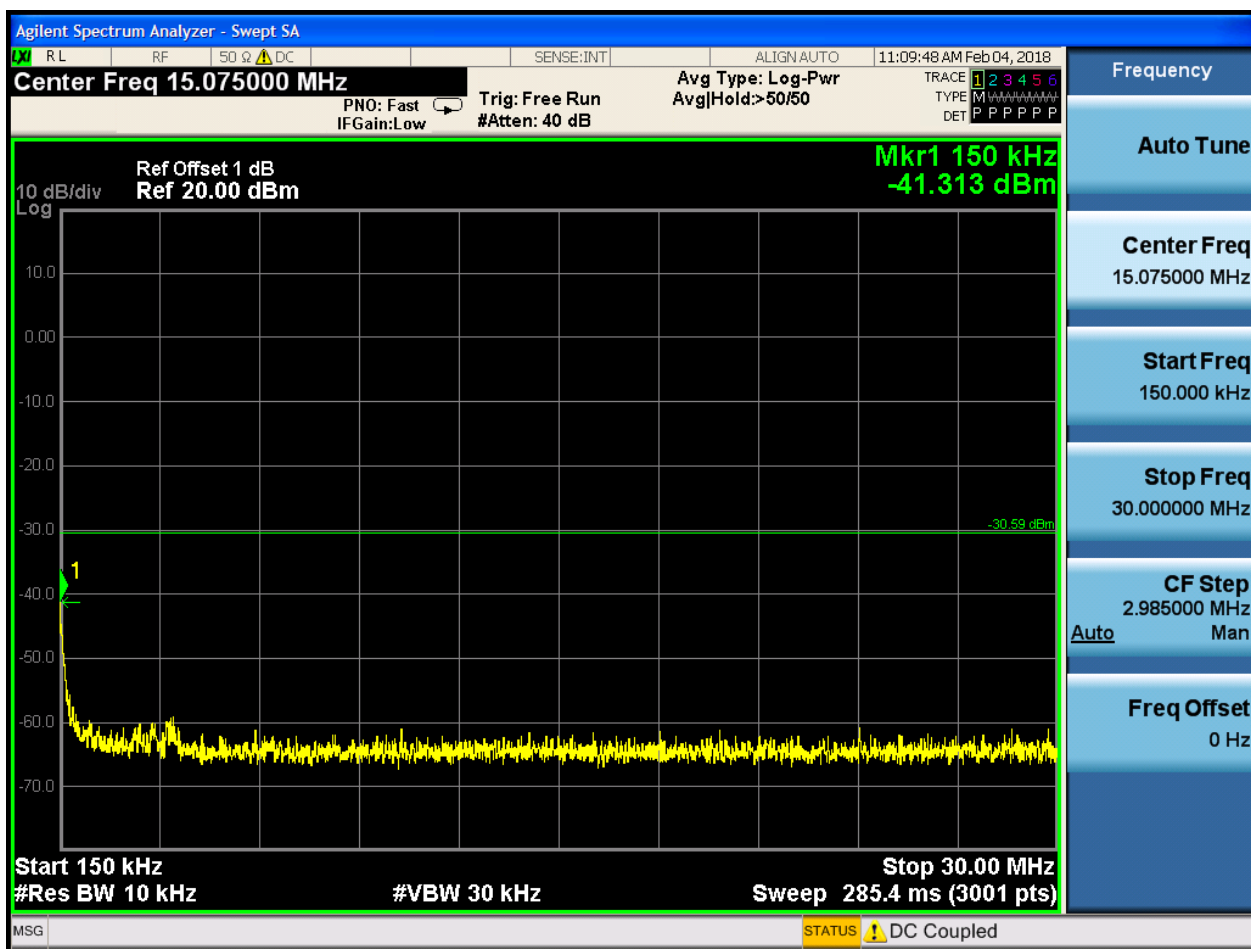

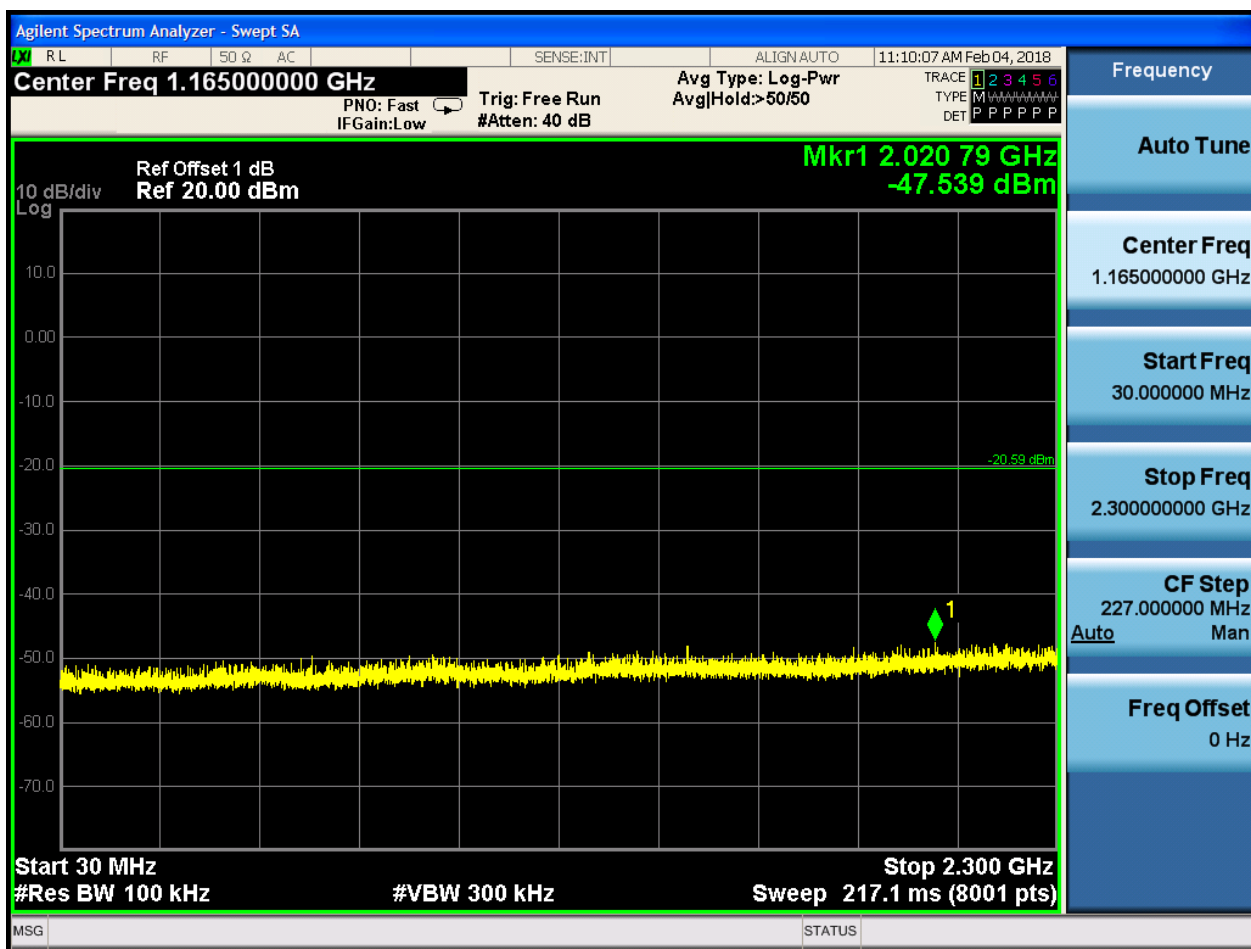

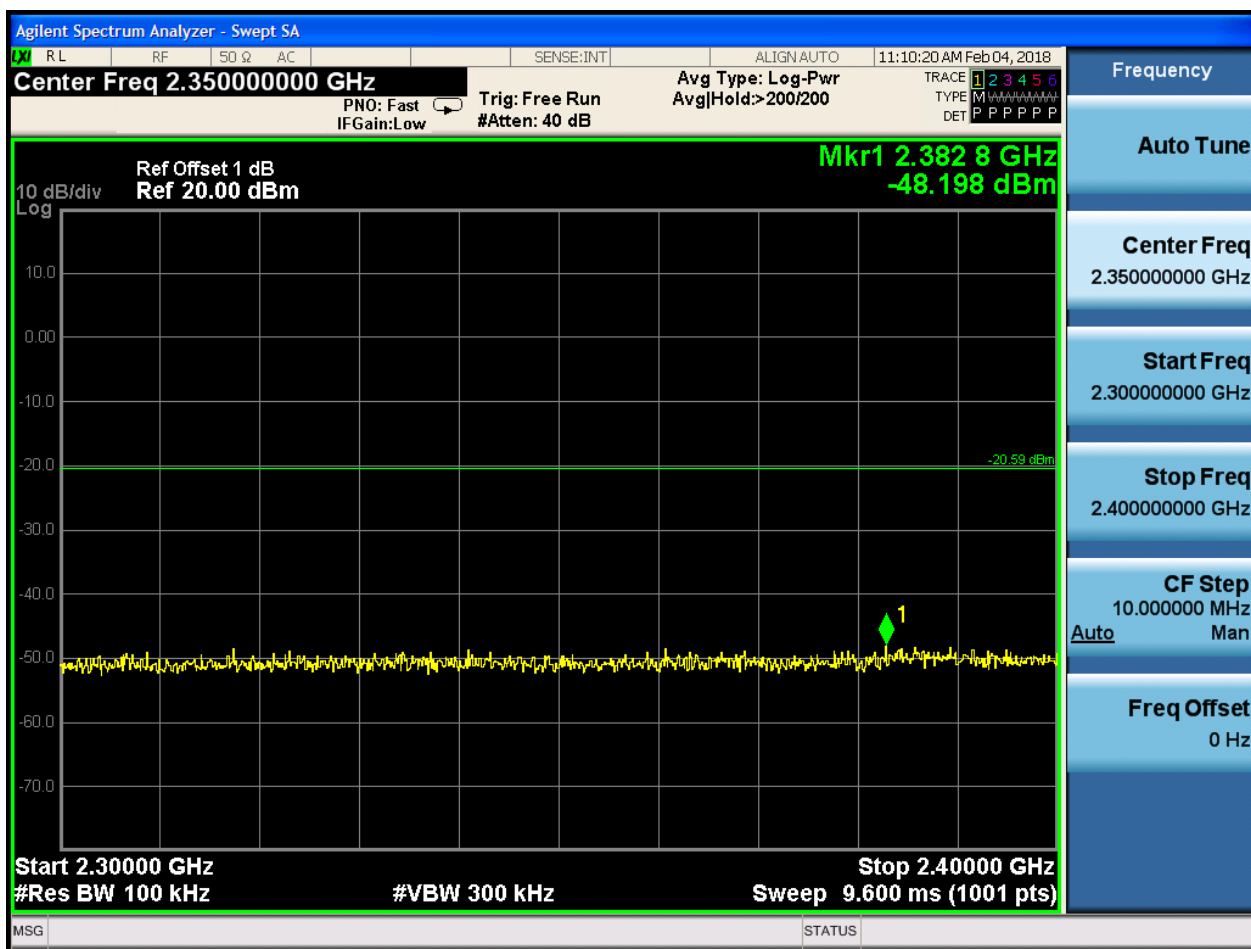

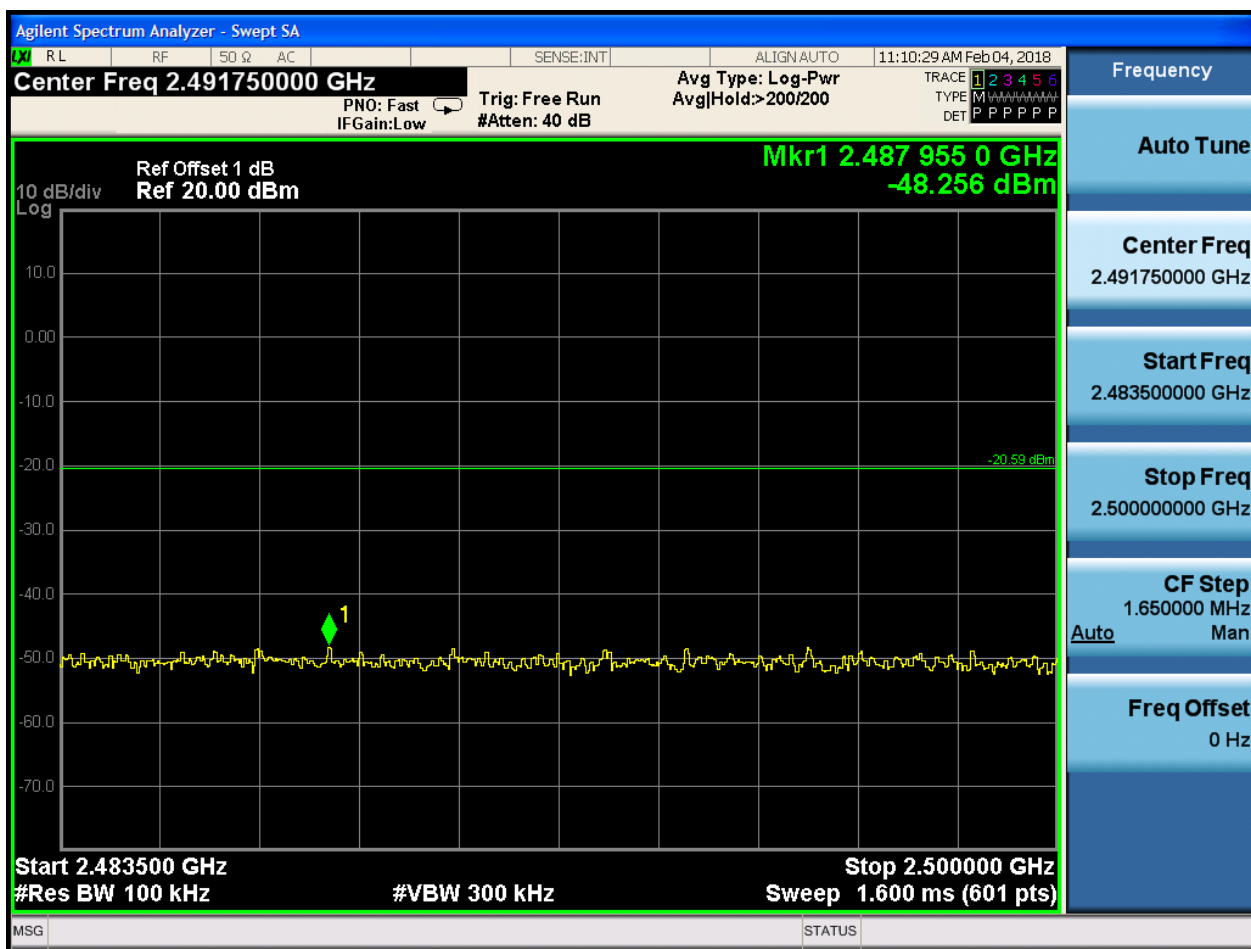

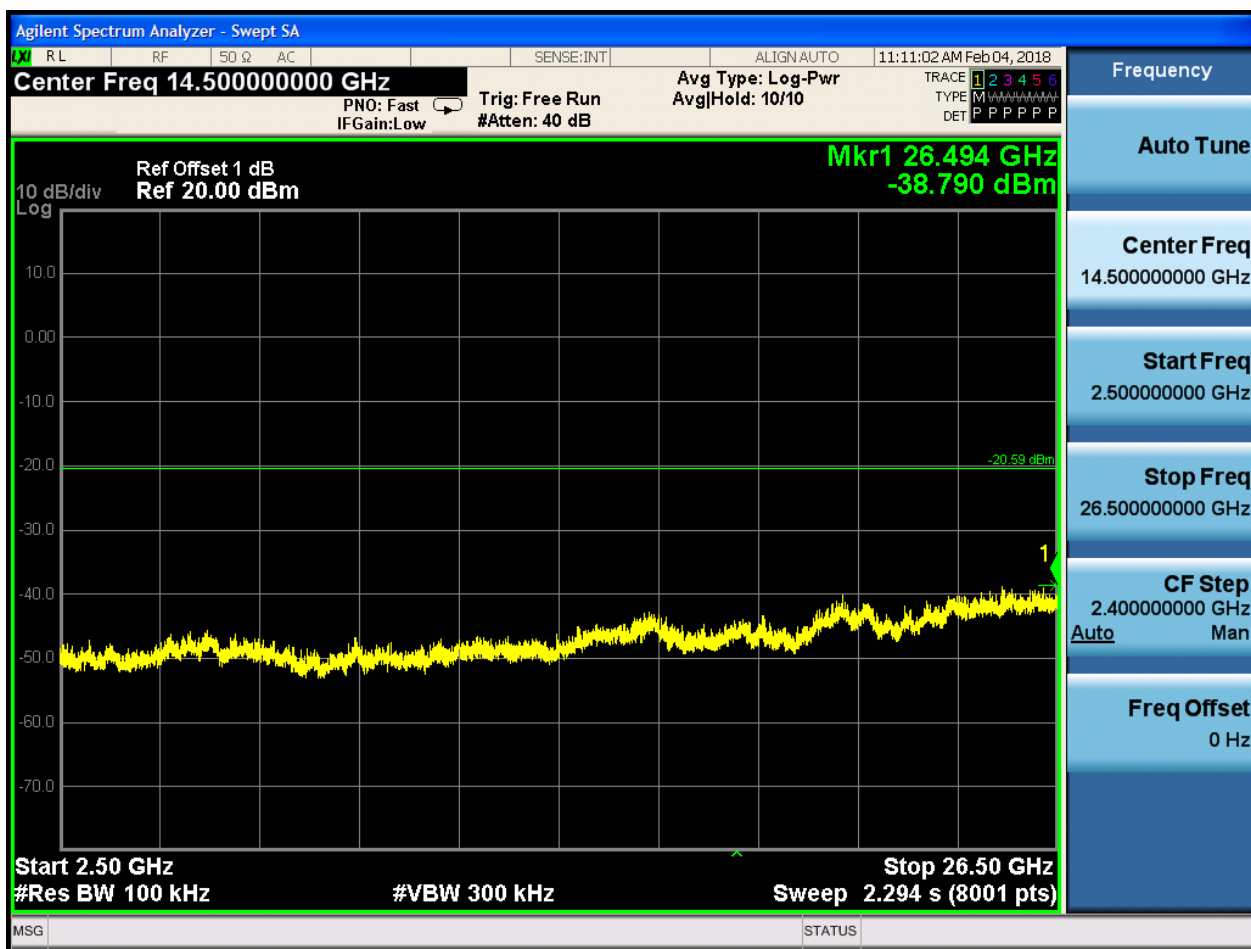



2.4 11G_L_2412@Ant 1

Pref:





Agilent Spectrum Analyzer - Swept SA

RL RF 50 Ω DC SENSE:INT ALIGN: AUTO 11:16:12 AM Feb 04, 2018

Center Freq 79.500 kHz Avg Type: Log-Pwr Avg/Hold: >50/50

PNO: Wide Trig: Free Run IFGain: Low #Atten: 26 dB

TRACE 1 2 3 4 5 6
TYPE M M M M M M
DET P P P P P P

Ref Offset 1 dB
Ref 0.00 dBm

Mkr1 9.235 kHz
-51.882 dBm

10 dB/div
Log

-10.0
-20.0
-30.0
-40.0
-50.0
-60.0
-70.0
-80.0
-90.0

-47.05 dBm

Start 9.00 kHz Stop 150.00 kHz
#Res BW 1.0 kHz #VBW 3.0 kHz Sweep 134.8 ms (601 pts)

Frequency

Auto Tune

Center Freq
79.500 kHz

Start Freq
9.000 kHz


Stop Freq
150.000 kHz


CF Step
14.100 kHz
Man


Auto


Freq Offset
0 Hz


MSG STATUS DC Coupled

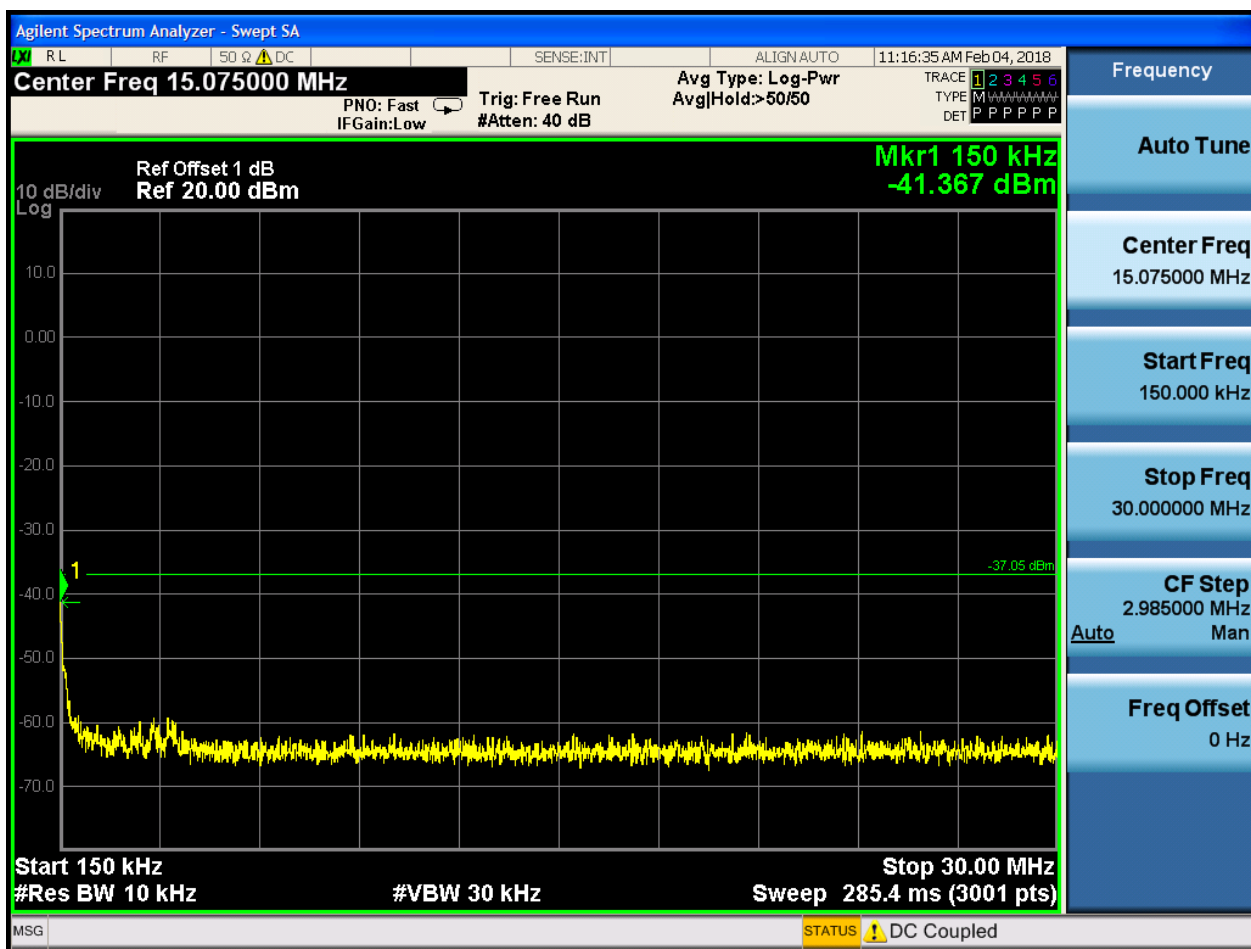

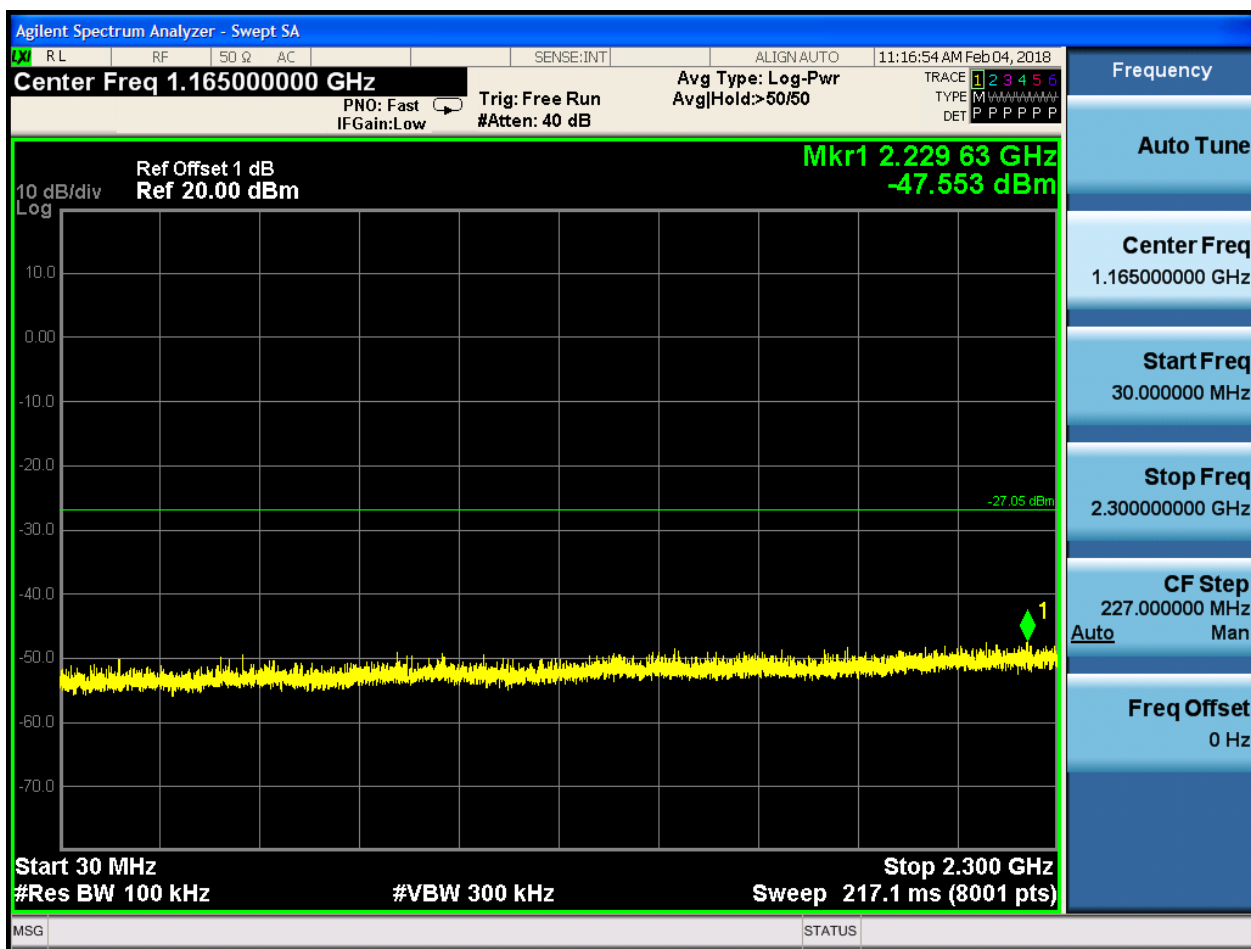

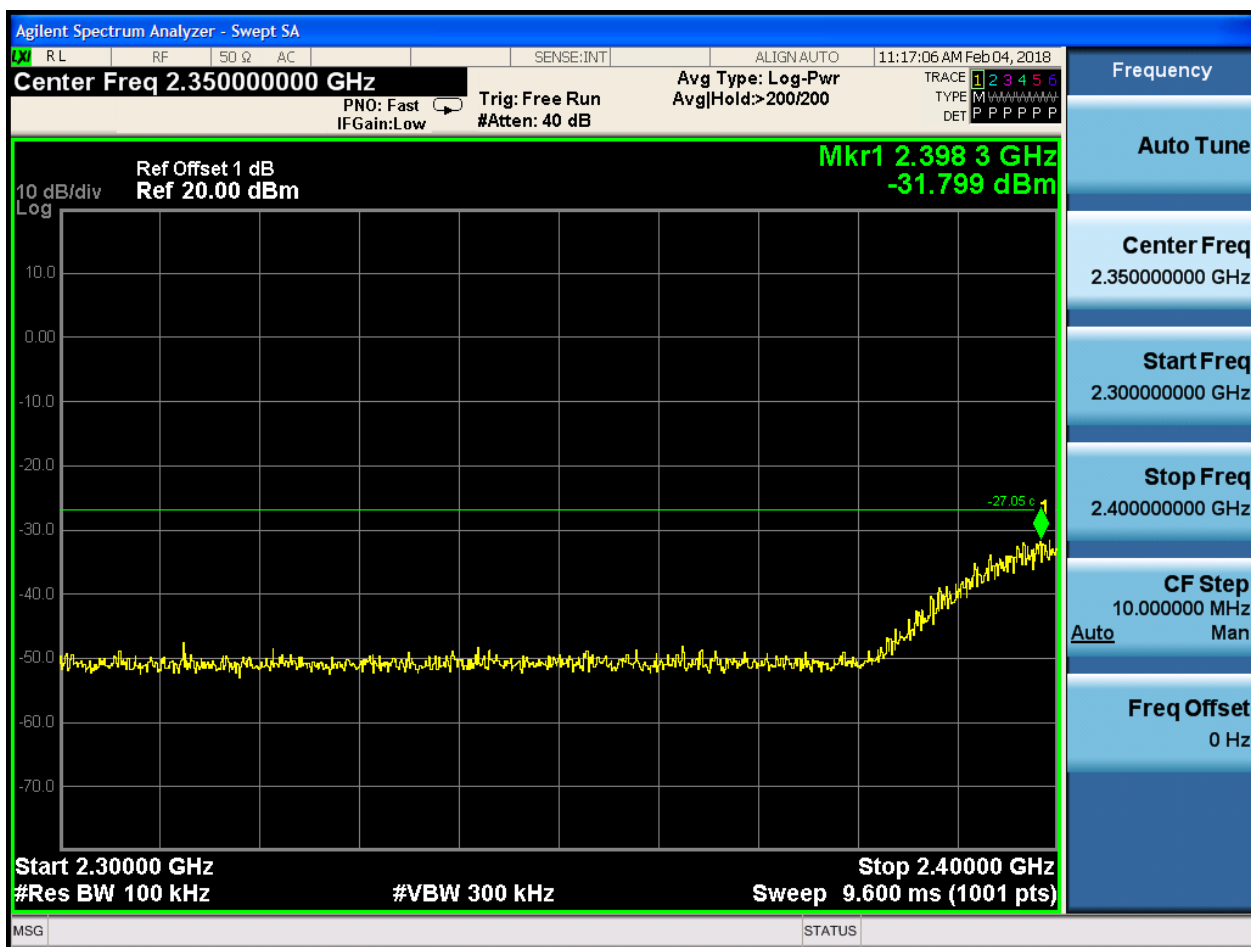

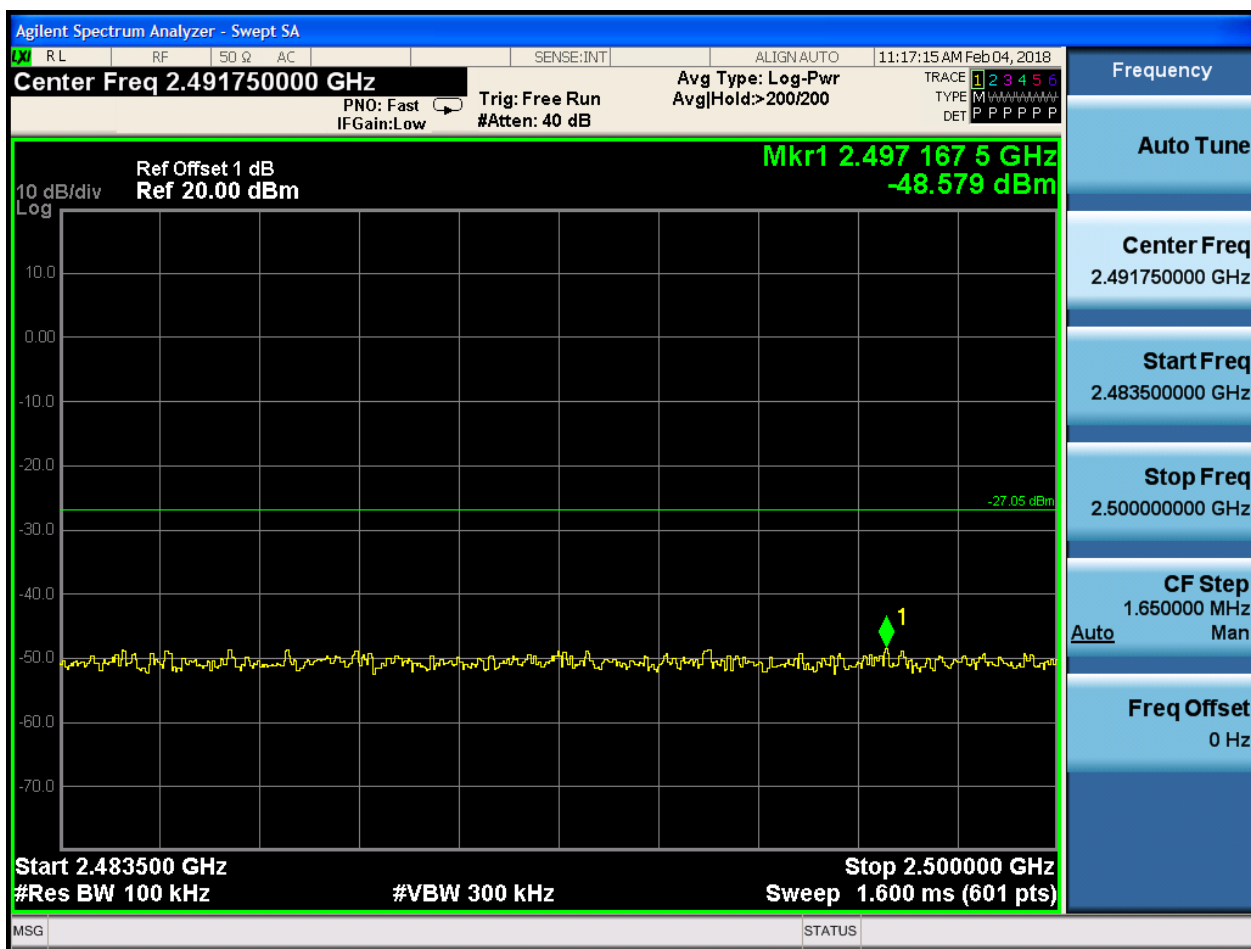


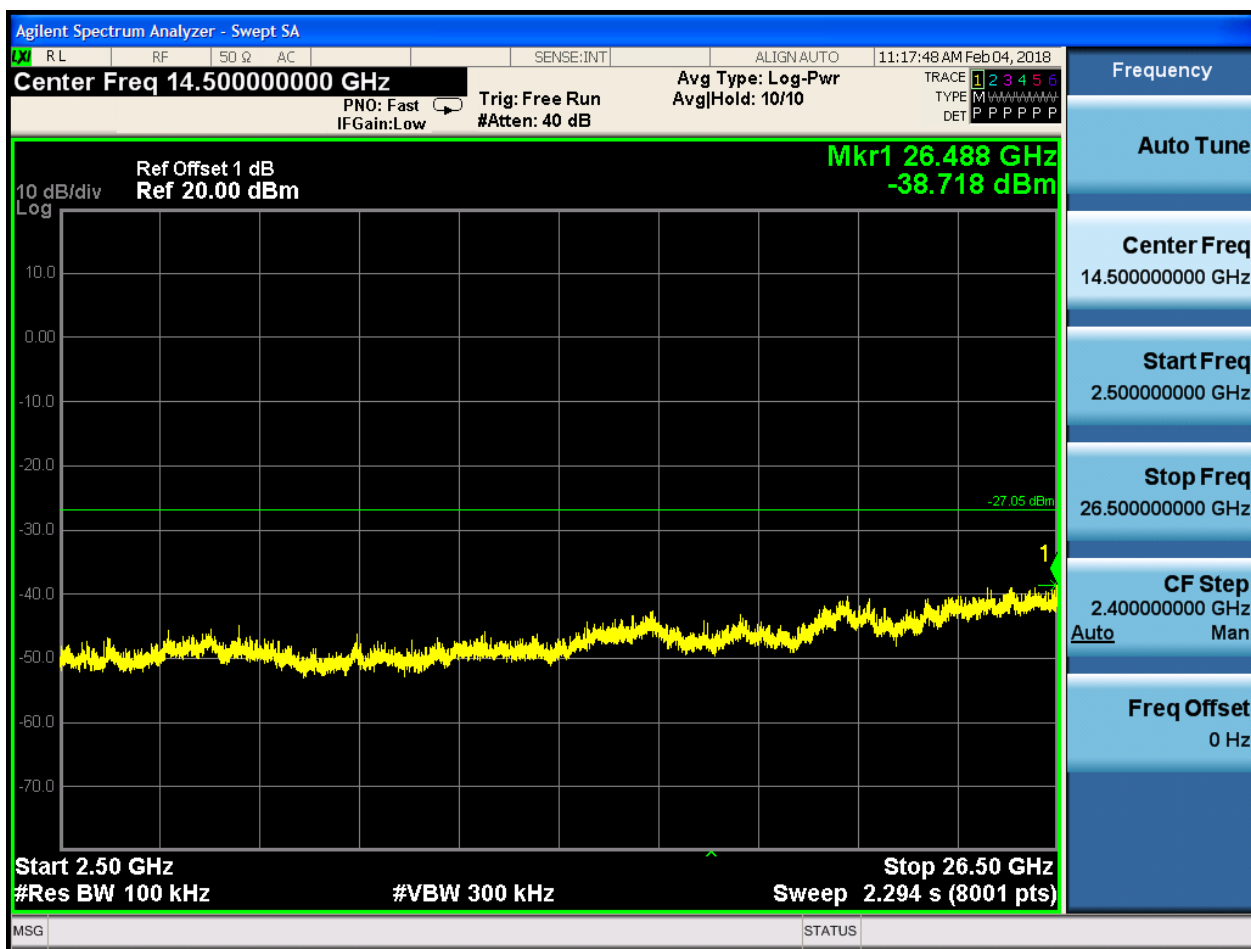




2.5 11G_L_2417@Ant 1


Pref:

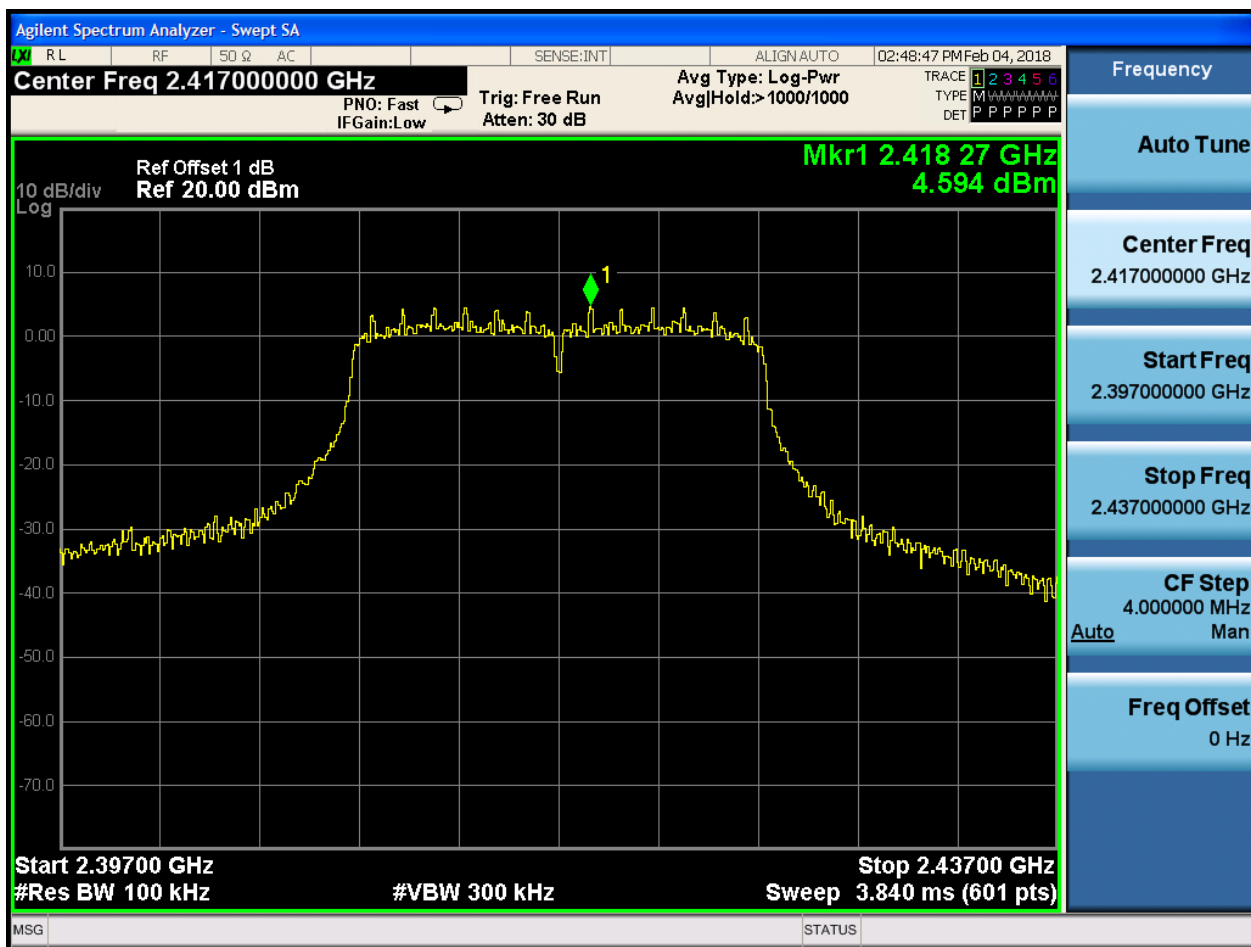






Puw:

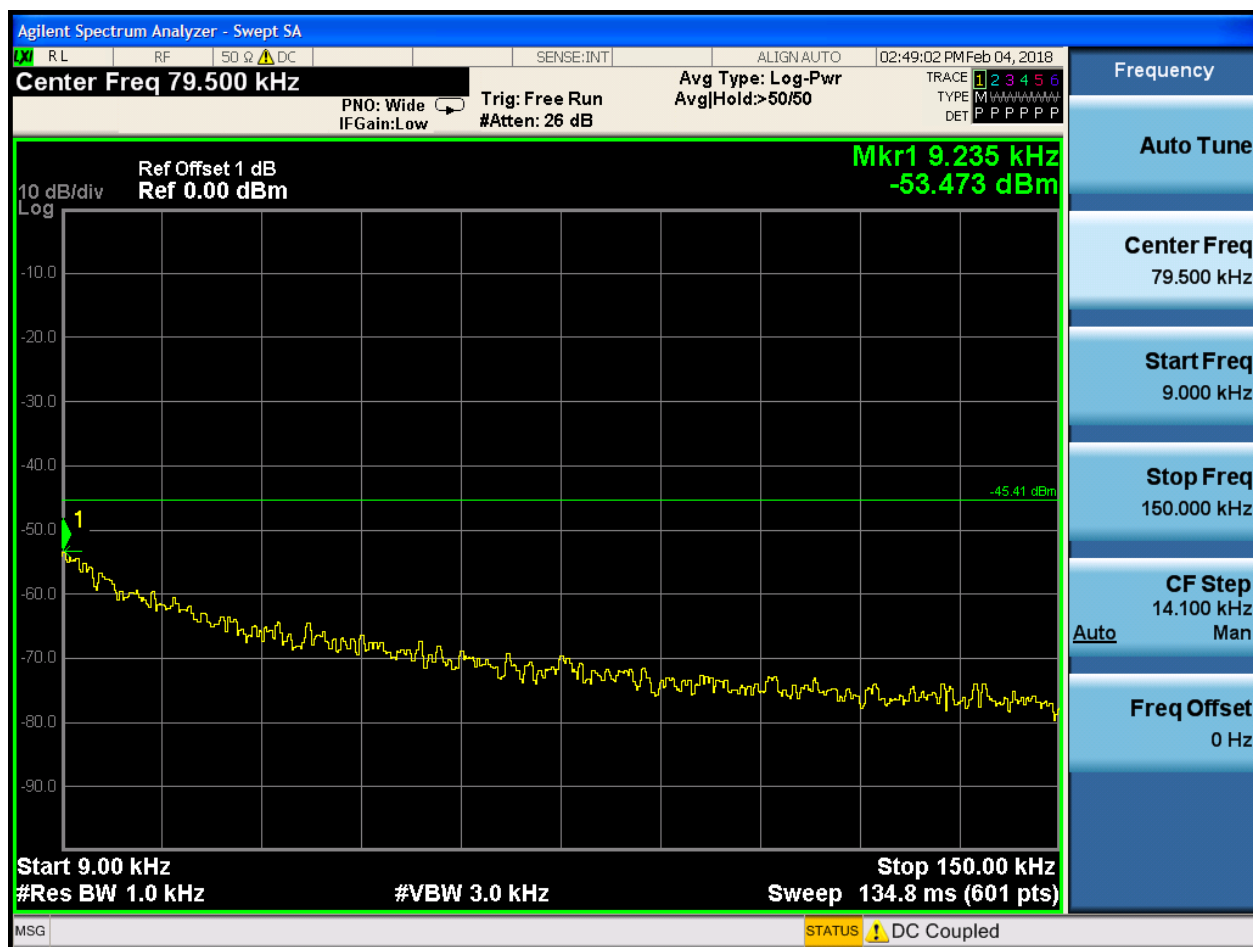


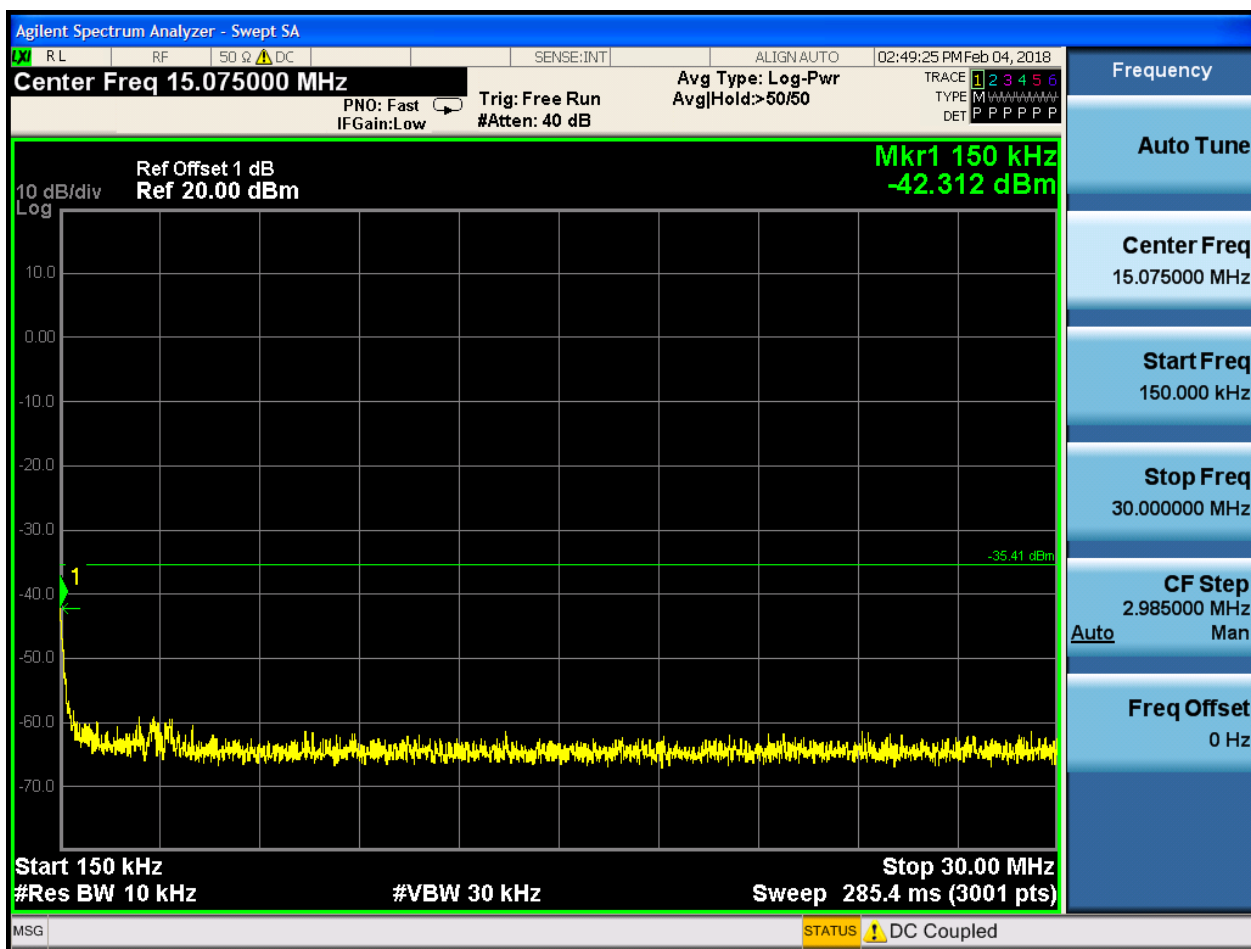

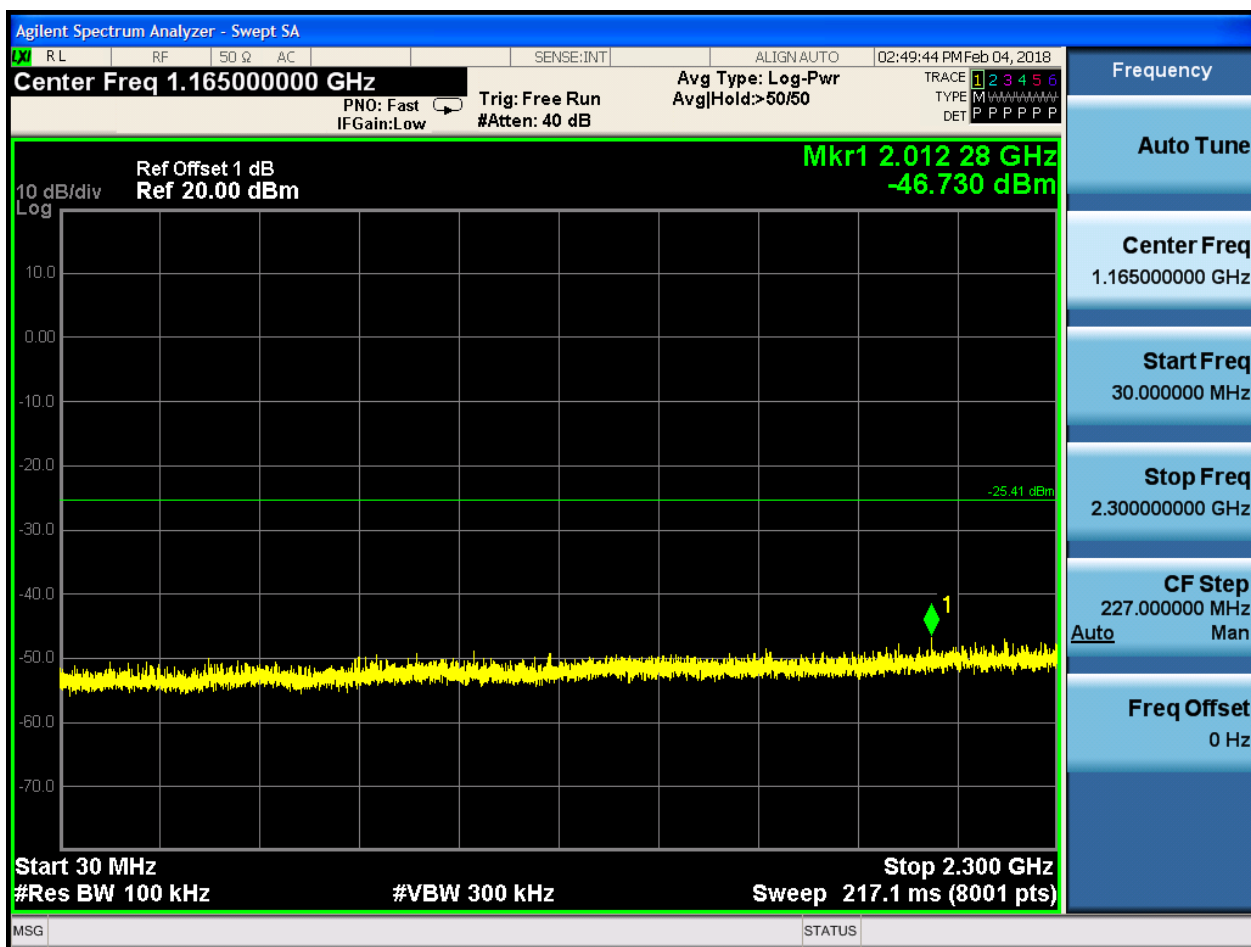

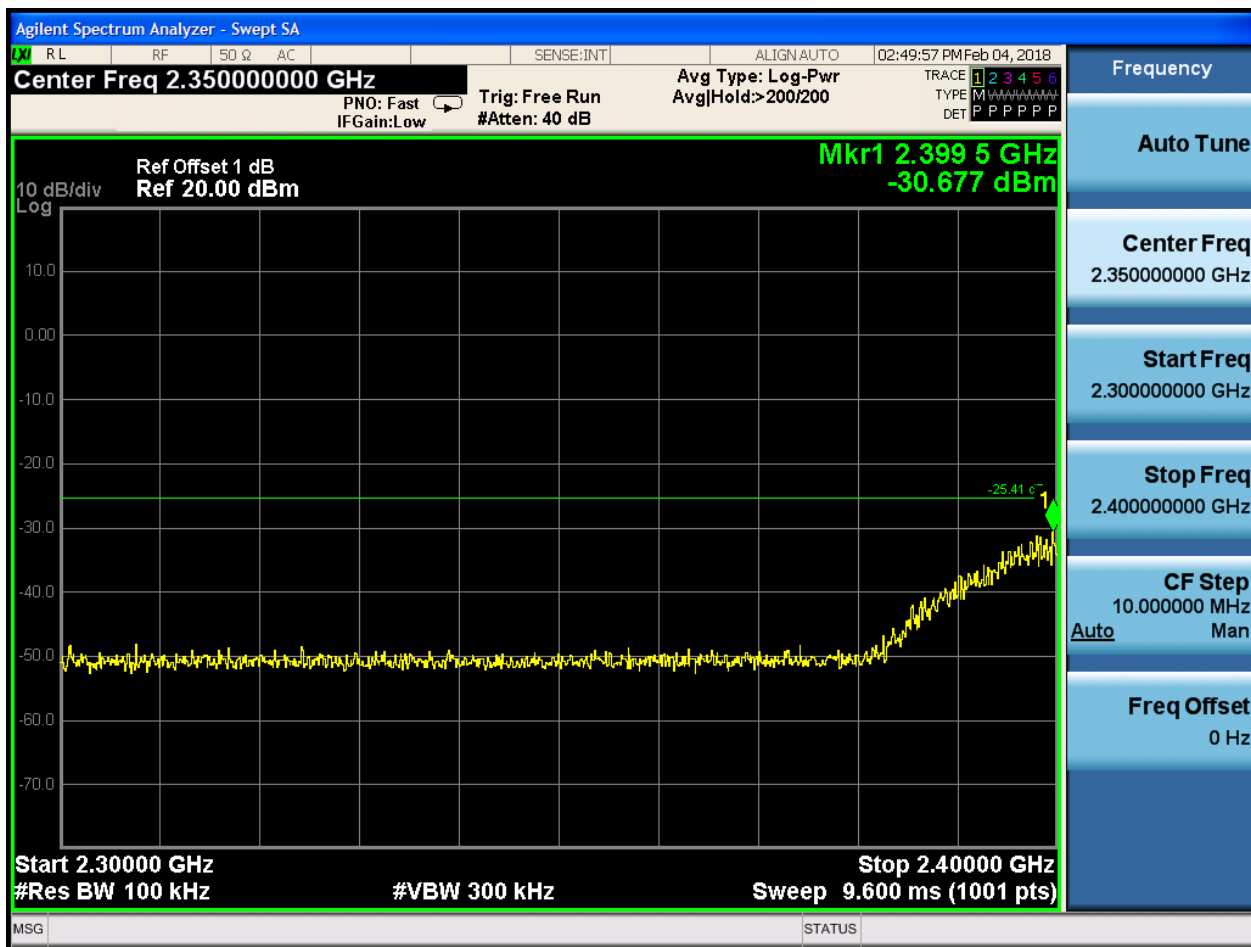

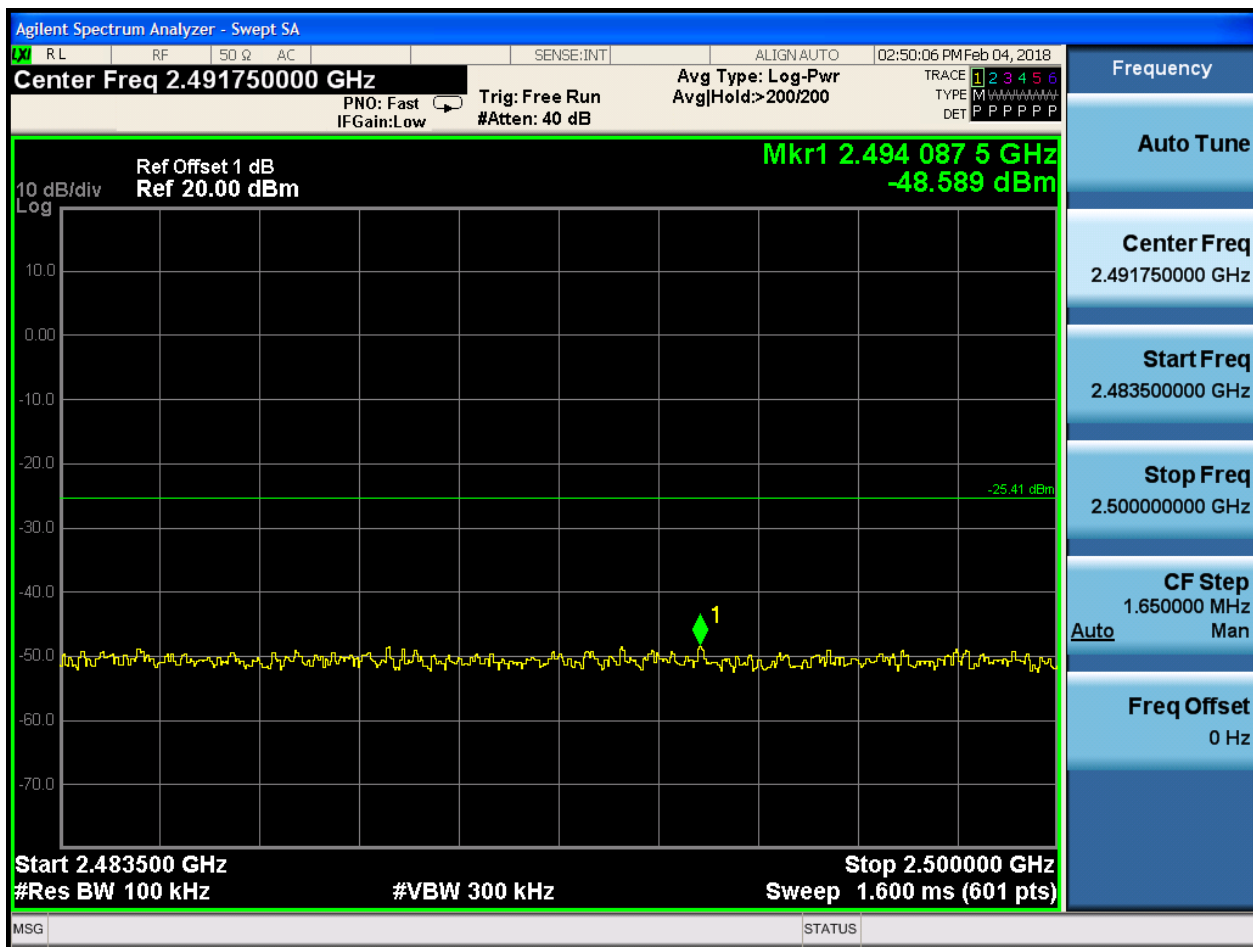


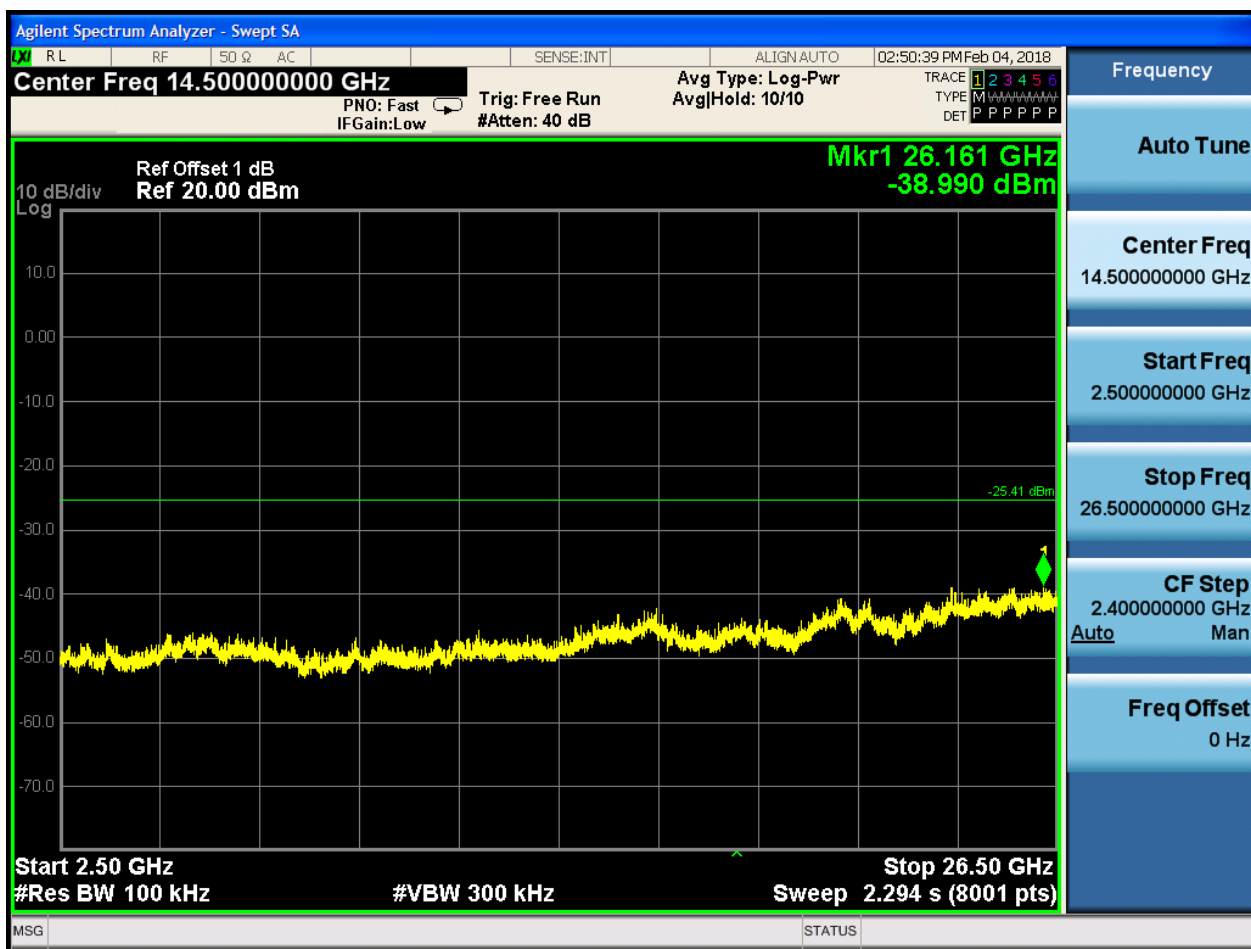




2.6 11G_M@Ant 1


Pref:

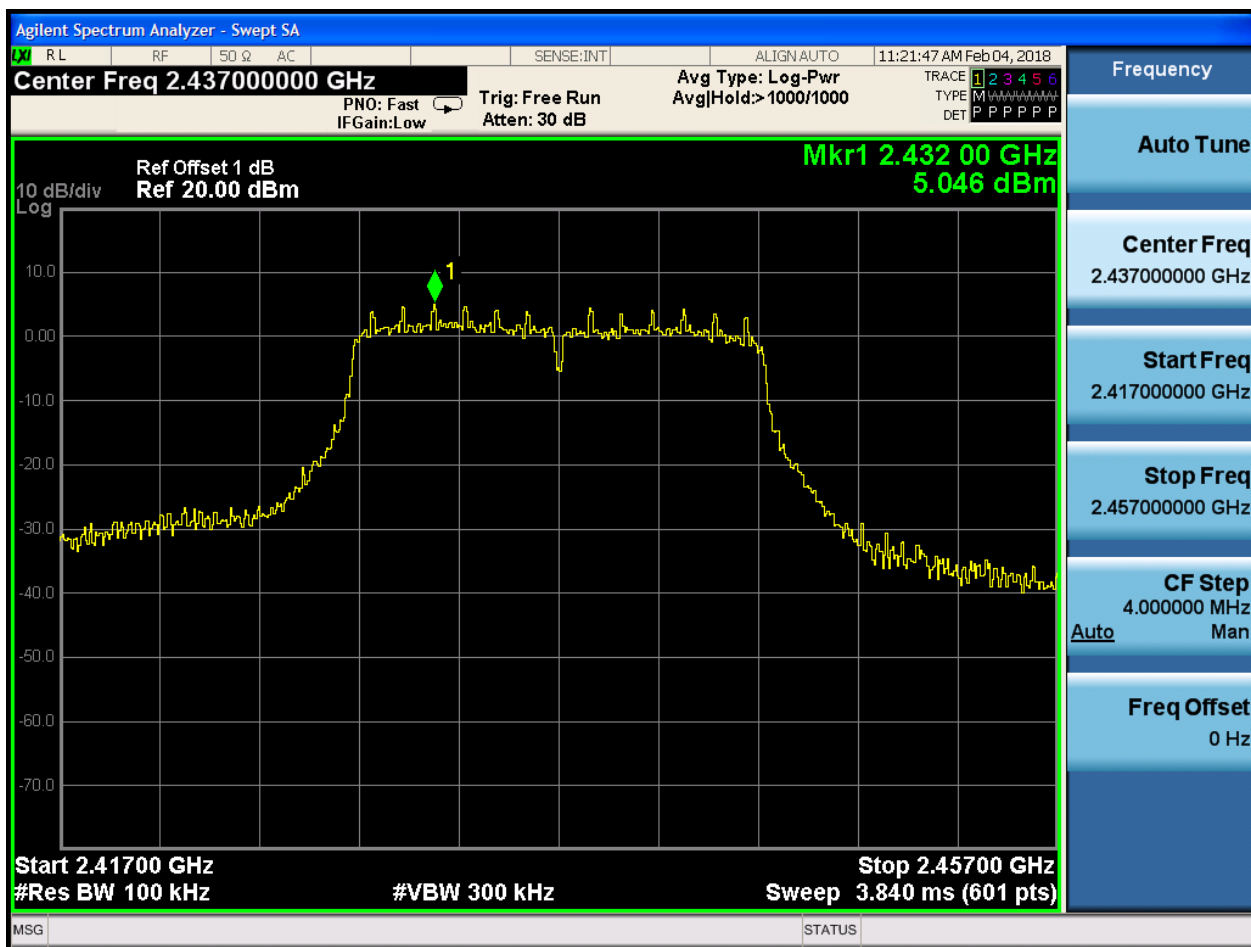






Puw:

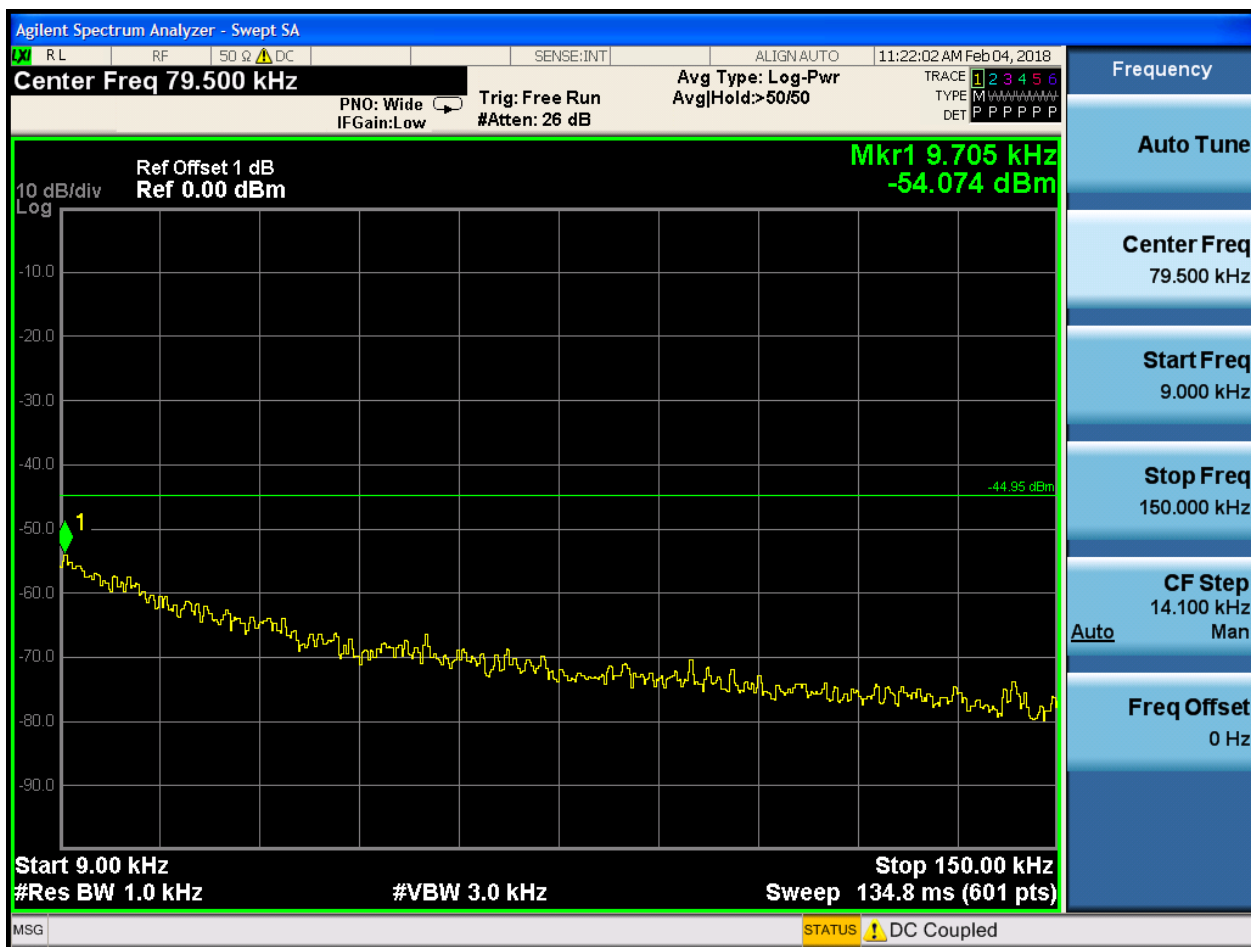


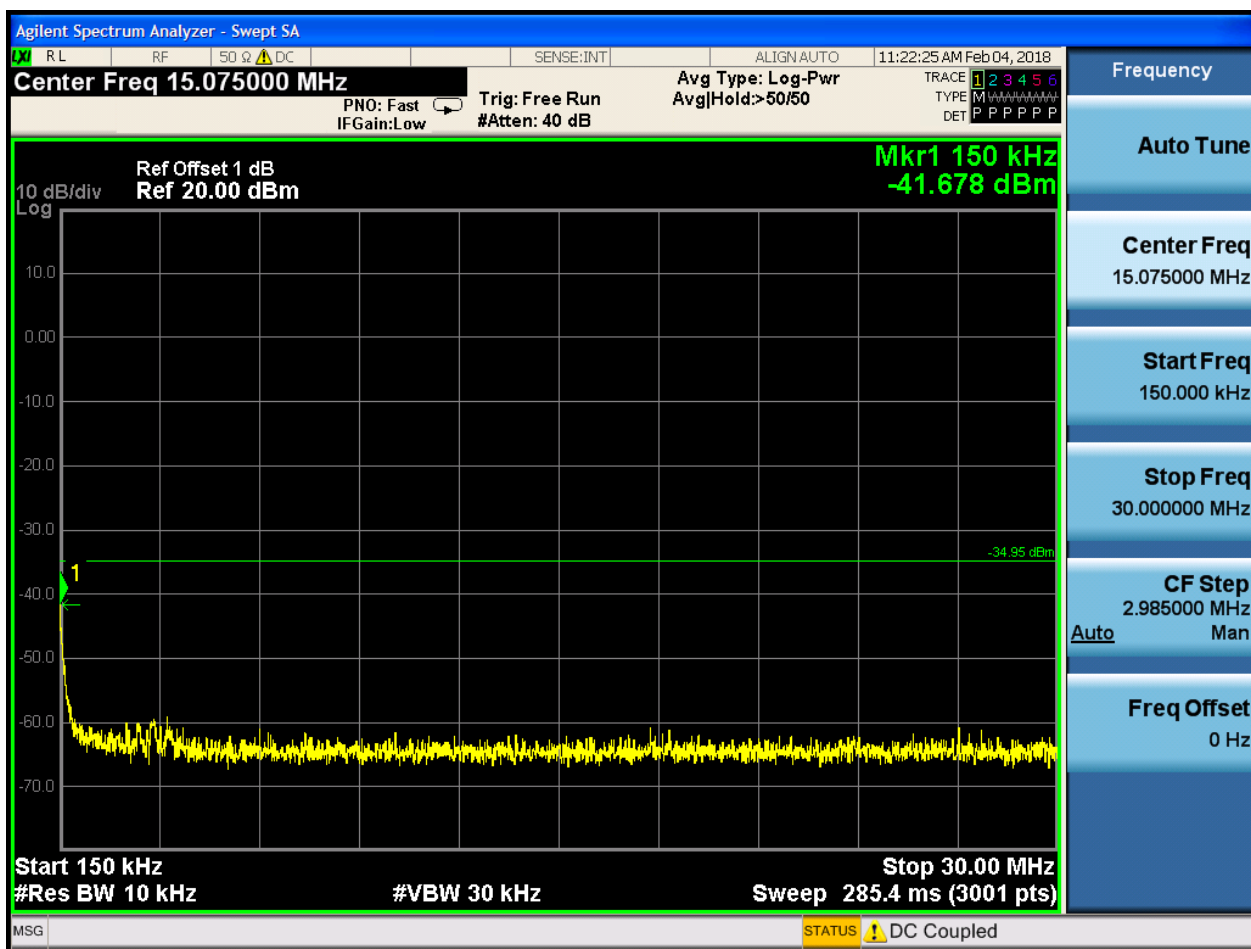

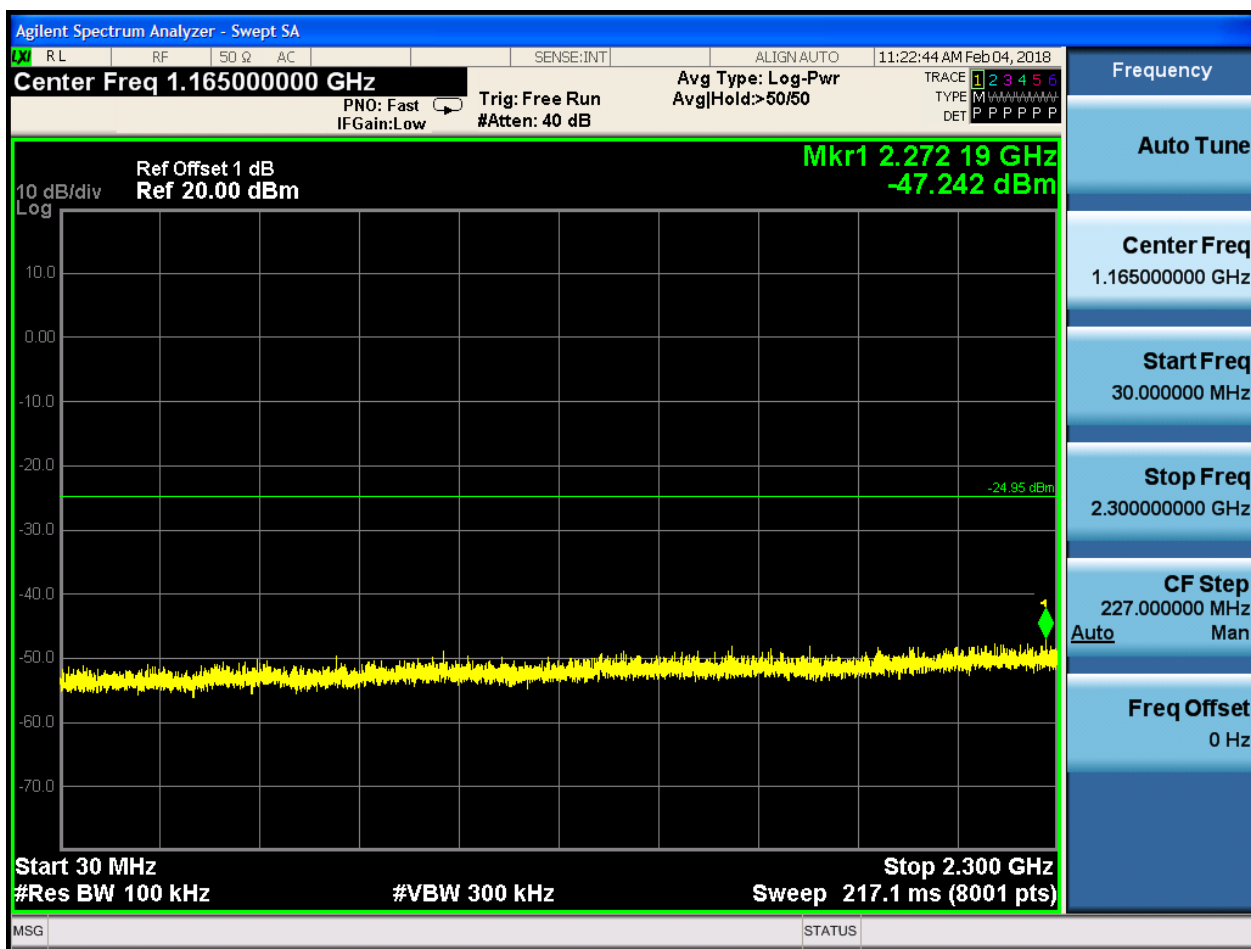

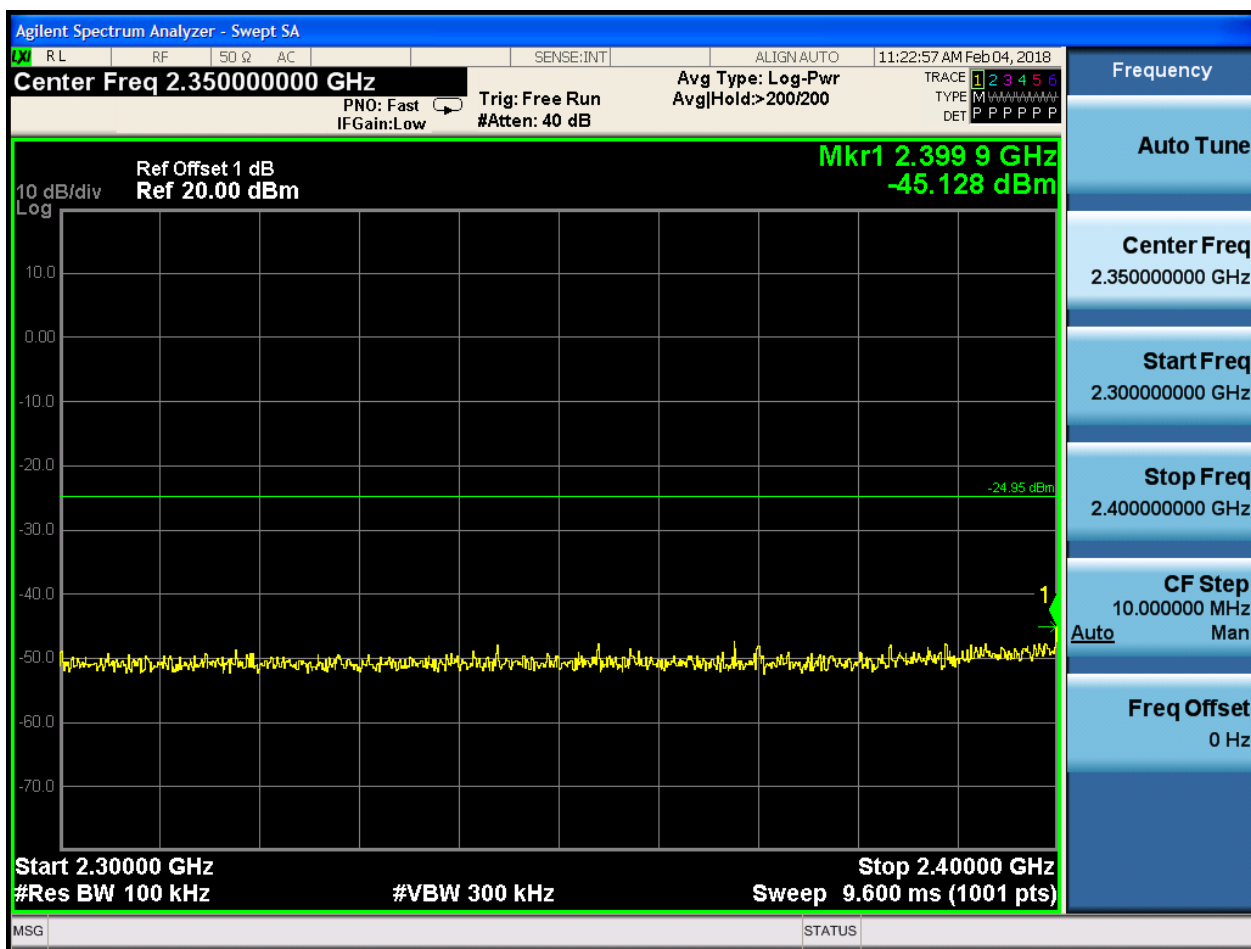

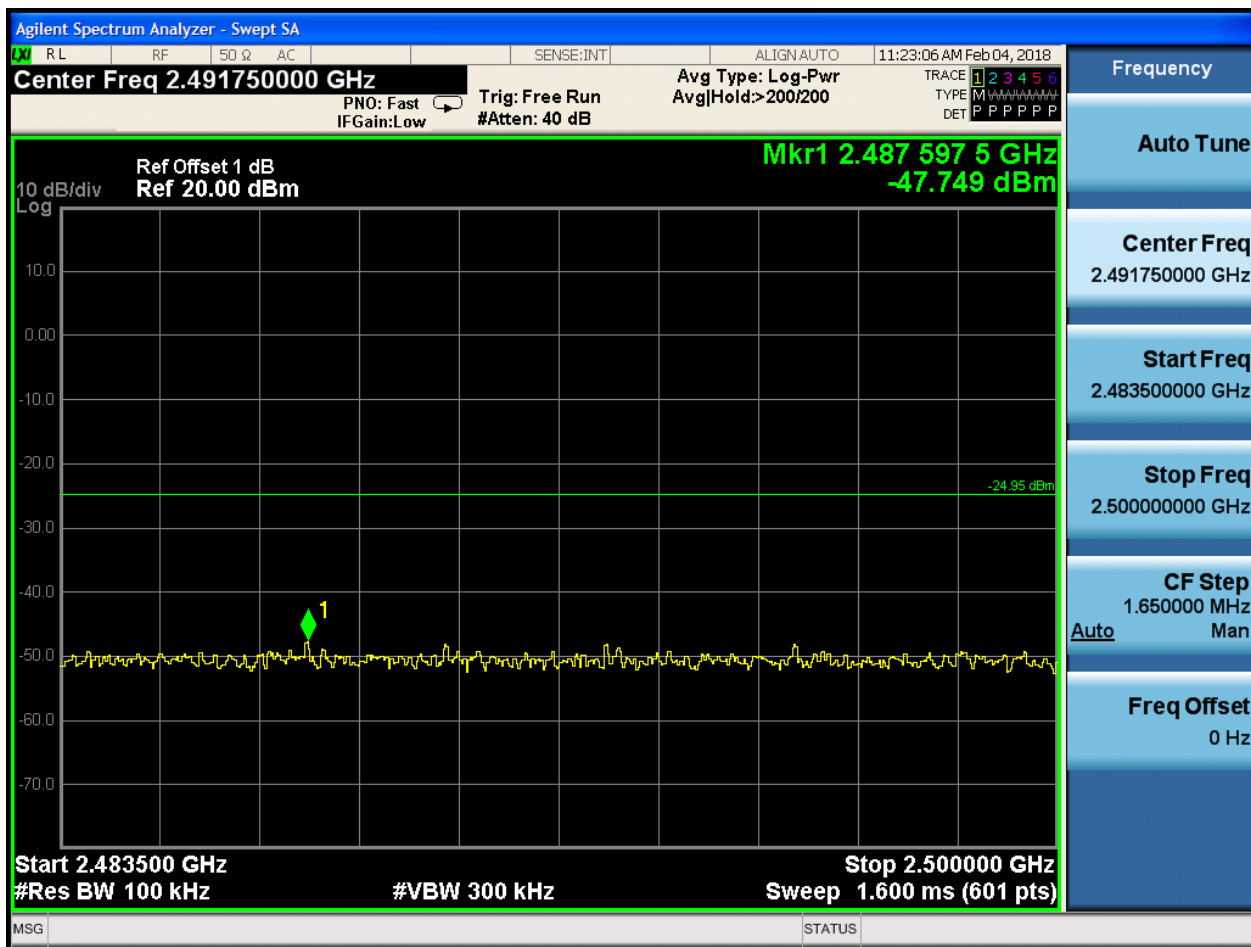


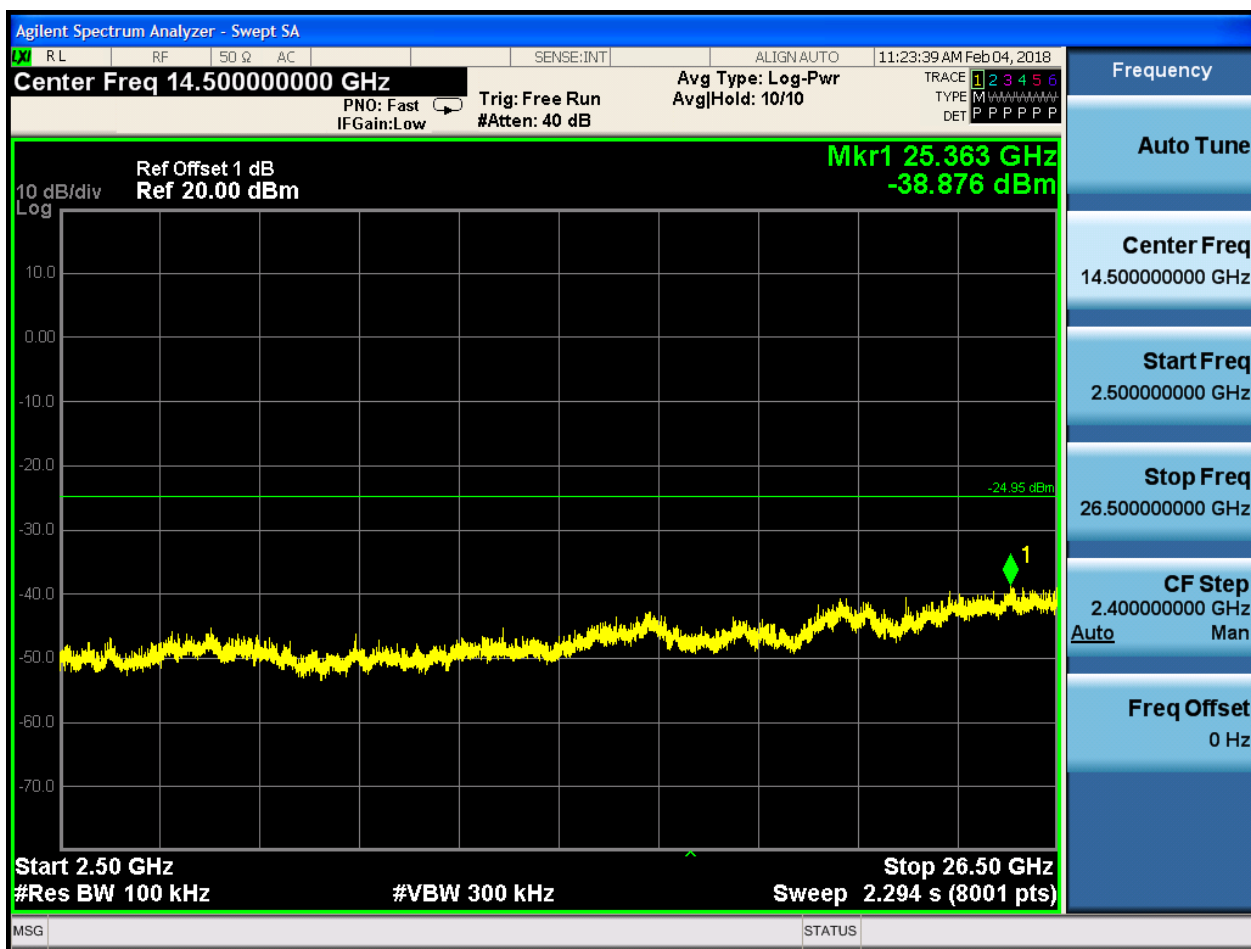



2.7 11G_H@Ant 1

Pref:

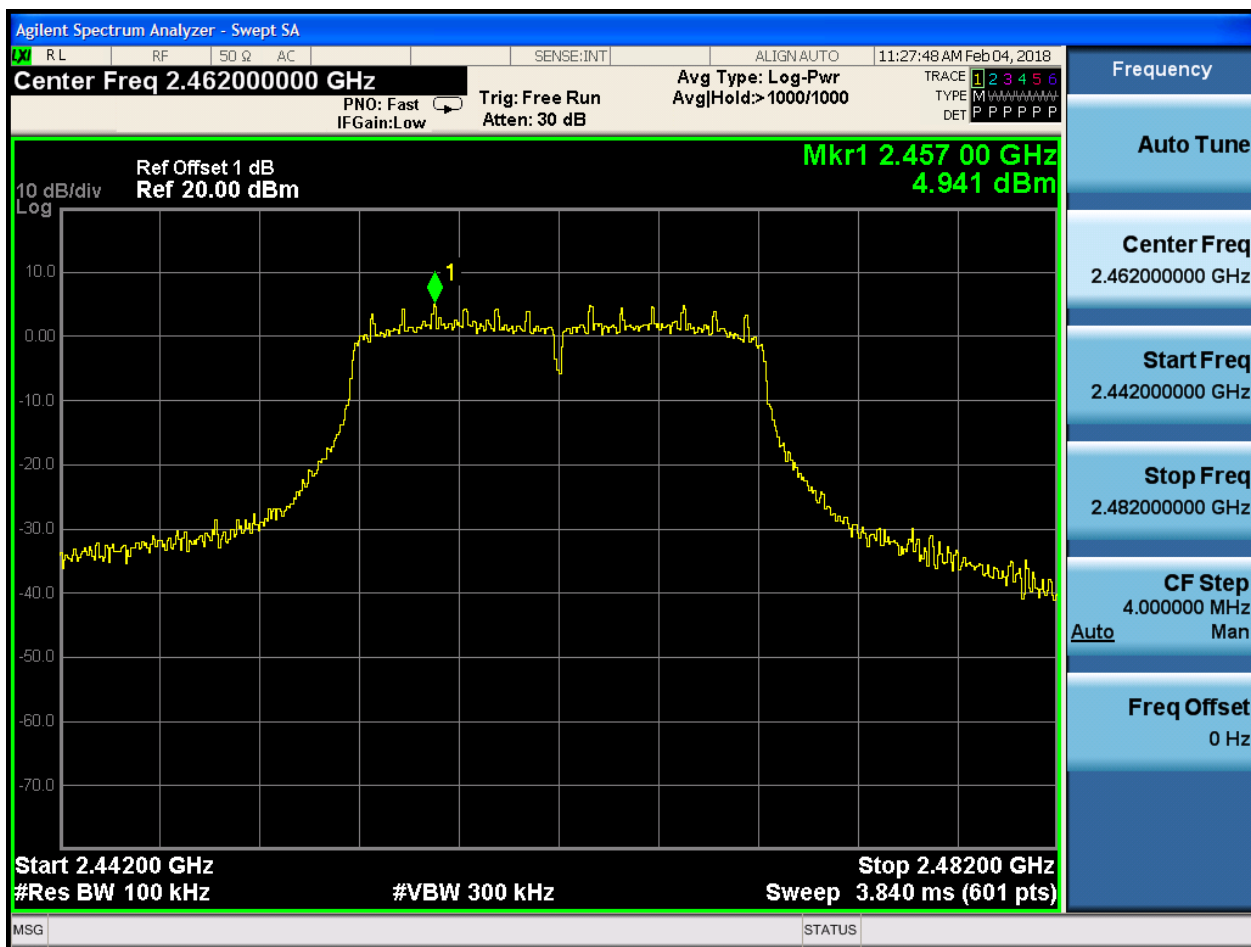



Puw:

