

# i.safe MOBILE



QUICK START MANUAL

IS540.1



MODEL M540A01

## › DEVICE OVERVIEW/FUNCTIONS



Document No. 1058MM01REV00  
Version: 2022-10-19

**(c) 2022 i.safe MOBILE GmbH**

i.safe MOBILE GmbH  
i\_Park Tauberfranken 10  
97922 Lauda-Koenigshofen  
Germany  
Tel. +49 9343 60148-0  
info@isafe-mobile.com  
www.isafe-mobile.com

Template: TEMPMM01REV10

» CONTENTS

English.....	4
--------------	---



## ENGLISH

### » FIRST

This Quick Start Manual contains all the important health and safety instructions for using the device **IS540.1 (model M540A01)** safely.

- » Read the “Safety” section of this Quick Start Manual carefully before using the device. If you do not follow these instructions or do not understand them, this could lead to death, severe injuries and damage to the device.
- » Read the **Operating Manual** before using the device.  
The Operating Manual with detailed information and instructions concerning the device can be found at **[www.isafe-mobile.com/en/support/downloads](http://www.isafe-mobile.com/en/support/downloads)**
- » Also read the **Safety Instructions** before using the device. These can be found in the device packaging and at **[www.isafe-mobile.com/en/support/downloads](http://www.isafe-mobile.com/en/support/downloads)**
- » Follow all instructions given on the device and on the packaging.
- » Follow local safety regulations.

### » SAFETY

#### USE IN EXPLOSION HAZARDOUS AREAS

- » Only use the device in explosion hazardous areas of zones 1/21 and 2/22 or outside of explosion hazardous areas.
- » Before entering an explosion hazardous area with the device,
  - make sure that only approved accessories are connected to the device, see section “Connecting approved accessories”,
  - make sure that no gap can be seen between the two halves of the device,
  - make sure the device is not damaged,
  - make sure that all the labels on the device are readable,
  - make sure the battery is screwed tight.
- » If you use the device in an explosion hazardous area,
  - do not loosen the screws on the device,
  - do not connect any accessories to the device,
  - do not open any interface cover,
  - do not charge the device,
  - do not open the device,
  - do not damage the device.
- » Switch off the device immediately and leave the explosion hazardous area without delay if
  - malfunctions occur on the device,
  - you have damaged the housing of the device,
  - you have exposed the device to excessive loads,
  - the labels on the device are no longer readable.

#### USE OUTSIDE OF EXPLOSION HAZARDOUS AREAS

- » Do not modify the device structurally.
- » Do not expose the device to high temperatures.
- » Do not expose the device to strong UV radiation.
- » Do not expose the device to processes with high electrical charges.

- » Do not expose the device to aggressive acids or bases.
- » Do not use the device in places where its use is prohibited.
- » Turn off the device in clinics or other medical facilities.
- » Always keep a safety distance of at least 15 cm between the device and a pacemaker or hearing aid. The device can affect the functioning of medical devices such as pacemakers and hearing aids.
- » When using the device while driving a motor vehicle, be sure to comply with applicable national laws.

## WHEN USING EARPHONES OR HEADSETS

- » First set the volume control on the device to 50 % of the maximum volume.
- » Gradually adjust the volume.




## » DEVICE OVERVIEW/FUNCTIONS (see illustration on page 2)

- 1) LOUDSPEAKER**
- 2) SOS KEY:** A long press of the SOS key sends an emergency call to a pre-saved emergency number (only in connection with a Lone Worker Protection app).
- 3) FRONT CAMERA**
- 4) ISM INTERFACE:** Connection for approved accessories. Also see section "Connecting approved accessories".
- 5) SIDE KEY RIGHT:** Optional function, e.g. camera - function can be assigned via Button App (system integrated).
- 6) MICROPHONE**
- 7) USB INTERFACE:** Connection for the i.safe PROTECTOR 2.0 USB-C Cable or for connection to other devices. Also see sections "Charging" and "Connecting approved accessories".
- 8) LOUDNESS CONTROL:** Volume up/Volume down.
- 9) SIDE KEY LEFT:** Optional function - function can be assigned via Button App (system integrated).
- 10) POWER KEY:** A long press switches the device on/off. A short press switches the stand-by mode on/off.
- 11) SENSORS:** Proximity sensor, light sensor.
- 12) EYELET:** Eyelet for hand strap.
- 13) BACK CAMERA**
- 14) LED FLASH**
- 15) NOISE CANCELLING:** Noise cancelling microphone.
- 16) LOUDSPEAKER:** Loudspeaker for hands-free function.
- 17) BATTERY**
- 18) CHARGING CONTACTS**

## » PREPARATION

The device has a card holder with a slot for a nano-SIM card and with a slot for a microSD card up to 128 GB.

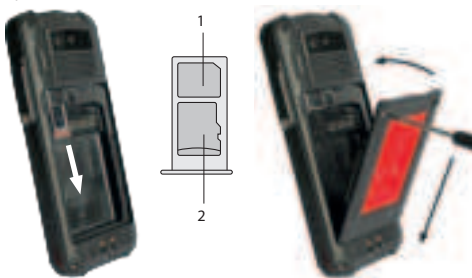

- » Carefully pull the card holder out of the card slot.
- » Insert the SIM card into the nano-SIM card slot (1) with the gold-coloured contacts facing down.
- » Insert the microSD card into the slot provided (2) with the gold-colored contacts facing down.
- » Carefully slide the card holder into the card slot.
- » Place the battery in the battery compartment.
- » Hand-tighten the screws using the Torx Screwdriver provided.
- » Check that the battery is seated correctly and securely.

### Activate eSIM

The device has a nano-SIM card slot and an additional eSIM. The eSIM is a non-removable, integrated digital SIM. eSIM is not supported by all mobile service provider.

You can activate the eSIM in several ways:

1. Via the Android Setup Wizard during initial device setup:

- » Scan the eSIM QR code that you have received from your service provider or manually enter the eID that you have received from your service provider.

2. Via the settings menu of the smartphone:

- » > Settings > Network & Internet > Mobile network (add Network) > Download SIM > scan (or manually enter) eSIM QR code that you have received from your service provider.

## » SWITCHING ON

- » Press and hold the on/off key for about 3 seconds.
- » When turning on the device for the first time, follow the instructions on the screen.
- » Enter the device or SIM PIN when the input dialog for the device or SIM PIN appears after switching on.
- » If you have inserted two SIM cards, select a favorite card. Information on operating the device can be found at [www.isafe-mobile.com/en/support/service](http://www.isafe-mobile.com/en/support/service) under the menu item "FAQ".

## » CHARGING

- » Only charge the device outside of explosion hazardous areas.
- » Only charge the device using the **i.safe PROTECTOR 2.0** USB-C Cable supplied.
- » Do not charge the device in the vicinity of flammable substances.
- » Only charge the device at ambient temperatures between 0 °C to +45 °C (+32 °F to +113 °F).
- » Charge the device under dry indoor conditions only.
- » Do not charge the device in environments dusty or humid.
  
- » Connect the adapter suitable for your country to the power supply unit.
- » Connect the **i.safe PROTECTOR 2.0** USB-C Cable to the power supply unit.
- » Connect the **i.safe PROTECTOR 2.0** USB-C Cable to the USB interface of the device.

## » CONNECTING APPROVED ACCESSORIES

- » Only connect accessories approved by **i.safe MOBILE** to the device. Accessories approved by **i.safe MOBILE** can be found at [www.isafe-mobile.com/en/products](http://www.isafe-mobile.com/en/products)
- » Connect approved accessories to the ISM interface of the device only outside of explosion hazardous areas.
- » Operate approved accessories in explosion hazardous areas only on the ISM interface of the device. Wired connections via the USB interface are prohibited.
- » Connect the plug of the accessory securely to the ISM interface of the device and check that the plug is seated correctly and securely before entering explosion hazardous areas.
- » Close the ISM interface with the cover provided when you are not using accessories.
- » Only use USB interface outside of explosion hazardous areas.
- » Never open the cover of the USB interface in explosion hazardous areas.

Approved accessories can be connected to any ISM interface and to the USB interface.



- » Loosen the screw on the ISM interface cover using the Screwdriver provided and remove the cover as shown. The Screwdriver is included in the accessory package.
- » Connect the plug of the approved accessory to the ISM interface as shown.
- » Hand-tighten the screws using the Screwdriver provided.
- » Check that the plug is seated correctly and securely.

The USB interface is used for charging and data transfer.

- » Connect approved accessories or other devices to the USB interface only by using the **i.safe PROTECTOR 2.0** USB-C Cable.

## » MAINTENANCE/REPAIR

- » Contact the **i.safe MOBILE** repair service at [www.isafe-mobile.com/en/support/service](http://www.isafe-mobile.com/en/support/service) if the device is not working normally, if the device needs to be repaired or if a replacement part is required.

## RETURN SHIPMENT

- » Contact the **i.safe MOBILE** repair service at [www.isafe-mobile.com/en/support/service](http://www.isafe-mobile.com/en/support/service)

## » CLEANING

- » Turn off the device before cleaning.
- » Do not charge the device while cleaning.
- » Do not use chemical agents for cleaning.
- » Clean the device and the Power Adapter with a soft, moistened antistatic cloth.
- » Clean the display screen regularly with a soft, antistatic cloth.

## » STORAGE

- » Store the device at a humidity of 10 % to 60 % at the following ambient temperatures:
  - › Up to one month: -20 °C to +45 °C (-4 °F to +113 °F)
  - › Up to 3 months: -10 °C to +35 °C (+14 °F to +113 °F)
  - › Over 3 months: -10 °C to +25 °C (+14 °F to +77 °F)

## » RECYCLING

- » DO NOT throw away batteries with household waste.
- » Always dispose electronic products, batteries and packaging material at the appropriate collection points. This way, you prevent uncontrolled waste disposal and promote the recycling of material resources.



You can obtain further information from regional waste disposal companies, state authorities or the **i.safe MOBILE** service centre responsible for your country or region at [www.isafe-mobile.com/en/support/service](http://www.isafe-mobile.com/en/support/service)

## » TRADEMARKS

**i.safe MOBILE** and the **i.safe MOBILE** logo are registered trademarks of the **i.safe MOBILE GmbH**.

Comes with the Google™ app and Google Chrome™

Google and Google Chrome are trademarks of Google LLC.

All other trademarks and copyrights are the properties of their respective owners.







## **CONTACT/SERVICE CENTRE**

**FOR FURTHER QUESTIONS PLEASE CONTACT OUR SERVICE CENTRE:**

- » **i.safe MOBILE GmbH**, i\_Park Tauberfranken 10, 97922 Lauda-Koenigshofen, Germany
- » **[support@isafe-mobile.com](mailto:support@isafe-mobile.com)**
- » **<https://support.isafe-mobile.com>**



[WWW.ISAFE-MOBILE.COM](http://WWW.ISAFE-MOBILE.COM)