

**FCC/IC - TEST REPORT**Report Number : **709502306120-00C** Date of Issue: March 12, 2024

Model : AccuFab-CEL

Product Type : 3D Printer

Applicant : SHINING 3D Tech Co., Ltd.

Address : No.1398, Xiangbin Road, Wenyan, Xiaoshan, Hangzhou,
Zhejiang, China

Manufacturer : SHINING 3D Tech Co., Ltd.

Address : No.1398, Xiangbin Road, Wenyan, Xiaoshan, Hangzhou,
Zhejiang, ChinaTest Result : ☒ **Positive** ☐ **Negative**Total pages including
Appendices : 31

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.



1 Table of Contents

| | | |
|----|---|----|
| 1 | Table of Contents | 2 |
| 2 | Details about the Test Laboratory | 3 |
| 3 | Description of the Equipment under Test..... | 4 |
| 4 | Summary of Test Standards | 8 |
| 5 | Summary of Test Results..... | 9 |
| 6 | General Remarks..... | 10 |
| 7 | Test Setups..... | 11 |
| 8 | Systems test configuration | 13 |
| 9 | Dynamic Frequency Selection (DFS) Requirement | 16 |
| 10 | Test result..... | 22 |
| 11 | Test Equipment List..... | 30 |
| 12 | System Measurement Uncertainly | 31 |



2 Details about the Test Laboratory

Details about the Test Laboratory

| | |
|-------------------------|--|
| Test Site 1 | TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch No.16 Lane, 1951 Du Hui Road, Shanghai 201108, P.R. China |
| Telephone: | +86 21 6141 0123 |
| Fax: | +86 21 6140 8600 |
| FCC Registration No.: | 820234 |
| FCC Designation Number: | CN1183 |
| ISED CAB identifier | CN0101 |
| IC Registration No.: | 31668 |

3 Description of the Equipment under Test

Product: 3D Printer

Model no.: AccuFab-CEL

FCC ID: 2AMG4-CEL

IC: 24652-CEL

Options and accessories: NA

Rating: AC 110-240V, 50/60Hz

RF Transmission Frequency: For NFC: 13.56 MHz
For 2.4G Wi-Fi:
For 802.11b/g/n-HT20: 2412~2462 MHz

For 5G Wi-Fi:

| Band (GHz) | Operating Channel Number | Channel center frequencies for 20MHz bandwidth (MHz) |
|-------------------|--------------------------|--|
| 5.15GHz~5.25GHz | 36 | 5180 |
| | 40 | 5200 |
| | 44 | 5220 |
| | 48 | 5240 |
| 5.25GHz~5.35GHz | 52 | 5260 |
| | 56 | 5280 |
| | 60 | 5300 |
| | 64 | 5320 |
| 5.5GHz~5.7GHz | 100 | 5500 |
| | 104 | 5520 |
| | 108 | 5540 |
| | 112 | 5560 |
| | 116 | 5580 |
| | 132 | 5660 |
| | 136 | 5680 |
| | 140 | 5700 |
| 5.725GHz~5.825GHz | 149 | 5745 |
| | 153 | 5765 |
| | 157 | 5785 |
| | 161 | 5805 |
| | 165 | 5825 |

| Band (GHz) | Operating Channel Number | Channel center frequencies for 40MHz bandwidth (MHz) |
|-------------------|--------------------------|--|
| 5.15GHz~5.25GHz | 38 | 5190 |
| | 46 | 5230 |
| 5.25GHz~5.35GHz | 54 | 5270 |
| | 62 | 5310 |
| 5.5GHz~5.7GHz | 102 | 5510 |
| | 110 | 5550 |
| | 118 | 5590 |
| | 134 | 5670 |
| 5.725GHz~5.825GHz | 151 | 5755 |
| | 159 | 5795 |

| Band (GHz) | Operating Channel Number | Channel center frequencies for 80MHz bandwidth (MHz) |
|-------------------|--------------------------|--|
| 5.15GHz~5.25GHz | 42 | 5210 |
| 5.25GHz~5.35GHz | 58 | 5290 |
| 5.5GHz~5.7GHz | 106 | 5530 |
| 5.725GHz~5.825GHz | 155 | 5775 |

No. of Operated Channel:

The device shall not be capable of transmitting in the 5600-5650 MHz band.

For NFC: 13.56 MHz

For 2.4G Wi-Fi:

11 for 802.11b/802.11g/802.11n(H20)

For 5G Wi-Fi:

5180~5240 MHz (U-NII-1)

5260~5320 MHz (U-NII-2A)

5500~5700 MHz (U-NII-2C)

5745~5825 MHz (U-NII-3)

Modulation:

For NFC: ASK

For 2.4G Wi-Fi:

SISO: Direct Sequence Spread Spectrum (DSSS) for 802.11b

Orthogonal Frequency Division Multiplexing (OFDM) for 802.11g

MIMO: Orthogonal Frequency Division Multiplexing (OFDM) for 802.11n

For 5G Wi-Fi:

MIMO: Orthogonal Frequency Division Multiplexing (OFDM) for 802.11a/n/ac

Hardware Version: A040

Software Version: 3.5.30

Data speed: 2.4G Wi-Fi:
SISO: 11b 1-11Mbps
11g 6-54Mbps

MIMO: 11n HT20 6.5 ~ 144.4Mbps

5G Wi-Fi:
MIMO: 11a 6 ~ 54Mbps,
11n HT20 13 ~ 144.4Mbps, 11n HT 40 27 ~ 300Mbps,
11ac VHT20 13 ~ 173.3Mbps, 11ac VHT40 27 ~ 400Mbps,
11ac VHT80 58.5 ~ 866.7Mbps

Antenna Type: For NFC: PCB loop
For 2.4GHz & 5GHz: FPC

Antenna Gain: For NFC: 2dBi
Antenna1: 5.39 dBi for 2.4GWi-Fi, Antenna2: 3.23 dBi for 2.4GWi-Fi
Antenna1: 4.3 dBi for 5GWi-Fi, Antenna2: 5.72 dBi for 5GWi-Fi

Directional gain: For 2.4GHz Wi-Fi output power & power spectral density: 7.39 dBi
Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi
G1 = 5.39 dBi, G2 = 3.23 dBi, NANT = 2
So Directional gain =
 $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi = $10 \log[(10^{5.39/20} + 10^{3.23/20})^2 / 2]$ dBi = 7.39 dBi

For 5GHz Wi-Fi output power & power spectral density: 8.05 dBi
Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi
G1 = 4.3 dBi, G2 = 5.72 dBi, NANT = 2
So Directional gain =
 $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi = $10 \log[(10^{4.3/20} + 10^{5.72/20})^2 / 2]$ dBi = 8.05 dBi

The Equipment supports MIMO and does not support beamforming and CDD modulation, and all antennas have the different gain,
According to KDB662911 D01 chapter F d) (i) :
Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi
[Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]



Description of the EUT: The Equipment Under Test (EUT) is a 3D Printer with NFC and Wi-Fi Module. The EUT support NFC operated at 13.56MHz and Wi-Fi operated at 2.4GHz and 5GHz.

Test sample no.: SHA-748811-2

The sample's mentioned in this report is/are submitted/ supplied/ manufactured by client. The laboratory therefore assumes no responsibility for accuracy of information on the brand name, model number, origin of manufacture, consignment, antenna gain or any information supplied.



4 Summary of Test Standards

| Test Standards | |
|-------------------------------------|--|
| FCC Part 15 Subpart E, 2021 Edition | PART 15 - RADIO FREQUENCY DEVICES Subpart E - Unlicensed National Information Infrastructure Devices |
| RSS-Gen Issue 5 Amendment 1 | General Requirements for Compliance of Radio Apparatus |
| RSS-247 Issue 3 | Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and License-Exempt Local Area Network (LE-LAN) Devices |

Test Method:

KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02

KDB 662911 D01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band

ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices

5 Summary of Test Results

| Technical Requirements | | | | |
|--|--|-------------------------------------|--------------------------|-------------------------------------|
| FCC Part 15 Subpart E & RSS-247 Issue 3/RSS-Gen Issue 5; KDB 905462 D02 | | | | |
| Clause | Test | Test Result | | |
| | | Pass | Fail | N/A |
| 15.407(h)(2); RSS-247 6.3; KDB 905462 D02 7.8.1 | UNII Detection Bandwidth | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| 15.407(h)(2); RSS-247 6.3; KDB 905462 D02 7.8.2 Performance Requirement Check | Initial Channel Availability Check Time (CAC) | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| | Radar Burst at the Beginning of the CAC | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| | Radar Burst at the End of the CAC | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| 15.407(h)(2); RSS-247 6.3; KDB 905462 D02 7.8.3 In-Service Monitoring | Channel Move Time | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | Channel Closing Transmission Time | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | Non-Occupancy Period | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 15.407; RSS-247 6.3; KDB 905462 D02 7.8.4 | Statistical Performance Check | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |

Remark: The EUT is a Client Device without Radar Detection.



6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2AMG4-CEL, IC: 24652-CEL, complies with DFS requirement in FCC Part 15 Subpart E and RSS-247, RSS-GEN.

SUMMARY:

All tests according to the regulations cited on page 6 were

■ - Performed

□ - **Not** Performed

The Equipment under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: January 2, 2024

Testing Start Date: January 2, 2024

Testing End Date: March 8, 2024

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch

Reviewed by:

Prepared by:

Tested by:


Hui TONG
Review Engineer

Wenqiang LU
Project Engineer


Chengjie GUO
Test Engineer

7 Test Setups


7.1 Setup for Master with injection at the Master

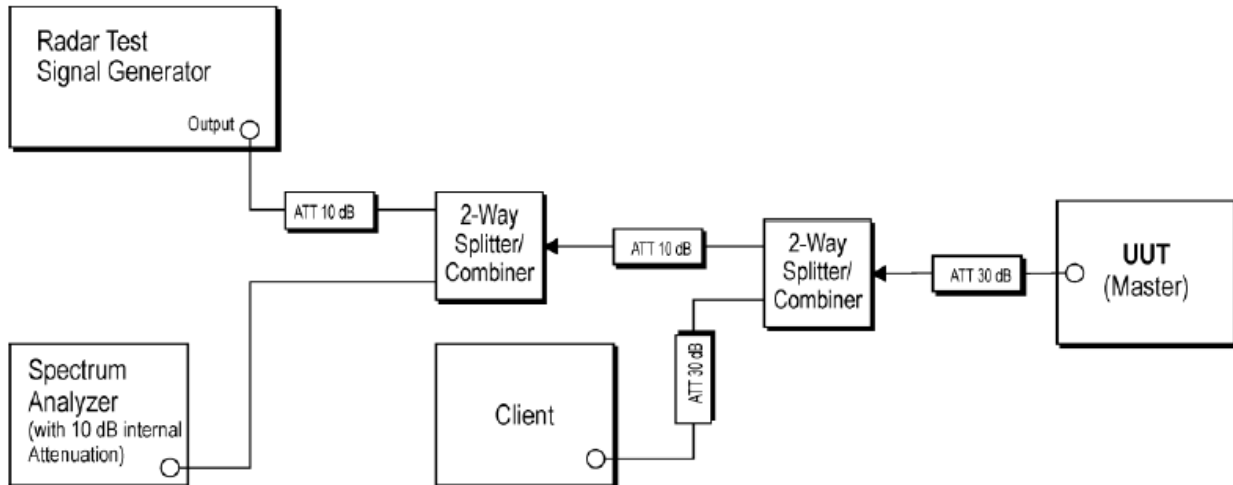

7.2 Setup for Client with injection at the Master

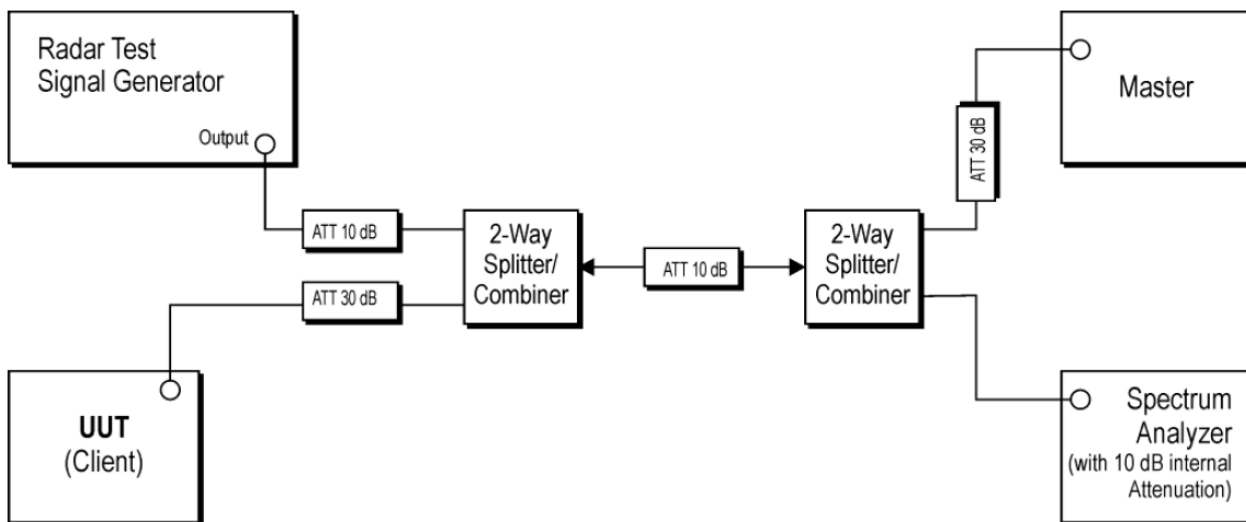

7.3 Setup for Client with injection at the Client

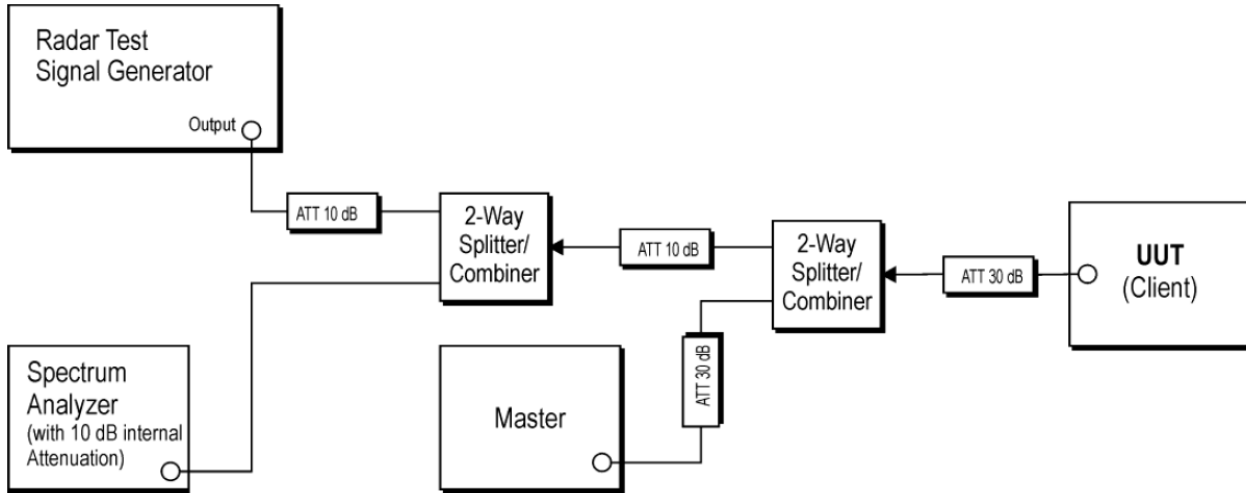

8 Systems test configuration

Auxiliary Equipment Used during Test:

| DESCRIPTION | MANUFACTURER | MODEL NO.(SHIELD) |
|------------------------|----------------------|-------------------|
| Notebook | Lenove | E470 |
| Dual Band Wi-Fi Router | ASUSTek Computer Inc | RT-AX82U |

Test software: SecureCRT.exe, which used to control the EUT in continues transmitting mode.

The pre-test has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

| | Modulation Type | Data Rate | Index Value (Power level setting) |
|-------------|------------------------|---------------|--------------------------------------|
| MIMO | 802.11a OFDM | 6Mbps | 11 |
| | 802.11n (HT20): OFDM | MCS0 (13Mbps) | 11 |
| | 802.11n (HT40): OFDM | MCS0 (27Mbps) | 8 |
| | 802.11ac (VHT20): OFDM | 11ac 13Mbps | 11 |
| | 802.11ac (VHT40): OFDM | 11ac 27Mbps | 8 |
| | 802.11ac (VHT80): OFDM | 11ac 58.5Mbps | 7 |


Device Capabilities

Duty Cycle: 100%

Note: 2.4GHz WLAN (DTS) operation is possible in 20MHz, and 40MHz channel bandwidths.
5GHz WLAN (UNII) operation is possible in 20MHz, 40MHz and 80MHz channel bandwidths.


8.2 MWRF test system configuration

Conducted Test

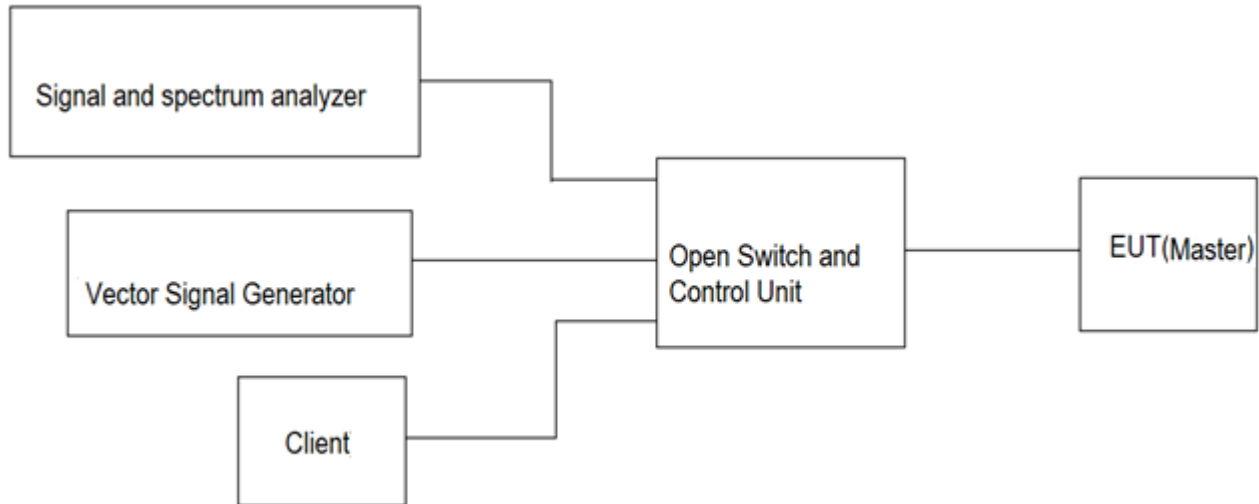

Conducted Radar waveform calibration

- (1) A 50ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master.
- (2) The interference Radar Detection Threshold Level is $-62\text{dBm}+2.9\text{dB}+1.5\text{dB}=-57.6\text{dBm}$ that had been taken into account the output power range and antenna gain.
- (3) The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3MHz. The spectrum analyzer had offset -1.5dB to compensate RF cable loss 1.5dB. And antenna cable is supplied with device, so antenna cable loss is 0.4dB.
- (4) The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was $-62\text{dBm}+2.9\text{dB}+1.5\text{dB}=-57.6\text{dBm}$. Capture the spectrum analyzer plots on short pulse radar waveform.

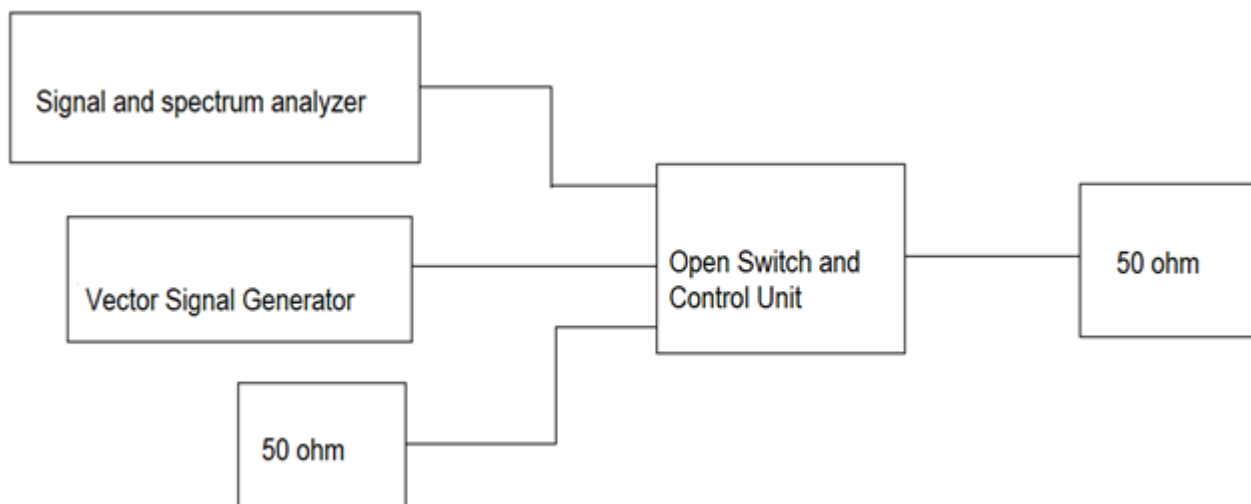

8.3 Channel Loading

System testing will be performed with channel-loading using means appropriate to the data types that are used by the unlicensed device. The following requirements apply:

| | |
|-------------------------------------|---|
| <input type="checkbox"/> | a) The data file must be of a type that is typical for the device (i.e., MPEG-2, MPEG-4, WAV, MP3, MP4, AVI, etc.) and must generally be transmitting in a streaming mode. |
| <input checked="" type="checkbox"/> | b) Software to ping the client is permitted to simulate data transfer but must have random ping intervals. |
| <input checked="" type="checkbox"/> | c) Timing plots are required with calculations demonstrating a minimum channel loading of approximately 17% or greater. For example, channel loading can be estimated by setting the spectrum analyzer for zero span and approximate the Time On/ (Time On + Off Time). This can be done with any appropriate channel BW and modulation type. |
| <input type="checkbox"/> | d) Unicast or Multicast protocols are preferable but other protocols may be used. The appropriate protocol used must be described in the test procedures. |

9 Dynamic Frequency Selection (DFS) Requirement

9.1 DFS Overview

The following table from KDB 905462 lists the applicable requirements for the DFS testing.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

| Requirement | Operational Mode | | |
|--|------------------|--------------------------------|-----------------------------|
| | Master | Client Without Radar Detection | Client With Radar Detection |
| <i>Non-Occupancy Period</i> | Yes | Not required | Yes |
| <i>DFS Detection Threshold</i> | Yes | Not required | Yes |
| <i>Channel Availability Check Time</i> | Yes | Not required | Not required |
| <i>U-NII Detection Bandwidth</i> | Yes | Not required | Yes |

Table 2: Applicability of DFS requirements during normal operation

| Requirement | Operational Mode | |
|--|--|--------------------------------|
| | Master Device or Client with Radar Detection | Client Without Radar Detection |
| <i>DFS Detection Threshold</i> | Yes | Not required |
| <i>Channel Closing Transmission Time</i> | Yes | Yes |
| <i>Channel Move Time</i> | Yes | Yes |
| <i>U-NII Detection Bandwidth</i> | Yes | Not required |

| Additional requirements for devices with multiple bandwidth modes | Master Device or Client with Radar Detection | Client Without Radar Detection |
|--|--|--|
| <i>U-NII Detection Bandwidth and Statistical Performance Check</i> | All BW modes must be tested | Not required |
| <i>Channel Move Time and Channel Closing Transmission Time</i> | Test using widest BW mode available | Test using the widest BW mode available for the link |
| <i>All other tests</i> | Any single BW mode | Not required |
| Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency. | | |

9.2 DFS Detection Thresholds

Table 3 below provides the *DFS Detection Thresholds* for *Master Devices* as well as *Client Devices* incorporating *In-Service Monitoring*

**Table 3: DFS Detection Thresholds for Master Devices
and Client Devices with Radar Detection**

| Maximum Transmit Power | Value (See Notes 1, 2, and 3) |
|---|----------------------------------|
| EIRP \geq 200 milliwatt | -64 dBm |
| EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz | -62 dBm |
| EIRP < 200 milliwatt that do not meet the power spectral density requirement | -64 dBm |
| <p>Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.</p> <p>Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p>Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.</p> | |

9.3 Response Requirements

Table 4 provides the response requirements for *Master* and *Client Devices* incorporating DFS.

Table 4: DFS Response Requirement Values

| Parameter | Value |
|--|--|
| <i>Non-occupancy period</i> | Minimum 30 minutes |
| <i>Channel Availability Check Time</i> | 60 seconds |
| <i>Channel Move Time</i> | 10 seconds See Note 1. |
| <i>Channel Closing Transmission Time</i> | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2. |
| <i>U-NII Detection Bandwidth</i> | Minimum 100% of the U- NII 99% transmission power bandwidth. See Note 3. |
| <p>Note 1: <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.</p> <p>Note 2: The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel move</i> (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p> <p>Note 3: During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.</p> | |

9.5 RADAR TEST WAVEFORMS

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 5 – Short Pulse Radar Test Waveforms

| Radar Type | Pulse Width (μsec) | PRI (μsec) | Number of Pulses | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|---|--------------------|---|--|--|--------------------------|
| 0 | 1 | 1428 | 18 | See Note 1 | See Note 1 |
| 1 | 1 | Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a | Roundup $\left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{PRI_{\mu sec}} \right) \right\}$ | 60% | 30 |
| | | Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A | | | |
| 2 | 1-5 | 150-230 | 23-29 | 60% | 30 |
| 3 | 6-10 | 200-500 | 16-18 | 60% | 30 |
| 4 | 11-20 | 200-500 | 12-16 | 60% | 30 |
| Aggregate (Radar Types 1-4) | | | | 80% | 120 |
| Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. | | | | | |

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. For example if in Short Pulse Radar Type 1 Test B a PRI of 3066 μsec is selected, the number of pulses would be

$$\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{3066} \right) \right\} = \text{Round up } \{17.2\} = 18.$$

Table 5a - Pulse Repetition Intervals Values for Test A

| Pulse Repetition Frequency Number | Pulse Repetition Frequency (Pulses Per Second) | Pulse Repetition Interval (Microseconds) |
|--|---|---|
| 1 | 1930.5 | 518 |
| 2 | 1858.7 | 538 |
| 3 | 1792.1 | 558 |
| 4 | 1730.1 | 578 |
| 5 | 1672.2 | 598 |
| 6 | 1618.1 | 618 |
| 7 | 1567.4 | 638 |
| 8 | 1519.8 | 658 |
| 9 | 1474.9 | 678 |
| 10 | 1432.7 | 698 |
| 11 | 1392.8 | 718 |
| 12 | 1355 | 738 |
| 13 | 1319.3 | 758 |
| 14 | 1285.3 | 778 |
| 15 | 1253.1 | 798 |
| 16 | 1222.5 | 818 |
| 17 | 1193.3 | 838 |
| 18 | 1165.6 | 858 |
| 19 | 1139 | 878 |
| 20 | 1113.6 | 898 |
| 21 | 1089.3 | 918 |
| 22 | 1066.1 | 938 |
| 23 | 326.2 | 3066 |

The aggregate is the average of the percentage of successful detections of Short Pulse Radar Types 1-4. For example, the following table indicates how to compute the aggregate of percentage of successful detections.

| Radar Type | Number of Trials | Number of Successful Detections | Minimum Percentage of Successful Detection |
|--|-------------------------|--|---|
| 1 | 35 | 29 | 82.9% |
| 2 | 30 | 18 | 60% |
| 3 | 30 | 27 | 90% |
| 4 | 50 | 44 | 88% |
| Aggregate (82.9% + 60% + 90% + 88%)/4 = 80.2% | | | |

Table 6 – Long Pulse Radar Test Waveform

| Radar Type | Pulse Width (μsec) | Chirp Width (MHz) | PRI (μsec) | Number of Pulses per <i>Burst</i> | Number of <i>Bursts</i> | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|--------------------|-------------------|------------|-----------------------------------|-------------------------|--|--------------------------|
| 5 | 50-100 | 5-20 | 1000-2000 | 1-3 | 8-20 | 80% | 30 |

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 *Bursts* in the 12 second period, with the number of *Bursts* being randomly chosen. This number is *Burst Count*.
- 3) Each *Burst* consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each *Burst* within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a *Burst* will have the same pulse width. Pulses in different *Bursts* may have different pulse widths.
- 5) Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a *transmission period* will have the same chirp width. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a *Burst*, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a *Burst*, the random time interval between the first and second pulses is chosen independently of the random time interval between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to *Burst Count*. Each interval is of length $(12,000,000 / \text{Burst Count})$ microseconds. Each interval contains one *Burst*. The start time for the *Burst*, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each *Burst* is chosen randomly.

A representative example of a Long Pulse Radar Type waveform:

- 1) The total test waveform length is 12 seconds.
- 2) Eight (8) *Bursts* are randomly generated for the *Burst Count*.
- 3) *Burst* 1 has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) *Bursts* 2 through 8 are generated using steps 3 – 5.
- 7) Each *Burst* is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, *Burst* 1 is randomly generated (1 to 1,500,000 minus the total *Burst* 1 length + 1 random PRI interval) at the 325,001 microsecond step. *Bursts* 2 through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. *Burst* 2 falls in the 1,500,001 – 3,000,000 microsecond range).

Table 7 – Frequency Hopping Radar Test Waveform

| Radar Type | Pulse Width (µsec) | PRI (µsec) | Pulses per Hop | Hopping Rate (kHz) | Hopping Sequence Length (msec) | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|--------------------|------------|----------------|--------------------|--------------------------------|--|--------------------------|
| 6 | 1 | 333 | 9 | 0.333 | 300 | 70% | 30 |


For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:


The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.




10 Test result

DFS Calibration

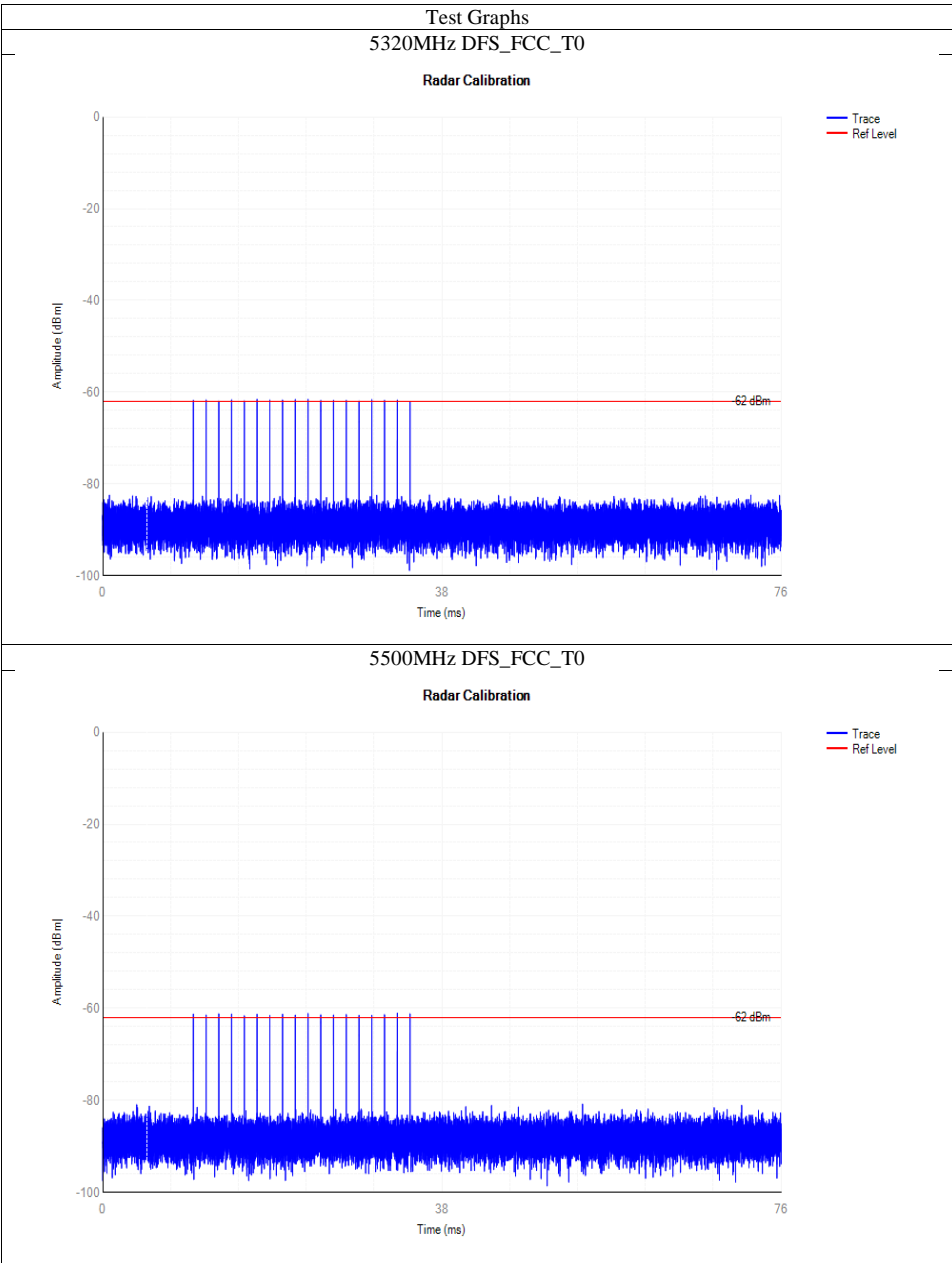

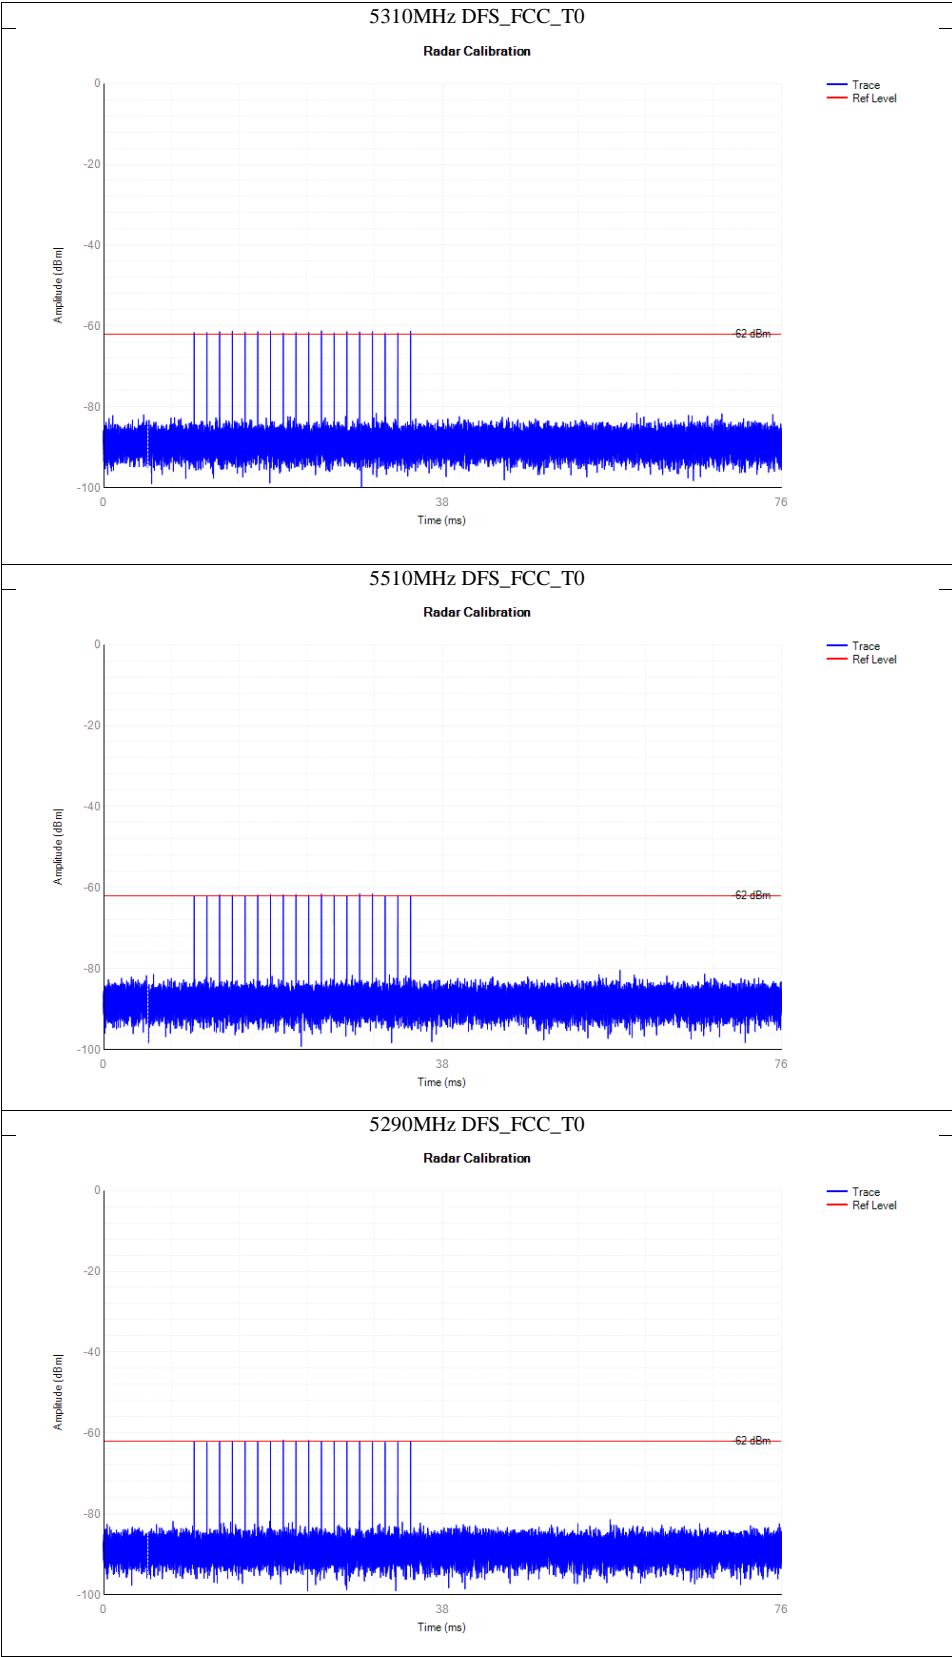


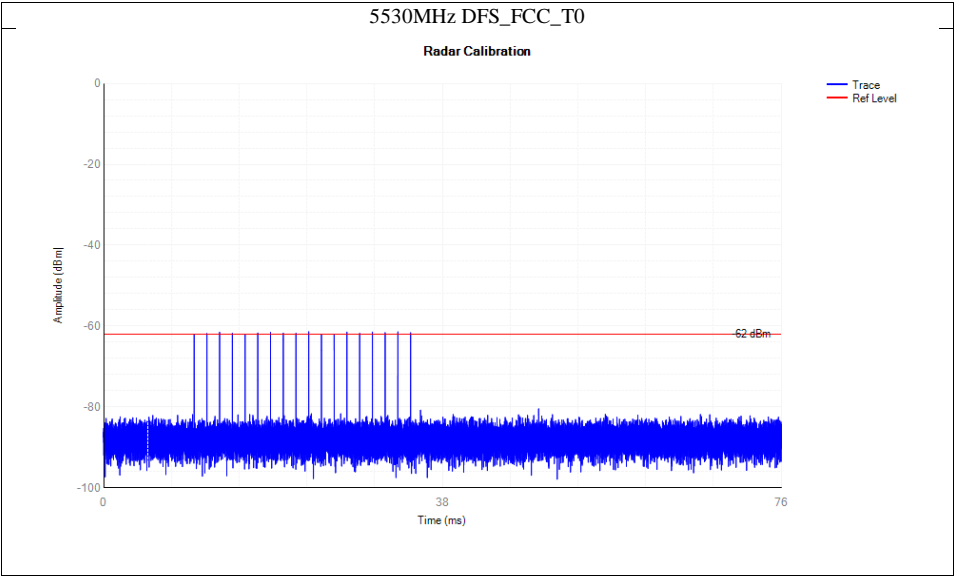




Shutdown Time

| Mode | Frequency (MHz) | Channel Move Time (s) | Limit Channel Move Time (s) | Close Transmission Time (s) | Limit Close Transmission Time (s) | Close Transmission Time after 200ms(s) | Limit Close Transmission Time after 200ms (s) | Verdict |
|------|-----------------|-----------------------|-----------------------------|-----------------------------|-----------------------------------|--|---|---------|
| ac20 | 5320 | 0.647033333 | 10 | 0.1160000000058 | 0.26 | 0.00466666666669 | 0.06 | Pass |
| ac20 | 5500 | 0.586366667 | 10 | 0.0233333333345 | 0.26 | 0.0040000000002 | 0.06 | Pass |
| ac40 | 5310 | 0.585033333 | 10 | 0.0200000000001 | 0.26 | 0.00333333333335 | 0.06 | Pass |
| ac40 | 5510 | 0.572366667 | 10 | 0.0126666666673 | 0.26 | 0.00066666666667 | 0.06 | Pass |
| ac80 | 5290 | 0.616366667 | 10 | 0.03000000000015 | 0.26 | 0.00533333333336 | 0.06 | Pass |
| ac80 | 5530 | 0.5977 | 10 | 0.0206666666677 | 0.26 | 0.00466666666669 | 0.06 | Pass |

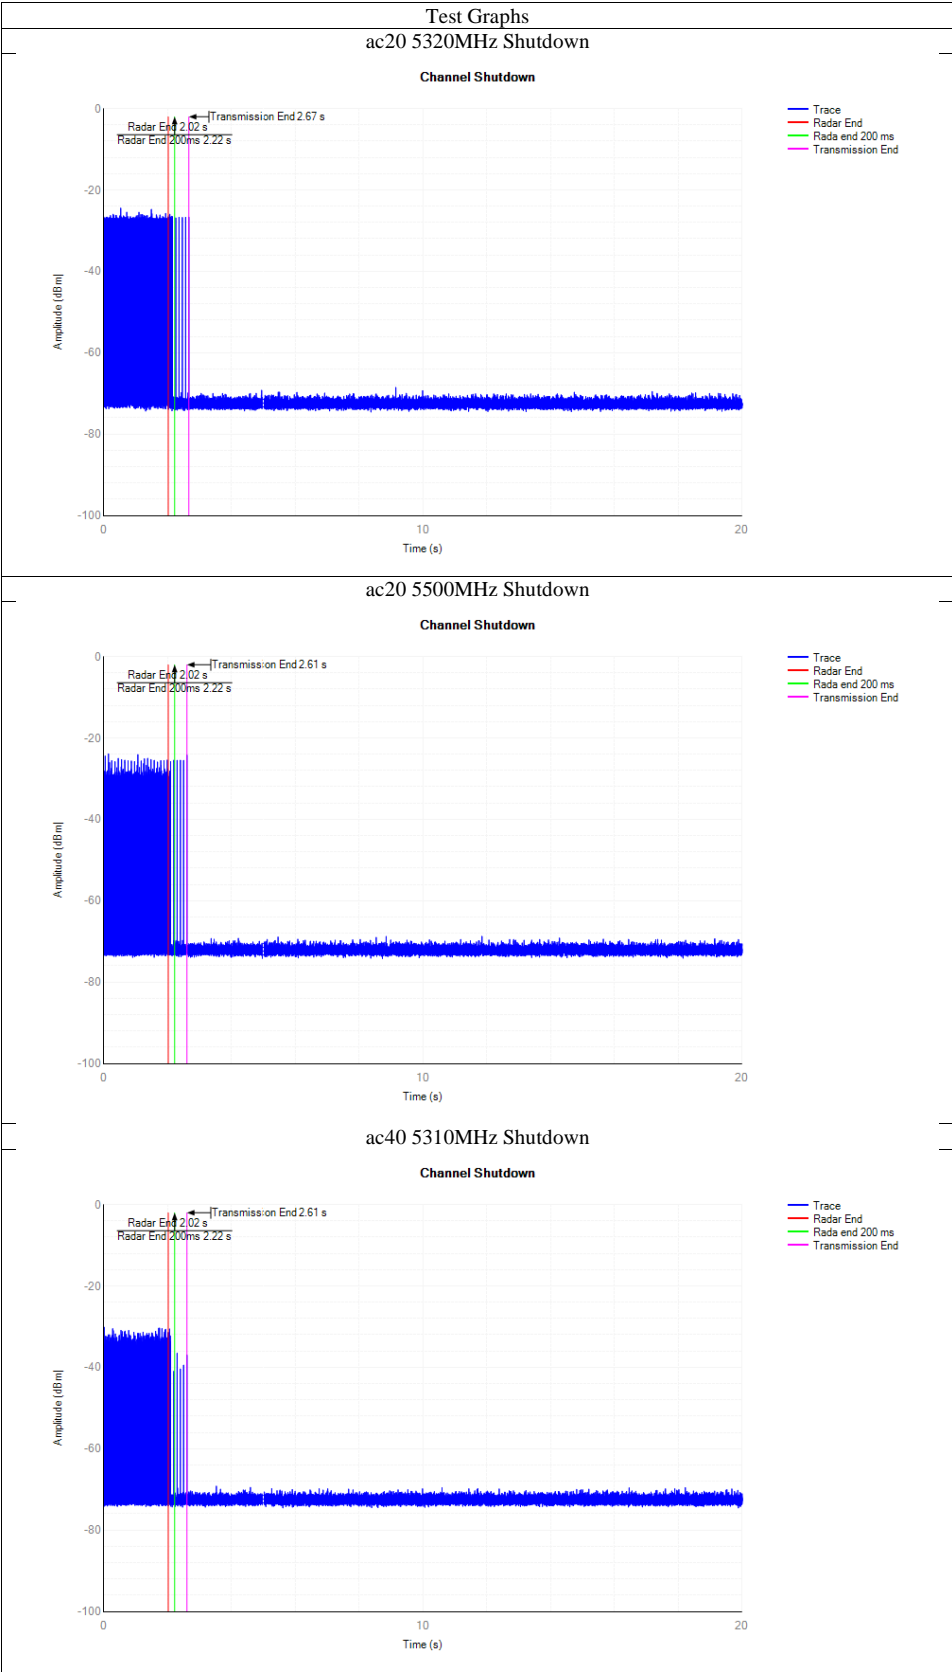

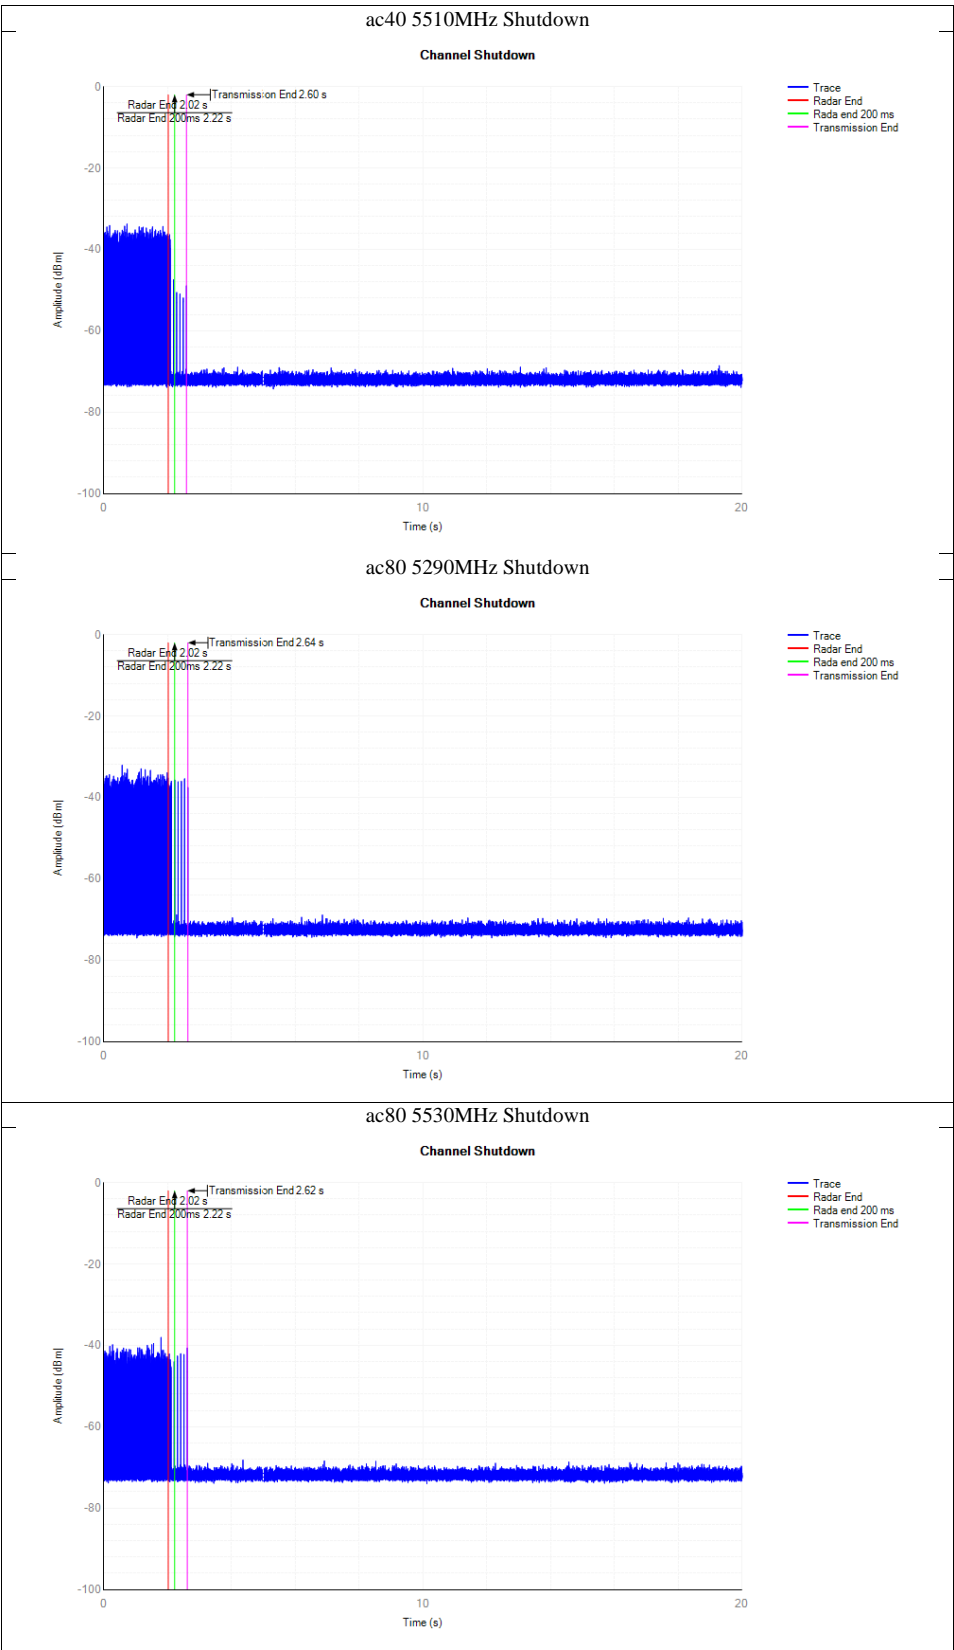





Non-Occupancy

During the 30 minutes observation time, UUT did not make any transmissions on a channel after a radar signal was detected on that channel by either the Channel Availability Check or the In-Service Monitoring.

| Mode | Frequency (MHz) | Result | Verdict |
|------|-----------------|----------------|---------|
| ac20 | 5500 | See test Graph | Pass |
| ac40 | 5510 | See test Graph | Pass |
| ac80 | 5290 | See test Graph | Pass |
| ac80 | 5530 | See test Graph | Pass |

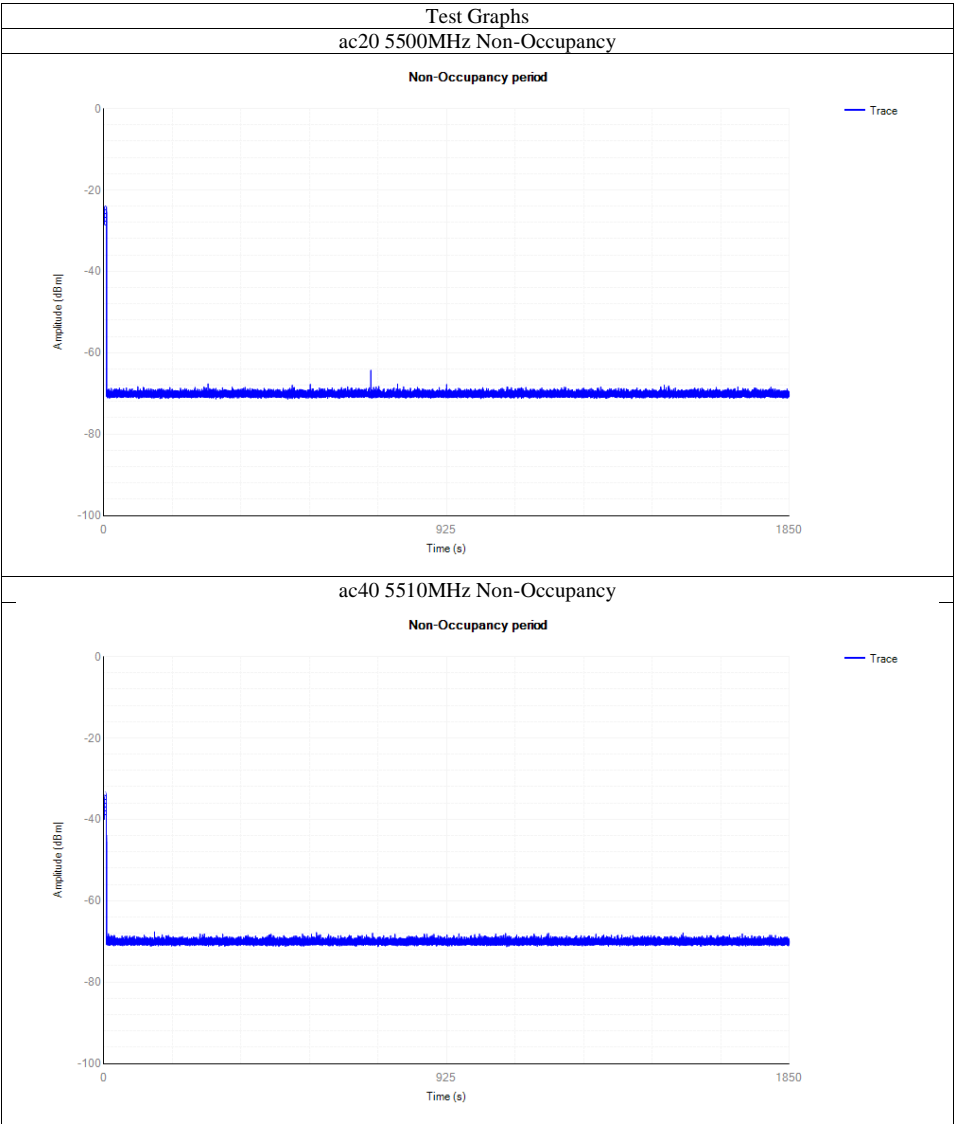

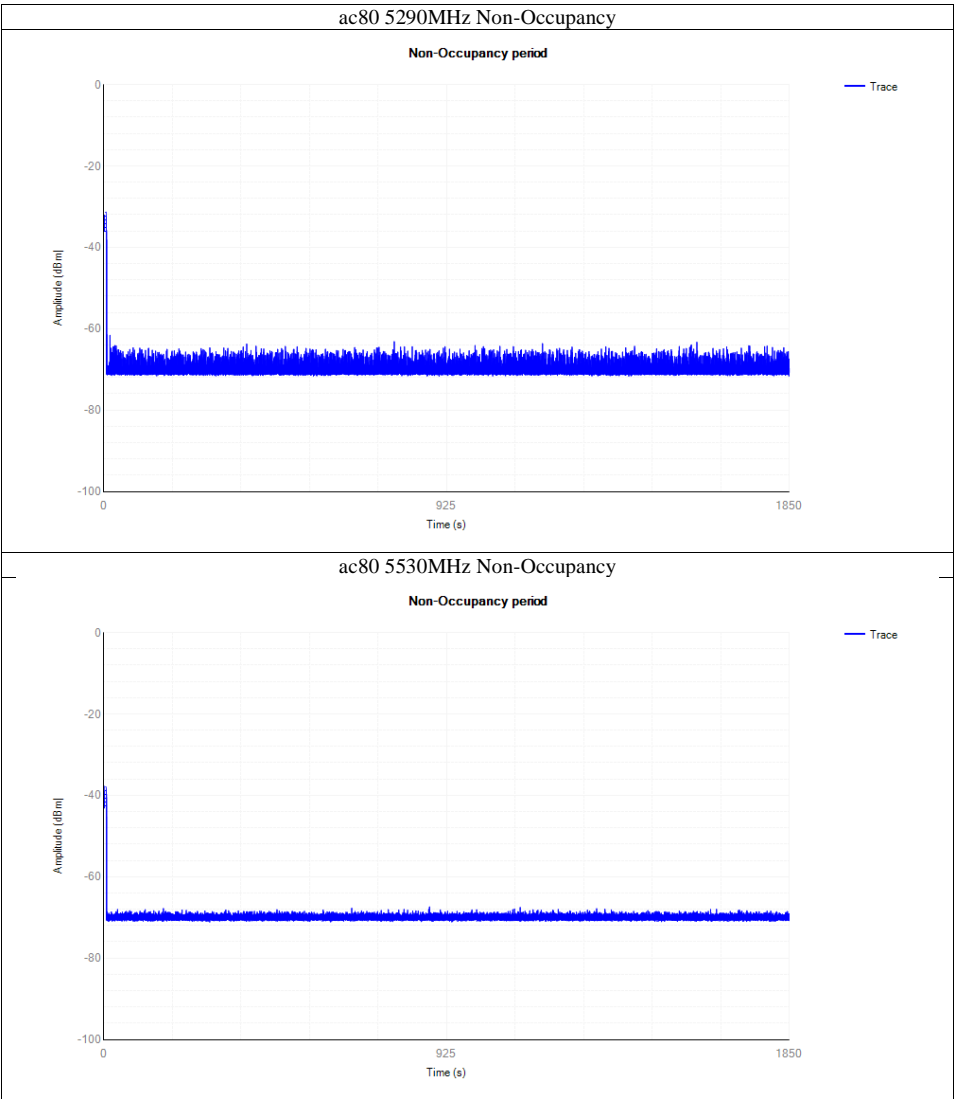



11 Test Equipment List

MWRF Test System

| | DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | CAL. DATE | CAL. DUE DATE |
|---|---------------------------|--------------|------------|------------------|------------|---------------|
| C | Vector signal generator | Agilent | N5182A | S2110417b-YQ-EMC | 2023-11-10 | 2024-11-9 |
| | Signal spectrum analyzer | Agilent | N9020B | MY59050168 | 2023-2-10 | 2024-2-9 |
| | RF automatic control unit | MWRFtest | MW100-RFCB | S2110418b-YQ-EMC | 2023-9-28 | 2024-9-27 |
| | Signal Analyzer | R & S | FSV40 | S1503003-YQ-EMC | 2023-8-1 | 2024-7-31 |

| Measurement Software Information | | | |
|----------------------------------|----------|--------------|---------|
| Test Item | Software | Manufacturer | Version |
| C | MTS 8310 | MWRFtest | 3.0.0.0 |



12 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

| Items | Extended Uncertainty |
|--|---|
| Conducted Disturbance at Mains Terminals | 150kHz to 30MHz, LISN, $\pm 3.16\text{dB}$ |
| Radiated Disturbance | 30MHz to 1GHz, $\pm 5.03\text{dB}$ (Horizontal) $\pm 5.12\text{dB}$ (Vertical) |
| | 1GHz to 18GHz, $\pm 5.15\text{dB}$ (Horizontal) $\pm 5.12\text{dB}$ (Vertical) |
| | 18GHz to 25GHz, $\pm 4.76\text{dB}$ |
| | |

Measurement Uncertainty Decision Rule:

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2021, clause 4.4.3 and 4.5.1.

-----End of Test Report-----