Specifications

	APO-100-UC	APO-200-UC	APO-210-UC		
Audio and Video					
	USB-A Display Link 1920x1080p @60Hz 8bit	USB-A Display Link 1920x1080p @60Hz 8bit	USB-A Display Link 1920x1080p @60Hz 8bit		
	Native USB-C 3840x2160 @30Hz 8bit 4:4:4	Wireless Casting 1920x1080p @30Hz 8bit	Wireless Casting 1920x1080p @30Hz 8bit		
Video Resolutions (Max)		Native USB-C & HDMI 3840x2160 @30Hz 8bit 4:4:4	Native USB-C & HDMI 3840x2160 @30Hz 8bit 4:4:4		
		HDMI 15m	HDMI: 15m HDBaseT: 40m/13ft Cat6 or higher		
Inputs	1x USB-C 1x USB 3.0 Female Device Port	1x USB-C 1x HDMI: 19-pin type A 1x USB 3.0 Female Device Port 1x USB 2.0 Mini USB-B Host Port (for HDMI input devices)	1x USB-C 1x HDMI: 19-pin type A 1x USB 3.0 Female Device Port 1x USB 2.0 Mini USB-B Host Port (for HDMI input devices)		
Outputs	1x HDMI: 19-pin type A	1x HDMI: 19-pin type A	1x HDMI: 19-pin type A 1x HDBT: 8-pin RJ-45 Female		
Supported Standards	RGB USB				
Maximum Pixel Clock	300Mhz				
Speakerphone					
Microphone	4x omni-directional mic array with ecl Pick-up Range: 5m/16.4ft Frequency Response: 100Hz ~ 20KH Sample Rate: 16 bit 48KHz				
Speaker	10 watts 78 dB @ 1.5m/4.9ft Sample Rate: 24bit 48Khz				
Control	Capacitive touch volume +/- and microphone mute buttons	Capacitive touch volume +/- and microp	ohone mute buttons Telnet API		
Communication and Contro	ı				
HDMI	NA	HDMI 2.0 HDCP 2.2 EDID CEC			
HDBaseT	NA	NA	Class B Spec 2.0		
USB	USB-C: USB 3.2 Gen 1 Max bandwidth: 5Gbps (60w max charging) USB-A 3.0 Max Bandwidth 5Gbps	USB-C: USB 3.2 Gen 1 Max Bandwidth: (60w max charging) USB-A 3.0 Max Bandwidth 5Gbps USB-B 2.0 Mini: 480Mbps (USB over HD			
LAN	NA	1 x 8-pin RJ45			
RS-232	NA	NA	Passthrough over HDBaseT (requires compatible HDBaseT receiver		
Power					
Power Supply	24V DC 5A				
Power Consumption	Max: 10w Max with USB-C charging: 70w	Max: 20w Max with USB-C charging: 80w			
Environmental					
Operating Temperature	32°F ~ 113°F (0°C ~ 45°C), 10% ~ 90	%, non-condensing			
Storage Temperature	-4°F to ~ 158°F (-20°C ~ +70°C), 10% ~ 90%, non-condensing				
Maximum BTU	Standard: 34 BTU/hr	Standard: 68 BTU/hr			
Dimensions and Weight					
Length x Width x Height	Corner to corner (widest point): 266.7 Height: 106.6mm/4.2in	imm/10.5in			
Weight	1.08kg/2.4lbs	1.47kg/3.25lbs			
Regulatory					
Safety and Emission	CE FCC RoHS RCM EAC				

Note: WyreStorm reserves the right to change product specification, appearance or dimensions of this product at any time without prior notice.

Copyright © 2021 WyreStorm Technologies | wyrestorm.com Apollo Series Full Product Range Quickstart Guide | 210811

4 of 4

UK: +44 (0) 1793 230 343 | ROW: 844.280.WYRE (9973) support@wyrestorm.com

Apollo Series Integrated Conference Speakerphone and Presentation Switcher

APO-100-UC | APO-200-UC | APO-210-UC

😢 WyreStorm recommends reading through this document in its entirety to become familiar with the product's features prior to starting the installation process.




A IMPORTANT! Installation Requirements

- · Visit the product page to download the latest firmware, document version, additional documentation, and configuration tools.
- Read through the Wiring and Connections section for important wiring guidelines before creating or choosing premade cables.

APO-100-UC Basic Wiring Diagram



APO-200/210-UC Basic Wiring Diagram

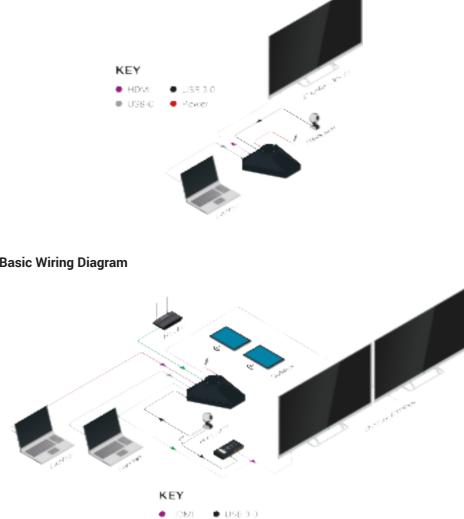

DM USB 0 Dever LANA DBasel

1 of 4

PDF





In the Box

- 1x Apollo Speakerphone
- 1x 24V DC 5A PSU (US/UK/EU/AU)
- 1x 1.5m USB-C cable (with USB-A adapter)
- 1x 2m Mini USB-B 2.0 cable (200 and 210 models only)
- 1x Quickstart Guide (this document)

Wiring and Connections

WyreStorm recommends that all wiring for the installation is run and terminated prior to making connections to the switcher. Read through this section in it's entirety before running or terminating the wires to ensure proper operation and to avoid damaging equipment.

IMPORTANT! Wiring Guidelines

- The use of patch panels, wall plates, cable extenders, kinks in cables, and electrical or environmental interference will have an adverse effect on signal transmission which may limit performance. Steps should be taken to minimize or remove these factors completely during installation for best results
- WyreStorm recommends the use of shielded category cable to minimize signal noise and interference
- WyreStorm recommends using pre-terminated HDMI cables due to the complexity of these connector types. Using pre-terminated cables will ensure that these connections are accurate and will not interfere with the performance of the product.

0	10m	20m	30m	40m	50 m	0.Dem	70m	film.	atm.	100m
oħ	s2ħ	65ħ	981:	181 R.	164R	157R	2901;	262A	2950	\$ 281
4	K London	1.55811	E HD	liter en la	e # 0311					

ammande (he use of sheables eable to maximus adjustness and interference


*Only applicable on the APO-210-UC

Daté Cable Endertrance Guide

Software Device Setup

Connecting To Zoom

To connect the WyreStorm Apollo device to your Zoom software, first navigate to your settings pane which can be found by clicking the gear icon in the top right hand corner, then click on the audio tab. Here you can change both the Speaker and Microphone device by using the dropdown menus. Select WyreStorm Apollo under all options.

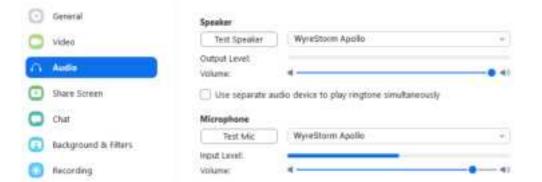

Connecting To Microsoft Teams

To connect the WyreStorm Apollo device to your Microsoft Teams software, first navigate to your settings pane which can be found by clicking on your display image in the top right hand corner, then click on the devices tab. Here you can change both the Speaker and Microphone device by using the dropdown menus. Select WyreStorm Apollo under all options.

Settings

(E) General	Audio devices	
D Privary	WyreStorm Apollo	
C Nothcationa	-250 AWAY 118 (2010)	
O Devices	Speaker	
E Permissione	WyreStorm Apallo	~
00 Capitions and transcripts	Memphole	
Q ₂ Carls	WyreStarm Apollo	~
	05 Make a test call	

Setup and Configuration

Accessing the Web UI

Default IP Address DHCP	Default IP Port 23						
4. Enter the password for the matrix. Deta							
the Apollo. 3. Open a web browser and enter the IP Address of the Apollo. 4. Enter the password for the matrix. Default Password; admin							
 Connect the Apollo to the same network as a PC. Using a 3rd party network scanner, scan the network for the IP address of 							
By default the IP address is set to DHCP and will pull the IP address from a conne address will be generated based on the units mac address. The above operation							

Troubleshooting

No or Poor Quality Picture (snow or noisy image)

- Verify that WyreStorm Apollo has been selected in your software's device • Verify that WyreStorm Apollo has been selected in your software's audio settinas input/output settings
- · Verify that A/V mute is not enabled. Check Web UI for status on the selected · Verify that the volume on your PC/Mac is not muted output · Verify that the microphone settings on your PC/Mac are not muted
- · Verify that the device is not in standby
- · Verify that power is being supplied to the device
- · Verify that all HDMI and HDBaseT connections are not loose and are functioning properly
- · Verify that the HDBaseT cable is properly terminated following EIA568B standard
- · Verify that the output resolution of the source and display is supported by this device
- If transmitting 4K, verify that the HDMI cables used are 4K rated

FC

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- · Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- · Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The distance between user and products should be no less than 20cm.

Warranty Information

WyreStorm Technologies LLC warrants that its products to be free from defects in material and workmanship under normal use for a period of five (5) years from the date of purchase. Refer to the Product Warranty page on wyrestorm.com for more details on our limited product warranty.

UK: +44 (0) 1793 230 343 | ROW: 844.280.WYRE (9973) support@wyrestorm.com

cted DHCP server. Should the network not contain a DHCP server the IP vill occur unless the IP Address setting in the web UI is set to static.

P Address Notes

WyreStorm recommends changing the password for installer login to avoid any unwanted changes being made to the Apollo configuration. Web UI is only applicable on the APO-200-UC and APO-210-UC models

No Audio Input or Output



V Troubleshooting Tips:

• WyreStorm recommends using a cable tester or connecting the cable to other devices to verify functionality.

CE

- We declare that this device is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. The power adapter shall be installed near the equipment and shall be easily accessible.
- Manufacturer: Shen Zhen Proitav Technology Co.,Ltd Address: 301-401, Building 16, Hejing Industrial Park, No.87, Hexiu west Road, Heping Community, Fuhai street, Baoan District, Shenzhen, China
- Accessory: USB-C cable Manufacturer: Dongguan YIZE Electronics CO., Ltd. Address: 27 Wusha Haibin Road, Chang'an Town, Dongguan City, Guangdong, China
- Accessory: Power cord (UK/US/EU/AU) Manufacturer: Shenzhen Hong Yun Electron Co., Ltd Address: 3th Floor, B Bld., Sanmin Ind. park, 518108 Shiyan Town, Shenzhen, Guanadona, China
- Accessory: Power Supply Manufacturer: Dongguan NB Power Electronic Limited Address: No.365, South Dongkeng Road, Dongkeng Town, Dongguan City, 523443, China
- Accessory: USB-B cable Manufacturer: Shenzhen Yishenghua Electronics Co., Ltd Address: 307, 3rd Floor, Building C, Kaihuimao Industrial Zone, Heping Community, Fuhai Street, Baoan District, Shenzhen, China

