
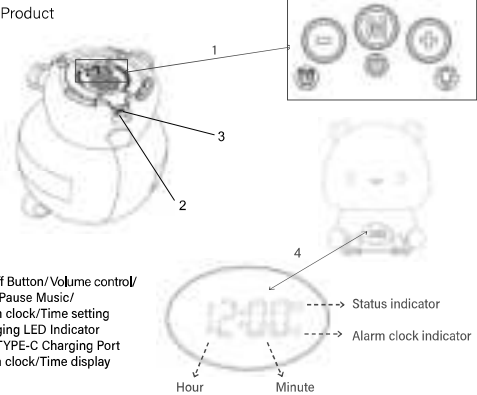










FRONT SIDE

|   |  |  |
|---|--|--|
| <div>Alarm clock &amp; Bluetooth speaker &amp; Tapping night light</div> <div>INSTRUCTION MANUAL</div> <div>Thank you for purchasing the Product.</div> <div>This manual provides more information about the product, please read the instructions before using.</div> <div></div> | <div>Product Overview</div> <div><div>Product</div><div></div><div><div>1. On/Off Button/Volume control/ Play/Pause Music/ Alarm clock/Time setting</div><div>2. Charging LED Indicator</div><div>3. USB TYPE-C Charging Port</div><div>4. Alarm clock/Time display</div></div></div> <div><div>Package Contents</div><div><div>1x Panda Speaker</div><div>1x Type C charging cable</div><div>1x Instruction Manual</div></div></div> <div><div>Specifications</div><div><div>Bluetooth Version:5.4</div><div>Speaker Power:3W</div><div>Impedance: 4 Ohms</div><div>Frequency Response:20Hz-20KHz</div><div>SNR: ≥ 90dB</div><div>Battery Capacity:3.7V 500mAh</div><div>Control:Button Control&amp;pat</div></div><div><div>Playtime: &gt; 5 Hours (50% volume)</div><div>Charging time: &lt; 2 Hours</div><div>Bluetooth Range:32.8 feet</div><div>USB Type-C Charging Cable Included</div></div></div> | <div>Power On/Off</div> <div><div><b>Power on</b></div><div>Touch and hold the  Button of for 3s seconds.</div></div> <div><div><b>Power off</b></div><div>Touch and hold the  Button of for 5s seconds.</div></div> <div><div>Pair the wireless alarm clock speaker with your mobile device.</div><div><div>1. Keep the distance between the earbuds and mobile device within 32.8 feet.</div><div>2. De-activate the bluetooth function on your mobile device.</div><div>3. Turn on the Speaker,the status indicator of the Speaker will start blinking quickly.</div><div>4. Activate the Bluetooth function on your mobile device and select "LINTEK" from the list shown.</div><div>5. After pairing is successful, the status indicator of the Speaker will start blinking slowly.</div></div><div><div><b>*Attention: If unable to connect, it is necessary to follow the instructions below for operation:</b></div><div><div>1. Make sure the Speaker are charged.</div><div>2. De-activate the Bluetooth function on your mobile device. (If you had been paired the Speaker to some other mobile device(s) nearby, please make sure to de-activate those device(s) too).</div><div>3. Power on Speaker simultaneously by pressing the On/Off buttons for 3 seconds . (Keep the Bluetooth function off on your mobile device before this operation.)</div><div>4. Activate the Bluetooth function on your mobile device and select " LINTEK " from the list shown.</div></div></div><div><div>Reconnect the Speaker to your mobile device</div><div><div>When powered on,the Speaker will automatically connect with the last successfully paired device</div></div><div><div>Disconnect the Speaker from your mobile device</div><div><div>Power off the Speaker;or</div><div>Switch off the Bluetooth on your mobile phone;or</div><div>Leave the Speaker 60ft away from your mobile phone or further.</div></div></div></div></div> |
|   |  |  |
|   |  |  |
|   |  |  |
|   |  |  |

BACK SIDE

|  |  |   |
|--|--|---|
| <div>Button Functions</div> <div><div>Button  :</div><div>Press and hold for 3 seconds to power on, press and hold for 5 seconds to power off.</div><div>After Power on, press and hold for 2 seconds to switch between clock mode and Bluetooth mode(the default boot mode is Bluetooth mode, it will automatically enter clock mode after five minutes of no connection).</div><div>In music mode: click to play/pause music;</div><div>In clock mode: triple-click to enter time setting, then click to switch between hour and minute setting;</div><div>In clock mode: double click to alarm mode, after entering the alarm setting mode, the alarm indicator light flashes , then click to switch between hour and minute setting, after the alarm is set, it will automatically confirm and save within 10 seconds.</div></div> <div><div>Button  :</div><div>Long press to turn on or off the night light.</div><div>In music mode: increase the volume;</div><div>In clock setting mode:hour/minute up;</div><div>In alarm setting mode:hour/minute up.</div></div> <div><div>Button  :</div><div>Long press to turn on or off the alarm function.</div><div>In music mode: decrease the volume;</div><div>In clock setting mode:hour/minute down;</div><div>In alarm setting mode:hour/minute down.</div></div> | <div><div>7. The alarm clock rings for 60 seconds, and the snooze mode lasts for 10 minutes.</div><div>After entering snooze mode twice, it automatically releases the snooze mode .</div></div> <div><div>Charging your Speaker</div><div><div> For your safety, please always use appropriate 5V input charger/Adapter to charge the product. DO NOT USE Quick Charging USB Adapter to charge the product, as it might damage the product.</div><div><div>1. Use the TYPE-C charging cable provided with the packaging.</div><div>2. Connect the TYPE-C plug to TYPE-C charging port on the Speaker, then connect the USB plug to a USB port on a computer or wall adapter to begin charging.</div><div>3. The LED Indicator light of the Speaker will be red.</div><div>4. Once fully charged, the LED will be off.</div></div><div><div><b>NOTE:</b></div><div><div>• You must select a qualified charger from a regular manufacturer.</div><div>• You must charge the Speaker if it has been not used for more than 6 months</div></div></div><div><div>FAQ</div><div><div><b>If the Speaker cannot be paired with your device, please try the following:</b></div><div>Ensure that your Speaker are in pairing mode or reconnection mode.</div><div>Ensure that Bluetooth search function of your mobile device is activated.</div></div><div><div><b>If the Speaker will not turn on:</b></div><div>Make sure the Speaker are fully charged.</div></div><div><div><b>Can I change the battery for the Speaker?</b></div><div>The Speaker has a built-in non-detachable battery which cannot be removed,</div></div><div><div><b>If the Speaker cannot be recharged:</b></div><div>If you use a power outlet,ensure that the power supply is connected securely and the outlet works.If you use a computer,ensure that it is connected and the USB port is powered.</div></div><div><div> Safety instructions for the lithium battery and charging the product</div><div><div>-The input voltage to the product is 5V 1A.</div><div>-In order to charge the product in safe manner and reliable conditions, please only adopt certified appropriate charger/ adapter for charging the product.</div><div>-Only charge the product at ambient temperatures between 10 °C/ 50 °F and 40 °C/104 °F.</div></div></div></div></div></div> | <div><div>- Do not heat above 70 °C/158 °F, eg. Do not expose to sunlight or throw into fire.</div><div>-Switch off the product after use.</div><div>-Please note that we won't take any responsibility for any wrong operation (eg. Voltage higher than 5V) as this may result in severe injury or loss of property, and we cannot control the operating process during the time the user using this product.</div><div>-In extreme cases, abuse or misuse of Lithium battery pack can lead to explosion, heat generation, fire development or smoke development.</div></div> <div><div>FCC STATEMENT</div><div><div>1. This device complies with Part 15 of the FCC Rules, Operation is subject to the following two conditions:</div><div>(1)This device may not cause harmful interference.</div><div>(2)This device must accept any interference received, including interference that may cause undesired operation.</div></div><div><div>2.Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.</div><div><div>NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device,pursuant to Part 15 of the FCC Rules, These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:</div><div><div>- Reorient or relocate the receiving antenna.</div><div>- Increase the separation between the equipment and receiver.</div><div>- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.</div><div>- Consult the dealer or an experienced radio/TV technician for help.</div></div><div><div>RF warning statement:</div><div>The device has been evaluated to meet general RF exposure requirement, The device can be used in portable exposure condition without restriction.</div></div><div><div> FCC ID: 2A047-KS-BT0096</div><div><div>Wireless alarm speaker with lights</div><div>Item NO.:KS-BT0096</div><div>Distributed by LINTEK GROUP</div><div>3750 NE 4TH AVE,OAKLAND PARK FL33334</div><div>www.lintekgroup.com</div><div>Made in China</div></div><div><div>Keep All Relevant Information</div><div>For Future Reference</div></div></div></div></div></div> |
|--|--|---|