

Test Information:

Sample No.:	2QQ5-1	Test Date:	2024/09/05
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	26.7	Relative Humidity: (%)	54	ATM Pressure: (kPa)	100.4
-----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Average Power Sensor	U2001H	MY50000380	2024/04/01	2025/03/31
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
R&S	Spectrum Analyzer	FSU26	200256	2024/04/01	2025/03/31

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Emission Bandwidth**5.2G_26dB EBW**


Mode	Value (MHz)
a_5180MHz_Chain 0	21.557
a_5200MHz_Chain 0	21.679
a_5240MHz_Chain 0	21.830
n20_5180MHz_Chain 0	21.876
n20_5200MHz_Chain 0	21.917
n20_5240MHz_Chain 0	21.881
n40_5190MHz_Chain 0	40.700
n40_5230MHz_Chain 0	40.500
ac80_5210MHz_Chain 0	83

5.8G_6 dB EBW

Mode	Value (MHz)	Limit (MHz)	Result
a_5745MHz_Chain 0	16.400	0.5	Pass
a_5785MHz_Chain 0	16.400	0.5	Pass
a_5825MHz_Chain 0	16.400	0.5	Pass
n20_5745MHz_Chain 0	17.400	0.5	Pass
n20_5785MHz_Chain 0	17.600	0.5	Pass
n20_5825MHz_Chain 0	17.250	0.5	Pass
n40_5755MHz_Chain 0	36.500	0.5	Pass
n40_5795MHz_Chain 0	36.500	0.5	Pass
ac80_5775MHz_Chain 0	76.800	0.5	Pass


5.2G

a_5180MHz_Chain 0 21.557MHz

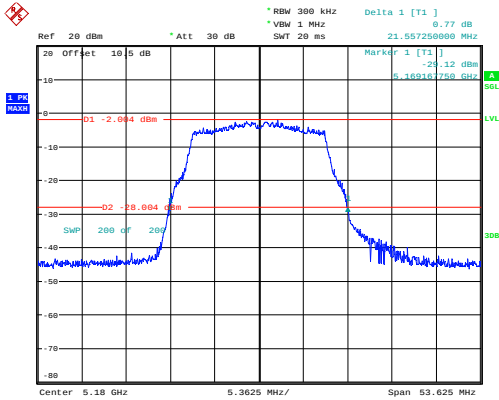


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:13:55

a_5200MHz_Chain 0 21.679MHz

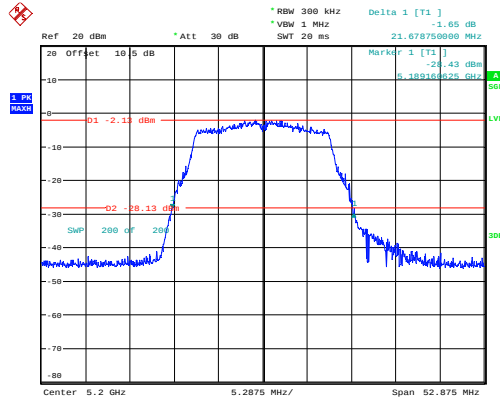


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:22:29

a_5240MHz_Chain 0 21.830MHz

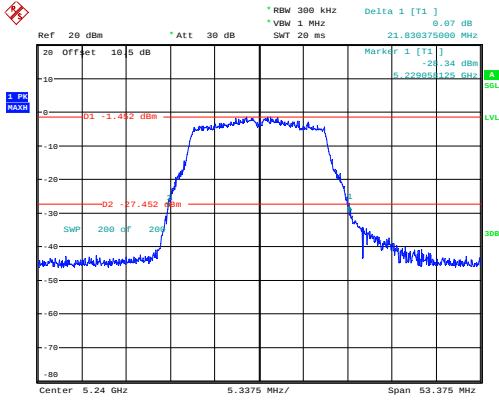


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:25:27

n20_5180MHz_Chain 0 21.876MHz

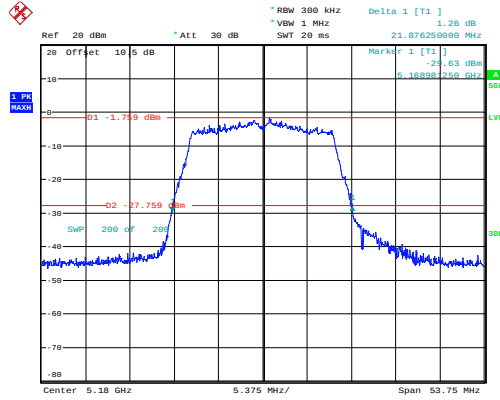


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:35:41

n20_5200MHz_Chain 0 21.917MHz

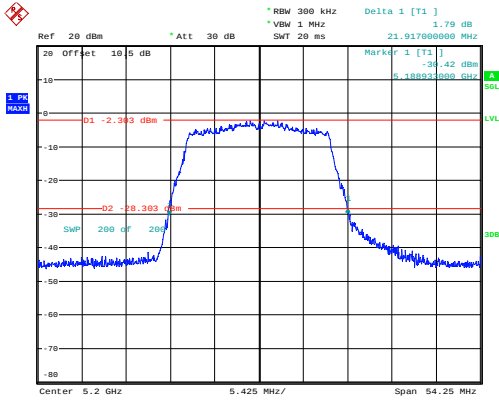


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:38:25

n20_5240MHz_Chain 0 21.881MHz

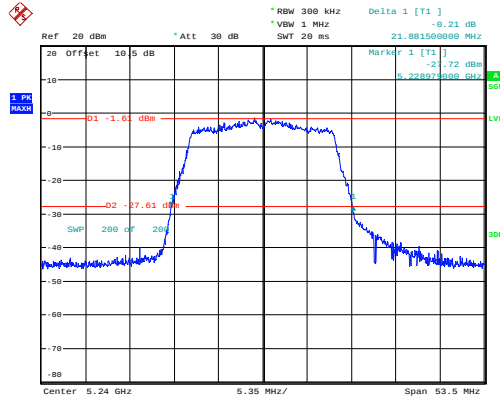


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:41:37

n40_5190MHz_Chain 0 40.700MHz

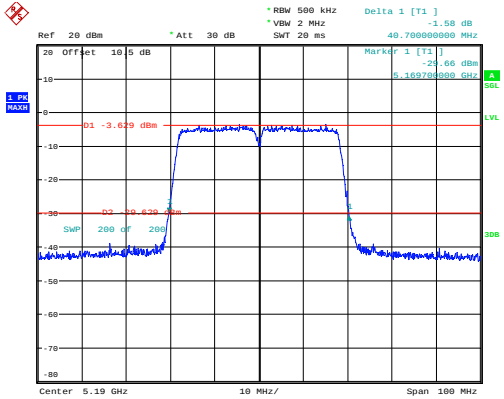

ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:45:47


n40_5230MHz_Chain 0 40.500MHz

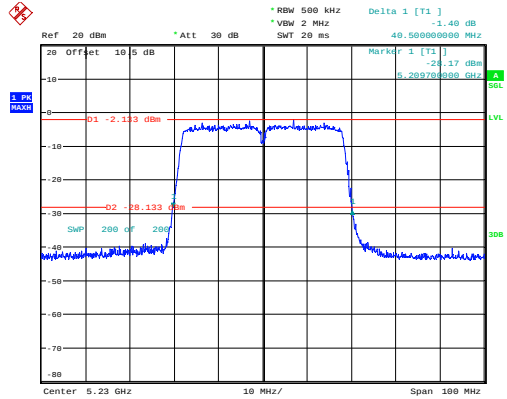

ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:49:13


5.8G

ac80_5210MHz_Chain 0 83MHz

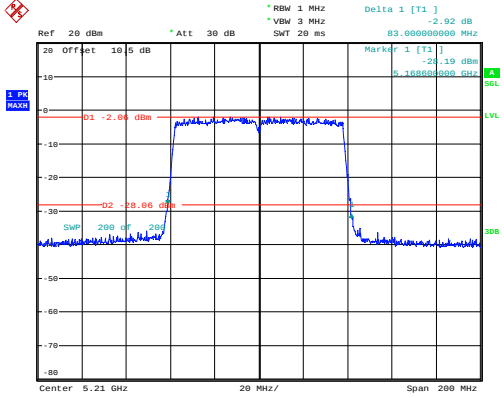


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:52:48

a_5745MHz_Chain 0 16.400MHz

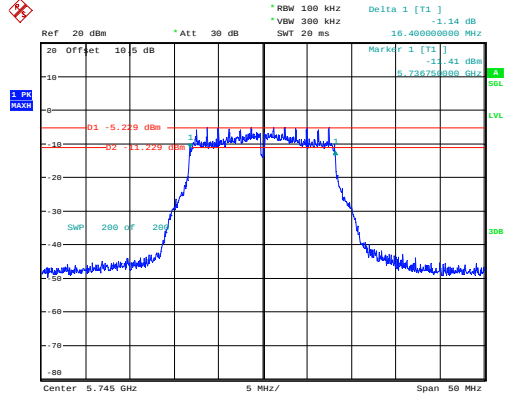


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:59:26

a_5785MHz_Chain 0 16.400MHz

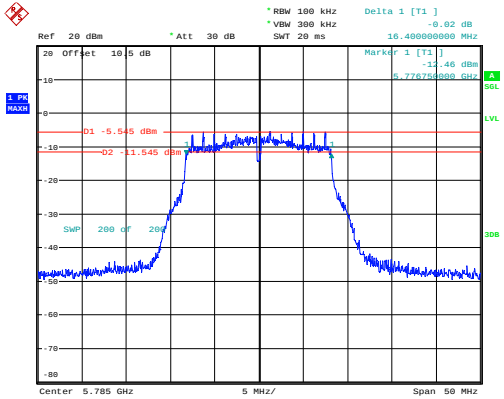


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:07:03

a_5825MHz_Chain 0 16.400MHz

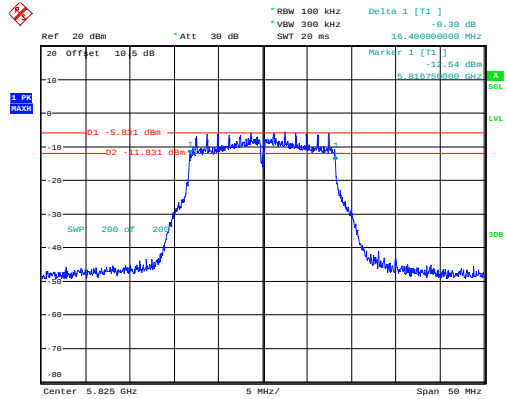


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:09:21

n20_5745MHz_Chain 0 17.400MHz

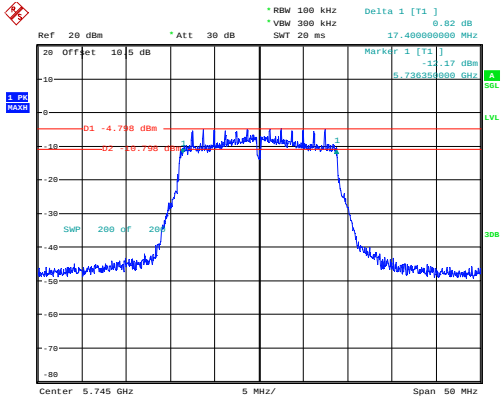


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:11:49

n20_5785MHz_Chain 0 17.600MHz

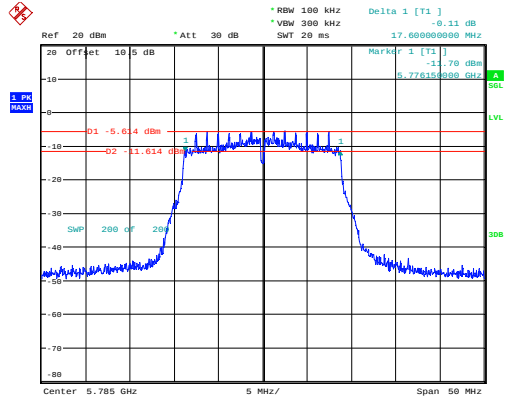


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:14:03

n20_5825MHz_Chain 0 17.250MHz

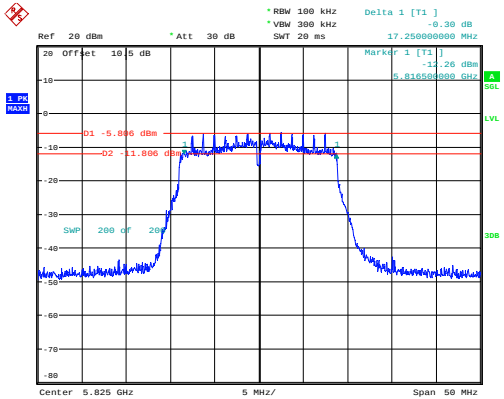


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:16:18

n40_5755MHz_Chain 0 36.500MHz

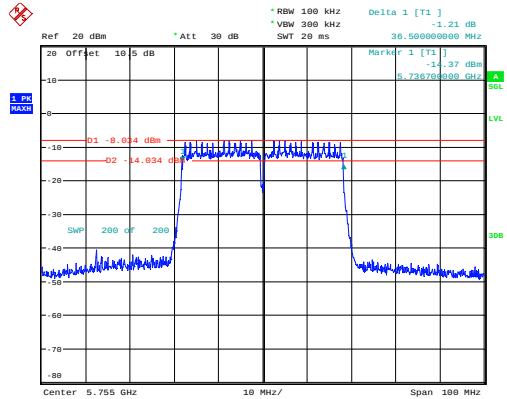


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:19:05

n40_5795MHz_Chain 0 36.500MHz

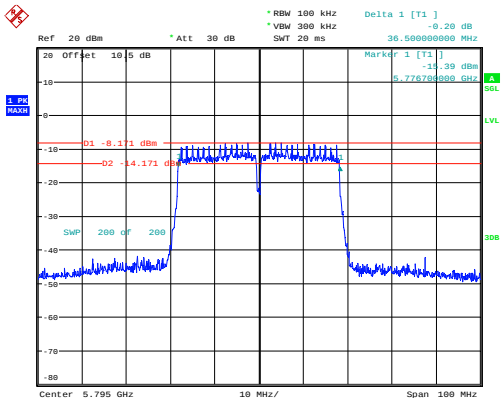

ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:21:51

ac80_5775MHz_Chain 0 76.800MHz

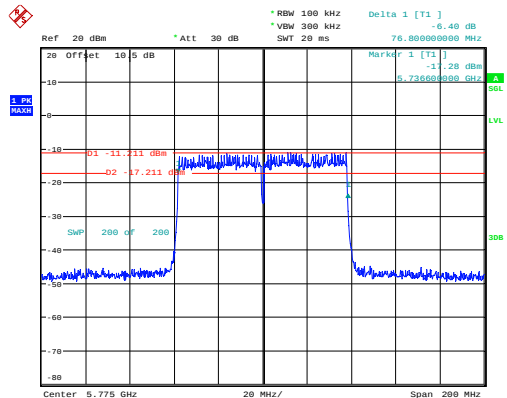

ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:24:49

99% Occupied Bandwidth**5.2G**

Mode	99% OBW (MHz)
a_5180MHz_Chain 0	16.800
a_5200MHz_Chain 0	16.750
a_5240MHz_Chain 0	16.750
n20_5180MHz_Chain 0	17.850
n20_5200MHz_Chain 0	17.900
n20_5240MHz_Chain 0	17.850
n40_5190MHz_Chain 0	36.600
n40_5230MHz_Chain 0	36.700
ac80_5210MHz_Chain 0	76

Note:

The 99% Occupied Bandwidth have not fall into the band 5250-5350MHz, please refer to the test plots of 99% Occupied Bandwidth.

5.8G


Mode	99% OBW (MHz)
a_5745MHz_Chain 0	16.800
a_5785MHz_Chain 0	16.750
a_5825MHz_Chain 0	16.800
n20_5745MHz_Chain 0	17.900
n20_5785MHz_Chain 0	17.850
n20_5825MHz_Chain 0	17.900
n40_5755MHz_Chain 0	36.600
n40_5795MHz_Chain 0	36.500
ac80_5775MHz_Chain 0	76.200

Note:

The 99% Occupied Bandwidth have not fall into the band 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.


5.2G

a 5180MHz Chain 0 16.800MHz

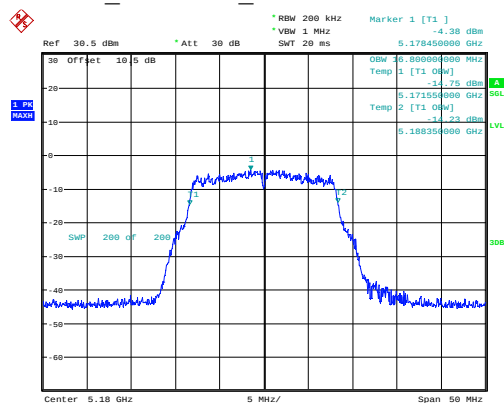


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:13:00

a 5200MHz Chain 0 16.750MHz

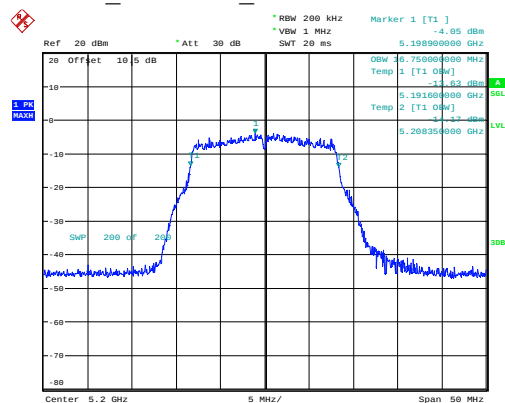


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:21:34

a 5240MHz Chain 0 16.750MHz

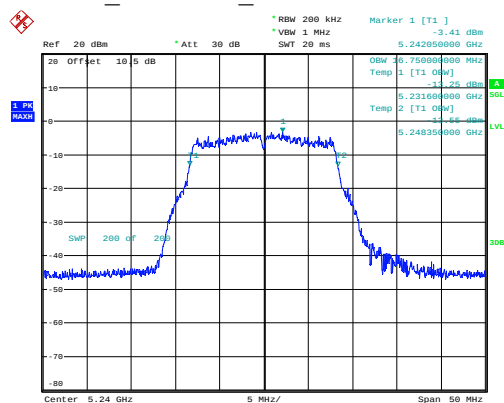


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:24:32

n20 5180MHz Chain 0 17.850MHz

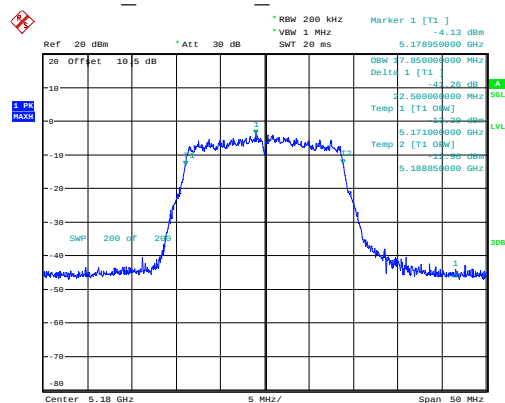


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5-SEP-2024 11:34:47

n20 5200MHz Chain 0 17.900MHz

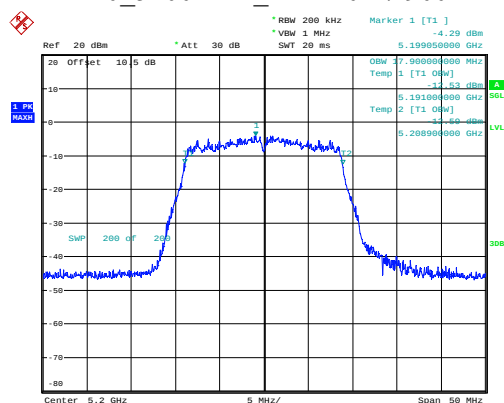


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:37:30

n20 5240MHz Chain 0 17.850MHz

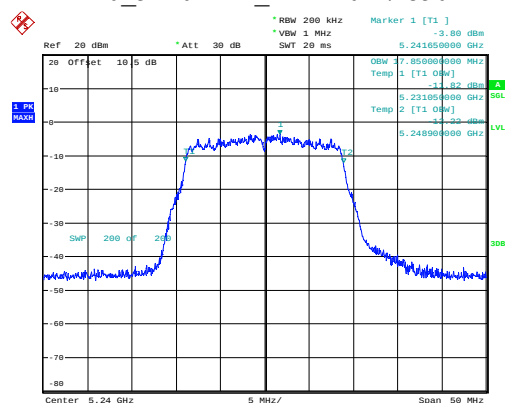


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:40:41

n40_5190MHz_Chain 0 36.600MHz

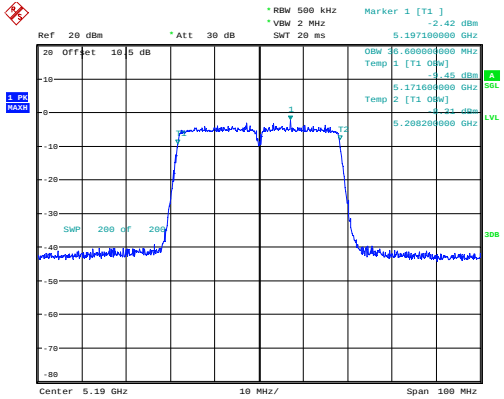

ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:45:10


n40_5230MHz_Chain 0 36.700MHz

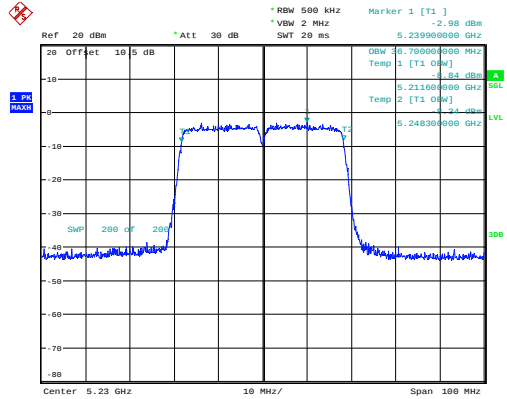

ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:48:28


5.8G

ac80_5210MHz_Chain 0 76MHz

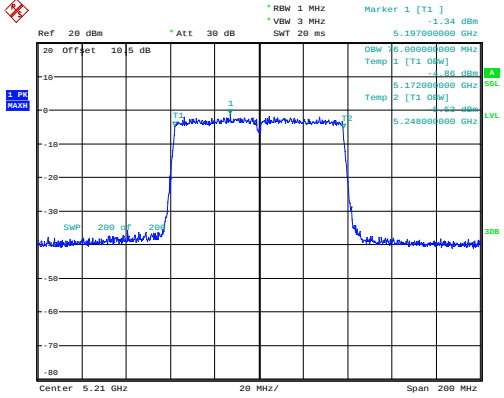


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:52:11

a_5745MHz_Chain 0 16.800MHz

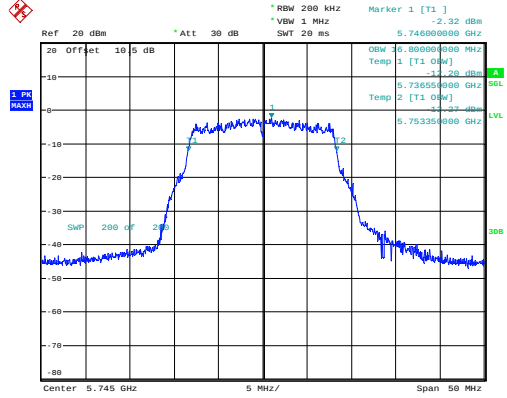


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:59:01

a_5785MHz_Chain 0 16.750MHz

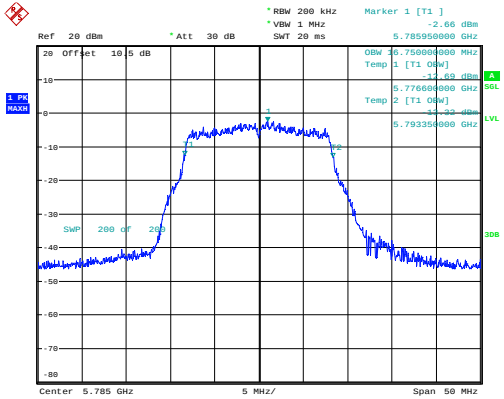


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:06:36

a_5825MHz_Chain 0 16.800MHz

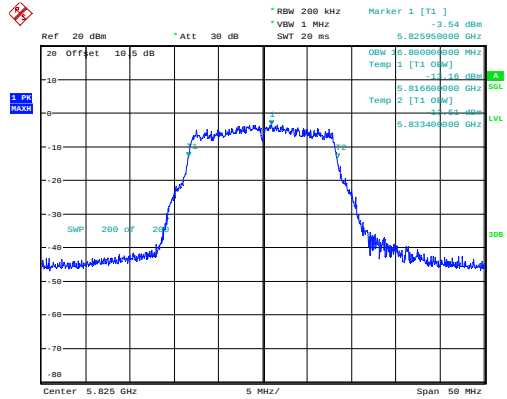


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:08:56

n20_5745MHz_Chain 0 17.900MHz

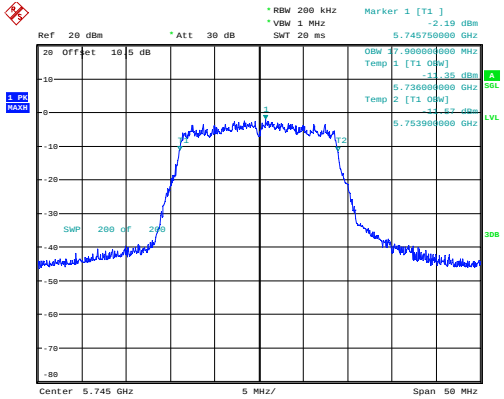


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:11:24

n20_5785MHz_Chain 0 17.850MHz

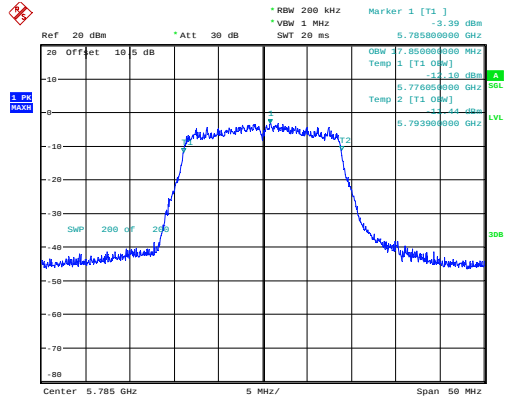


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:13:37

n20_5825MHz_Chain 0 17.900MHz

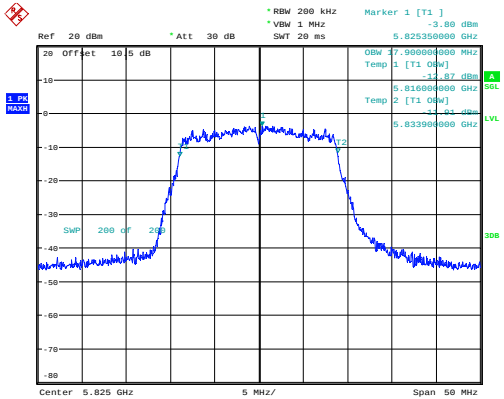


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:15:53

n40_5755MHz_Chain 0 36.600MHz

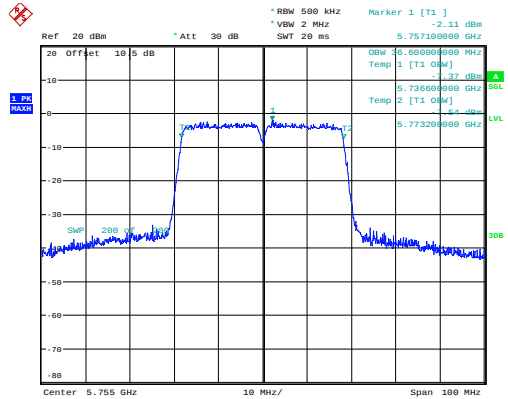


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:18:32

n40_5795MHz_Chain 0 36.500MHz

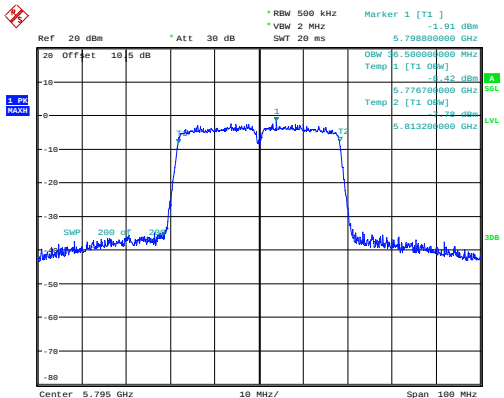

ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:21:19

ac80_5775MHz_Chain 0 76.200MHz

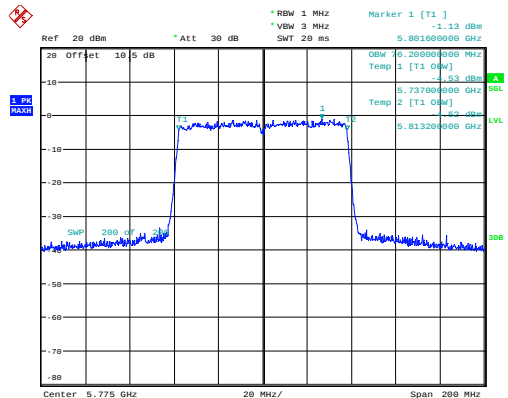

ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:24:16

Maximum Conducted Output Power**5.2G**

Mode	Average Output Power (dBm)	Limit (dBm)	Result
a_5180MHz_Chain 0	4.74	24	Pass
a_5180MHz_Chain 1	6.02	24	Pass
a_5200MHz_Chain 0	4.84	24	Pass
a_5200MHz_Chain 1	6.24	24	Pass
a_5240MHz_Chain 0	5.48	24	Pass
a_5240MHz_Chain 1	6.31	24	Pass
n20_5180MHz_Chain 0	4.78	24	Pass
n20_5180MHz_Chain 1	6.45	24	Pass
n20_5180MHz_Chain 0+Chain 1	8.71	24	Pass
n20_5200MHz_Chain 0	4.91	24	Pass
n20_5200MHz_Chain 1	6.38	24	Pass
n20_5200MHz_Chain 0+Chain 1	8.72	24	Pass
n20_5240MHz_Chain 0	5.4	24	Pass
n20_5240MHz_Chain 1	6.34	24	Pass
n20_5240MHz_Chain 0+Chain 1	8.91	24	Pass
n40_5190MHz_Chain 0	5.24	24	Pass
n40_5190MHz_Chain 1	5.98	24	Pass
n40_5190MHz_Chain 0+Chain 1	8.64	24	Pass
n40_5230MHz_Chain 0	5.66	24	Pass
n40_5230MHz_Chain 1	6.33	24	Pass
n40_5230MHz_Chain 0+Chain 1	9.02	24	Pass
ac80_5210MHz_Chain 0	5.48	24	Pass
ac80_5210MHz_Chain 1	6.4	24	Pass
ac80_5210MHz_Chain 0+Chain 1	8.97	24	Pass

Note: The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{\text{ANT}} \leq 4$,
so directional gain = antenna gain + array gain = 2.39+0 = 2.39 dBi.

5.8G

Mode	Average Output Power (dBm)	Limit (dBm)	Result
a_5745MHz_Chain 0	6.53	30	Pass
a_5745MHz_Chain 1	7.75	30	Pass
a_5785MHz_Chain 0	6.03	30	Pass
a_5785MHz_Chain 1	7.61	30	Pass
a_5825MHz_Chain 0	5.71	30	Pass
a_5825MHz_Chain 1	7.68	30	Pass
n20_5745MHz_Chain 0	6.45	30	Pass
n20_5745MHz_Chain 1	7.61	30	Pass
n20_5745MHz_Chain 0+Chain 1	10.08	30	Pass
n20_5785MHz_Chain 0	5.87	30	Pass
n20_5785MHz_Chain 1	7.78	30	Pass
n20_5785MHz_Chain 0+Chain 1	9.94	30	Pass
n20_5825MHz_Chain 0	5.55	30	Pass
n20_5825MHz_Chain 1	7.83	30	Pass
n20_5825MHz_Chain 0+Chain 1	9.85	30	Pass
n40_5755MHz_Chain 0	6.55	30	Pass
n40_5755MHz_Chain 1	7.65	30	Pass
n40_5755MHz_Chain 0+Chain 1	10.15	30	Pass
n40_5795MHz_Chain 0	6.16	30	Pass
n40_5795MHz_Chain 1	7.74	30	Pass
n40_5795MHz_Chain 0+Chain 1	10.03	30	Pass
ac80_5775MHz_Chain 0	6.25	30	Pass
ac80_5775MHz_Chain 1	7.35	30	Pass
ac80_5775MHz_Chain 0+Chain 1	9.85	30	Pass

Note: The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{\text{ANT}} \leq 4$,

so directional gain = antenna gain + array gain = 2.65+0 = 2.65 dBi.

Power Spectral Density**5.2G**

Mode	Value (dBm/MHz)	Duty Cycle Factor(dB)	PSD (dBm/MHz)	Limit (dBm/MHz)	Result
a_5180MHz_Chain 0	-5.61	0.32	-5.29	11	Pass
a_5180MHz_Chain 1	-4.33	0.32	-4.01	11	Pass
a_5200MHz_Chain 0	-5.45	0.32	-5.13	11	Pass
a_5200MHz_Chain 1	-4.15	0.32	-3.83	11	Pass
a_5240MHz_Chain 0	-4.76	0.32	-4.44	11	Pass
a_5240MHz_Chain 1	-4.03	0.32	-3.71	11	Pass
n20_5180MHz_Chain 0	-5.93	0.61	-5.32	11	Pass
n20_5180MHz_Chain 1	-4.36	0.61	-3.75	11	Pass
n20_5180MHz_Chain 0+Chain 1	-2.06	0.61	-1.45	11	Pass
n20_5200MHz_Chain 0	-5.84	0.61	-5.23	11	Pass
n20_5200MHz_Chain 1	-4.46	0.61	-3.85	11	Pass
n20_5200MHz_Chain 0+Chain 1	-2.09	0.61	-1.48	11	Pass
n20_5240MHz_Chain 0	-5.43	0.61	-4.82	11	Pass
n20_5240MHz_Chain 1	-4.42	0.61	-3.81	11	Pass
n20_5240MHz_Chain 0+Chain 1	-1.89	0.61	-1.28	11	Pass
n40_5190MHz_Chain 0	-10.07	1.11	-8.96	11	Pass
n40_5190MHz_Chain 1	-9.24	1.11	-8.13	11	Pass
n40_5190MHz_Chain 0+Chain 1	-6.62	1.11	-5.51	11	Pass
n40_5230MHz_Chain 0	-9.65	1.11	-8.54	11	Pass
n40_5230MHz_Chain 1	-8.83	1.11	-7.72	11	Pass
n40_5230MHz_Chain 0+Chain 1	-6.21	1.11	-5.10	11	Pass
ac80_5210MHz_Chain 0	-12.36	0.43	-11.93	11	Pass
ac80_5210MHz_Chain 1	-11.22	0.43	-10.79	11	Pass
ac80_5210MHz_Chain 0+Chain 1	-8.74	0.43	-8.31	11	Pass

Note:

The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

Array Gain = $10 \log(N_{\text{ANT}}/N_{\text{SS}})$ dB,

So directional gain = antenna gain + array gain = $2.39 + 10 \log(2/1) = 5.39$ dBi.

5.8G

Mode	Value(dBm /500kHz)	Duty Cycle Factor(dB)	PSD(dBm /500kHz)	Limit(dBm /500kHz)	Result
a_5745MHz_Chain 0	-6.69	0.32	-6.37	30	Pass
a_5745MHz_Chain 1	-5.51	0.32	-5.19	30	Pass
a_5785MHz_Chain 0	-7.28	0.32	-6.96	30	Pass
a_5785MHz_Chain 1	-5.61	0.32	-5.29	30	Pass
a_5825MHz_Chain 0	-7.49	0.32	-7.17	30	Pass
a_5825MHz_Chain 1	-5.48	0.32	-5.16	30	Pass
n20_5745MHz_Chain 0	-7.28	0.61	-6.67	30	Pass
n20_5745MHz_Chain 1	-6.14	0.61	-5.53	30	Pass
n20_5745MHz_Chain 0+Chain 1	-3.66	0.61	-3.05	30	Pass
n20_5785MHz_Chain 0	-7.96	0.61	-7.35	30	Pass
n20_5785MHz_Chain 1	-6.01	0.61	-5.40	30	Pass
n20_5785MHz_Chain 0+Chain 1	-3.87	0.61	-3.26	30	Pass
n20_5825MHz_Chain 0	-8.07	0.61	-7.46	30	Pass
n20_5825MHz_Chain 1	-5.85	0.61	-5.24	30	Pass
n20_5825MHz_Chain 0+Chain 1	-3.81	0.61	-3.2	30	Pass
n40_5755MHz_Chain 0	-11.64	1.11	-10.53	30	Pass
n40_5755MHz_Chain 1	-10.77	1.11	-9.66	30	Pass
n40_5755MHz_Chain 0+Chain 1	-8.17	1.11	-7.06	30	Pass
n40_5795MHz_Chain 0	-12.18	1.11	-11.07	30	Pass
n40_5795MHz_Chain 1	-10.42	1.11	-9.31	30	Pass
n40_5795MHz_Chain 0+Chain 1	-8.2	1.11	-7.09	30	Pass
ac80_5775MHz_Chain 0	-14.43	0.43	-14.00	30	Pass
ac80_5775MHz_Chain 1	-13.48	0.43	-13.05	30	Pass
ac80_5775MHz_Chain 0+Chain 1	-10.92	0.43	-10.49	30	Pass

Note:


The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

Array Gain = $10 \log(N_{\text{ANT}}/N_{\text{SS}})$ dB,

So directional gain = antenna gain + array gain = $2.65 + 10 * \log(2/1) = 5.65$ dBi.


5.2G

a_5180MHz_Chain 0 -5.61dBm/MHz

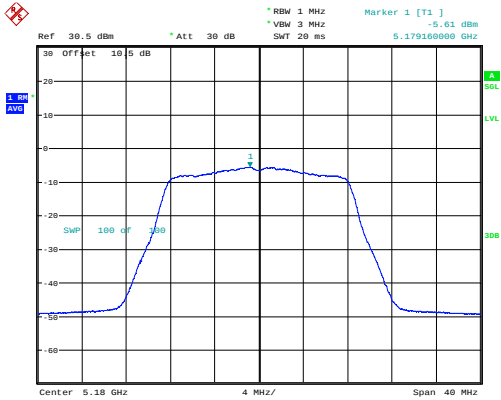


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:14:36

a_5180MHz_Chain 1 -4.33dBm/MHz

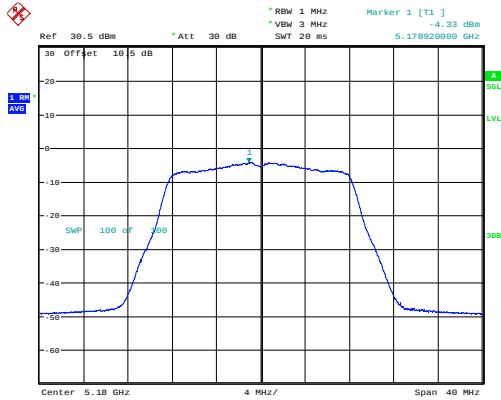


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:36:04

a_5200MHz_Chain 0 -5.45dBm/MHz

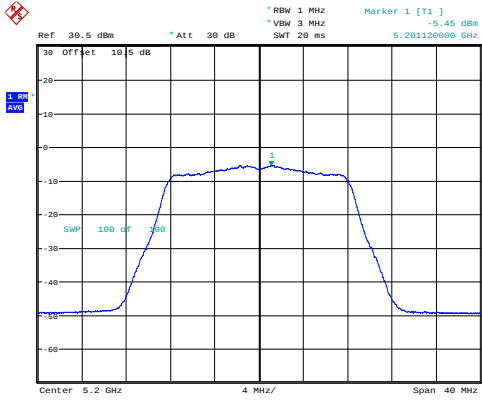


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:23:10

a_5200MHz_Chain 1 -4.15dBm/MHz

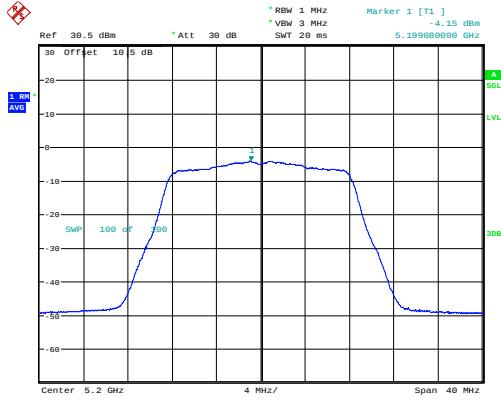


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:39:35

a_5240MHz_Chain 0 -4.76dBm/MHz

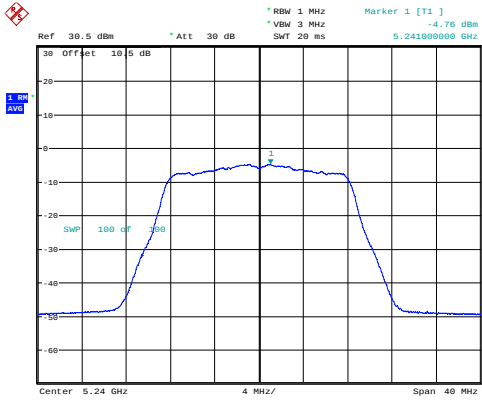


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:26:09

a_5240MHz_Chain 1 -4.03dBm/MHz

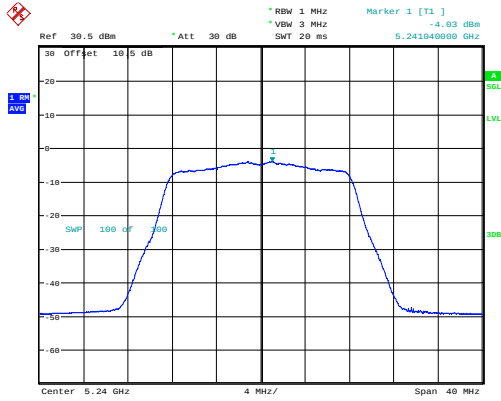


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:42:19

n20_5180MHz_Chain 0 -5.93dBm/MHz

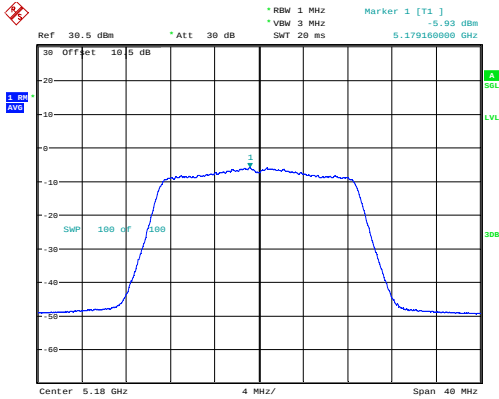


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:35:22

n20_5180MHz_Chain 1 -4.36dBm/MHz

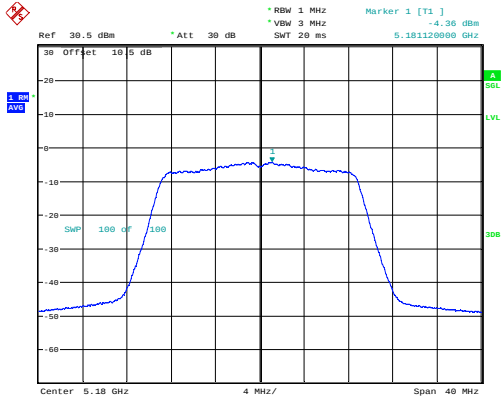


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:46:59

n20_5200MHz_Chain 0 -5.84dBm/MHz

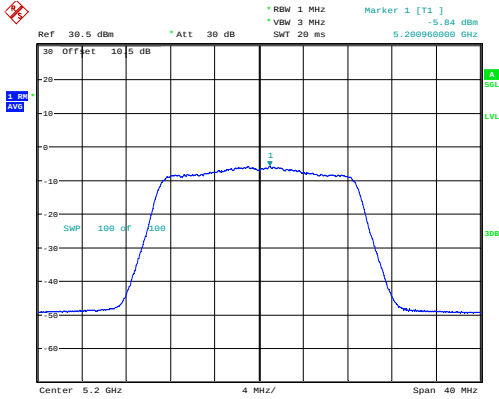


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:39:10

n20_5200MHz_Chain 1 -4.46dBm/MHz

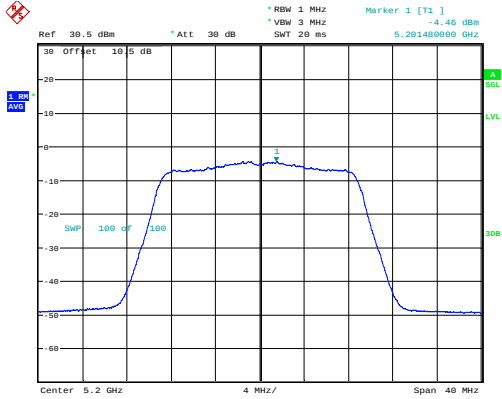


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:49:50

n20_5240MHz_Chain 0 -5.43dBm/MHz

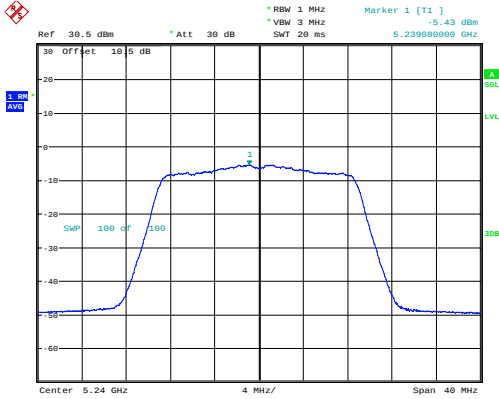


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:42:18

n20_5240MHz_Chain 1 -4.42dBm/MHz

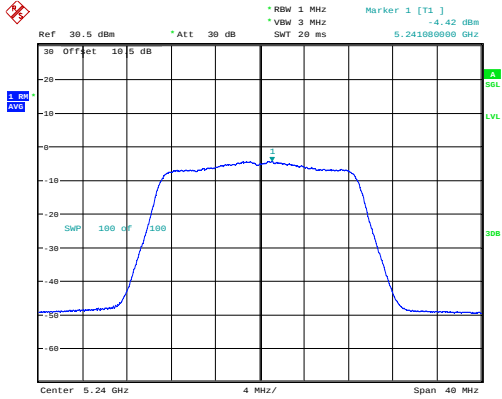


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:52:33

n40_5190MHz_Chain 0 -10.07dBm/MHz

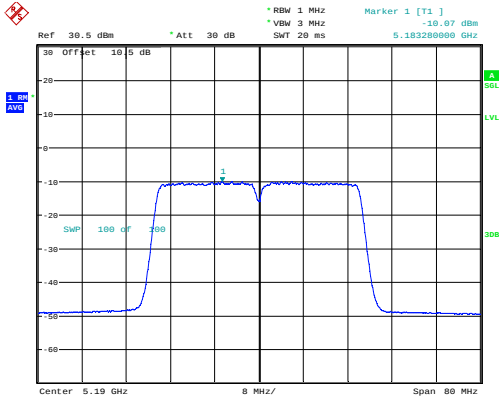


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:46:29

n40_5190MHz_Chain 1 -9.24dBm/MHz

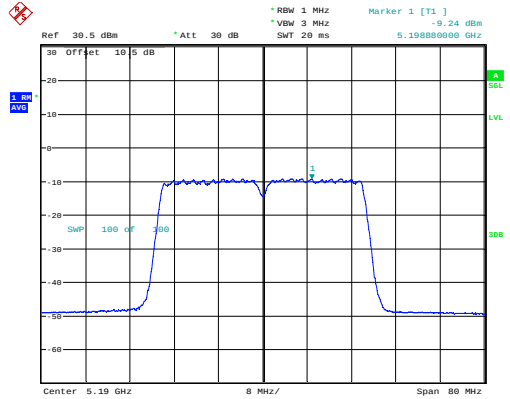


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:55:17

n40_5230MHz_Chain 0 -9.65dBm/MHz

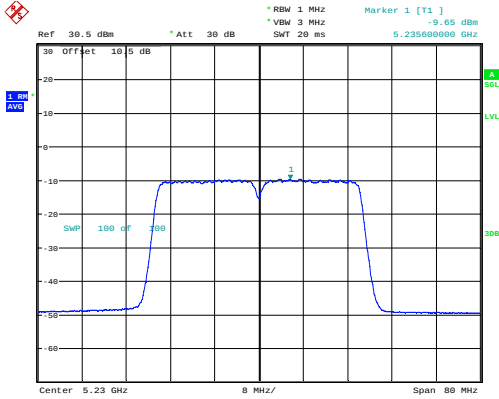


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:49:55

n40_5230MHz_Chain 1 -8.83dBm/MHz

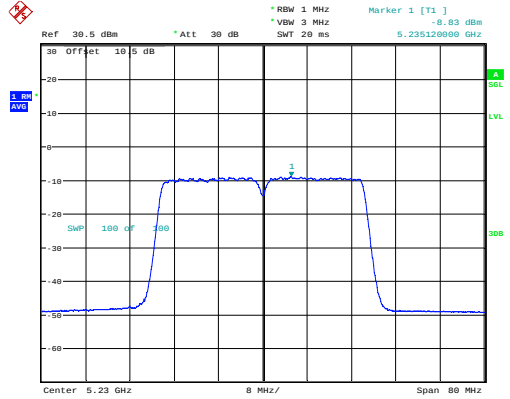


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:58:02

ac80_5210MHz_Chain 0 -12.36dBm/MHz

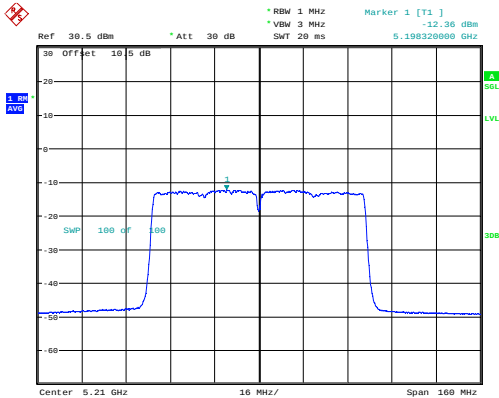

ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:53:38


ac80_5210MHz_Chain 1 -11.22dBm/MHz

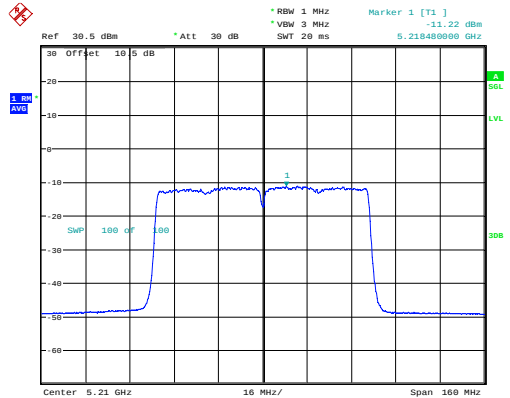

ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 14:01:59


5.8G

a_5745MHz_Chain 0 -6.69dBm/500kHz

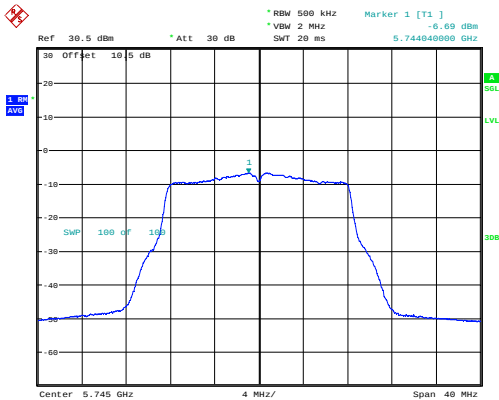


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 12:00:08

a_5745MHz_Chain 1 -5.51dBm/500kHz

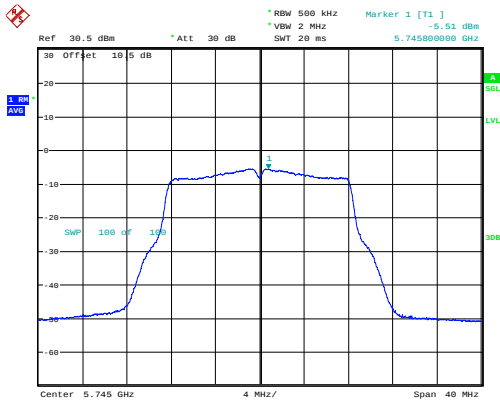


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 14:07:01

a_5785MHz_Chain 0 -7.28dBm/500kHz

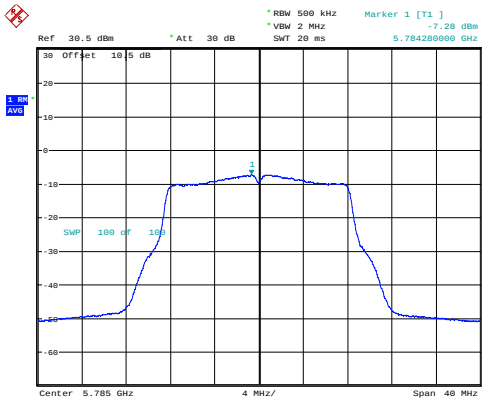


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:07:47

a_5785MHz_Chain 1 -5.61dBm/500kHz

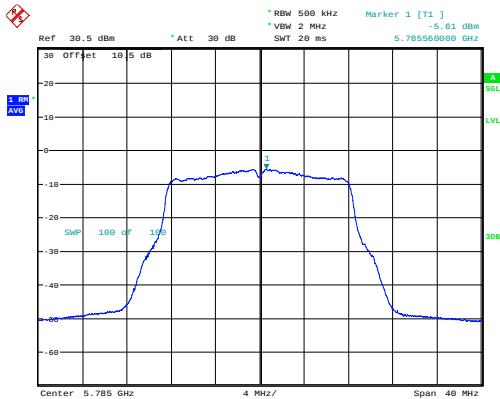


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 14:09:25

a_5825MHz_Chain 0 -7.49dBm/500kHz

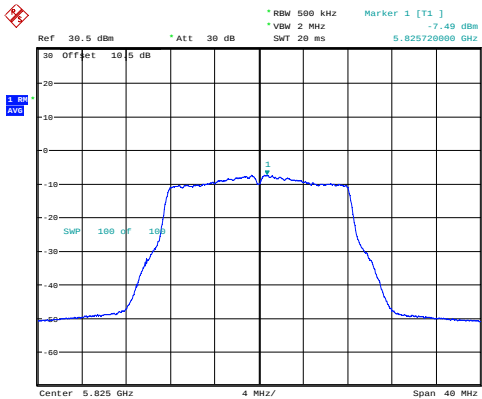


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:10:06

a_5825MHz_Chain 1 -5.48dBm/500kHz

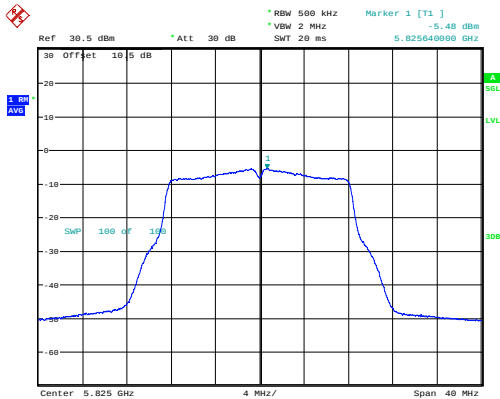


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 14:16:26

n20_5745MHz_Chain 0 -7.28dBm/500kHz

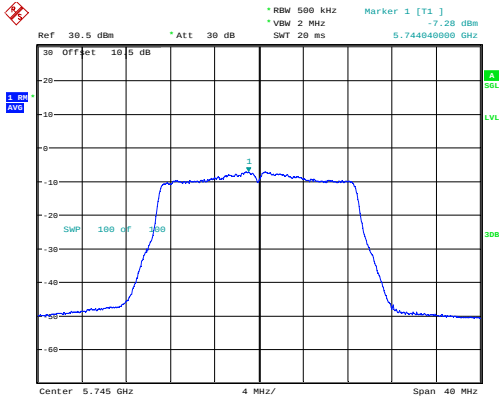


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:12:33

n20_5745MHz_Chain 1 -6.14dBm/500kHz

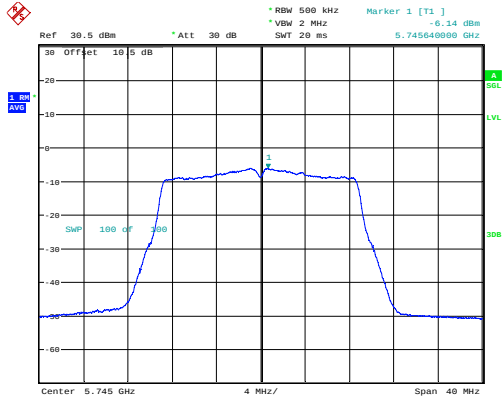


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 14:20:36

n20_5785MHz_Chain 0 -7.96dBm/500kHz

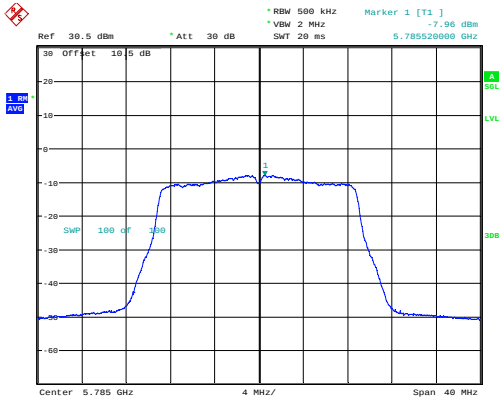


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:14:46

n20_5785MHz_Chain 1 -6.01dBm/500kHz

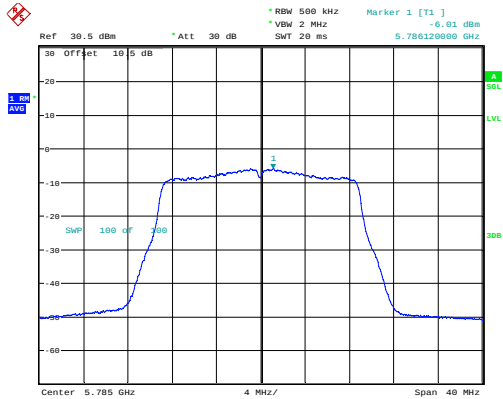


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 14:23:07

n20_5825MHz_Chain 0 -8.07dBm/500kHz

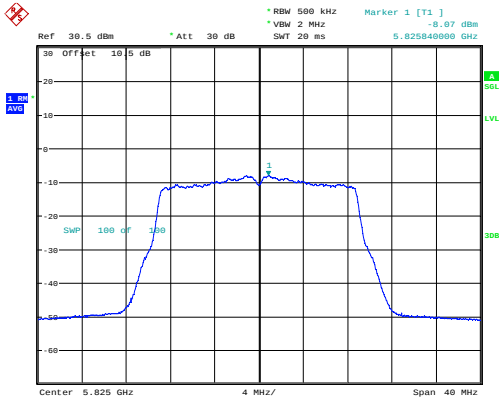


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:17:03

n20_5825MHz_Chain 1 -5.85dBm/500kHz

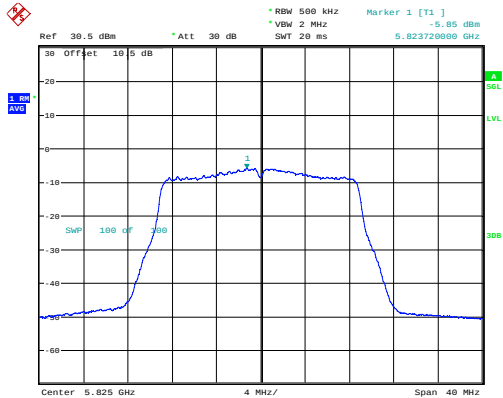


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 14:25:21

n40_5755MHz_Chain 0 -11.64dBm/500kHz

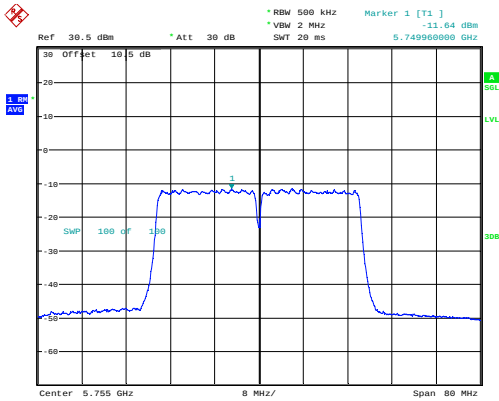


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:19:51

n40_5755MHz_Chain 1 -10.77dBm/500kHz

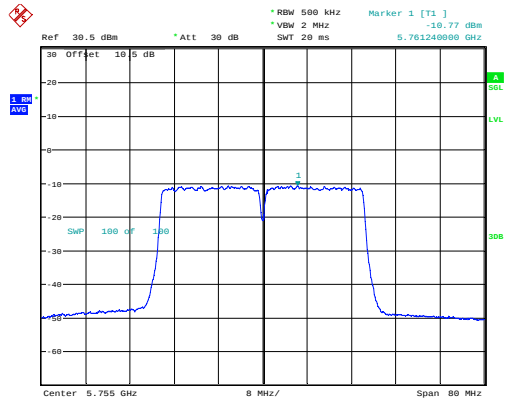


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 14:28:02

n40_5795MHz_Chain 0 -12.18dBm/500kHz

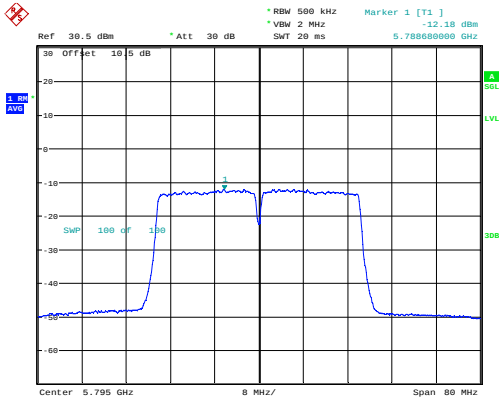


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:22:38

n40_5795MHz_Chain 1 -10.42dBm/500kHz

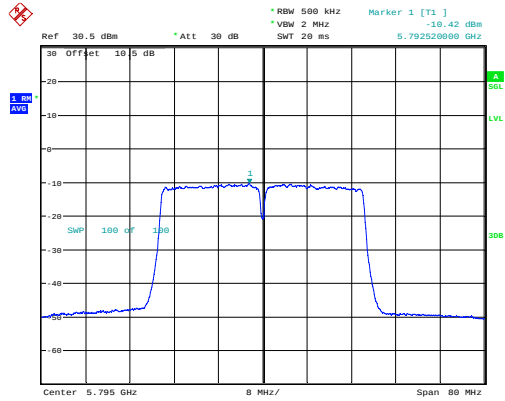


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 14:30:35

ac80_5775MHz_Chain 0 -14.43dBm/500kHz

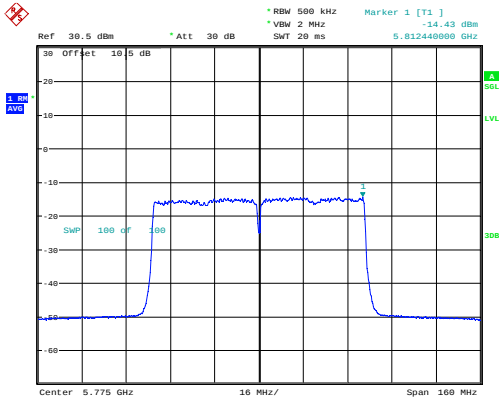

ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 13:25:44

ac80_5775MHz_Chain 1 -13.48dBm/500kHz

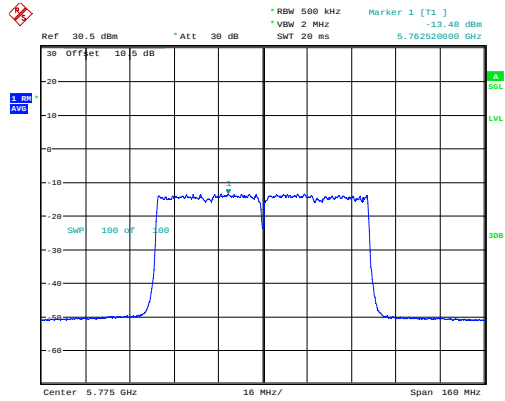

ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 14:33:29

Duty Cycle


5.2G

Mode	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)	1/Ton (Hz)	VBW Setting (kHz)
a_5200MHz_Chain 0	1.391	1.496	92.98	0.32	719	1
n20_5200MHz_Chain 0	0.672	0.774	86.82	0.61	1488	2
n40_5190MHz_Chain 0	0.347	0.448	77.46	1.11	2882	3
ac80_5210MHz_Chain 0	0.221	0.244	90.57	0.43	4525	5

Duty Cycle = Ton/(Ton+Toff)*100%


5.2G

a_5200MHz_Chain 0
1.391ms,1.496ms

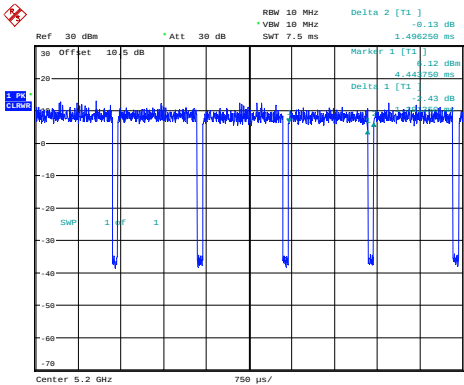


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:01:18

n20_5200MHz_Chain 0
0.672ms,0.774ms

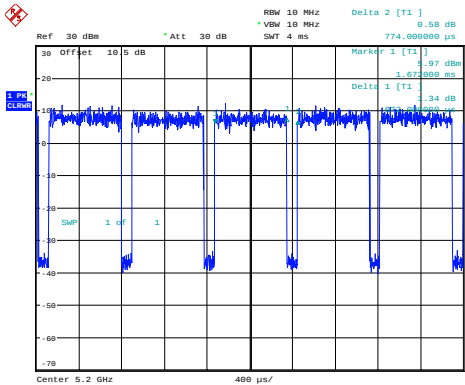


ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:07:49

n40_5190MHz_Chain 0
0.347ms,0.448ms

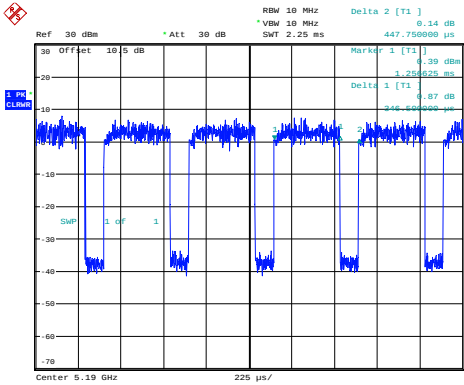

ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:08:31

ac80_5210MHz_Chain 0
0.221ms,0.244ms

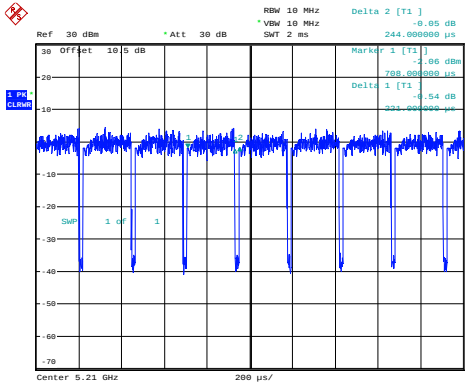

ProjectNo.:2403W29386E-RF Tester:Arthur Su
Date: 5.SEP.2024 11:09:13