



# LTE Outdoor CPE

## Quick Start Guide ▶



### Panel of device



ODU	
POWER	Power on
ON	No power supply
WIFI on	Internet available
INTERNET	Internet unavailable
WIFI	Receiving network
WIFI interval	Receiving network
SIM	2G mode
ON	No SIM detected
Green	Signal strong
Yellow	Signal good
Red	Signal weak
Warning	Received data
Warning	Promiscuous upgrade

### Configure the CPE

#### Login to the website

Use a browser to access the management web page to configure and manage the CPE. The following procedure describes how to use a computer running Windows 7 or above version and Internet Explorer to connect to the CPE webpage.

- Step 1 Connect to the CPE correctly.
- Step 2 Go to the management website.
- Step 3 Start Internet Explorer, type <http://192.168.0.1> in the address bar, and press Enter.

**CODIUM** For Technical Support  
please contact your Internet Service Provider

### Introduction

LTE outdoor CPE is a highly advanced LTE outdoor multi-service product solution specifically designed to meet integrated data needs for residential, business and enterprise users. The product supports advanced Gigabit networking functionalities. It enables wide service coverage and provides high data throughput and networking features to customers who needs easy broadband access.

### Packing List

Please make sure you have everything you need to properly configure the device.



### How does it work

1. Connect the PoE Adapter to PoE injector.
2. PoE injector provides the power to ODU via LAN cable.
3. PC connects LAN Cable to PoE, then PC can surf the internet when ODU accesses the LTE network.

This quick installation guide shows you how to configure your ODU in order to access the Internet.

**NOTE:** Make sure you have inserted the SIM card into the ODU.

### Configure hardware

**Caution**  
Please make sure that you are familiar with all accident prevention and safety procedures necessary for working at height and with electricity before starting to install the device.  
DO NOT install the ODU during a lightning storm.

#### Insert a SIM Card to the Slot

**Caution**  
Make sure the ODU is turned off before you insert your SIM card. It is recommended to NOT connect the PoE cable when you do this step. Otherwise, the SIM card may be damaged.



#### Mount the ODU

##### To connect the CAT5e (or above) Ethernet cable:

See the Installation Instructions to mount the ODU correctly.

**Step 1** CAT5e (or above) cable to thread through the cable glands.

**Step 2** Connect the end of the CAT5e (or above) Ethernet cable to the PoE port of the ODU.


**Step 3** Wiring the cable glands into ODU and seal tightly.

**NOTE:** The ODU needs professional installation.

### Header Connection



### Mounting Bracket

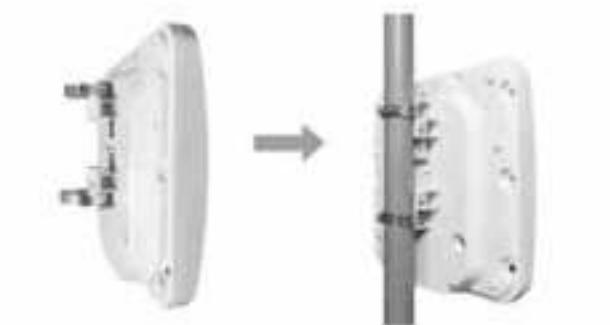

### Connect the PoE

Place a CAT5e (or above) Ethernet cable (not included) from the location of your intended Router to the desired PC location.

If you intend to use cable clamps or other methods to secure the cable, do not tighten them until you finish installing the Router and ODU.


### Choose a location

The ODU can be mounted on an antenna pole or mast or on a wall using the supplied mounting bracket.

- Choose a mounting point that is sturdy enough to hold the ODU, even during high winds.

- When choosing a location to install the ODU, please note that the ODU's front panel should point towards your service provider's nearest base station. You do not need to be able to see the base station from the ODU's position. However, if you experience difficulties with signal reception, a Line of Sight (LoS) connector may produce better results.

- It is suggested that you transport the ODU to its intended installation location in its original protective package.

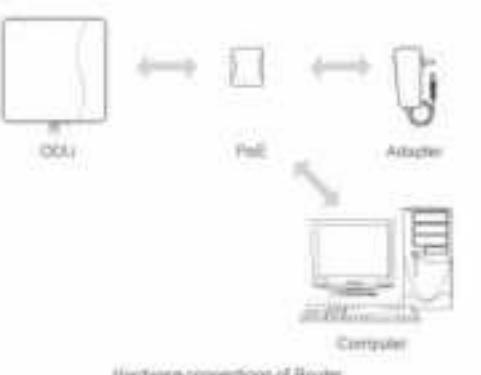

**Step 1** Connect the CAT5e (or above) Ethernet cable to PoE.

**Caution**  
Do not connect to a computer or switch directly to the PoE port due to high PoE power.

**Step 2** Connect the power adapter to the PoE injector. The PoE LED turns on a solid green-yellow once connected.

**Step 3** Connect the included Ethernet cable from the computer to one of the Router's Ethernet ports.

### LED Behavior

When setting up the Outdoor Unit, the LED will have the following behavior:

### Frequently Asked Questions

#### The POWER indicator does not turn on.

- Make sure that the power cable is connected to the PoE, and the CPE is connected to the right part of the PoE.
- Make sure that the power adapter and PoE are compatible with the CPE.

#### Fails to Log in to the web management page.

- Make sure that the CPE is powered on.
- Verify that the CPE is correctly connected to the computer through a network cable.
- If the problem persists, contact authorized local service suppliers.

#### The CPE fails to search for the LTE network.

- Check that the power adapter and PoE have connected to the CPE properly.
- Check that the CPE is placed in an open area that is far away from obstructions, such as concrete or wooden walls.
- Check that the CPE is placed far away from household electrical appliances that generate strong electromagnetic field, such as microwave ovens, refrigerators, and satellite dishes.


If the problem persists, contact authorized local service suppliers.

#### The CPE power adapter has overheated.

- The CPE is heated after being used for long time. Therefore, you must turn off the CPE when not you are using.
- Check that the CPE is properly ventilated and protected from direct sunlight.

#### The parameters are restored to default values.

- If the CPE powers off unexpectedly while being configured, the parameters may be restored to the default settings.
- After configuring the parameters, download the configuration file to quickly restore the CPE to the desired settings.

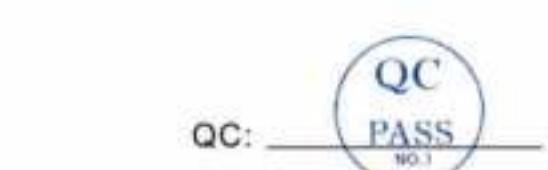

#### Notice

Some features of the product and its accessories described herein rely on the software installed, capacities and settings of local network, and may not be activated or may be limited by local network operators or internet service providers. Thus the descriptions herein may not exactly match the product or its accessories you purchased. We reserve the right to change or modify any information or specifications contained in this manual without prior notice or obligation.

### FCC Regulations:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

### FCC RF Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. To comply with FCC RF exposure compliance requirements, this grant is applicable to only Mobile Configurations. The antennas used for the transmitter must be installed to provide a separation distance of at least 20cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.