



REPORT No.: SZ24090002W03

TEST REPORT

APPLICANT : DEKA Research & Development Corp.

PRODUCT NAME : Smart phone

MODEL NAME : 6008B

BRAND NAME : N/A

FCC ID : 2ATGA6008B

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2024-09-02

TEST DATE : 2024-09-09 to 2024-09-20

ISSUE DATE : 2024-09-27



Edited by:

Peng Mi

Peng Mi (Rapporteur)

Approved by:

Shen Junsheng

Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Summary of Test Result	4
1.1. Testing Applied Standards	5
1.2. Test Equipment List	6
1.3. Measurement Uncertainty	8
1.4. Testing Laboratory	8
2. General Description	9
2.1. Information of Applicant and Manufacturer	9
2.2. Information of EUT	9
2.3. Channel List of EUT	10
2.4. Test Configuration of EUT	11
2.5. Test Conditions	11
2.6. Test Setup Layout Diagram	12
3. Test Results	15
3.1. Antenna Requirement	15
3.2. Duty Cycle of Test Signal	16
3.3. Maximum Peak and Average Conducted Output Power	17
3.4. 6 dB Bandwidth	18
3.5. Conducted Spurious Emissions and Band Edge	19
3.6. Power Spectral Density	20
3.7. Conducted Emission	21
3.8. Restricted Frequency Bands	22
3.9. Radiated Emission	23
Annex A Test Data and Result	25



REPORT No.: SZ24090002W03

Change History		
Version	Date	Reason for change
1.0	2024-09-27	First edition



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle of Test Signal	Sep. 09, 2024	Li Xinpeng	PASS	No deviation
3	15.247(b)	Maximum Peak Conducted Output Power	Sep. 09, 2024	Li Xinpeng	PASS	No deviation
4	15.247(b)	Maximum Average Conducted Output Power	Sep. 09, 2024	Li Xinpeng	PASS	No deviation
5	15.247(a)	Bandwidth	Sep. 09, 2024	Li Xinpeng	PASS	No deviation
6	15.247(d)	Conducted Spurious Emission and Band Edge	Sep. 09, 2024	Li Xinpeng	PASS	No deviation
7	15.247(e)	Power Spectral Density	Sep. 09, 2024	Li Xinpeng	PASS	No deviation
8	15.207	Conducted Emission	Sep. 11, 2024	Fan Shengquan	PASS	No deviation
9	15.247(d)	Restricted Frequency Bands	Sep. 13 to 15, 2024	Li Hanbin	PASS	No deviation
10	15.209, 15.247(d)	Radiated Emission	Sep. 14 to 20, 2024	Li Hanbin	PASS	No deviation

Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013 and KDB 558074 D01 v05r02.

Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 3: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2024.02.19	2025.02.18
Power Sensor	MY54180008	U2021XA	Agilent	2023.10.17	2024.10.16
Attenuator	MTJ6004-20	VAT-10+	MTJ Cooperation	N/A	N/A
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2024.01.25	2025.01.24
LISN	8127449	NSLK 8127	Schwarzbeck	2024.02.02	2025.02.01
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2024.05.30	2025.05.29
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	2024.07.02	2025.07.01

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR	Morlab	V1.2
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**1.2.4 Radiated Test Equipment**

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Signal Analyzer	MY56060145	N9020A	Agilent	2024.05.30	2025.05.29
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2024.06.22	2025.06.21
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2024.06.03	2025.06.02
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2024.06.22	2025.06.21
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2024.06.22	2025.06.21
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2024.05.30	2025.05.29
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2024.05.30	2025.05.29
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-KK-0.5	Qualwave	2024.07.03	2025.07.02
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-KKF-2	Qualwave	2024.07.03	2025.07.02
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-NN-5	Qualwave	2024.07.03	2025.07.02
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	$\pm 2.22\text{dB}$	Confidence levels of 95%
Power Spectral Density	$\pm 2.22\text{dB}$	Confidence levels of 95%
Bandwidth	$\pm 5\%$	Confidence levels of 95%
Conducted Spurious Emission	$\pm 2.77\text{dB}$	Confidence levels of 95%
Restricted Frequency Bands	$\pm 5\%$	Confidence levels of 95%
Radiated Emission	$\pm 2.95\text{dB}$	Confidence levels of 95%
Conducted Emission	$\pm 2.44\text{dB}$	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525
FCC Designation Number	CN1192
FCC Test Firm Registration Number	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	DEKA Research & Development Corp.
Applicant Address	340 Commercial St., Manchester, NH 03101, United States
Manufacturer	DEKA Research & Development Corp.
Manufacturer Address	340 Commercial St., Manchester, NH 03101, United States

2.2. Information of EUT

Product Name:	Smart phone	
Sample No.:	1#	
Hardware Version:	Q6006_V1.0	
Software Version:	1.0.8	
Modulation Technology:	DSSS, OFDM	
Modulation Type:	Refer to section 1.3	
Wireless Technology:	802.11b, 802.11g, 802.11n (HT20), 802.11n (HT40)	
Operating Frequency Range:	2412MHz–2472MHz	
Antenna Type:	PIFA Antenna	
Antenna Gain:	4.43dBi	
Accessory Information:	Battery	
	Brand Name:	N/A
	Model No.:	BTE-3402
	Serial No.:	N/A
	Capacity:	3400mAh
	Rated Voltage:	3.8V
	Charge Limit:	4.35V
	Manufacturer:	Phenix New Energy(Hui Zhou)Co.,Ltd.

Note 1: We use the dedicated software to control the EUT continuous transmission.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2.3.Channel List of EUT

Nominal Channel Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	1	2412	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432	12	2467
	6	2437	13	2472
	7	2442		
Nominal Channel Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
40MHz	3	2422	8	2447
	4	2427	9	2452
	5	2432	10	2457
	6	2437	11	2462
	7	2442		

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT

2.4.1. Modulation Type and Data Rate of EUT

Mode	Bandwidth (MHz)	Modulation Technology	Modulation Type	Data Rate	RU Size
802.11b	20	DSSS	DBPSK	1/2/5.5/11Mbps	N/A
			DQPSK		
			CCK		
802.11g	20	OFDM	BPSK	6/9/12/18/24/36/48/54 Mbps	N/A
			QPSK		
			16QAM		
			64QAM		
802.11n	20/40 (HT20/40)	OFDM	BPSK	MCS0~MCS7	N/A
			QPSK		
			16QAM		
			64QAM		

Note1: The worst-case mode (bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.


Note2: The RF signal transmission of EUT is controlled by the build-in engineering mode which is provided by the manufacturer. The recorded power setting value is the maximum that the engineering mode has configuration during testing.

2.5. Test Conditions


Temperature (°C)	15–35
Relative Humidity (%)	30–60
Atmospheric Pressure (kPa)	86–106

2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement

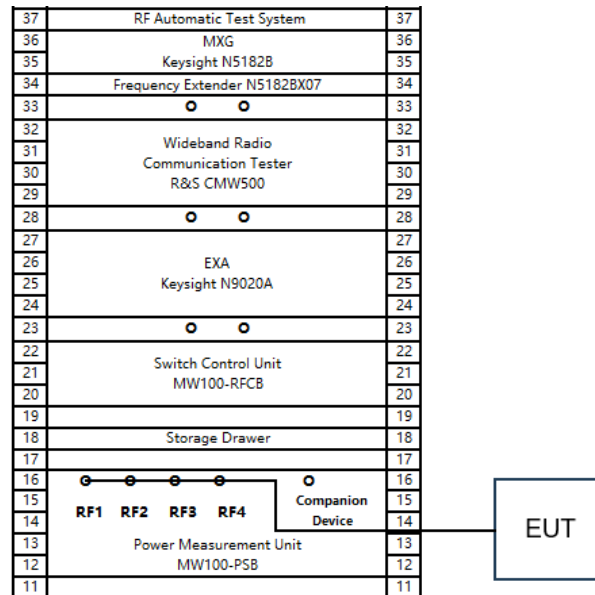


2.6.2. Conducted Emission Measurement

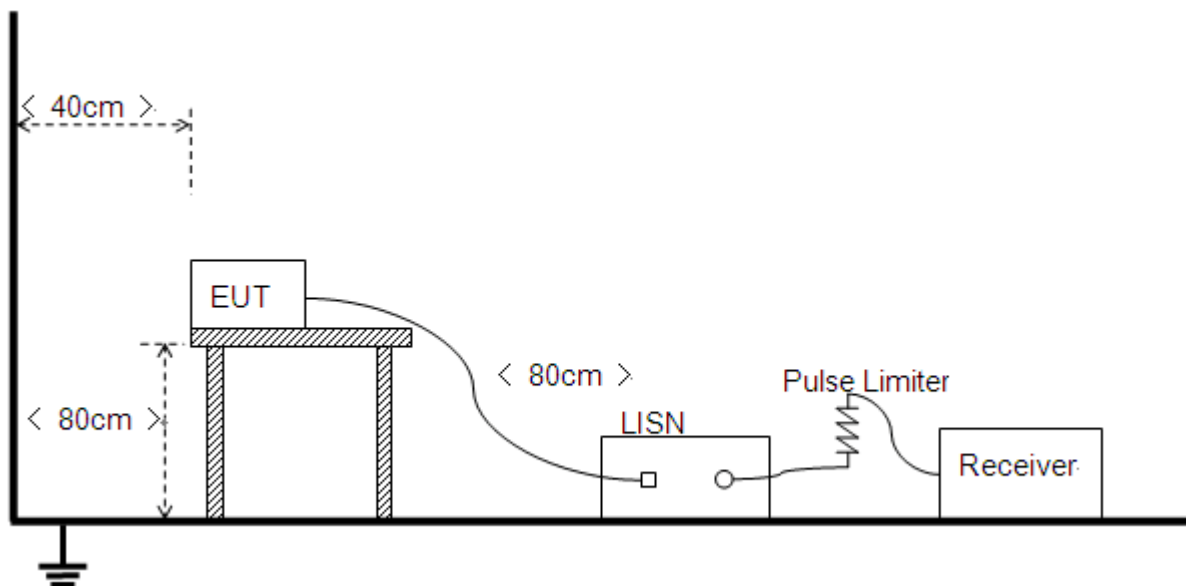


2.6.3.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

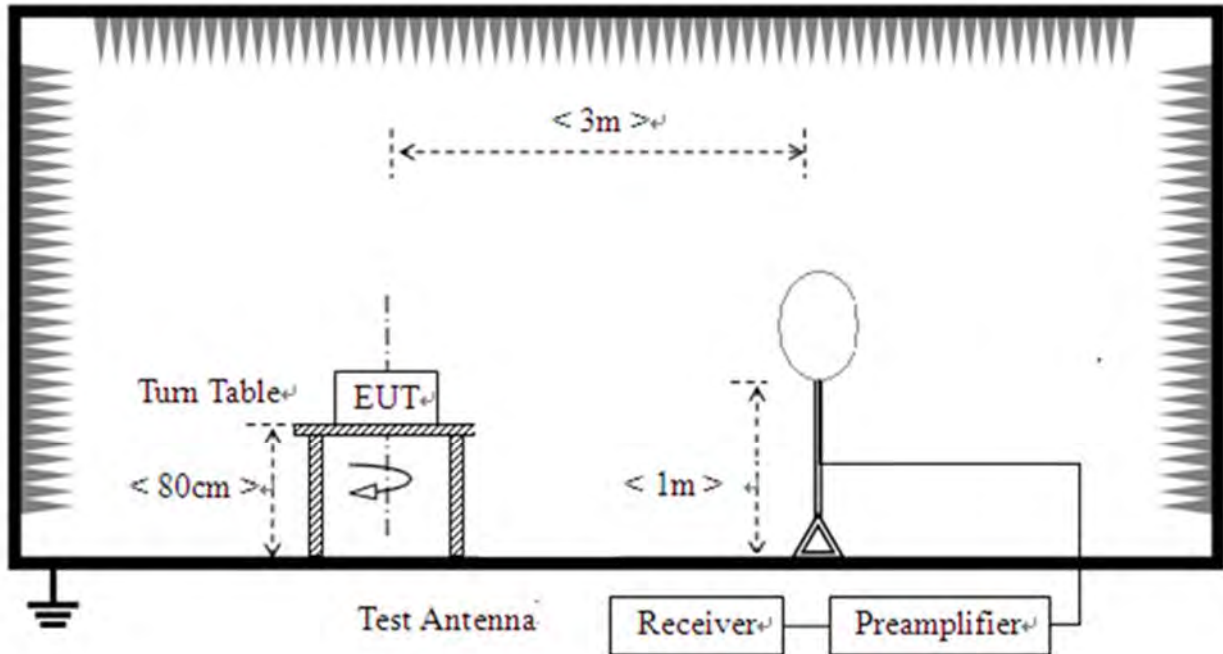

2) For radiated emissions from 30MHz to 1GHz

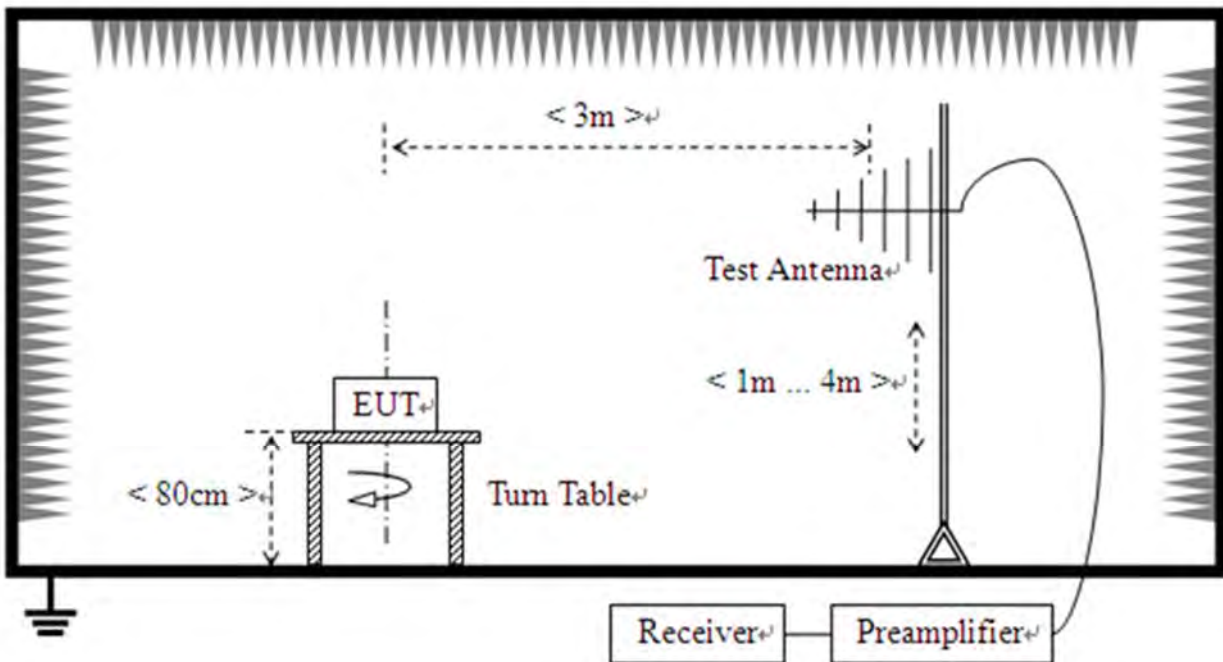

3) For radiated emissions above 1GHz

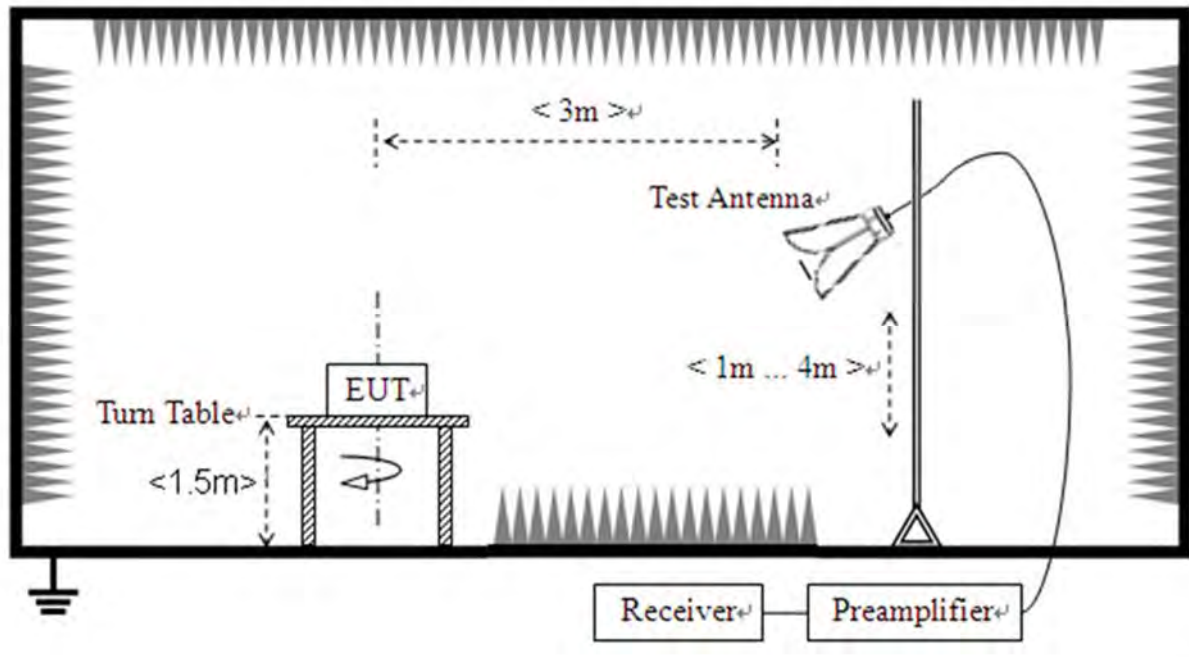



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

Antenna location	Antenna Type	Coupling Method
<input checked="" type="checkbox"/> Internal <input type="checkbox"/> External	<input type="checkbox"/> FPC Antenna <input type="checkbox"/> Spring Antenna <input type="checkbox"/> Ceramic Antenna <input type="checkbox"/> Integrated Antenna <input type="checkbox"/> Dipole Antenna <input type="checkbox"/> PCB Antenna <input checked="" type="checkbox"/> PIFA Antenna	<input type="checkbox"/> I-PEX Connector <input type="checkbox"/> SMA Connector <input type="checkbox"/> RP-SMA Connector <input checked="" type="checkbox"/> Metal Shrapnel

3.2. Duty Cycle of Test Signal

3.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2. Test Result

Refer to Annex A.1 in this report.



3.3. Maximum Peak and Average Conducted Output Power

3.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum conducted output power of the intentional radiator shall not exceed 1 Watt.

3.3.2. Test Procedures

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.2 and A.3 in this report.



3.4.6 dB Bandwidth

3.4.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

3.4.1.Test Procedures

KDB 558074 Section 8.2 was used in order to prove compliance.

3.4.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.3.Test Result

Refer to Annex A.4 in this report.



3.5. Conducted Spurious Emissions and Band Edge

3.5.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.5.2. Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

3.5.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.4. Test Result

Refer to Annex A.5 and A.6 in this report.



3.6. Power Spectral Density

3.6.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.6.2. Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to 1.5 times DTS
- c) Set RBW to 30kHz
- d) Set VBW to 100kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level and recorded as PD
- j) Use below formula to calculate the Conducted PSD value that at specified RBW:

Conducted PSD = PD - 10lg(30k/3k)

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.7 in this report.

3.7. Conducted Emission

3.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.7.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.7.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.7.4. Test Result

Refer to Annex A.8 in this report.

3.8. Restricted Frequency Bands

3.8.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.8.2. Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.8.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.8.4. Test Result

Refer to Annex A.9 in this report.

3.9. Radiated Emission

3.9.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.9.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.9.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4.Test Result

Refer to Annex A.10 in this report.



Annex A Test Data and Result


A.1. Duty Cycle of Test Signal

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	99.03	0.04	0.08
NVNT	b	2442	Ant1	98.88	0.05	0.08
NVNT	b	2472	Ant1	99.03	0.04	0.08
NVNT	g	2412	Ant1	98.26	0.08	0.49
NVNT	g	2442	Ant1	98.35	0.07	0.49
NVNT	g	2472	Ant1	98.26	0.08	0.49
NVNT	n20	2412	Ant1	98.13	0.08	0.53
NVNT	n20	2442	Ant1	98.13	0.08	0.53
NVNT	n20	2472	Ant1	98.13	0.08	0.53
NVNT	n40	2422	Ant1	94.89	0.23	1.08
NVNT	n40	2442	Ant1	94.69	0.24	1.08
NVNT	n40	2462	Ant1	94.89	0.23	1.08



Test Graphs

Duty Cycle NVNT b 2412MHz Ant1

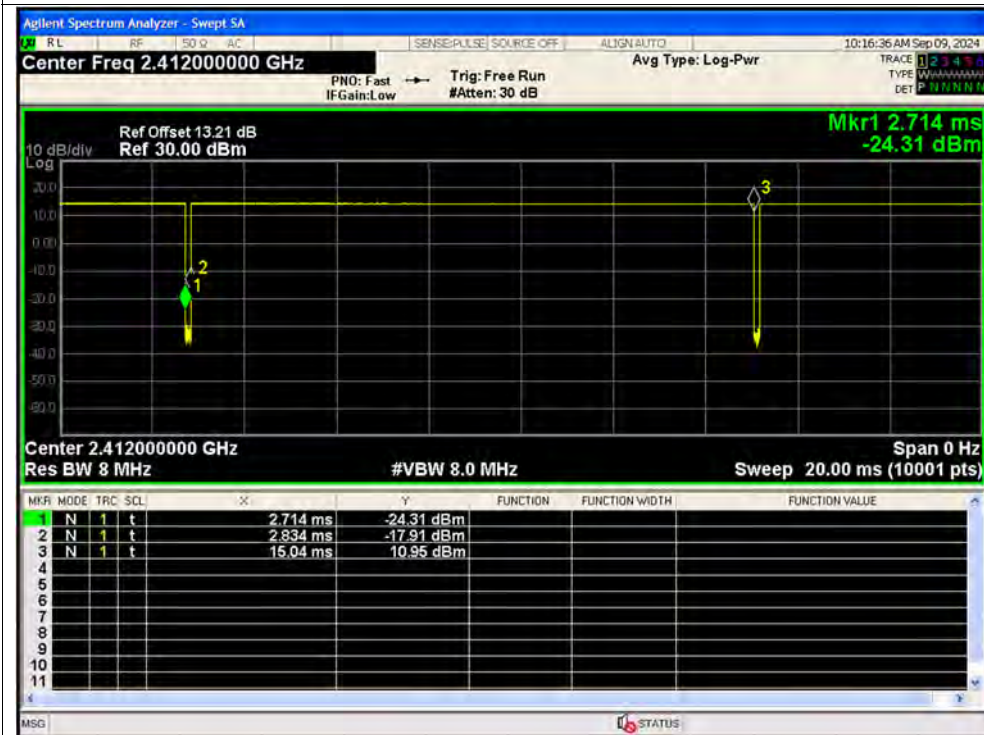


Duty Cycle NVNT b 2442MHz Ant1






Duty Cycle NVNT b 2472MHz Ant1

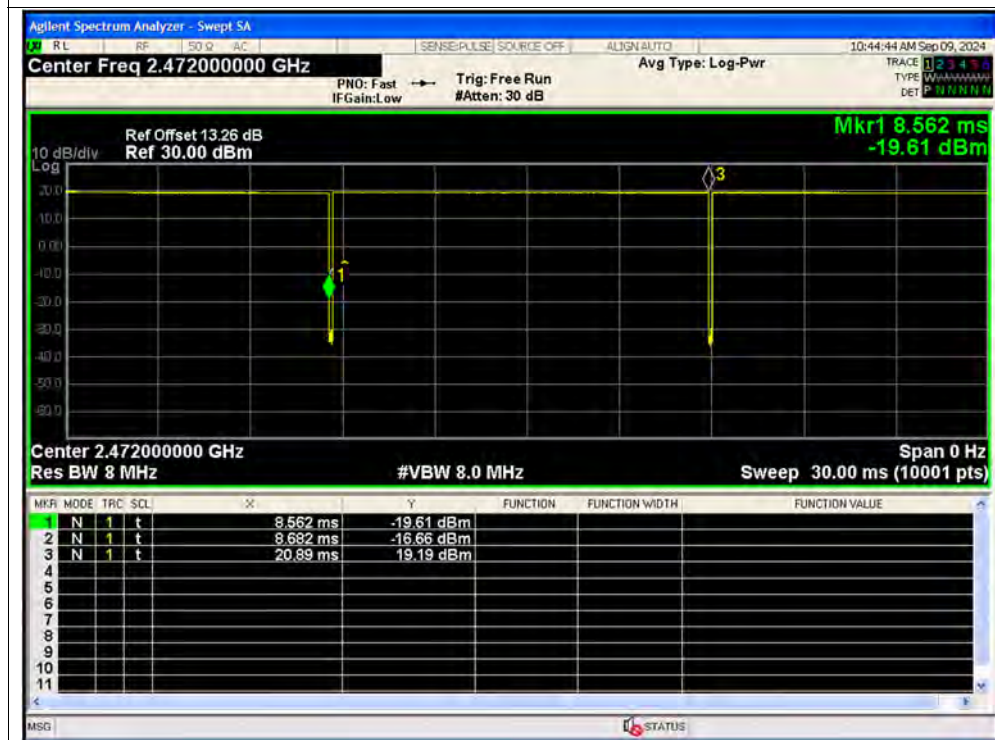


Duty Cycle NVNT g 2412MHz Ant1

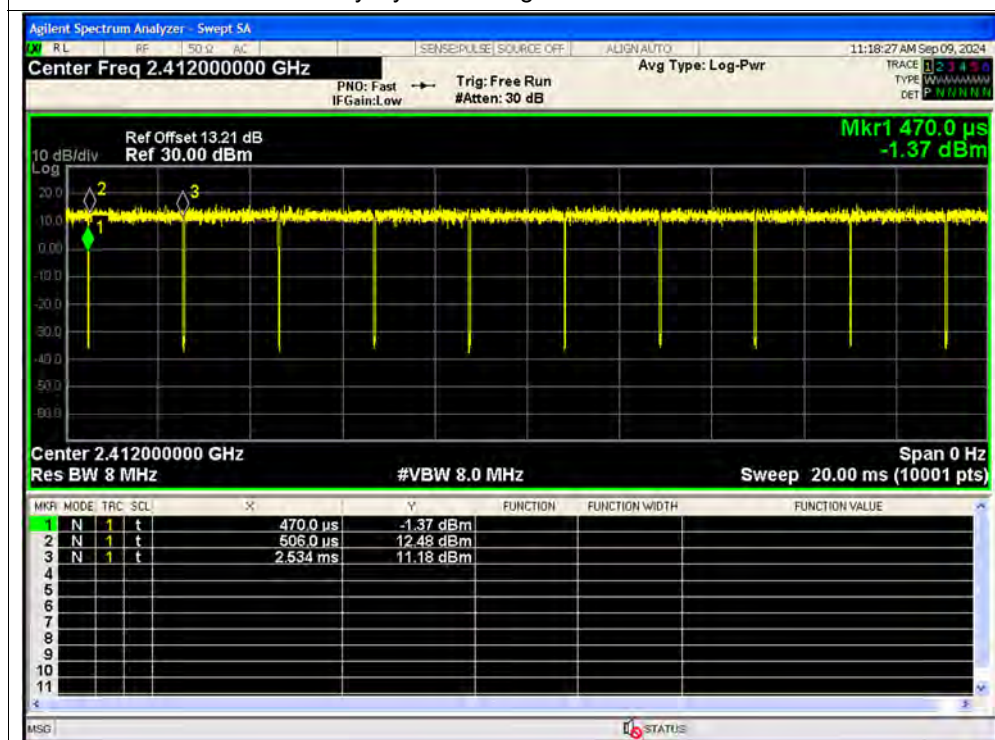





Duty Cycle NVNT g 2442MHz Ant1

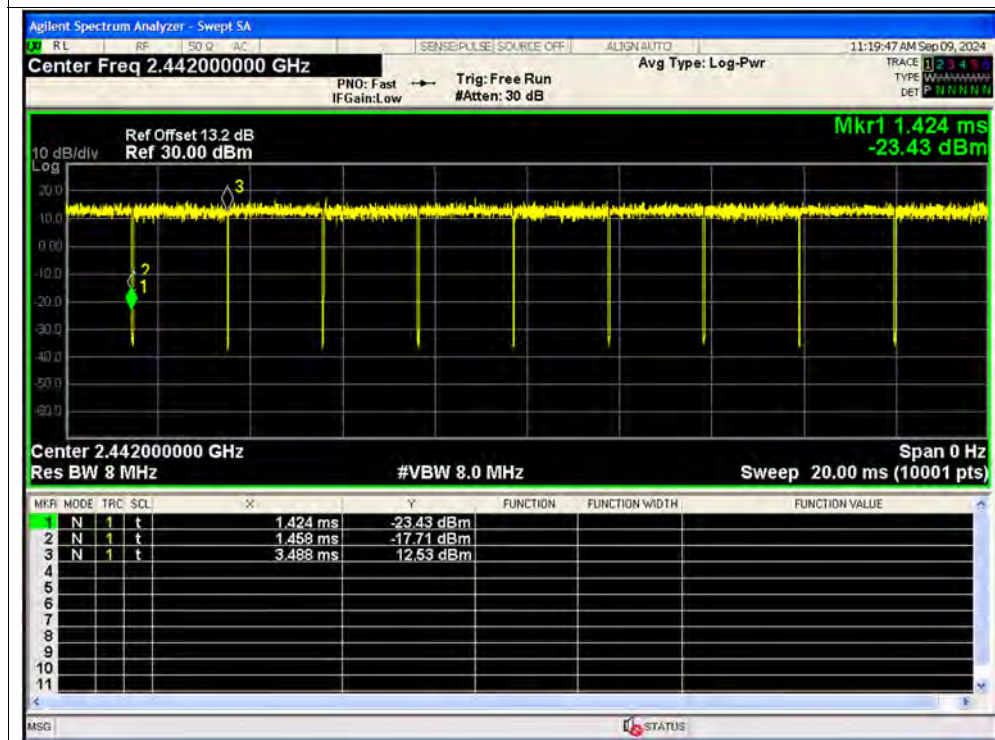


Duty Cycle NVNT g 2472MHz Ant1

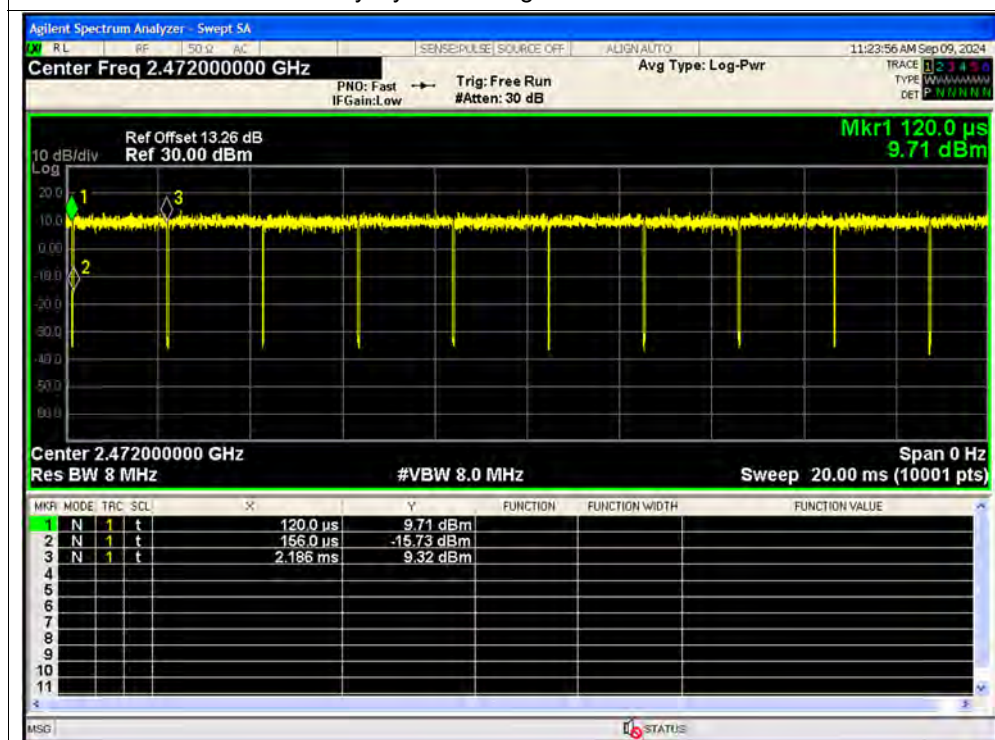

Duty Cycle NVNT n20 2412MHz Ant1

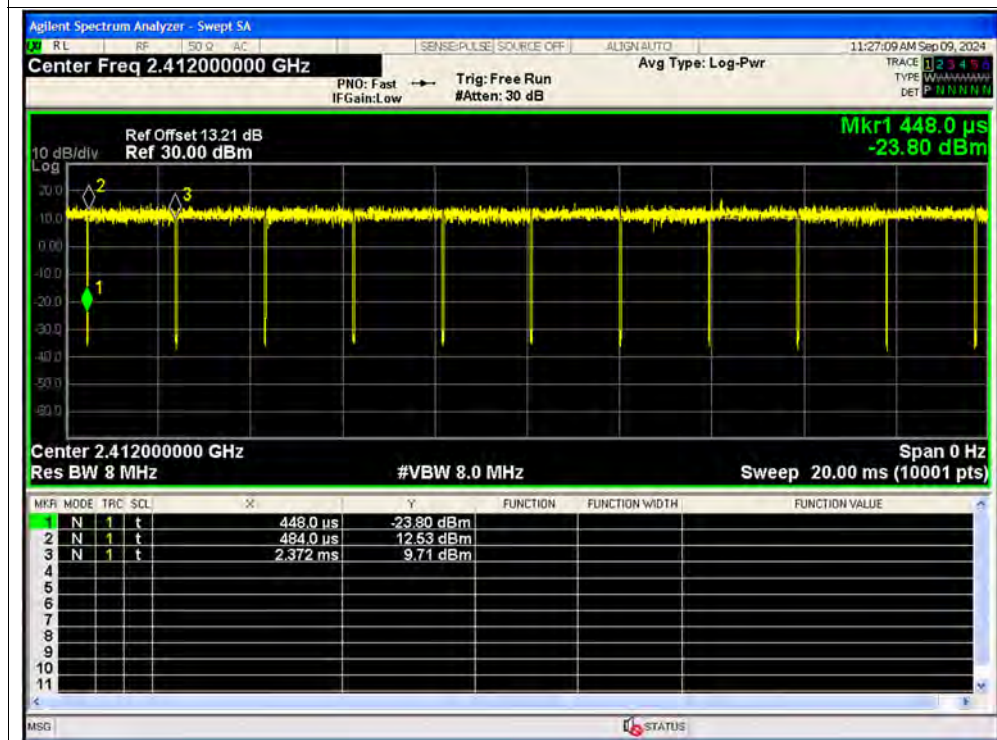


Duty Cycle NVNT n20 2442MHz Ant1

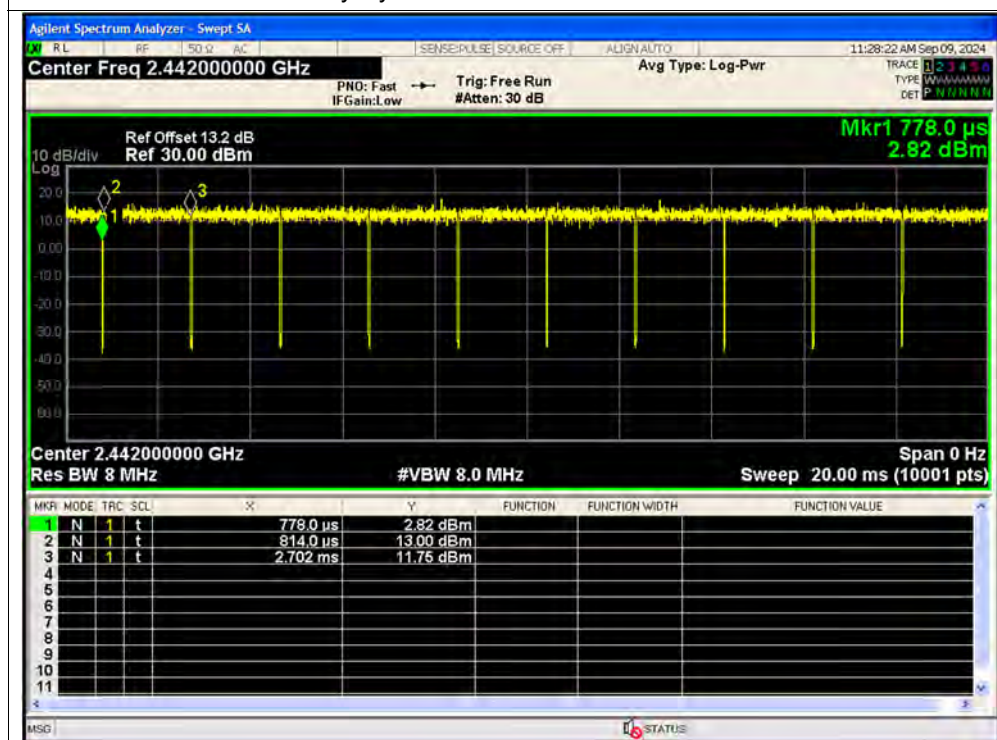





Duty Cycle NVNT n20 2472MHz Ant1

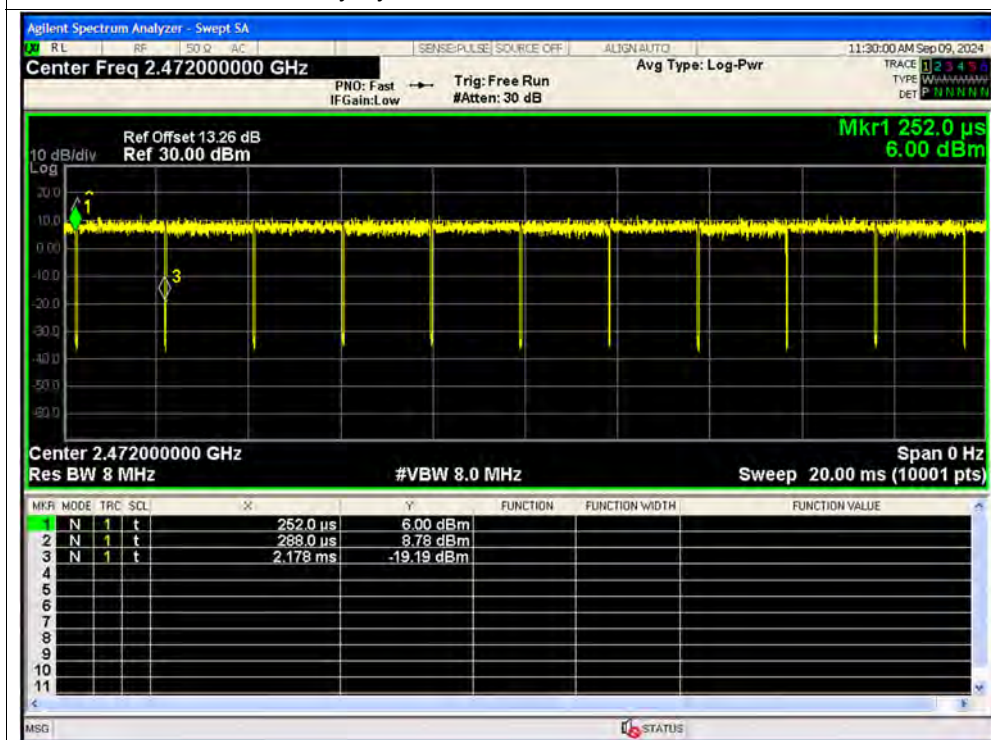


Duty Cycle NVNT n40 2422MHz Ant1

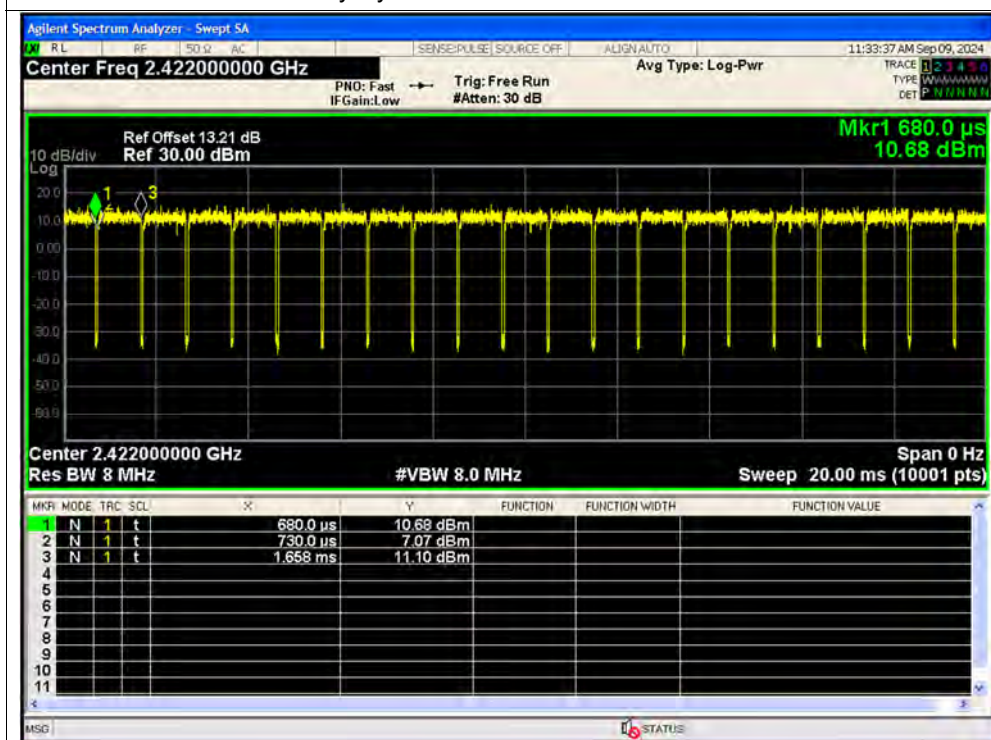

Duty Cycle NVNT n40 2442MHz Ant1

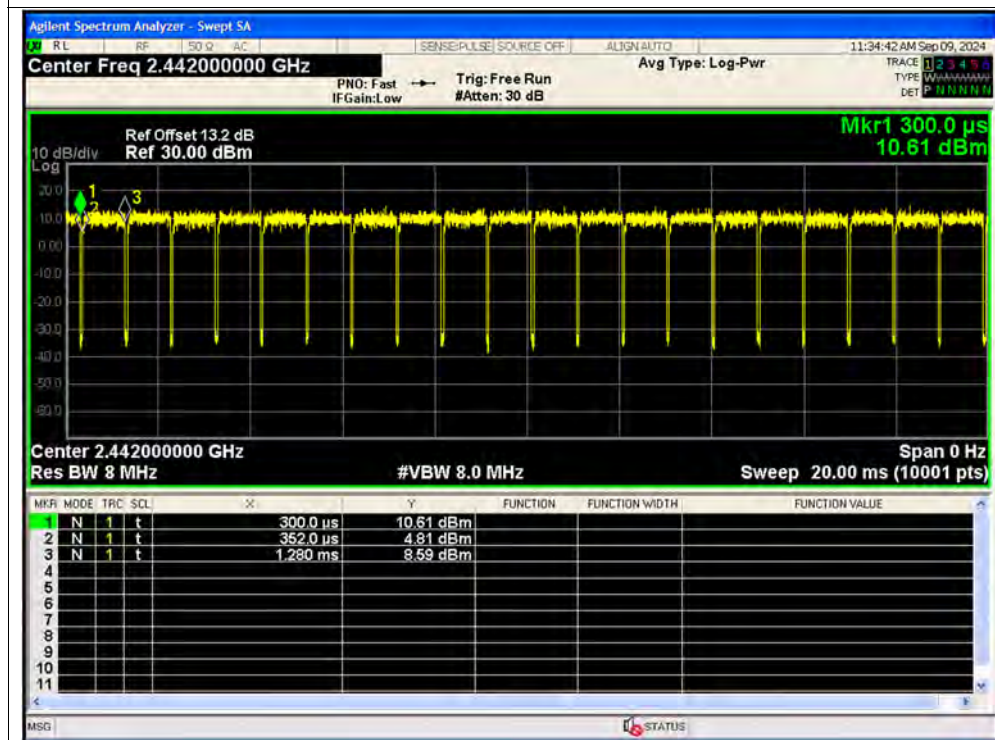

Duty Cycle NVNT n40 2462MHz Ant1

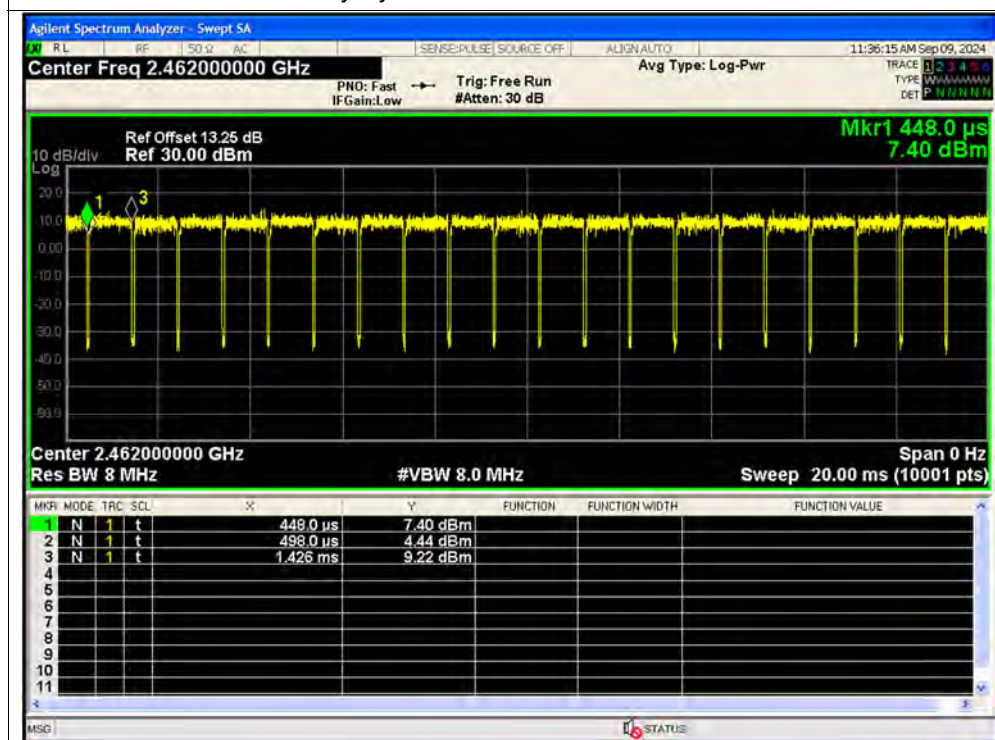


**A.2. Maximum Peak Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	b	2412	Ant1	15.53	0	15.53	0.03573	30	Pass
NVNT	b	2442	Ant1	15.55	0	15.55	0.03589	30	Pass
NVNT	b	2472	Ant1	17.11	0	17.11	0.0514	30	Pass
NVNT	g	2412	Ant1	17.39	0	17.39	0.05483	30	Pass
NVNT	g	2442	Ant1	18.05	0	18.05	0.06383	30	Pass
NVNT	g	2472	Ant1	14.66	0	14.66	0.02924	30	Pass
NVNT	n20	2412	Ant1	17.2	0	17.2	0.05248	30	Pass
NVNT	n20	2442	Ant1	17.91	0	17.91	0.0618	30	Pass
NVNT	n20	2472	Ant1	12.61	0	12.61	0.01824	30	Pass
NVNT	n40	2422	Ant1	19.67	0	19.67	0.09268	30	Pass
NVNT	n40	2442	Ant1	18.82	0	18.82	0.07621	30	Pass
NVNT	n40	2462	Ant1	18.44	0	18.44	0.06982	30	Pass

Test Graphs


Peak Power NVNT b 2412MHz Ant1

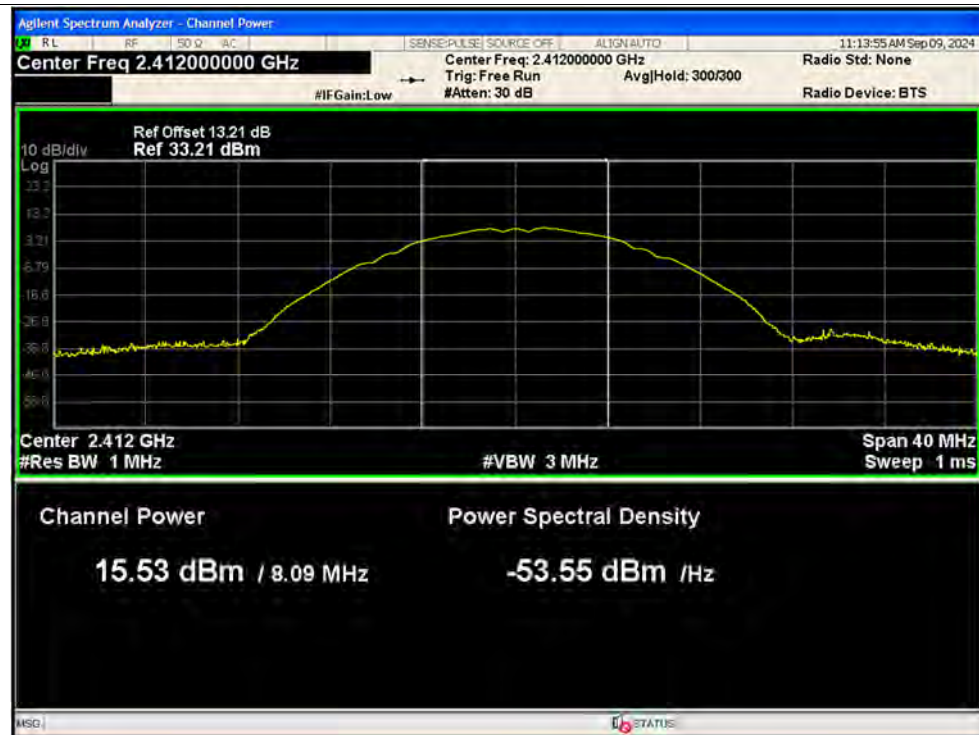


Peak Power NVNT b 2442MHz Ant1




Peak Power NVNT b 2472MHz Ant1

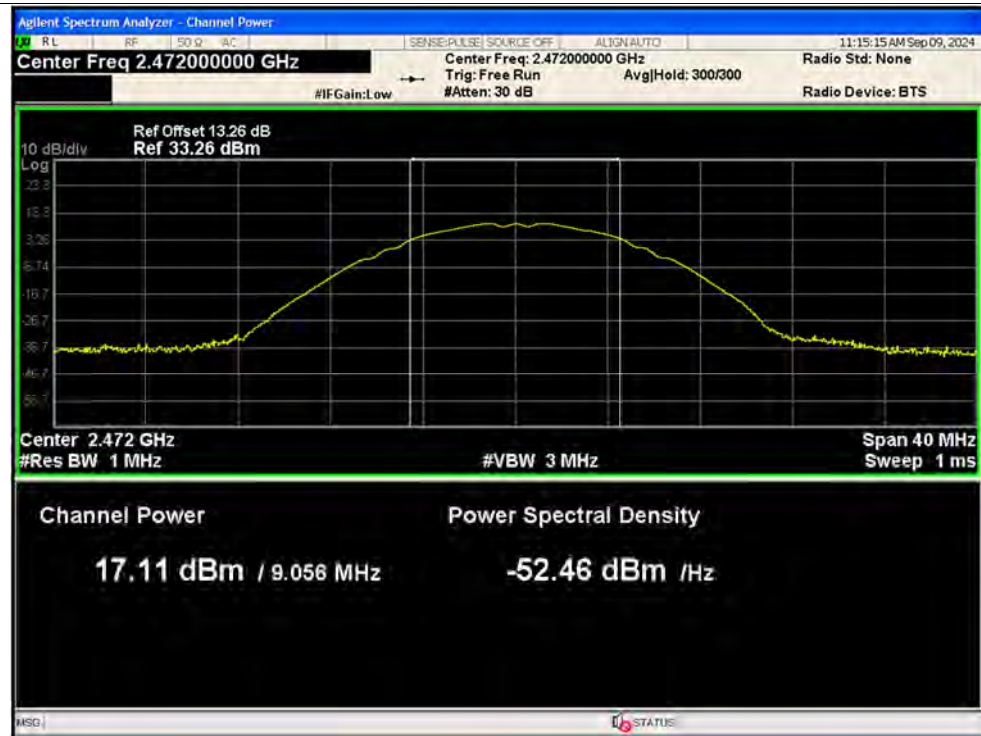

Peak Power NVNT g 2412MHz Ant1

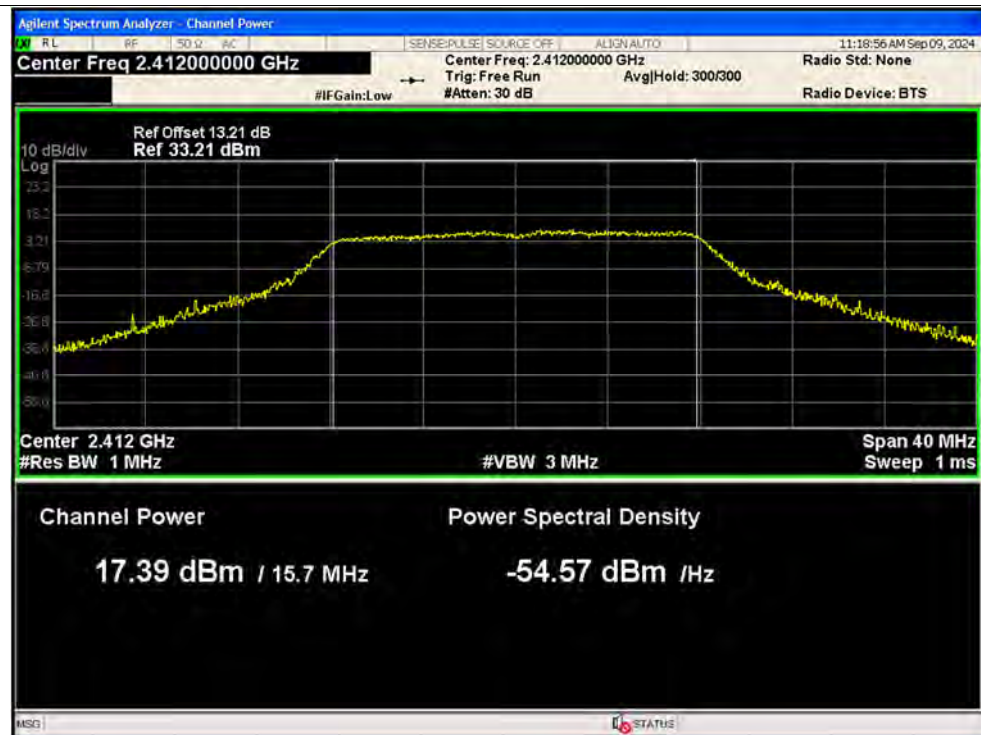


Peak Power NVNT g 2442MHz Ant1

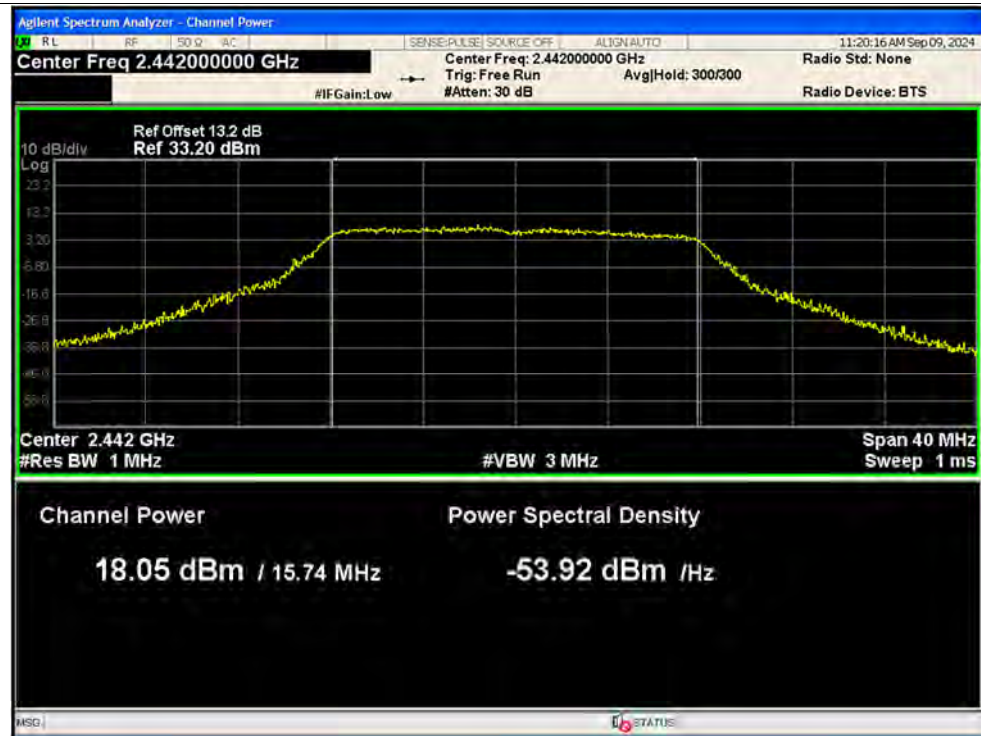

Peak Power NVNT g 2472MHz Ant1




Peak Power NVNT n20 2412MHz Ant1

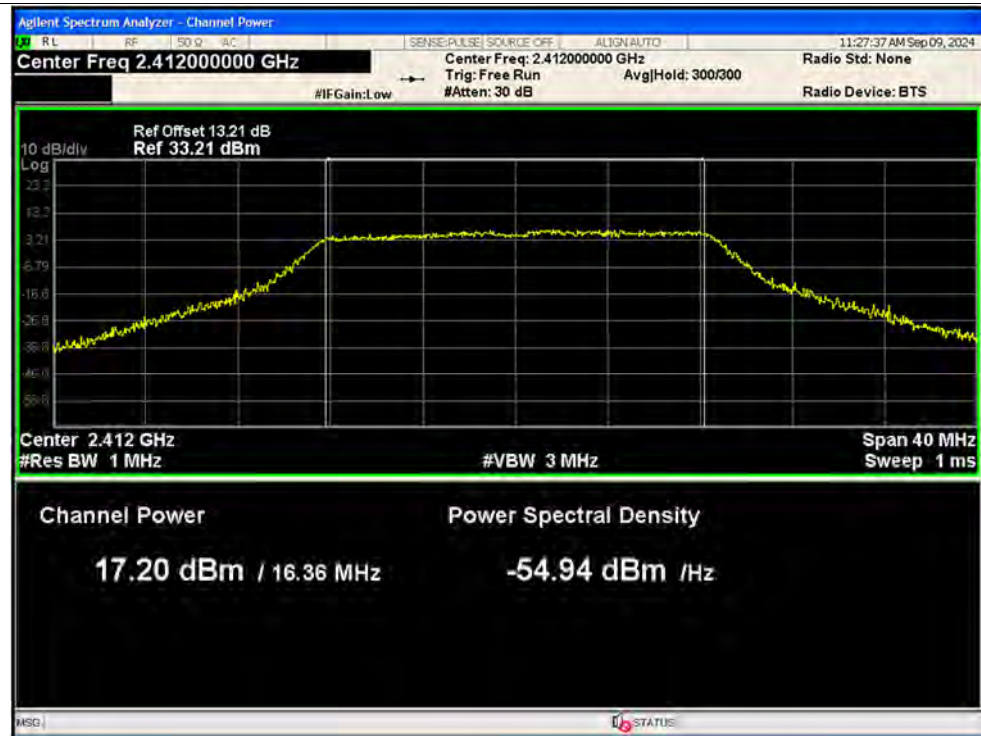


Peak Power NVNT n20 2442MHz Ant1




Peak Power NVNT n20 2472MHz Ant1

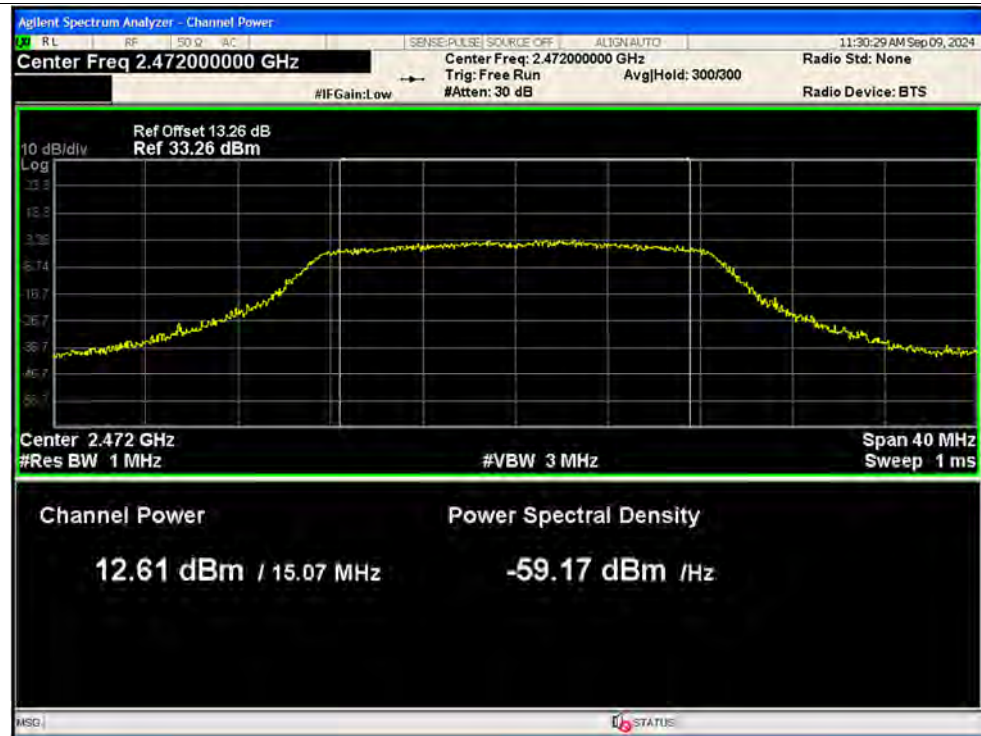


Peak Power NVNT n40 2422MHz Ant1

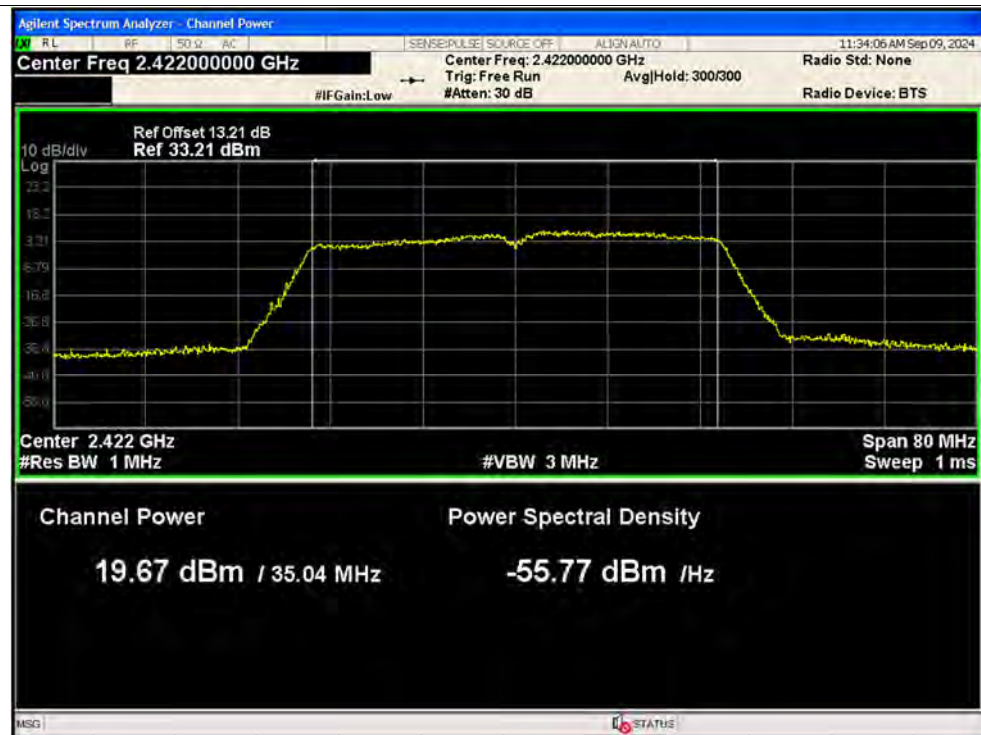

Peak Power NVNT n40 2442MHz Ant1

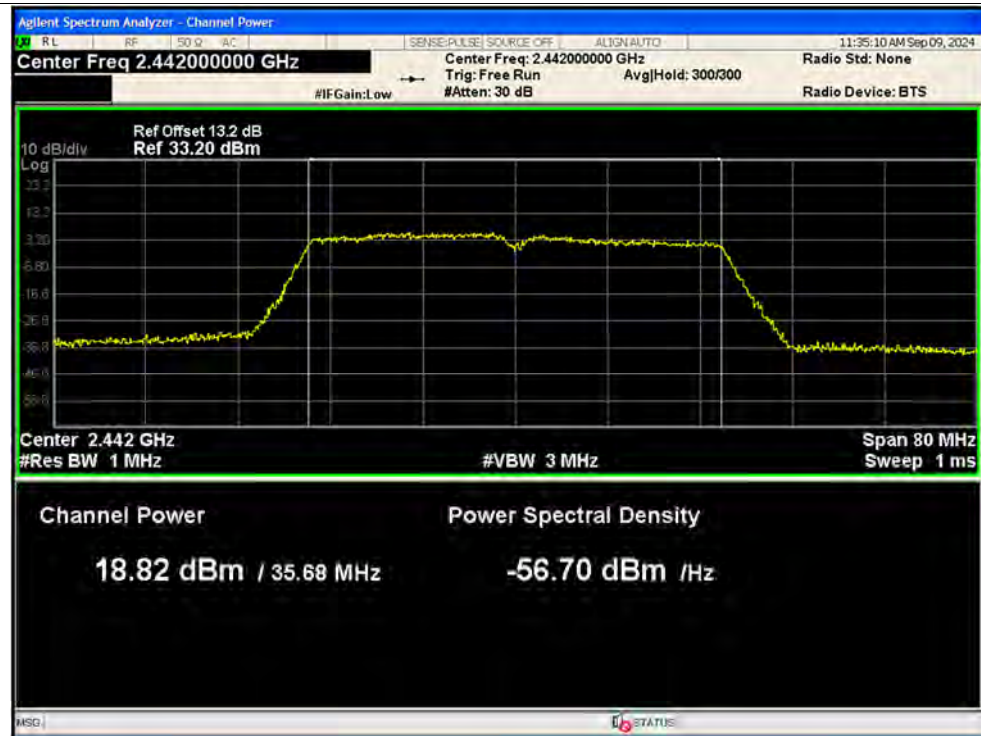

Peak Power NVNT n40 2462MHz Ant1

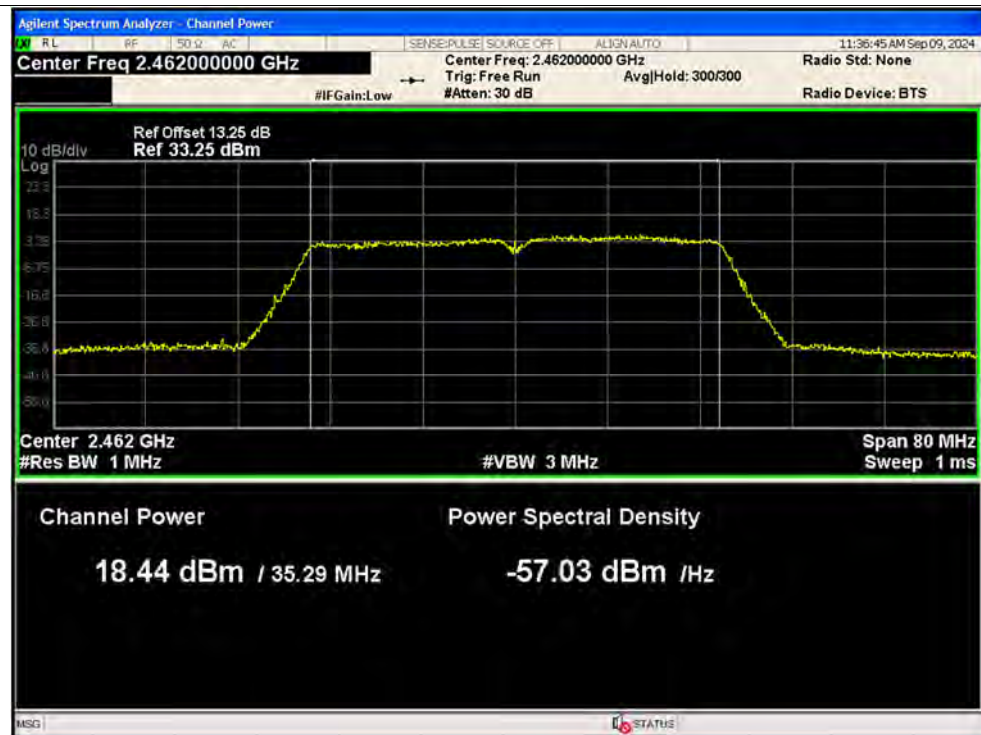


**A.3. Maximum Average Conducted Output Power**


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	b	2412	Ant1	12.2	0.04	12.24	0.01675	30	Pass
NVNT	b	2442	Ant1	13.1	0.05	13.15	0.02065	30	Pass
NVNT	b	2472	Ant1	14.49	0.04	14.53	0.02838	30	Pass
NVNT	g	2412	Ant1	9.71	0.08	9.79	0.00953	30	Pass
NVNT	g	2442	Ant1	10.44	0.07	10.51	0.01125	30	Pass
NVNT	g	2472	Ant1	6.98	0.08	7.06	0.00508	30	Pass
NVNT	n20	2412	Ant1	9.58	0.08	9.66	0.00925	30	Pass
NVNT	n20	2442	Ant1	10.3	0.08	10.38	0.01091	30	Pass
NVNT	n20	2472	Ant1	5.08	0.08	5.16	0.00328	30	Pass
NVNT	n40	2422	Ant1	11.68	0.23	11.91	0.01552	30	Pass
NVNT	n40	2442	Ant1	10.83	0.24	11.07	0.01279	30	Pass
NVNT	n40	2462	Ant1	10.44	0.23	10.67	0.01167	30	Pass

Test Graphs


Average Power NVNT b 2412MHz Ant1

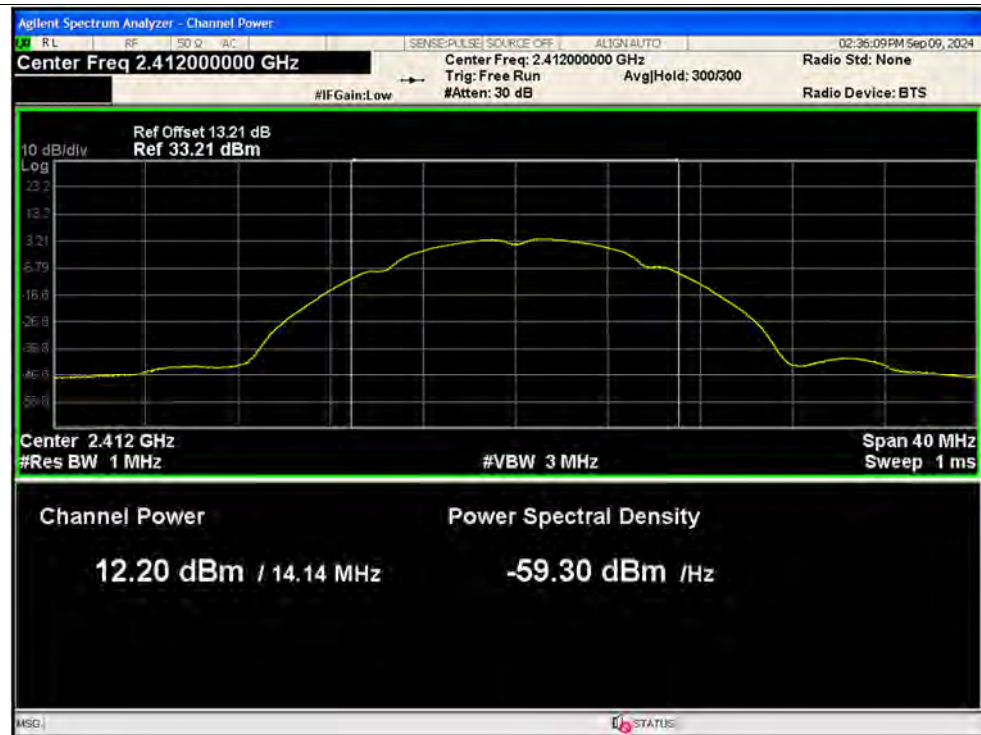


Average Power NVNT b 2442MHz Ant1

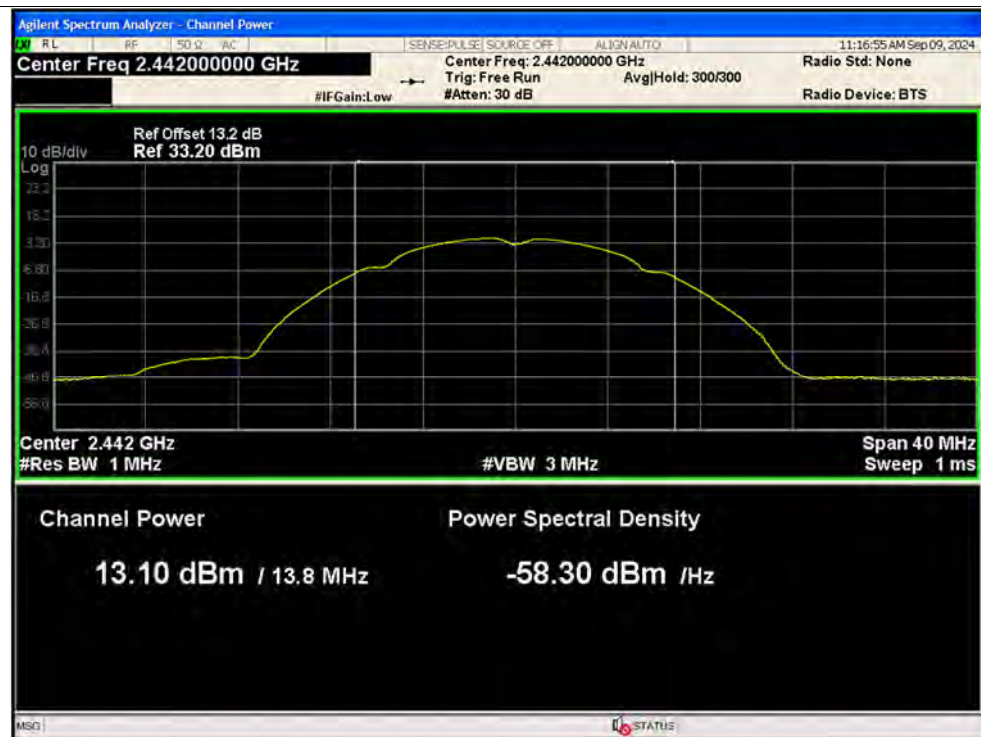


Average Power NVNT b 2472MHz Ant1

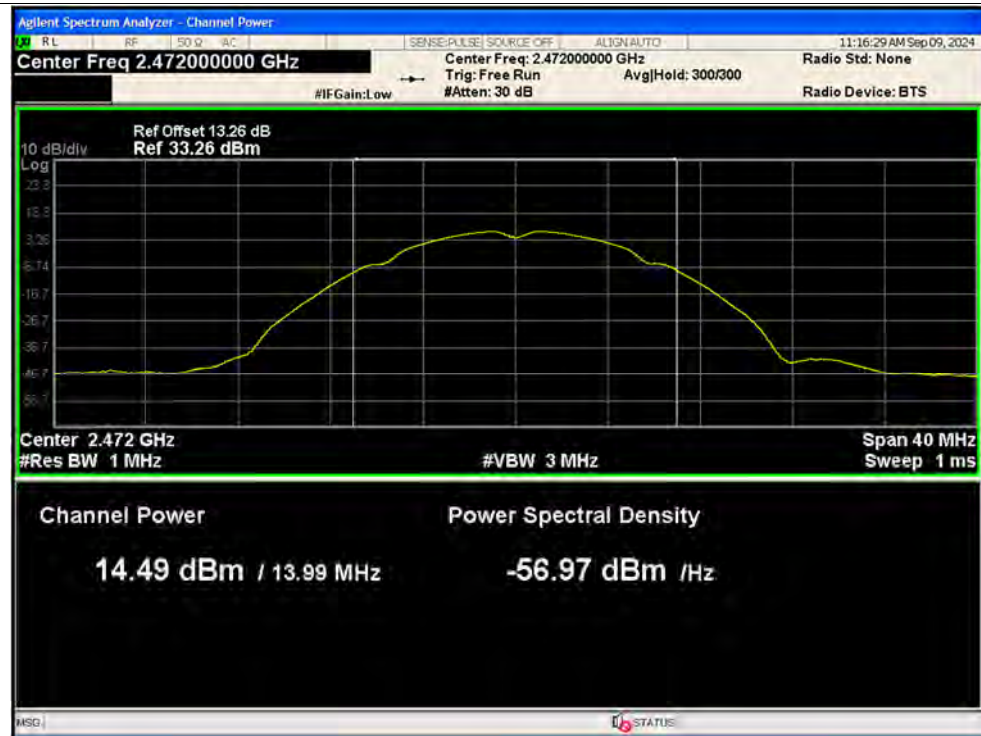


Average Power NVNT g 2412MHz Ant1

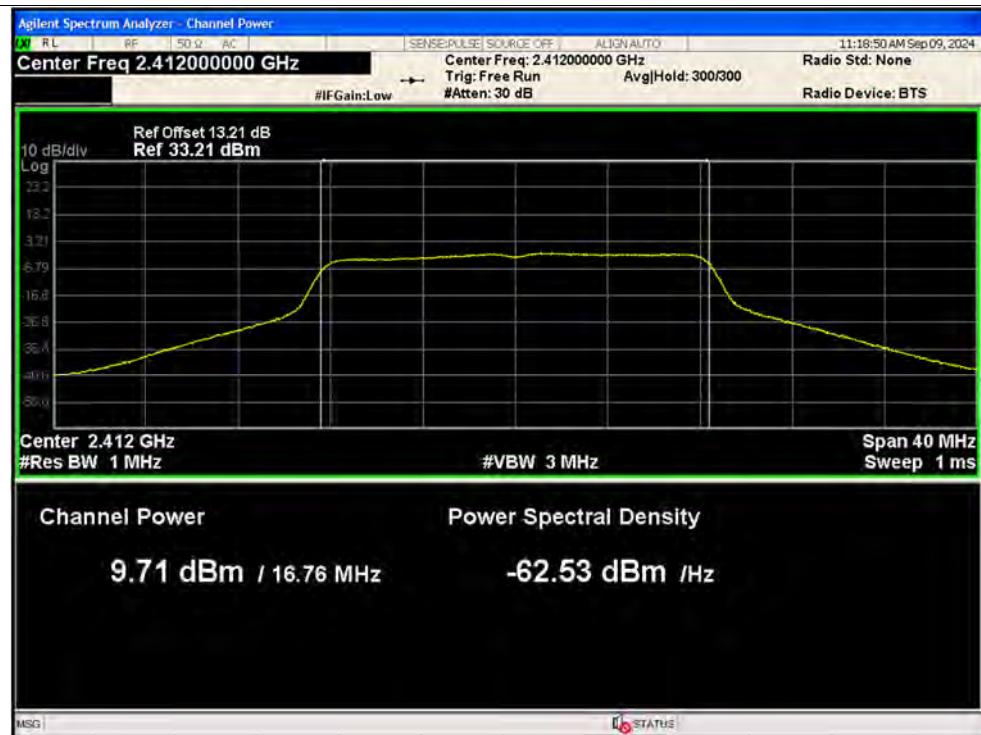

Average Power NVNT g 2442MHz Ant1

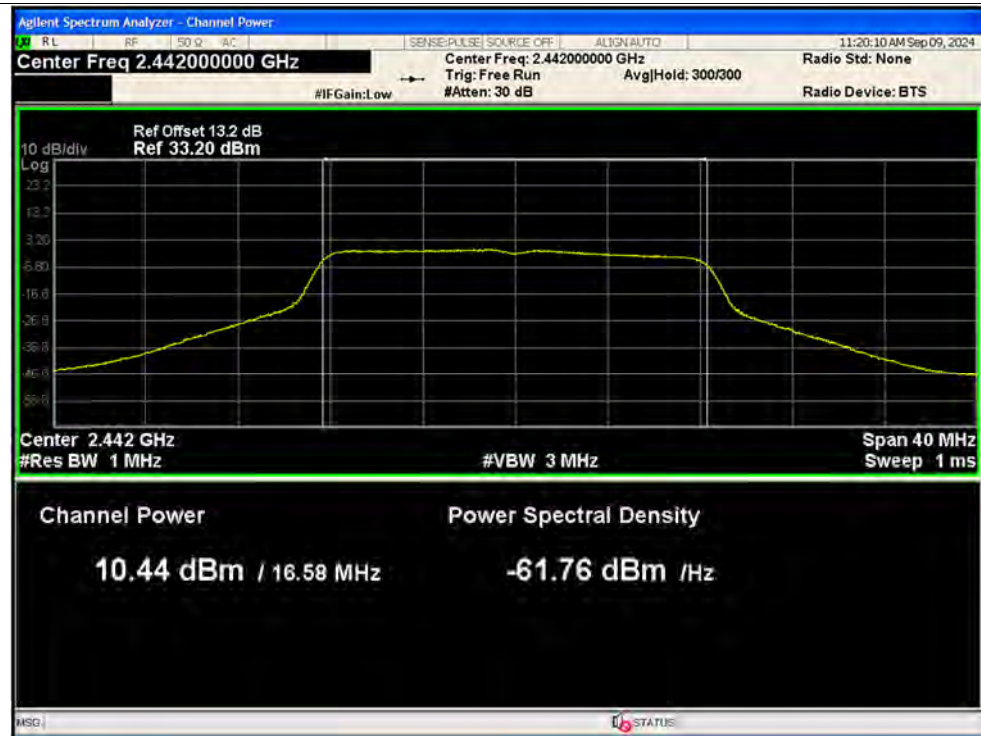


Average Power NVNT g 2472MHz Ant1

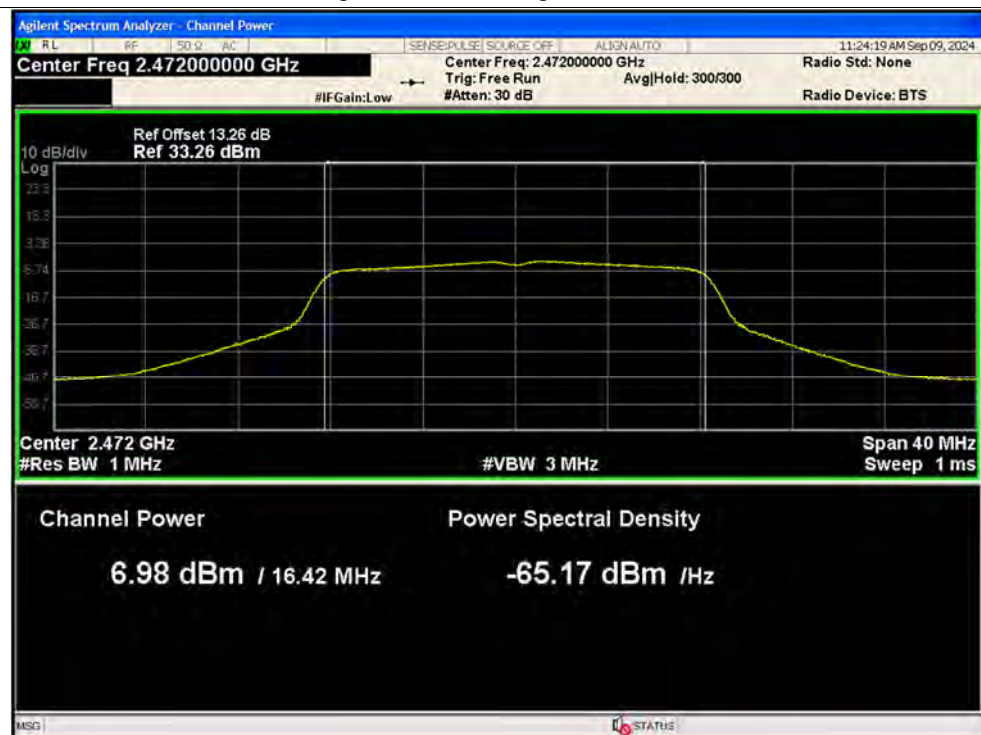





Average Power NVNT n20 2412MHz Ant1

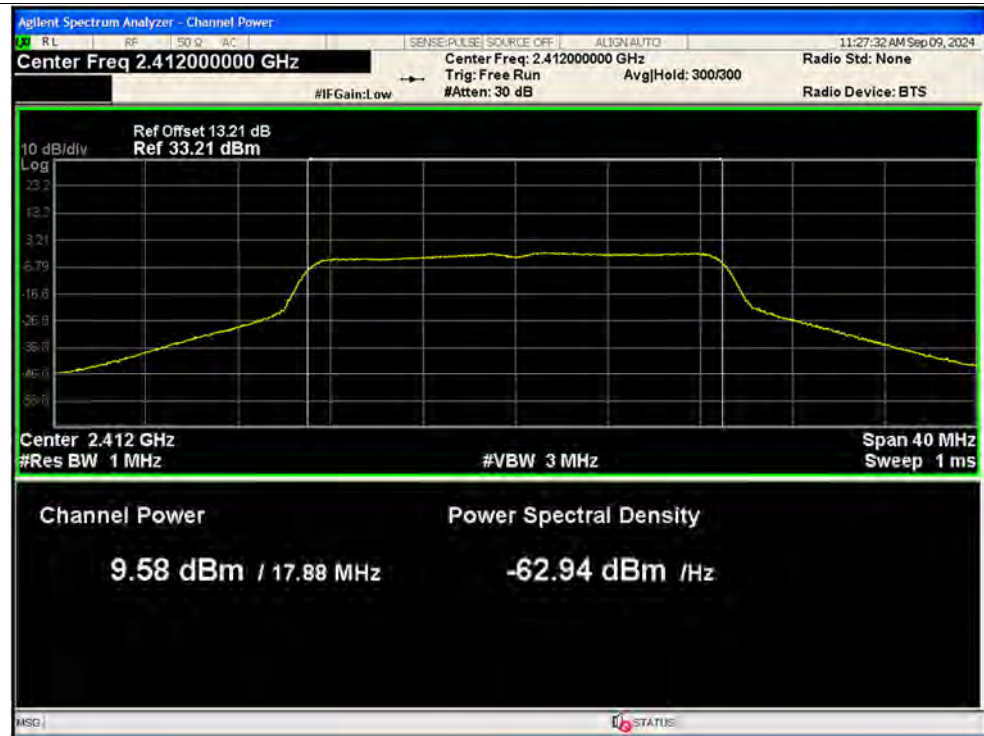


Average Power NVNT n20 2442MHz Ant1

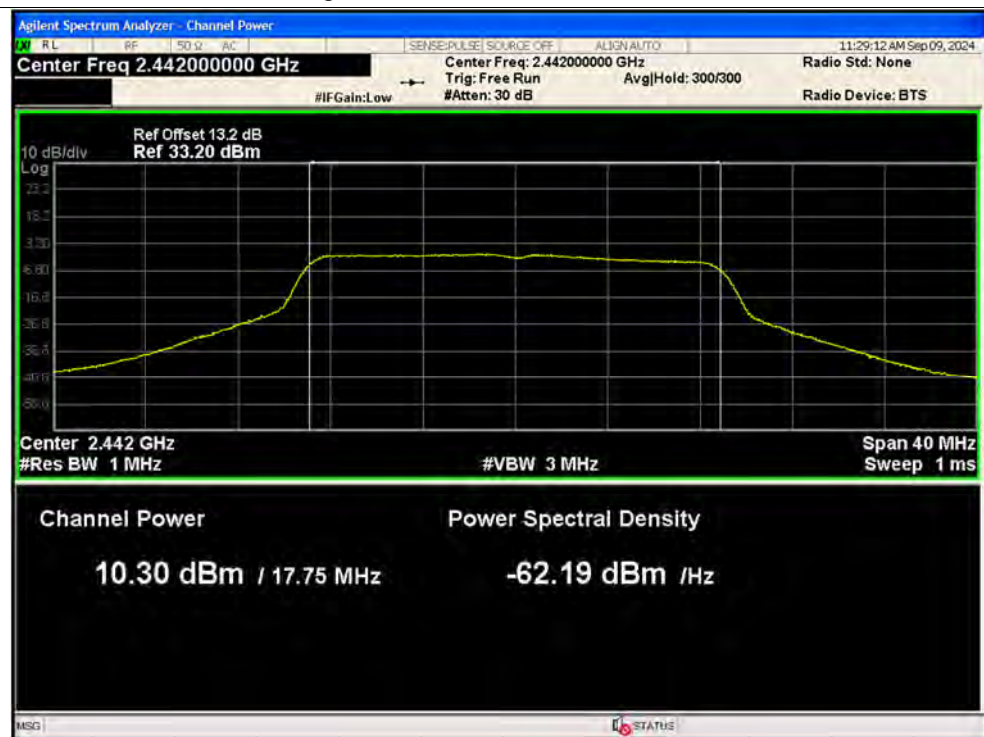


Average Power NVNT n20 2472MHz Ant1

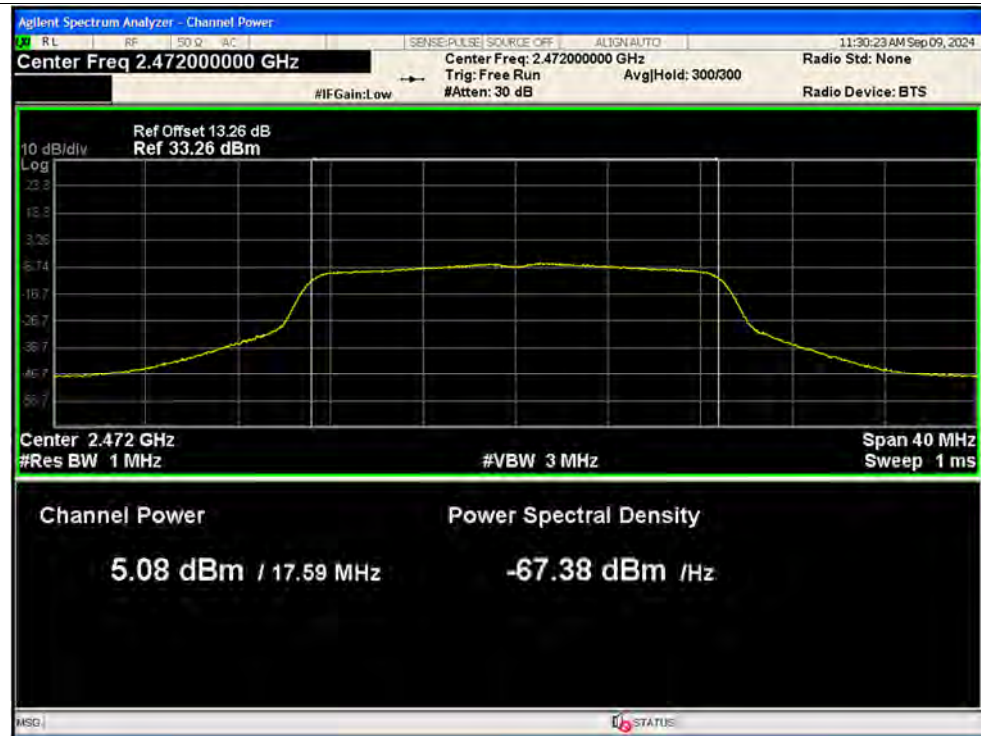


Average Power NVNT n40 2422MHz Ant1

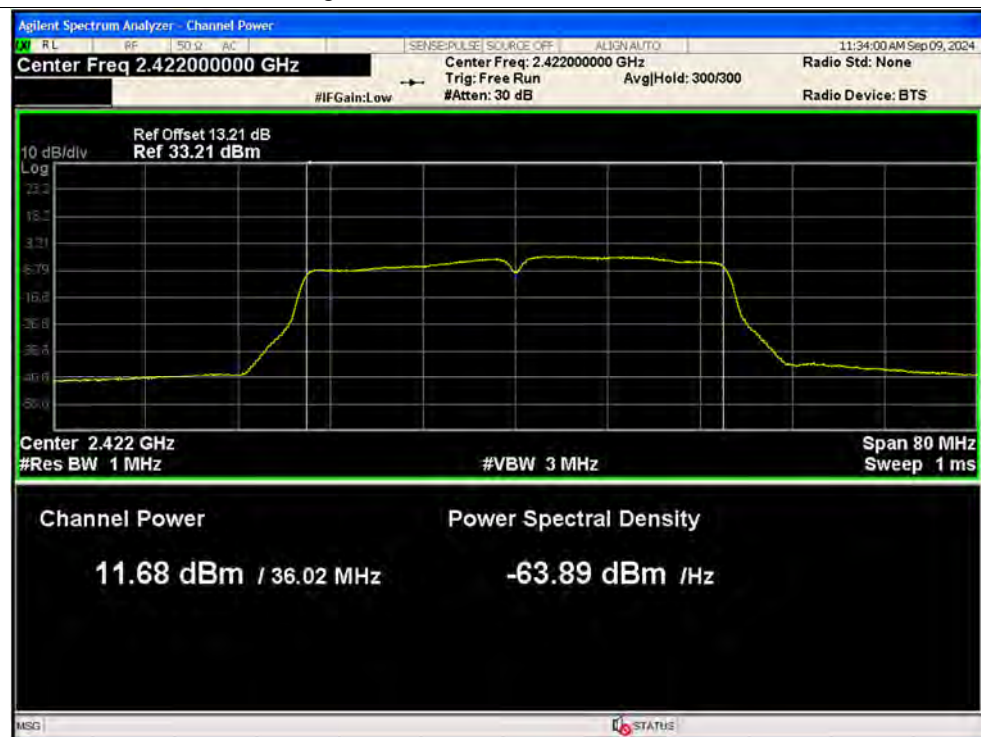

Average Power NVNT n40 2442MHz Ant1

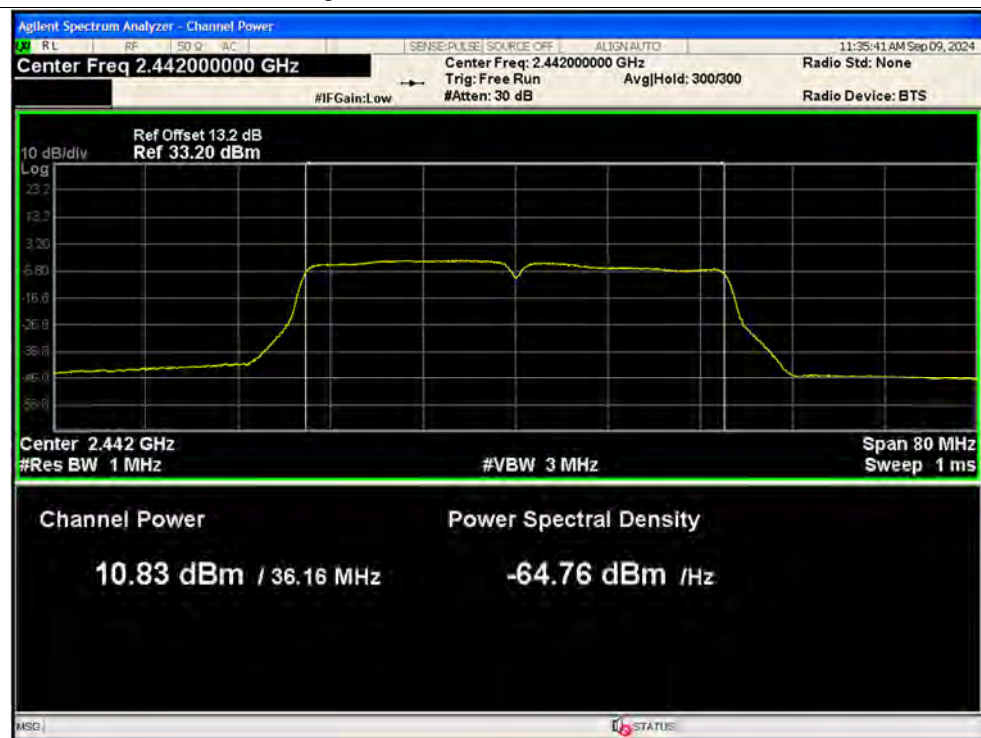

Average Power NVNT n40 2462MHz Ant1

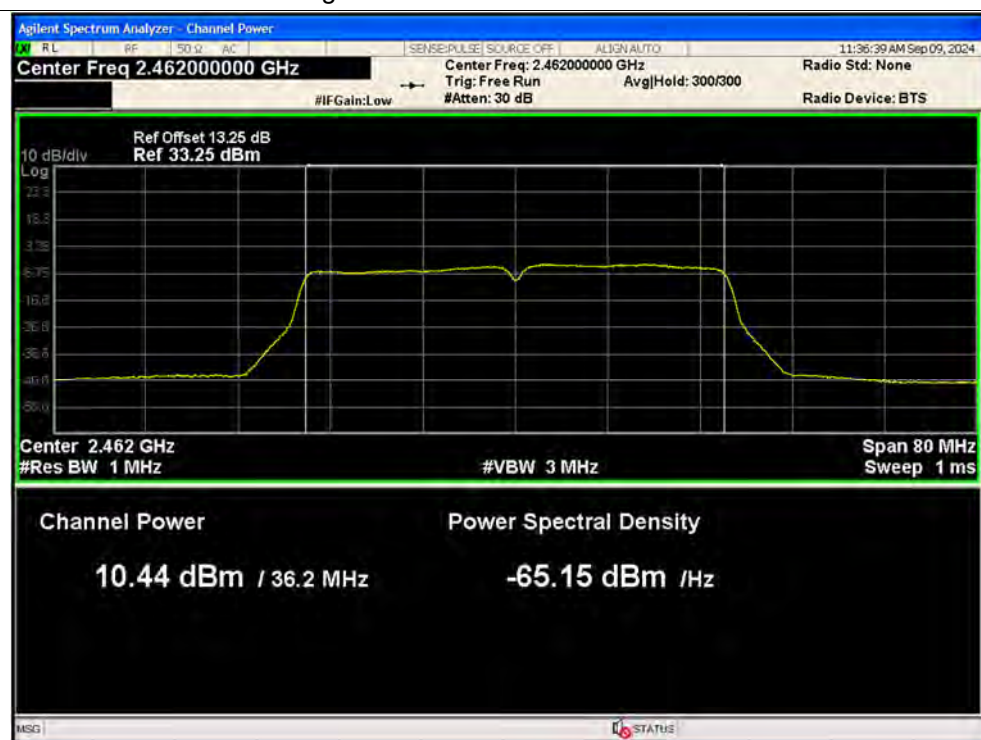

**A.4. 6 dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	8.09	0.5	Pass
NVNT	b	2442	Ant1	8.556	0.5	Pass
NVNT	b	2472	Ant1	9.056	0.5	Pass
NVNT	g	2412	Ant1	15.701	0.5	Pass
NVNT	g	2442	Ant1	15.737	0.5	Pass
NVNT	g	2472	Ant1	15.288	0.5	Pass
NVNT	n20	2412	Ant1	16.357	0.5	Pass
NVNT	n20	2442	Ant1	16.334	0.5	Pass
NVNT	n20	2472	Ant1	15.072	0.5	Pass
NVNT	n40	2422	Ant1	35.042	0.5	Pass
NVNT	n40	2442	Ant1	35.677	0.5	Pass
NVNT	n40	2462	Ant1	35.291	0.5	Pass

Test Graphs

-6dB Bandwidth NVNT b 2412MHz Ant1




-6dB Bandwidth NVNT b 2442MHz Ant1




-6dB Bandwidth NVNT b 2472MHz Ant1




-6dB Bandwidth NVNT g 2412MHz Ant1

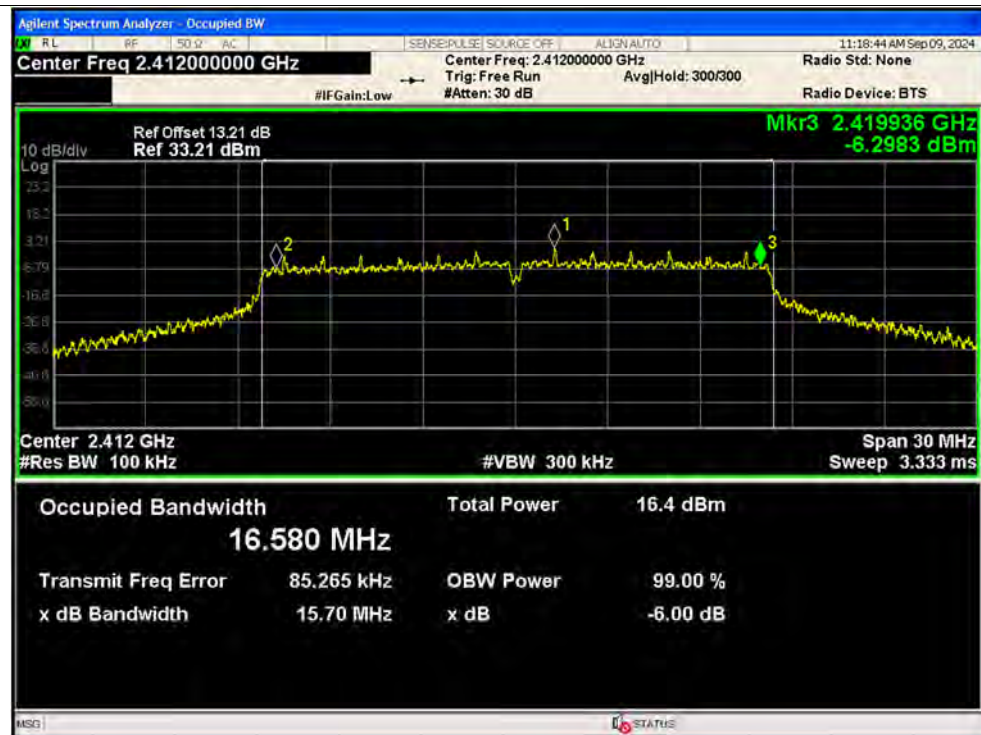


-6dB Bandwidth NVNT g 2442MHz Ant1

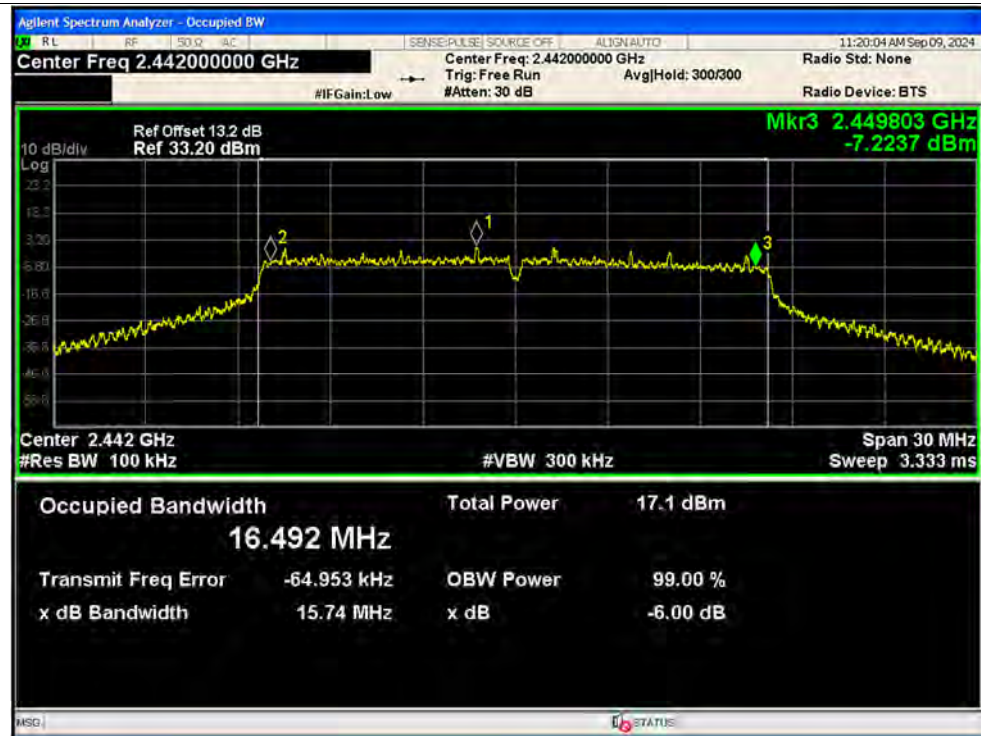


-6dB Bandwidth NVNT g 2472MHz Ant1

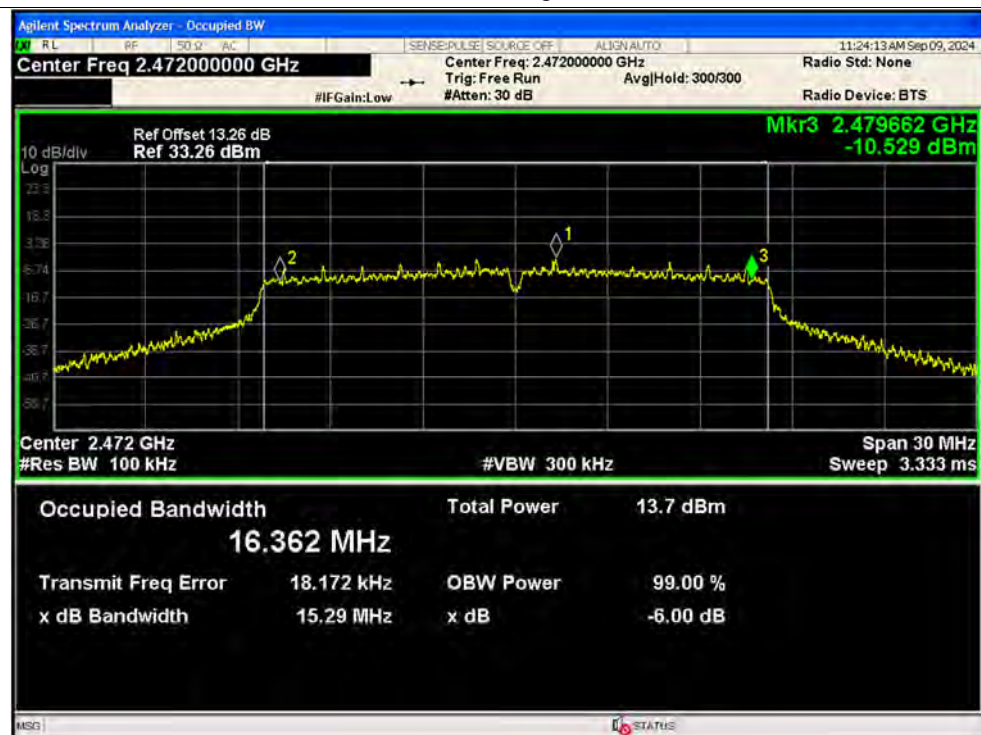

-6dB Bandwidth NVNT n20 2412MHz Ant1

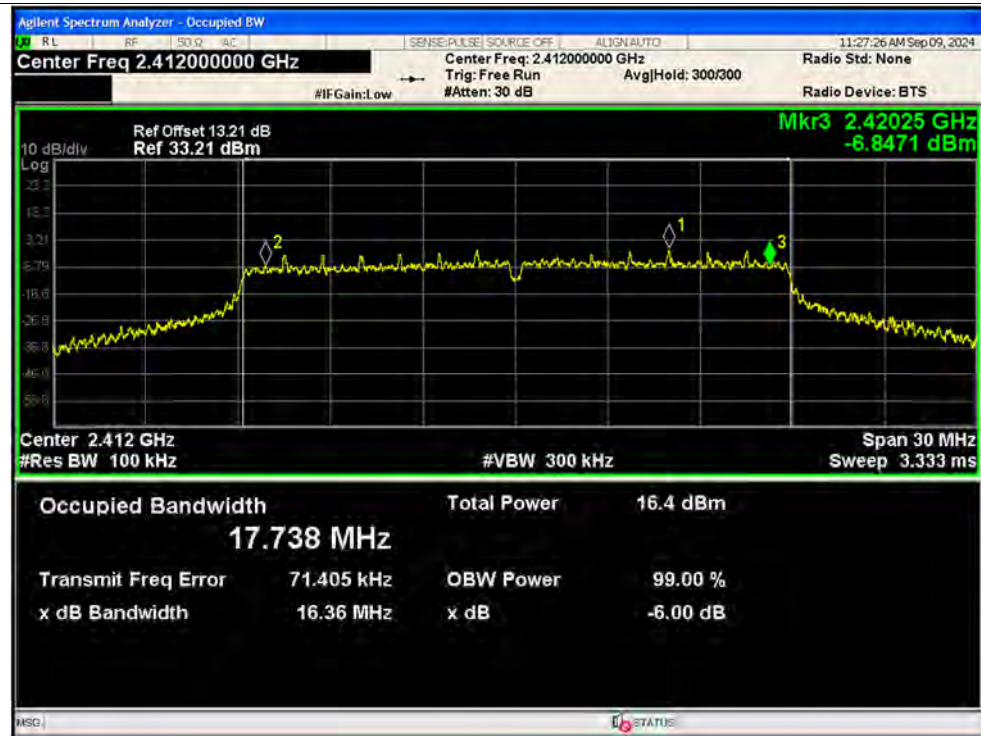


-6dB Bandwidth NVNT n20 2442MHz Ant1

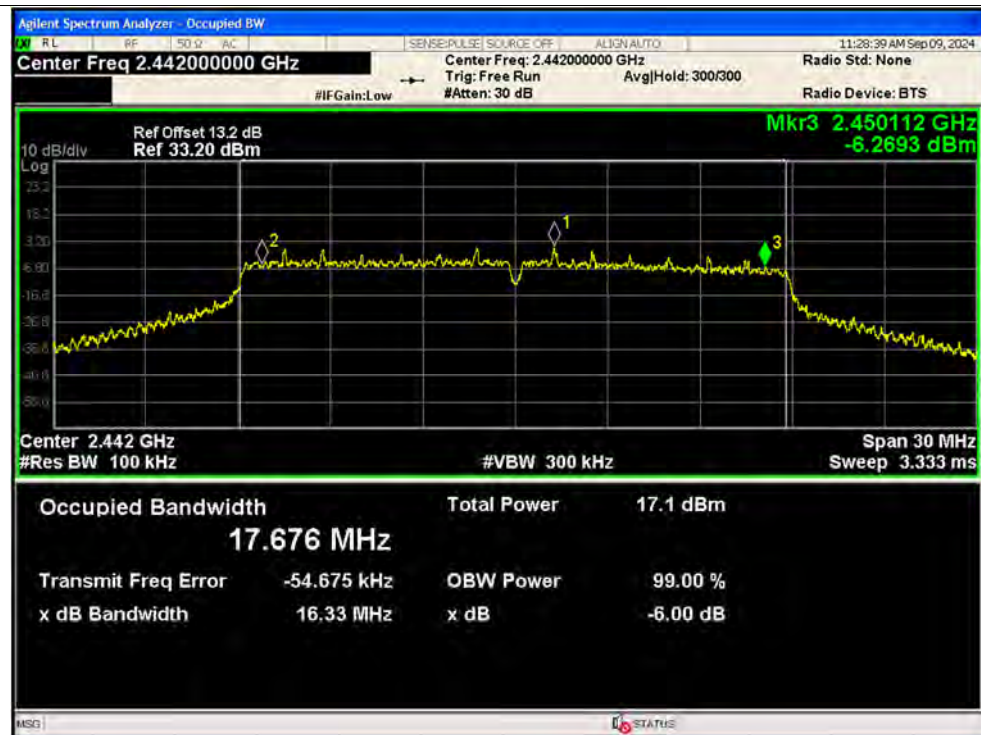




-6dB Bandwidth NVNT n20 2472MHz Ant1

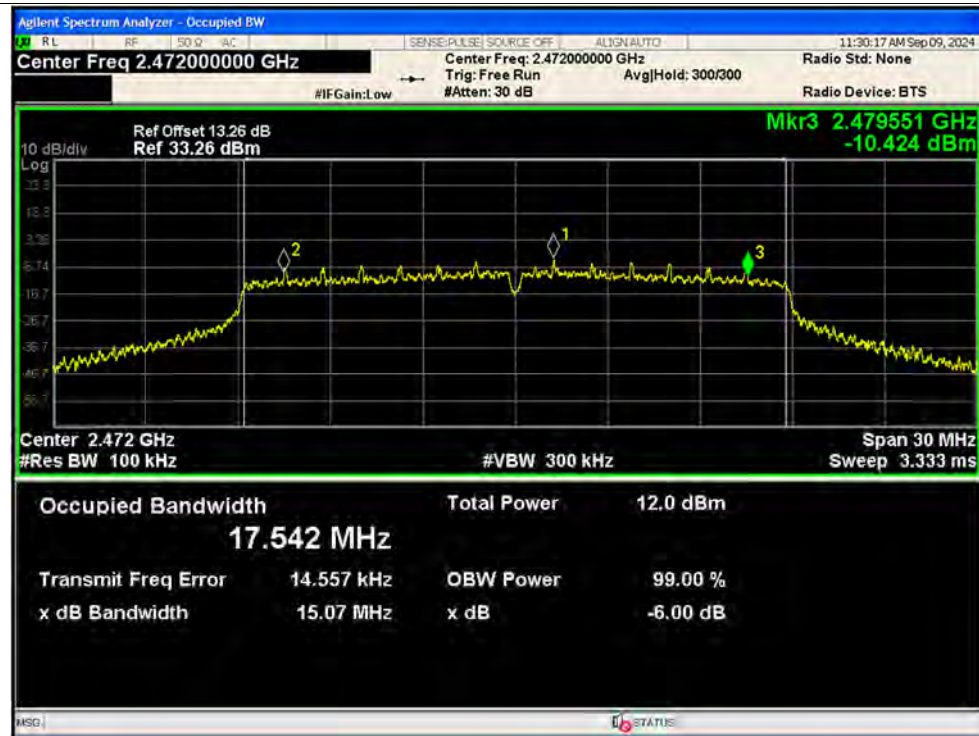


-6dB Bandwidth NVNT n40 2422MHz Ant1

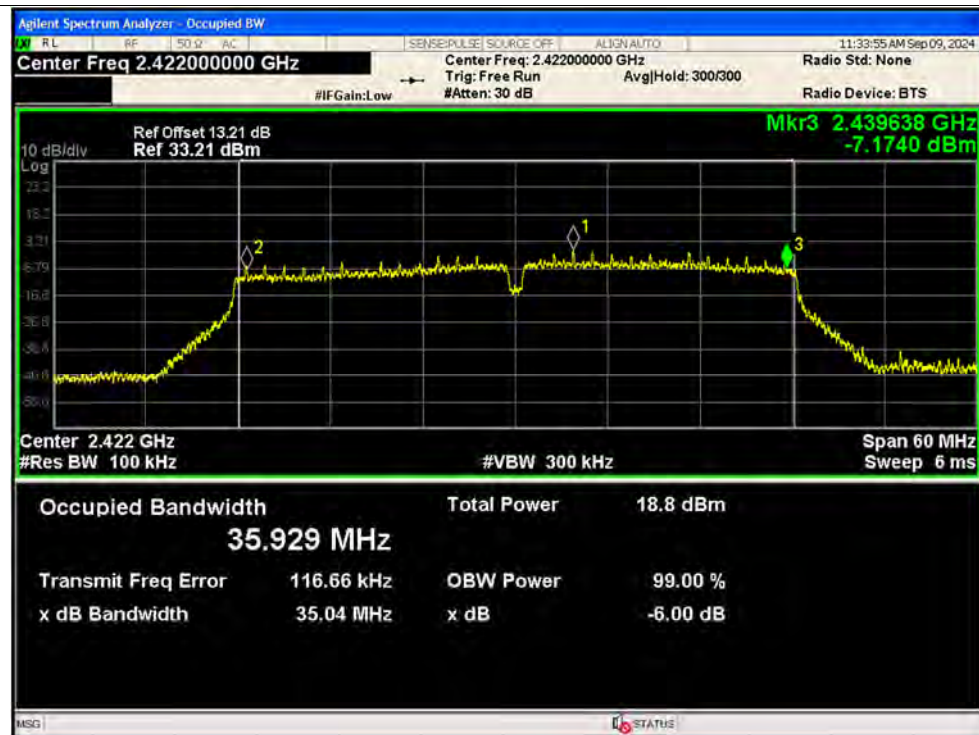




-6dB Bandwidth NVNT n40 2442MHz Ant1

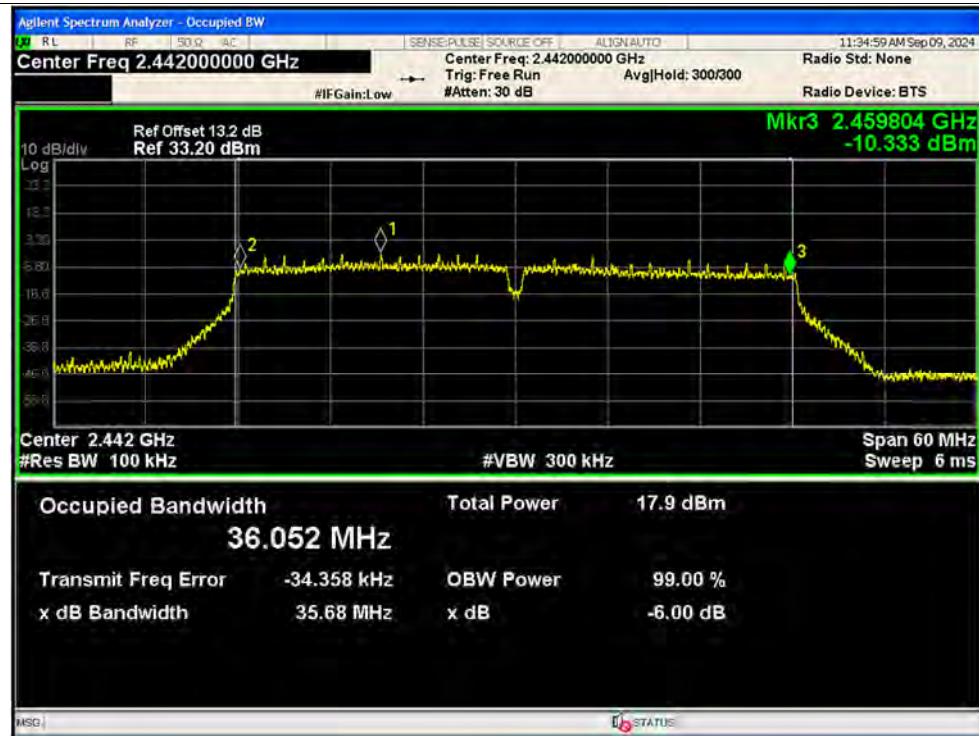

-6dB Bandwidth NVNT n40 2462MHz Ant1

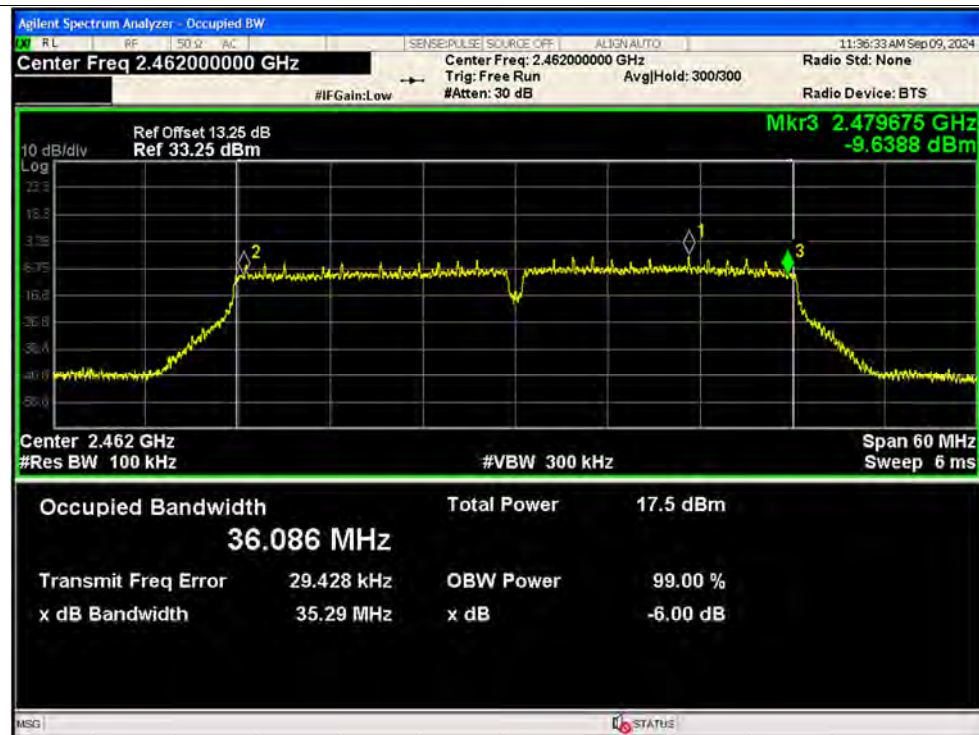

**A.5. Conducted Spurious Emissions**


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-30.12	-20	Pass
NVNT	b	2442	Ant1	-31.16	-20	Pass
NVNT	b	2472	Ant1	-32.56	-20	Pass
NVNT	g	2412	Ant1	-29.32	-20	Pass
NVNT	g	2442	Ant1	-29.51	-20	Pass
NVNT	g	2472	Ant1	-25.44	-20	Pass
NVNT	n20	2412	Ant1	-29.6	-20	Pass
NVNT	n20	2442	Ant1	-30.81	-20	Pass
NVNT	n20	2472	Ant1	-23.75	-20	Pass
NVNT	n40	2422	Ant1	-28.5	-20	Pass
NVNT	n40	2442	Ant1	-26.12	-20	Pass
NVNT	n40	2462	Ant1	-27.43	-20	Pass

Test Graphs

Tx. Spurious NVNT b 2412MHz Ant1 Ref




Tx. Spurious NVNT b 2412MHz Ant1 Emission

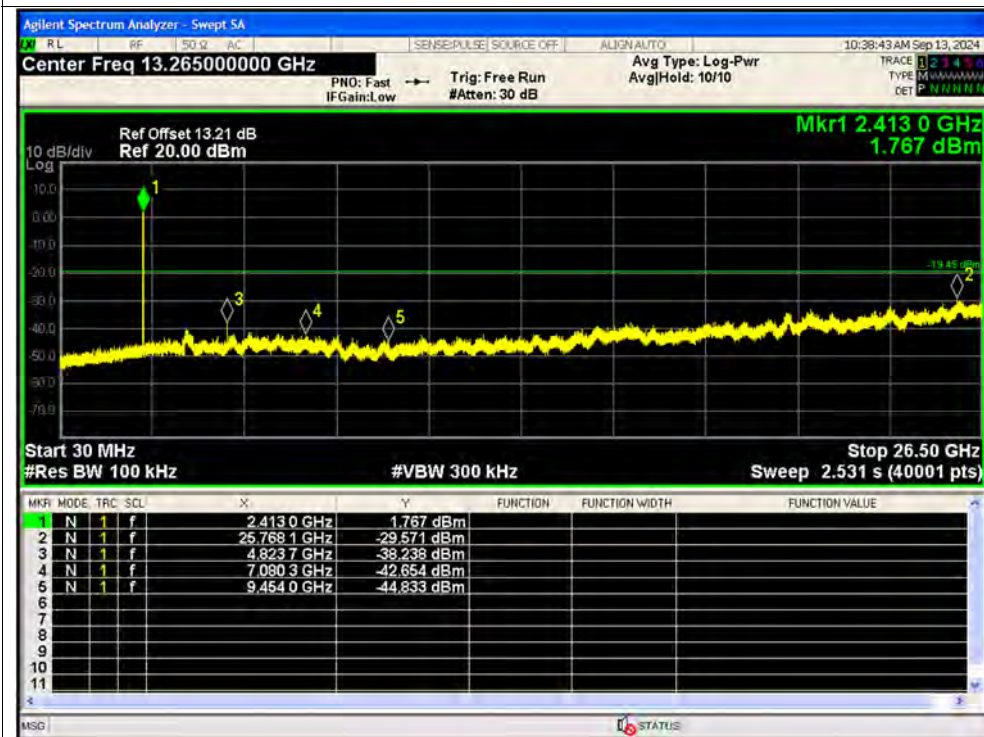

Tx. Spurious NVNT b 2442MHz Ant1 Ref




Tx. Spurious NVNT b 2442MHz Ant1 Emission

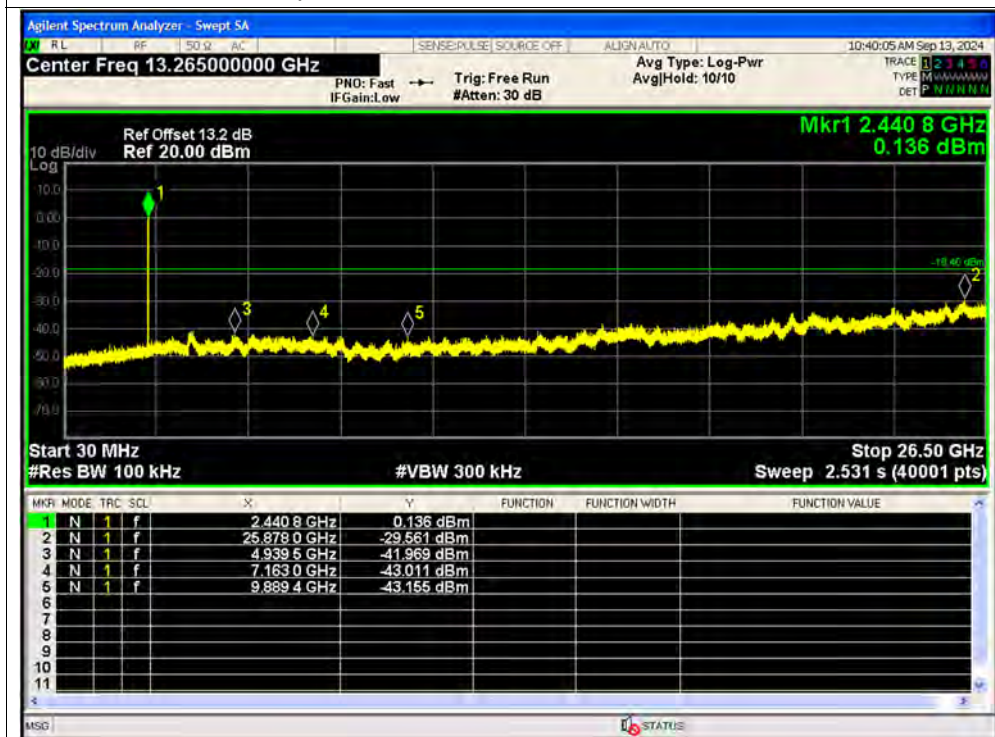


Tx. Spurious NVNT b 2472MHz Ant1 Ref




Tx. Spurious NVNT b 2472MHz Ant1 Emission

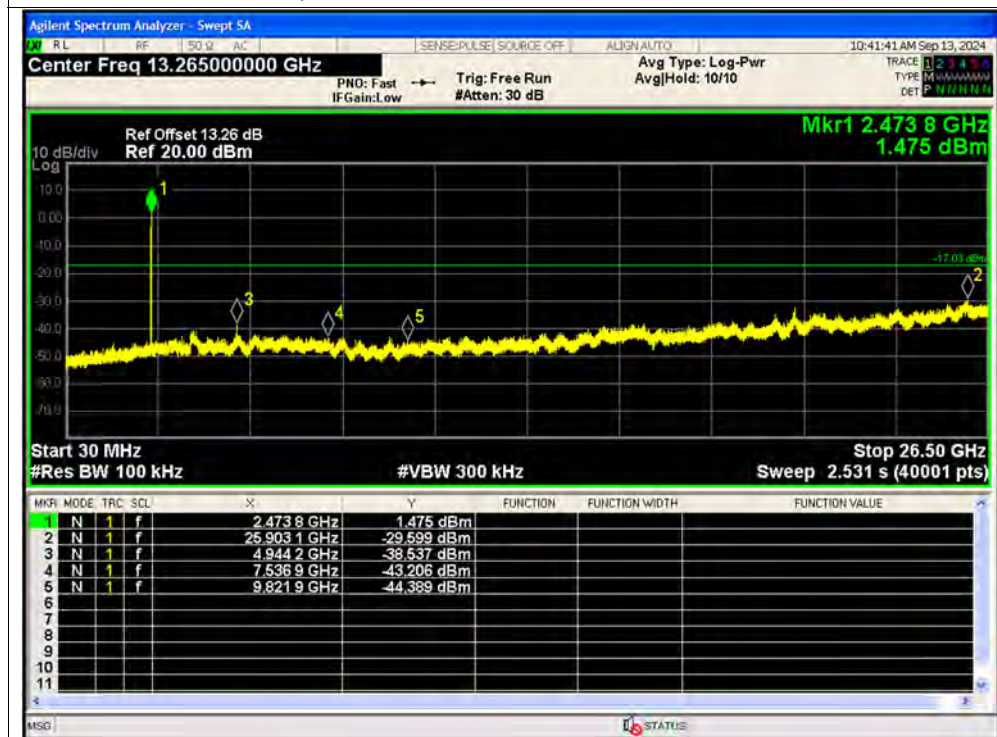

Tx. Spurious NVNT g 2412MHz Ant1 Ref

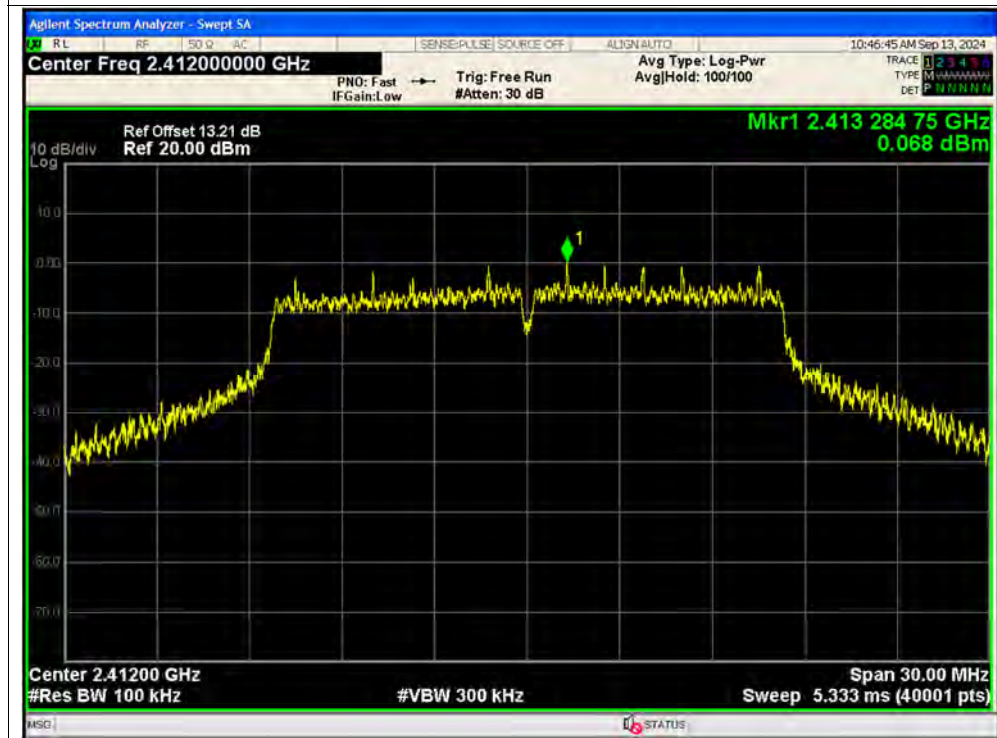


Tx. Spurious NVNT g 2412MHz Ant1 Emission

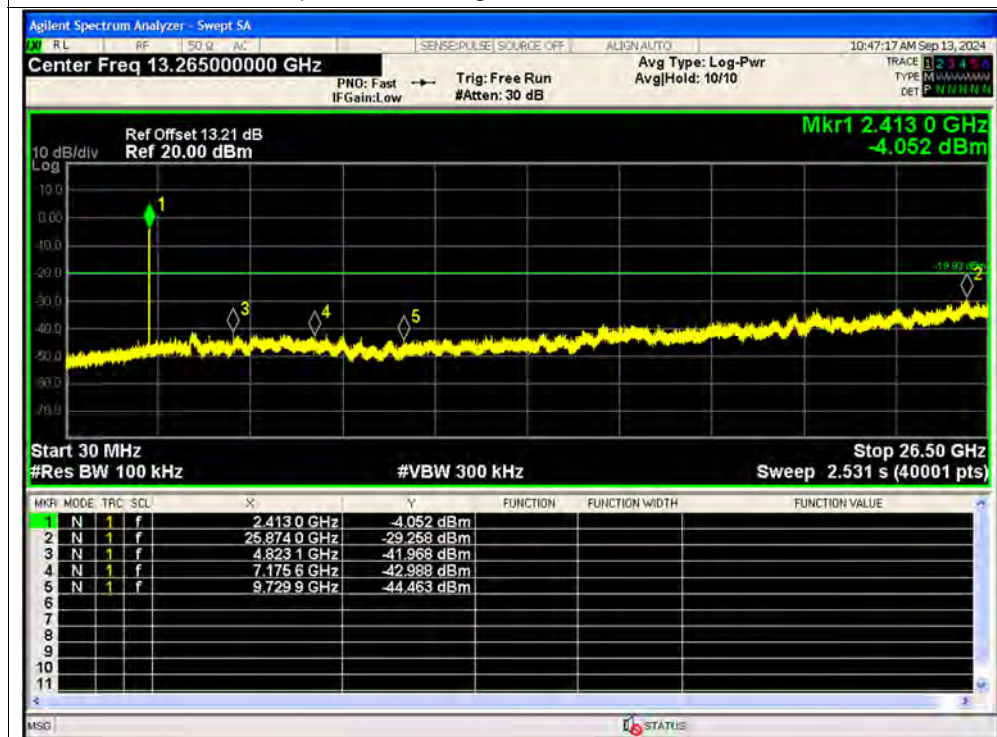


Tx. Spurious NVNT g 2442MHz Ant1 Ref




Tx. Spurious NVNT g 2442MHz Ant1 Emission

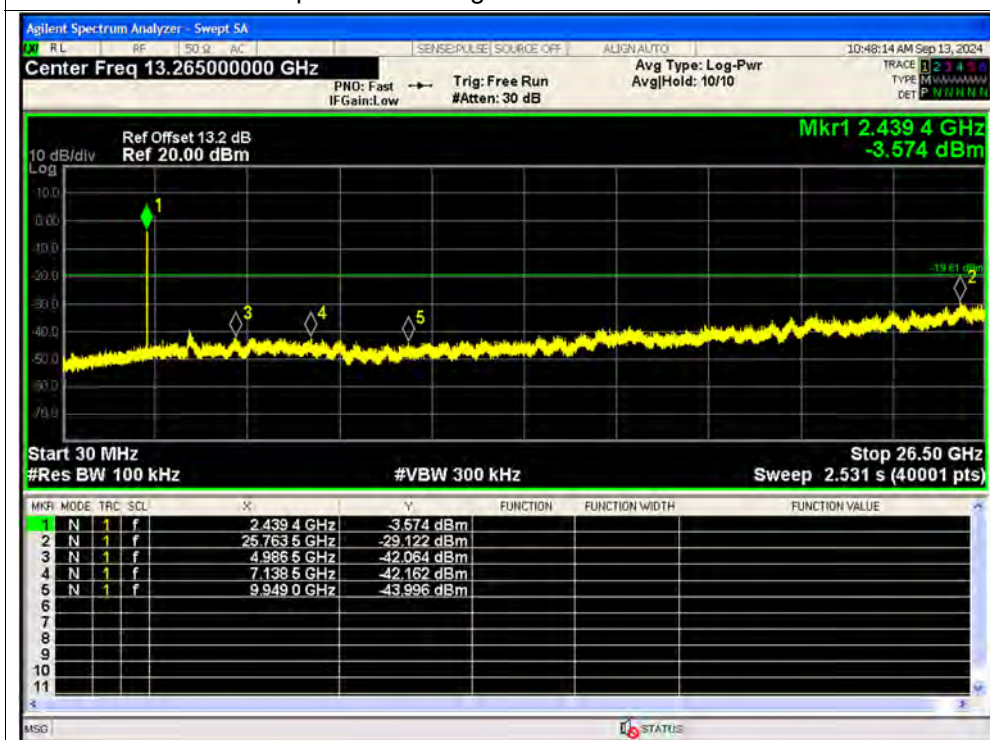

Tx. Spurious NVNT g 2472MHz Ant1 Ref

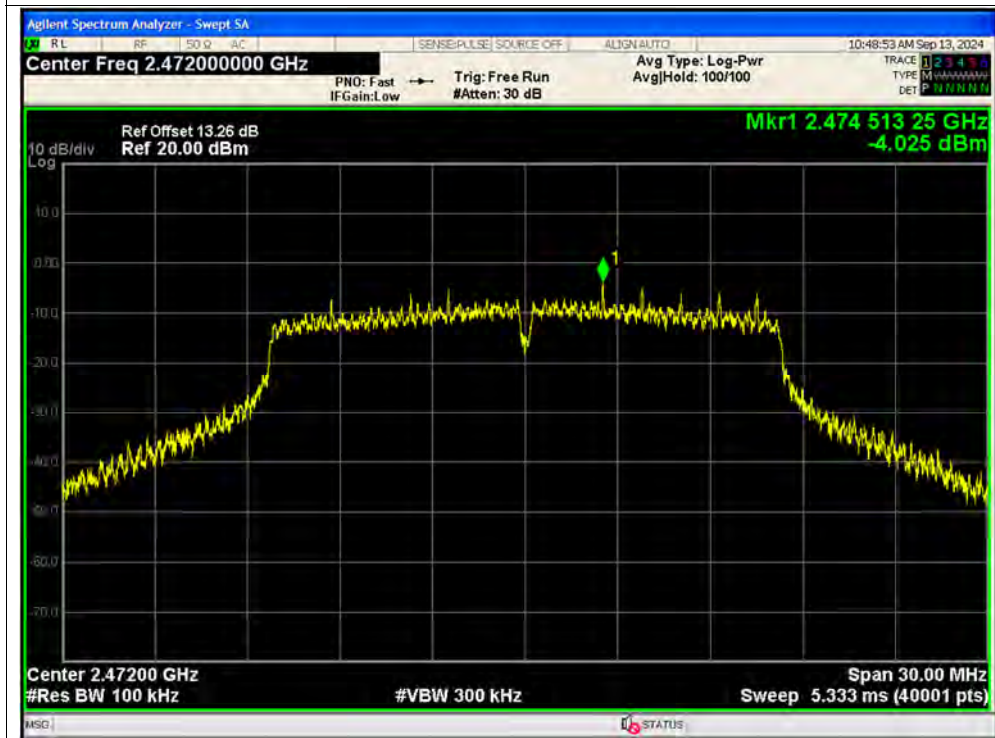


Tx. Spurious NVNT g 2472MHz Ant1 Emission

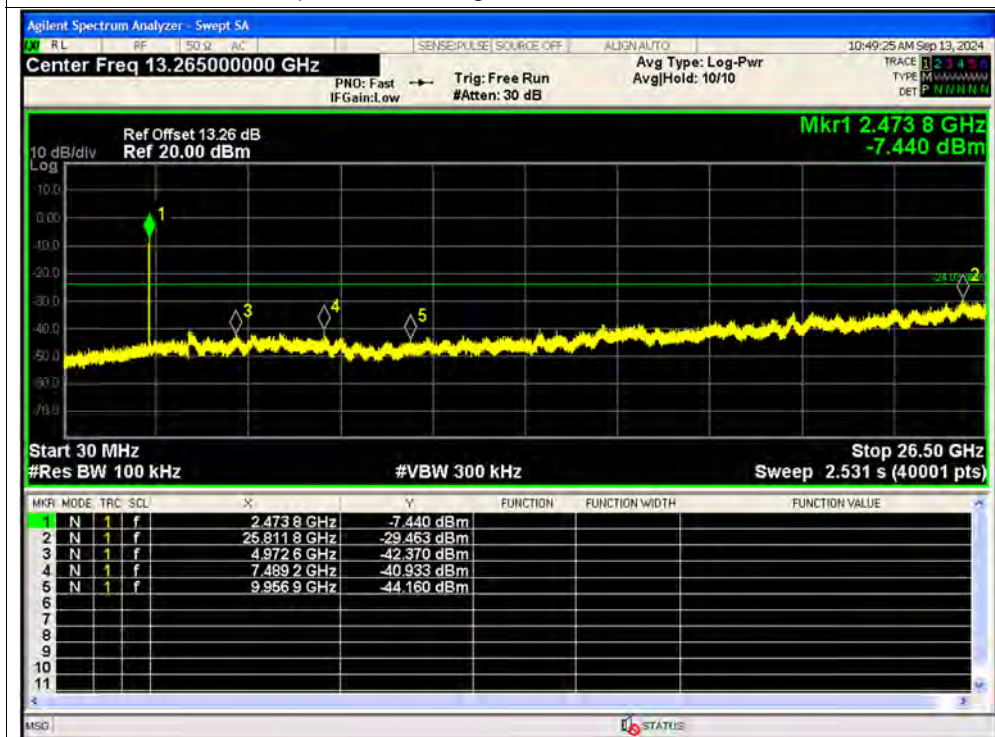


Tx. Spurious NVNT n20 2412MHz Ant1 Ref




Tx. Spurious NVNT n20 2412MHz Ant1 Emission

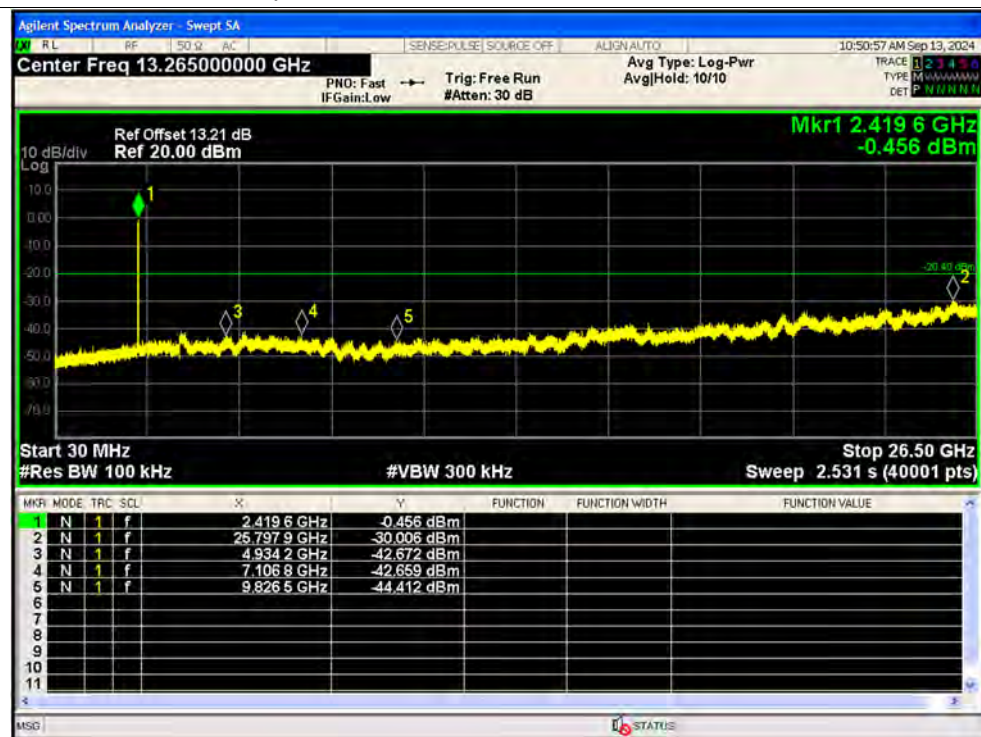

Tx. Spurious NVNT n20 2442MHz Ant1 Ref

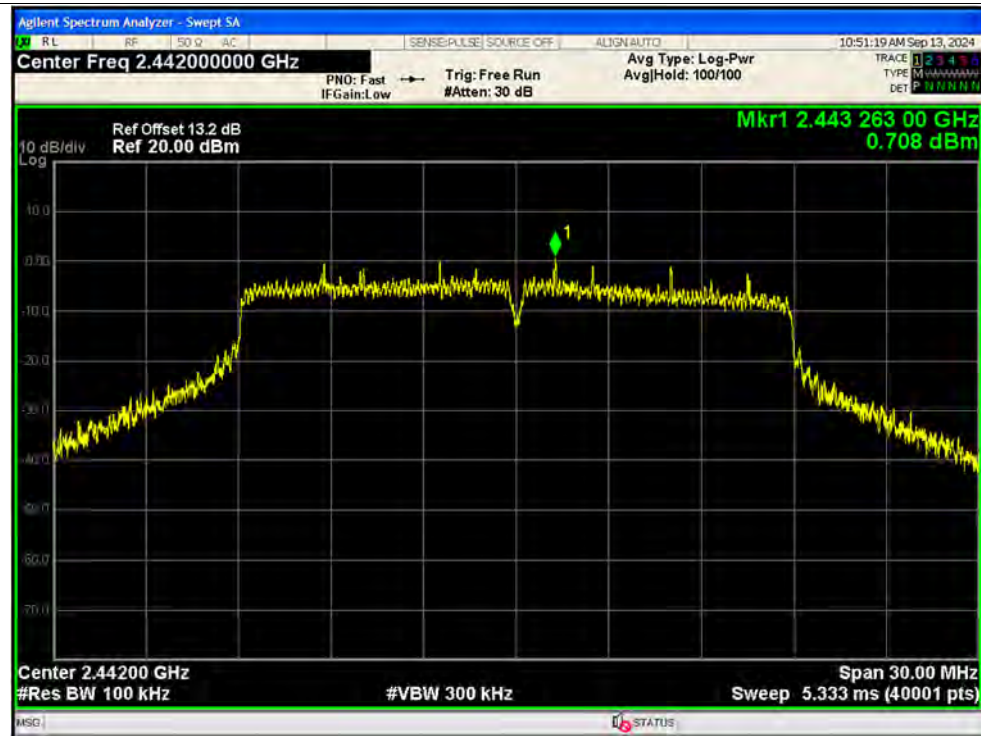


Tx. Spurious NVNT n20 2442MHz Ant1 Emission

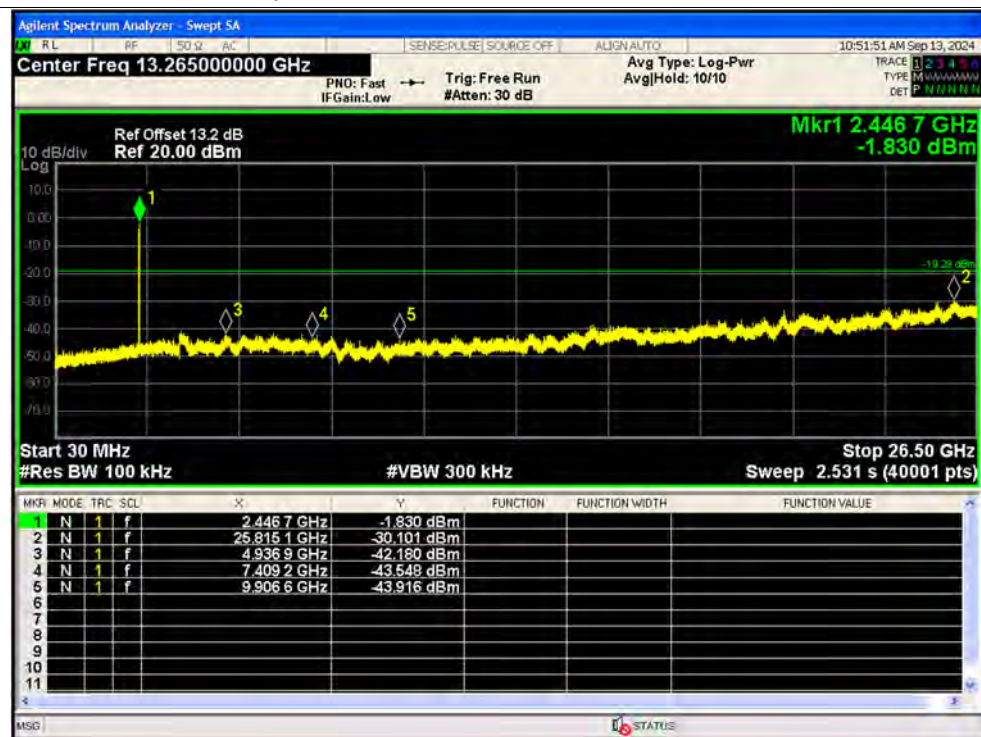

Tx. Spurious NVNT n20 2472MHz Ant1 Ref




Tx. Spurious NVNT n20 2472MHz Ant1 Emission

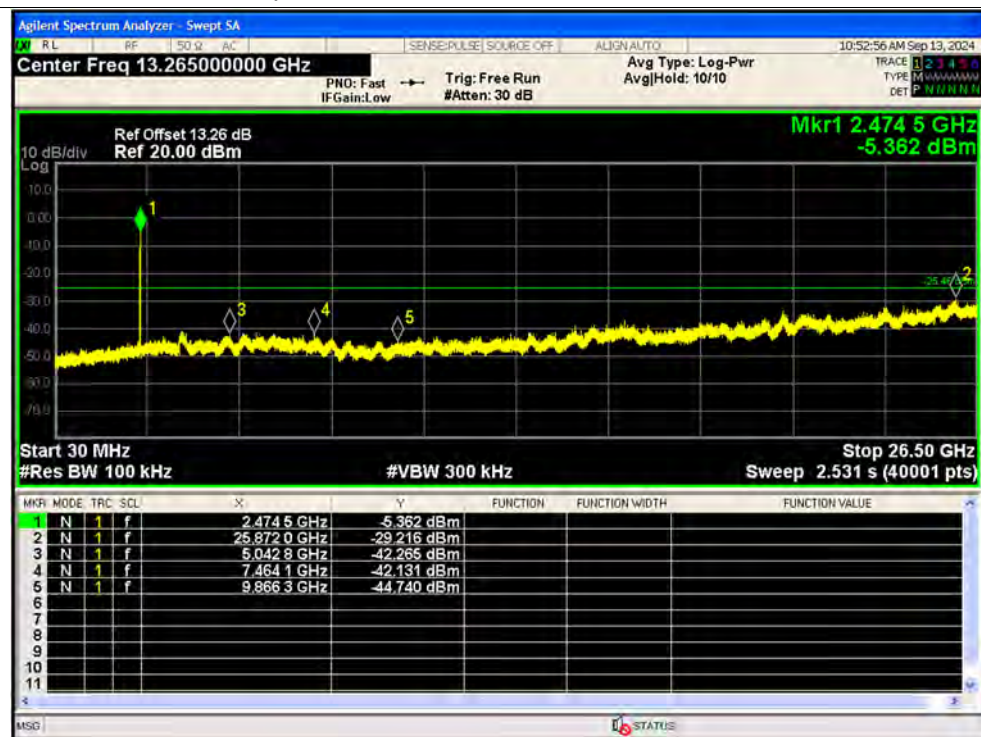

Tx. Spurious NVNT n40 2422MHz Ant1 Ref




Tx. Spurious NVNT n40 2422MHz Ant1 Emission

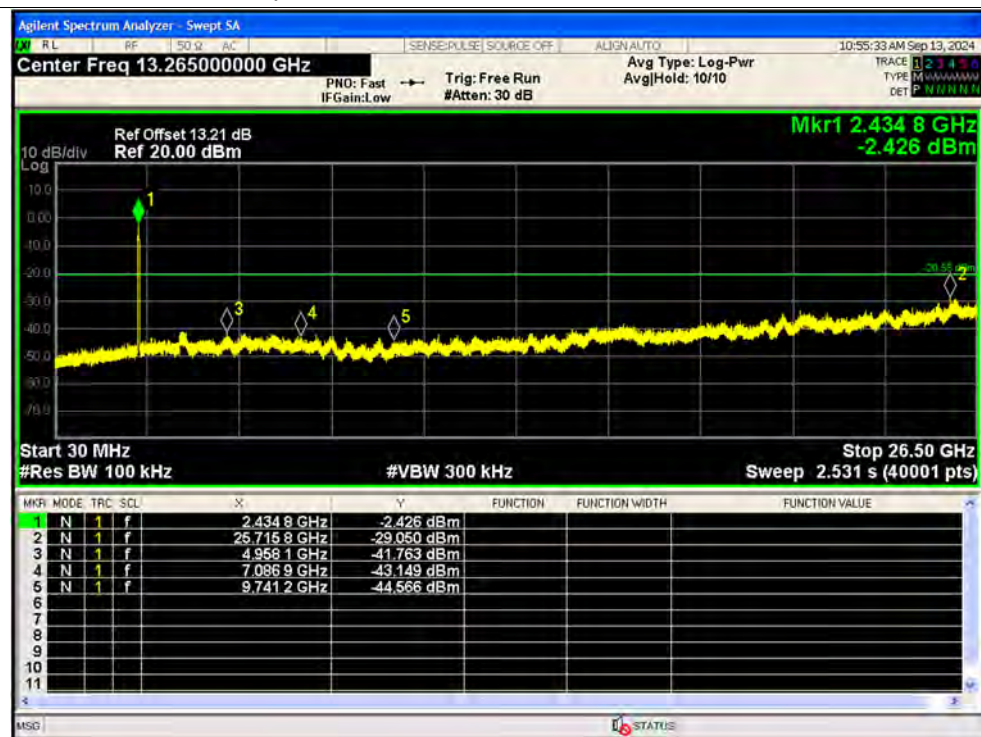

Tx. Spurious NVNT n40 2442MHz Ant1 Ref




Tx. Spurious NVNT n40 2442MHz Ant1 Emission

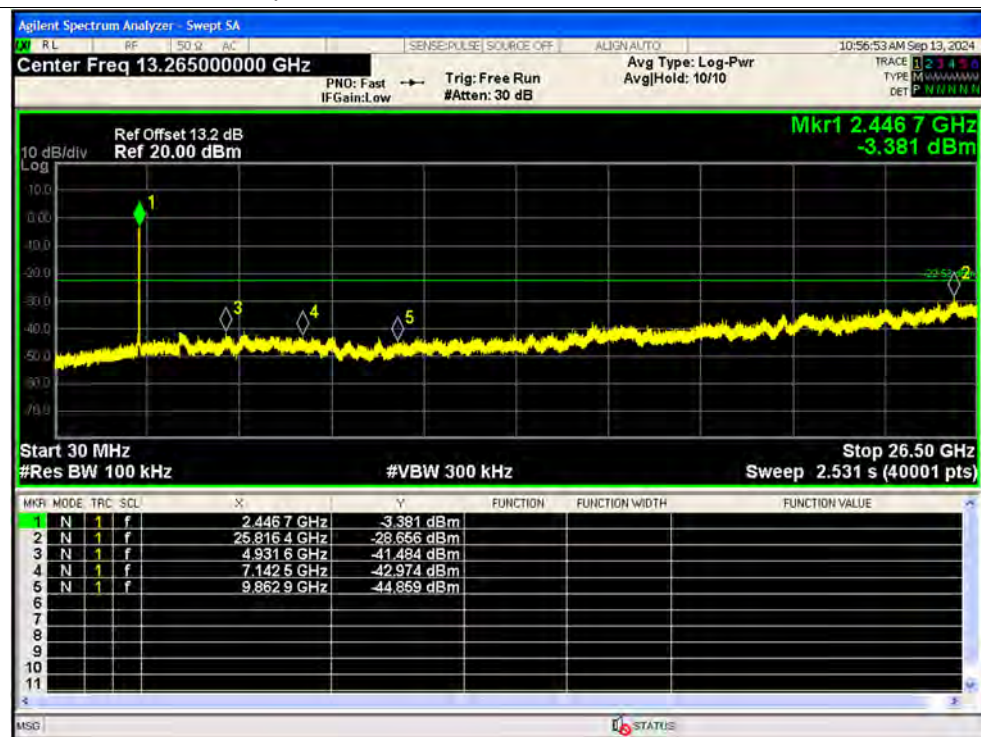

Tx. Spurious NVNT n40 2462MHz Ant1 Ref



Tx. Spurious NVNT n40 2462MHz Ant1 Emission

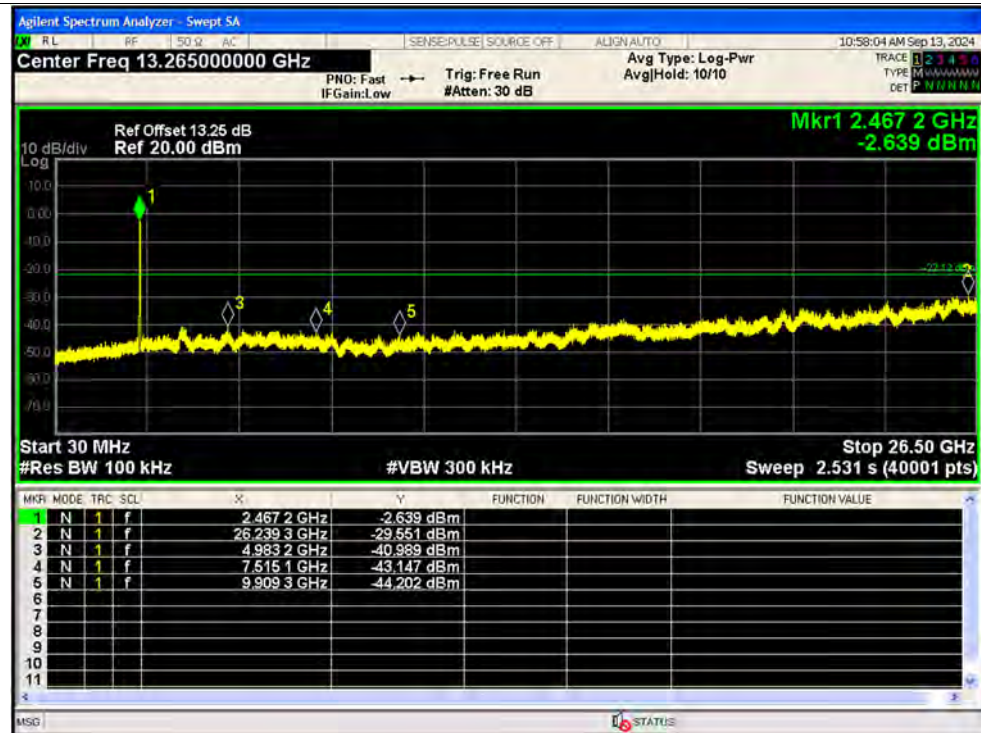

**A.6. Band Edge**


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-47.04	-20	Pass
NVNT	b	2472	Ant1	-45.48	-20	Pass
NVNT	g	2412	Ant1	-29.51	-20	Pass
NVNT	g	2472	Ant1	-29.94	-20	Pass
NVNT	n20	2412	Ant1	-26.53	-20	Pass
NVNT	n20	2472	Ant1	-29.59	-20	Pass
NVNT	n40	2422	Ant1	-39.35	-20	Pass
NVNT	n40	2462	Ant1	-34.78	-20	Pass

Test Graphs

Band Edge NVNT b 2412MHz Ant1 Ref




Band Edge NVNT b 2412MHz Ant1 Emission

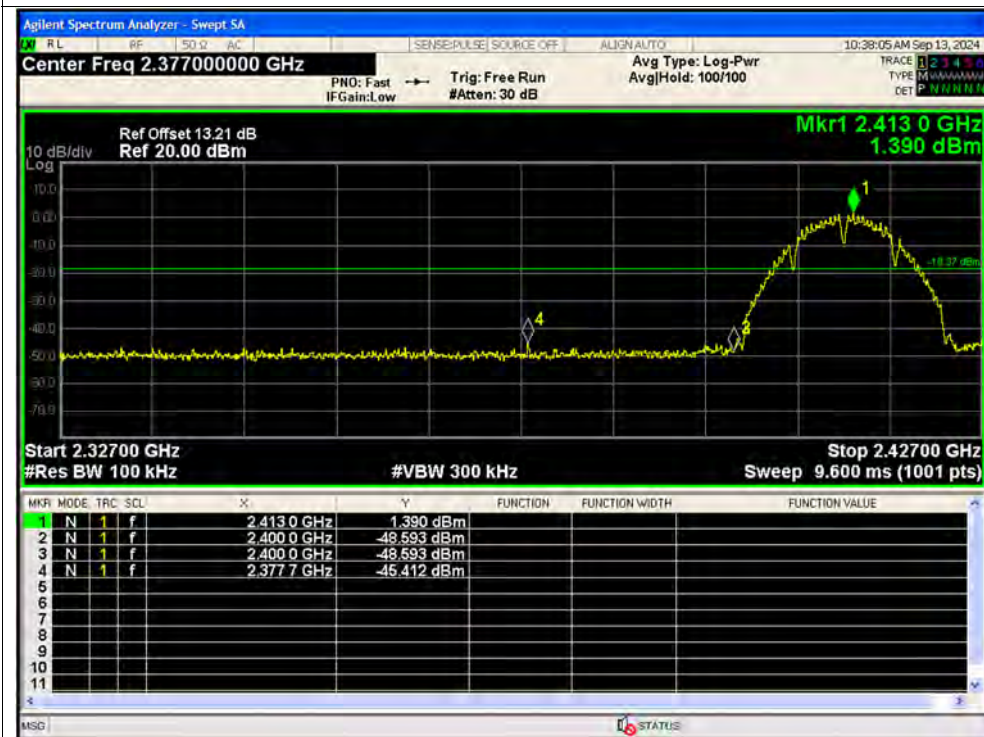

Band Edge NVNT b 2472MHz Ant1 Ref




Band Edge NVNT b 2472MHz Ant1 Emission

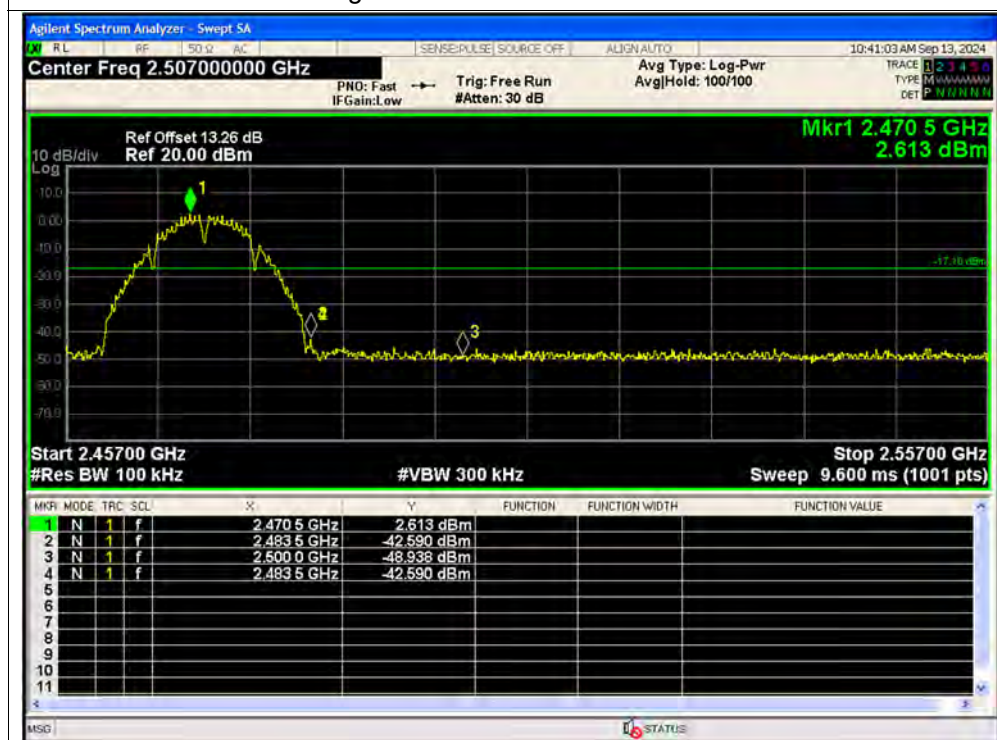

Band Edge NVNT g 2412MHz Ant1 Ref



Band Edge NVNT g 2412MHz Ant1 Emission

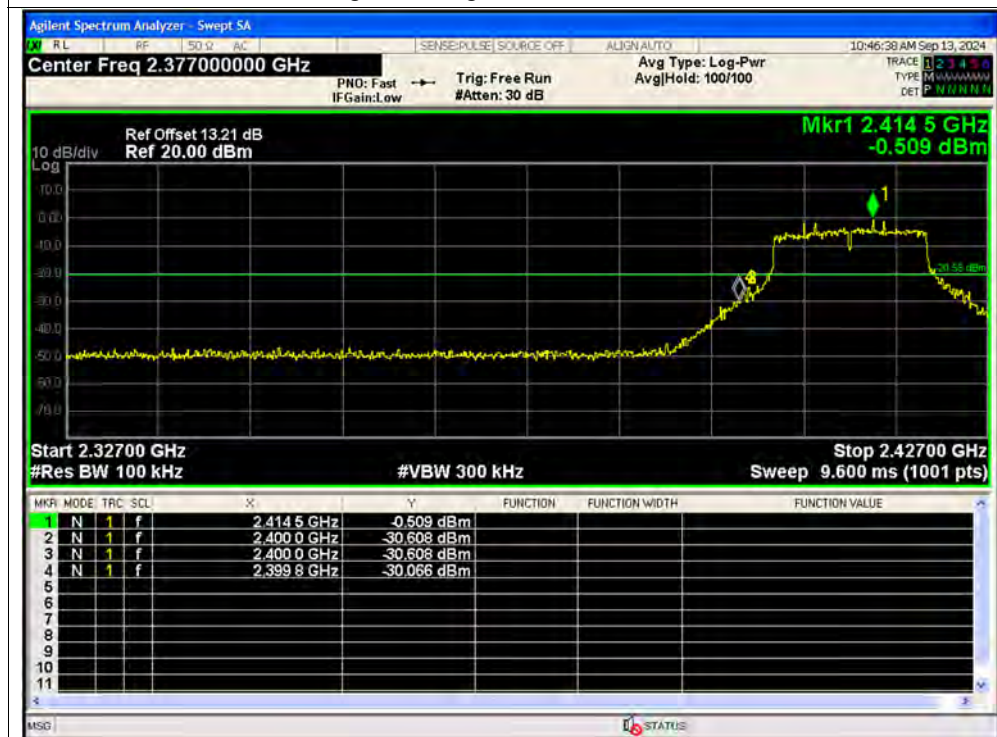

Band Edge NVNT g 2472MHz Ant1 Ref



Band Edge NVNT g 2472MHz Ant1 Emission






Band Edge NVNT n20 2412MHz Ant1 Ref



Band Edge NVNT n20 2412MHz Ant1 Emission

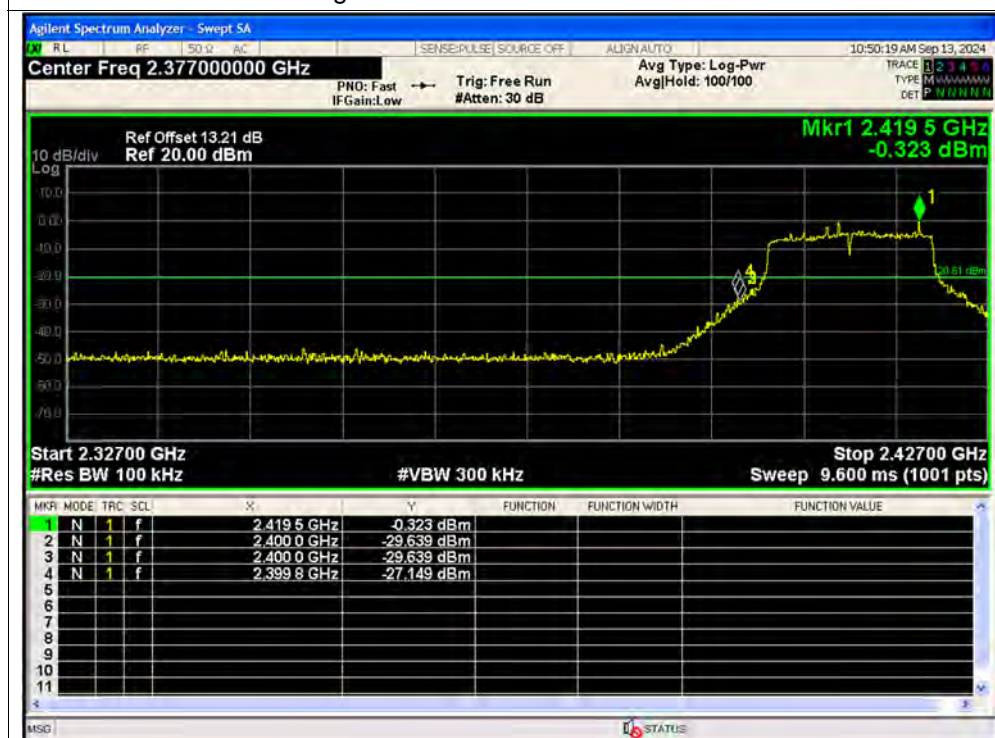

Band Edge NVNT n20 2472MHz Ant1 Ref




Band Edge NVNT n20 2472MHz Ant1 Emission



Band Edge NVNT n40 2422MHz Ant1 Ref




Band Edge NVNT n40 2422MHz Ant1 Emission

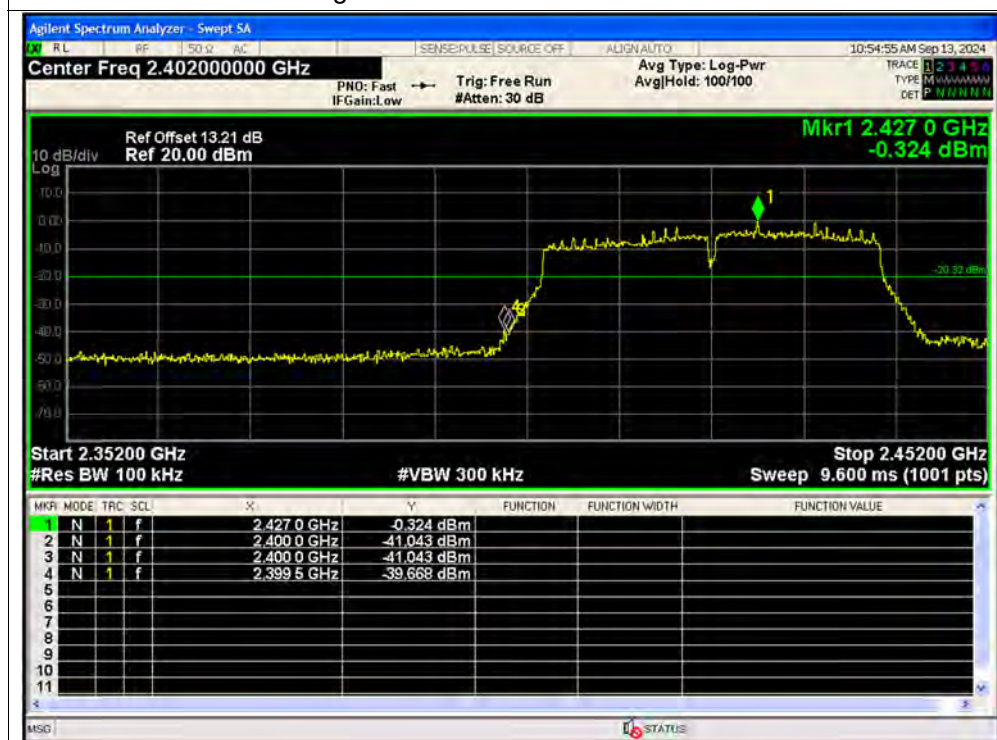

Band Edge NVNT n40 2462MHz Ant1 Ref



Band Edge NVNT n40 2462MHz Ant1 Emission

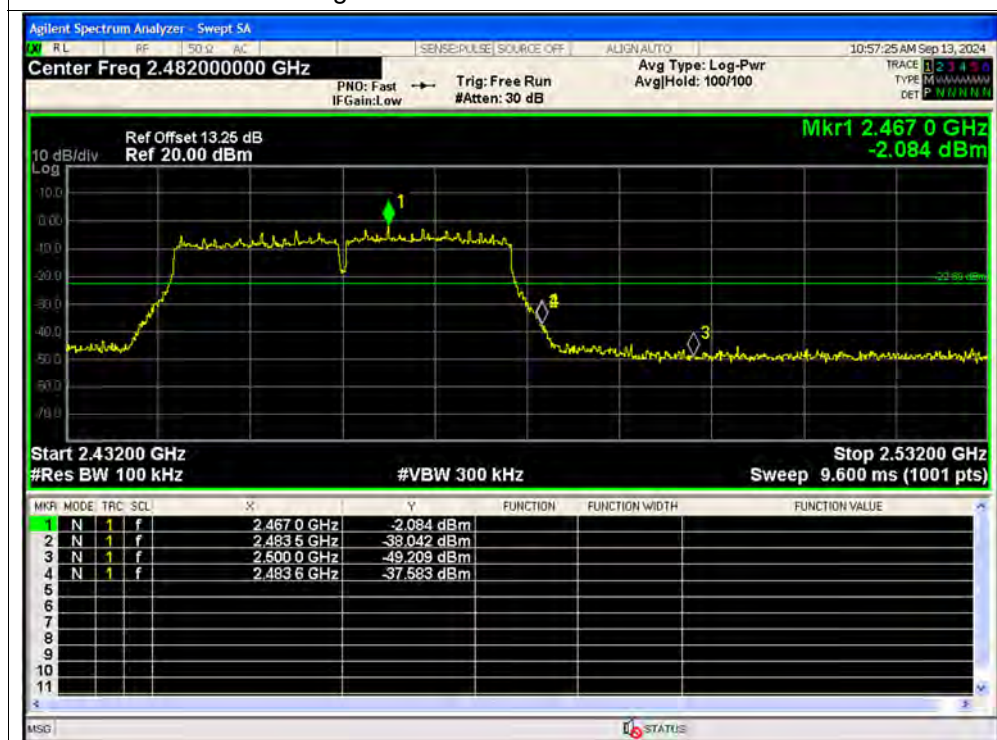

**A.7. Power Spectral Density**

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant1	-12.12	0	-12.12	8	Pass
NVNT	b	2442	Ant1	-11.94	0	-11.94	8	Pass
NVNT	b	2472	Ant1	-10.88	0	-10.88	8	Pass
NVNT	g	2412	Ant1	-14.5	0	-14.5	8	Pass
NVNT	g	2442	Ant1	-14.25	0	-14.25	8	Pass
NVNT	g	2472	Ant1	-18.35	0	-18.35	8	Pass
NVNT	n20	2412	Ant1	-15.18	0	-15.18	8	Pass
NVNT	n20	2442	Ant1	-13.5	0	-13.5	8	Pass
NVNT	n20	2472	Ant1	-19.96	0	-19.96	8	Pass
NVNT	n40	2422	Ant1	-15.63	0	-15.63	8	Pass
NVNT	n40	2442	Ant1	-16.26	0	-16.26	8	Pass
NVNT	n40	2462	Ant1	-17.61	0	-17.61	8	Pass



Test Graphs

PSD NVNT b 2412MHz Ant1




PSD NVNT b 2442MHz Ant1



PSD NVNT b 2472MHz Ant1




PSD NVNT g 2412MHz Ant1

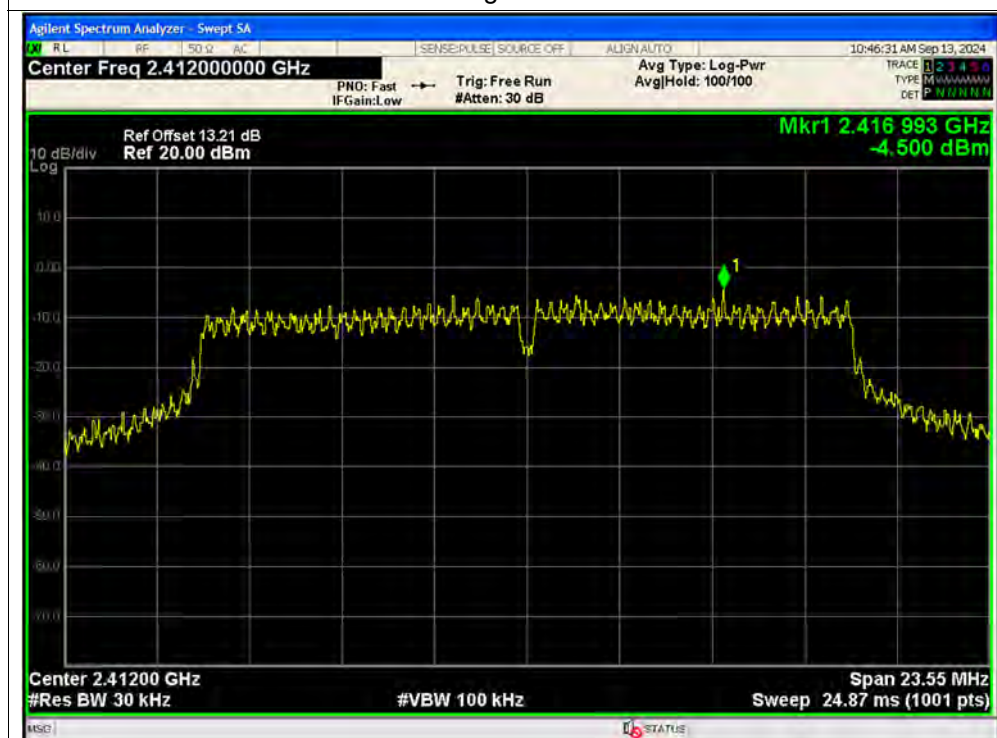


PSD NVNT g 2442MHz Ant1



PSD NVNT g 2472MHz Ant1

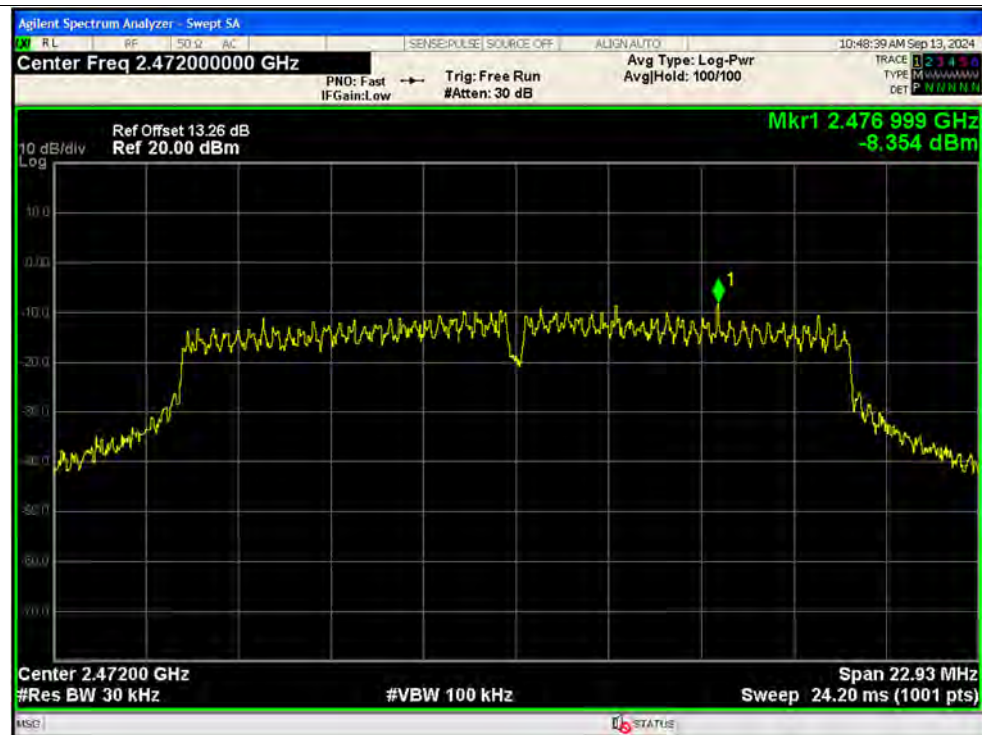

PSD NVNT n20 2412MHz Ant1

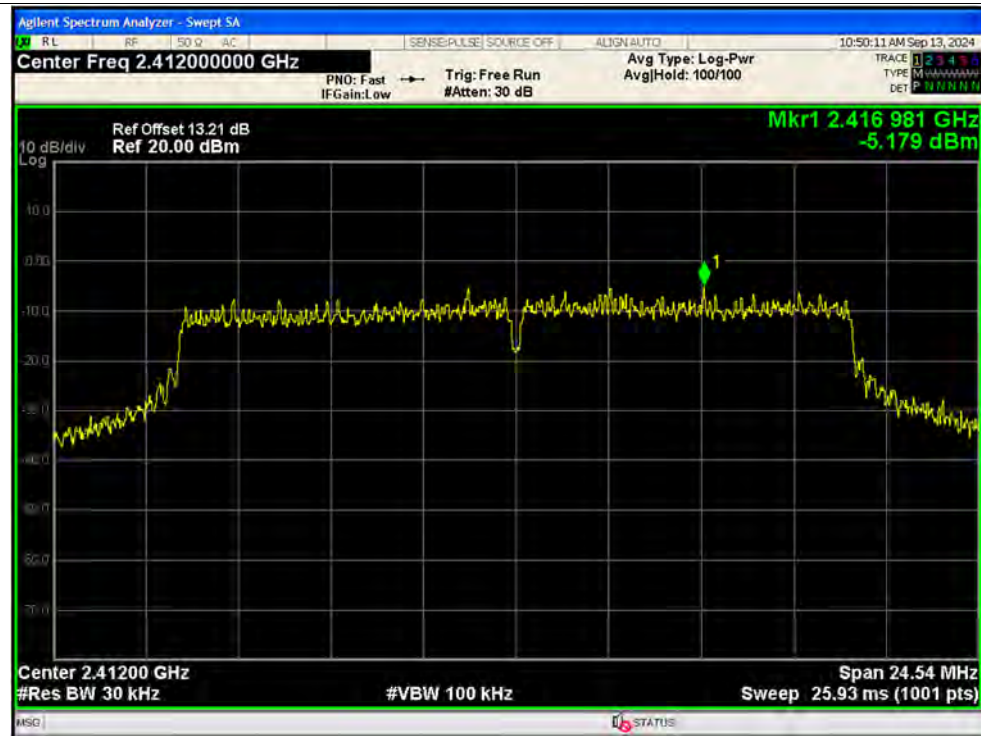


PSD NVNT n20 2442MHz Ant1





PSD NVNT n20 2472MHz Ant1

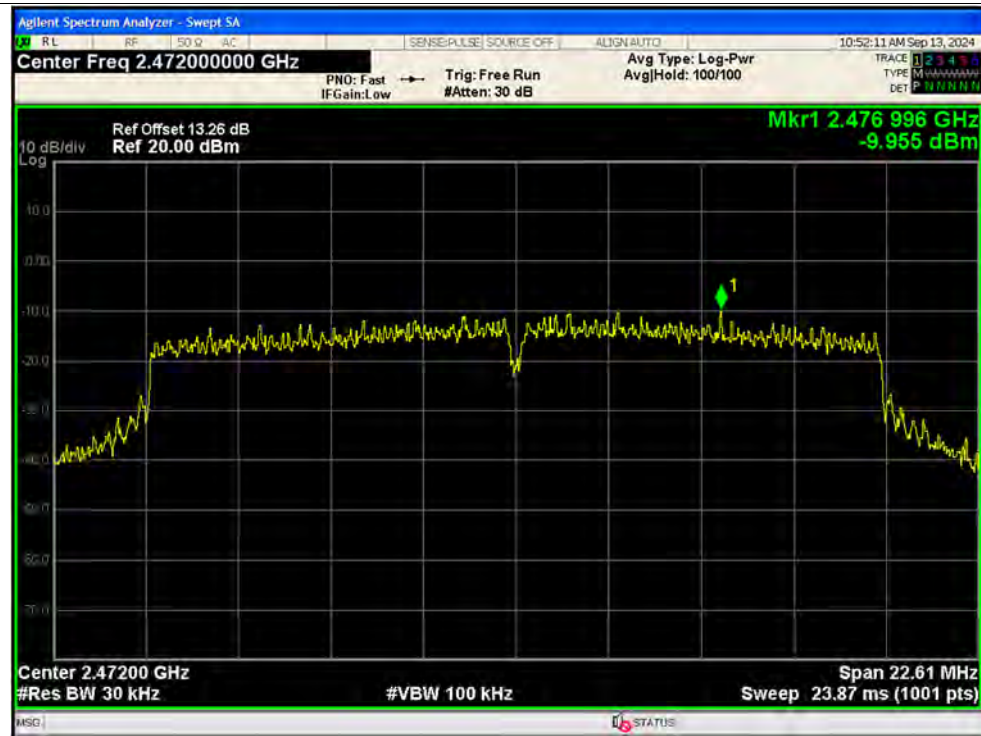

PSD NVNT n40 2422MHz Ant1



PSD NVNT n40 2442MHz Ant1



PSD NVNT n40 2462MHz Ant1





A.8. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT + Adapter + Data line + WIFI TX

Test voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plot:

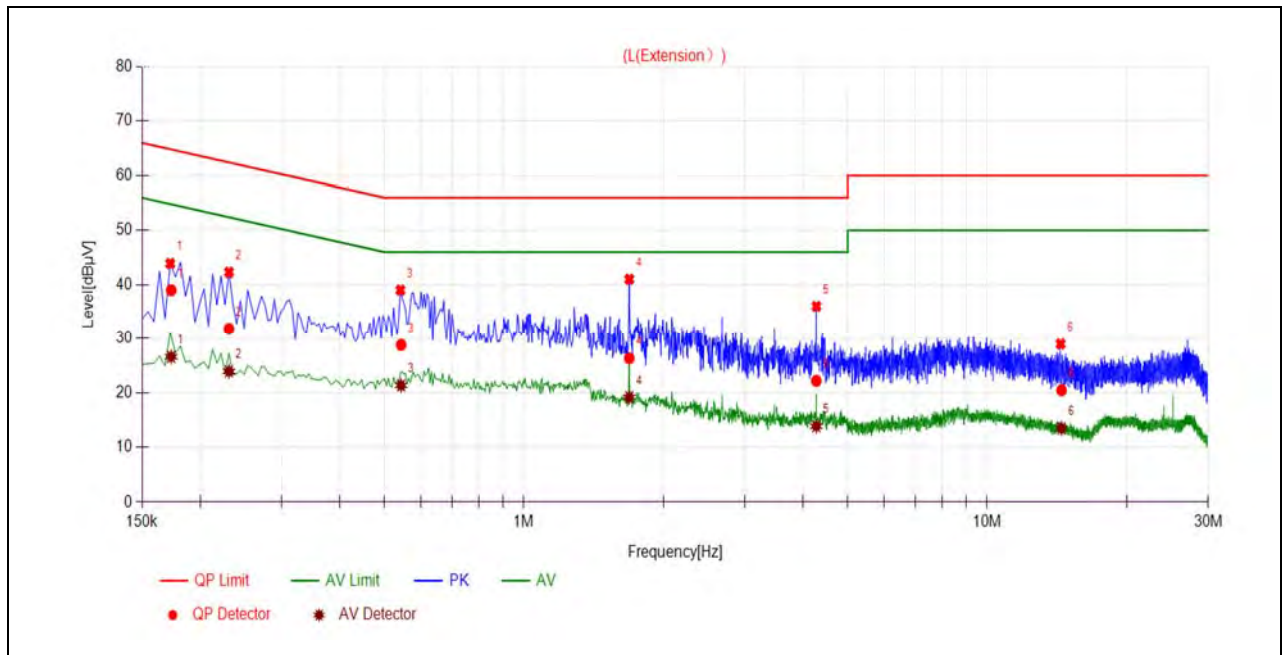

(L Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1733	38.99	26.58	64.80	54.80	Line	PASS
2	0.2309	31.83	23.90	62.42	52.42		PASS
3	0.5433	28.79	21.32	56.00	46.00		PASS
4	1.6885	26.32	19.16	56.00	46.00		PASS
5	4.2770	22.16	13.83	56.00	46.00		PASS
6	14.4691	20.45	13.44	60.00	50.00		PASS

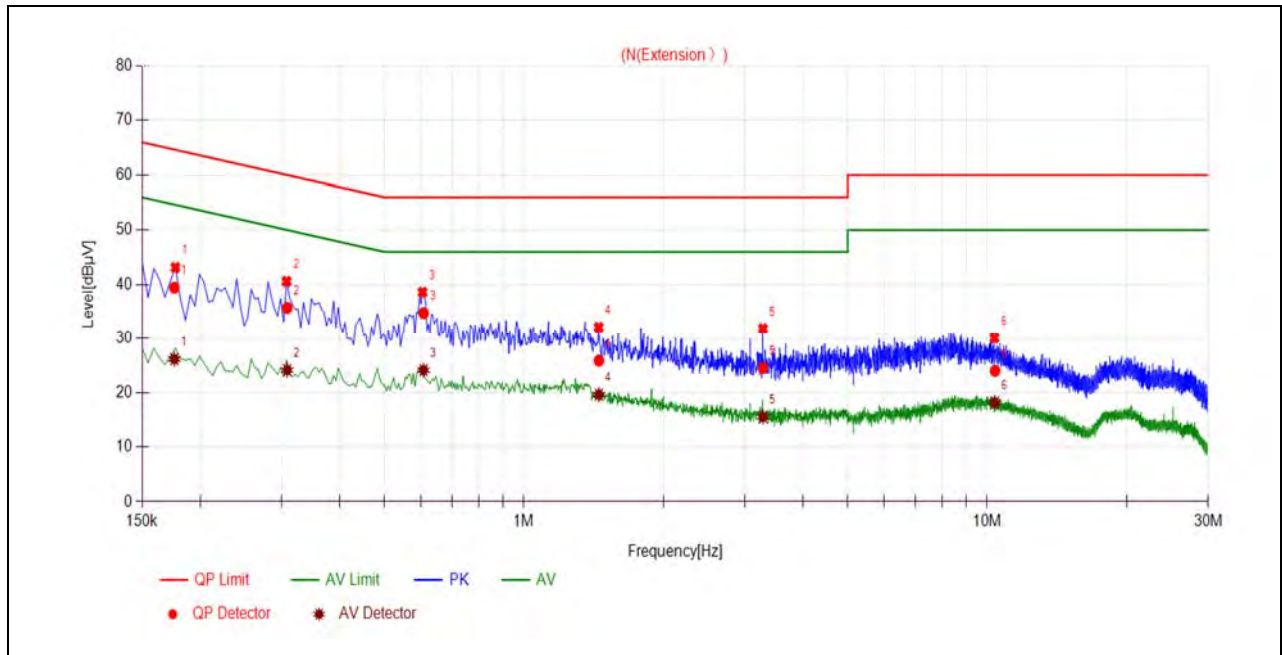

(N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1761	39.44	26.14	64.67	54.67	Neutral	PASS
2	0.3084	35.73	24.11	60.01	50.01		PASS
3	0.6075	34.75	24.10	56.00	46.00		PASS
4	1.4519	25.88	19.60	56.00	46.00		PASS
5	3.2838	24.51	15.51	56.00	46.00		PASS
6	10.3981	23.98	18.15	60.00	50.00		PASS



A.9. Restricted Frequency Bands

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain


A_{Factor} : Antenna Factor at 3m

Note 1: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (Horizontal) was recorded in this test report.


Note 2 All test modes and bandwidth were considered and evaluated respectively by performing full test, only the worst data were recorded for each bandwidth.

802.11b Mode

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2310.30	PK	23.96	6.74	27.20	57.90	74	PASS
1	2390.00	AV	11.10	6.74	27.20	45.04	54	PASS
13	2485.44	PK	26.16	6.74	27.20	60.10	74	PASS
13	2483.50	AV	15.41	6.74	27.20	49.35	54	PASS

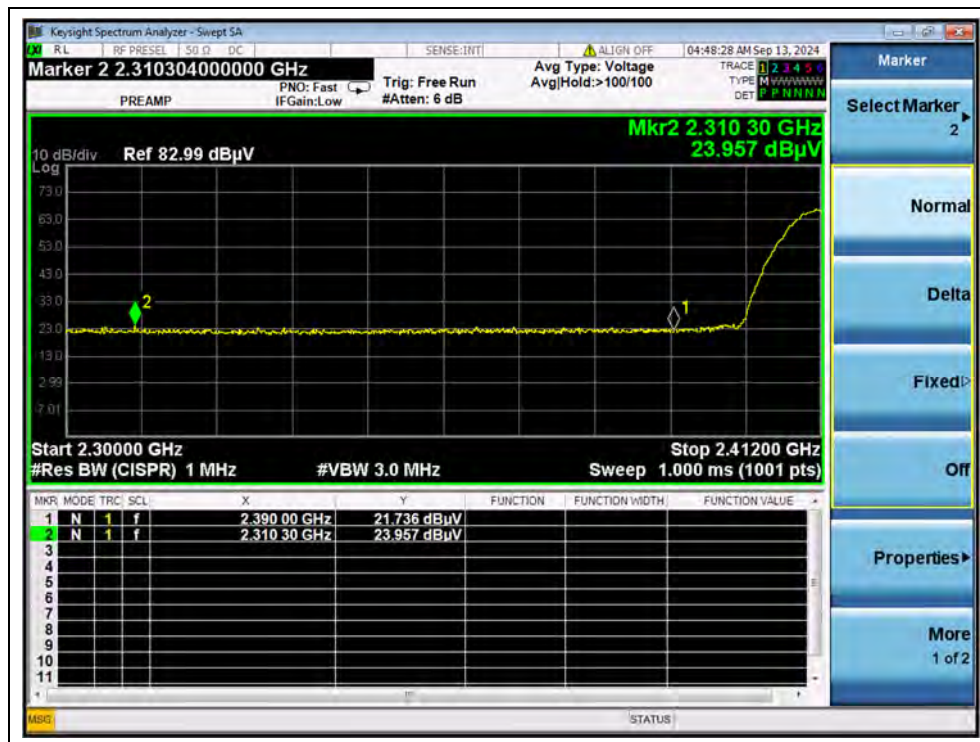


(PEAK, Channel 1, 802.11b)

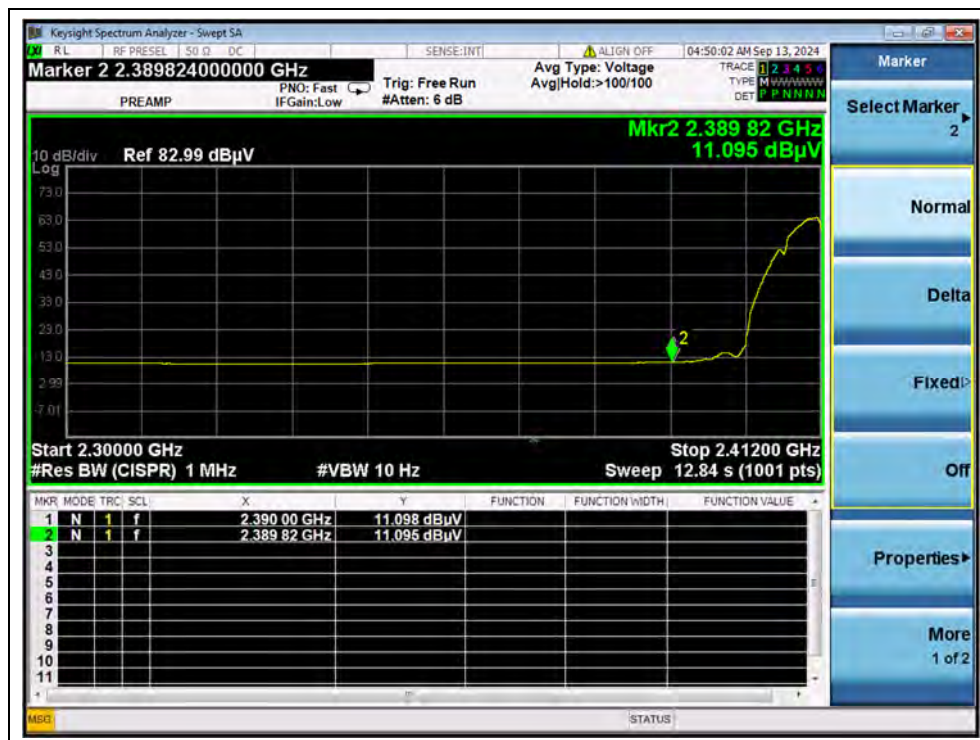

(AVERAGE, Channel 1, 802.11b)



(PEAK, Channel 13, 802.11b)

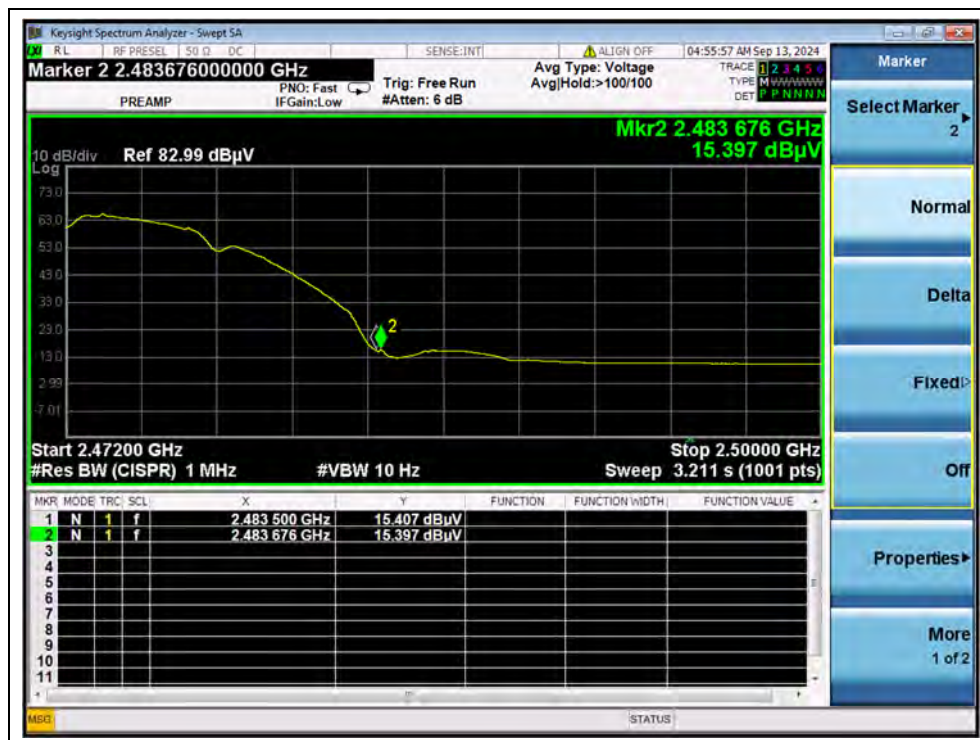


(AVERAGE, Channel 13, 802.11b)




802.11n (HT40) Mode

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
3	2389.30	PK	24.94	6.74	27.20	58.88	74	PASS
3	2390.00	AV	14.40	6.74	27.20	48.34	54	PASS
11	2483.55	PK	29.09	6.74	27.20	63.03	74	PASS
11	2483.50	AV	17.93	6.74	27.20	51.87	54	PASS

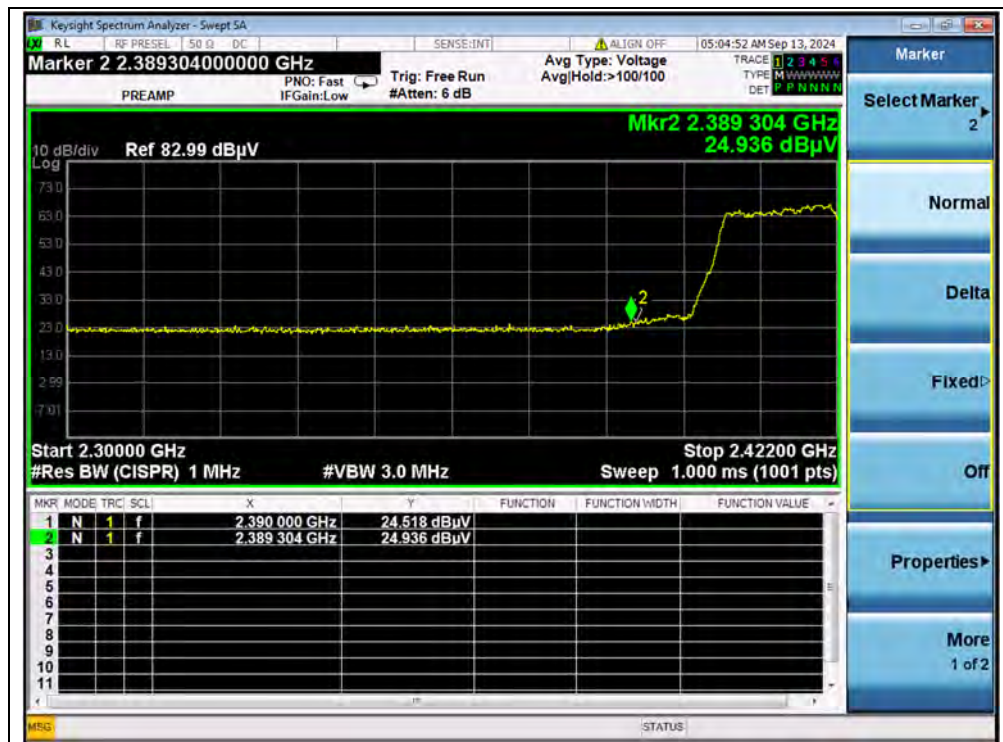


(PEAK, Channel 3, 802.11n (HT40))

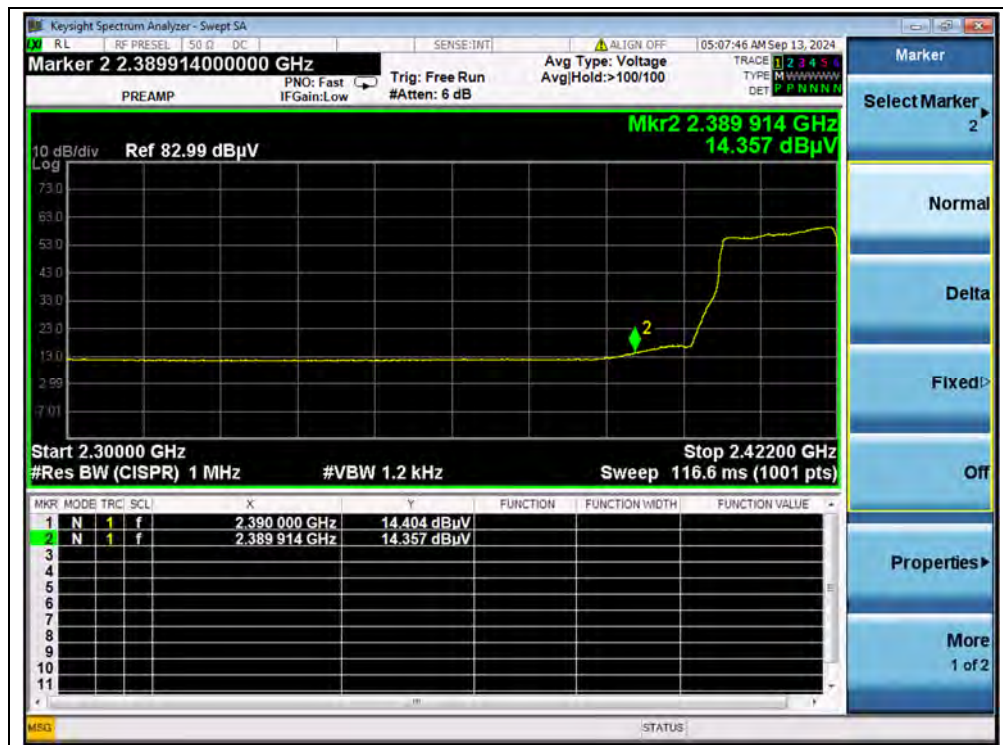

(AVERAGE, Channel 3, 802.11n (HT40))



(PEAK, Channel 11, 802.11n (HT40))

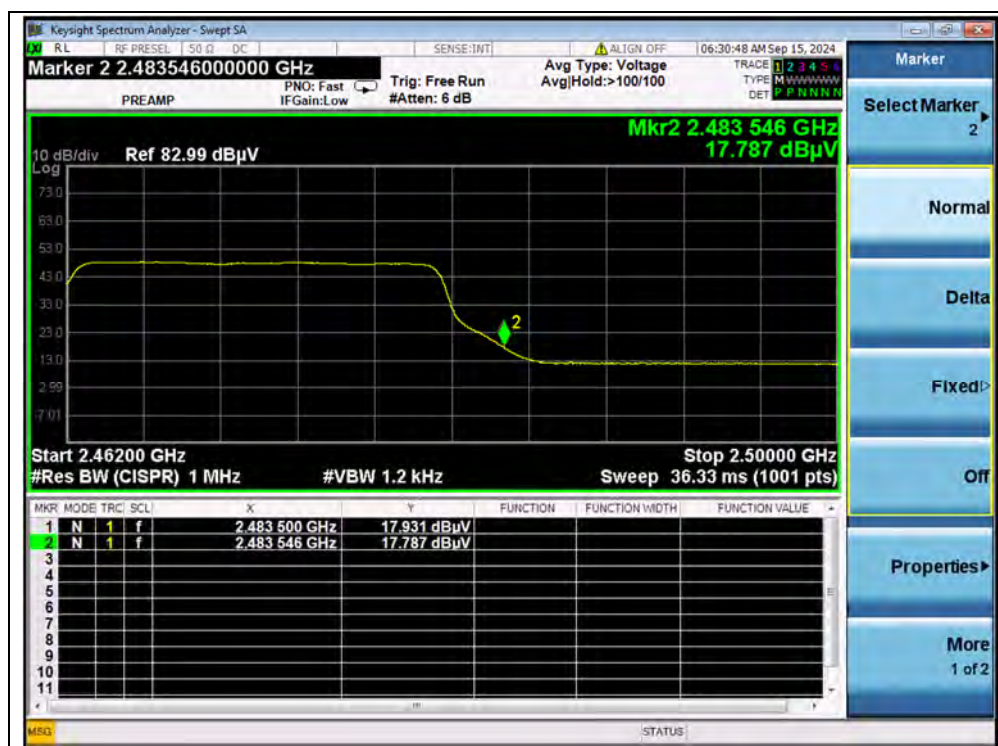

(AVERAGE, Channel 11, 802.11n (HT40))



A.10. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 40GHz harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note4: All test modes and bandwidth were considered and evaluated respectively by performing full test, only the worst data were recorded for each bandwidth.


Field strength of fundamental:

Frequency (MHz)	Reading_Peak (dB μ V/m)	Antenna Factor (dB)	Path Loss (dB)	Final_Peak (dB μ V/m)	Antenna Polarity
2411.15	49.99	27.20	6.74	83.93	Vertical

The field strength (the lowest) of fundamenta is more than 20dB higher than the unwanted emissions, in accordance with FCC part 15.215(b).


**802.11b Mode**

Plot for Channel 1

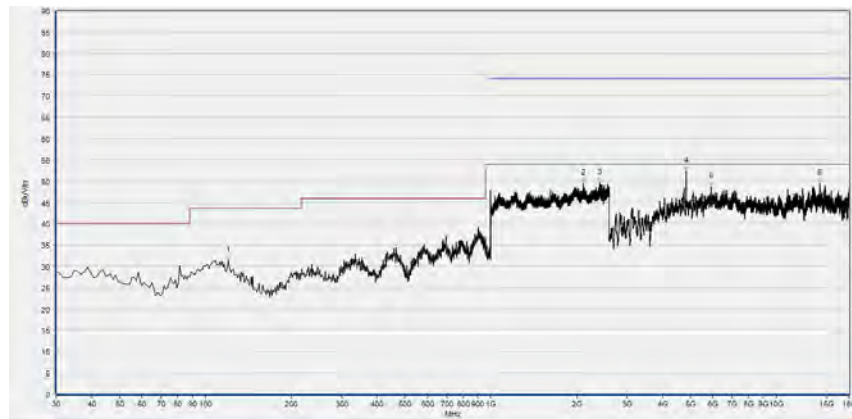

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
120.210	31.34	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2107.733	49.46	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2412.800	49.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4823.760	52.36	N/A	51.99	74.00	N/A	54.00	Horizontal	PASS
5901.760	48.55	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14183.880	49.50	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

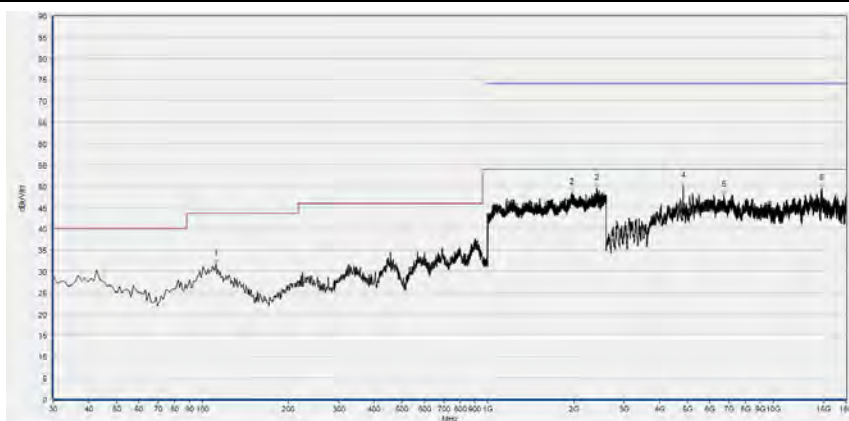


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
108.570	33.66	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1691.200	49.05	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2310.400	50.62	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4746.760	48.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7038.280	48.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14809.120	50.84	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 7

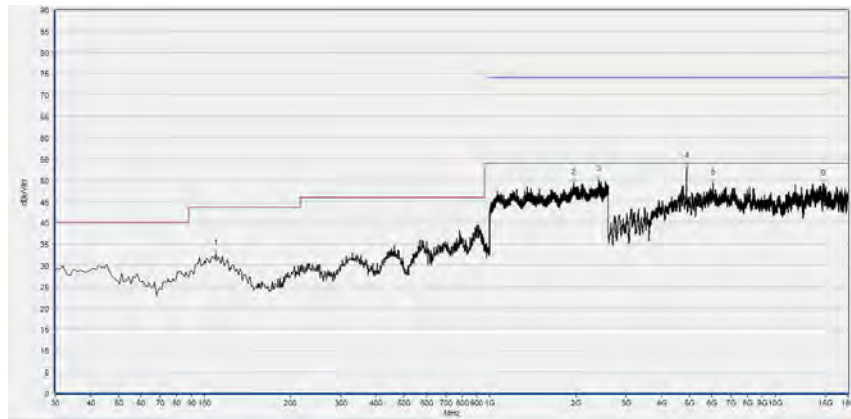

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	32.61	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1965.333	49.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2412.800	50.16	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4885.360	53.12	N/A	51.66	74.00	N/A	54.00	Horizontal	PASS
6052.680	49.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14750.600	49.16	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

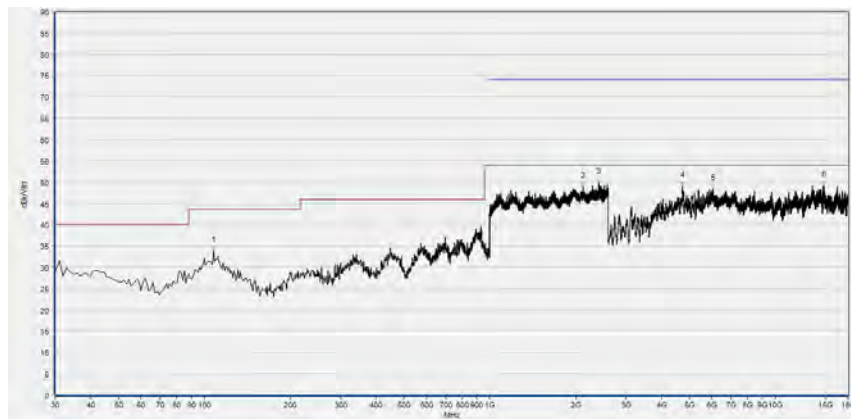

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.600	33.86	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2125.867	48.95	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2412.267	49.88	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4740.600	49.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6052.680	48.42	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14827.600	49.24	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)



Plot for Channel 13



Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
113.420	32.72	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1980.800	49.50	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2410.667	49.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4943.880	52.32	N/A	50.77	74.00	N/A	54.00	Horizontal	PASS
5898.680	48.64	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14796.800	49.82	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)



Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	32.58	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2002.133	48.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2411.200	49.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4734.440	48.70	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7050.600	48.30	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14806.040	50.11	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

END OF REPORT