


FCC Test Report

FCC ID : TLZ-CU277
Equipment : IEEE 802.11 b/g/n + Bluetooth 4.0 HS Smart Energy Module
Model No. : AW-CU277
Brand Name : AzureWave
Applicant : AzureWave Technologies, Inc.
Address : 8 F., No. 94, Baozhong Rd., Xindian, Taipei, Taiwan 231
Standard : 47 CFR FCC Part 15.247
Received Date : Mar. 12, 2015
Tested Date : Mar. 17 ~ Apr. 13, 2015

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

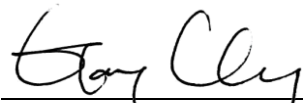

Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	The Equipment List	8
1.5	Test Standards	9
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS.....	11
3.1	Conducted Emissions.....	11
3.2	Unwanted Emissions into Restricted Frequency Bands	20
3.3	Unwanted Emissions into Non-Restricted Frequency Bands	78
3.4	Conducted Output Power	83
3.5	Number of Hopping Frequency	85
3.6	20dB and Occupied Bandwidth	87
3.7	Channel Separation.....	89
3.8	Number of Dwell Time	91
4	TEST LABORATORY INFORMATION	94

Release Record

Report No.	Version	Description	Issued Date
FR531203AD	Rev. 01	Initial issue	May 27, 2015

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.159MHz 53.13 (Margin -12.39dB) - QP	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 959.26MHz 40.76 (Margin -5.24dB) - PK	Pass
15.247(d)	Band Edge	Meet the requirement of limit	Pass
15.247(b)(1)	Conducted Output Power	Power [dBm]: 2.54	Pass
15.247(a)(1)(iii)	Number of Hopping Channels	Meet the requirement of limit	Pass
15.247(a)(1)	Hopping Channel Separation	Meet the requirement of limit	Pass
15.247(a)(1)(iii)	Dwell Time	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	Data Rate
2400-2483.5	BR V2.1	2402-2480	0-78 [79]	1 Mbps
2400-2483.5	EDR V2.1	2402-2480	0-78 [79]	2 Mbps
2400-2483.5	EDR V2.1	2402-2480	0-78 [79]	3 Mbps
Note 1: RF output power specifies that Maximum Peak Conducted Output Power.				
Note 2: Bluetooth BR uses a GFSK.				
Note 3: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK and 8DPSK.				

1.1.2 Antenna Details

Ant. No.	Model	Type	Connector	Antenna Gain (dBi)
1	ANT3216	Chip	UFL	3.29
2	FXP73.07.0100A	Monopole	UFL	3
3	NanoBlue	Monopole	UFL	2
4	PC11.07.0100A	Dipole	UFL	3
5	GW.17.07.0250E	Dipole	UFL	2.7
6	EDA-1313-2G4C1-A16	Dipole	UFL	2.39
7	FXP74.07.0100A	PIFA	UFL	4
8	MSA-4008-25GC1-A1	PIFA	UFL	2.98
9	PC17.07.0070A	PIFA	UFL	0.9
Note: The antennas with highest gain of each type were selected for final testing in this test report.				

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	3.3 Vdc from host.
-------------------	--------------------

1.1.4 Accessories

N/A

1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	---	---

1.1.6 Test Tool and Duty Cycle

Test Tool	CBT
-----------	-----


1.1.7 Power Setting

Modulation Mode	Test Frequency (MHz)		
	2402	2441	2480
GFSK/1Mbps	Default	Default	Default
8DPSK/3Mbps	Default	Default	Default

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	Latitude E5420	DoC	USB, 1.8m shielded w/o core.

1.3 Test Setup Chart

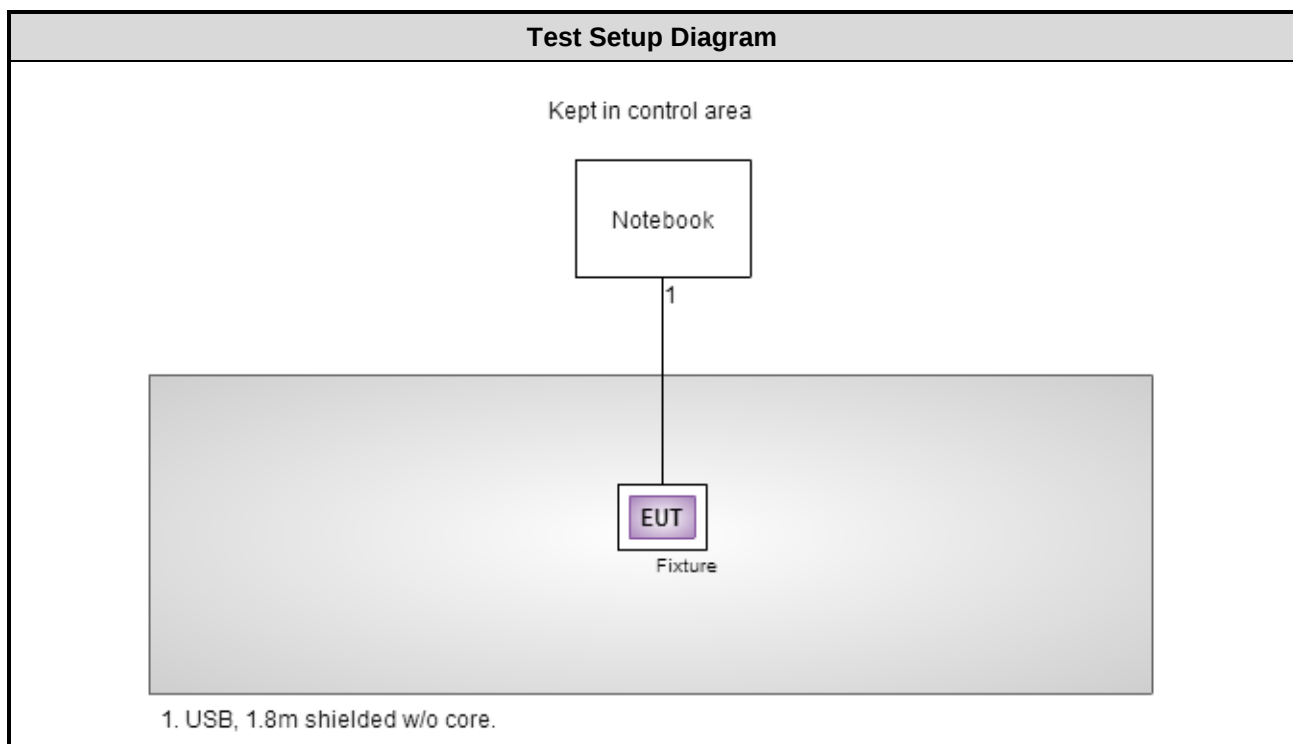

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 17, 2014	Oct. 16, 2015
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 17, 2014	Nov. 16, 2015
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Nov. 26, 2014	Nov. 25, 2015
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Dec. 31, 2014	Dec. 30, 2015
Bluetooth Tester	ROHDE&SCHWARZ	CBT	100959	Mar. 03, 2015	Mar. 02, 2016
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber 3 / (03CH03-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	Agilent	N9010A	MY53400091	Sep. 16, 2014	Sep. 15, 2015
Receiver	Agilent	N9038A	MY53290044	Oct. 21, 2014	Oct. 20, 2015
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-562	Jan. 19, 2015	Jan. 18, 2016
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Feb. 03, 2015	Feb. 02, 2016
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 10, 2014	Nov. 09, 2015
Loop Antenna	R&S	HFH2-Z2	11900	Nov. 10, 2014	Nov. 09, 2015
Preamplifier	EMC	EMC02325	980187	Sep. 26, 2014	Sep. 25, 2015
Preamplifier	Agilent	83017A	MY53270014	Sep. 17, 2014	Sep. 16, 2015
Preamplifier	EMC	EMC184045B	980192	Aug. 26, 2014	Aug. 25, 2015
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Feb. 09, 2015	Feb. 08, 2016
RF cable-8M	HUBER+SUHNER	SUCOFLEX104	MY22601/4	Feb. 09, 2015	Feb. 08, 2016
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Feb. 09, 2015	Feb. 08, 2016
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Feb. 09, 2015	Feb. 08, 2016
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Feb. 09, 2015	Feb. 08, 2016
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Feb. 09, 2015	Feb. 08, 2016
Bluetooth Tester	ROHDE&SCHWARZ	CBT	100959	Mar. 03, 2015	Mar. 02, 2016
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Feb. 03, 2015	Feb. 02, 2016
Power Meter	Anritsu	ML2495A	1241002	Sep. 29, 2014	Sep. 28, 2015
Power Sensor	Anritsu	MA2411B	1207366	Sep. 29, 2014	Sep. 28, 2015
Bluetooth Tester	ROHDE&SCHWARZ	CBT	100959	Mar. 03, 2015	Mar. 02, 2016
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

FCC Public notice DA 00-705

ANSI C63.10-2013

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.134 Hz
Conducted power	±0.808 dB
Power density	±0.463 dB
Conducted emission	±2.670 dB
AC conducted emission	±2.92 dB
Radiated emission ≤ 1GHz	±3.99 dB
Radiated emission > 1GHz	±5.52 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	22°C / 64%	Kevin Ma
Radiated Emissions	03CH03-WS	21-23°C / 63-65%	Aska Huang Warren Lee
RF Conducted	TH01-WS	24°C / 65%	Felix Sung

➤ FCC site registration No.: 390588

➤ IC site registration No.: 10807C-1

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate (Mbps)	Test Configuration
Conducted Emissions	8DPSK	2480	1Mbps	1, 2, 3, 4
Radiated Emissions ≤ 1GHz	8DPSK	2480	1Mbps	1, 2, 3, 4
Radiated Emissions > 1GHz	GFSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480	1Mbps 3Mbps	1, 2, 3, 4
Conducted Output Power	GFSK π/4 QDPSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480 2402, 2441, 2480	1Mbps 2Mbps 3Mbps	4
Number of Hopping Channels	GFSK 8DPSK	2402~2480 2402~2480	1Mbps 3Mbps	4
Hopping Channel Separation	GFSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480	1Mbps 3Mbps	4
Dwell Time	GFSK 8DPSK	2480 2480	1Mbps 3Mbps	4

NOTE:

- The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The worst cases were shown in this report as below listed.
- 4 types antenna are used for this device, highest gain antenna of each type is selected to perform related tests as below test configuration.
 - Configuration 1 : Chip antenna with 3.29dBi gain , X-plane
 - Configuration 2 : Monopole antenna with 3dBi gain , X-plane
 - Configuration 3 : Dipole antenna with 3dBi gain, Z-plane
 - Configuration 4 : PIFA antenna with 4dBi gain, X-plane

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz


3.1.3 Test Setup



- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions


Modulation Mode	8DPSK	Test Freq. (MHz)	2480
Power Phase	Line	Test Configuration	1

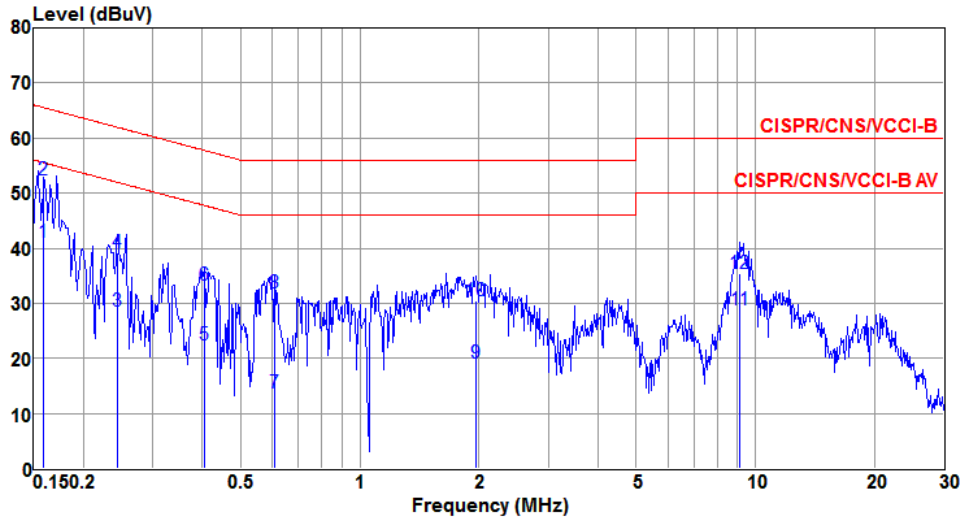

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.159	40.96	55.52	-14.56	40.81	0.07	0.08	Average
2*	0.159	52.31	65.52	-13.21	52.16	0.07	0.08	QP
3	0.244	28.54	51.95	-23.41	28.37	0.07	0.10	Average
4	0.244	39.26	61.95	-22.69	39.09	0.07	0.10	QP
5	0.406	22.48	47.73	-25.25	22.30	0.07	0.11	Average
6	0.406	33.33	57.73	-24.40	33.15	0.07	0.11	QP
7	0.611	13.73	46.00	-32.27	13.53	0.07	0.13	Average
8	0.611	31.90	56.00	-24.10	31.70	0.07	0.13	QP
9	1.959	19.11	46.00	-26.89	18.77	0.10	0.24	Average
10	1.959	30.55	56.00	-25.45	30.21	0.10	0.24	QP
11	9.156	28.74	50.00	-21.26	28.24	0.20	0.30	Average
12	9.156	35.33	60.00	-24.67	34.83	0.20	0.30	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation Mode	8DPSK	Test Freq. (MHz)	2480
Power Phase	Neutral	Test Configuration	1

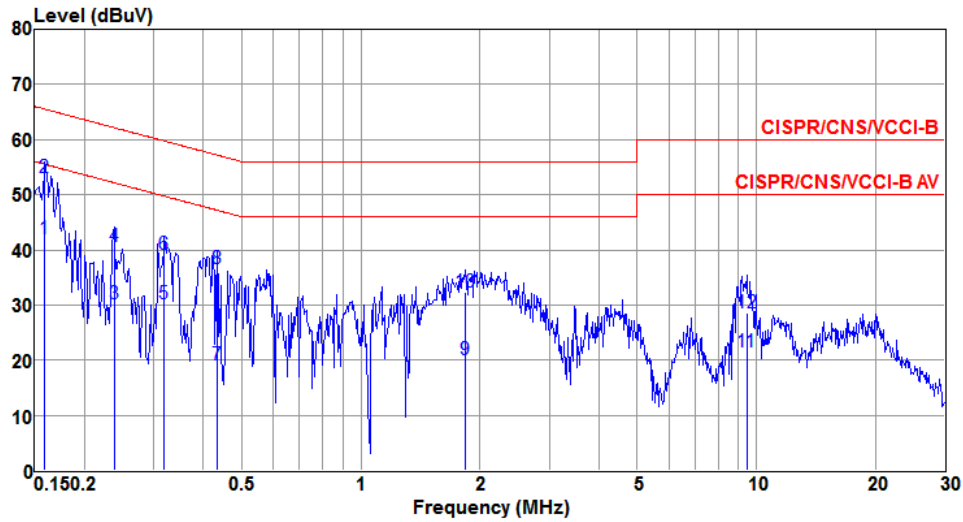

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.159	41.96	55.52	-13.56	41.81	0.07	0.08	Average
2*	0.159	53.13	65.52	-12.39	52.98	0.07	0.08	QP
3	0.238	30.17	52.17	-22.00	30.00	0.07	0.10	Average
4	0.238	40.67	62.17	-21.50	40.50	0.07	0.10	QP
5	0.318	30.25	49.75	-19.50	30.08	0.07	0.10	Average
6	0.318	39.12	59.75	-20.63	38.95	0.07	0.10	QP
7	0.433	19.05	47.20	-28.15	18.87	0.07	0.11	Average
8	0.433	36.48	57.20	-20.72	36.30	0.07	0.11	QP
9	1.839	20.06	46.00	-25.94	19.73	0.10	0.23	Average
10	1.839	32.44	56.00	-23.56	32.11	0.10	0.23	QP
11	9.451	21.40	50.00	-28.60	20.88	0.22	0.30	Average
12	9.451	28.54	60.00	-31.46	28.02	0.22	0.30	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation Mode	8DPSK	Test Freq. (MHz)	2480
Power Phase	Line	Test Configuration	2

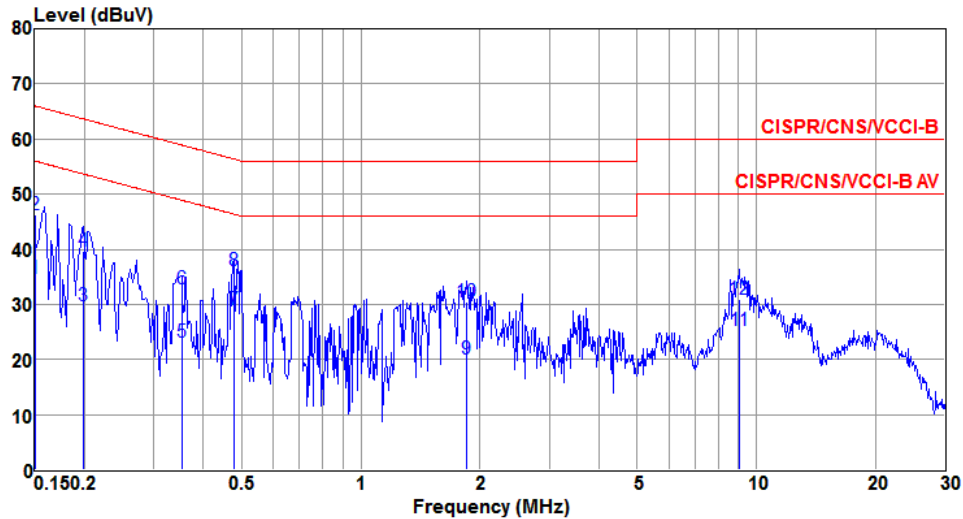

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.150	34.78	56.00	-21.22	34.63	0.07	0.08	Average
2	0.150	46.37	66.00	-19.63	46.22	0.07	0.08	QP
3	0.199	29.77	53.67	-23.90	29.61	0.07	0.09	Average
4	0.199	39.75	63.67	-23.92	39.59	0.07	0.09	QP
5	0.352	23.16	48.91	-25.75	22.98	0.07	0.11	Average
6	0.352	32.90	58.91	-26.01	32.72	0.07	0.11	QP
7*	0.479	29.10	46.36	-17.26	28.91	0.07	0.12	Average
8	0.479	36.05	56.36	-20.31	35.86	0.07	0.12	QP
9	1.848	19.99	46.00	-26.01	19.66	0.10	0.23	Average
10	1.848	30.55	56.00	-25.45	30.22	0.10	0.23	QP
11	9.059	25.21	50.00	-24.79	24.71	0.20	0.30	Average
12	9.059	31.02	60.00	-28.98	30.52	0.20	0.30	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation Mode	8DPSK	Test Freq. (MHz)	2480
Power Phase	Neutral	Test Configuration	2

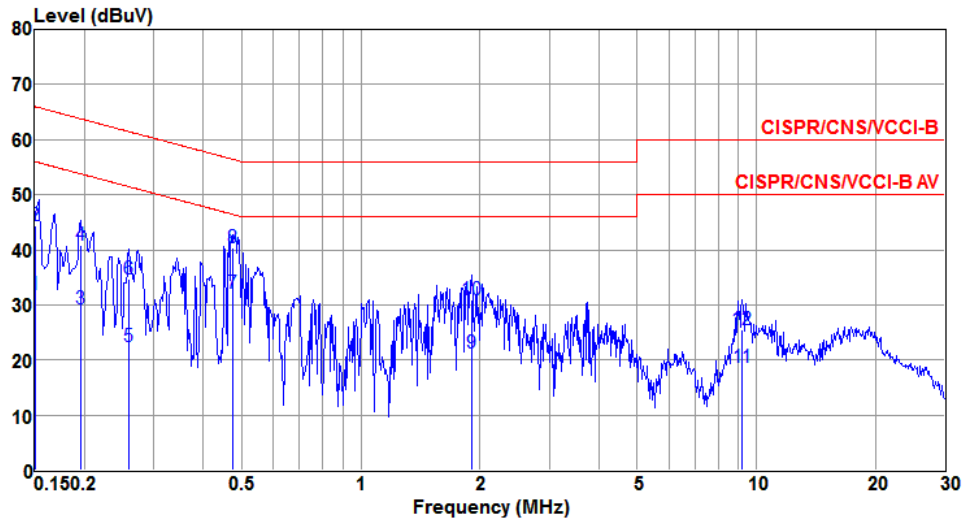

	Freq	Level	Limit	Over	Read	LISN	cable	
	MHz	dBuV	Line	Limit	Level	factor	loss	Remark
			dBuV	dB	dBuV	dB	dB	
1	0.150	31.93	56.00	-24.07	31.78	0.07	0.08	Average
2	0.150	44.32	66.00	-21.68	44.17	0.07	0.08	QP
3	0.195	29.24	53.80	-24.56	29.08	0.07	0.09	Average
4	0.195	40.88	63.80	-22.92	40.72	0.07	0.09	QP
5	0.259	22.34	51.47	-29.13	22.17	0.07	0.10	Average
6	0.259	34.67	61.47	-26.80	34.50	0.07	0.10	QP
7*	0.474	32.00	46.45	-14.45	31.81	0.07	0.12	Average
8	0.474	40.31	56.45	-16.14	40.12	0.07	0.12	QP
9	1.908	21.28	46.00	-24.72	20.95	0.10	0.23	Average
10	1.908	30.89	56.00	-25.11	30.56	0.10	0.23	QP
11	9.204	18.56	50.00	-31.44	18.04	0.22	0.30	Average
12	9.204	25.46	60.00	-34.54	24.94	0.22	0.30	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation Mode	8DPSK	Test Freq. (MHz)	2480
Power Phase	Line	Test Configuration	3

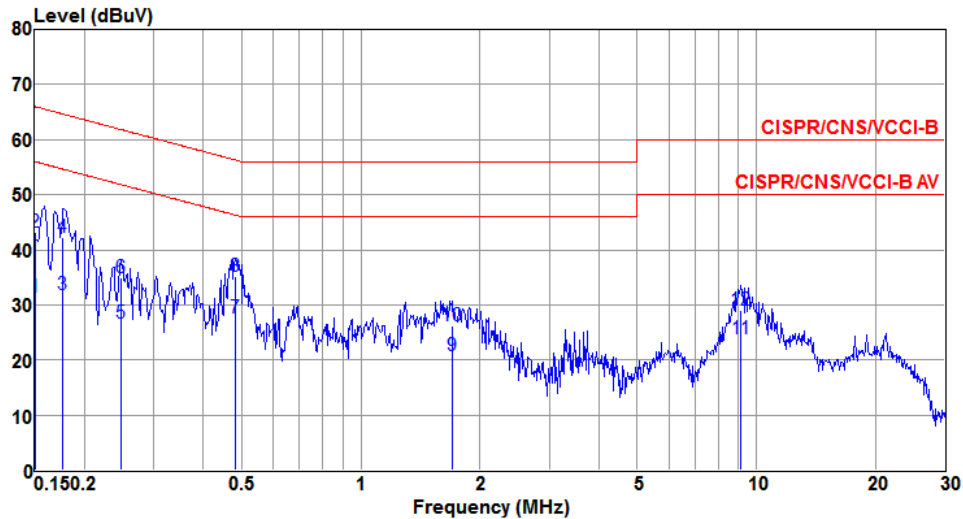

	Freq	Level	Limit	Over	Read	LISN	cable	
	MHz	dBuV	Line	Limit	Level	factor	loss	Remark
			dBuV	dB	dBuV	dB	dB	
1	0.150	31.39	56.00	-24.61	31.24	0.07	0.08	Average
2	0.150	43.09	66.00	-22.91	42.94	0.07	0.08	QP
3	0.177	31.98	54.64	-22.66	31.82	0.07	0.09	Average
4	0.177	42.32	64.64	-22.32	42.16	0.07	0.09	QP
5	0.247	26.71	51.86	-25.15	26.54	0.07	0.10	Average
6	0.247	34.90	61.86	-26.96	34.73	0.07	0.10	QP
7*	0.481	27.64	46.32	-18.68	27.45	0.07	0.12	Average
8	0.481	35.11	56.32	-21.21	34.92	0.07	0.12	QP
9	1.698	20.89	46.00	-25.11	20.57	0.10	0.22	Average
10	1.698	26.12	56.00	-29.88	25.80	0.10	0.22	QP
11	9.156	23.75	50.00	-26.25	23.25	0.20	0.30	Average
12	9.156	29.13	60.00	-30.87	28.63	0.20	0.30	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation Mode	8DPSK	Test Freq. (MHz)	2480
Power Phase	Neutral	Test Configuration	3

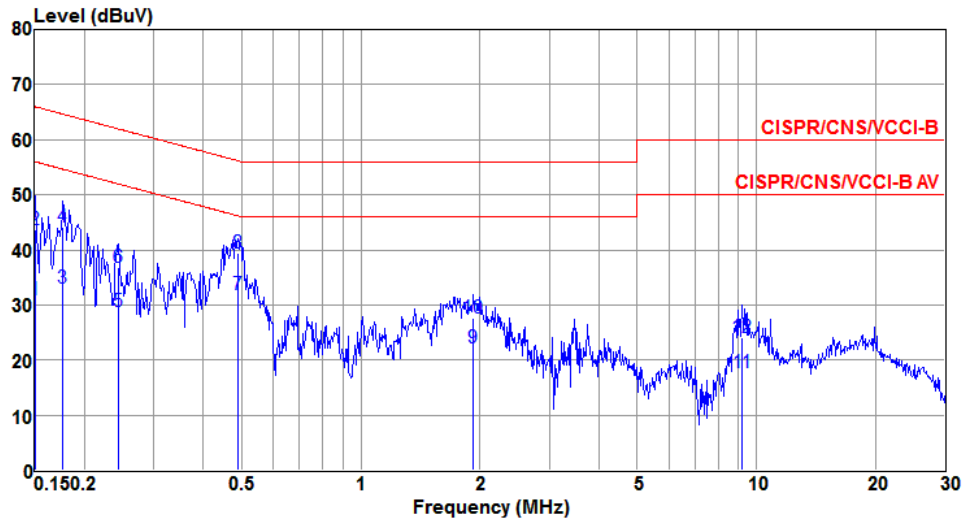

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.150	31.00	56.00	-25.00	30.85	0.07	0.08	Average
2	0.150	43.59	66.00	-22.41	43.44	0.07	0.08	QP
3	0.177	32.95	54.64	-21.69	32.79	0.07	0.09	Average
4	0.177	44.09	64.64	-20.55	43.93	0.07	0.09	QP
5	0.244	28.87	51.95	-23.08	28.70	0.07	0.10	Average
6	0.244	36.83	61.95	-25.12	36.66	0.07	0.10	QP
7*	0.489	31.82	46.19	-14.37	31.63	0.07	0.12	Average
8	0.489	39.46	56.19	-16.73	39.27	0.07	0.12	QP
9	1.928	22.24	46.00	-23.76	21.90	0.10	0.24	Average
10	1.928	27.64	56.00	-28.36	27.30	0.10	0.24	QP
11	9.204	17.59	50.00	-32.41	17.07	0.22	0.30	Average
12	9.204	24.03	60.00	-35.97	23.51	0.22	0.30	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation Mode	8DPSK	Test Freq. (MHz)	2480
Power Phase	Line	Test Configuration	4

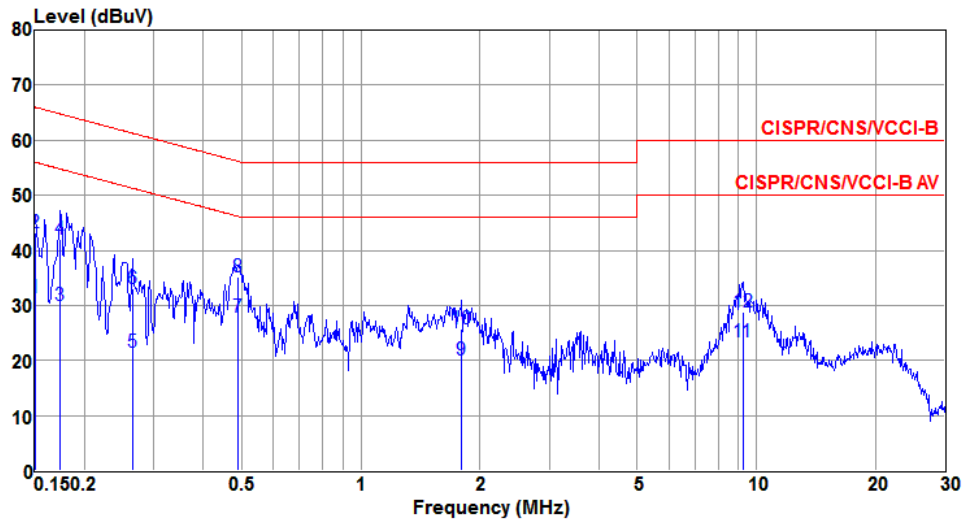

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.150	31.39	56.00	-24.61	31.24	0.07	0.08	Average
2	0.150	43.25	66.00	-22.75	43.10	0.07	0.08	QP
3	0.174	30.08	54.77	-24.69	29.92	0.07	0.09	Average
4	0.174	42.09	64.77	-22.68	41.93	0.07	0.09	QP
5	0.264	21.39	51.29	-29.90	21.22	0.07	0.10	Average
6	0.264	33.02	61.29	-28.27	32.85	0.07	0.10	QP
7*	0.489	27.85	46.19	-18.34	27.66	0.07	0.12	Average
8	0.489	35.13	56.19	-21.06	34.94	0.07	0.12	QP
9	1.800	20.06	46.00	-25.94	19.73	0.10	0.23	Average
10	1.800	25.63	56.00	-30.37	25.30	0.10	0.23	QP
11	9.253	23.43	50.00	-26.57	22.93	0.20	0.30	Average
12	9.253	28.81	60.00	-31.19	28.31	0.20	0.30	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Modulation Mode	8DPSK	Test Freq. (MHz)	2480
Power Phase	Neutral	Test Configuration	4

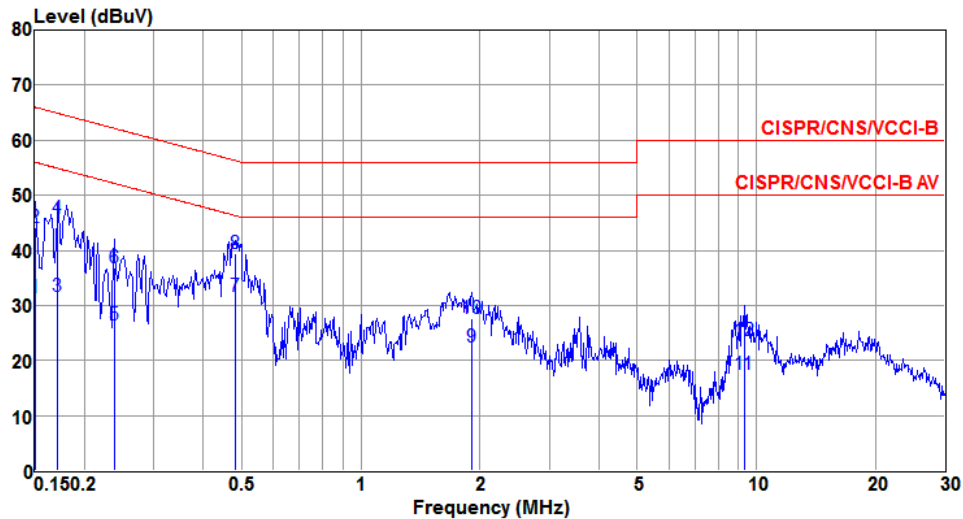

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.150	31.48	56.00	-24.52	31.33	0.07	0.08	Average
2	0.150	44.09	66.00	-21.91	43.94	0.07	0.08	QP
3	0.171	31.74	54.90	-23.16	31.59	0.07	0.08	Average
4	0.171	45.71	64.90	-19.19	45.56	0.07	0.08	QP
5	0.238	26.39	52.17	-25.78	26.22	0.07	0.10	Average
6	0.238	36.75	62.17	-25.42	36.58	0.07	0.10	QP
7*	0.481	31.56	46.32	-14.76	31.37	0.07	0.12	Average
8	0.481	39.38	56.32	-16.94	39.19	0.07	0.12	QP
9	1.908	22.35	46.00	-23.65	22.02	0.10	0.23	Average
10	1.908	27.65	56.00	-28.35	27.32	0.10	0.23	QP
11	9.302	17.55	50.00	-32.45	17.03	0.22	0.30	Average
12	9.302	23.50	60.00	-36.50	22.98	0.22	0.30	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

3.2 Unwanted Emissions into Restricted Frequency Bands

3.2.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.2.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. Radiated emission above 1GHz / Peak value
RBW=1MHz, VBW=3MHz and Peak detector
Radiated emission above 1GHz / Average value for harmonics
The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula for DH5 packet type which has worst duty factor:
3.
$$20\log (\text{Duty cycle}) = 20\log \frac{1s / 1600 * 5}{100 \text{ ms}} = -30.1\text{dB}$$
4. Radiated emission above 1GHz / Average value for other emissions
RBW=1MHz, VBW=1/T and Peak detector

3.2.3 Test Setup

Radiated Emissions below 1 GHz

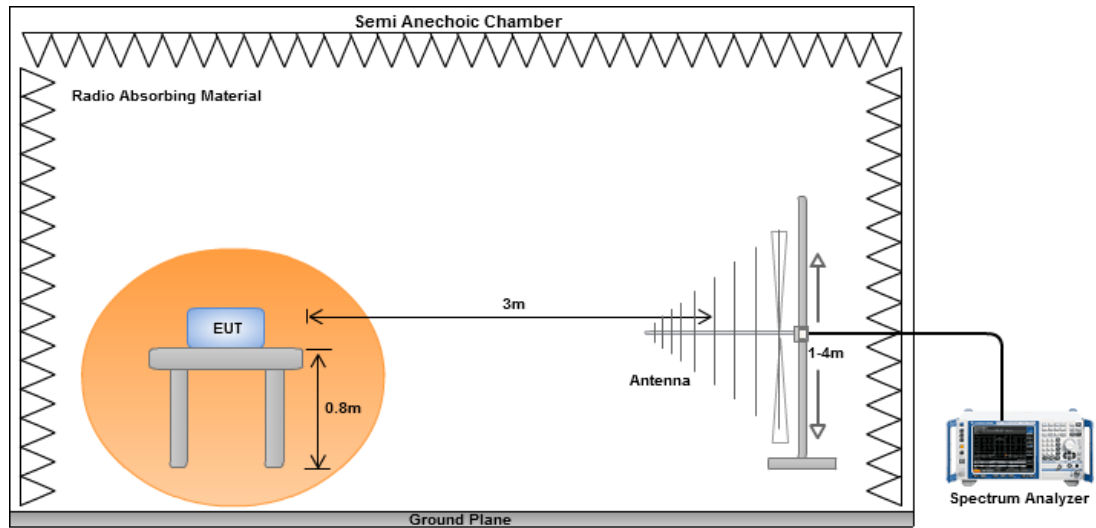


Radiated Emissions above 1 GHz

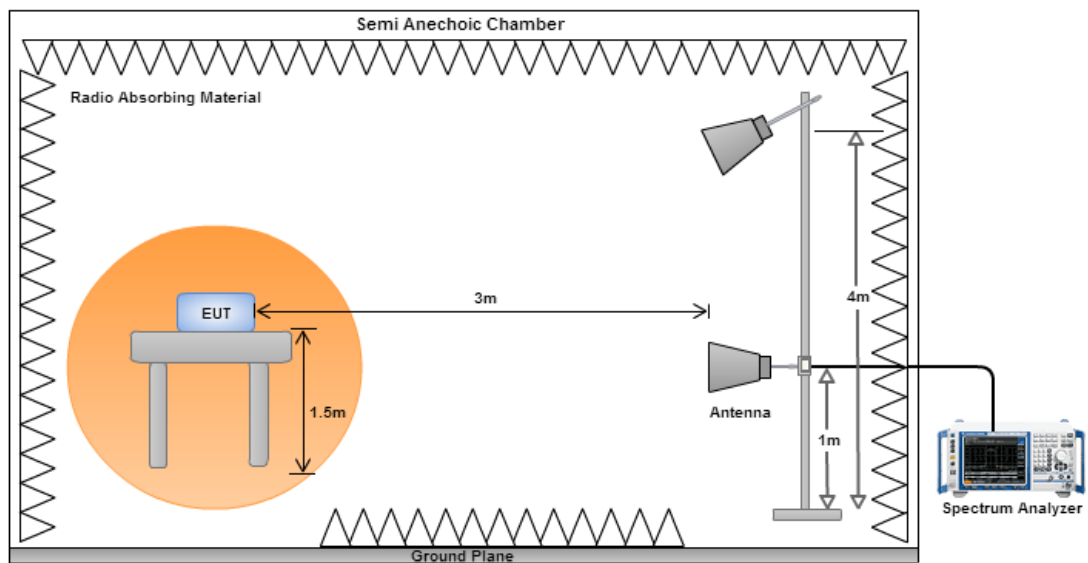

3.2.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	1

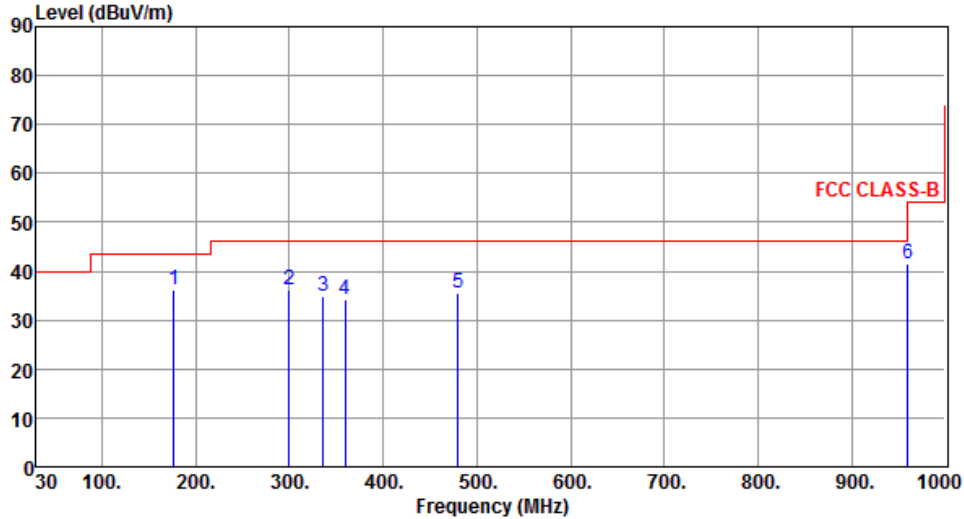


The graph displays the radiated unwanted emissions level in dBuV/m against frequency in MHz from 30 to 1000 MHz. A red line represents the FCC CLASS-B limit, which is 40 dBuV/m from 30 to 100 MHz, 45 dBuV/m from 100 to 300 MHz, and 55 dBuV/m from 300 to 1000 MHz. Six blue vertical lines indicate measured peaks at 176.47 MHz, 299.66 MHz, 336.52 MHz, 359.80 MHz, 480.08 MHz, and 960.23 MHz. The peak levels are 36.07, 36.35, 34.74, 34.22, 35.47, and 41.53 dBuV/m respectively. The margins relative to the limit are -7.43, -9.65, -11.26, -11.78, -10.53, and -12.47 dB.

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	176.47	36.07	43.50	-7.43	50.93	-14.86	Peak	---	---
2	299.66	36.35	46.00	-9.65	49.00	-12.65	Peak	---	---
3	336.52	34.74	46.00	-11.26	46.51	-11.77	Peak	---	---
4	359.80	34.22	46.00	-11.78	45.40	-11.18	Peak	---	---
5	480.08	35.47	46.00	-10.53	43.56	-8.09	Peak	---	---
6	960.23	41.53	54.00	-12.47	41.18	0.35	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	1

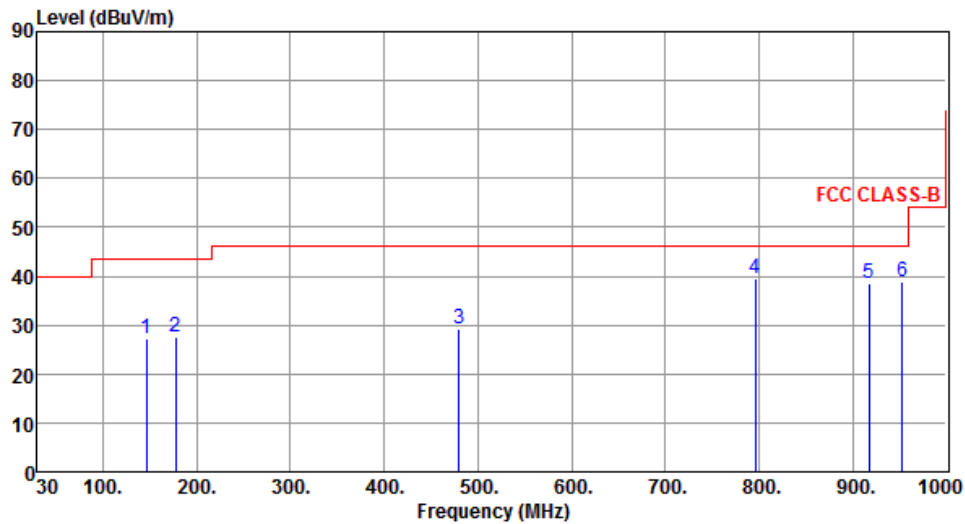

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	146.40	27.07	43.50	-16.43	40.61	-13.54	Peak	---	---
2	177.44	27.71	43.50	-15.79	42.68	-14.97	Peak	---	---
3	480.08	29.37	46.00	-16.63	37.46	-8.09	Peak	---	---
4	796.30	39.65	46.00	-6.35	42.26	-2.61	Peak	---	---
5	917.55	38.53	46.00	-7.47	38.86	-0.33	Peak	---	---
6	952.47	38.69	46.00	-7.31	38.41	0.28	Peak	---	---


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	2

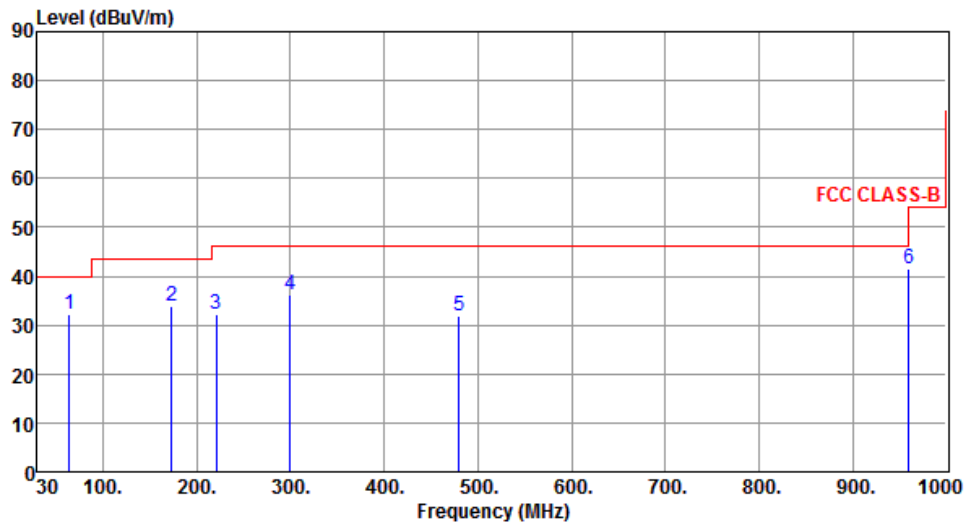

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	63.95	32.09	40.00	-7.91	46.94	-14.85	Peak	---	---
2	173.56	34.00	43.50	-9.50	48.52	-14.52	Peak	---	---
3	221.09	32.19	46.00	-13.81	48.08	-15.89	Peak	---	---
4	299.66	36.34	46.00	-9.66	48.99	-12.65	Peak	---	---
5	480.08	32.05	46.00	-13.95	40.14	-8.09	Peak	---	---
6	960.23	41.42	54.00	-12.58	41.07	0.35	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	2

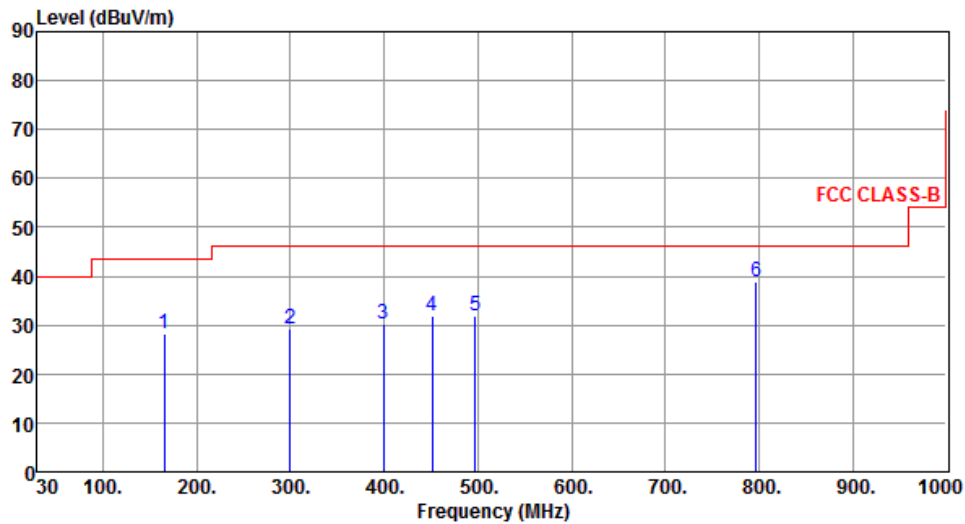

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	165.80	28.17	43.50	-15.33	42.06	-13.89	Peak	---	---
2	299.66	29.10	46.00	-16.90	41.75	-12.65	Peak	---	---
3	399.57	30.36	46.00	-15.64	40.39	-10.03	Peak	---	---
4	450.98	31.96	46.00	-14.04	40.71	-8.75	Peak	---	---
5	497.54	31.92	46.00	-14.08	39.61	-7.69	Peak	---	---
6	797.27	38.73	46.00	-7.27	41.33	-2.60	Peak	---	---


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	3

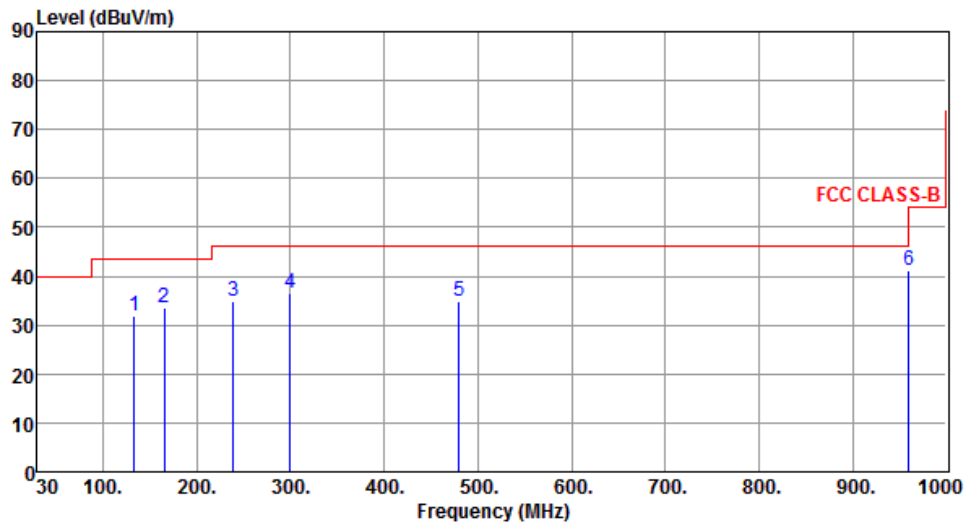

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	133.79	31.73	43.50	-11.77	46.00	-14.27	Peak	---	---
2	165.80	33.48	43.50	-10.02	47.37	-13.89	Peak	---	---
3	239.52	34.79	46.00	-11.21	49.55	-14.76	Peak	---	---
4	299.66	36.46	46.00	-9.54	49.11	-12.65	Peak	---	---
5	480.08	34.76	46.00	-11.24	42.85	-8.09	Peak	---	---
6	960.23	41.02	54.00	-12.98	40.67	0.35	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	3

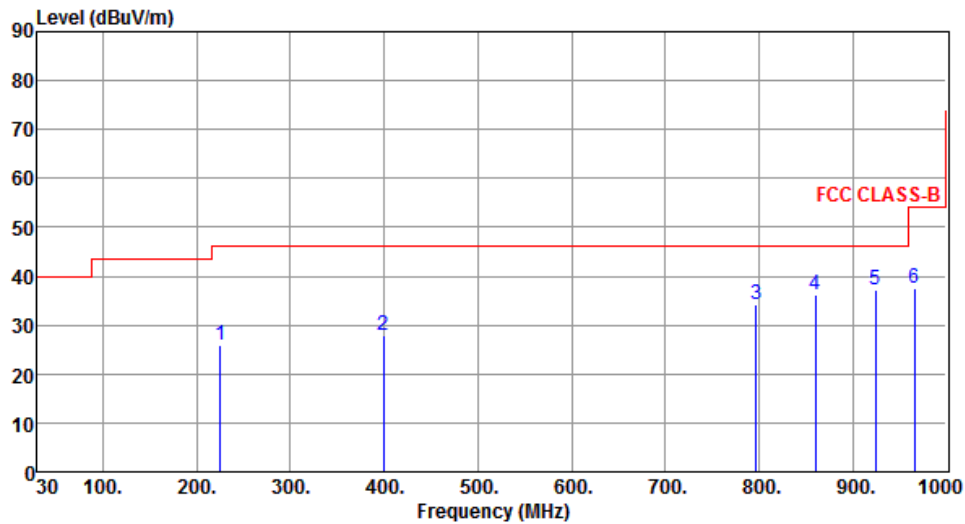

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	224.97	26.05	46.00	-19.95	41.71	-15.66	Peak	---	---
2	399.57	27.77	46.00	-18.23	37.80	-10.03	Peak	---	---
3	797.27	34.31	46.00	-11.69	36.91	-2.60	Peak	---	---
4	860.32	36.32	46.00	-9.68	37.83	-1.51	Peak	---	---
5	924.34	37.35	46.00	-8.65	37.57	-0.22	Peak	---	---
6	966.05	37.42	54.00	-16.58	37.03	0.39	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	4

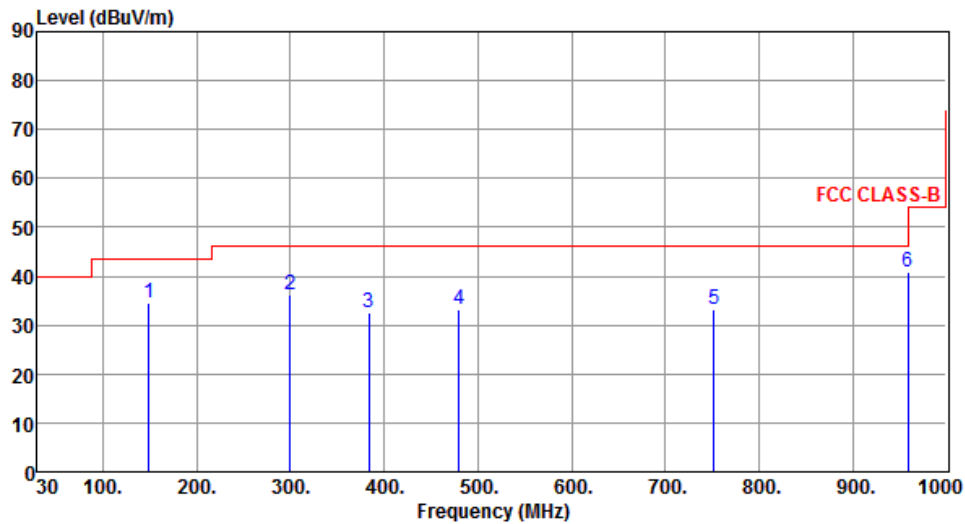

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	149.31	34.41	43.50	-9.09	47.85	-13.44	Peak	---	---
2	299.66	36.16	46.00	-9.84	48.81	-12.65	Peak	---	---
3	384.05	32.44	46.00	-13.56	42.91	-10.47	Peak	---	---
4	480.08	33.08	46.00	-12.92	41.17	-8.09	Peak	---	---
5	751.68	33.29	46.00	-12.71	36.47	-3.18	Peak	---	---
6	959.26	40.76	46.00	-5.24	40.41	0.35	Peak	---	---


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	4

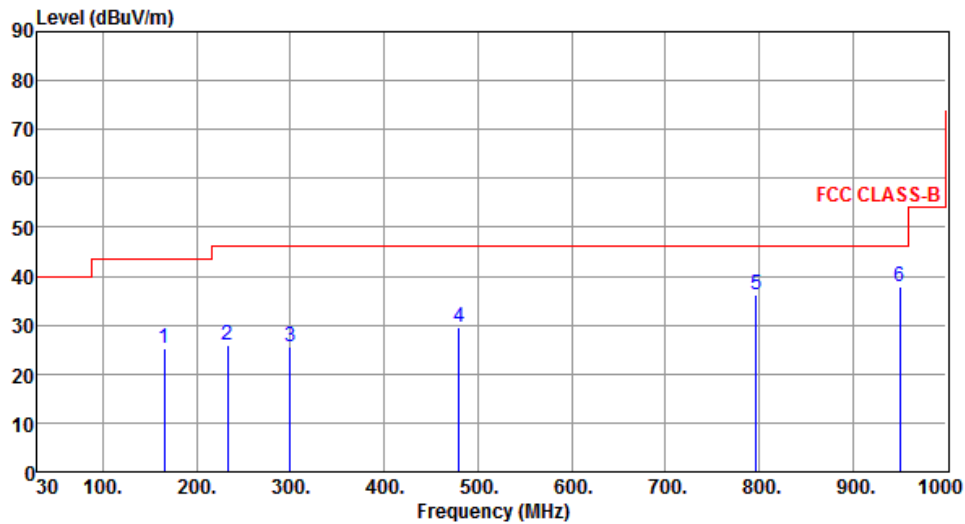

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	165.80	25.30	43.50	-18.20	39.19	-13.89	Peak	---	---
2	232.73	26.01	46.00	-19.99	41.20	-15.19	Peak	---	---
3	299.66	25.54	46.00	-20.46	38.19	-12.65	Peak	---	---
4	480.08	29.62	46.00	-16.38	37.71	-8.09	Peak	---	---
5	797.27	36.05	46.00	-9.95	38.65	-2.60	Peak	---	---
6	950.53	37.91	46.00	-8.09	37.64	0.27	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.2.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK


Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	1

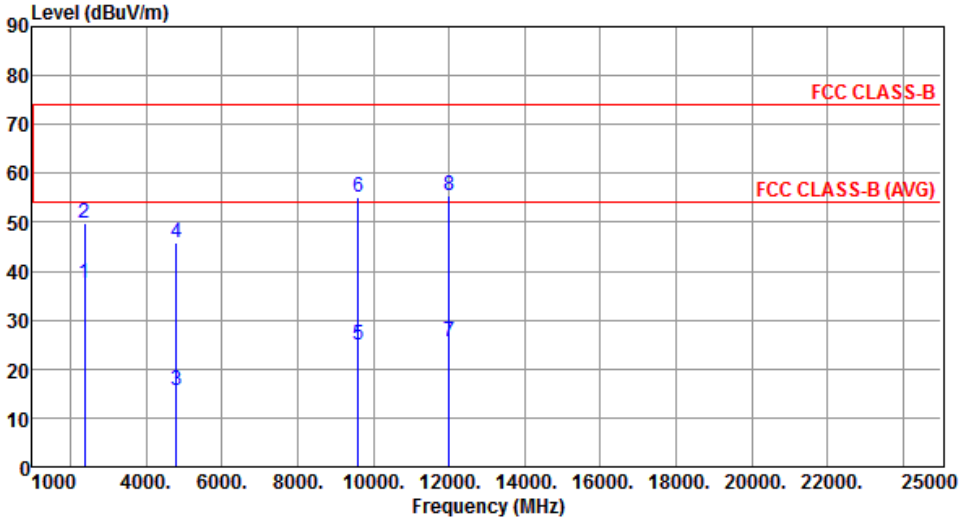

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.49	54.00	-16.51	38.71	-1.22	Average	---	---
2	2390.00	49.73	74.00	-24.27	50.95	-1.22	Peak	---	---
3	4804.00	15.65	54.00	-38.35	8.54	7.11	Average	---	---
4	4804.00	45.76	74.00	-28.24	38.65	7.11	Peak	---	---
5	9608.00	24.99	54.00	-29.01	9.53	15.46	Average	---	---
6	9608.00	55.09	74.00	-18.91	39.63	15.46	Peak	---	---
7	12010.00	25.52	54.00	-28.48	8.97	16.55	Average	---	---
8	12010.00	55.62	74.00	-18.38	39.07	16.55	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical	Test Configuration	1

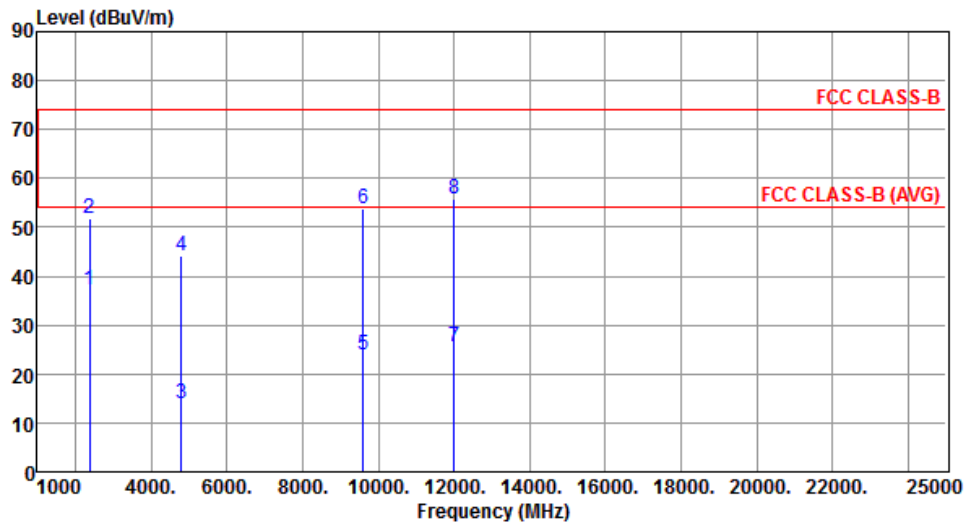


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.27	54.00	-16.73	38.49	-1.22	Average	---	---
2	2390.00	51.85	74.00	-22.15	53.07	-1.22	Peak	---	---
3	4804.00	14.00	54.00	-40.00	6.89	7.11	Average	---	---
4	4804.00	44.10	74.00	-29.90	36.99	7.11	Peak	---	---
5	9608.00	23.75	54.00	-30.25	8.29	15.46	Average	---	---
6	9608.00	53.85	74.00	-20.15	38.39	15.46	Peak	---	---
7	12010.00	25.65	54.00	-28.35	9.10	16.55	Average	---	---
8	12010.00	55.75	74.00	-18.25	39.20	16.55	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	1

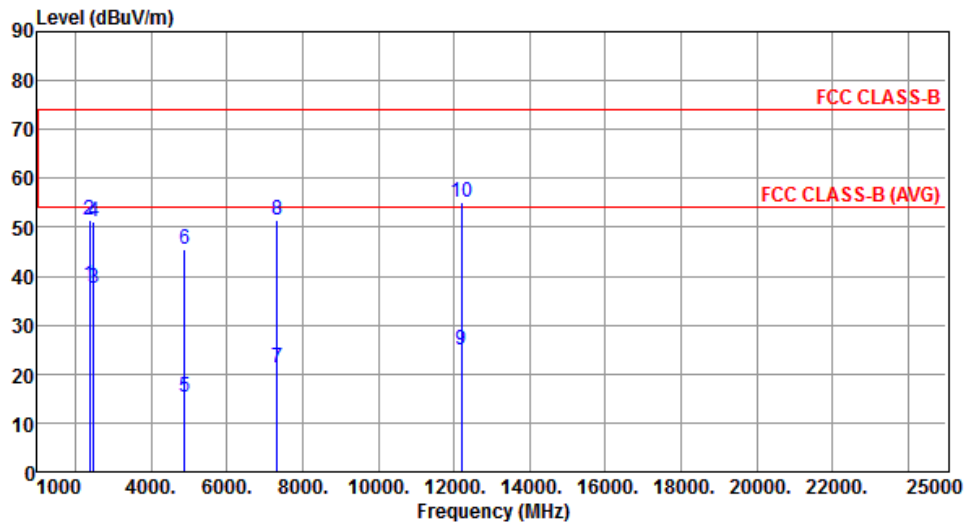


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.08	54.00	-15.92	39.30	-1.22	Average	---	---
2	2390.00	51.31	74.00	-22.69	52.53	-1.22	Peak	---	---
3	2483.50	37.62	54.00	-16.38	38.51	-0.89	Average	---	---
4	2483.50	51.18	74.00	-22.82	52.07	-0.89	Peak	---	---
5	4882.00	15.34	54.00	-38.66	8.57	6.77	Average	---	---
6	4882.00	45.44	74.00	-28.56	38.67	6.77	Peak	---	---
7	7323.00	21.42	54.00	-32.58	10.43	10.99	Average	---	---
8	7323.00	51.52	74.00	-22.48	40.53	10.99	Peak	---	---
9	12205.00	25.01	54.00	-28.99	8.75	16.26	Average	---	---
10	12205.00	55.11	74.00	-18.89	38.85	16.26	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	1

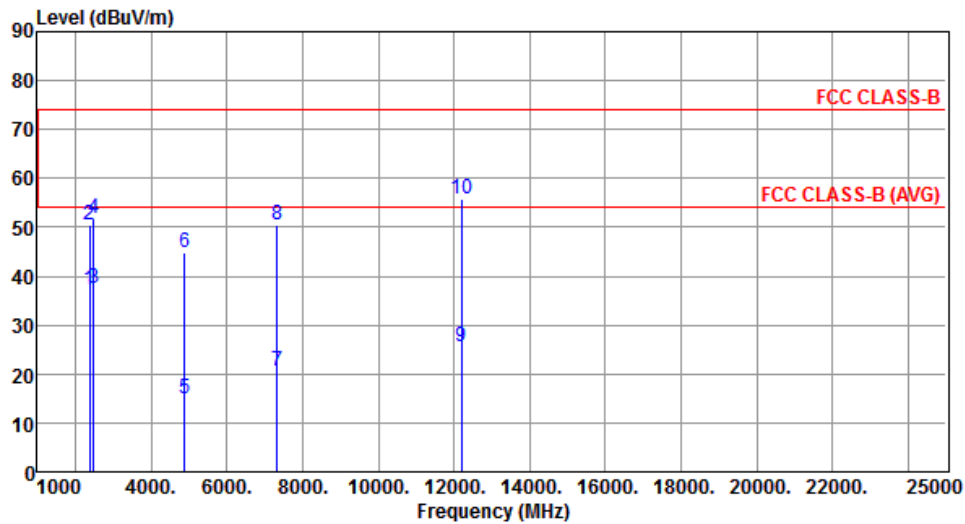


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.26	54.00	-16.74	38.48	-1.22	Average	---	---
2	2390.00	50.58	74.00	-23.42	51.80	-1.22	Peak	---	---
3	2483.50	37.54	54.00	-16.46	38.43	-0.89	Average	---	---
4	2483.50	51.65	74.00	-22.35	52.54	-0.89	Peak	---	---
5	4882.00	14.79	54.00	-39.21	8.02	6.77	Average	---	---
6	4882.00	44.89	74.00	-29.11	38.12	6.77	Peak	---	---
7	7323.00	20.45	54.00	-33.55	9.46	10.99	Average	---	---
8	7323.00	50.55	74.00	-23.45	39.56	10.99	Peak	---	---
9	12205.00	25.74	54.00	-28.26	9.48	16.26	Average	---	---
10	12205.00	55.84	74.00	-18.16	39.58	16.26	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	1

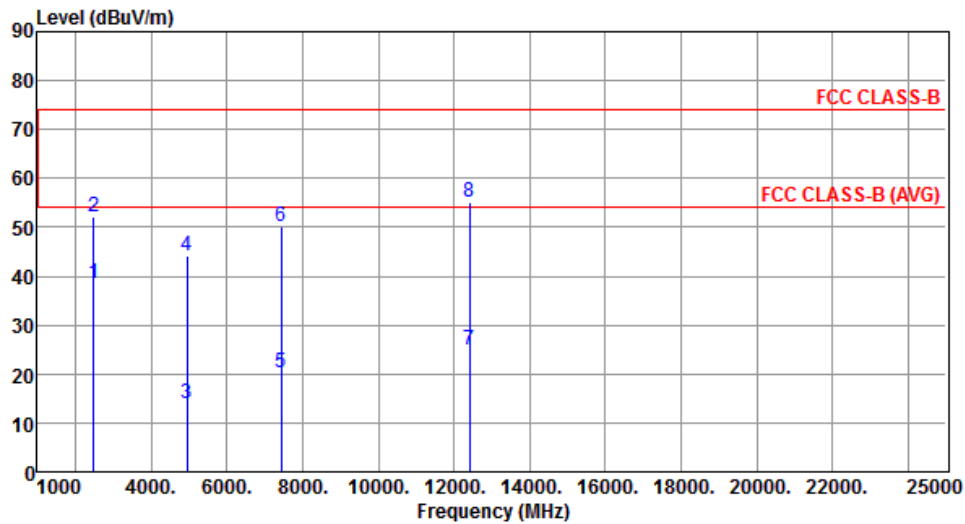


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	38.64	54.00	-15.36	39.53	-0.89	Average	---	---
2	2483.50	52.17	74.00	-21.83	53.06	-0.89	Peak	---	---
3	4960.00	14.06	54.00	-39.94	7.60	6.46	Average	---	---
4	4960.00	44.16	74.00	-29.84	37.70	6.46	Peak	---	---
5	7440.00	20.12	54.00	-33.88	8.85	11.27	Average	---	---
6	7440.00	50.22	74.00	-23.78	38.95	11.27	Peak	---	---
7	12400.00	24.92	54.00	-29.08	8.95	15.97	Average	---	---
8	12400.00	55.02	74.00	-18.98	39.05	15.97	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	1

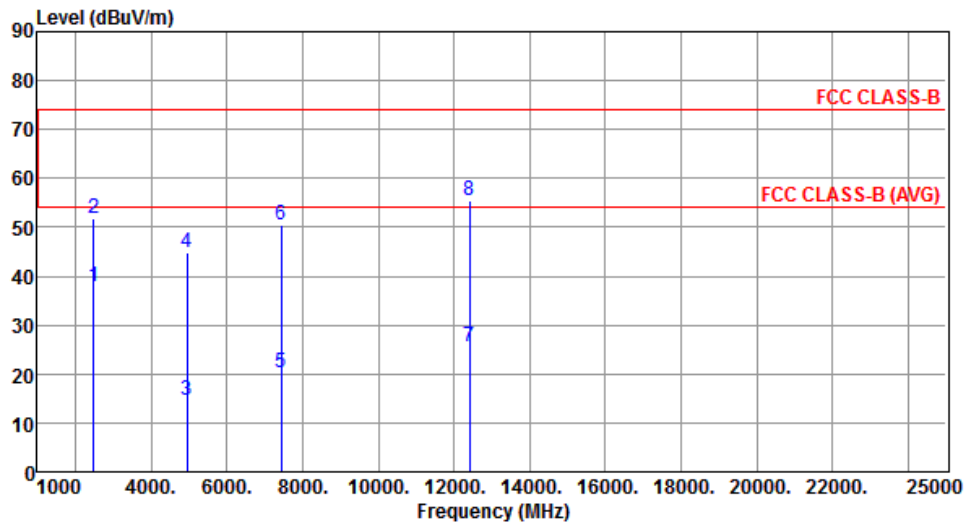


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	37.75	54.00	-16.25	38.64	-0.89	Average	---	---
2	2483.50	51.68	74.00	-22.32	52.57	-0.89	Peak	---	---
3	4960.00	14.67	54.00	-39.33	8.21	6.46	Average	---	---
4	4960.00	44.77	74.00	-29.23	38.31	6.46	Peak	---	---
5	7440.00	20.35	54.00	-33.65	9.08	11.27	Average	---	---
6	7440.00	50.45	74.00	-23.55	39.18	11.27	Peak	---	---
7	12400.00	25.41	54.00	-28.59	9.44	15.97	Average	---	---
8	12400.00	55.51	74.00	-18.49	39.54	15.97	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	2

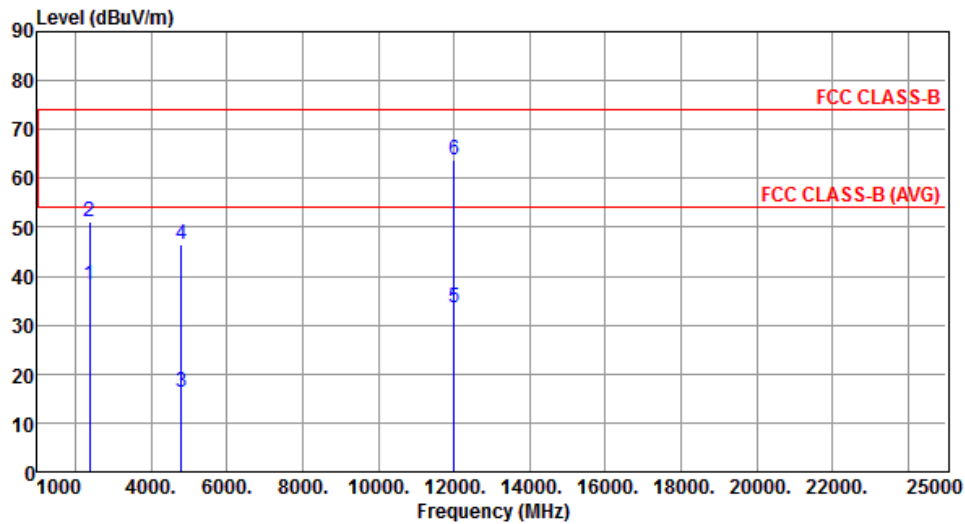


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.13	54.00	-15.87	39.35	-1.22	Average	---	---
2	2390.00	51.15	74.00	-22.85	52.37	-1.22	Peak	---	---
3	4804.00	16.40	54.00	-37.60	9.29	7.11	Average	---	---
4	4804.00	46.50	74.00	-27.50	39.39	7.11	Peak	---	---
5	12010.00	33.54	54.00	-20.46	16.99	16.55	Average	---	---
6	12010.00	63.64	74.00	-10.36	47.09	16.55	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical	Test Configuration	2

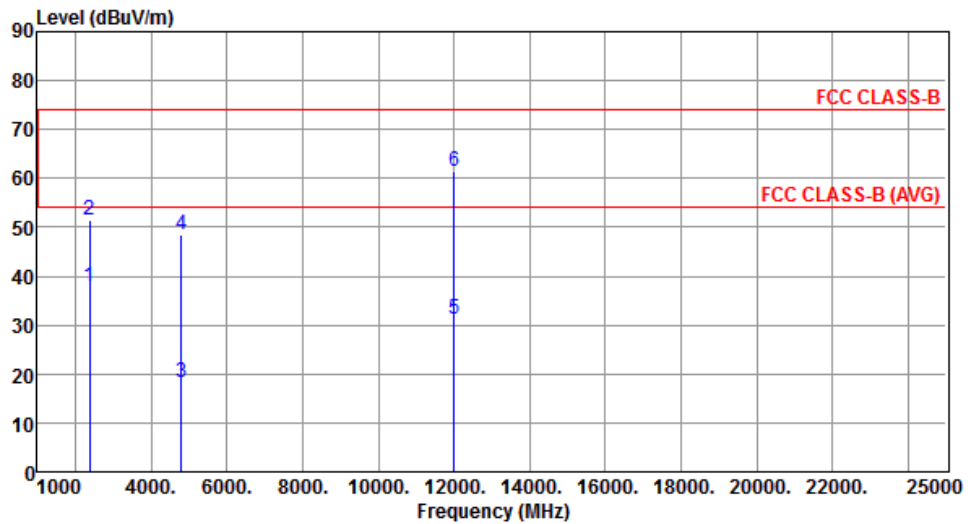


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.72	54.00	-16.28	38.94	-1.22	Average	---	---
2	2390.00	51.42	74.00	-22.58	52.64	-1.22	Peak	---	---
3	4804.00	18.33	54.00	-35.67	11.22	7.11	Average	---	---
4	4804.00	48.43	74.00	-25.57	41.32	7.11	Peak	---	---
5	12010.00	31.29	54.00	-22.71	14.74	16.55	Average	---	---
6	12010.00	61.39	74.00	-12.61	44.84	16.55	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	2

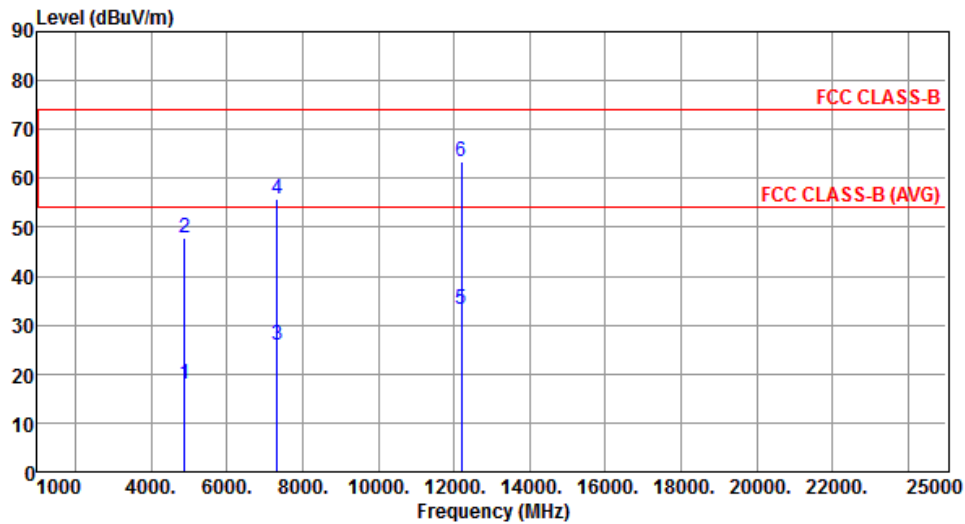


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	4882.00	17.77	54.00	-36.23	11.00	6.77	Average	---	---
2	4882.00	47.87	74.00	-26.13	41.10	6.77	Peak	---	---
3	7323.00	25.85	54.00	-28.15	14.86	10.99	Average	---	---
4	7323.00	55.95	74.00	-18.05	44.96	10.99	Peak	---	---
5	12205.00	33.20	54.00	-20.80	16.94	16.26	Average	---	---
6	12205.00	63.30	74.00	-10.70	47.04	16.26	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	2

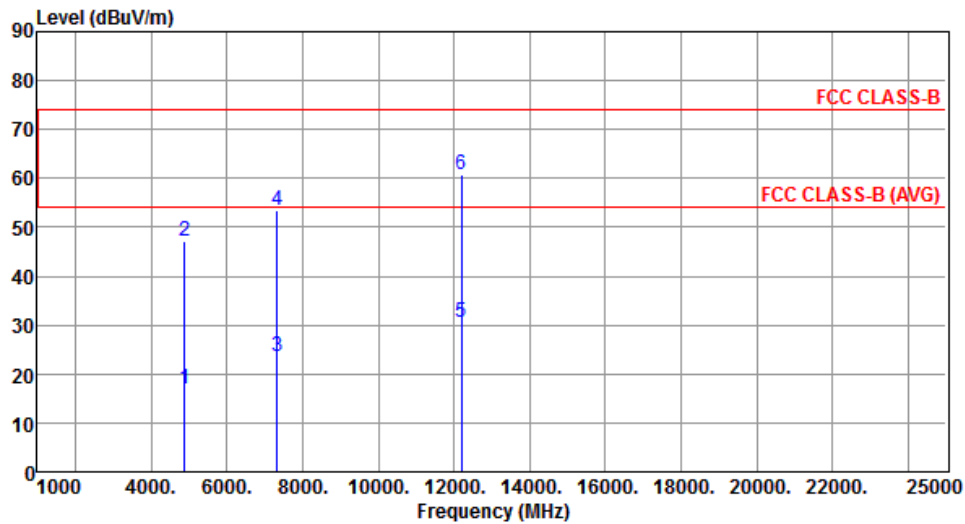


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	4882.00	17.03	54.00	-36.97	10.26	6.77	Average	---	---
2	4882.00	47.13	74.00	-26.87	40.36	6.77	Peak	---	---
3	7323.00	23.42	54.00	-30.58	12.43	10.99	Average	---	---
4	7323.00	53.52	74.00	-20.48	42.53	10.99	Peak	---	---
5	12205.00	30.67	54.00	-23.33	14.41	16.26	Average	---	---
6	12205.00	60.76	74.00	-13.24	44.50	16.26	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	2

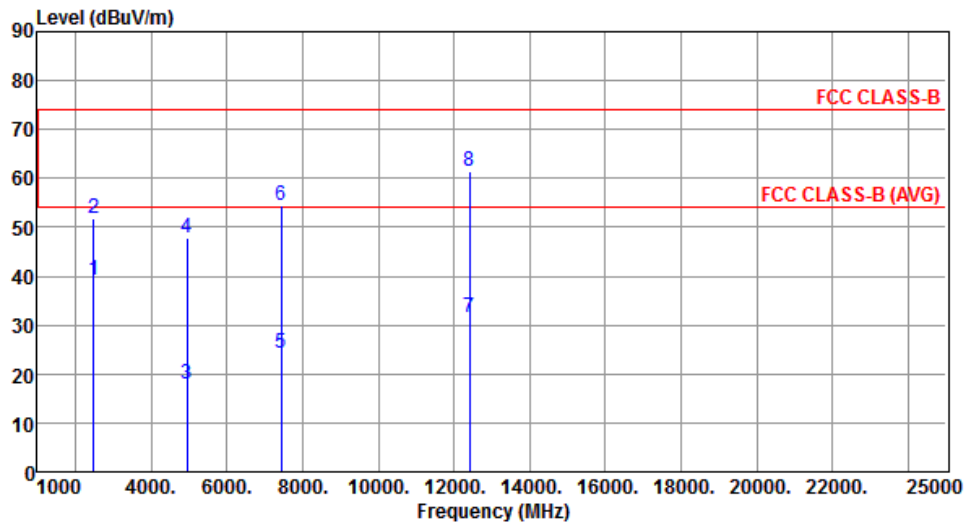


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	39.24	54.00	-14.76	40.13	-0.89	Average	---	---
2	2483.50	51.90	74.00	-22.10	52.79	-0.89	Peak	---	---
3	4960.00	17.80	54.00	-36.20	11.34	6.46	Average	---	---
4	4960.00	47.90	74.00	-26.10	41.44	6.46	Peak	---	---
5	7440.00	24.24	54.00	-29.76	12.97	11.27	Average	---	---
6	7440.00	54.34	74.00	-19.66	43.07	11.27	Peak	---	---
7	12400.00	31.49	54.00	-22.51	15.52	15.97	Average	---	---
8	12400.00	61.59	74.00	-12.41	45.62	15.97	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	2

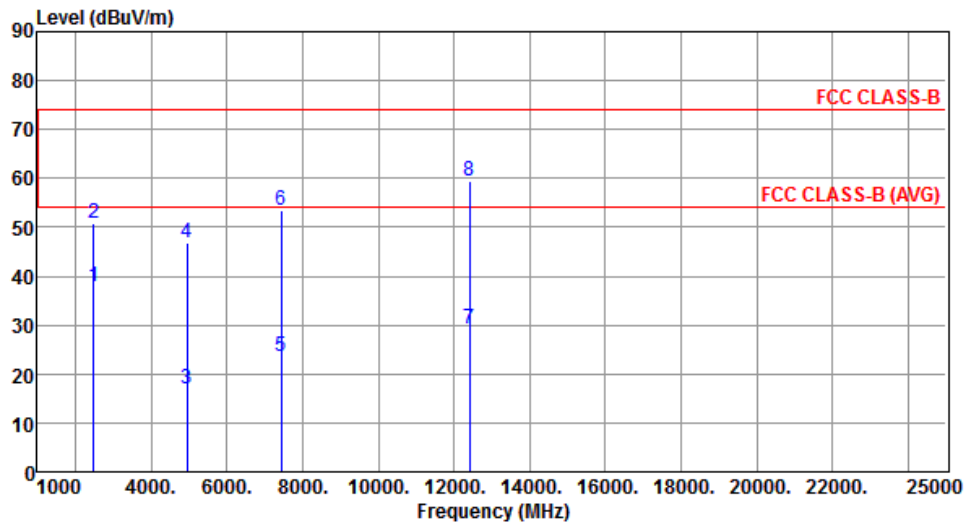


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	37.82	54.00	-16.18	38.71	-0.89	Average	---	---
2	2483.50	50.74	74.00	-23.26	51.63	-0.89	Peak	---	---
3	4960.00	16.81	54.00	-37.19	10.35	6.46	Average	---	---
4	4960.00	46.91	74.00	-27.09	40.45	6.46	Peak	---	---
5	7440.00	23.49	54.00	-30.51	12.22	11.27	Average	---	---
6	7440.00	53.59	74.00	-20.41	42.32	11.27	Peak	---	---
7	12400.00	29.19	54.00	-24.81	13.22	15.97	Average	---	---
8	12400.00	59.29	74.00	-14.71	43.32	15.97	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	3

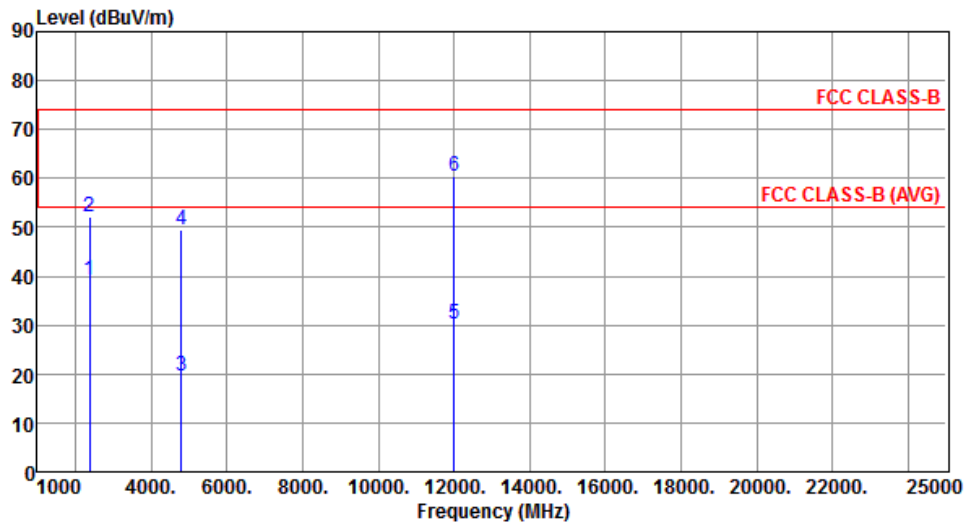


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.29	54.00	-14.71	40.51	-1.22	Average	---	---
2	2390.00	51.98	74.00	-22.02	53.20	-1.22	Peak	---	---
3	4804.00	19.44	54.00	-34.56	12.33	7.11	Average	---	---
4	4804.00	49.54	74.00	-24.46	42.43	7.11	Peak	---	---
5	12010.00	30.30	54.00	-23.70	13.75	16.55	Average	---	---
6	12010.00	60.40	74.00	-13.60	43.85	16.55	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical	Test Configuration	3

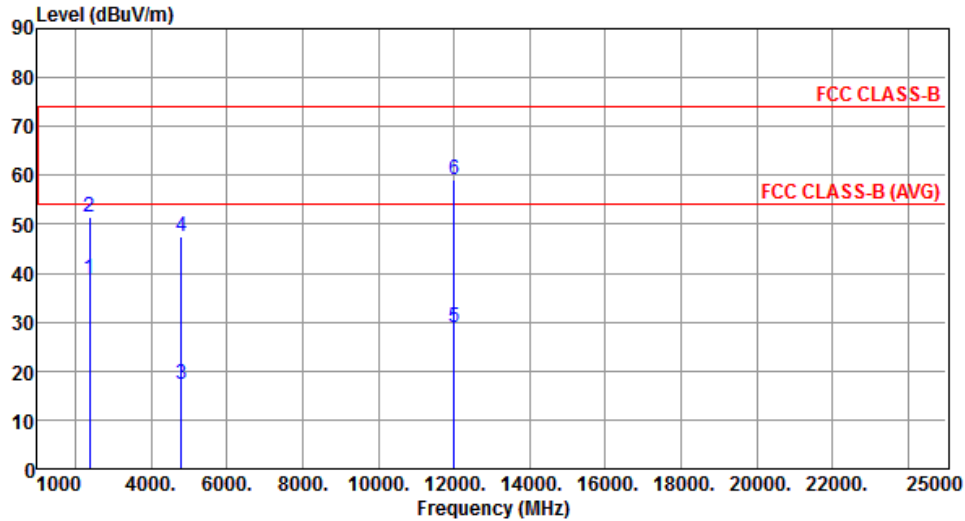


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.88	54.00	-15.12	40.10	-1.22	Average	---	---
2	2390.00	51.62	74.00	-22.38	52.84	-1.22	Peak	---	---
3	4804.00	17.32	54.00	-36.68	10.21	7.11	Average	---	---
4	4804.00	47.42	74.00	-26.58	40.31	7.11	Peak	---	---
5	12010.00	28.88	54.00	-25.12	12.33	16.55	Average	---	---
6	12010.00	58.98	74.00	-15.02	42.43	16.55	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	3

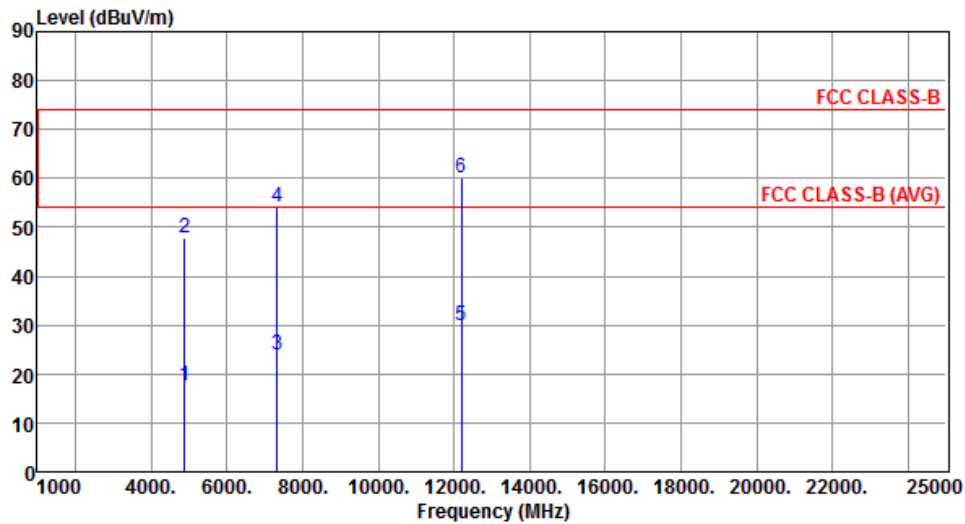


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	4882.00	17.71	54.00	-36.29	10.94	6.77	Average	---	---
2	4882.00	47.81	74.00	-26.19	41.04	6.77	Peak	---	---
3	7323.00	23.87	54.00	-30.13	12.88	10.99	Average	---	---
4	7323.00	53.97	74.00	-20.03	42.98	10.99	Peak	---	---
5	12205.00	30.01	54.00	-23.99	13.75	16.26	Average	---	---
6	12205.00	60.11	74.00	-13.89	43.85	16.26	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	3

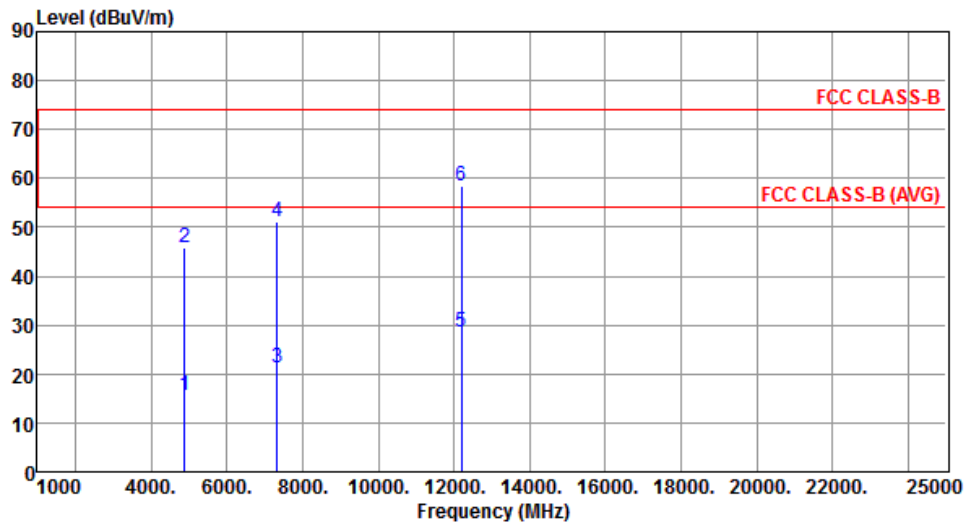


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	4882.00	15.64	54.00	-38.36	8.87	6.77	Average	---	---
2	4882.00	45.74	74.00	-28.26	38.97	6.77	Peak	---	---
3	7323.00	21.09	54.00	-32.91	10.10	10.99	Average	---	---
4	7323.00	51.19	74.00	-22.81	40.20	10.99	Peak	---	---
5	12205.00	28.40	54.00	-25.60	12.14	16.26	Average	---	---
6	12205.00	58.50	74.00	-15.50	42.24	16.26	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	3

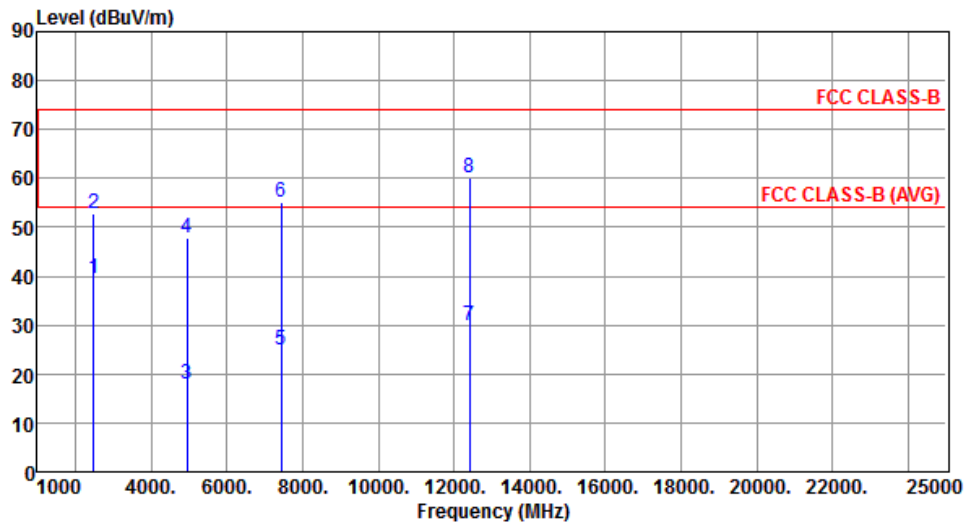


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	39.44	54.00	-14.56	40.33	-0.89	Average	---	---
2	2483.50	52.79	74.00	-21.21	53.68	-0.89	Peak	---	---
3	4960.00	17.80	54.00	-36.20	11.34	6.46	Average	---	---
4	4960.00	47.90	74.00	-26.10	41.44	6.46	Peak	---	---
5	7440.00	25.03	54.00	-28.97	13.76	11.27	Average	---	---
6	7440.00	55.13	74.00	-18.87	43.86	11.27	Peak	---	---
7	12400.00	29.98	54.00	-24.02	14.01	15.97	Average	---	---
8	12400.00	60.08	74.00	-13.92	44.11	15.97	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	3

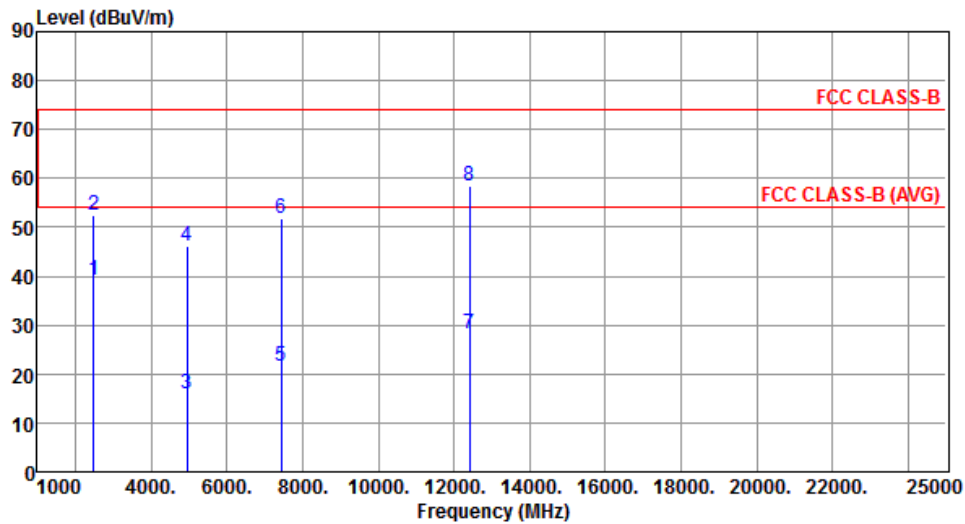


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	39.24	54.00	-14.76	40.13	-0.89	Average	---	---
2	2483.50	52.37	74.00	-21.63	53.26	-0.89	Peak	---	---
3	4960.00	16.04	54.00	-37.96	9.58	6.46	Average	---	---
4	4960.00	46.14	74.00	-27.86	39.68	6.46	Peak	---	---
5	7440.00	21.59	54.00	-32.41	10.32	11.27	Average	---	---
6	7440.00	51.69	74.00	-22.31	40.42	11.27	Peak	---	---
7	12400.00	28.31	54.00	-25.69	12.34	15.97	Average	---	---
8	12400.00	58.41	74.00	-15.59	42.44	15.97	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	4

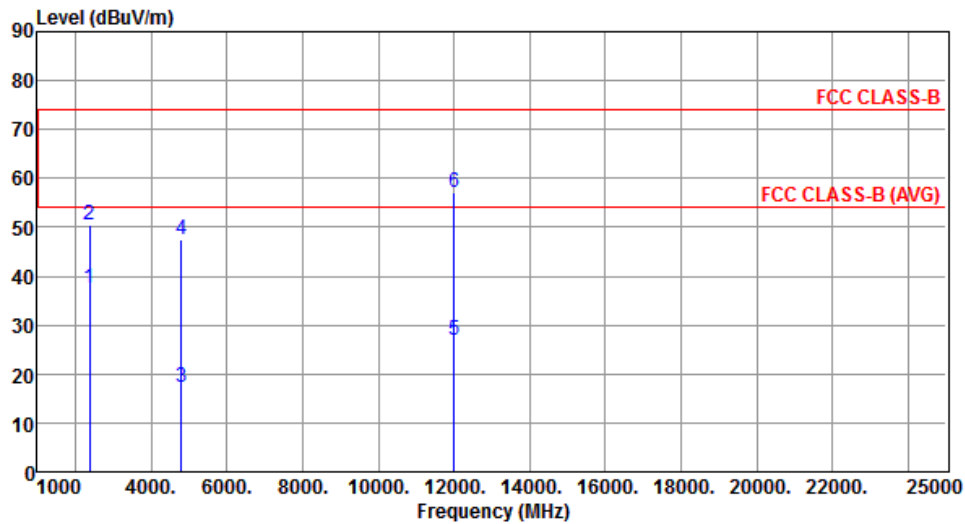


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.61	54.00	-16.39	38.83	-1.22	Average	---	---
2	2390.00	50.37	74.00	-23.63	51.59	-1.22	Peak	---	---
3	4804.00	17.34	54.00	-36.66	10.23	7.11	Average	---	---
4	4804.00	47.44	74.00	-26.56	40.33	7.11	Peak	---	---
5	12010.00	26.89	54.00	-27.11	10.34	16.55	Average	---	---
6	12010.00	56.99	74.00	-17.01	40.44	16.55	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical	Test Configuration	4

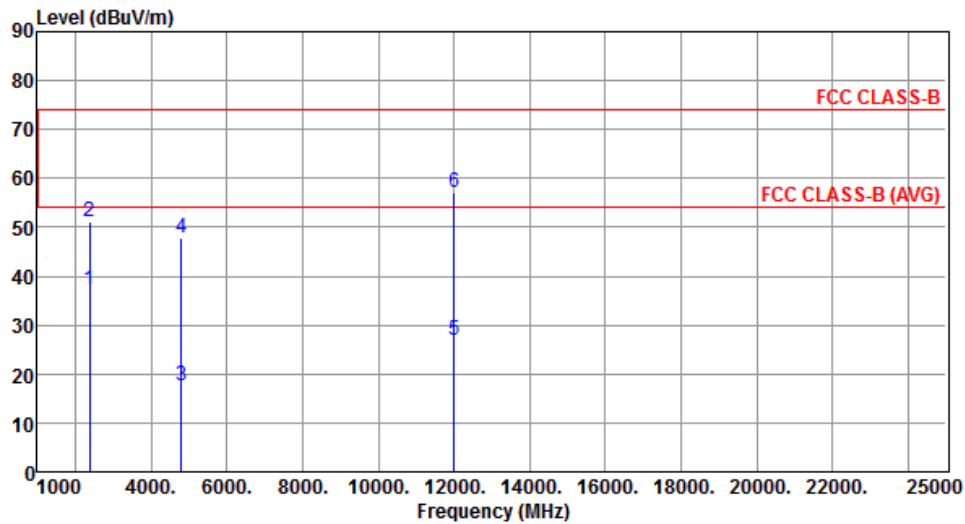


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.31	54.00	-16.69	38.53	-1.22	Average	---	---
2	2390.00	51.15	74.00	-22.85	52.37	-1.22	Peak	---	---
3	4804.00	17.67	54.00	-36.33	10.56	7.11	Average	---	---
4	4804.00	47.77	74.00	-26.23	40.66	7.11	Peak	---	---
5	12010.00	26.98	54.00	-27.02	10.43	16.55	Average	---	---
6	12010.00	57.08	74.00	-16.92	40.53	16.55	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	4

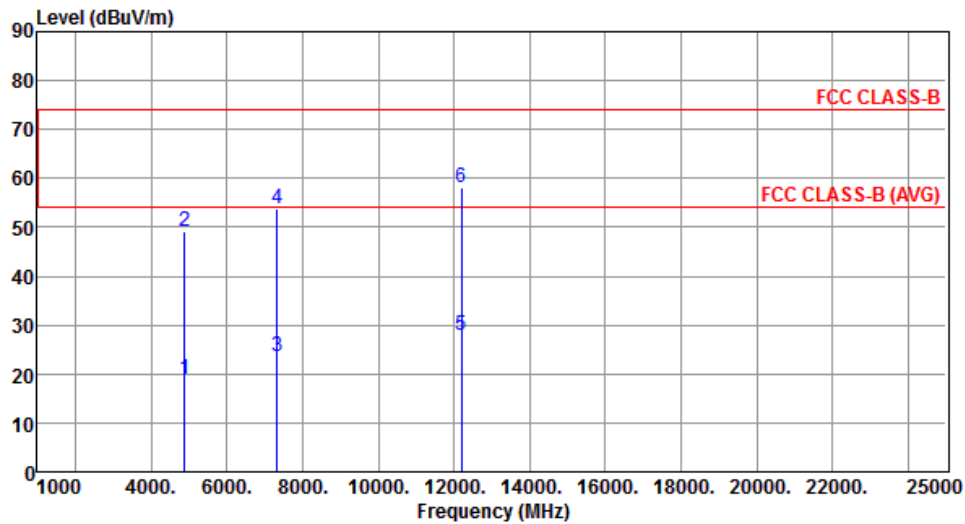


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	4882.00	18.99	54.00	-35.01	12.22	6.77	Average	---	---
2	4882.00	49.09	74.00	-24.91	42.32	6.77	Peak	---	---
3	7323.00	23.64	54.00	-30.36	12.65	10.99	Average	---	---
4	7323.00	53.74	74.00	-20.26	42.75	10.99	Peak	---	---
5	12205.00	28.01	54.00	-25.99	11.75	16.26	Average	---	---
6	12205.00	58.11	74.00	-15.89	41.85	16.26	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	4

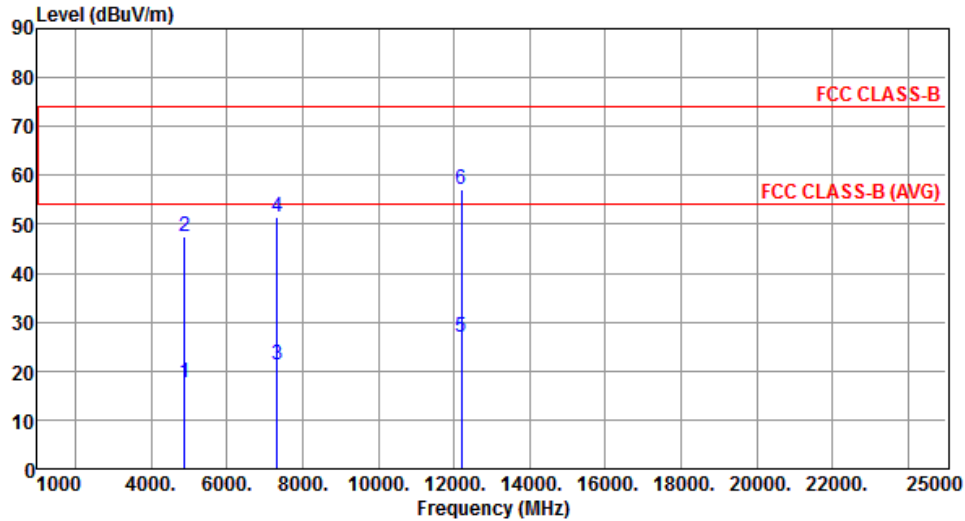


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	4882.00	17.53	54.00	-36.47	10.76	6.77	Average	---	---
2	4882.00	47.63	74.00	-26.37	40.86	6.77	Peak	---	---
3	7323.00	21.24	54.00	-32.76	10.25	10.99	Average	---	---
4	7323.00	51.34	74.00	-22.66	40.35	10.99	Peak	---	---
5	12205.00	26.87	54.00	-27.13	10.61	16.26	Average	---	---
6	12205.00	56.97	74.00	-17.03	40.71	16.26	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	4

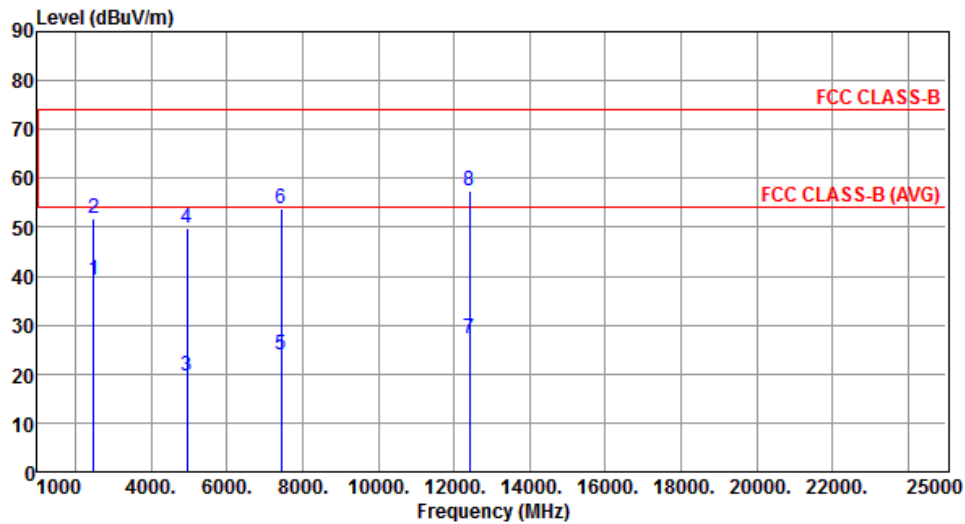


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	39.27	54.00	-14.73	40.16	-0.89	Average	---	---
2	2483.50	51.92	74.00	-22.08	52.81	-0.89	Peak	---	---
3	4960.00	19.61	54.00	-34.39	13.15	6.46	Average	---	---
4	4960.00	49.71	74.00	-24.29	43.25	6.46	Peak	---	---
5	7440.00	23.83	54.00	-30.17	12.56	11.27	Average	---	---
6	7440.00	53.93	74.00	-20.07	42.66	11.27	Peak	---	---
7	12400.00	27.22	54.00	-26.78	11.25	15.97	Average	---	---
8	12400.00	57.32	74.00	-16.68	41.35	15.97	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	4

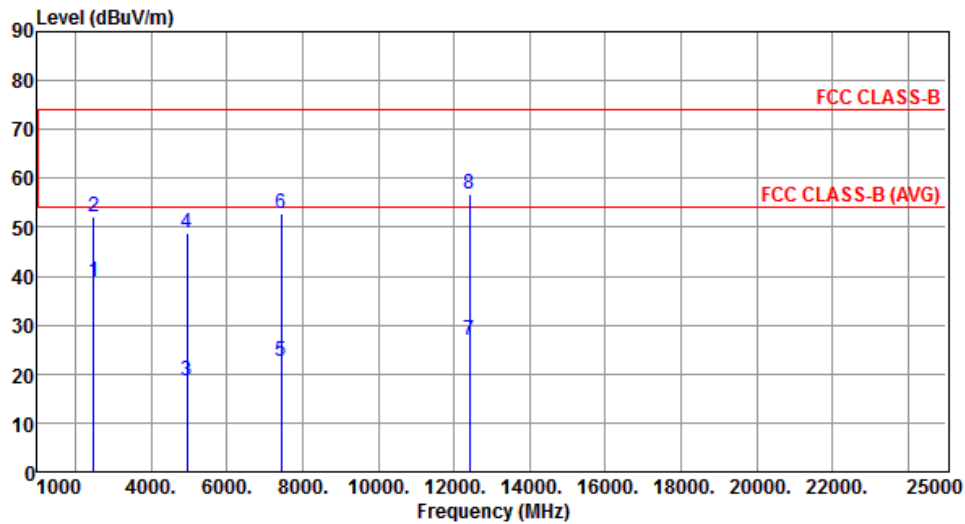

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	38.82	54.00	-15.18	39.71	-0.89	Average	---	---
2	2483.50	52.13	74.00	-21.87	53.02	-0.89	Peak	---	---
3	4960.00	18.69	54.00	-35.31	12.23	6.46	Average	---	---
4	4960.00	48.79	74.00	-25.21	42.33	6.46	Peak	---	---
5	7440.00	22.74	54.00	-31.26	11.47	11.27	Average	---	---
6	7440.00	52.84	74.00	-21.16	41.57	11.27	Peak	---	---
7	12400.00	26.83	54.00	-27.17	10.86	15.97	Average	---	---
8	12400.00	56.93	74.00	-17.07	40.96	15.97	Peak	---	---


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

3.2.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 8DPSK


Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	1

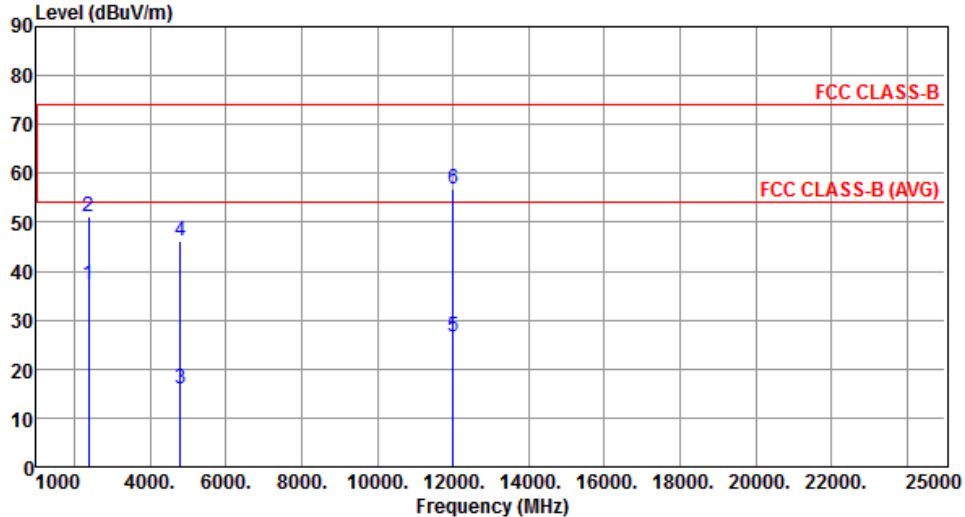

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.17	54.00	-16.83	38.39	-1.22	Average	---	---
2	2390.00	51.12	74.00	-22.88	52.34	-1.22	Peak	---	---
3	4804.00	15.90	54.00	-38.10	8.79	7.11	Average	---	---
4	4804.00	46.00	74.00	-28.00	38.89	7.11	Peak	---	---
5	12010.00	26.65	54.00	-27.35	10.10	16.55	Average	---	---
6	12010.00	56.75	74.00	-17.25	40.20	16.55	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Vertical	Test Configuration	1

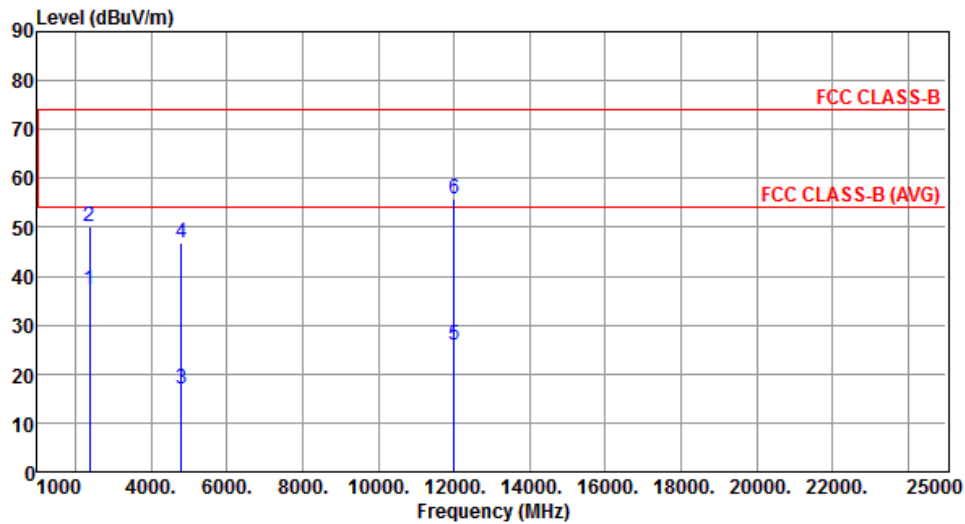


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.27	54.00	-16.73	38.49	-1.22	Average	---	---
2	2390.00	50.17	74.00	-23.83	51.39	-1.22	Peak	---	---
3	4804.00	16.79	54.00	-37.21	9.68	7.11	Average	---	---
4	4804.00	46.89	74.00	-27.11	39.78	7.11	Peak	---	---
5	12010.00	25.84	54.00	-28.16	9.29	16.55	Average	---	---
6	12010.00	55.94	74.00	-18.06	39.39	16.55	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	1

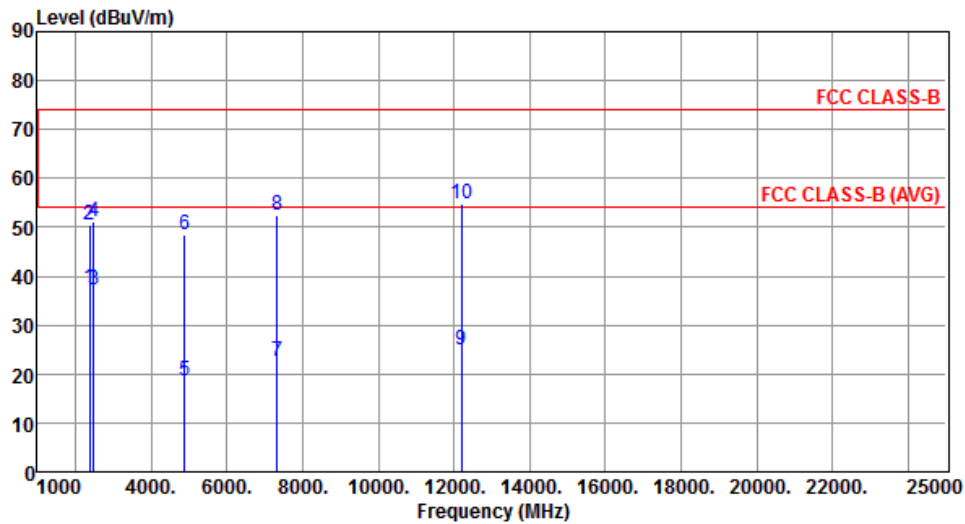


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.37	54.00	-16.63	38.59	-1.22	Average	---	---
2	2390.00	50.37	74.00	-23.63	51.59	-1.22	Peak	---	---
3	2483.50	37.12	54.00	-16.88	38.01	-0.89	Average	---	---
4	2483.50	51.00	74.00	-23.00	51.89	-0.89	Peak	---	---
5	4882.00	18.50	54.00	-35.50	11.73	6.77	Average	---	---
6	4882.00	48.60	74.00	-25.40	41.83	6.77	Peak	---	---
7	7323.00	22.45	54.00	-31.55	11.46	10.99	Average	---	---
8	7323.00	52.55	74.00	-21.45	41.56	10.99	Peak	---	---
9	12205.00	24.75	54.00	-29.25	8.49	16.26	Average	---	---
10	12205.00	54.85	74.00	-19.15	38.59	16.26	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	1

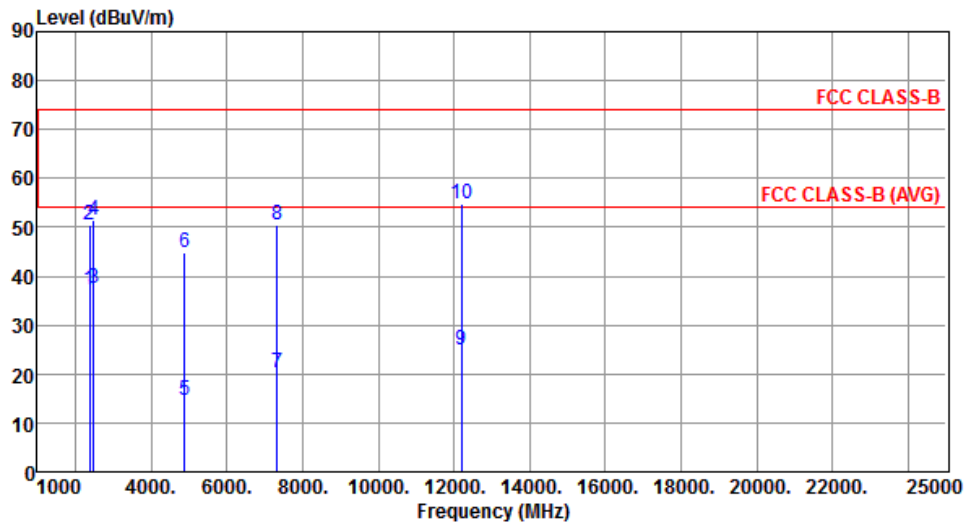


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.30	54.00	-16.70	38.52	-1.22	Average	---	---
2	2390.00	50.56	74.00	-23.44	51.78	-1.22	Peak	---	---
3	2483.50	37.50	54.00	-16.50	38.39	-0.89	Average	---	---
4	2483.50	51.50	74.00	-22.50	52.39	-0.89	Peak	---	---
5	4882.00	14.60	54.00	-39.40	7.83	6.77	Average	---	---
6	4882.00	44.70	74.00	-29.30	37.93	6.77	Peak	---	---
7	7323.00	20.35	54.00	-33.65	9.36	10.99	Average	---	---
8	7323.00	50.45	74.00	-23.55	39.46	10.99	Peak	---	---
9	12205.00	24.77	54.00	-29.23	8.51	16.26	Average	---	---
10	12205.00	54.87	74.00	-19.13	38.61	16.26	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	1

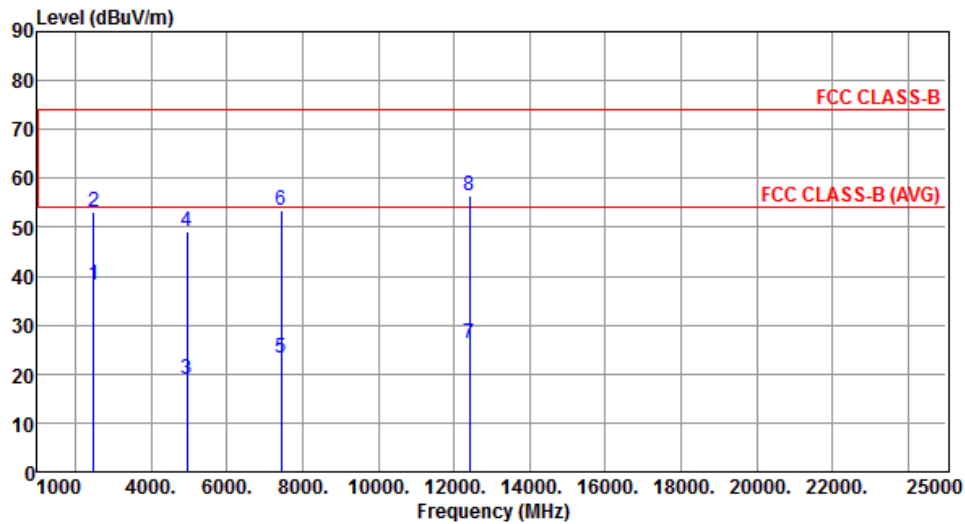


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	38.14	54.00	-15.86	39.03	-0.89	Average	---	---
2	2483.50	52.97	74.00	-21.03	53.86	-0.89	Peak	---	---
3	4960.00	19.08	54.00	-34.92	12.62	6.46	Average	---	---
4	4960.00	49.18	74.00	-24.82	42.72	6.46	Peak	---	---
5	7440.00	23.21	54.00	-30.79	11.94	11.27	Average	---	---
6	7440.00	53.31	74.00	-20.69	42.04	11.27	Peak	---	---
7	12400.00	26.23	54.00	-27.77	10.26	15.97	Average	---	---
8	12400.00	56.33	74.00	-17.67	40.36	15.97	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	1

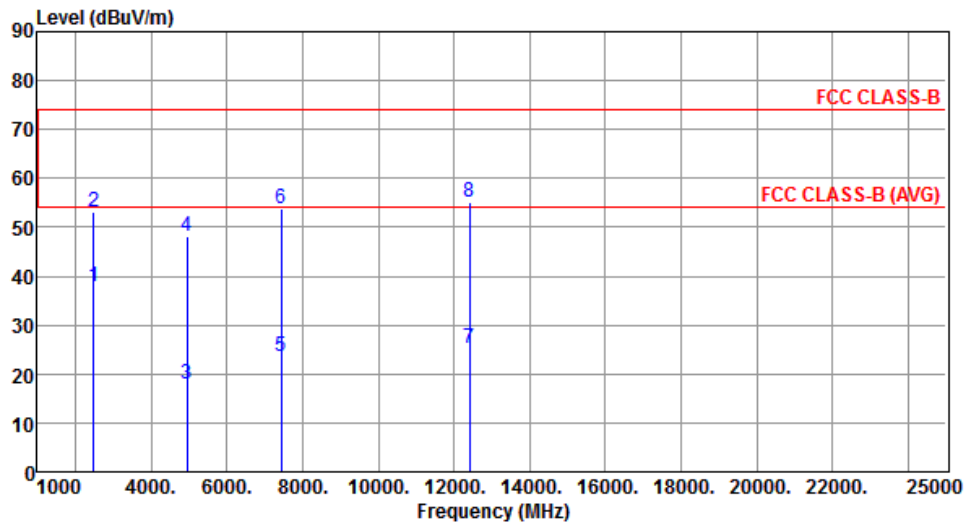


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	38.01	54.00	-15.99	38.90	-0.89	Average	---	---
2	2483.50	53.28	74.00	-20.72	54.17	-0.89	Peak	---	---
3	4960.00	18.00	54.00	-36.00	11.54	6.46	Average	---	---
4	4960.00	48.10	74.00	-25.90	41.64	6.46	Peak	---	---
5	7440.00	23.55	54.00	-30.45	12.28	11.27	Average	---	---
6	7440.00	53.65	74.00	-20.35	42.38	11.27	Peak	---	---
7	12400.00	25.17	54.00	-28.83	9.20	15.97	Average	---	---
8	12400.00	55.27	74.00	-18.73	39.30	15.97	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	2

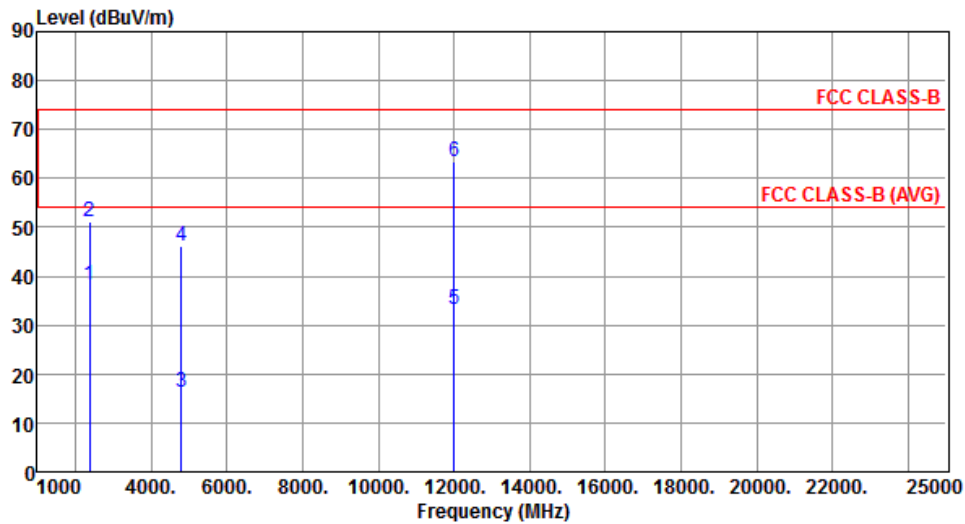


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.29	54.00	-15.71	39.51	-1.22	Average	---	---
2	2390.00	51.25	74.00	-22.75	52.47	-1.22	Peak	---	---
3	4804.00	16.13	54.00	-37.87	9.02	7.11	Average	---	---
4	4804.00	46.23	74.00	-27.77	39.12	7.11	Peak	---	---
5	12010.00	33.30	54.00	-20.70	16.75	16.55	Average	---	---
6	12010.00	63.40	74.00	-10.60	46.85	16.55	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Vertical	Test Configuration	2

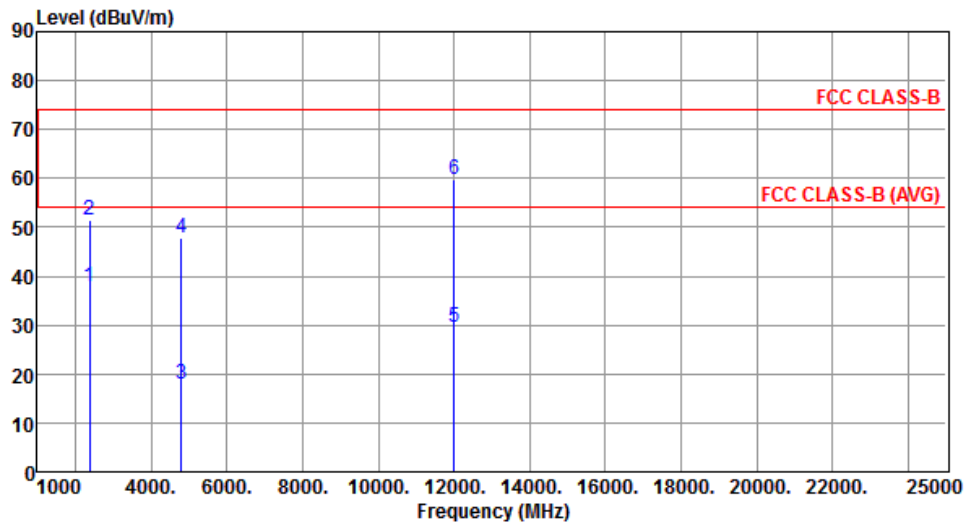


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.02	54.00	-15.98	39.24	-1.22	Average	---	---
2	2390.00	51.52	74.00	-22.48	52.74	-1.22	Peak	---	---
3	4804.00	17.85	54.00	-36.15	10.74	7.11	Average	---	---
4	4804.00	47.95	74.00	-26.05	40.84	7.11	Peak	---	---
5	12010.00	29.70	54.00	-24.30	13.15	16.55	Average	---	---
6	12010.00	59.80	74.00	-14.20	43.25	16.55	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	2

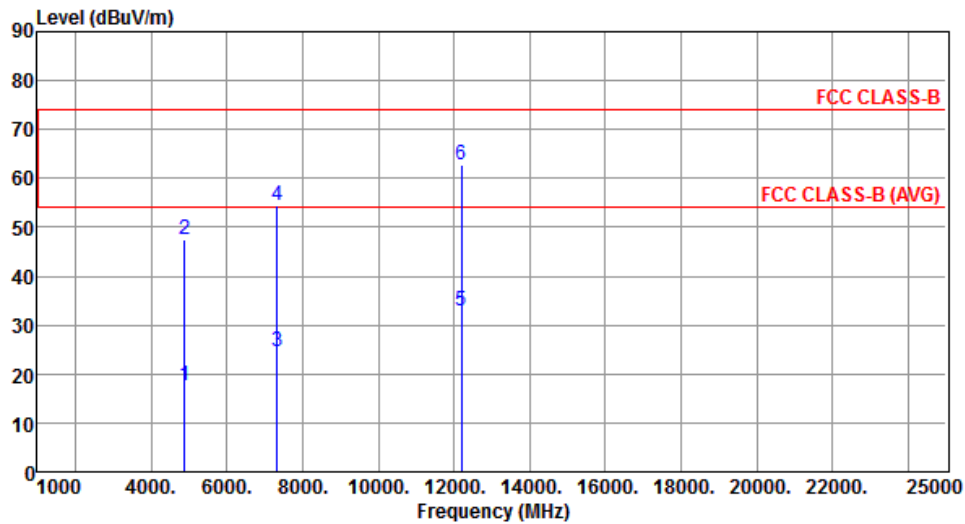


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	4882.00	17.55	54.00	-36.45	10.78	6.77	Average	---	---
2	4882.00	47.65	74.00	-26.35	40.88	6.77	Peak	---	---
3	7323.00	24.48	54.00	-29.52	13.49	10.99	Average	---	---
4	7323.00	54.58	74.00	-19.42	43.59	10.99	Peak	---	---
5	12205.00	32.82	54.00	-21.18	16.56	16.26	Average	---	---
6	12205.00	62.92	74.00	-11.08	46.66	16.26	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	2

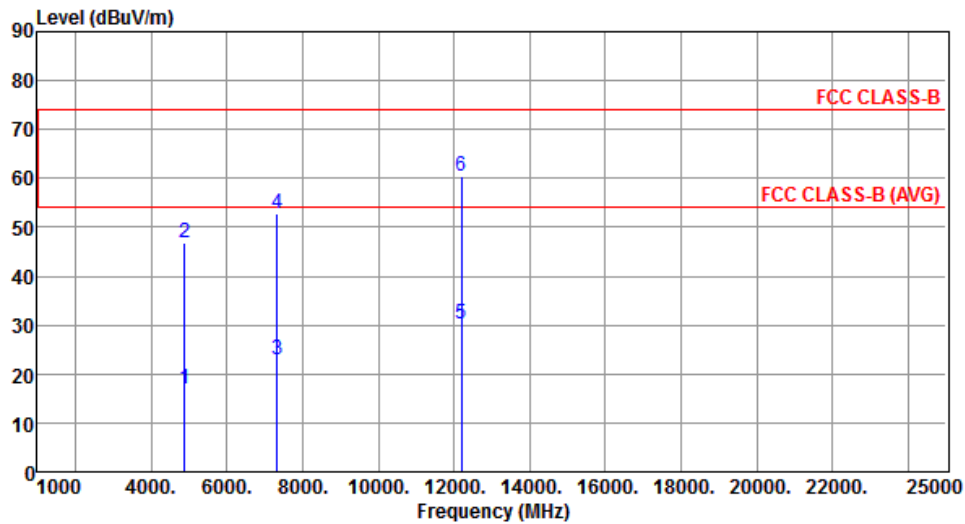


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	4882.00	16.81	54.00	-37.19	10.04	6.77	Average	---	---
2	4882.00	46.91	74.00	-27.09	40.14	6.77	Peak	---	---
3	7323.00	22.85	54.00	-31.15	11.86	10.99	Average	---	---
4	7323.00	52.95	74.00	-21.05	41.96	10.99	Peak	---	---
5	12205.00	30.19	54.00	-23.81	13.93	16.26	Average	---	---
6	12205.00	60.29	74.00	-13.71	44.03	16.26	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	2

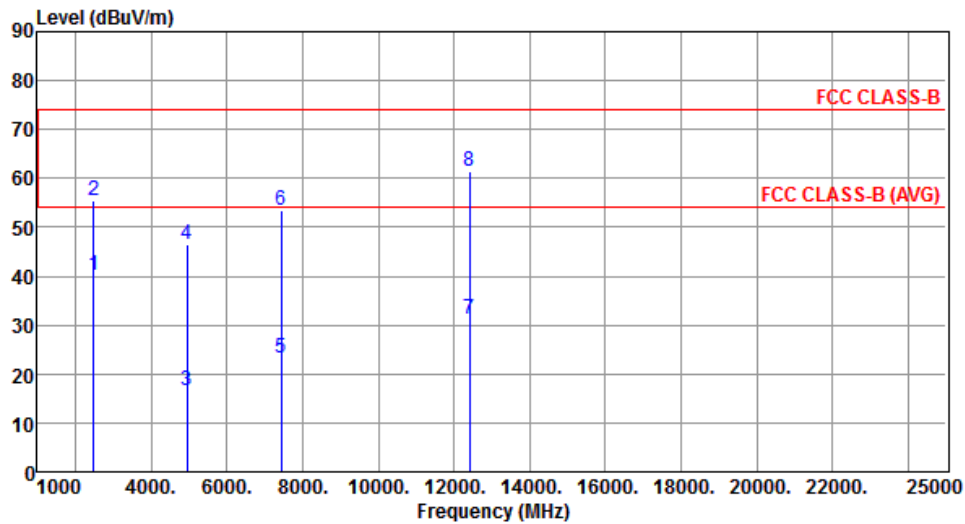


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	40.22	54.00	-13.78	41.11	-0.89	Average	---	---
2	2483.50	55.61	74.00	-18.39	56.50	-0.89	Peak	---	---
3	4960.00	16.51	54.00	-37.49	10.05	6.46	Average	---	---
4	4960.00	46.61	74.00	-27.39	40.15	6.46	Peak	---	---
5	7440.00	23.28	54.00	-30.72	12.01	11.27	Average	---	---
6	7440.00	53.38	74.00	-20.62	42.11	11.27	Peak	---	---
7	12400.00	31.20	54.00	-22.80	15.23	15.97	Average	---	---
8	12400.00	61.30	74.00	-12.70	45.33	15.97	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	2

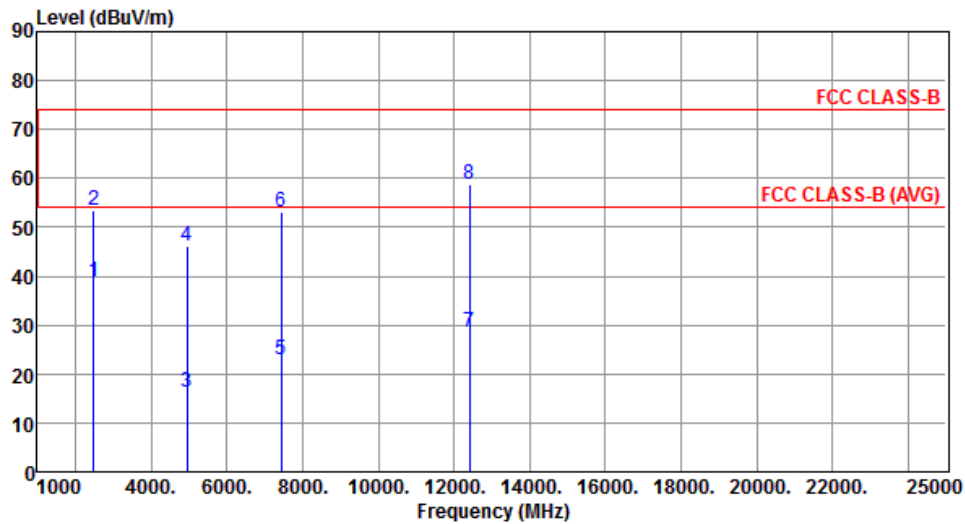


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	38.74	54.00	-15.26	39.63	-0.89	Average	---	---
2	2483.50	53.31	74.00	-20.69	54.20	-0.89	Peak	---	---
3	4960.00	16.22	54.00	-37.78	9.76	6.46	Average	---	---
4	4960.00	46.32	74.00	-27.68	39.86	6.46	Peak	---	---
5	7440.00	22.99	54.00	-31.01	11.72	11.27	Average	---	---
6	7440.00	53.09	74.00	-20.91	41.82	11.27	Peak	---	---
7	12400.00	28.66	54.00	-25.34	12.69	15.97	Average	---	---
8	12400.00	58.76	74.00	-15.24	42.79	15.97	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	3

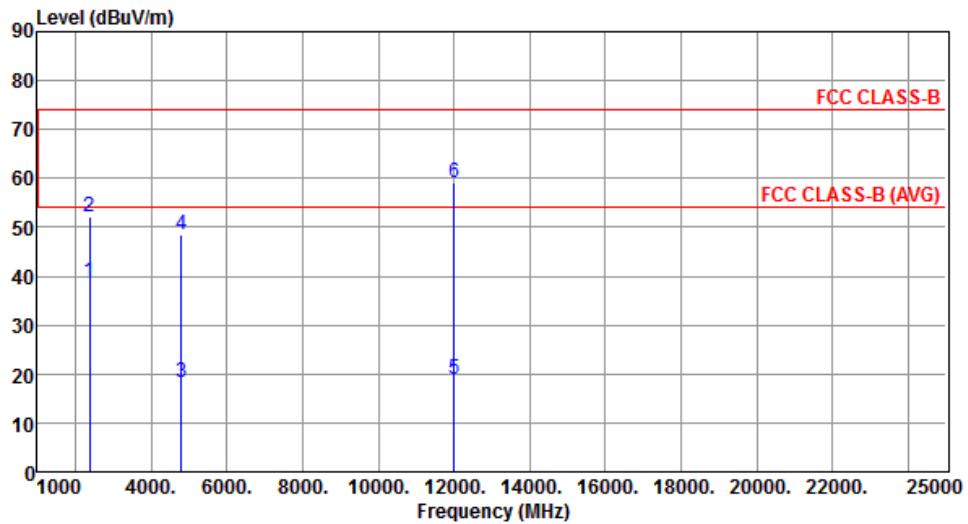


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.01	54.00	-14.99	40.23	-1.22	Average	---	---
2	2390.00	52.21	74.00	-21.79	53.43	-1.22	Peak	---	---
3	4804.00	18.35	54.00	-35.65	11.24	7.11	Average	---	---
4	4804.00	48.45	74.00	-25.55	41.34	7.11	Peak	---	---
5	12010.00	18.93	54.00	-35.07	2.38	16.55	Average	---	---
6	12010.00	59.03	74.00	-14.97	42.48	16.55	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Vertical	Test Configuration	3

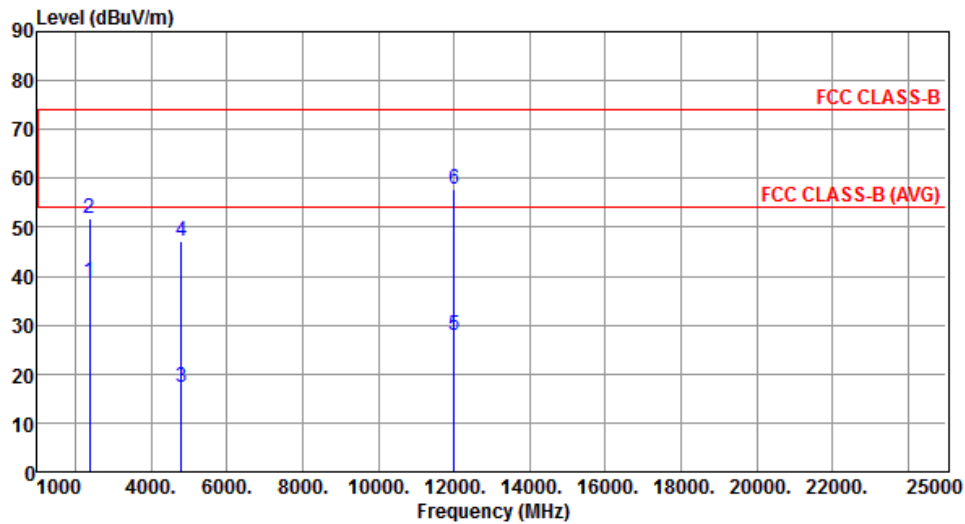


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.97	54.00	-15.03	40.19	-1.22	Average	---	---
2	2390.00	51.88	74.00	-22.12	53.10	-1.22	Peak	---	---
3	4804.00	17.18	54.00	-36.82	10.07	7.11	Average	---	---
4	4804.00	47.28	74.00	-26.72	40.17	7.11	Peak	---	---
5	12010.00	27.85	54.00	-26.15	11.30	16.55	Average	---	---
6	12010.00	57.95	74.00	-16.05	41.40	16.55	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	3

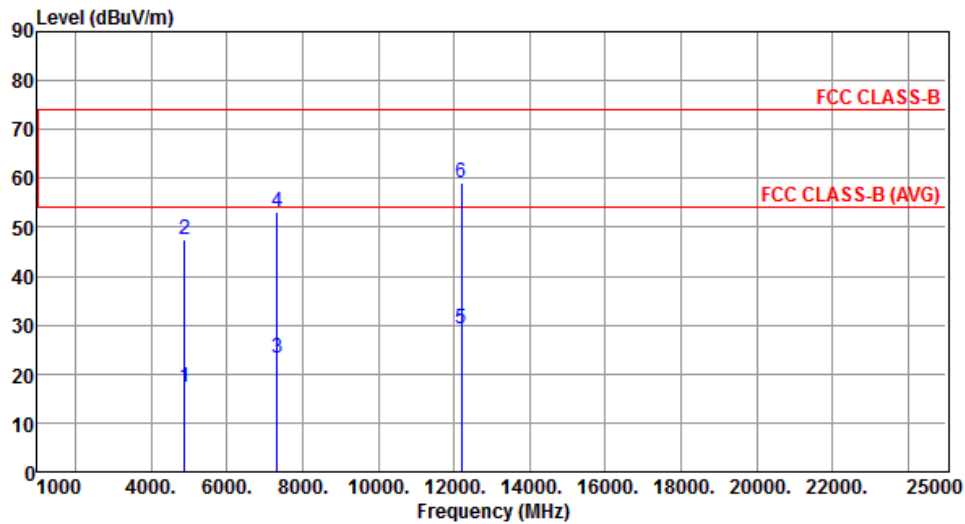


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	4882.00	17.35	54.00	-36.65	10.58	6.77	Average	---	---
2	4882.00	47.45	74.00	-26.55	40.68	6.77	Peak	---	---
3	7323.00	23.10	54.00	-30.90	12.11	10.99	Average	---	---
4	7323.00	53.20	74.00	-20.80	42.21	10.99	Peak	---	---
5	12205.00	29.07	54.00	-24.93	12.81	16.26	Average	---	---
6	12205.00	59.17	74.00	-14.83	42.91	16.26	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	3

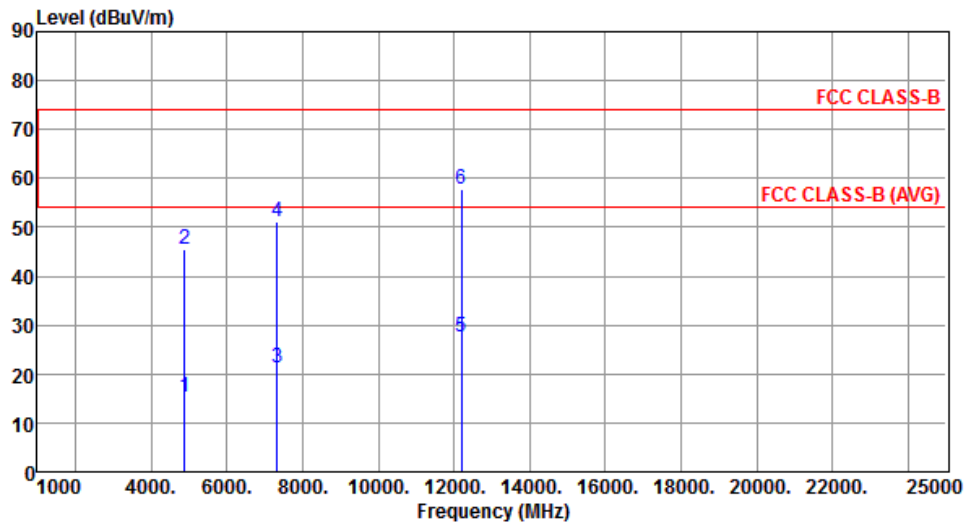


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	4882.00	15.24	54.00	-38.76	8.47	6.77	Average	---	---
2	4882.00	45.34	74.00	-28.66	38.57	6.77	Peak	---	---
3	7323.00	21.20	54.00	-32.80	10.21	10.99	Average	---	---
4	7323.00	51.30	74.00	-22.70	40.31	10.99	Peak	---	---
5	12205.00	27.70	54.00	-26.30	11.44	16.26	Average	---	---
6	12205.00	57.80	74.00	-16.20	41.54	16.26	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	3

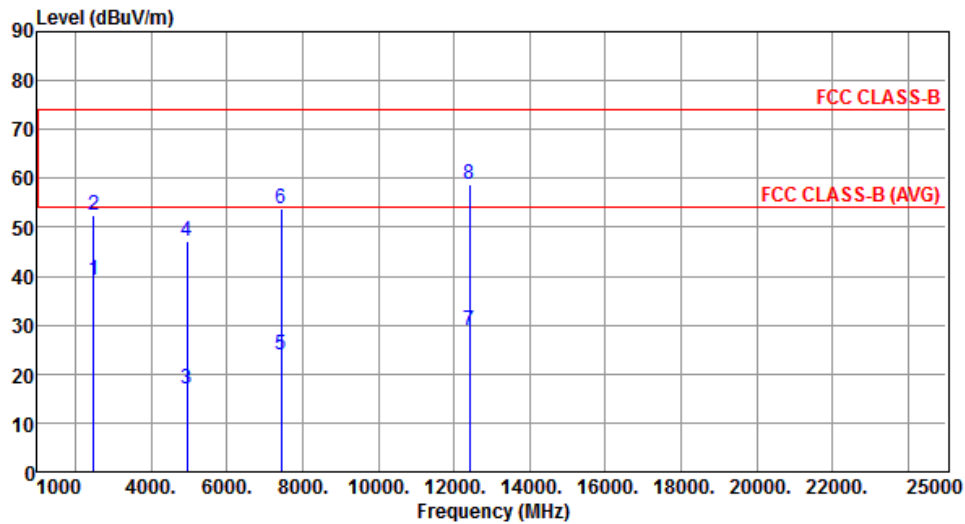


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	39.18	54.00	-14.82	40.07	-0.89	Average	---	---
2	2483.50	52.36	74.00	-21.64	53.25	-0.89	Peak	---	---
3	4960.00	17.04	54.00	-36.96	10.58	6.46	Average	---	---
4	4960.00	47.14	74.00	-26.86	40.68	6.46	Peak	---	---
5	7440.00	23.83	54.00	-30.17	12.56	11.27	Average	---	---
6	7440.00	53.93	74.00	-20.07	42.66	11.27	Peak	---	---
7	12400.00	28.73	54.00	-25.27	12.76	15.97	Average	---	---
8	12400.00	58.83	74.00	-15.17	42.86	15.97	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	3

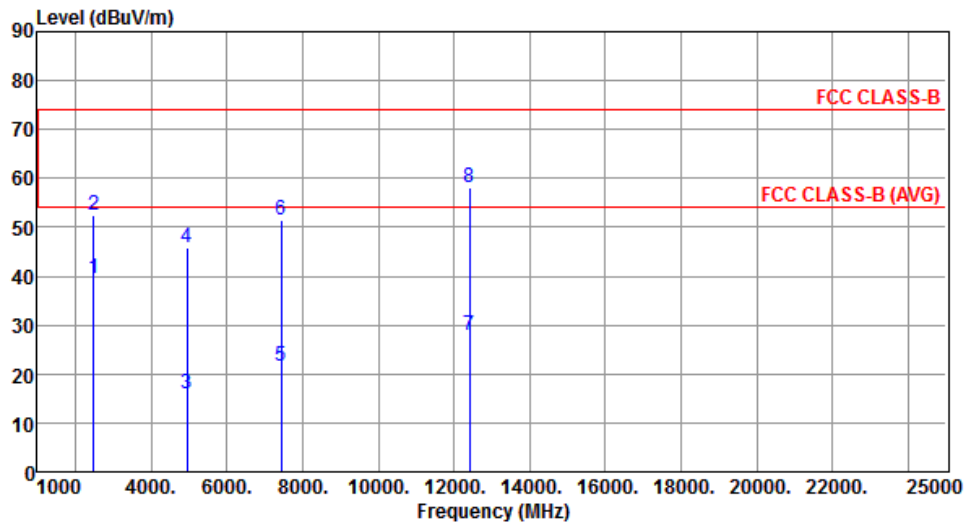


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	39.44	54.00	-14.56	40.33	-0.89	Average	---	---
2	2483.50	52.63	74.00	-21.37	53.52	-0.89	Peak	---	---
3	4960.00	15.88	54.00	-38.12	9.42	6.46	Average	---	---
4	4960.00	45.98	74.00	-28.02	39.52	6.46	Peak	---	---
5	7440.00	21.43	54.00	-32.57	10.16	11.27	Average	---	---
6	7440.00	51.53	74.00	-22.47	40.26	11.27	Peak	---	---
7	12400.00	27.89	54.00	-26.11	11.92	15.97	Average	---	---
8	12400.00	57.99	74.00	-16.01	42.02	15.97	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	4

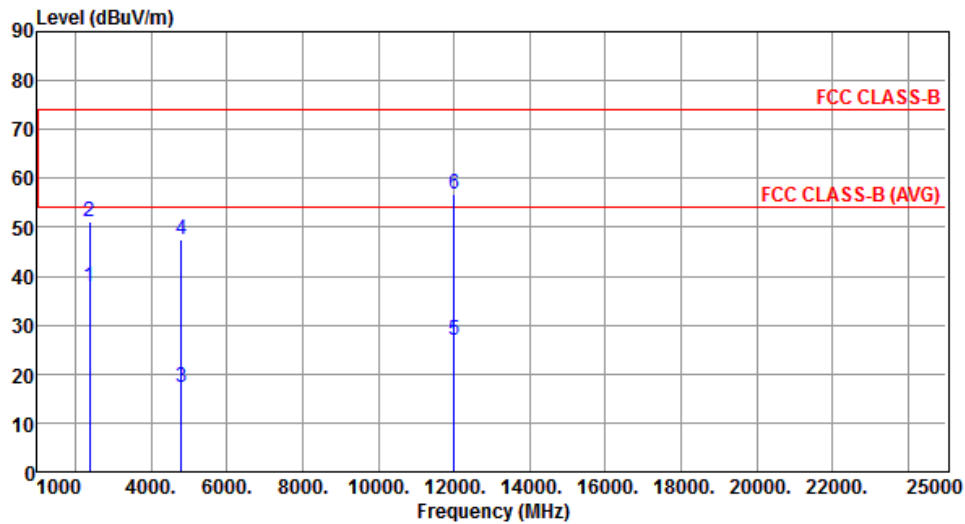


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.01	54.00	-15.99	39.23	-1.22	Average	---	---
2	2390.00	51.19	74.00	-22.81	52.41	-1.22	Peak	---	---
3	4804.00	17.42	54.00	-36.58	10.31	7.11	Average	---	---
4	4804.00	47.52	74.00	-26.48	40.41	7.11	Peak	---	---
5	12010.00	26.80	54.00	-27.20	10.25	16.55	Average	---	---
6	12010.00	56.90	74.00	-17.10	40.35	16.55	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Vertical	Test Configuration	4

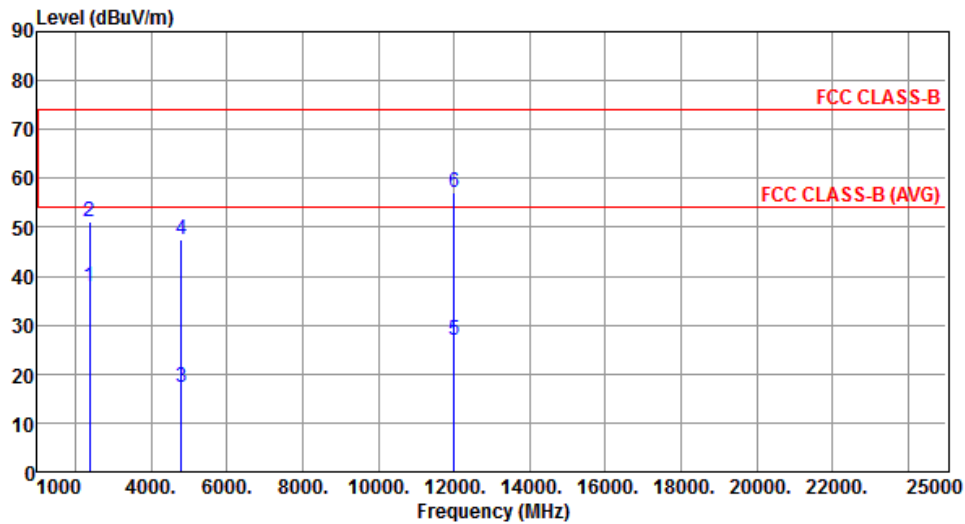


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.73	54.00	-16.27	38.95	-1.22	Average	---	---
2	2390.00	51.25	74.00	-22.75	52.47	-1.22	Peak	---	---
3	4804.00	17.33	54.00	-36.67	10.22	7.11	Average	---	---
4	4804.00	47.43	74.00	-26.57	40.32	7.11	Peak	---	---
5	12010.00	26.87	54.00	-27.13	10.32	16.55	Average	---	---
6	12010.00	56.97	74.00	-17.03	40.42	16.55	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	4

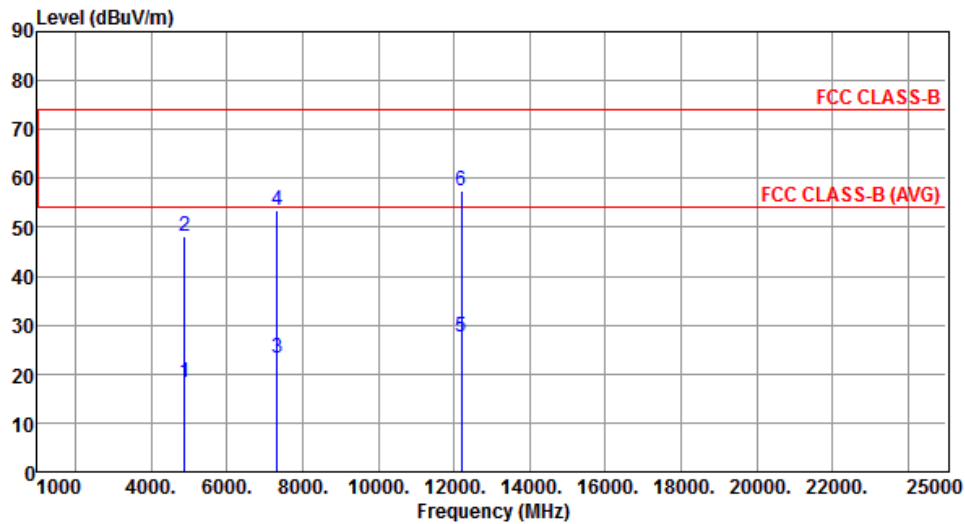


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	4882.00	18.21	54.00	-35.79	11.44	6.77	Average	---	---
2	4882.00	48.31	74.00	-25.69	41.54	6.77	Peak	---	---
3	7323.00	23.33	54.00	-30.67	12.34	10.99	Average	---	---
4	7323.00	53.43	74.00	-20.57	42.44	10.99	Peak	---	---
5	12205.00	27.51	54.00	-26.49	11.25	16.26	Average	---	---
6	12205.00	57.61	74.00	-16.39	41.35	16.26	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	4

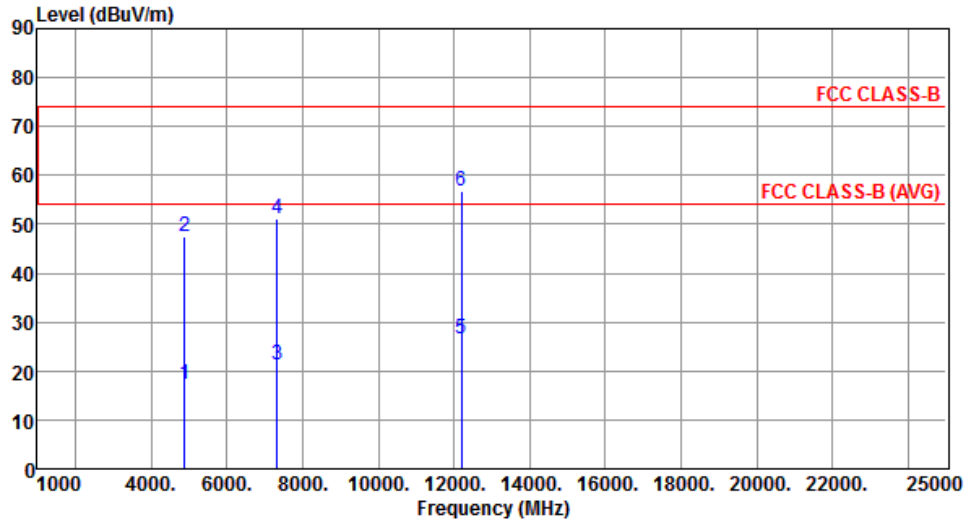


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	4882.00	17.29	54.00	-36.71	10.52	6.77	Average	---	---
2	4882.00	47.39	74.00	-26.61	40.62	6.77	Peak	---	---
3	7323.00	21.17	54.00	-32.83	10.18	10.99	Average	---	---
4	7323.00	51.27	74.00	-22.73	40.28	10.99	Peak	---	---
5	12205.00	26.72	54.00	-27.28	10.46	16.26	Average	---	---
6	12205.00	56.82	74.00	-17.18	40.56	16.26	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	4

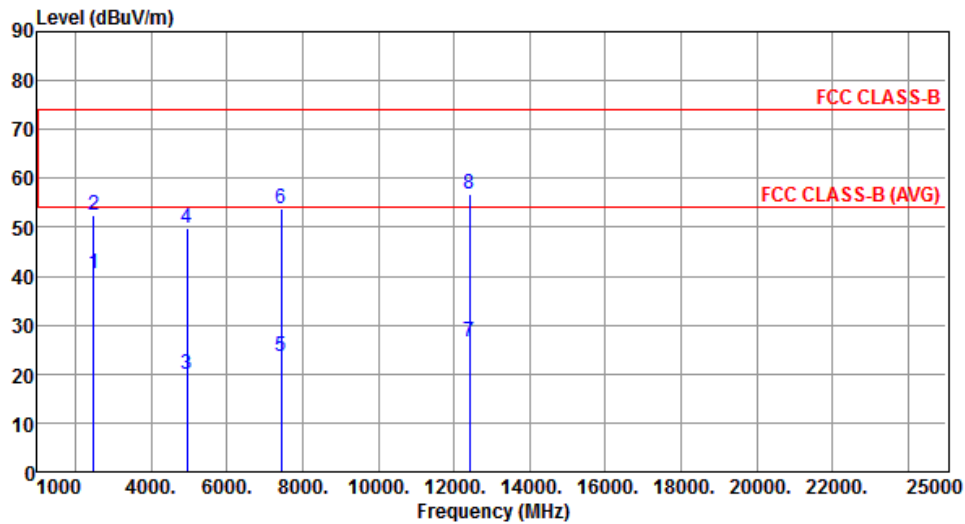


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	40.65	54.00	-13.35	41.54	-0.89	Average	---	---
2	2483.50	52.43	74.00	-21.57	53.32	-0.89	Peak	---	---
3	4960.00	19.84	54.00	-34.16	13.38	6.46	Average	---	---
4	4960.00	49.94	74.00	-24.06	43.48	6.46	Peak	---	---
5	7440.00	23.58	54.00	-30.42	12.31	11.27	Average	---	---
6	7440.00	53.68	74.00	-20.32	42.41	11.27	Peak	---	---
7	12400.00	26.55	54.00	-27.45	10.58	15.97	Average	---	---
8	12400.00	56.65	74.00	-17.35	40.68	15.97	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	4

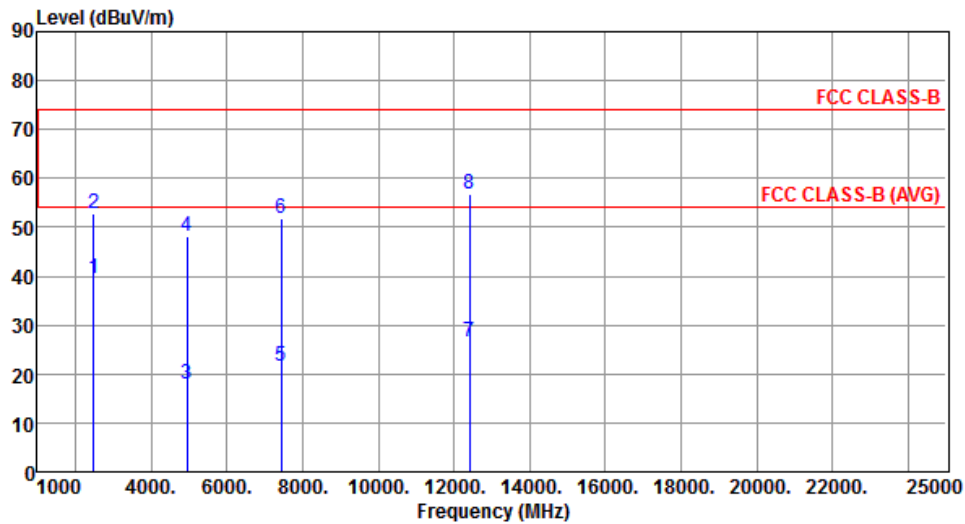

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	39.54	54.00	-14.46	40.43	-0.89	Average	---	---
2	2483.50	52.80	74.00	-21.20	53.69	-0.89	Peak	---	---
3	4960.00	17.97	54.00	-36.03	11.51	6.46	Average	---	---
4	4960.00	48.07	74.00	-25.93	41.61	6.46	Peak	---	---
5	7440.00	21.63	54.00	-32.37	10.36	11.27	Average	---	---
6	7440.00	51.73	74.00	-22.27	40.46	11.27	Peak	---	---
7	12400.00	26.60	54.00	-27.40	10.63	15.97	Average	---	---
8	12400.00	56.70	74.00	-17.30	40.73	15.97	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.3 Unwanted Emissions into Non-Restricted Frequency Bands

3.3.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.3.2 Test Procedures


Reference Level Measurement

1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Set Sweep time = auto couple, Trace mode = max hold.
3. Allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

Unwanted Emissions Level Measurement


1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Trace Mode = max hold, Sweep = auto couple.
3. Allow the trace to stabilize.
4. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

3.3.3 Test Setup




3.3.4 Unwanted Emissions into Non-Restricted Frequency Bands

GFSK

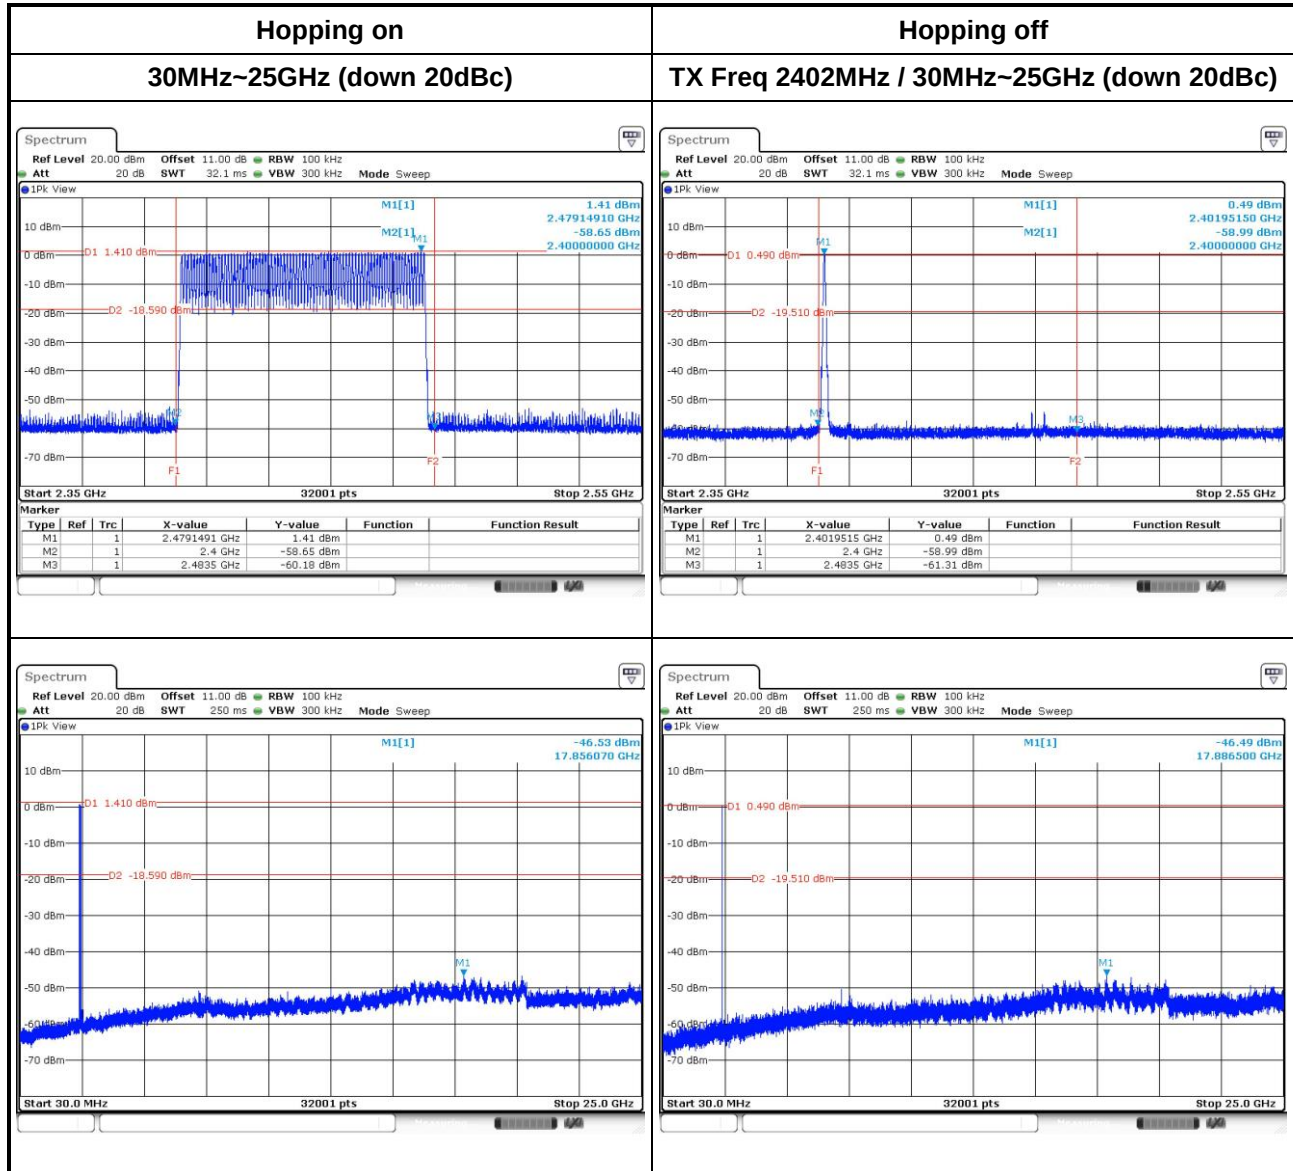




Hopping off

TX Freq 2441MHz / 30MHz~25GHz (down 20dBc)

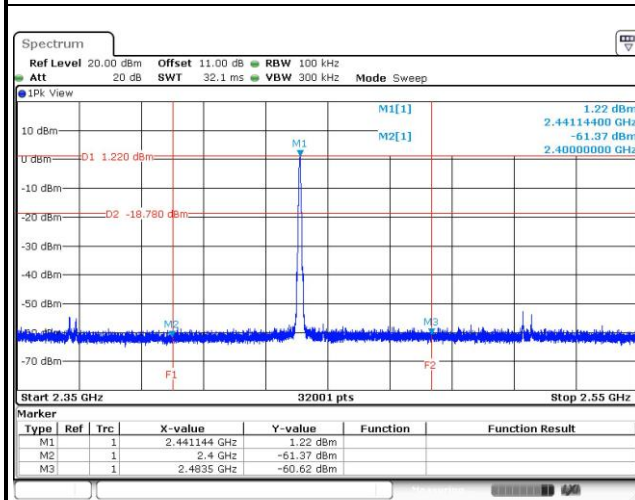


Hopping off

TX Freq 2480MHz / 30MHz~25GHz (down 20dBc)

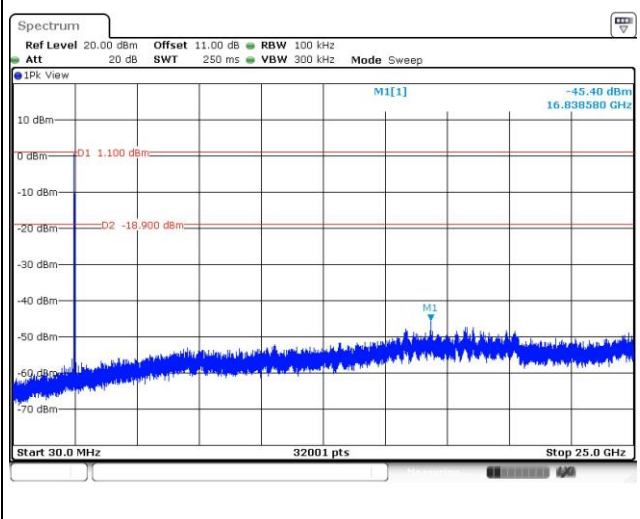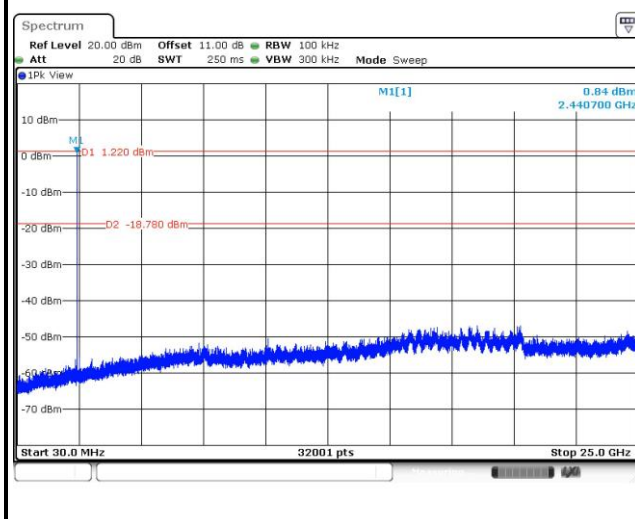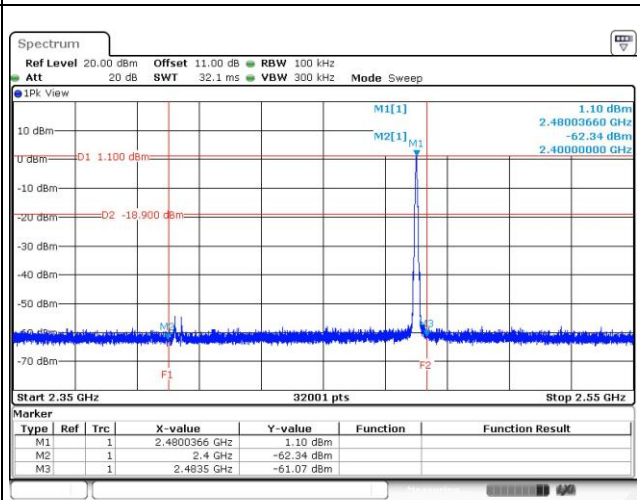


8DPSK

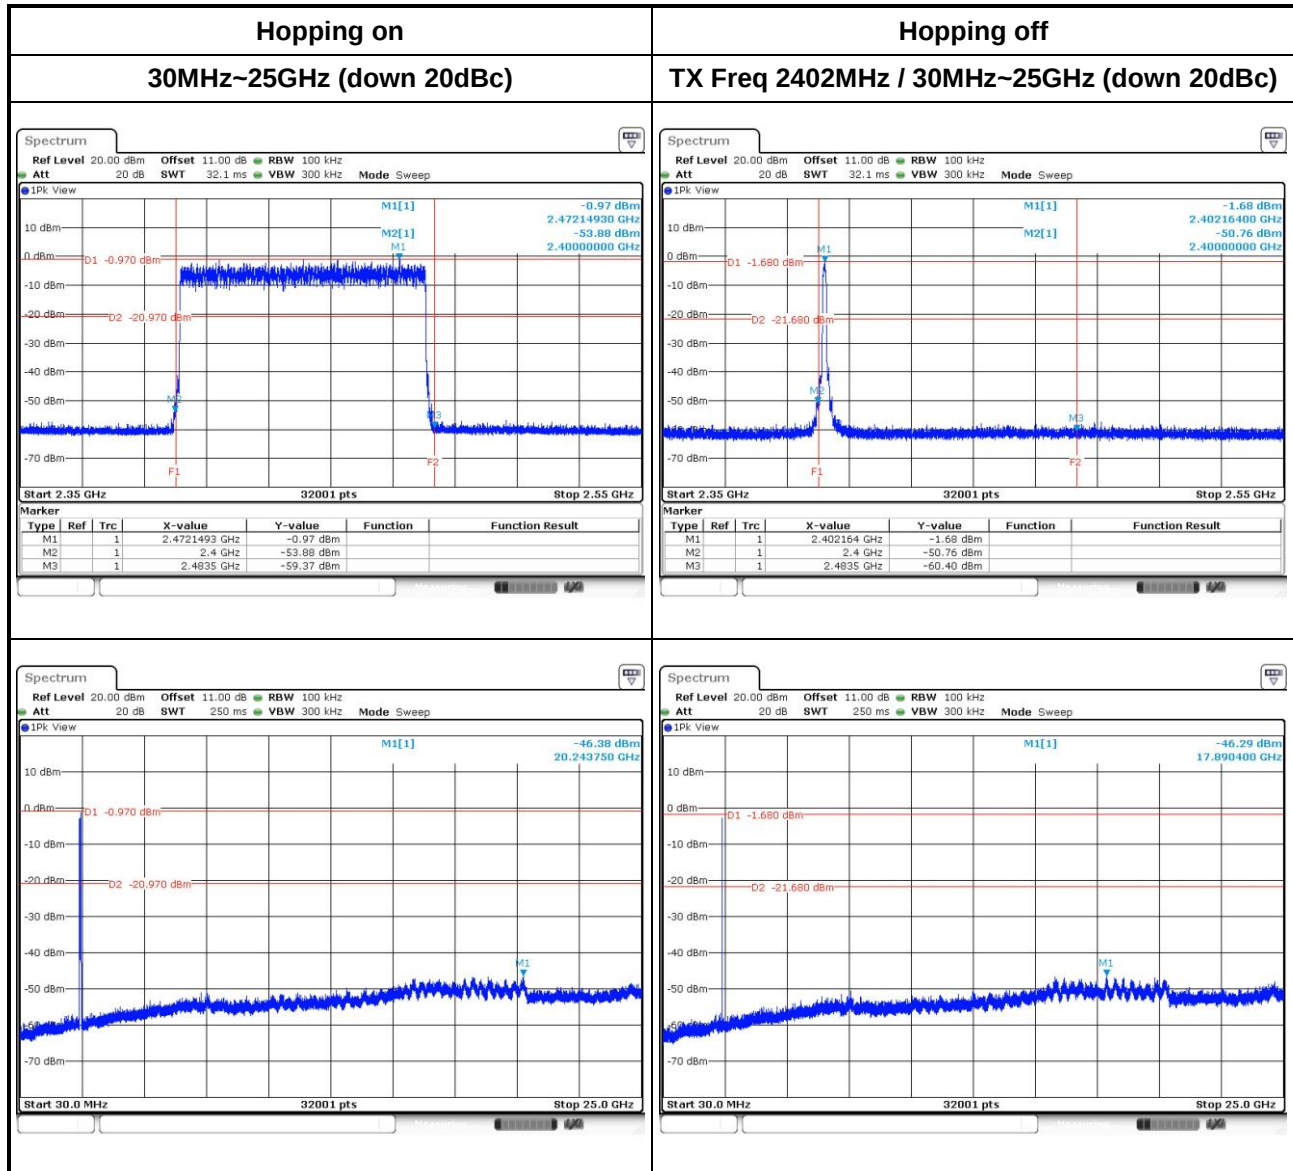




Hopping off

TX Freq 2441MHz / 30MHz~25GHz (down 20dBc)

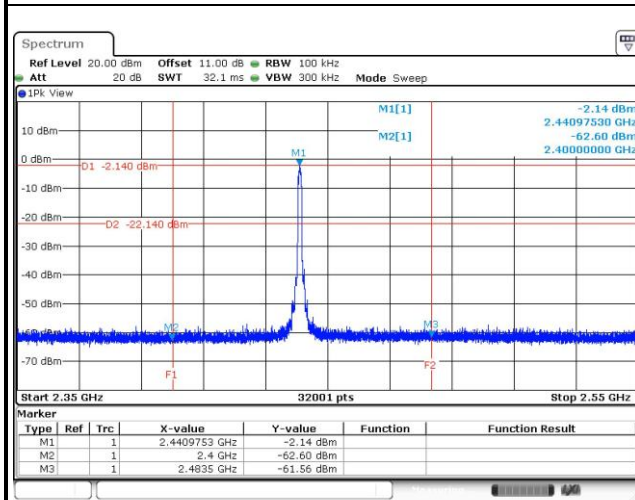

Hopping off

TX Freq 2480MHz / 30MHz~25GHz (down 20dBc)

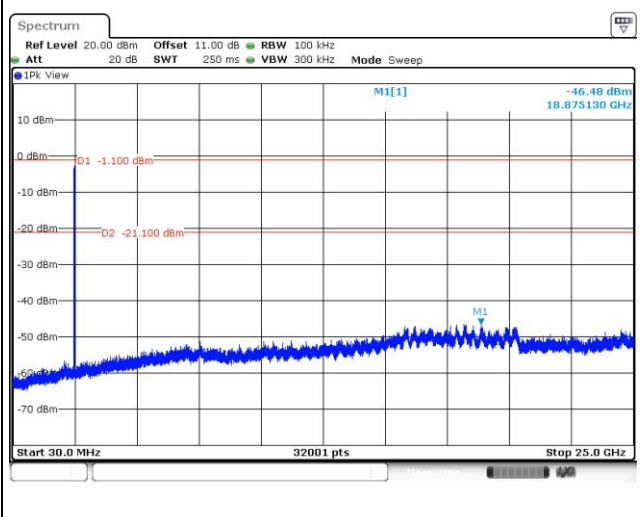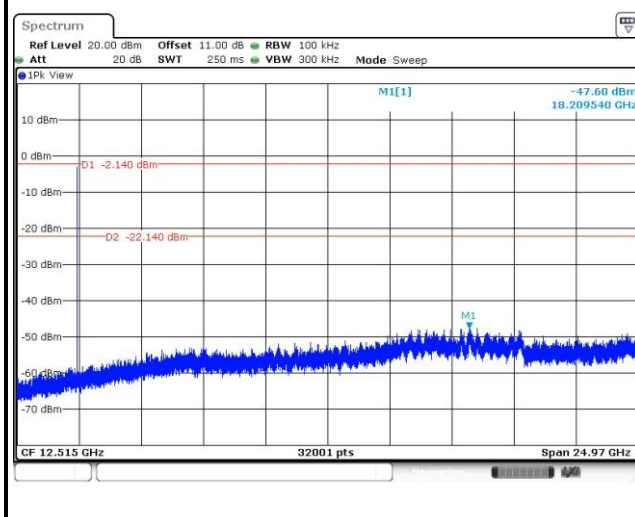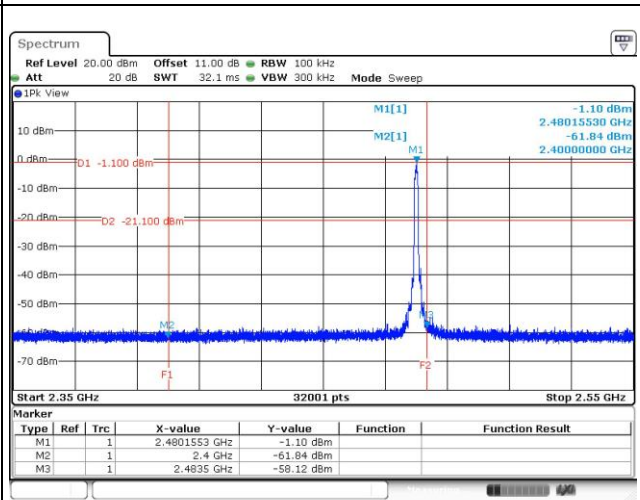

3.4 Conducted Output Power


3.4.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

- ☐ 1 Watt
For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band.
- ☒ 0.125 Watt
For all other frequency hopping systems in the 2400–2483.5 MHz band.
- ☐ 0.125 Watt
For Frequency hopping systems operating in the 2400–2483.5 MHz band have hopping channel carrier frequencies that are separated by two-thirds of the 20 dB bandwidth of the hopping channel.

3.4.2 Test Procedures

1. A wideband power meter is used for power measurement. Bandwidth of power sensor and meter is 50MHz
2. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power

3.4.3 Test Setup



3.4.4 Test Result of Conducted Output Power

Modulation Mode	Freq. (MHz)	Output Power (mW)	Output Power (dBm)	Limit (mW)
GFSK	2402	1.52	1.81	125
GFSK	2441	1.63	2.11	125
GFSK	2480	1.63	2.13	125
π/4 DQPSK	2402	1.45	1.60	125
π/4 DQPSK	2441	1.55	1.89	125
π/4 DQPSK	2480	1.57	1.96	125
8DPSK	2402	1.62	2.10	125
8DPSK	2441	1.75	2.43	125
8DPSK	2480	1.79	2.54	125

Modulation Mode	Freq. (MHz)	AV Output Power (mW)	AV Output Power (dBm)
GFSK	2402	1.48	1.69
GFSK	2441	1.58	1.98
GFSK	2480	1.58	1.98
π/4 DQPSK	2402	0.82	-0.88
π/4 DQPSK	2441	0.87	-0.60
π/4 DQPSK	2480	0.89	-0.49
8DPSK	2402	0.81	-0.89
8DPSK	2441	0.87	-0.61
8DPSK	2480	0.89	-0.50

Note: Average power is for reference only.

3.5 Number of Hopping Frequency


3.5.1 Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.


3.5.2 Test Procedures

1. Set RBW = 100kHz, VBW = 300kHz, Sweep time = Auto, Detector = Peak Trace max hold.
2. Allow trace to stabilize.

3.5.3 Test Setup



3.5.4 Test Result of Number of Hopping Frequency

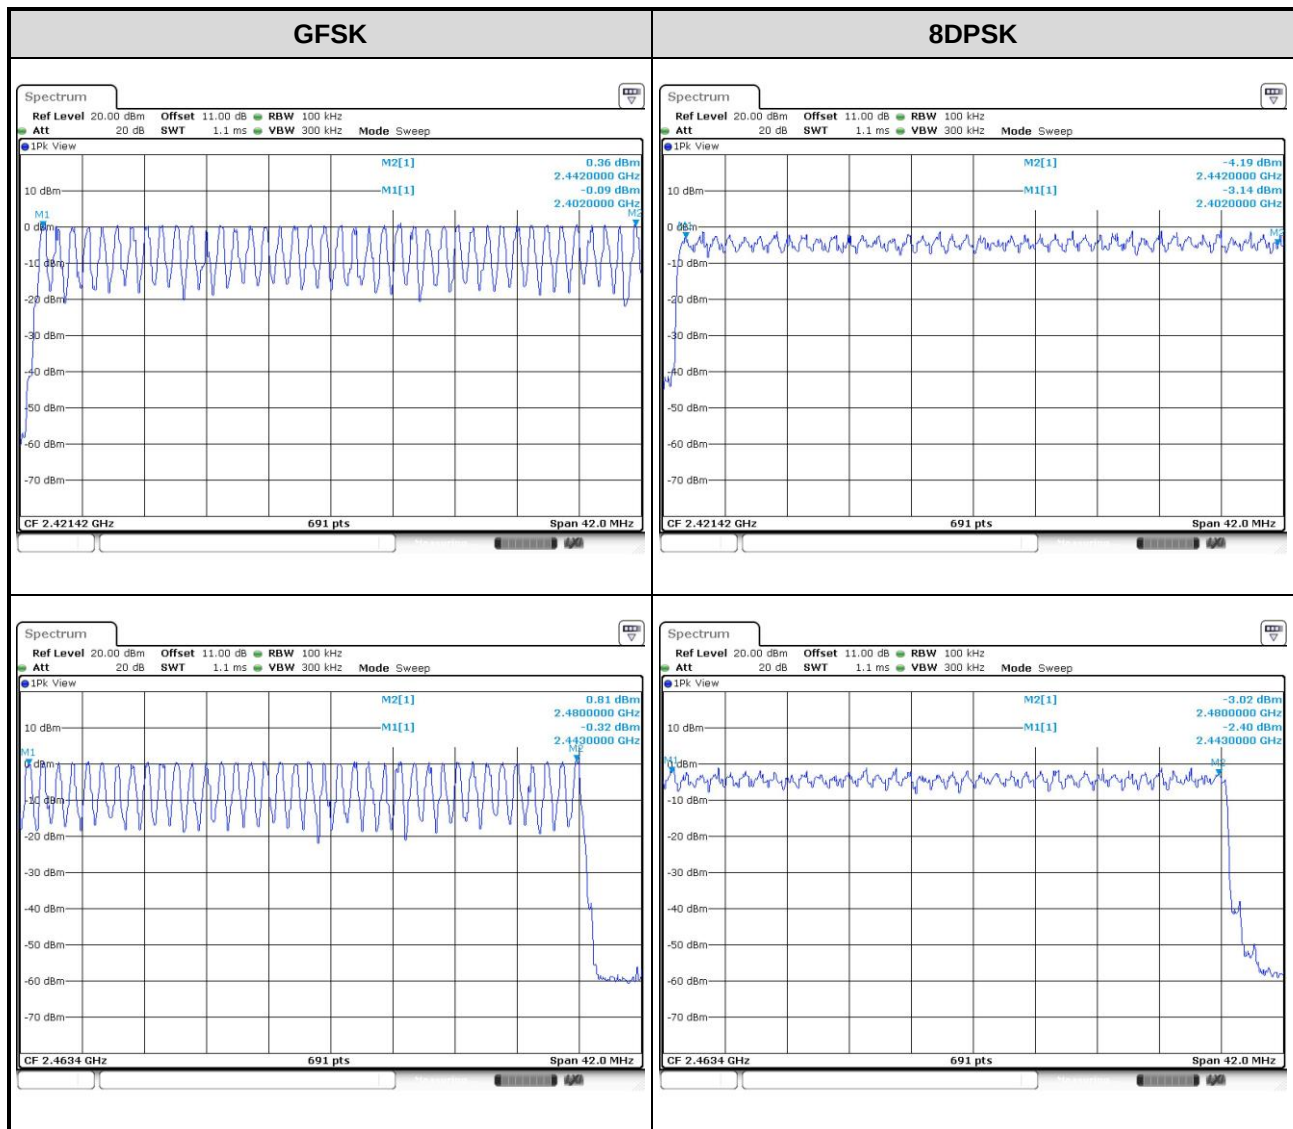


3.6 20dB and Occupied Bandwidth

3.6.1 Test Procedures


1. Set RBW=30kHz, VBW=100kHz, Sweep time = Auto, Detector=Peak Trace max hold
2. Allow trace to stabilize
3. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.
4. Use Occupied bandwidth function of spectrum analyzer to measuring 99% occupied bandwidth

3.6.2 Test Setup



3.6.3 Test result of 20dB and Occupied Bandwidth

Modulation Mode	Freq. (MHz)	20dB Bandwidth (MHz)	Occupied Bandwidth (MHz)
GFSK	2402	0.957	0.868
GFSK	2441	0.965	0.866
GFSK	2480	0.952	0.869
8DPSK	2402	1.304	1.181
8DPSK	2441	1.304	1.180
8DPSK	2480	1.300	1.175

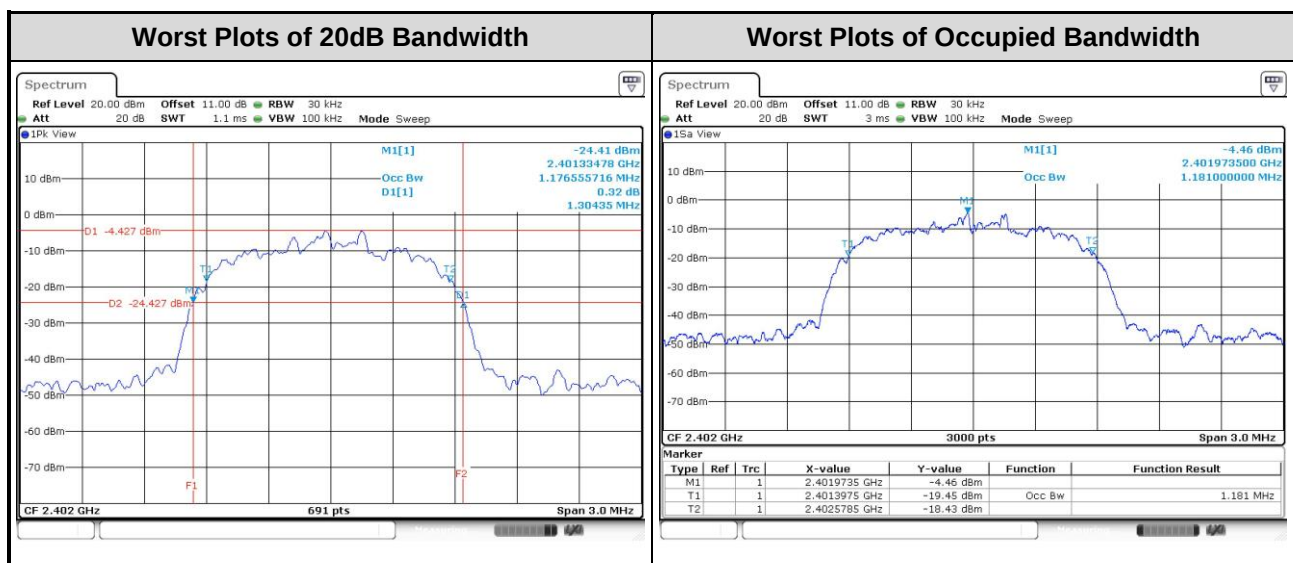

3.7 Channel Separation


3.7.1 Limit of Channel Separation

- ☐ Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- ☒ Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

3.7.2 Test Procedures


1. Set RBW=100kHz, VBW=300kHz, Sweep time = Auto, Detector=Peak Trace max hold
2. Allow trace to stabilize
3. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The EUT shall show compliance with the appropriate regulatory limit

3.7.3 Test Setup



3.7.4 Test result of Channel Separation

Modulation Mode	Freq. (MHz)	Channel Separation (MHz)	20dB Bandwidth (MHz)	Minimum Limit (MHz)
GFSK	2402	1.003	0.957	0.638
GFSK	2441	1.003	0.965	0.643
GFSK	2480	1.003	0.952	0.635
8DPSK	2402	1.003	1.304	0.870
8DPSK	2441	1.003	1.304	0.870
8DPSK	2480	1.003	1.300	0.867

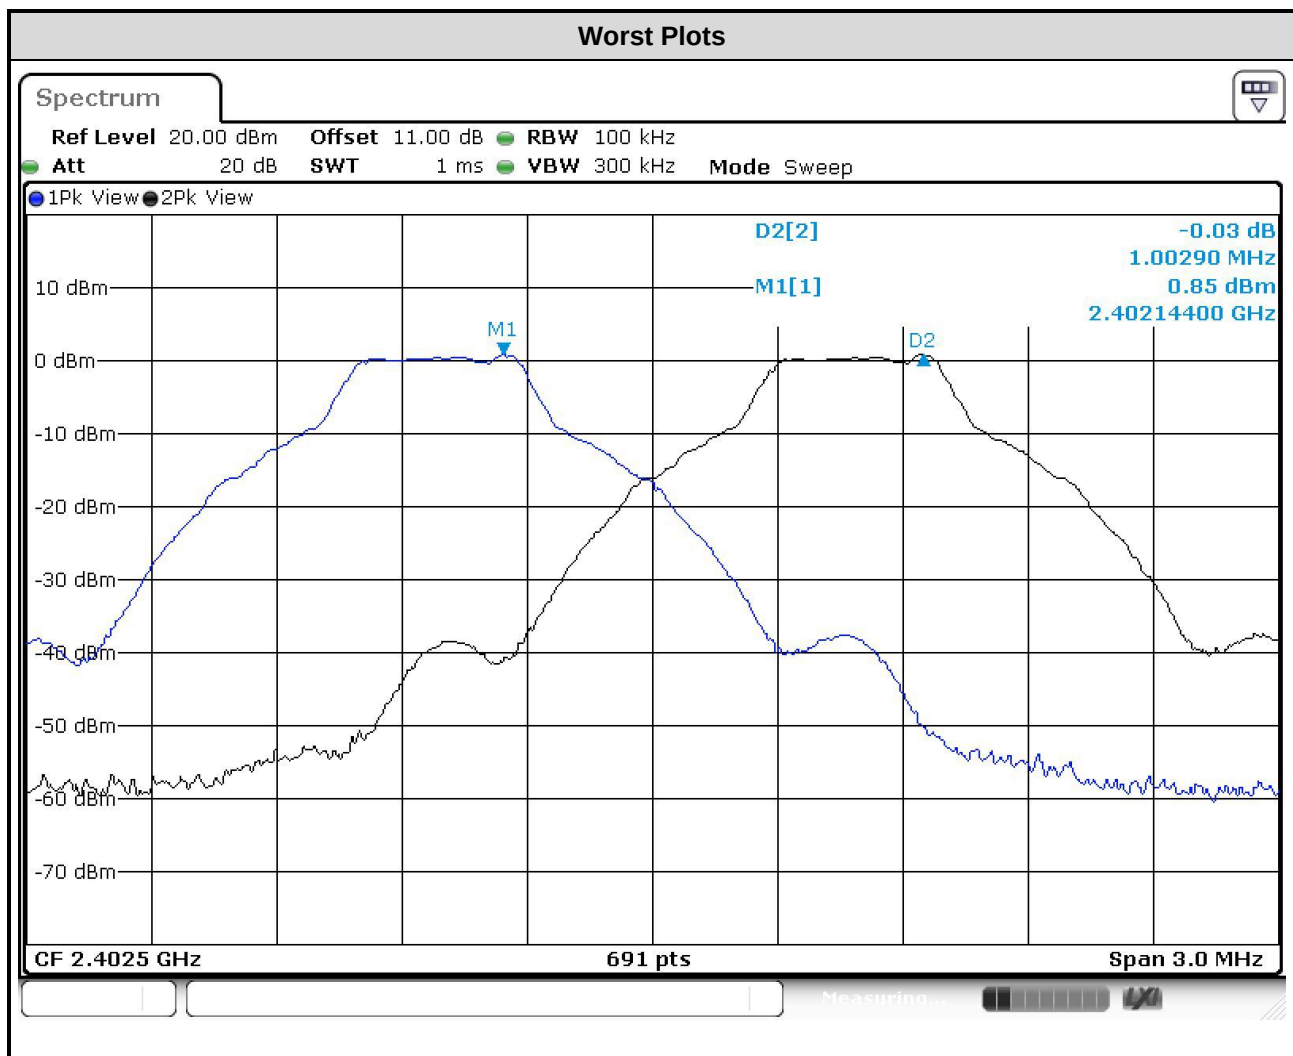

3.8 Number of Dwell Time


3.8.1 Limit of Dwell time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.8.2 Test Procedures


1. Set RBW=100kHz,VBW=300kHz,Sweep time = 500us(DH1),2ms(DH3),4ms(DH5), Detector=Peak, Span=0Hz,Trace max hold
2. Enable gating and trigger function of spectrum analyzer to measure burst on time.
3. The DH1 packet can cover a single time slot. A maximum length packet has duration of 1 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 1/1600 seconds, or 0.625ms. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.
4. The DH3 packet can cover up to 3 time slots. A maximum length packet has duration of 3 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 3/1600 seconds, or 1.875ms. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
5. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds


3.8.3 Test Setup



3.8.4 Test Result of Dwell Time

Modulation Mode	Freq. (MHz)	Length of Transmission Time (msec)	Number of Transmission in a 31.6 (79 Hopping*0.4)	Result (s)	Limit (s)
GFSK-DH1	2402	0.40656	320	0.130	0.4
GFSK-DH3	2402	1.67536	160	0.268	0.4
GFSK-DH5	2402	2.92174	106.6	0.311	0.4
8DPSK-DH1	2402	0.41380	320	0.132	0.4
8DPSK-DH3	2402	1.66667	160	0.267	0.4
8DPSK-DH5	2402	2.92174	106.6	0.311	0.4

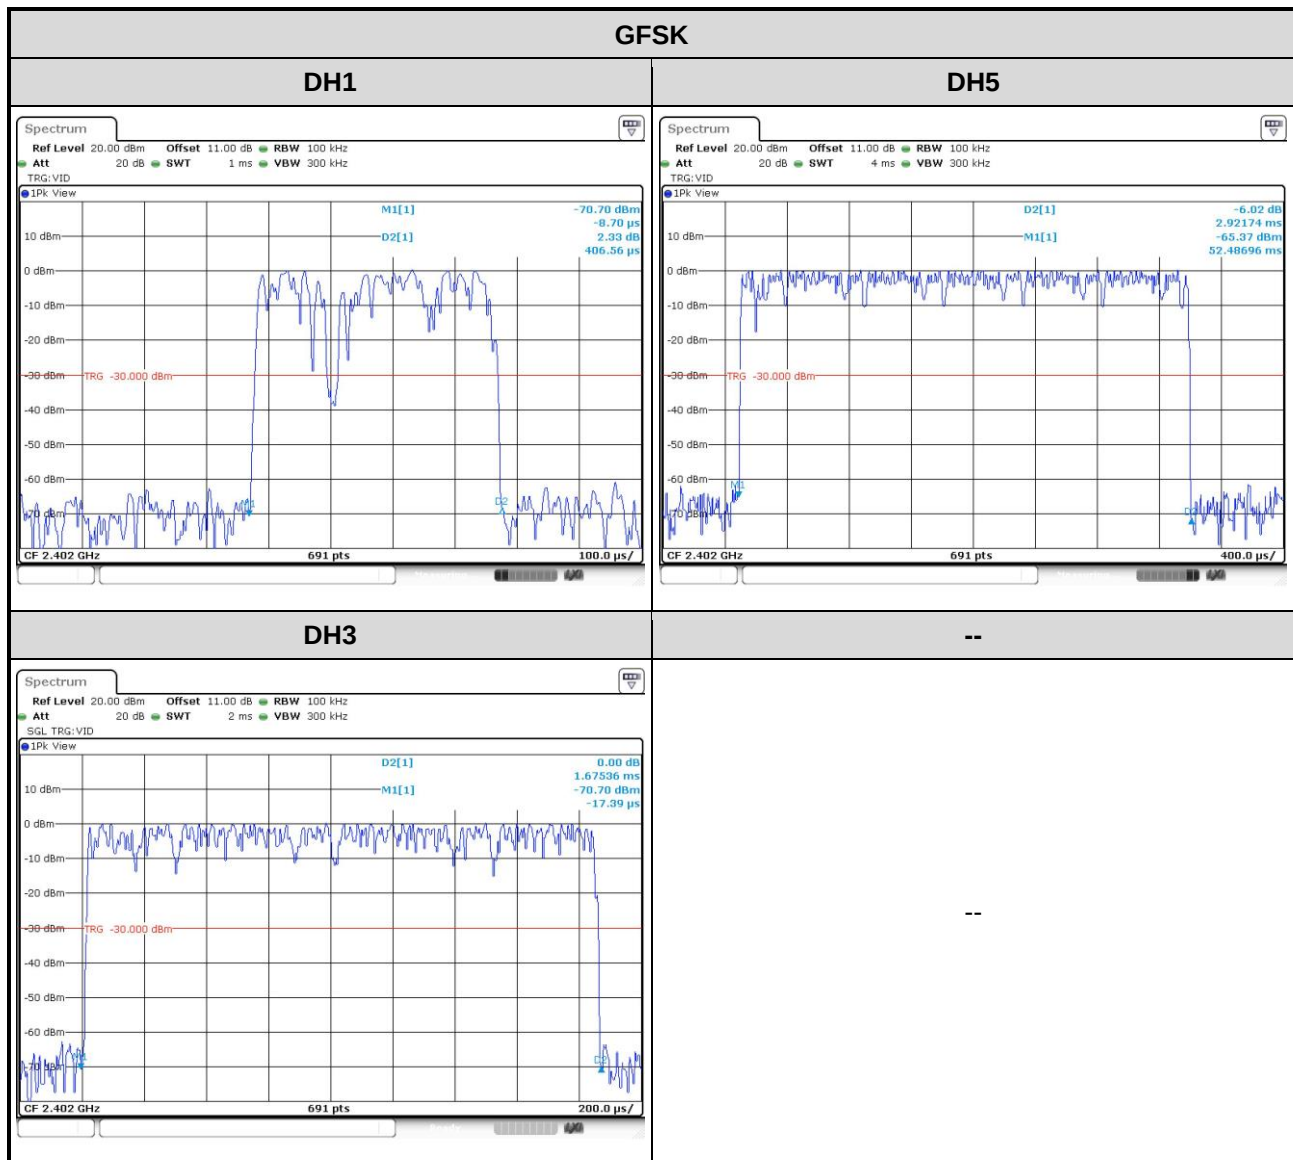

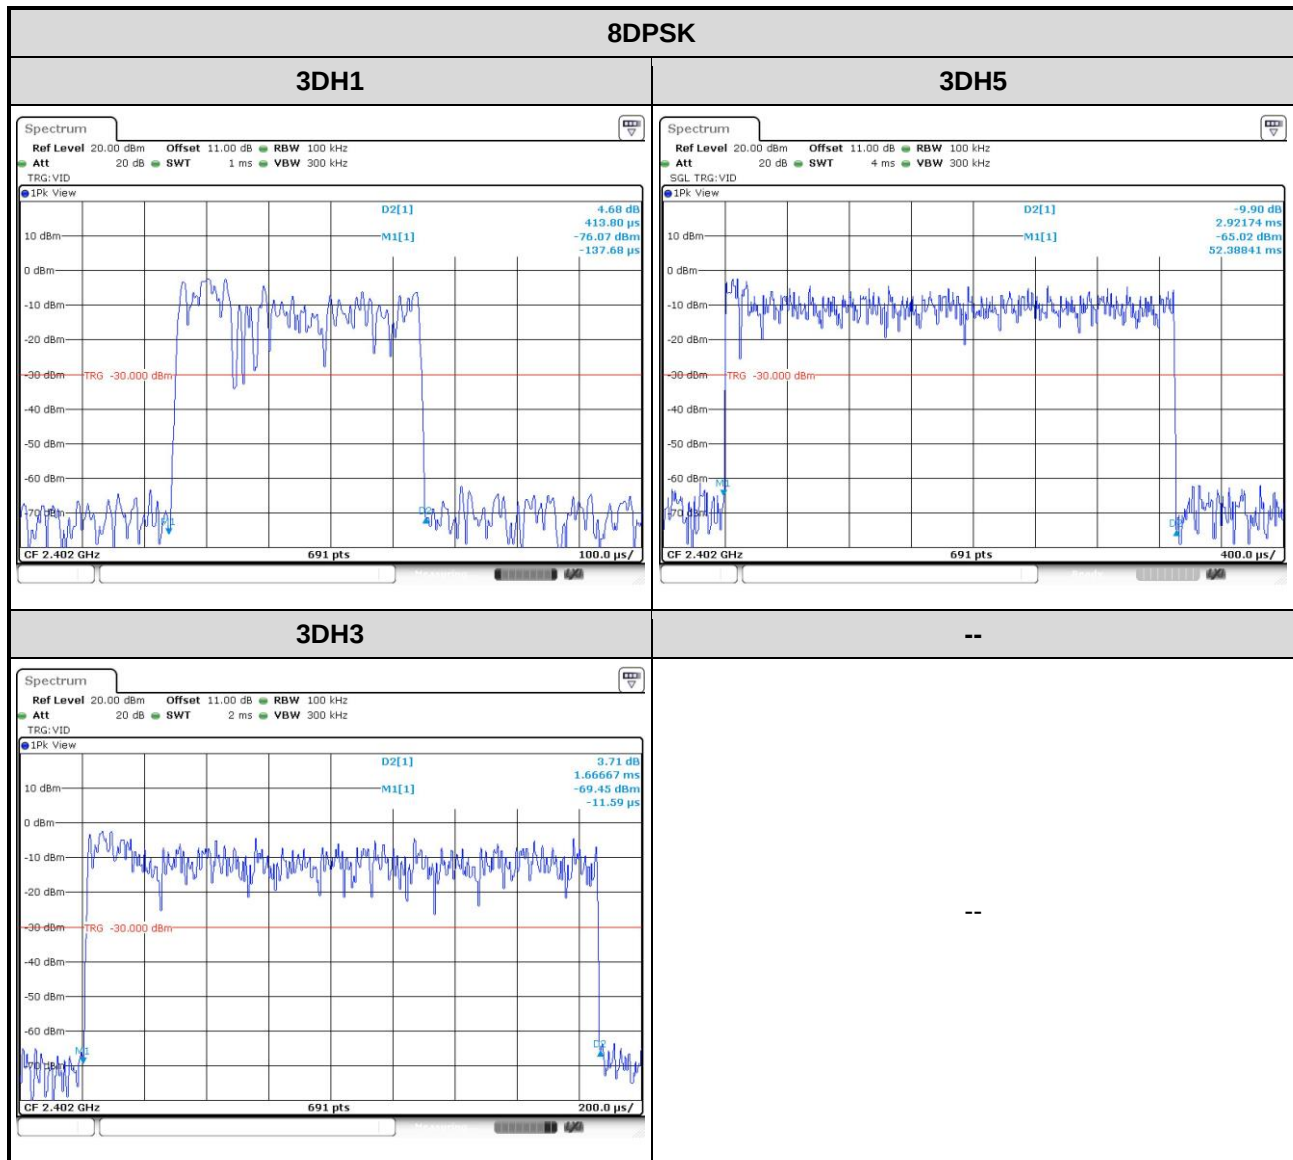

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan,
R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd
St., Kwei Shan Hsiang, Tao Yuan
Hsien 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan Hsiang, Tao Yuan
Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==