



ELEMENT WASHINGTON DC LLC

7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
<http://www.element.com>

TEST REPORT CBSD-SAS Interoperability

Applicant Name:
Skylark Wireless LLC
4011 Garrott St.
Houston, TX 77006


Date of Testing:
5/8/2023 – 7/13/2023
Test Report Issue Date:
7/13/2023
Test Site/Location:
Element lab. Columbia, MD, USA
Test Report Serial No.:
1M2305080068-02.2AS22

FCC ID:	2AS22-LUMACH2
APPLICANT:	Skylark Wireless LLC


Application Type:	Certification
Model:	LUMACH2
EUT Type:	CBRS Radio Module
Frequency Range:	3550 – 3700 MHz
FCC Classification:	Citizens Band Category B Devices (CBD)
FCC Rule Part(s):	Part 96
Test Procedure(s):	WINNF-TS-0122-V1.0.2, CBRSA-TS-9001 V.1.0.0

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in the test procedures listed above. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


RJ Ortanez
Executive Vice President



FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 1 of 65


© 2023 Element

V1.0

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

TABLE OF CONTENTS

1.0	INTRODUCTION.....	3
1.1	Scope.....	3
1.2	Element Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description	4
2.2	Device Capabilities	4
2.3	Test Configuration	4
2.4	Modifications	4
3.0	TEST EQUIPMENT CALIBRATION DATA.....	5
4.0	ENVIRONMENTAL CONDITIONS	6
5.0	EVALUATION PROCEDURE	7
6.0	TEST Summary.....	8
6.1	Summary	8
7.0	CONCLUSION	10
	APPENDIX A – TEST RESULT AND DATA	11
A1	[WINNF.FT.D.REG.2] DOMAIN PROXY MULTI-STEP REGISTRATION	11
A2	[WINNF.FT.D.REG.6] DOMAIN PROXY SINGLE-STEP REGISTRATION FOR CBSD WITH CPI SIGNED DATA	13
A3	[WINNF.FT.D.REG.9] DOMAIN PROXY MISSING REQUIRED PARAMETERS (RESPONSECODE 102)	15
A4	[WINNF.FT.D.REG.11] DOMAIN PROXY PENDING REGISTRATION (RESPONSECODE 200)	17
A5	[WINNF.FT.D.REG.13] DOMAIN PROXY INVALID PARAMETERS (RESPONSECODE 103).....	18
A6	[WINNF.FT.D.REG.15] DOMAIN PROXY BLACKLISTED CBSD (RESPONSECODE 101)	19
A7	[WINNF.FT.D.REG.17] DOMAIN PROXY UNSUPPORTED SAS PROTOCOL VERSION (RESPONSECODE100)	20
A8	[WINNF.FT.D.REG.19] DOMAIN PROXY GROUP ERROR (RESPONSECODE 201)	21
A9	[WINNF.FT.C.GRA.1] UNSUCCESSFUL GRANT RESPONSECODE=400 (INTERFERENCE)	22
A10	[WINNF.FT.C.GRA.2] UNSUCCESSFUL GRANT RESPONSECODE=401 (GRANT_CONFLICT)	23
A11	[WINNF.FT.D.HBT.2] DOMAIN PROXYHEARTBEAT SUCCESS CASE (FIRST HEARTBEAT RESPONSE)	24
A12	[WINNF.FT.C.HBT.3] HEARTBEAT RESPONSECODE=105 (DEREGISTER)	28
A13	[WINNF.FT.C.HBT.5] HEARTBEAT RESPONSECODE=501 (SUSPENDED_GRANT) IN FIRST HEARTBEAT RESPONSE ..	30
A14	[WINNF.FT.C.HBT.6] HEARTBEAT RESPONSECODE=501 (SUSPENDED_GRANT) IN SUBSEQUENT HEARTBEAT RESPONSE.....	32
A15	[WINNF.FT.C.HBT.7] HEARTBEAT RESPONSECODE=502 (UNSYNC_OP_PARAM)	34
A16	[WINNF.FT.D.HBT.8] DOMAIN PROXY HEARBEAT RESPONSECODE=500 (TERMINATED_GRANT)	36
A17	[WINNF.FT.C.HBT.9] HEARTBEAT RESPONSE ABSENT (FIRST HEARTBEAT)	38
A18	[WINNF.FT.C.HBT.10] HEARTBEAT RESPONSE ABSENT (SUBSEQUENT HEARTBEAT)	40
A19	[WINNF.FT.D.MES.2] DOMAIN PROXY REGISTRATION RESPONSE CONTAINS MEASREPORTCONFIG	42
A20	[WINNF.FT.D.RLQ.2] DOMAIN PROXY SUCCESSFUL RELINQUISHMENT	44
A21	[WINNF.FT.D.DRG.2] DOMAIN PROXY SUCCESSFUL DEREGISTRATION	46
A22	[WINNF.FT.C.SCS.1] SUCCESSFUL TLS CONNECTION BETWEEN UUT AND SAS TEST HARNESS.....	48
A23	[WINNF.FT.C.SCS.2] TLS FAILURE DUE TO REVOKED CERTIFICATE	51
A24	[WINNF.FT.C.SCS.3] TLS FAILURE DUE TO EXPIRED SERVER CERTIFICATE	53
A25	[WINNF.FT.C.SCS.4] TLS FAILURE WHEN SAS TEST HARNESS CERTIFICATE IS ISSUED BY AN UNKNOWN CA.....	55
A26	[WINNF.FT.C.SCS.5] TLS FAILURE WHEN CERTIFICATE AT THE SAS TEST HARNESS IS CORRUPTED	57
A27	[WINNF.PT.C.HBT.1] UUT RF TRANSMIT POWER MEASUREMENT.....	59
	APPENDIX B – TEST LOGS	64
	APPENDIX C – TEST SETUP	65

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 2 of 65

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of compliance with the technical rules and regulations of the Federal Communications Commission.


1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7195 Oakland Mills Road, Columbia, MD 21046.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element is a CBRS Alliance (OnGo) Approved Test Lab
- Element is a WinnForum Approved Test Lab
- Element is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for CBRS Alliance Certification Test Plan and WinnForum Conformance and Performance Test Technical Standard.
- Element is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- Element facility is a registered (2451B) test laboratory with the site description on file with ISSED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISSED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreement.

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 3 of 65

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Skylark Wireless, CBRS Radio Module FCC ID: 2AS22-LUMACH2**. The test data contained in this report pertains only to CBSD-SAS interoperability. The EUT is a category B CBSD. The EUT is a domain proxy.

Test Device Serial Number(s): RF5B000050, RF5B000079

Test Device Hardware Version: Revision C

Test Device Software Version: 2023.07.01

2.2 Device Capabilities

This device contains the following capabilities:

Band 48

This device supports the following conditional features:

	Conditional Test Case Definitions	Supported
C1	Mandatory for UUT which supports multi-step registration message	<input checked="" type="checkbox"/>
C2	Mandatory for UUT which supports single-step registration with no CPI-signed data in the registration message. By definition, this is a subset of Category A devices which determine all registration information, including location, without CPI intervention.	<input type="checkbox"/>
C3	Mandatory for UUT which supports single-step registration containing CPI-signed data in the registration message.	<input checked="" type="checkbox"/>
C4	Mandatory for UUT which supports RECEIVED_POWER_WITHOUT_GRANT measurement report type.	<input checked="" type="checkbox"/>
C5	Mandatory for UUT which supports RECEIVED_POWER_WITH_GRANT measurement report type.	<input type="checkbox"/>
C6	Mandatory for UUT which supports parameter change being made at the UUT and prior to sending a deregistration	<input type="checkbox"/>


Table 2-1. Conditional Features

2.3 Test Configuration

The EUT was connected to the SAS Test Harness developed by WINNF WG4-CBSD. The SAS Test Harness (V1.0.0.2) provided by CBRS Alliance was used. The SAS Test Harness is synchronized to UTC time. For tests requiring two CBSDs to be monitored, outputs from both modules were coupled together and monitored simultaneously.

2.4 Modifications

No modifications were made to EUT during testing.


FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 4 of 65

3.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).


Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9020A	MXA Signal Analyzer	3/15/2023	Annual	3/15/2024	US46470561
Dell	Latitude 5580	Test Harness Laptop	N/A	N/A	N/A	N/A

Table 3-1 Annual Test Equipment Calibration Schedule

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 5 of 65

4.0 ENVIRONMENTAL CONDITIONS

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 6 of 65

5.0 EVALUATION PROCEDURE

The measurement procedure described in KDB 940660 D01 v03 and WINNF-TS-0122-V1.0.2 was used in the measurement of the EUT.

Deviation from measurement procedure.....None

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 7 of 65

6.0 TEST SUMMARY

6.1 Summary

Company Name: Skylark Wireless LLC

FCC ID: 2AS22-LUMACH2

Table 6-1. Summary of Test Results

FCC Part Section(s)	KDB940660 D01 Section 3.3 a)	Test Case Description	WinnForum Test Case	Test Result
96.39 (c)	1	Confirm that the device will only transmit after it receives authorization from a SAS	WINNF.FT.D.REG.2 WINNF.FT.D.REG.6 WINNF.FT.D.REG.9 WINNF.FT.D.REG.11 WINNF.FT.D.REG.13 WINNF.FT.D.REG.15 WINNF.FT.D.REG.17 WINNF.FT.D.REG.19 WINNF.FT.C.GRA.1 WINNF.FT.C.GRA.2 WINNF.FT.C.HBT.5	Pass
96.39 (c)	2	Check the device registration and authorization with the SAS – determine if the device behaves appropriately for successful and unsuccessful registrations. The device should not be transmitting without authorization from the SAS.	WINNF.FT.D.REG.2 WINNF.FT.D.REG.6 WINNF.FT.D.REG.9 WINNF.FT.D.REG.11 WINNF.FT.D.REG.13 WINNF.FT.D.REG.15 WINNF.FT.D.REG.17 WINNF.FT.D.REG.19	Pass
96.39(c)(1)	3	Confirm that the device changes its operating power and/or channel in response to a command from the SAS.	WINNF.FT.D.HBT.2	Pass
96.39	4	Confirm that the device correctly configures based on the different license classes	N/A	Pass
96.39(c)(1)	5	Confirm that the device transmits at a power level less than or equal to the maximum power level approved by the SAS.	WINNF.PT.C.HBT.1	Pass
96.39(c)	6	Confirm that the device transmits with a bandwidth less than or equal to the SAS specified bandwidth.	WINNF.FT.D.HBT.2	Pass
96.39(c)(2)	7	Confirm that the device transmits on the SAS specified frequency.	WINNF.FT.D.HBT.2	Pass
96.39(c)(2)	8	Confirm that the device stops transmission in response to a command from the SAS, within a period as required by Part 96.	WINNF.FT.C.HBT.3 WINNF.FT.C.HBT.6 WINNF.FT.C.HBT.7 WINNF.FT.D.HBT.8 WINNF.FT.C.HBT.10 WINNF.FT.D.RLQ.2 WINNF.FT.D.DRG.2	Pass



FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 8 of 65

Table 6-2. Summary of Test Results (continued)

96.39 (d)	9	Confirm that the device sends measurements data in response to the command from the SAS.	WINNF.FT.D.MES.2	Pass
96.39(a)	10	For devices with geo-location, confirm that it notifies the SAS of a new location when it is beyond the required distance parameter (± 50 m) within the required time frame.	N/A	N/A
96.39 (d)	11	Confirm that the device is capable of reporting the signal level (measurement data) and frequency to SAS.	WINNF.FT.D.MES.2	Pass
96 E	12	When CBSDs communicate through a management system, confirm compliance with all requirements.	N/A	Pass
96.39	13	When communication between the CBSD and SAS is lost: i) Describe how the CBSD would react if the communications between the device and the SAS is lost. Confirm that the CBSD stops transmission once it loses the link to the SAS. ii) Describe the process for re-establishment of the communications and confirm that the CBSD acts accordingly. iii) Confirm power-on restart process for registration (re-registration) occurs as expected. iv) Confirm the process for de-registration occurs as expected.	WINNF.FT.C.HBT.9 WINNF.FT.C.HBT.10	Pass
96.39(f)	KDB940660 D01 Section 4	SAS and Device Security Requirements	WINNF.FT.C.SCS.1 WINNF.FT.C.SCS.2 WINNF.FT.C.SCS.3 WINNF.FT.C.SCS.4 WINNF.FT.C.SCS.5	Pass
96.39(e)	N/A	The CBSD must report to the SAS which available channels or frequencies it will use	WINNF.PT.C.HBT.1 WINNF.FT.D.HBT.2 WINNF.FT.C.HBT.3 WINNF.FT.C.HBT.6 WINNF.FT.C.HBT.7 WINNF.FT.D.HBT.8 WINNF.FT.C.HBT.10 WINNF.FT.D.RLQ.2 WINNF.FT.D.DRG.2	Pass


Notes:

- Test cases denoted as “N/A” in the table above are not applicable to the EUT and are either Optional or Conditional per Section 6 of WINNF-TS-0122.
- Please see Appendices for test data.

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 9 of 65

7.0 CONCLUSION


The data collected relate only to the item(s) tested and show that the **Skylark Wireless, CBRS Radio Module FCC ID: 2AS22-LUMACH2** has been tested to show compliance with Part 96 and WINNF-TS-0122.

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 10 of 65


APPENDIX A – TEST RESULT AND DATA

A1 [WINNF.FT.D.REG.2] Domain Proxy Multi-Step registration


	Test Execution Steps	PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness • UUT is in the Unregistered state 	--	--
2	<ul style="list-style-type: none"> • DP with two CBSD sends correct Registration request information, as specified in [n.5], in the form of one 2-element Array or as individual messages to the SAS Test Harness: • The required userId, fcId and cbsdSerialNumber registration parameters shall be sent for each CBSD and conform to proper format and acceptable ranges. • Any REG-conditional or optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges <p>Note: It is outside the scope of this document to test the Registration information that is supplied via another means.</p>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<ul style="list-style-type: none"> • SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or individual messages as follows: - cbsdId = Ci - measReportConfig shall not be included - responseCode = 0 for each CBSD 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	<p>Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 11 of 65

Test Plots:

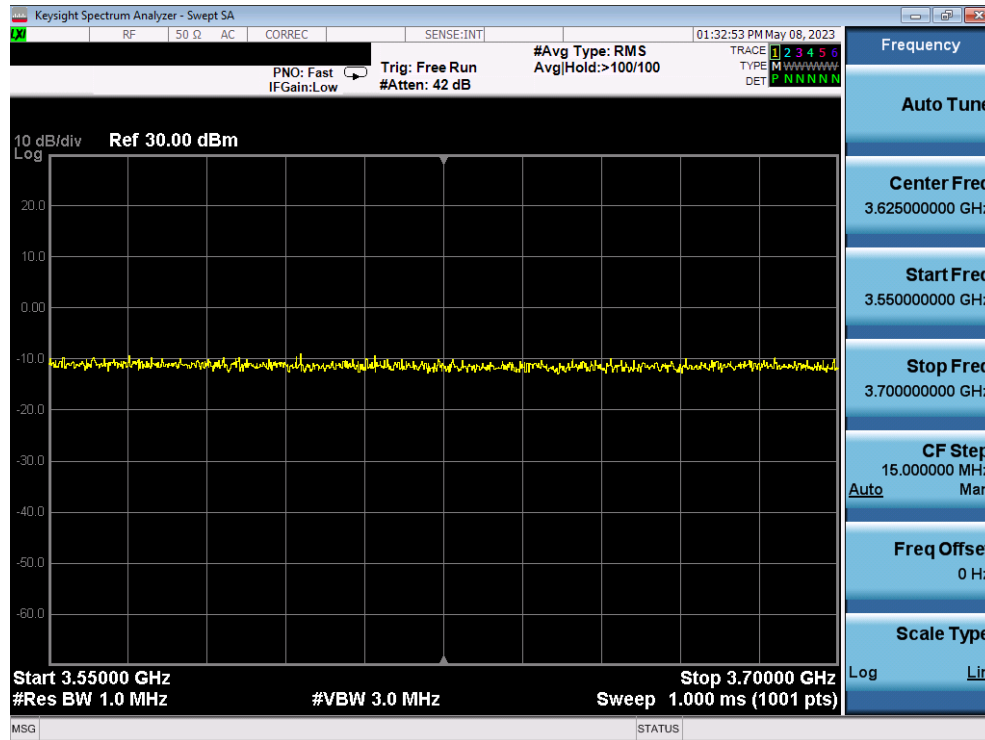


Plot 1. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.D.REG.2)


FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 12 of 65

A2 [WINNF.FT.D.REG.6] Domain Proxy Single-Step registration for CBSD with CPI signed data

	Test Execution Steps	PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state • All of the required and REG-Conditional parameters shall be configured and CPI signature provided 	--	--
2	<p>The DP with two CBSDs sends Registration requests in the form of one 2-element Array or as individual messages to the SAS Test Harness:</p> <ul style="list-style-type: none"> • The required userId, fcId and cbsdSerialNumber and REG-Conditional cbsdCategory, airInterface, installationParam, and measCapability registration parameters shall be sent from the CBSD and conform to proper format and acceptable ranges. • Any optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges. 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<ul style="list-style-type: none"> • SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: <ul style="list-style-type: none"> - cbsdId = C - measReportConfig for each CBSD shall not be included - responseCode = 0 for each CBSD 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	<p>Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 13 of 65

Test Plots:

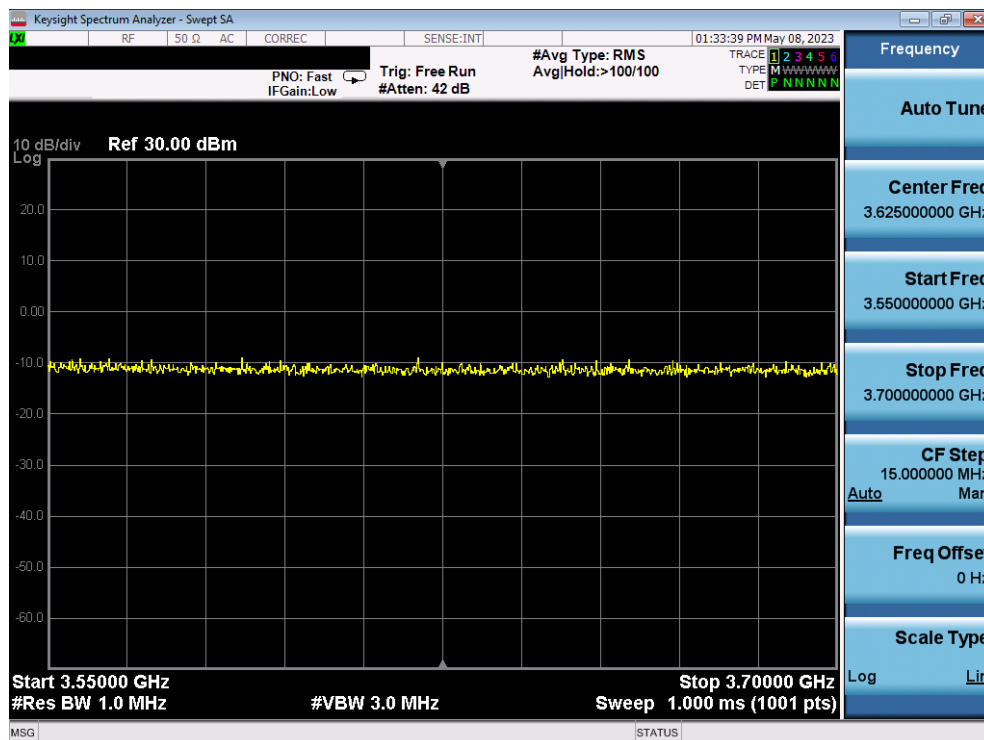


Plot 2. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.D.REG.6)


FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 14 of 65

A3 [WINNF.FT.D.REG.9] Domain Proxy Missing Required parameters (responseCode 102)


	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state 	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to the SAS Test Harness:	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<ul style="list-style-type: none"> • SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: <ul style="list-style-type: none"> - SAS response does not include a cbsdID - responseCode = 102 for CBSD1 and CBSD2 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 15 of 65

Test Plots:

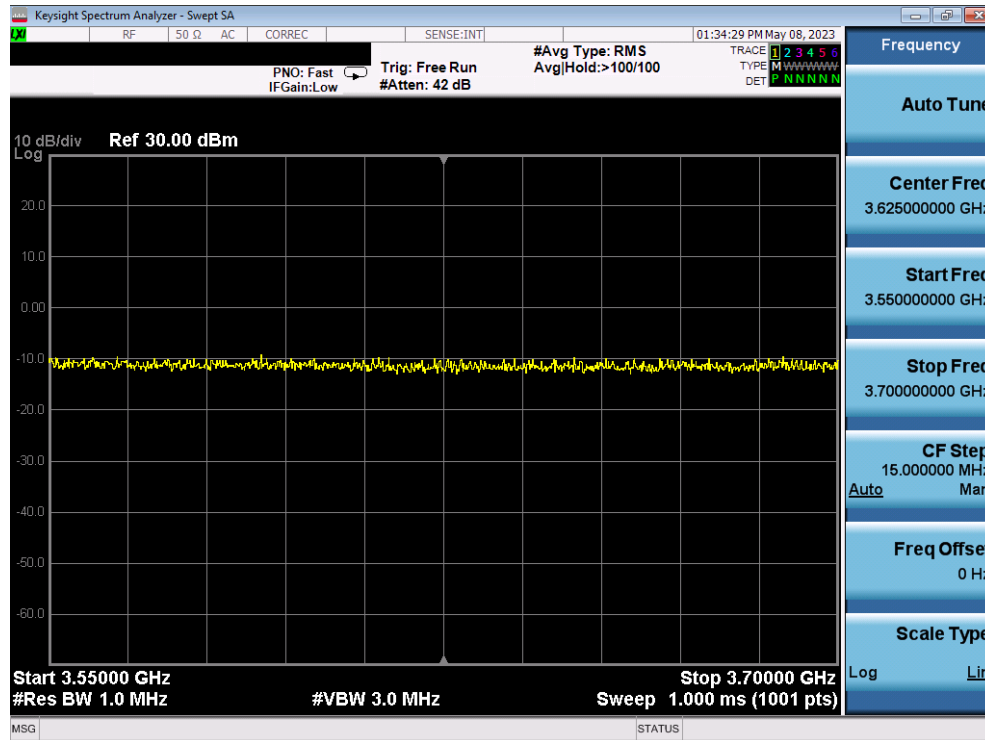


Plot 3. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.D.REG.9)

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 16 of 65


A4 [WINNF.FT.D.REG.11] Domain Proxy Pending Registration (responseCode 200)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state 	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to the SAS Test Harness:	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<ul style="list-style-type: none"> • SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: <ul style="list-style-type: none"> - SAS response does not include a cbsdID - responseCode = 200 for CBSD1 and CBSD2 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Test Plots:

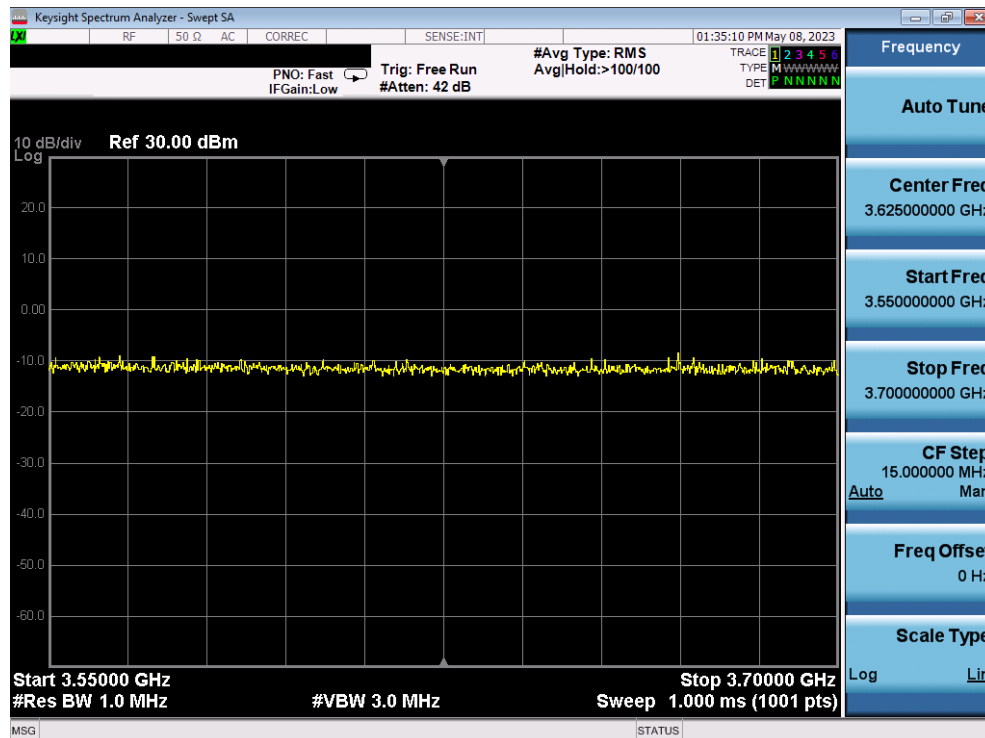


Plot 4. Conducted Measurement - No RF transmission in entire band for 60s of elapsed time (WINNF.FT.D.REG.11)

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 17 of 65


A5 [WINNF.FT.D.REG.13] Domain Proxy Invalid parameters (responseCode 103)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state 	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to the SAS Test Harness:	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<ul style="list-style-type: none"> • SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: <ul style="list-style-type: none"> - SAS response does not include a cbsdID - responseCode = 103 for CBSD1 and CBSD2 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Test Plots:

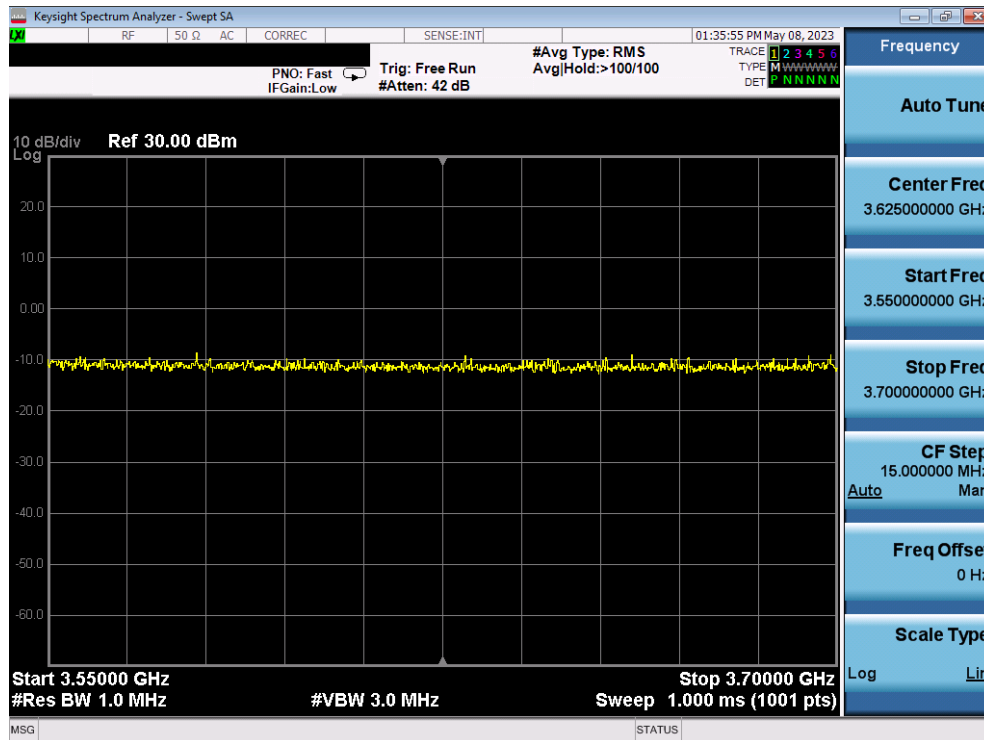


Plot 5. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.D.REG.13)

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 18 of 65


A6 [WINNF.FT.D.REG.15] Domain Proxy Blacklisted CBSD (responseCode 101)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state 	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to the SAS Test Harness:	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<ul style="list-style-type: none"> • SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: <ul style="list-style-type: none"> - SAS response does not include a cbsdID - responseCode = 0 for CBSD1 - responseCode = 101 and CBSD2 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Test Plots:

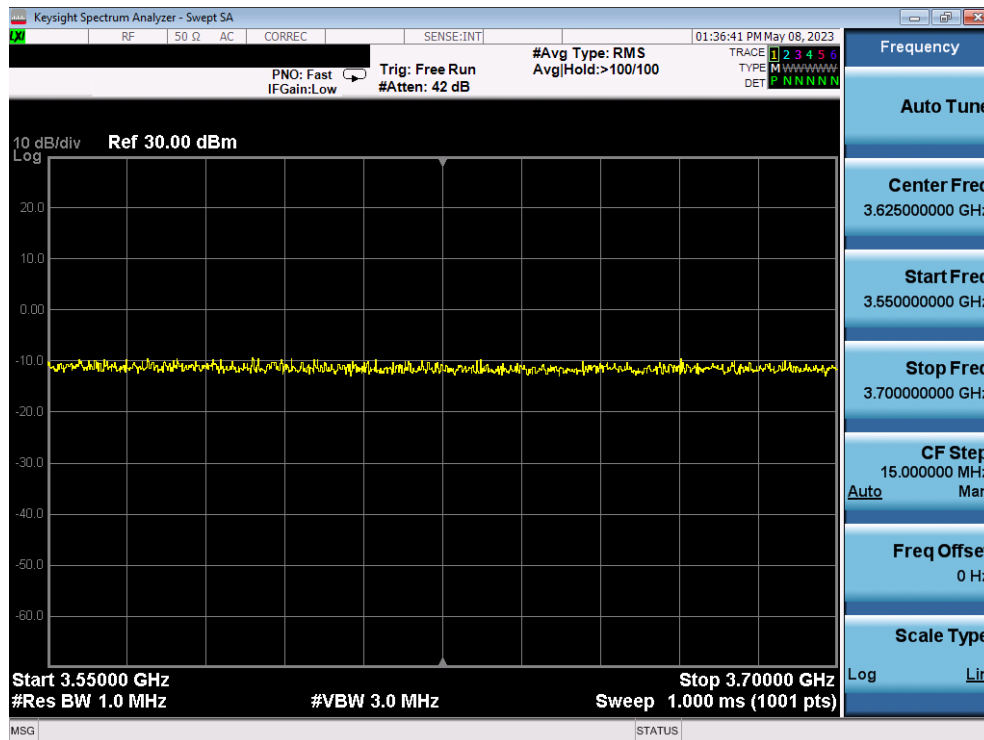


Plot 6. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.D.REG.15)

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 19 of 65


A7 [WINNF.FT.D.REG.17] Domain Proxy Unsupported SAS protocol version (responseCode100)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state 	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to the SAS Test Harness:	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<ul style="list-style-type: none"> • SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: <ul style="list-style-type: none"> - SAS response does not include a cbsdID - responseCode = 100 for each CBSD 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Test Plots:

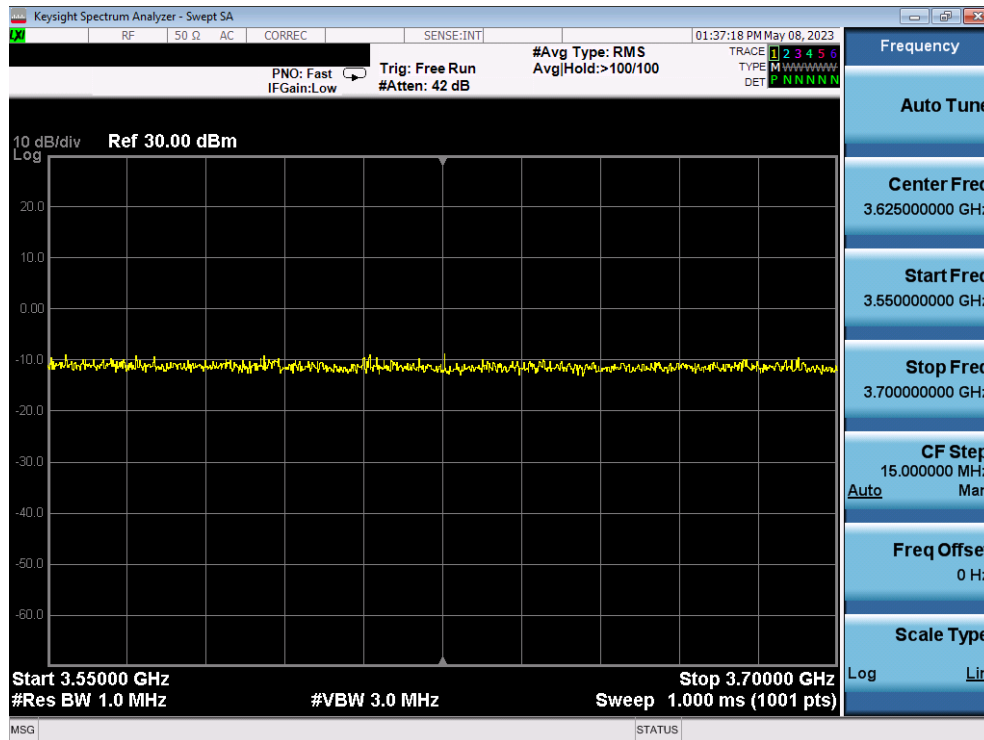


Plot 7. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.D.REG.17)

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 20 of 65


A8 [WINNF.FT.D.REG.19] Domain Proxy Group Error (responseCode 201)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state 	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to the SAS Test Harness:	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<ul style="list-style-type: none"> • SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: <ul style="list-style-type: none"> - SAS response does not include a cbsdID - responseCode = 0 for CBSD1 - responseCode = 201 and CBSD2 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Test Plots:

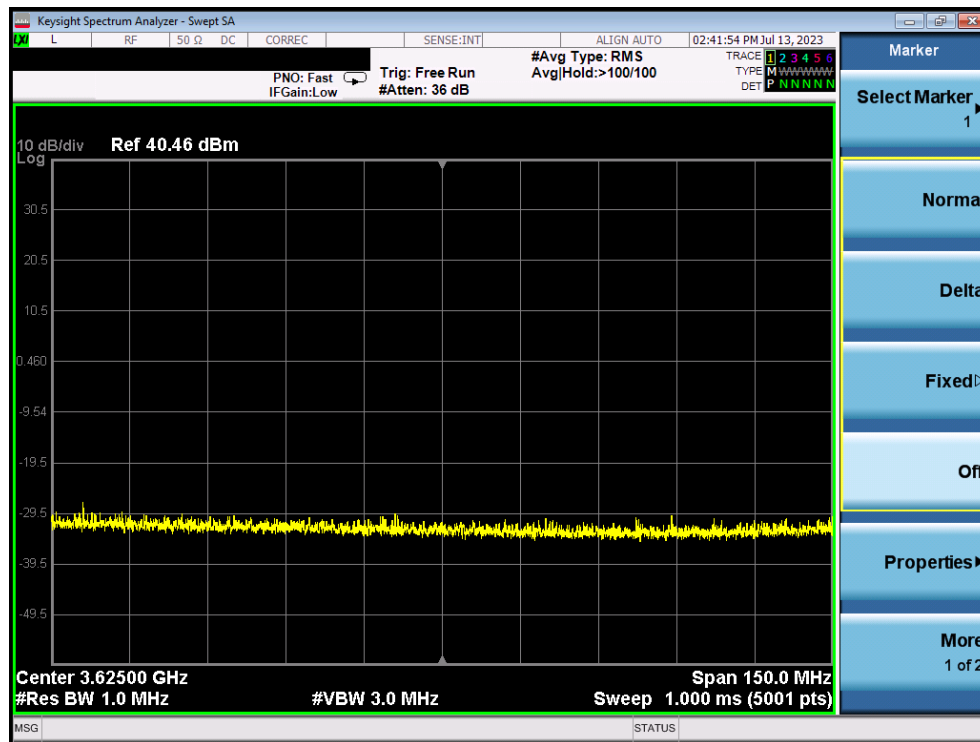

Plot 8. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.D.REG.19)


FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 21 of 65

A9 [WINNF.FT.C.GRA.1] Unsuccessful Grant responseCode=400 (INTERFERENCE)


The following steps describe the test execution where the Grant response contains responseCode (R) = 400:

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness, with cbsdId = C	--	--
2	UUT sends valid Grant Request.	--	--
3	SAS Test Harness sends a Grant Response message, including • cbsdId=C • responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Test Plots:

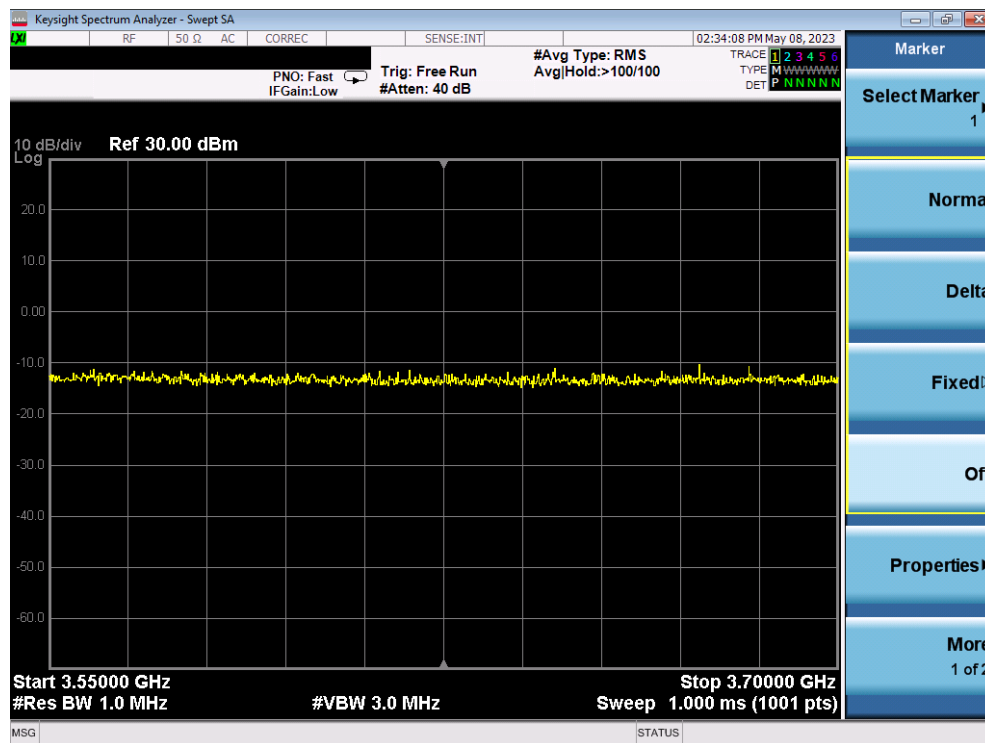

Plot 9. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.C.GRA.1)


FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 22 of 65

A10 [WINNF.FT.C.GRA.2] Unsuccessful Grant responseCode=401 (GRANT_CONFLICT)


The following steps describe the test execution where the Grant response contains responseCode (R) = 401:

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> UUT has registered successfully with SAS Test Harness, with cbsdId = C 	--	--
2	UUT sends valid Grant Request.	--	--
3	SAS Test Harness sends a Grant Response message, including <ul style="list-style-type: none"> cbsdId=C responseCode = R 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> UUT shall not transmit RF 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Test Plots:

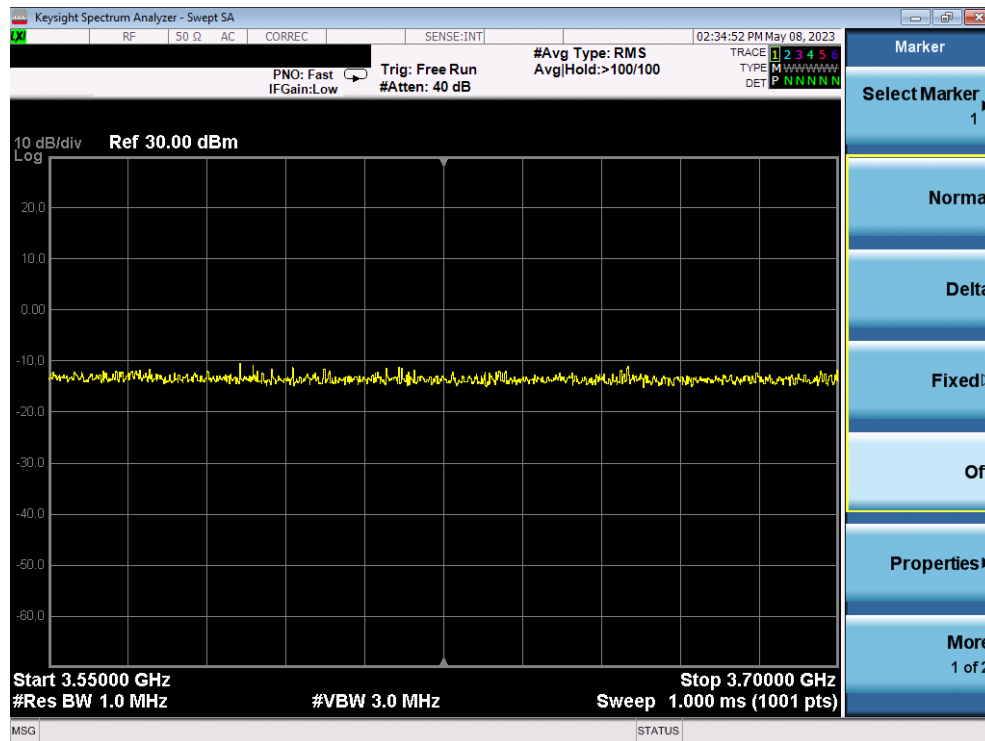


Plot 10. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.C.GRA.2)


FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 23 of 65

A11 [WINNF.FT.D.HBT.2] Domain ProxyHeartbeat Success Case (first Heartbeat Response)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> DP has two CBSD registered successfully with SAS Test Harness, with cbsdId = Ci, i={1,2} 	--	--
2	DP sends a message: <ul style="list-style-type: none"> If message is type Spectrum Inquiry Request, go to step 3, or If message is type Grant Request, go to step 5 	--	--
3	DP sends a Spectrum Inquiry Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Spectrum Inquiry Request message is formatted correctly for each CBSD, including for CBSDi, i={1,2}: <ul style="list-style-type: none"> cbsdId = Ci List of frequencyRange objects sent by DP are within the CBRS frequency range 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4	If a separate Spectrum Inquiry Request message was sent for each CBSD, the SAS Test Harness shall respond to each Spectrum Inquiry Request message with a separate Spectrum Inquiry Response message. If a single Spectrum Inquiry Request message was sent containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Spectrum Inquiry Response message containing a 2-object array. Verify parameters for each CBSD withing the Spectrum Inquiry Response message are as follows, for CBSDi, i={1,2}: <ul style="list-style-type: none"> cbsdId = Ci availableChannel is an array of availableChannel objects responseCode = 0 	--	--
5	DP sends Grant Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Grant Request message is formatted correctly for each CBSD including for CBSDi, i={1,2} <ul style="list-style-type: none"> cbsdId = Ci maxEIRP is at or below the limit appropriate for CBSD category as defined by Part 96 operationFrequencyRange, Fi, sent by UUT is a valid range within the CBRS band 	<input checked="" type="checkbox"/>	<input type="checkbox"/>


FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 24 of 65

6	<p>If a separate Grant Request message was sent ofr each CBSD, the SAS Test Harness shall respond to each Grant Request message with a separate Grant Response message.</p> <p>If a single Grant Request message was sent containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Grant Response message containing a 2-object array.</p> <p>Verify parameters for each CBSD within the Grant Response message are as follows, for CBSDi, i={1,2}</p> <ul style="list-style-type: none"> • cbsdId = Ci • grantId = Gi = a valid grant ID • grantExpireTime = UTC time greater than duration of the test • responseCode = 0 	--	--
7	<p>Ensure DP sends first Heartbeat Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2.</p> <p>Verify Heartbeat Request message is formatted correctly for each CBSD, including, for CBSDi i={1,2}</p> <ul style="list-style-type: none"> • cbsdId = Ci, i={1,2} • grantId = G, i={1,2} • operationState = "GRANTED" 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
8	<p>If a separate Heartbeat Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Heartbeat Request message with a separate Heartbeat Response message.</p> <p>If a single Heartbeat Request message was sent for each CBSD by the D containing a 2-object arry (one per CBSD), the SAS Test Harness shall respond with a single Heartbeat Response message containing a 2-object array.</p> <p>Verify parameters for each CBSD within the Heartbeat Response message are as follows, for CBSDi:</p> <ul style="list-style-type: none"> • cbsdId = Ci • grantId = Gi • transmitExpireTime = current UTC time + 200 seconds • responseCode = 0 	--	--
9	<p>For further Heartbeat Request messages sent from DP after completion of step 8, validate message is sent within latest specified heartbeatInterval for CBSDi, and:</p> <ul style="list-style-type: none"> • cbsdId = Ci • grantId = Gi 	<input checked="" type="checkbox"/>	<input type="checkbox"/>


FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 25 of 65


	<ul style="list-style-type: none"> • operationState = "AUTHORIZED" and SAS Test Harness responds with a Heartbeat Response message including the following parameters: <ul style="list-style-type: none"> • cbsdId = Ci • grantId = Gi • transmitExpireTime = current UTC time + 200 seconds • responseCode = 0 		
10	Monitor the RF output of each UUT from start of test until UUT transmission commences. Verify: <ul style="list-style-type: none"> • Each UUT does not transmit at any time prior to completion of the first heartbeat response • Each UUT transmits after step 8 is complete, and its transmission is limited to within the bandwidth range F 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Test Plots:

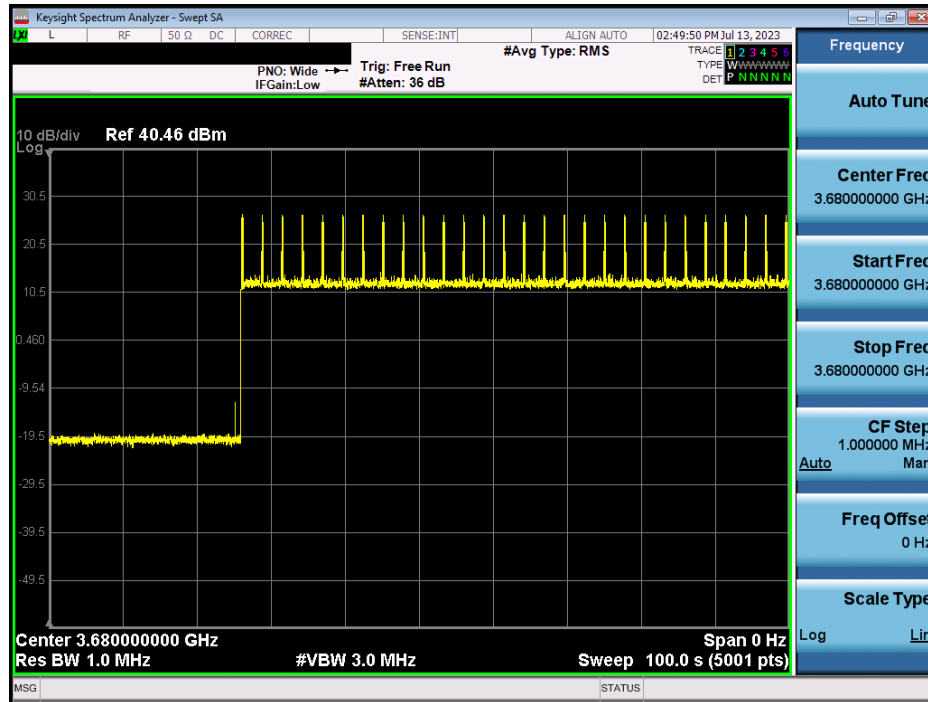


Plot 11. Conducted Measurement - RF transmission after SAS heartbeat response (WINNF.FT.D.HBT.2)

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 26 of 65

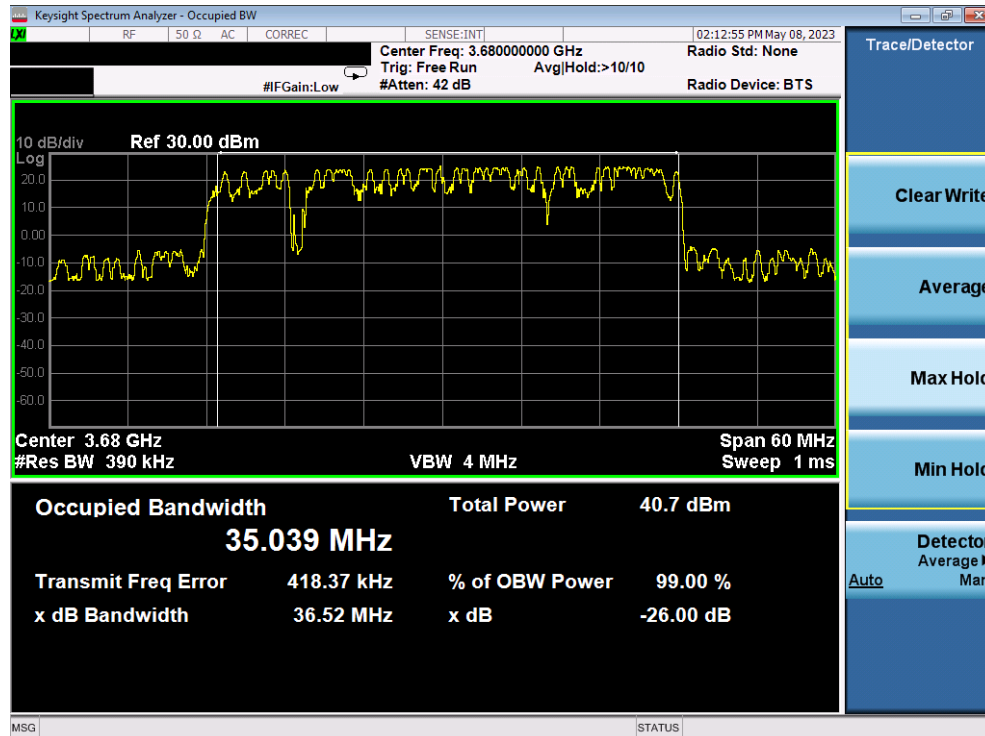


Plot 12. Conducted Measurement Occupied Bandwidth for 40MHz (WINNF.FT.C.HBT.1)


FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 27 of 65

A12 [WINNF.FT.C.HBT.3] Heartbeat responseCode=105 (DEREGISTER)


	Test Execution Steps	PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> o valid cbsdId = C o valid grantId = G o grant is for frequency range F, power P o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including:</p> <ul style="list-style-type: none"> • cbsdId = C • grantId = G • operationState = "AUTHORIZED" 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 105 (DEREGISTER) 	--	--
4	<p>After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.</p>	--	--
5	<p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> • UUT shall stop transmission within (T + 60 seconds) of completion of step 3 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 28 of 65

Test Plots:

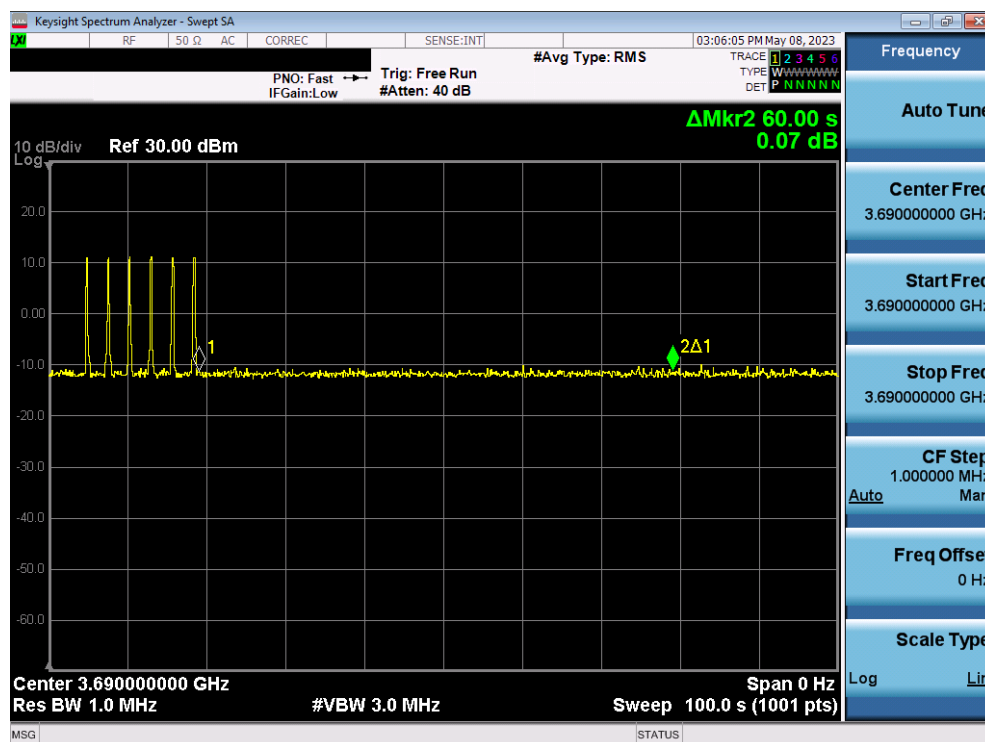


Plot 13. Conducted Measurement - RF transmission stops within 60s of SAS message indicated by Marker 1 (X) (WINNF.FT.C.HBT.3)


FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 29 of 65

A13 [WINNF.FT.C.HBT.5] Heartbeat responseCode=501 (SUSPENDED_GRANT) in First Heartbeat Response


	Test Execution Steps	PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> o valid cbsdId = C o valid grantId = G o grant is for frequency range F, power P o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including:</p> <ul style="list-style-type: none"> • cbsdId = C • grantId = G • operationState = "GRANTED" 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 501 (SUSPENDED_GRANT) 	--	--
4	<p>After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.</p>	--	--
5	<p>Monitor the SAS-CBSD interface. Verify either A OR B occurs:</p> <p>A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters:</p> <ul style="list-style-type: none"> • cbsdId = C • grantId = G • operationState = "GRANTED" <p>B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters:</p> <ul style="list-style-type: none"> • cbsdId = C • grantId = G <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> • UUT does not transmit at any time 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 30 of 65

Test Plots:

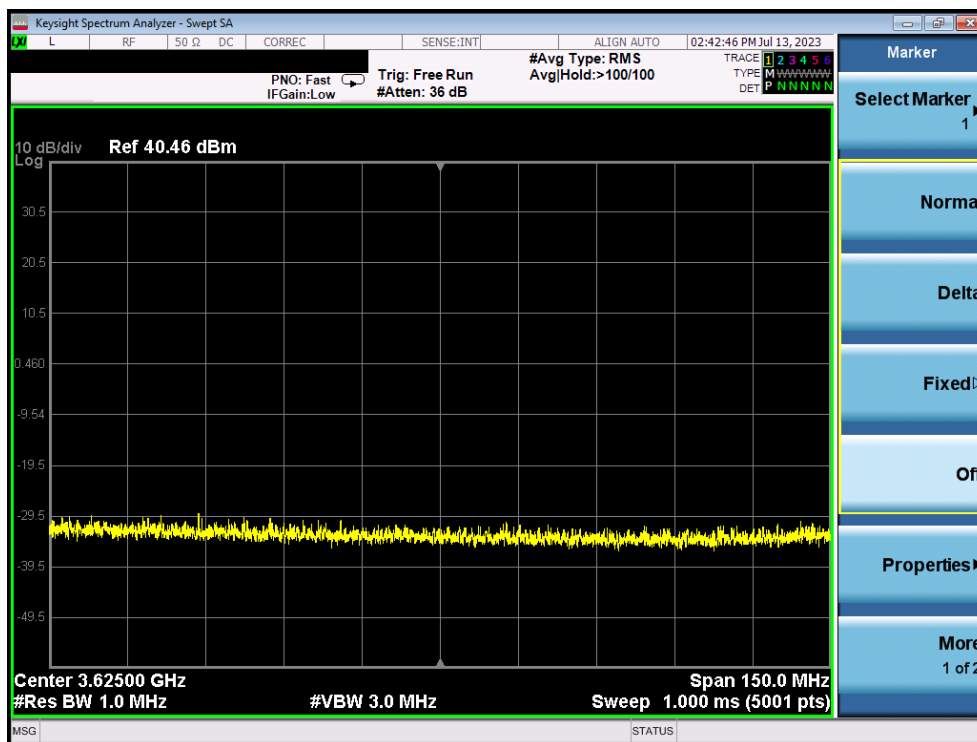


Plot 14. Conducted Measurement – No RF transmission in entire band (WINNF.FT.C.HBT.5)


FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 31 of 65

A14 [WINNF.FT.C.HBT.6] Heartbeat responseCode=501 (SUSPENDED_GRANT) in Subsequent Heartbeat Response

	Test Execution Steps	PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> o valid cbsdId = C o valid grantId = G o grant is for frequency range F, power P o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including:</p> <ul style="list-style-type: none"> • cbsdId = C • grantId = G • operationState = "AUTHORIZED" 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 501 (SUSPENDED_GRANT) 	--	--
4	<p>After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.</p>	--	--
5	<p>Monitor the SAS-CBSD interface. Verify either A OR B occurs:</p> <p>A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters:</p> <ul style="list-style-type: none"> • cbsdId = C • grantId = G • operationState = "GRANTED" <p>B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters:</p> <ul style="list-style-type: none"> • cbsdId = C • grantId = G <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> • UUT shall stop transmission within (T + 60 seconds) of completion of step 3 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 32 of 65

Test Plots:

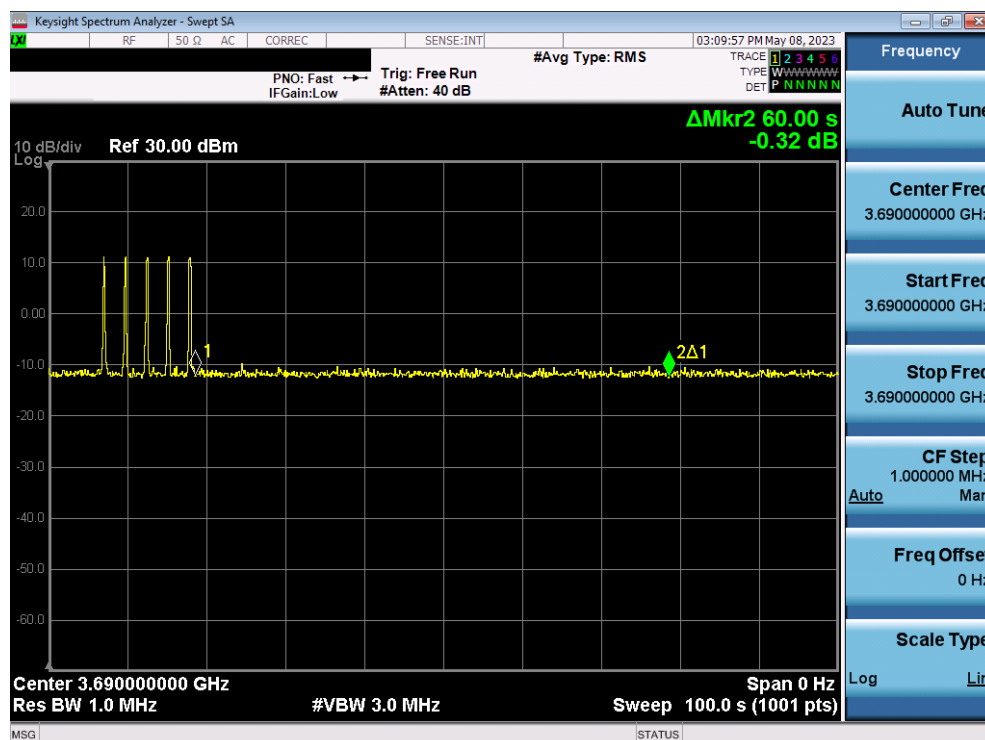


Plot 15. Conducted Measurement - RF transmission stops within 60s of SAS message. The SAS message is indicated by Marker 1 (X) (WINNF.FT.C.HBT.6)


FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 33 of 65

A15 [WINNF.FT.C.HBT.7] Heartbeat responseCode=502 (UNSYNC_OP_PARAM)


	Test Execution Steps	PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> o valid cbsdId = C o valid grantId = G o grant is for frequency range F, power P o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including:</p> <ul style="list-style-type: none"> • cbsdId = C • grantId = G • operationState = "AUTHORIZED" 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 502 (UNSYNC_OP_PARAM) 	--	--
4	<p>After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.</p>	--	--
5	<p>Monitor the SAS-CBSD interface. Verify:</p> <ul style="list-style-type: none"> • UUT sends a Grant Relinquishment Request message. Verify message is correctly formatted with parameters: <ul style="list-style-type: none"> o cbsdId = C o grantId = G <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> • UUT shall stop transmission within (T+60) seconds of completion of step 3. 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 34 of 65

Test Plots:

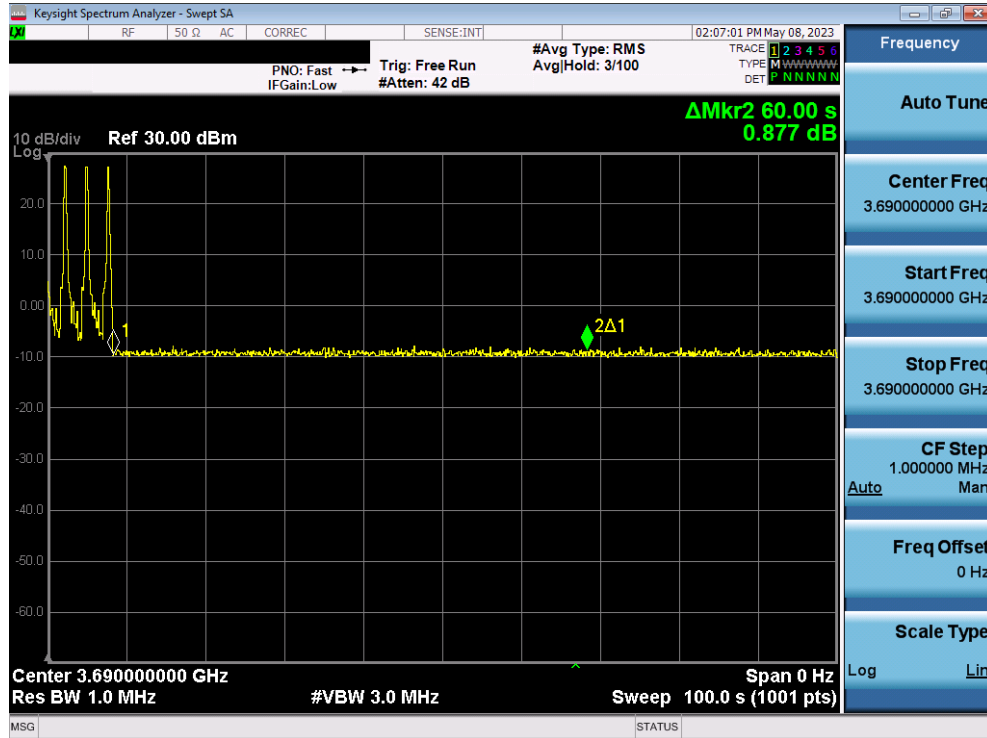


Plot 16. Conducted Measurement - RF transmission stops within 60s of SAS message. The SAS message is indicated by Marker 1 (X) (WINNF.FT.C.HBT.7)


FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 35 of 65

A16 [WINNF.FT.D.HBT.8] Domain Proxy Heartbeat responseCode=500 (TERMINATED_GRANT)


	Test Execution Steps	PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> DP has two CBSD registered successfully with SAS Test Harness Each CBSD {1,2} has a valid single grant as follows: <ul style="list-style-type: none"> o valid cbsdId = Ci, i={1,2} o valid grantId = Gi, i={1,2} o grant is for frequency range Fi, power Pi o grantExpireTime = UTC time greater than duration of the test Both CBSD are in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--	--
2	<p>DP sends a Heartbeat Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of size 2. Verify Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly for each CBSD, including, for CBSDi i={1,2}:</p> <ul style="list-style-type: none"> cbsdId = Ci, i={1,2} grantId = Gi, i={1,2} operationState = "AUTHORIZED" 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<p>If separate Heartbeat Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Heartbeat Request message with a separate Heartbeat Response message.</p> <p>If a single Heartbeat Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Heartbeat Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Heartbeat Response message should be as follows, for CBSDi:</p> <ul style="list-style-type: none"> cbsdId = Ci, i={1,2} grantId = Gi, i={1,2} <p>For CBSD1:</p> <ul style="list-style-type: none"> transmitExpireTime = T = Current UTC time + 200 seconds responseCode = 0 <p>For CBSD2</p> <ul style="list-style-type: none"> transmitExpireTime = T = current UTC time responseCode = 500 (TERMINATED_GRANT) 	--	--
4	<p>After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.</p> <p>If CBSD sends further Heartbeat Request messages for CBSD1, SAS Test Harness shall respond with a Heartbeat Response message with parameters:</p> <ul style="list-style-type: none"> cbsdId = C1 grantId = G1 transmitExpireTime = current UTS time + 200 seconds 	--	--

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 36 of 65

	<ul style="list-style-type: none"> • response Code = 0 • Heartbeat Resuest message is withing heartbeatInterval of previous Heartbeat Request message 		
5	Montior the RF output of CBSD2. Verify: <ul style="list-style-type: none"> • CBSD2 shall stop transmission within bandwidth F2 within (T + 60 seconds) of completion of step 3 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

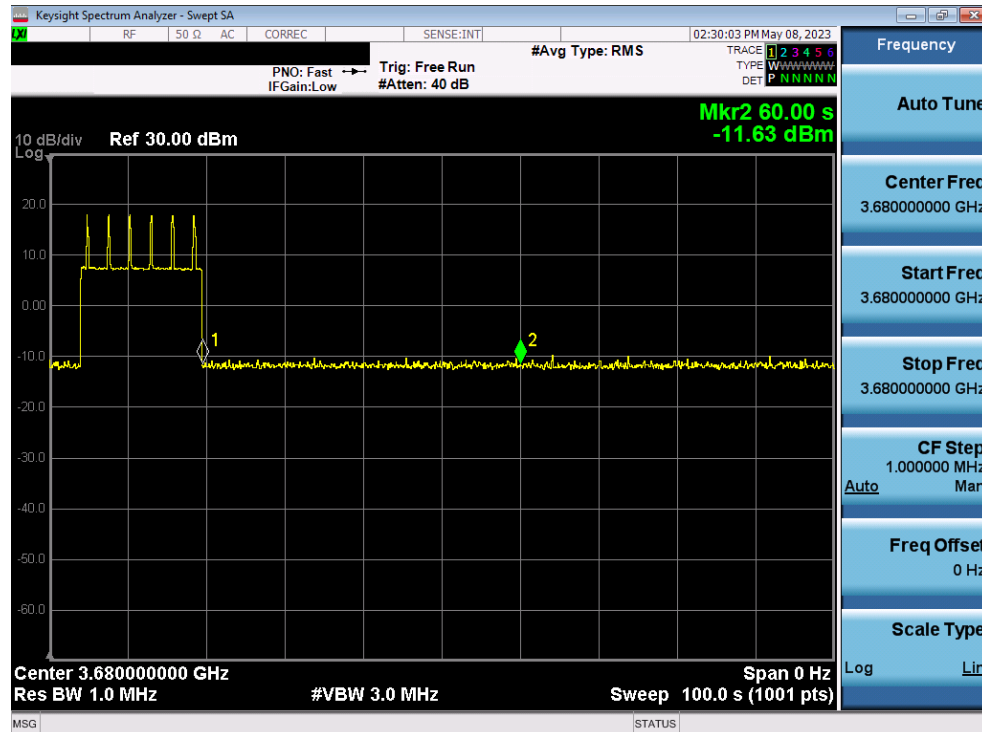


Plot 17. Conducted Measurement - RF transmission stops within 60s of SAS message. The SAS message is indicated by Marker 1 (X) (WINNF.FT.C.HBT.8)


FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 37 of 65

A17 [WINNF.FT.C.HBT.9] Heartbeat Response Absent (First Heartbeat)


	Test Execution Steps	PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> o valid cbsdId = C o valid grantId = G o grant is for frequency range F, power P o grantExpireTime = UTC time greater than duration of the test • UUT is in GRANTED, but not AUTHORIZED state (i.e. has not performed its first Heartbeat Request) 	--	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Ensure Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none"> • cbsdId = C • grantId = G • operationState = "GRANTED" 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<p>After completion of Step 2, SAS Test Harness does not respond to any further messages from UUT to simulate loss of network connection</p>	--	--
4	<p>Monitor the RF output of the UUT from start of test to 60 seconds after step 3. Verify:</p> <ul style="list-style-type: none"> • At any time during the test, UUT shall not transmit on RF interface 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 38 of 65

Test Plots:

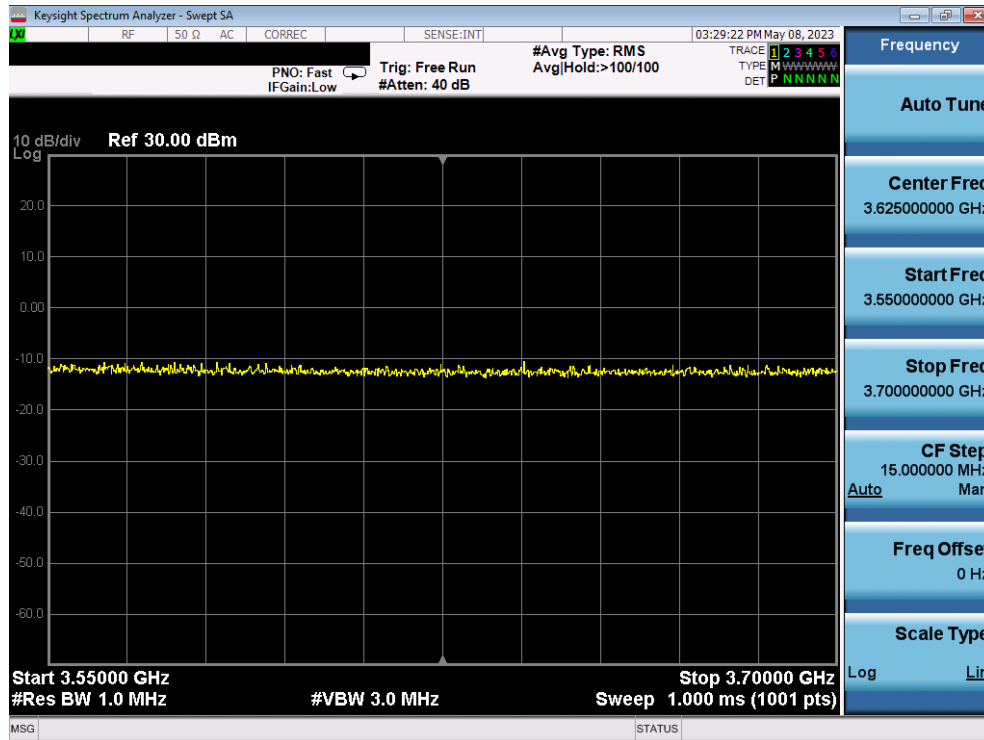


Plot 18. Conducted Measurement – No RF transmission in entire band at anytime (WINNF.FT.C.HBT.9)


FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 39 of 65

A18 [WINNF.FT.C.HBT.10] Heartbeat Response Absent (Subsequent Heartbeat)


	Test Execution Steps	PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> o valid cbsdId = C o valid grantId = G o grant is for frequency range F, power P o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Verify Heartbeat Request message is sent within the latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none"> • cbsdId = C • grantId = G • operationState = "AUTHORIZED" 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> • cbsdId = C • grantId = G • transmitExpireTime = current UTC time + 200 seconds • responseCode = 0 	--	--
4	After completion of Step 3, SAS Test Harness does not respond to any further messages from UUT	--	--
5	<p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> • UUT shall stop all transmission on RF interface within (transmitExpireTime + 60 seconds), using the transmitExpireTime sent in Step 3. 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 40 of 65

Test Plots:

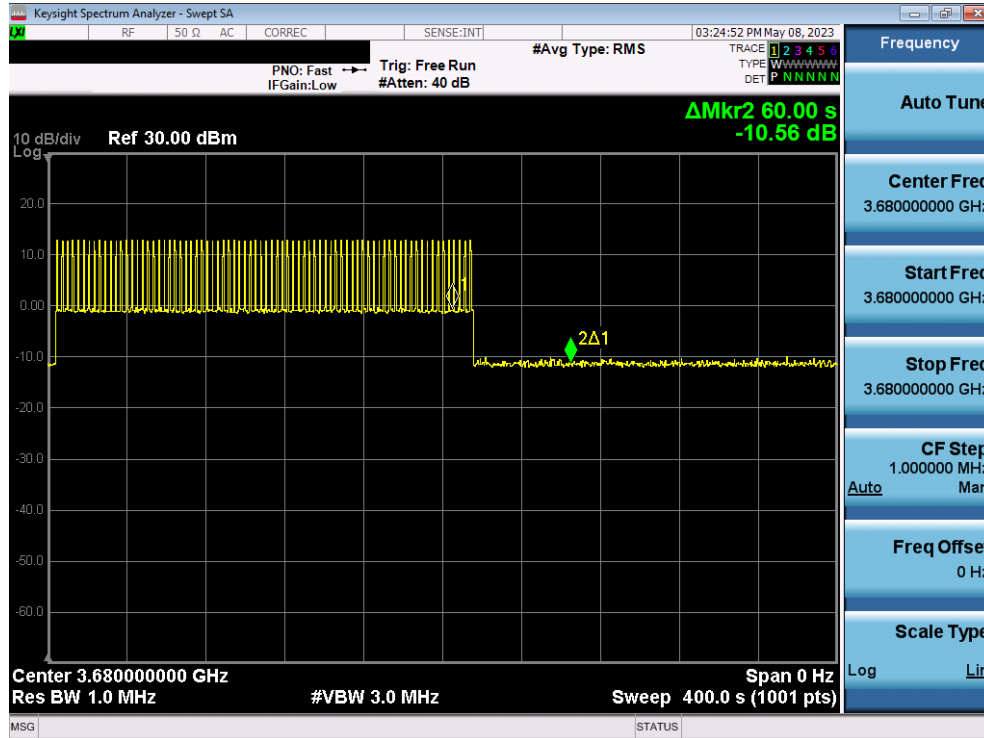


Plot 19. Conducted Measurement - RF transmission stops within transmitExpireTime + 60s. The last SAS heartbeat message is indicated by Marker 1 (X) (WINNF.FT.C.HBT.10)


FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 41 of 65

A19 [WINNF.FT.D.MES.2] Domain Proxy Registration Response contains measReportConfig

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> DP has successfully completed SAS Discovery and Authentication with SAS Test Harness 	--	--
2	DP sends a Registration Request message for each of two CBSD. This may occur in a separate Request message per CBSD, or together in a single Request message with array of 2. Verify the Registration Request message contains all required parameters properly formatted for CBSDi, i={1,2}, and specifically:: <ul style="list-style-type: none"> userId is present and correct fcId is present and correct cbsdSerialNumber is present and correct measCapability = "RECEIVED_POWER_WITHOUT_GRANT" 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	If a separate Registration Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Registration Response message containing a 2-object array. Parameters for each CBSD within the Registration Response message should be as follows, for CBSDi: <ul style="list-style-type: none"> cbsdId = Ci measReportConfig= "RECEIVED_POWER_WITHOUT_GRANT" responseCode = 0 	--	--
4	UUT sends a message: <ul style="list-style-type: none"> If message is type Spectrum Inquiry Request, go to step 5, or If message is type Grant Request, go to step 7 	--	--
5	UUT sends message type Spectrum Inquiry Request. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Spectrum Inquiry Request message contains all required parameters properly formatted for CBSDi, i={1,2}, and specifically: <ul style="list-style-type: none"> cbsdId = Ci measReport is present, and is a properly formatted rcvdPowerMeasReport. 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
6	If a separate Spectrum Inquiry Request message was sent for each CBD by the DP, the SAS Test Harness shall respond to each Spectrum Inquiry Request message with a separate Spectrum Inquiry Response message. If a single Spectrum Inquiry Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Spectrum Inquiry Response message containing a 2-object array. Parameters for each CBSD within the Spectrum Inquiry Response message should be as follows: <ul style="list-style-type: none"> cbsdId = Ci 	--	--


FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 42 of 65

	<ul style="list-style-type: none"> availableChannel is an array of availableChannel objects responseCode = 0 		
7	<p>UUT sends message type Grant Request message. This may occur in a separate message per CBSD, or together in a single message with array of 2.</p> <p>Verify the Grant Request message contains all require parameters properly formatted for CBSDi, i={1,2}, aind specifically:</p> <ul style="list-style-type: none"> cbsdId = C measReport is present, and is a properly formatted rcvdPowerMeasReport. 	<input checked="" type="checkbox"/>	<input type="checkbox"/>


FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 43 of 65

A20 [WINNF.FT.D.RLQ.2] Domain Proxy Successful Relinquishment


	Test Execution Steps	PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> DP has successfully completed SAS Discovery and Authentication with SAS Test Harness DP has successfully registered 2 CBSD with SAS Test Harness, with cbsdId=Ci, I={1,2} DP has received a valid grant with grantId = Gi, i={1,2} for each CBSD Both CBSD are in Grant State AUTHORIZED and is actively transmitting within the bounds of their grant. <p>Invoke trigger to relinquish UUT Grant from the SAS Test Harness</p>	--	--
2	<p>Verify DP sends a Relinquishment Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2.</p> <p>Verify Relinquishment Request message contains all required parameters properly formatted for each CBSD, specifically for CBSDi:</p> <ul style="list-style-type: none"> cbsdId = Ci grantId = Gi 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<p>If a separate Relinquishment Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each request message with a separate response message.</p> <p>If a single Relinquishment Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Relinquishment Response shall be as follows:</p> <ul style="list-style-type: none"> cbsdId = Ci grantId = Gi responseCode = 0 	--	--
4	After completion of step 3, SAS Test Harness will not provide any additional positive response (responseCode=0) to further request messages from the UUT.	--	--
5	<p>Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> UUT shall stop RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 44 of 65

Test Plots:

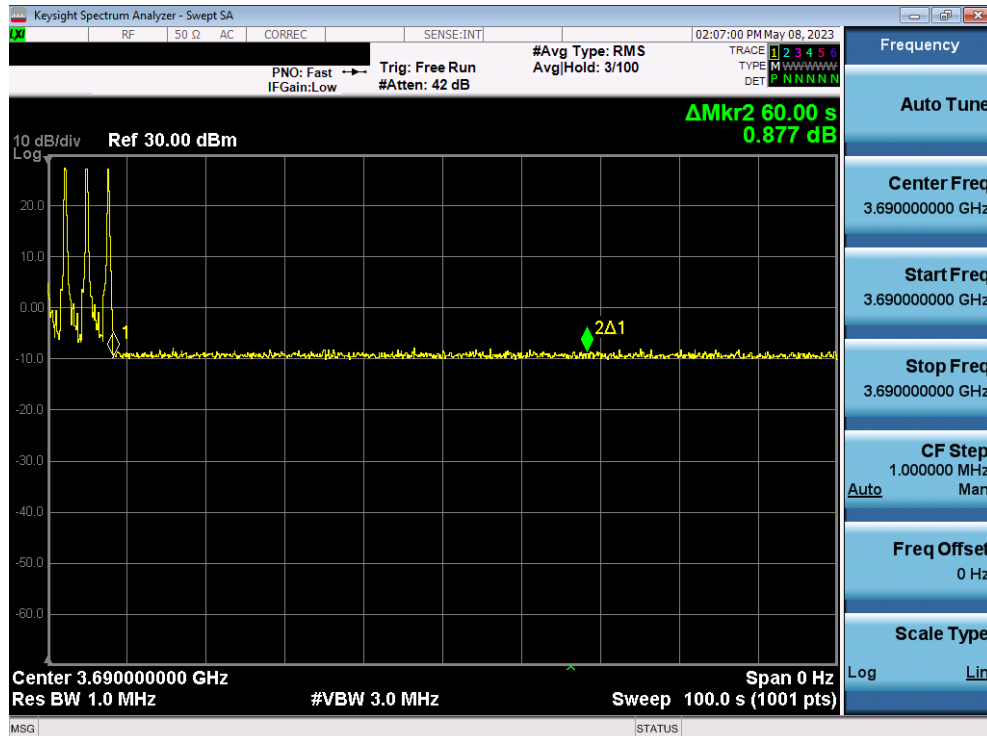


Plot 20. Conducted Measurement - RF transmission stops (WINNF.FT.C.RLQ.1)


FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 45 of 65

A21 [WINNF.FT.D.DRG.2] Domain Proxy Successful Deregistration


	Test Execution Steps	PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> Each UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness Each UUT is in the authorized state DP has successfully registered 2 CBSD with SAS Test Harness, each with cbsdId=Ci, I = {1,2} DP has received a valid grant with grandId = Gi, i={1,2} for each CBSD Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of its grant. <p>Invoke trigger to deregister UUT from the SAS Test Harness</p>	--	--
2	UUT sends a Relinquishment request and receives Relinquishment response with responseCode=0	--	--
3	<p>Verify DP sends a Deregistration Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Deregistration Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSDi"</p> <ul style="list-style-type: none"> cbsdId = Ci 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4	<p>If a separate Deregistration Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each request message with a separate response message.</p> <p>If a single Deregistration Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Deregistration Response shall be as follows:</p> <ul style="list-style-type: none"> cbsdId = Ci responseCode = 0 	--	--
5	After completion of step 4, SAS Test Harness will not provide any additional positive response (responseCode=0) to further request messages from the UUT	--	--
6	<p>Monitor the RF output of each UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs: <ul style="list-style-type: none"> A. UUT sending a Registration Request message, as this is not mandatory B. UUT sending a Deregistration Request message 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 46 of 65

Test Plots:

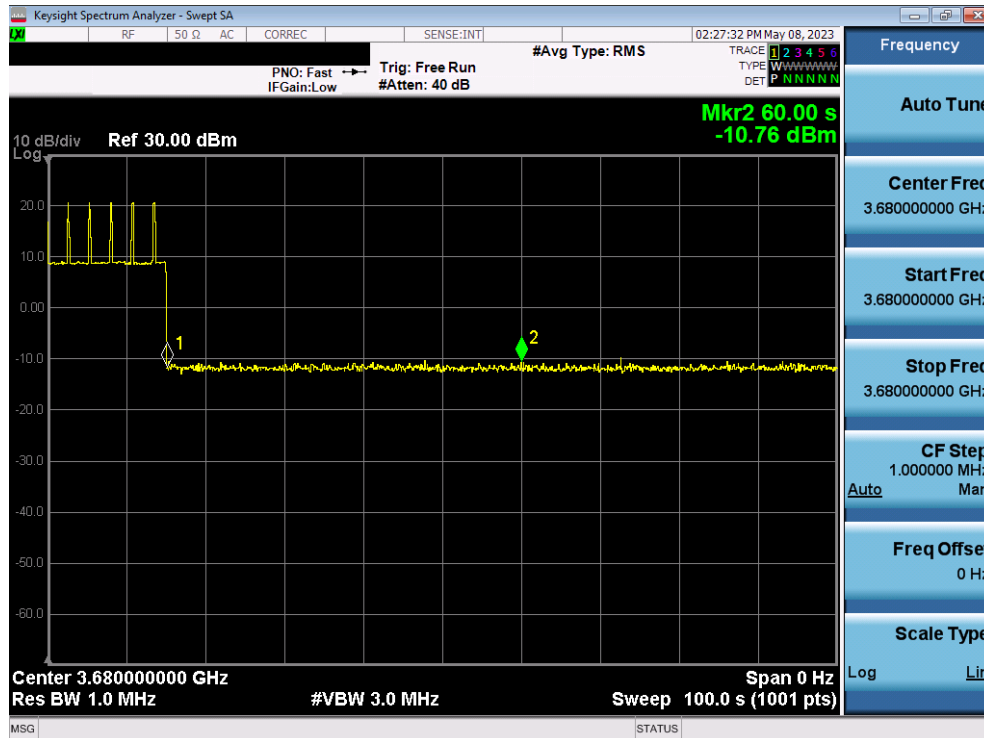


Plot 21. Conducted Measurement - RF transmission stops within 60s. The SAS message is indicated by Marker 1 (X) (WINNF.FT.D.DRG.2)


FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 47 of 65

A22 [WINNF.FT.C.SCS.1] Successful TLS connection between UUT and SAS Test Harness


	Test Execution Steps	PASS	FAIL
1	<ul style="list-style-type: none"> • UUT shall start CBSD-SAS communication with the security procedure • The UUT shall establish a TLS handshake with the SAS Test Harness using configured certificate. • Configure the SAS Test Harness to accept the security procedure and establish the connection 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	<ul style="list-style-type: none"> • Make sure that Mutual authentication happens between UUT and the SAS Test Harness. • Make sure that UUT uses TLS v1.2 • Make sure that cipher suites from one of the following is selected, • TLS_RSA_WITH_AES_128_GCM_SHA256 • TLS_RSA_WITH_AES_256_GCM_SHA384 • TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256 • TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384 • TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<p>A successful registration is accomplished using one of the test cases described in section 6.1.4.1, depending on CBSD capability.</p> <ul style="list-style-type: none"> • UUT sends a registration request to the SAS Test Harness and the SAS Test Harness sends a Registration Response with responseCode = 0 and cbsdId. 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 48 of 65


Test Plots:

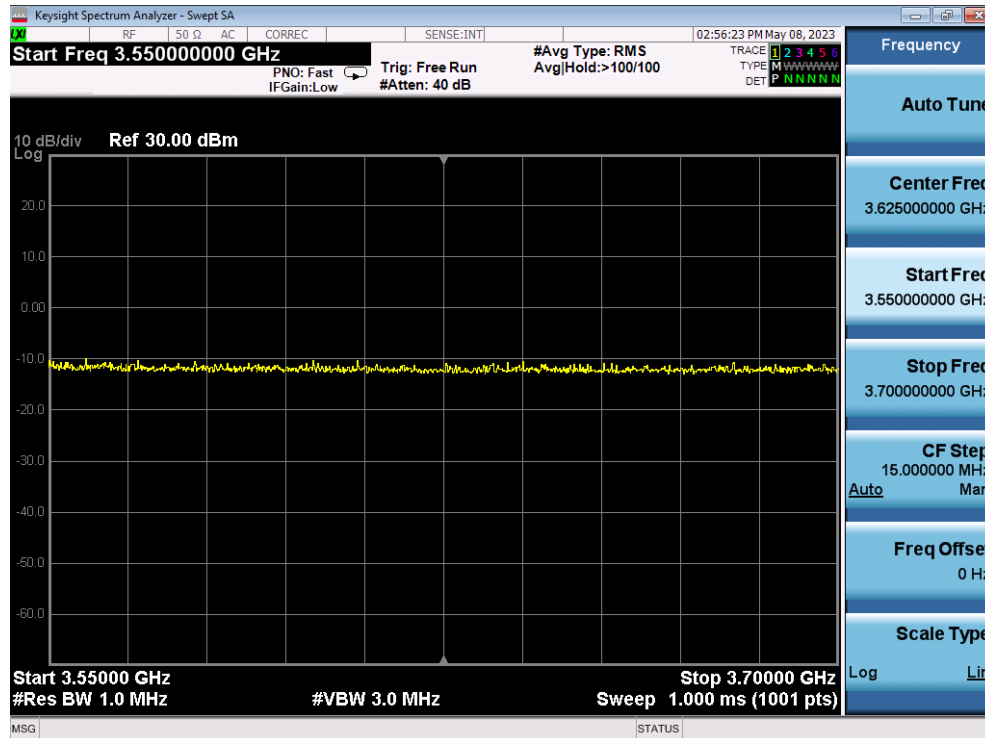

Plot 22. Conducted Measurement – No RF transmission in entire band at anytime (WINNF.FT.C.SCS.1)

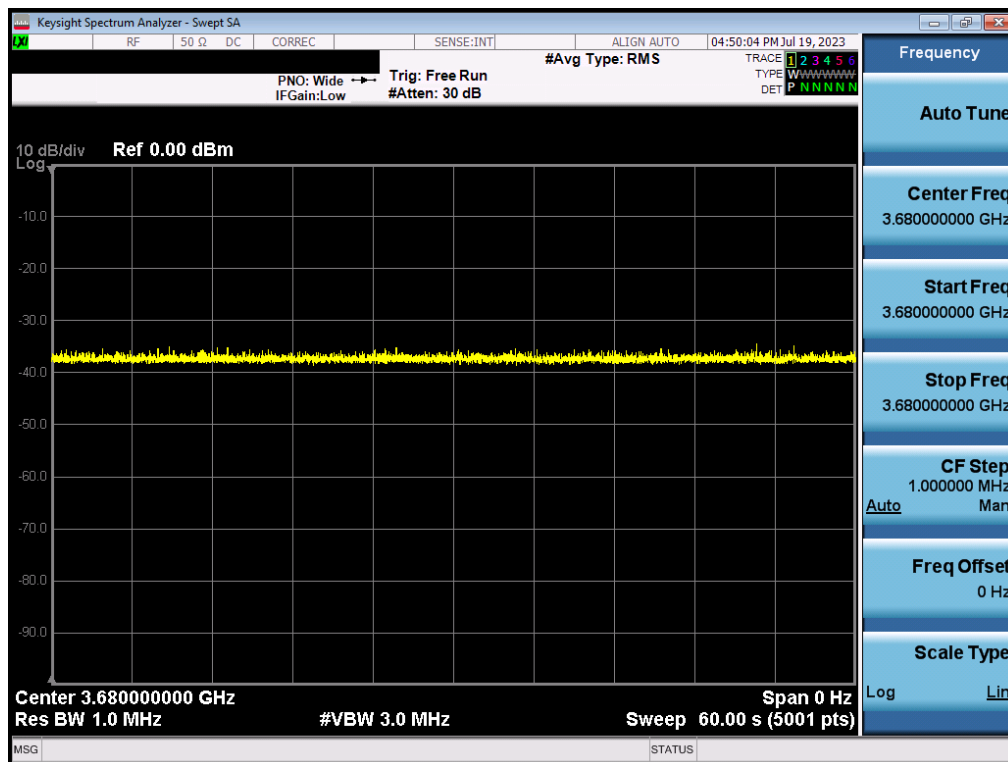


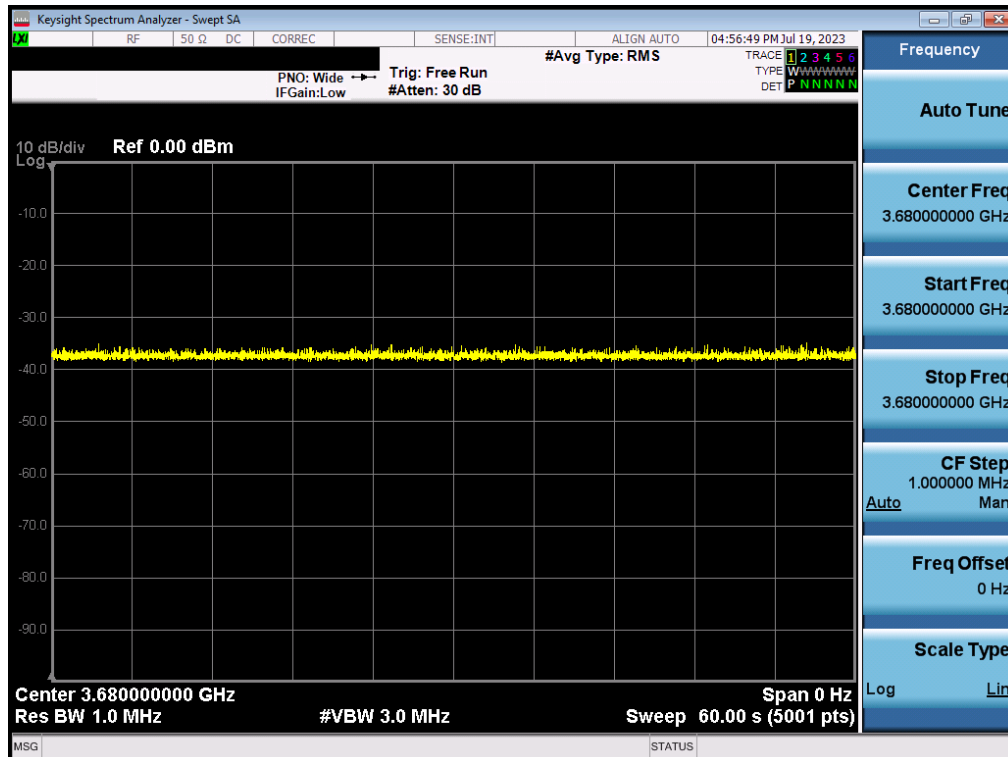
Plot 23. Conducted Measurement – No RF transmission for 60s (WINNF.FT.C.SCS.1)

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 49 of 65

No.	Time	Source	Destination	Protocol	Length	Info
108	2023-05-08 18:33:27.545655	108.15.85.140	173.59.230.213	TLSv1.2	222	Application Data
109	2023-05-08 18:33:27.545656	108.15.85.140	173.59.230.213	TCP	1514	57478 → 443 [ACK] Seq=169 Ack=1 Win=1920 Len=1460 [TCP segment of a reassembled PDU]
110	2023-05-08 18:33:27.545656	108.15.85.140	173.59.230.213	TLSv1.2	1062	Application Data
111	2023-05-08 18:33:27.545717	173.59.230.213	108.15.85.140	TCP	54	443 → 57478 [ACK] Seq=1 Ack=2637 Win=1026 Len=0
112	2023-05-08 18:33:27.616699	173.59.230.213	108.15.85.140	TLSv1.2	100	Application Data
113	2023-05-08 18:33:27.624326	108.15.85.140	173.59.230.213	TCP	60	57478 → 443 [ACK] Seq=2637 Ack=47 Win=1920 Len=0
114	2023-05-08 18:33:27.624360	173.59.230.213	108.15.85.140	TLSv1.2	662	Application Data, Application Data, Application Data, Application Data, Application Data, Application Data
115	2023-05-08 18:33:27.634349	108.15.85.140	173.59.230.213	TCP	60	57478 → 443 [ACK] Seq=2637 Ack=655 Win=1942 Len=0
116	2023-05-08 18:33:27.644260	108.15.85.140	173.59.230.213	TLSv1.2	225	Application Data
117	2023-05-08 18:33:27.644263	108.15.85.140	173.59.230.213	TCP	1514	57478 → 443 [ACK] Seq=2088 Ack=655 Win=1942 Len=1460 [TCP segment of a reassembled PDU]
118	2023-05-08 18:33:27.644263	108.15.85.140	173.59.230.213	TCP	1514	57478 → 443 [PSH, ACK] Seq=4268 Ack=655 Win=1942 Len=1460 [TCP segment of a reassembled PDU]
119	2023-05-08 18:33:27.644264	108.15.85.140	173.59.230.213	TLSv1.2	1229	Application Data
120	2023-05-08 18:33:27.644316	173.59.230.213	108.15.85.140	TCP	54	443 → 57478 [ACK] Seq=655 Ack=6903 Win=1026 Len=0
121	2023-05-08 18:33:27.649995	173.59.230.213	108.15.85.140	TLSv1.2	100	Application Data
122	2023-05-08 18:33:27.703278	108.15.85.140	173.59.230.213	TCP	60	57478 → 443 [ACK] Seq=6903 Ack=701 Win=1942 Len=0
123	2023-05-08 18:33:27.703316	173.59.230.213	108.15.85.140	TLSv1.2	1175	Application Data, Application Data, Application Data, Application Data, Application Data, Application Data
124	2023-05-08 18:33:27.713212	108.15.85.140	173.59.230.213	TCP	60	57478 → 443 [ACK] Seq=6903 Ack=1822 Win=1965 Len=0
125	2023-05-08 18:33:27.722783	108.15.85.140	173.59.230.213	TLSv1.2	215	Application Data
126	2023-05-08 18:33:27.722784	108.15.85.140	173.59.230.213	TCP	1514	57478 → 443 [ACK] Seq=7064 Ack=1822 Win=1965 Len=1460 [TCP segment of a reassembled PDU]
127	2023-05-08 18:33:27.722785	108.15.85.140	173.59.230.213	TLSv1.2	1461	Application Data
128	2023-05-08 18:33:27.722893	173.59.230.213	108.15.85.140	TCP	54	443 → 57478 [ACK] Seq=1822 Ack=9931 Win=1026 Len=0
129	2023-05-08 18:33:27.726056	173.59.230.213	108.15.85.140	TLSv1.2	100	Application Data
130	2023-05-08 18:33:27.732663	108.15.85.140	173.59.230.213	TCP	60	57478 → 443 [ACK] Seq=9931 Ack=1868 Win=1965 Len=0
131	2023-05-08 18:33:27.732722	173.59.230.213	108.15.85.140	TLSv1.2	659	Application Data, Application Data, Application Data, Application Data, Application Data, Application Data
132	2023-05-08 18:33:27.752240	108.15.85.140	173.59.230.213	TCP	60	57478 → 443 [ACK] Seq=9931 Ack=2473 Win=1968 Len=0

Plot 24. WireShark Screenshot – Successful Handshake (WINNF.FT.C.SCS.1)

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 50 of 65




Plot 26. Conducted Measurement – No RF transmission for 60s (WINNF.FT.C.SCS.2)

```

2023-05-09 08:46:49 INFO SAS Manager.client.connection.destructor Connected to server
2023-05-09 08:46:49 DEBUG SAS Manager.client.destructor 237865@destructor.ad.sk1k.us: Disconnected successfully from mu2_control
2023-05-09 08:50:16 INFO SAS Manager.client.connection.destructor Connected to server
2023-05-09 08:50:19 INFO SAS Manager.sonic.server Starting server
2023-05-09 08:51:21 WARNING SAS Manager.handler Raising exception from RPC 'start': "ssl.SSLError: [SSL: CERTIFICATE_VERIFY_FAILED] certificate verify failed: certificate has expired (_ssl.c:1131)"
2023-05-09 08:51:52 WARNING SAS Manager.handler Raising exception from RPC 'start': "ssl.SSLError: [SSL: CERTIFICATE_VERIFY_FAILED] certificate verify failed: certificate has expired (_ssl.c:1131)"
2023-05-09 08:54:04 DEBUG SAS Manager.Message There has been an issue with connection/authentication with the SAS.
Setting CBSO state to UNAUTHENTICATED.

2023-05-09 08:54:04 ERROR SAS Manager.Message Error: [SSL: CERTIFICATE_VERIFY_FAILED] certificate verify failed: certificate revoked (_ssl.c:1131)
2023-05-09 08:54:04 WARNING SAS Manager.handler Raising exception from RPC 'start': "Exception: Unauthenticated with SAS Server: [SSL: CERTIFICATE_VERIFY_FAILED] certificate verify failed: certificate revoked (_ssl.c:1131)"
  
```


Plot 27. UUT SAS Server Log - Failed Handshake (WINNF.FT.C.SCS.2)

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 52 of 65


A24 [WINNF.FT.C.SCS.3] TLS failure due to expired server certificate


	Test Execution Steps	PASS	FAIL
1	• UUT shall start CBSD-SAS communication with the security procedure	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	<ul style="list-style-type: none"> • Make sure that UUT uses TLS v1.2 for security establishment. • Make sure UUT selects the correct cipher suite. • UUT shall use CRL or OCSP to verify the validity of the server certificate. • Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness. 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	UUT may retry for the security procedure which shall fail	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Test Plots:

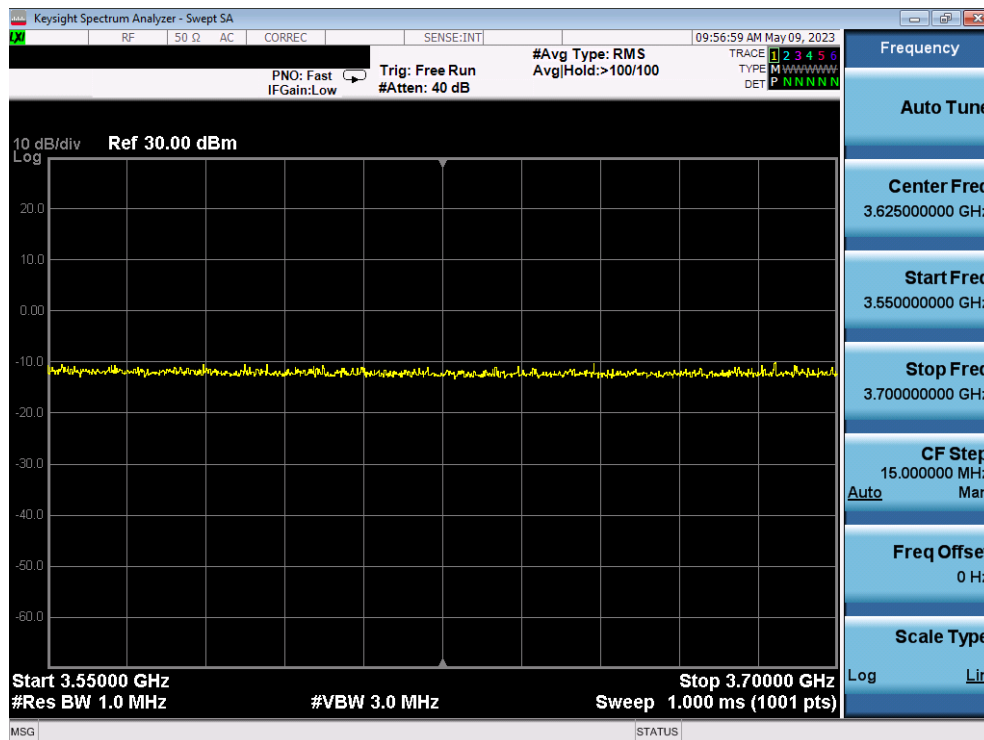

Plot 28. Conducted Measurement – No RF transmission in entire band at anytime (WINNF.FT.C.SCS.3)

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 53 of 65

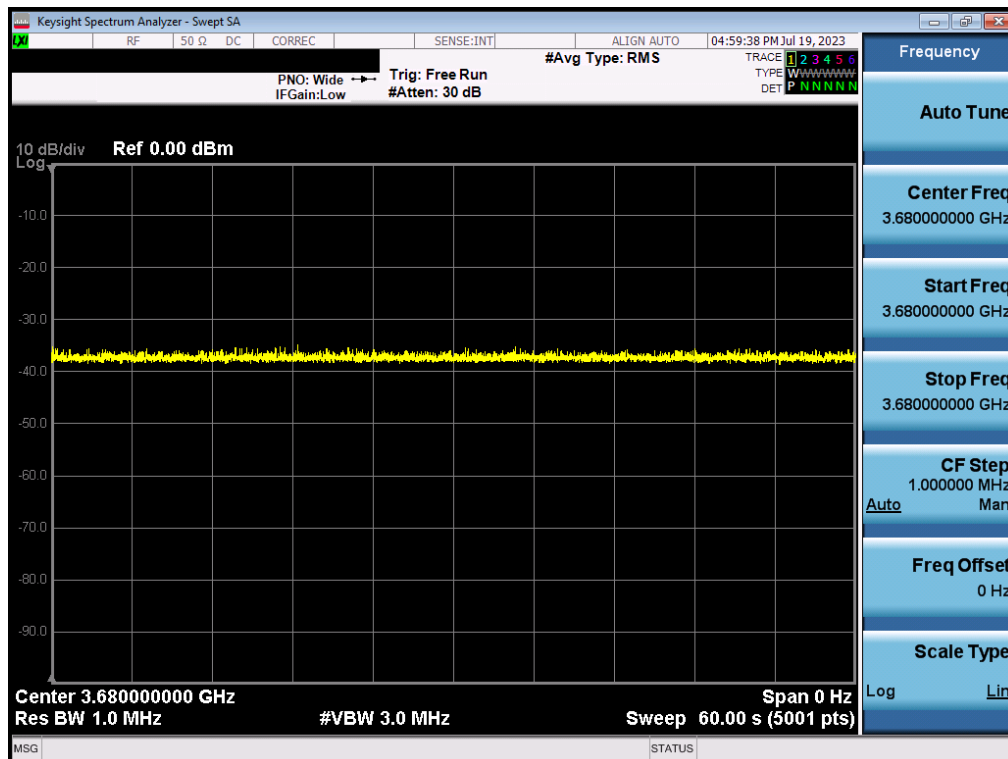

Plot 29. Conducted Measurement – No RF transmission for 60s (WINNF.FT.C.SCS.3)

No.	Time	Source	Destination	Protocol	Length	Info
8	2023-05-09 13:51:52.921121	100.15.85.140	173.59.230.213	TCP	74	58766 → 443 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 SACK_PERM=1 TSval=1102881524 TSecr=0 WS=128
9	2023-05-09 13:51:52.921192	173.59.230.213	100.15.85.140	TCP	60	443 → 58766 [SYN, ACK] Seq=0 Ack=1 Win=65535 Len=0 MSS=1460 WS=256 SACK_PERM=1
10	2023-05-09 13:51:52.930973	100.15.85.140	173.59.230.213	TCP	60	58766 → 443 [ACK] Seq=1 Ack=1 Win=64256 Len=0
11	2023-05-09 13:51:52.931336	100.15.85.140	173.59.230.213	TLSv1.2	222	Client Hello
12	2023-05-09 13:51:52.931336	173.59.230.213	100.15.85.140	TLSv1.2	3091	Server Hello, Certificate, Certificate Request, Server Hello Done
13	2023-05-09 13:51:52.940696	100.15.85.140	173.59.230.213	TCP	60	58766 → 443 [ACK] Seq=169 Ack=1461 Win=64128 Len=0
14	2023-05-09 13:51:52.940697	100.15.85.140	173.59.230.213	TCP	60	58766 → 443 [ACK] Seq=169 Ack=3038 Win=62592 Len=0
15	2023-05-09 13:51:52.940697	100.15.85.140	173.59.230.213	TLSv1.2	61	Alert (Level: Fatal, Description: Certificate Expired)
16	2023-05-09 13:51:52.940697	100.15.85.140	173.59.230.213	TCP	60	58766 → 443 [RST, ACK] Seq=176 Ack=3038 Win=64128 Len=0


Plot 30. WireShark Screenshot - Failed Handshake (WINNF.FT.C.SCS.3)

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 54 of 65


A25 [WINNF.FT.C.SCS.4] TLS failure when SAS Test Harness certificate is issued by an unknown CA


	Test Execution Steps	PASS	FAIL
1	• UUT shall start CBSD-SAS communication with the security procedure	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	<ul style="list-style-type: none"> • Make sure that UUT uses TLS v1.2 for security establishment. • Make sure UUT selects the correct cipher suite. • UUT shall use CRL or OCSP to verify the validity of the server certificate. • Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness. 	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	UUT may retry for the security procedure which shall fail	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Test Plots:

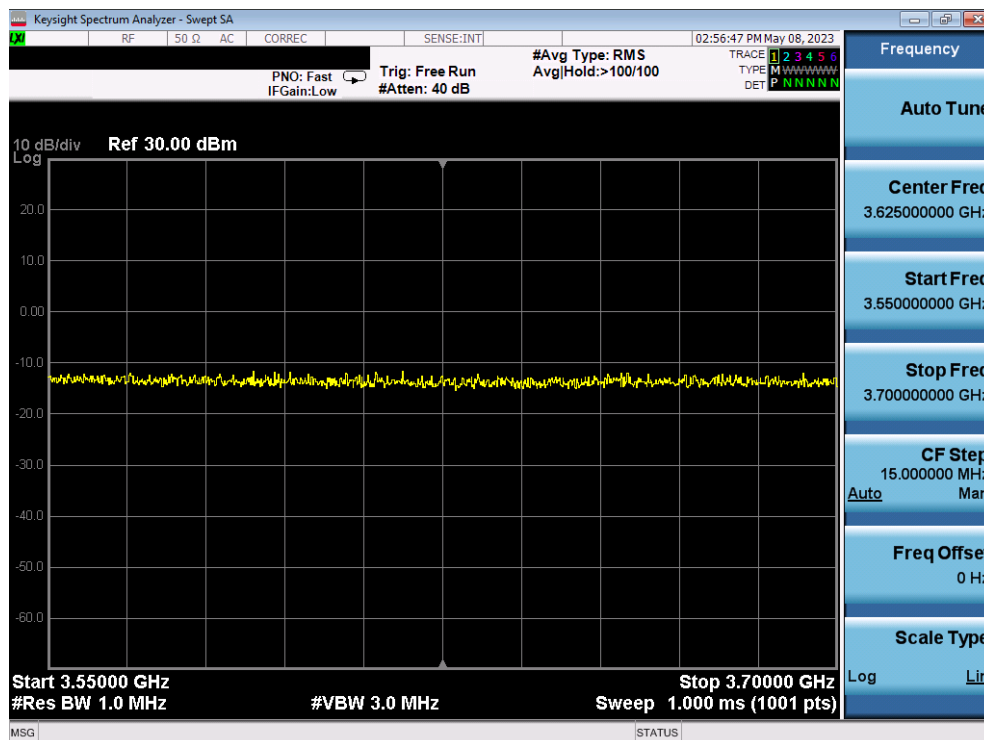

Plot 31. Conducted Measurement – No RF transmission in entire band at anytime (WINNF.FT.C.SCS.4)

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 55 of 65

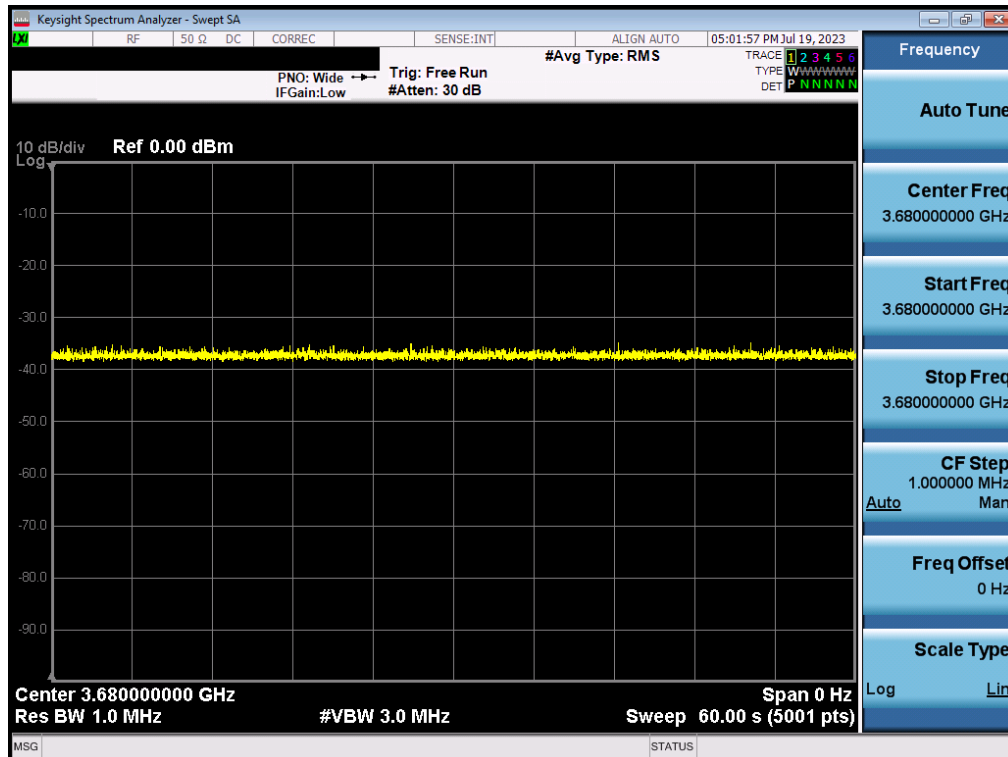


Plot 32. Conducted Measurement – No RF transmission for 60s (WINNF.FT.C.SCS.4)

No.	Time	Source	Destination	Protocol	Length	Info
24	2023-05-08 18:50:23.582952	108.15.85.140	173.59.230.213	TCP	74	57520 → 443 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 SACK_PERM=1 TSval=1834392862 TSecr=0 WS=128
25	2023-05-08 18:50:23.583174	173.59.230.213	108.15.85.140	TCP	66	443 → 57520 [SYN, ACK] Seq=0 Ack=1 Win=65535 Len=0 MSS=1460 WS=256 SACK_PERM=1
26	2023-05-08 18:50:23.589900	108.15.85.140	173.59.230.213	TCP	60	57520 → 443 [ACK] Seq=1 Ack=1 Win=64256 Len=0
27	2023-05-08 18:50:23.589981	108.15.85.140	173.59.230.213	TLSv1.2	198	Client Hello
28	2023-05-08 18:50:23.591161	173.59.230.213	108.15.85.140	TLSv1.2	3093	Server Hello, Certificate, Certificate Request, Server Hello Done
29	2023-05-08 18:50:23.601759	108.15.85.140	173.59.230.213	TCP	60	57520 → 443 [ACK] Seq=145 Ack=1461 Win=64128 Len=0
30	2023-05-08 18:50:23.601760	108.15.85.140	173.59.230.213	TCP	60	57520 → 443 [ACK] Seq=145 Ack=3040 Win=62592 Len=0
31	2023-05-08 18:50:23.601761	108.15.85.140	173.59.230.213	TLSv1.2	61	Alert (Level: Fatal, Description: Unknown CA)
32	2023-05-08 18:50:23.601761	108.15.85.140	173.59.230.213	TCP	60	57520 → 443 [RST, ACK] Seq=152 Ack=3040 Win=64128 Len=0
46	2023-05-08 18:50:28.610156	108.15.85.140	173.59.230.213	TCP	74	57522 → 443 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 SACK_PERM=1 TSval=1834397896 TSecr=0 WS=128
47	2023-05-08 18:50:28.610311	173.59.230.213	108.15.85.140	TCP	66	443 → 57522 [SYN, ACK] Seq=0 Ack=1 Win=65535 Len=0 MSS=1460 WS=256 SACK_PERM=1
48	2023-05-08 18:50:28.629792	108.15.85.140	173.59.230.213	TCP	60	57522 → 443 [ACK] Seq=1 Ack=1 Win=64256 Len=0
49	2023-05-08 18:50:28.629794	108.15.85.140	173.59.230.213	TLSv1.2	198	Client Hello
50	2023-05-08 18:50:28.630584	173.59.230.213	108.15.85.140	TLSv1.2	3093	Server Hello, Certificate, Certificate Request, Server Hello Done
51	2023-05-08 18:50:28.640818	108.15.85.140	173.59.230.213	TCP	60	57522 → 443 [ACK] Seq=145 Ack=1461 Win=64128 Len=0
52	2023-05-08 18:50:28.640819	108.15.85.140	173.59.230.213	TCP	60	57522 → 443 [ACK] Seq=145 Ack=3040 Win=62592 Len=0
53	2023-05-08 18:50:28.640820	108.15.85.140	173.59.230.213	TLSv1.2	61	Alert (Level: Fatal, Description: Unknown CA)
54	2023-05-08 18:50:28.640821	108.15.85.140	173.59.230.213	TCP	60	57522 → 443 [RST, ACK] Seq=152 Ack=3040 Win=64128 Len=0

Plot 33. WireShark Screenshot - Failed Handshake (WINNF.FT.C.SCS.4)

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 56 of 65

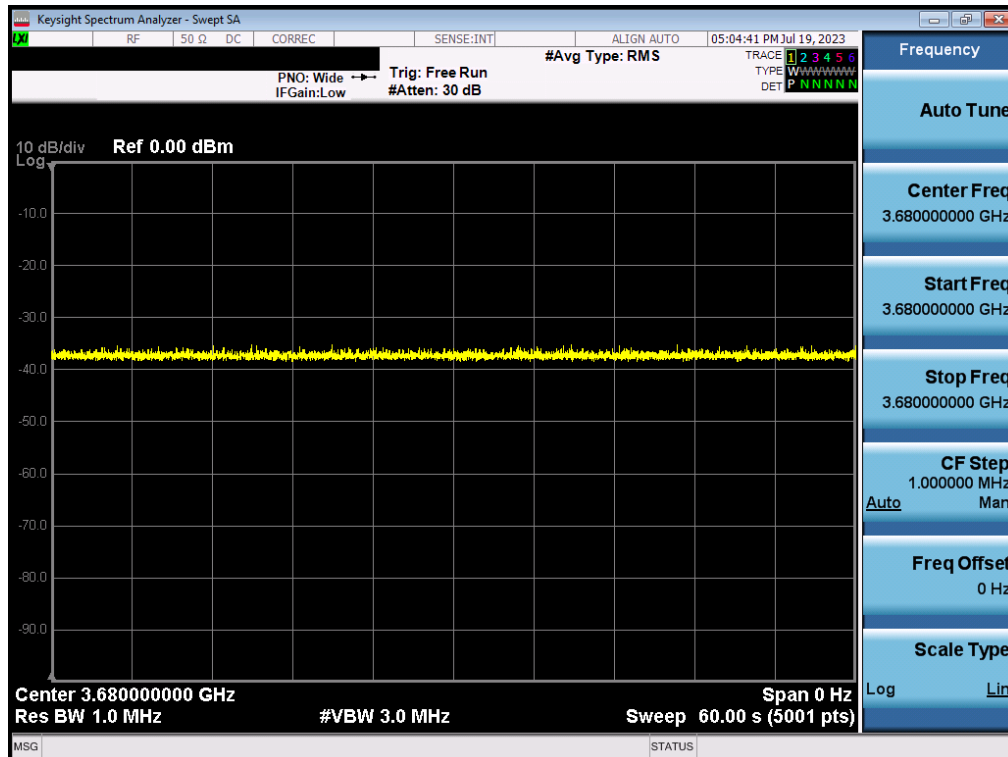

Plot 35. Conducted Measurement – No RF transmission for 60s (WINNF.FT.C.SCS.5)


No.	Time	Source	Destination	Protocol	Length	Info
24	2023-05-08 18:54:02.762472	108.15.85.140	173.59.230.213	TCP	74	57526 → 443 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 SACK_PERM=1 TSval=1034612872 TSecr=0 WS=128
25	2023-05-08 18:54:02.762716	173.59.230.213	108.15.85.140	TCP	60	443 → 57526 [SYN, ACK] Seq=0 Ack=1 Win=65535 Len=0 MSS=1460 WS=256 SACK_PERM=1
26	2023-05-08 18:54:02.772273	108.15.85.140	173.59.230.213	TCP	60	57526 → 443 [ACK] Seq=1 Ack=1 Win=64256 Len=0
27	2023-05-08 18:54:02.772274	108.15.85.140	173.59.230.213	TLShv1.2	198	Client Hello
28	2023-05-08 18:54:02.773619	173.59.230.213	108.15.85.140	TLShv1.2	3073	Server Hello, Certificate, Certificate Request, Server Hello Done
29	2023-05-08 18:54:02.782225	108.15.85.140	173.59.230.213	TCP	60	57526 → 443 [ACK] Seq=145 Ack=1461 Win=64128 Len=0
30	2023-05-08 18:54:02.782226	108.15.85.140	173.59.230.213	TCP	60	57526 → 443 [ACK] Seq=145 Ack=3820 Win=62592 Len=0
31	2023-05-08 18:54:02.782227	108.15.85.140	173.59.230.213	TLShv1.2	81	Alert (Level: Fatal, Description: Decrypt Error)
32	2023-05-08 18:54:02.782228	108.15.85.140	173.59.230.213	TCP	60	57526 → 443 [RST, ACK] Seq=152 Ack=3820 Win=64128 Len=0

Plot 36. WireShark Screenshot - Failed Handshake (WINNF.FT.C.SCS.5)

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 58 of 65

A27 [WINNF.PT.C.HBT.1] UUT RF Transmit Power Measurement

	Test Execution Steps	PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness • UUT has registered with the SAS, with CBSID = C • UUT has a single valid grant G with parameters {lowFrequency = FL, highFrequency = FH, maxEirp = Pi}, with grant in AUTHORIZED state, and grantExpireTime set to a value far past the duration of this test case <p><i>Note: in order for the UUT to request a grant with the parameters {lowFrequency, highFrequency, maxEirp}, the SAS Test Harness may need to provide appropriate guidance in the availableChannel object of the spectrumInquiry response message, and the operationParam object of the grant response message. Alternately, the UUT vendor may provide the ability to set those parameters on the UUT so that the UUT will request a grant with those parameters.</i></p>	--	--
2	<p>UUT and SAS Test Harness perform a series of Heartbeat Request/Response cycles, which continues until the other test steps are complete. Messaging for each cycle is as follows:</p> <ul style="list-style-type: none"> • UUT sends Heartbeat Request, including: <ul style="list-style-type: none"> o cbsId = C o grantId = G • SAS Test Harness responds with Heartbeat Response, including: <ul style="list-style-type: none"> o cbsId = C o grantId = G o transmitExpireTime = current UTC time + 200 seconds o responseCode = 0 	--	--
3	<p>Tester performs power measurement on RF interface(s) of UUT, and verifies it complies with the maxEirp setting, Pi. The RF measurement method is out of scope of this document, but may include additional configuration of the UUT, as required, to fulfil the requirements of the power measurement method.</p> <p><i>Note: it may be required for the vendor to provide a method or configuration to bring the UUT to a mode which is required by the measurement methodology. Any such mode is vendor-specific and depends upon UUT behavior and the measurement methodology.</i></p>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 59 of 65


RF Power Measurements:

Testing is performed per KDB 971168 D01 and across the transmit dynamic range of 37dBm/MHz to 30dBm/MHz for 20MHz Bandwidth.


The UUT has two cross-polarized outputs, channel A and B, such that the total EIRP is the gain of one antenna added to the conducted power spectral density summed across ch. A and ch. B.

SAS Granted EIRP [dBm/MHz]	Ch. A Conducted PSD [dBm/MHz]	Ch. B Conducted PSD [dBm/MHz]	Summed Conducted PSD [dBm/MHz]	Gain	Total EIRP (dBm/MHz)	Margin
20	1.84	3.87	5.98	13.75	19.73	-0.27
10	-8.31	-6.64	-4.39	13.75	9.36	-0.64
0	-19.29	-16.13	-14.42	13.75	-0.67	-0.67


Table A.1 RF Output Power Measurements (WINNF.PT.C.HBT.1) – Single Module

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 60 of 65


Test Plots:

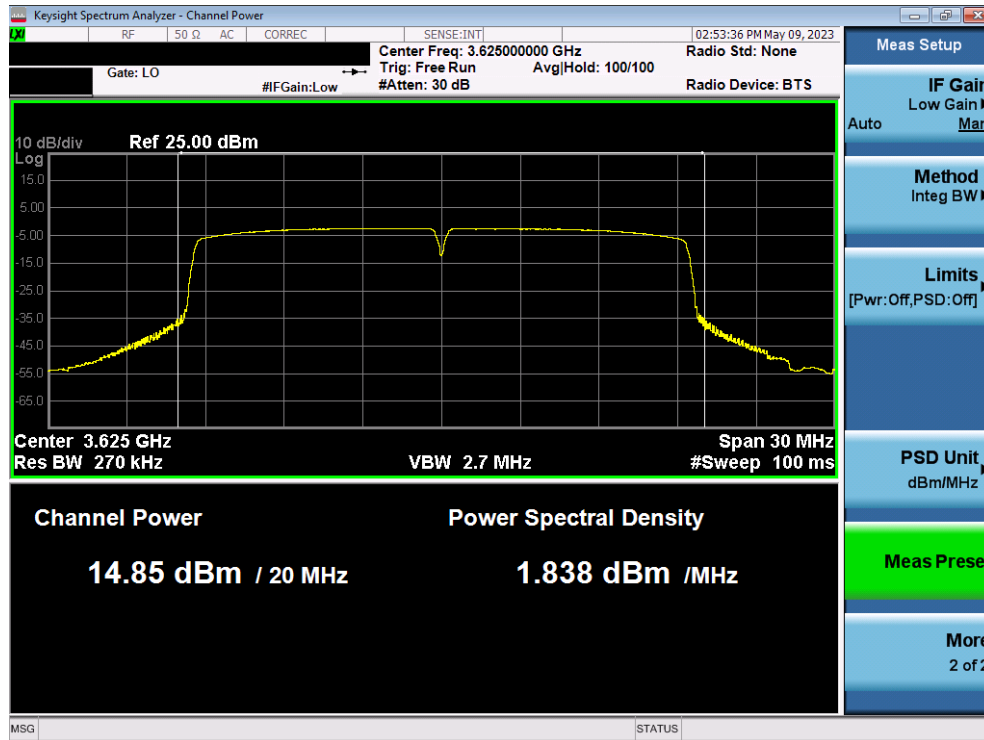


Plot 37. Conducted PSD, SAS Granted maxEIRP 20 dBm/MHz – Ch.A – Single Module

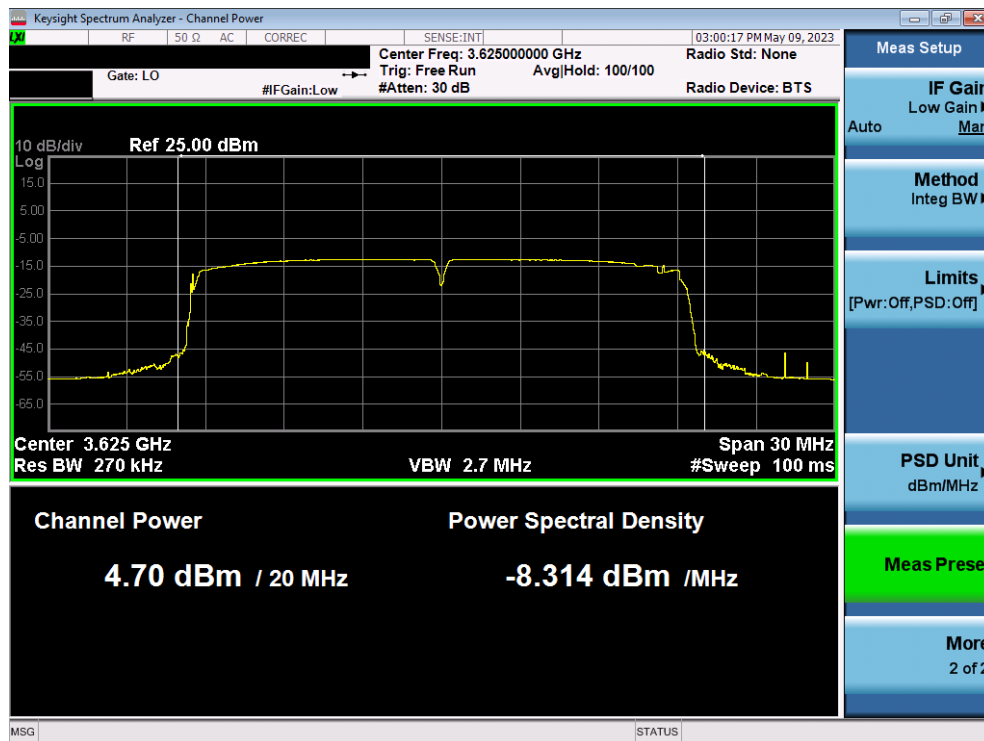


Plot 38. Conducted PSD, SAS Granted maxEIRP 10 dBm/MHz – Ch.A – Single Module


FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 61 of 65

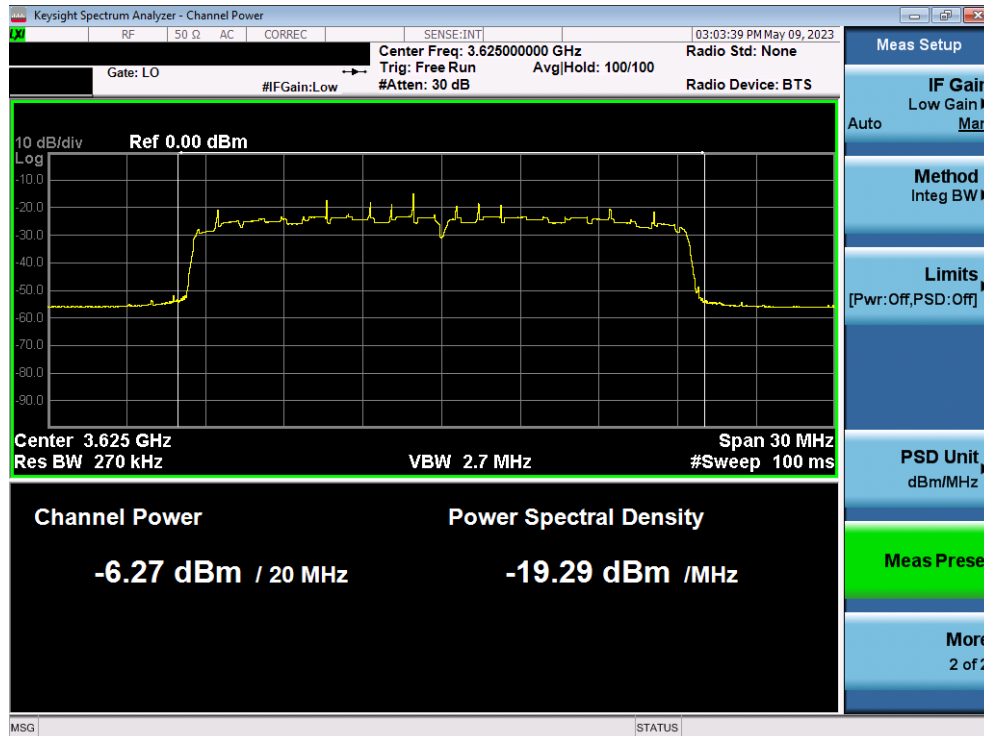


Plot 39. Conducted PSD, SAS Granted maxEIRP 0 dBm/MHz – Ch.A – Single Module

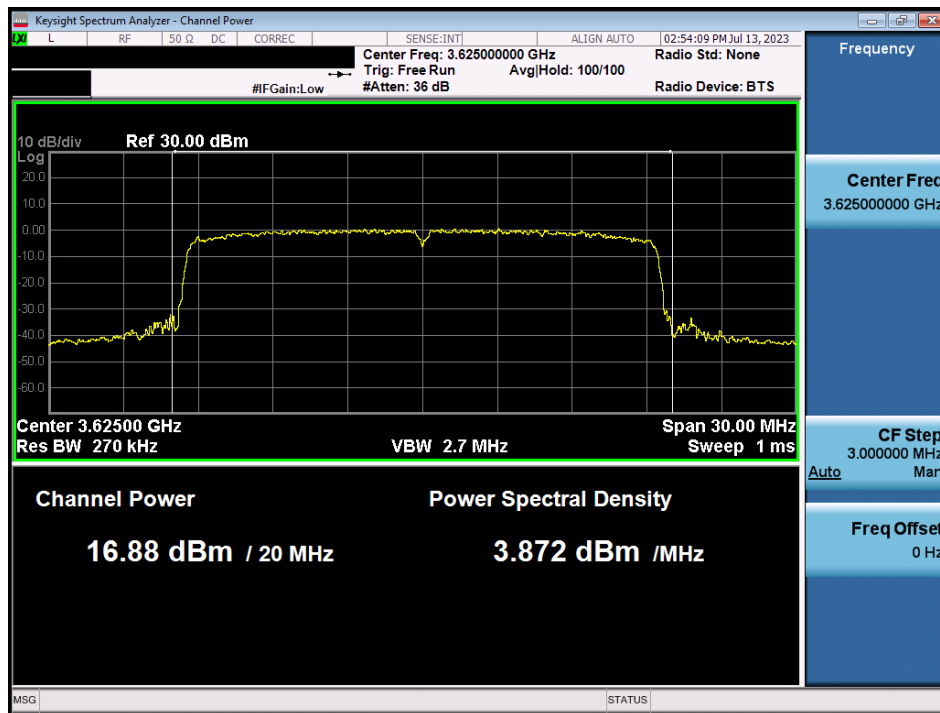


Plot 40. Conducted PSD, SAS Granted maxEIRP 20 dBm/MHz – Ch.B – Single Module


FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 62 of 65

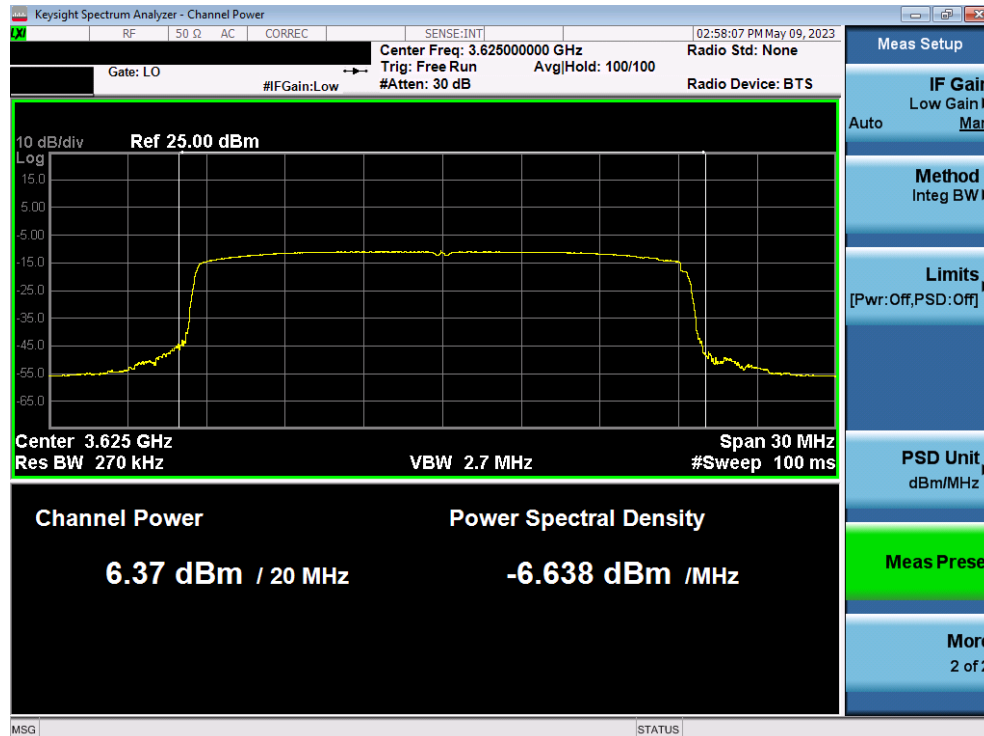

Plot 41. Conducted PSD, SAS Granted maxEIRP 10 dBm/MHz – Ch.B – Single Module

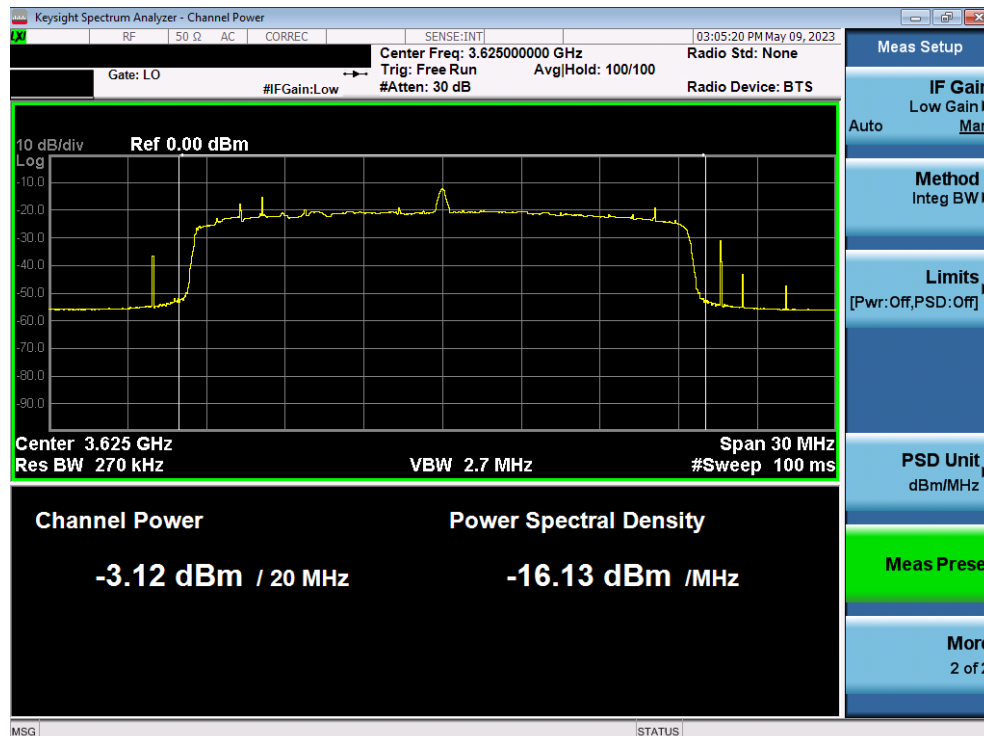
































Plot 42. Conducted PSD, SAS Granted maxEIRP 0 dBm/MHz – Ch.B – Single Module

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 63 of 65

APPENDIX B – TEST LOGS

Logs are available upon request

 WINNF.FT.C.DRG.5_2019-05-02T04.37.42Z.log Text Document	 WINNF.FT.C.GRA.1_2019-05-02T01.31.12Z.log Text Document	 WINNF.FT.C.GRA.2_2019-05-02T01.45.25Z.log Text Document
 WINNF.FT.C.HBT.3_2019-05-02T03.33.51Z.log Text Document	 WINNF.FT.C.HBT.5_2019-05-02T02.38.31Z.log Text Document	 WINNF.FT.C.HBT.6_2019-05-02T03.25.35Z.log Text Document
 WINNF.FT.C.HBT.7_2019-05-02T03.41.44Z.log Text Document	 WINNF.FT.C.HBT.9_2019-05-02T03.50.07Z.log Text Document	 WINNF.FT.C.HBT.10_2019-05-02T04.00.08Z.log Text Document
 WINNF.FT.C.HBT.11_2019-05-07T02.47.36Z.log Text Document	 WINNF.FT.C.SCS.1_2019-05-06T23.22.32Z.log Text Document	 WINNF.FT.C.SCS.2_2019-05-09T19.18.19Z.log Text Document
 WINNF.FT.C.SCS.3_2019-05-06T23.57.48Z.log Text Document	 WINNF.FT.C.SCS.4_2019-05-07T00.10.31Z.log Text Document	 WINNF.FT.C.SCS.5_2019-05-07T00.34.31Z.log Text Document
 WINNF.FT.D.DRG.2_2019-05-03T23.12.07Z.log Text Document	 WINNF.FT.D.DRG.4_2019-05-03T23.26.56Z.log Text Document	 WINNF.FT.D.HBT.2_2019-05-08T00.22.40Z.log Text Document
 WINNF.FT.D.HBT.8_2019-05-07T00.54.55Z.log Text Document	 WINNF.FT.D.MES.2_2019-05-02T20.33.42Z.log Text Document	 WINNF.FT.D.REG.2_2019-05-03T18.34.14Z.log Text Document
 WINNF.FT.D.REG.9_2019-05-03T18.44.41Z.log Text Document	 WINNF.FT.D.REG.11_2019-05-03T19.28.09Z.log Text Document	 WINNF.FT.D.REG.13_2019-05-03T19.38.45Z.log Text Document
 WINNF.FT.D.REG.15_2019-05-03T19.43.36Z.log Text Document	 WINNF.FT.D.REG.17_2019-05-03T19.48.02Z.log Text Document	 WINNF.FT.D.REG.19_2019-05-03T19.51.18Z.log Text Document
 WINNF.FT.D.RLQ.2_2019-05-03T23.46.26Z.log Text Document	 WINNF.FT.D.RLQ.4_2019-05-04T00.30.06Z.log Text Document	 WINNF.FT.D.RLQ.6_2019-05-04T00.17.28Z.log Text Document

FCC ID: 2AS22-LUMACH2		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2305080068-02.2AS22	Test Dates: 5/8/2023 – 7/13/2023	EUT Type: CBRS Radio Module	Page 64 of 65