



11.4. APPENDIX D:OCCUPIED CHANNEL BANDWIDTH


Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
b	2412	Ant1	13.585
b	2437	Ant1	13.624
b	2452	Ant1	14.071
b	2457	Ant1	13.544
b	2462	Ant1	13.522
g	2412	Ant1	16.589
g	2417	Ant1	16.941
g	2437	Ant1	16.909
g	2457	Ant1	16.734
g	2462	Ant1	16.602
n20	2412	Ant1	17.69
n20	2417	Ant1	17.725
n20	2437	Ant1	17.87
n20	2452	Ant1	17.952
n20	2457	Ant1	17.721
n20	2462	Ant1	17.717
ax20	2412	Ant1	18.853
ax20	2417	Ant1	18.917
ax20	2437	Ant1	18.963
ax20	2452	Ant1	18.936
ax20	2457	Ant1	18.859
ax20	2462	Ant1	18.853







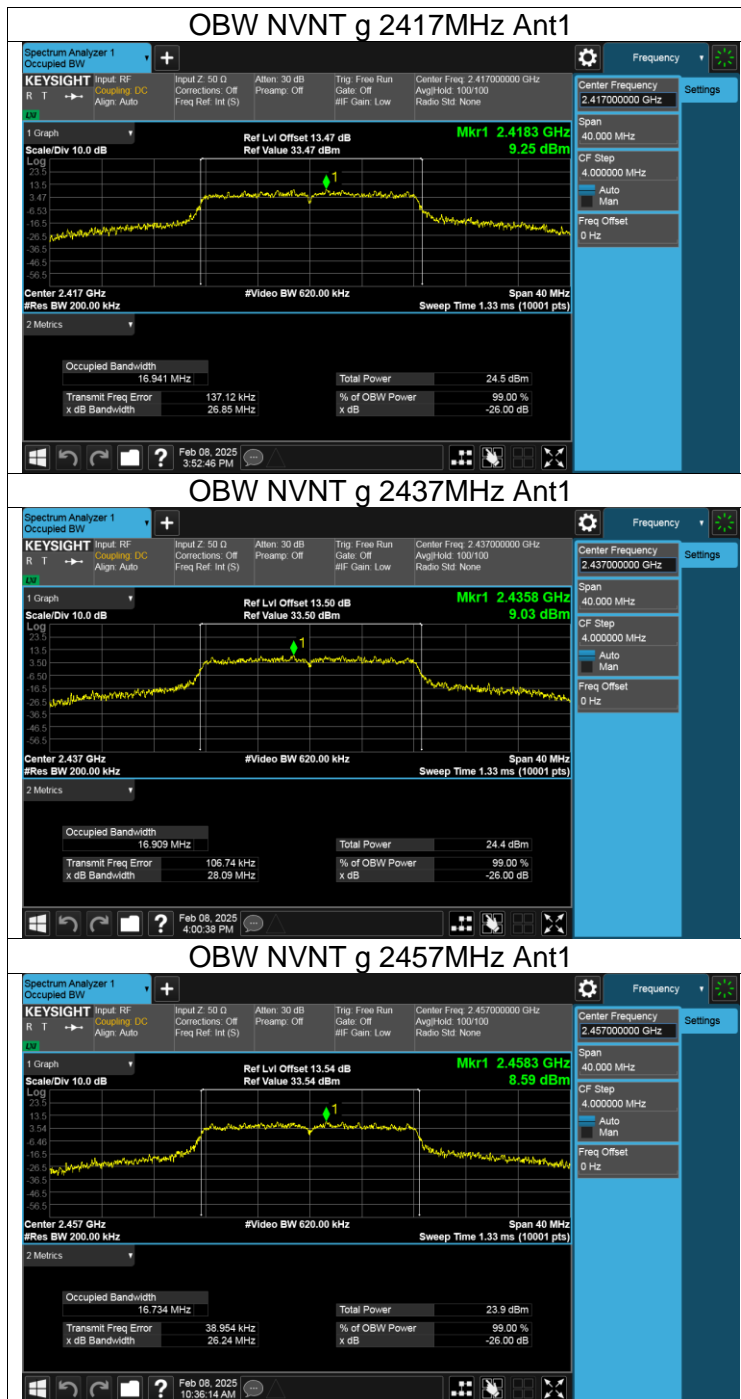


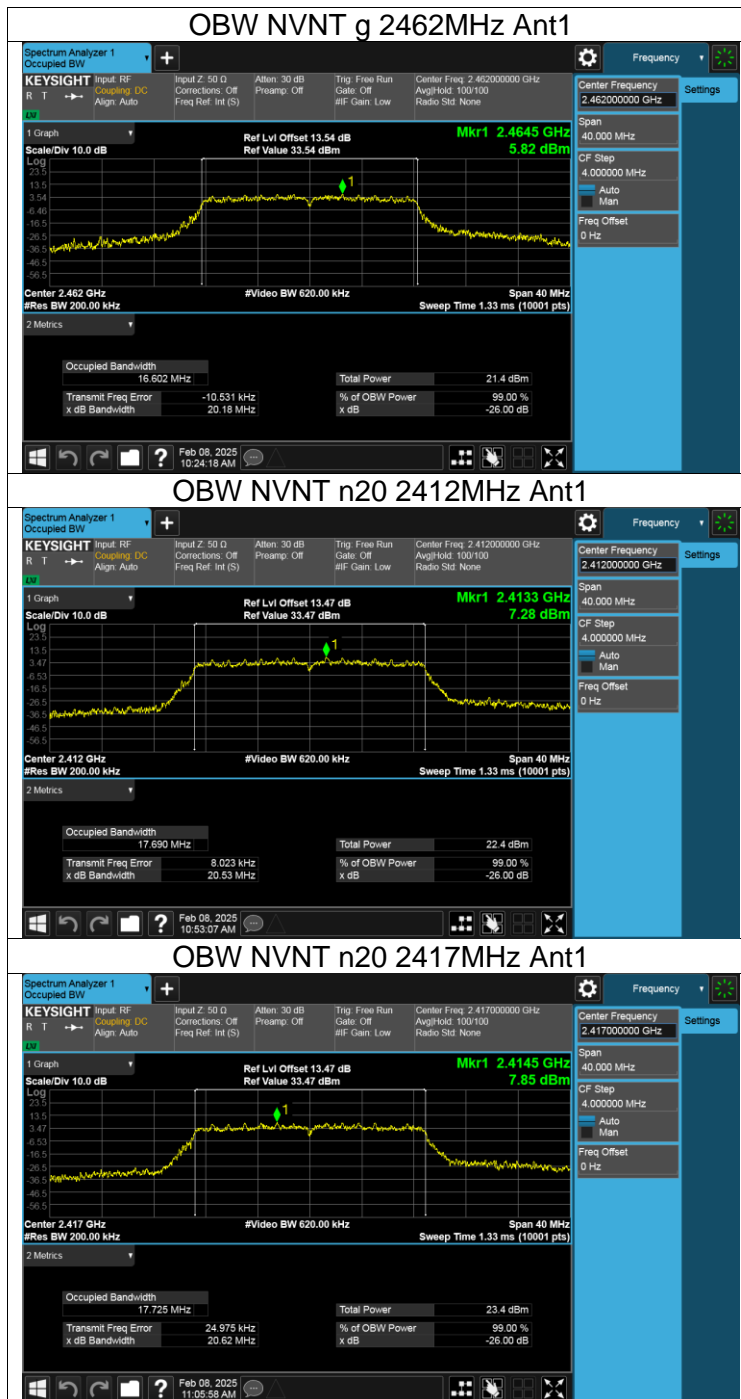

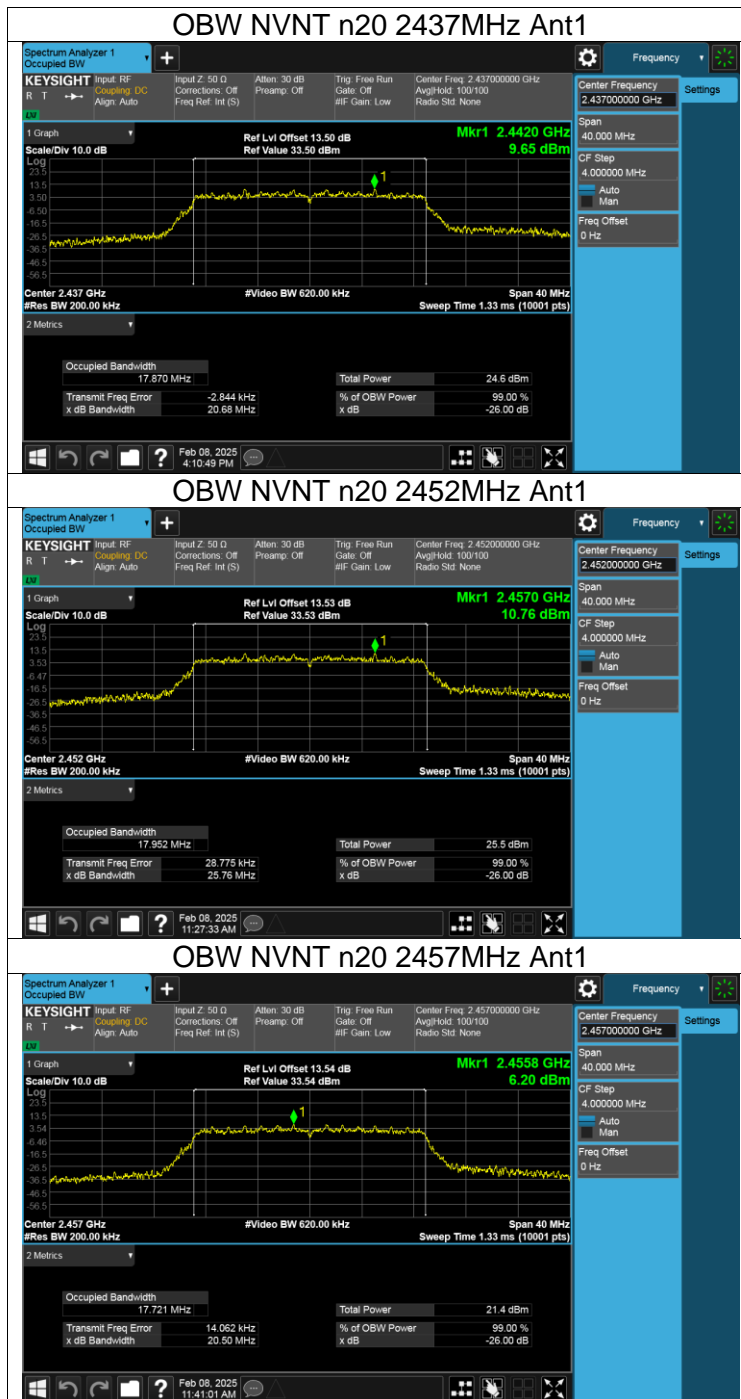

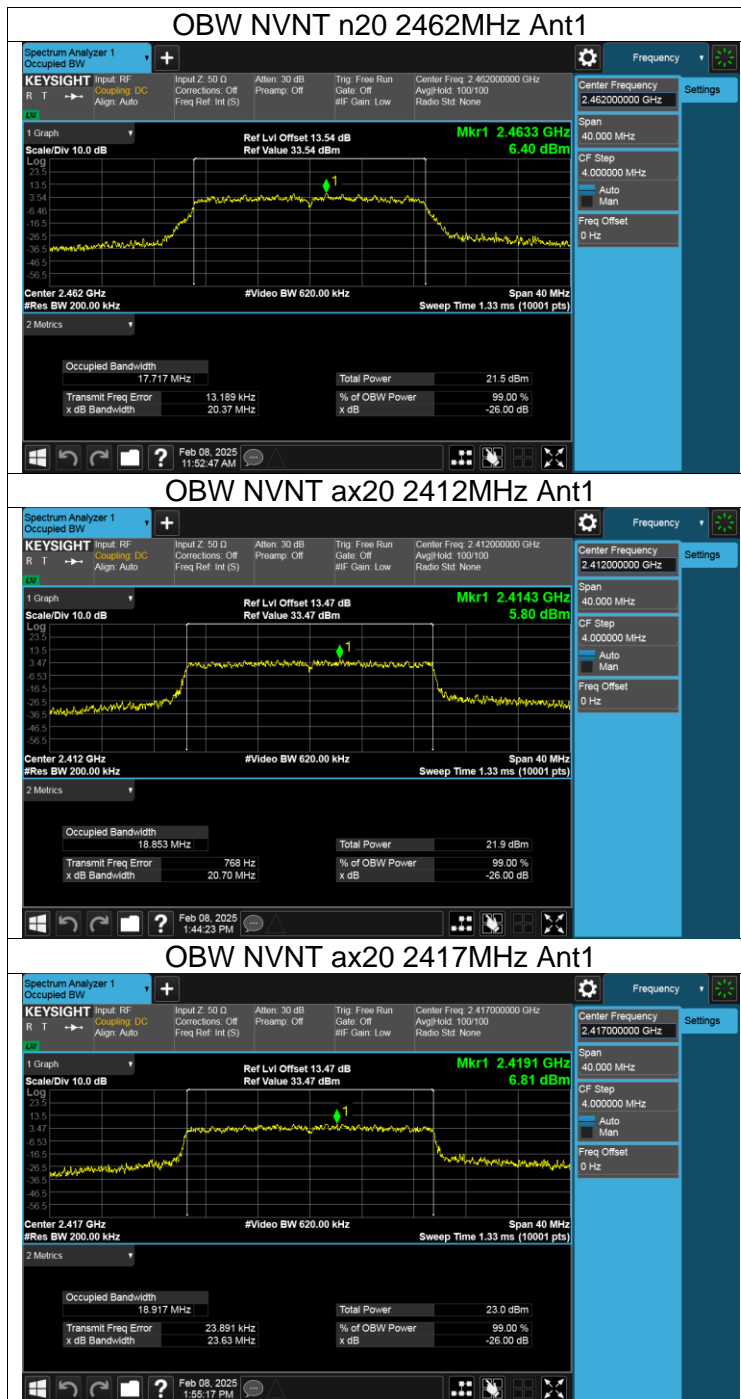

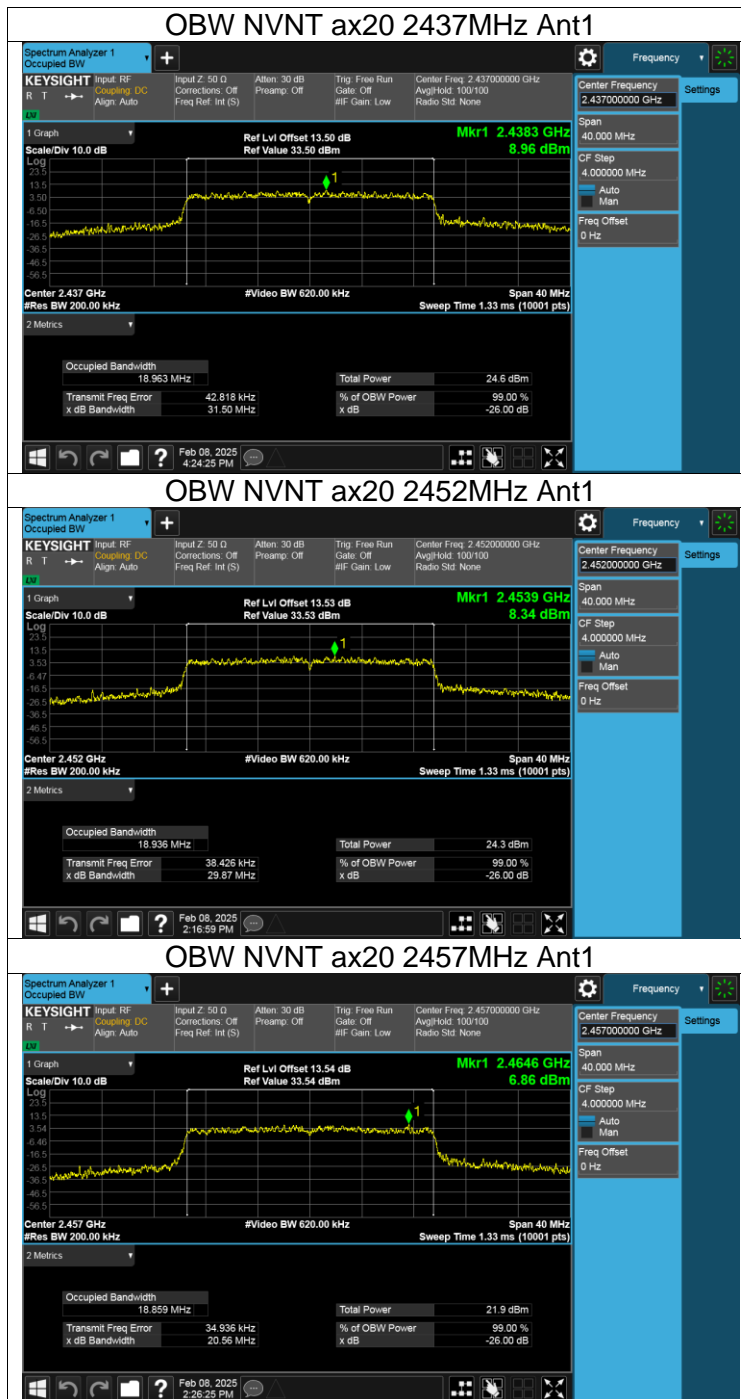


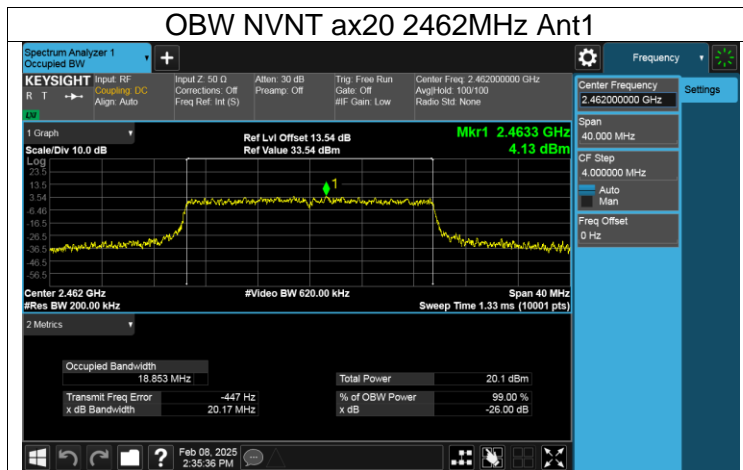



11.5. APPENDIX E: MAXIMUM POWER SPECTRAL DENSITY LEVEL


Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
b	2412	Ant1	-8.83	≤8	Pass
b	2437	Ant1	-9.23	≤8	Pass
b	2452	Ant1	-8.44	≤8	Pass
b	2457	Ant1	-10.94	≤8	Pass
b	2462	Ant1	-10.94	≤8	Pass
g	2412	Ant1	-13.25	≤8	Pass
g	2417	Ant1	-11.8	≤8	Pass
g	2437	Ant1	-11.7	≤8	Pass
g	2457	Ant1	-12.85	≤8	Pass
g	2462	Ant1	-15.49	≤8	Pass
n20	2412	Ant1	-13.06	≤8	Pass
n20	2417	Ant1	-12.3	≤8	Pass
n20	2437	Ant1	-11.38	≤8	Pass
n20	2452	Ant1	-10.78	≤8	Pass
n20	2457	Ant1	-13.96	≤8	Pass
n20	2462	Ant1	-14.06	≤8	Pass
ax20	2412	Ant1	-14.87	≤8	Pass
ax20	2417	Ant1	-12.51	≤8	Pass
ax20	2437	Ant1	-11.44	≤8	Pass
ax20	2452	Ant1	-11.85	≤8	Pass
ax20	2457	Ant1	-13.93	≤8	Pass
ax20	2462	Ant1	-16.05	≤8	Pass


Note: 1. The Duty Cycle Factor (refer to section 7.5) had already compensated to the test data.

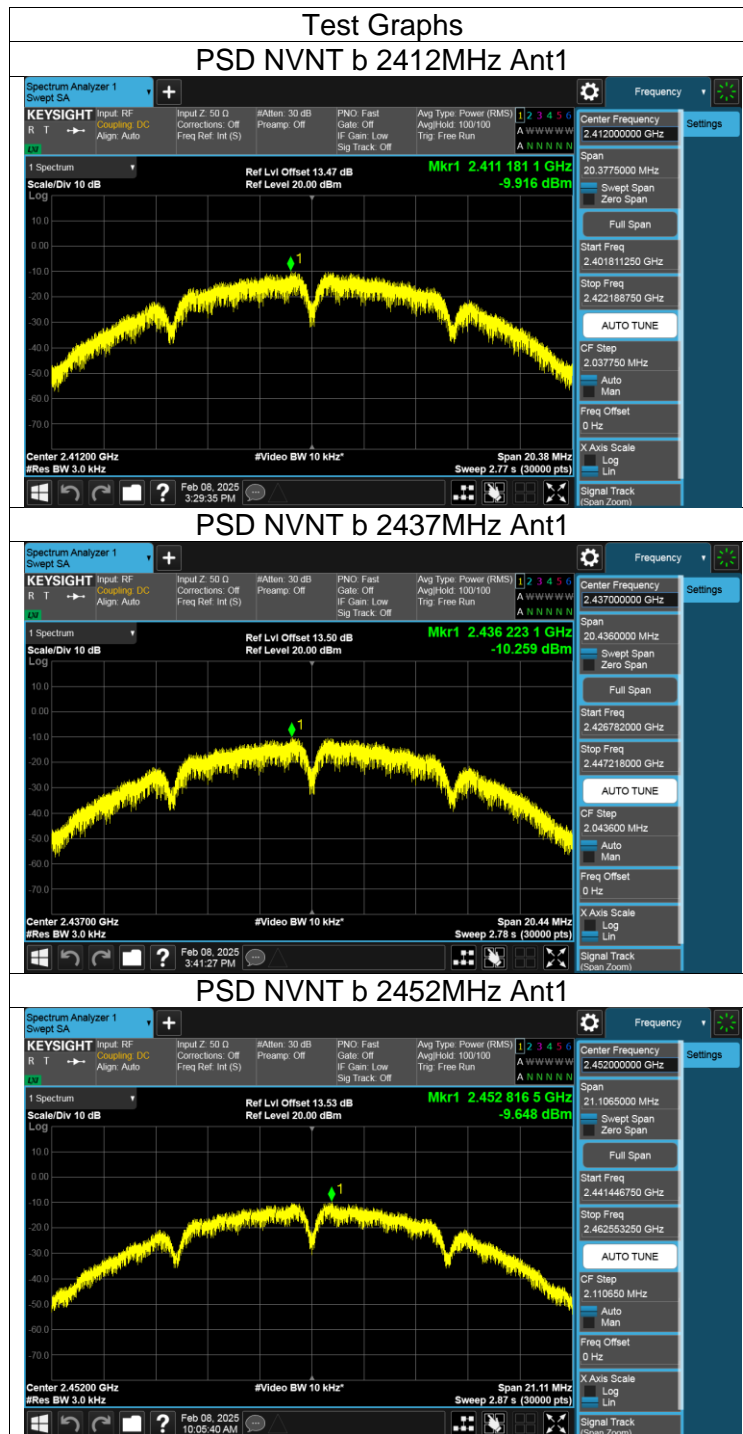


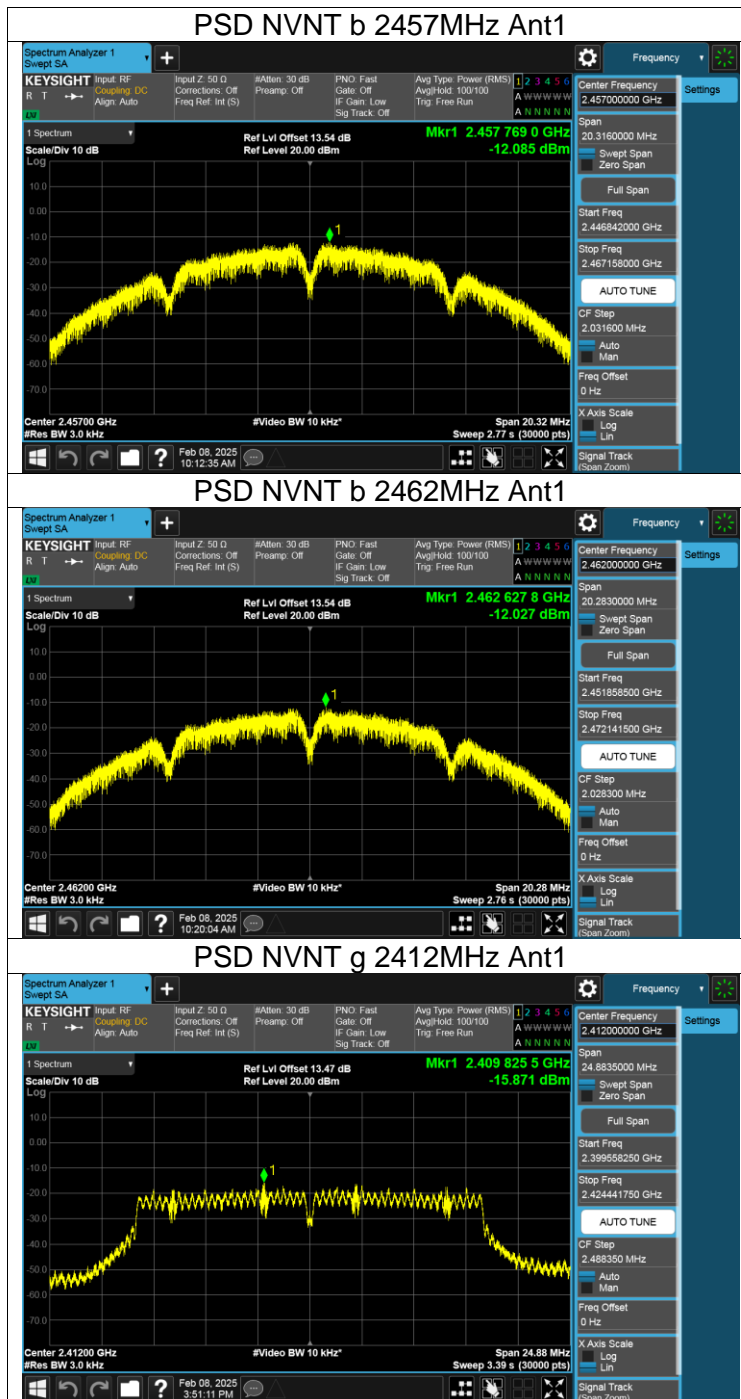


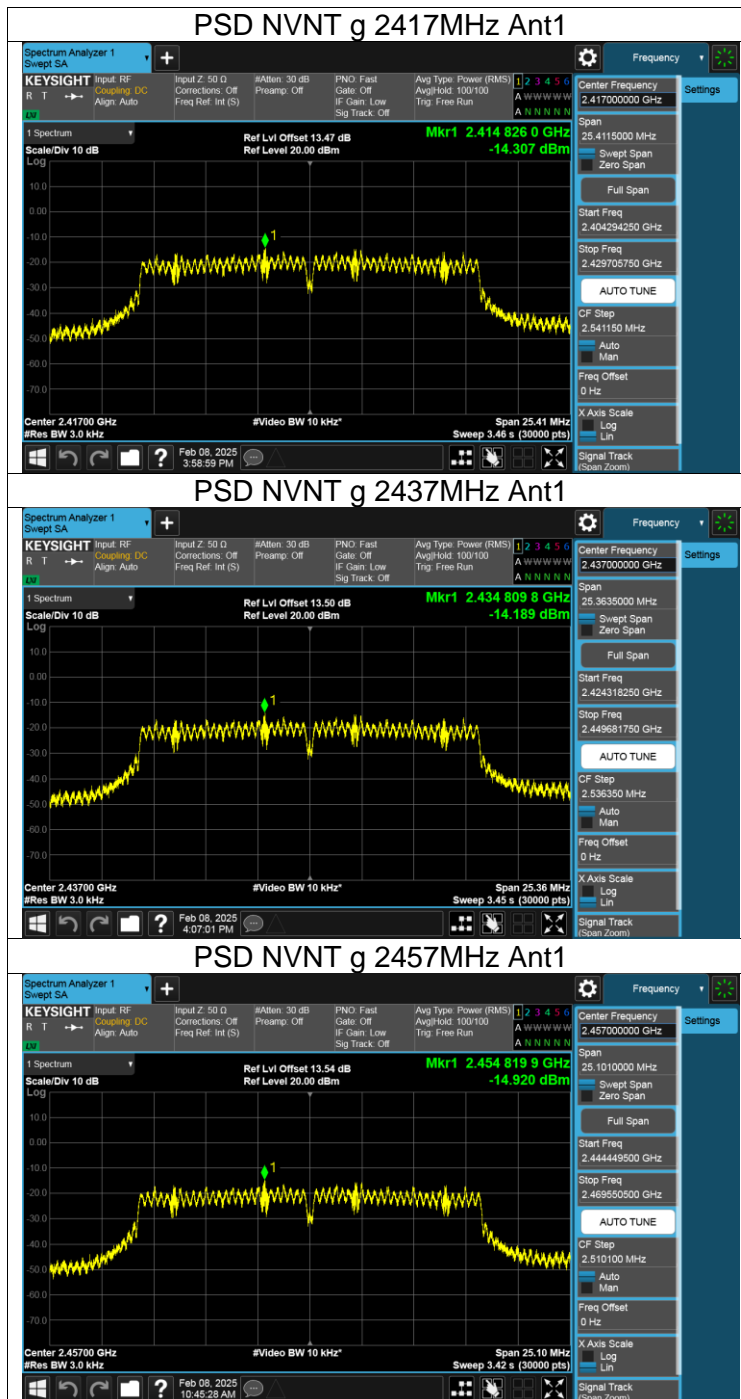


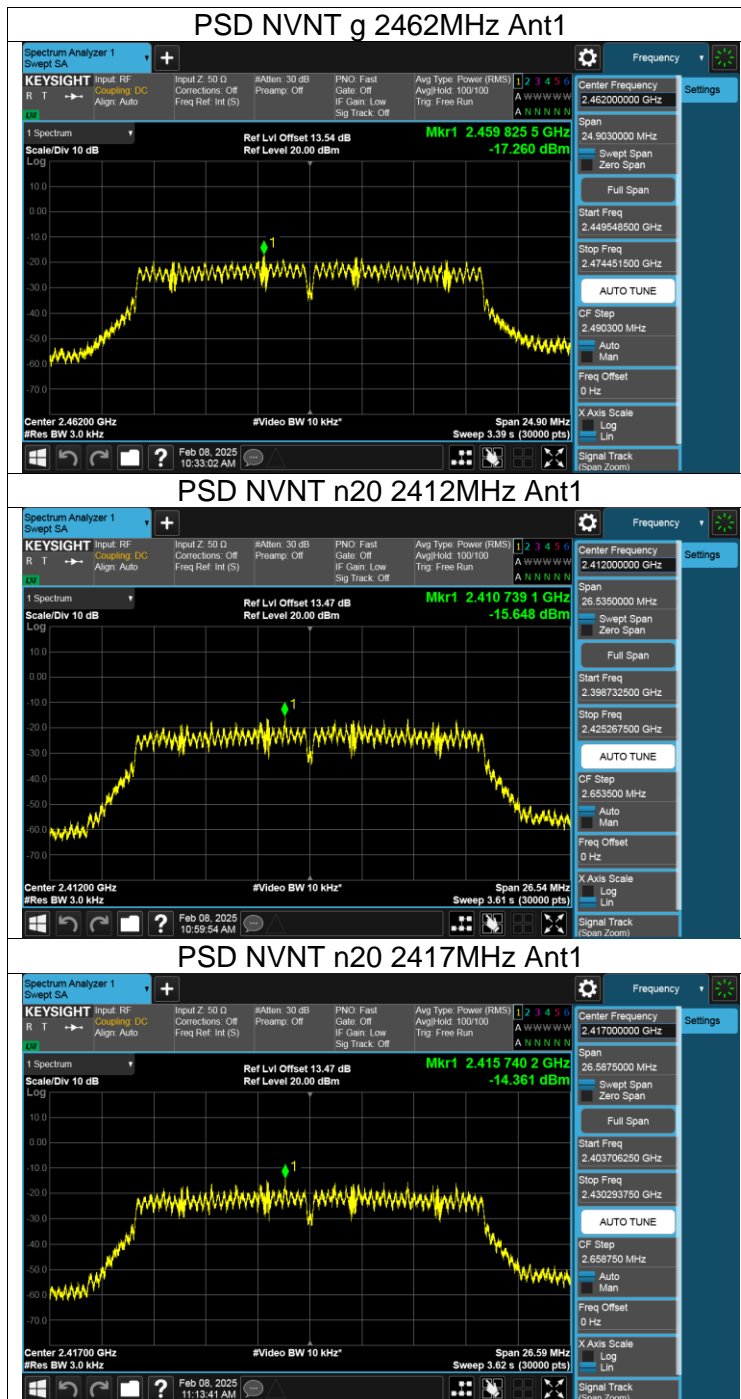

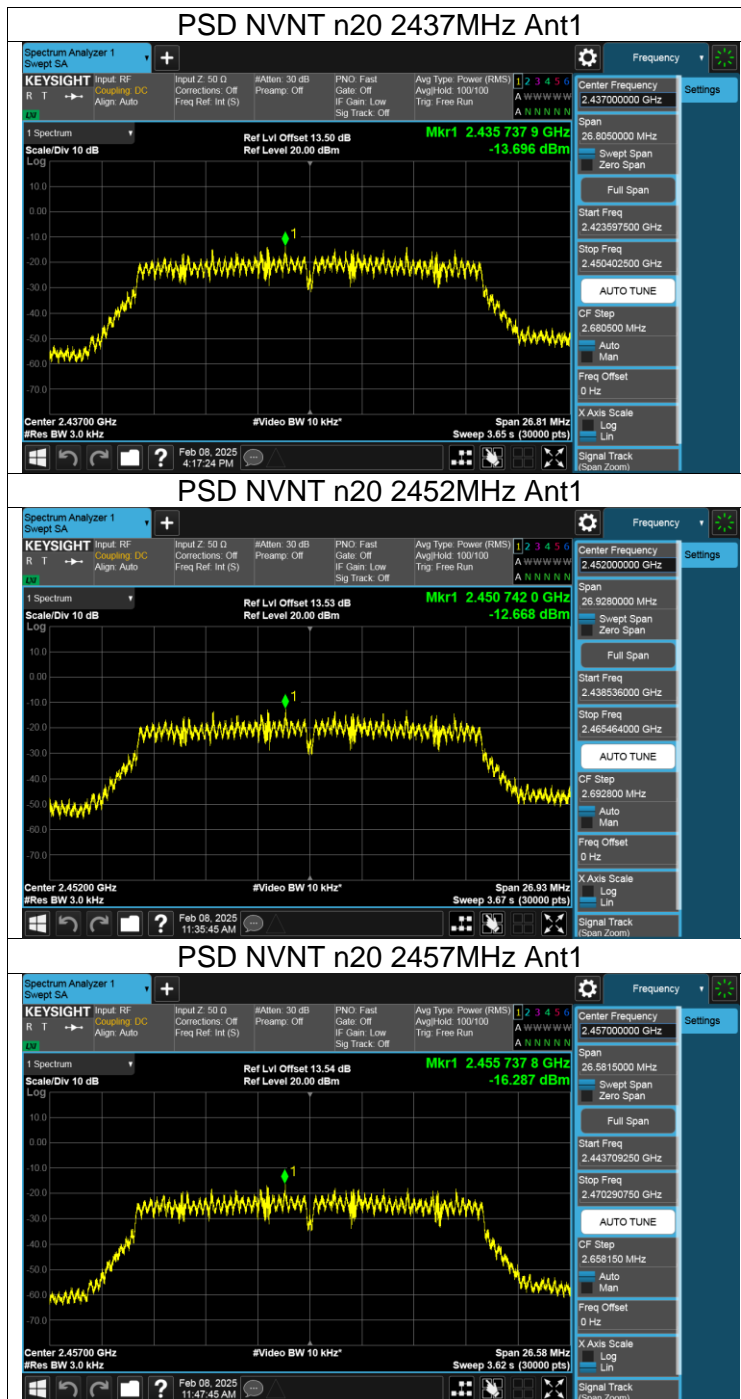

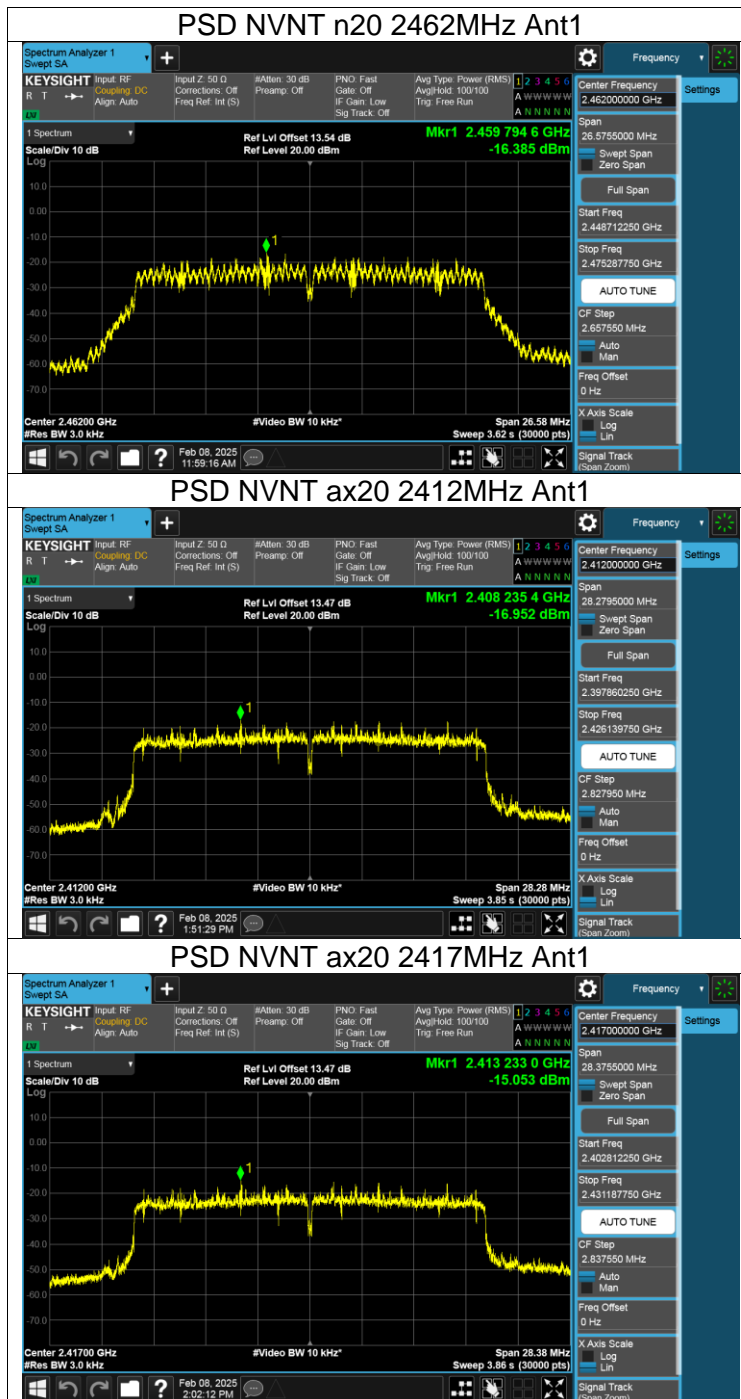

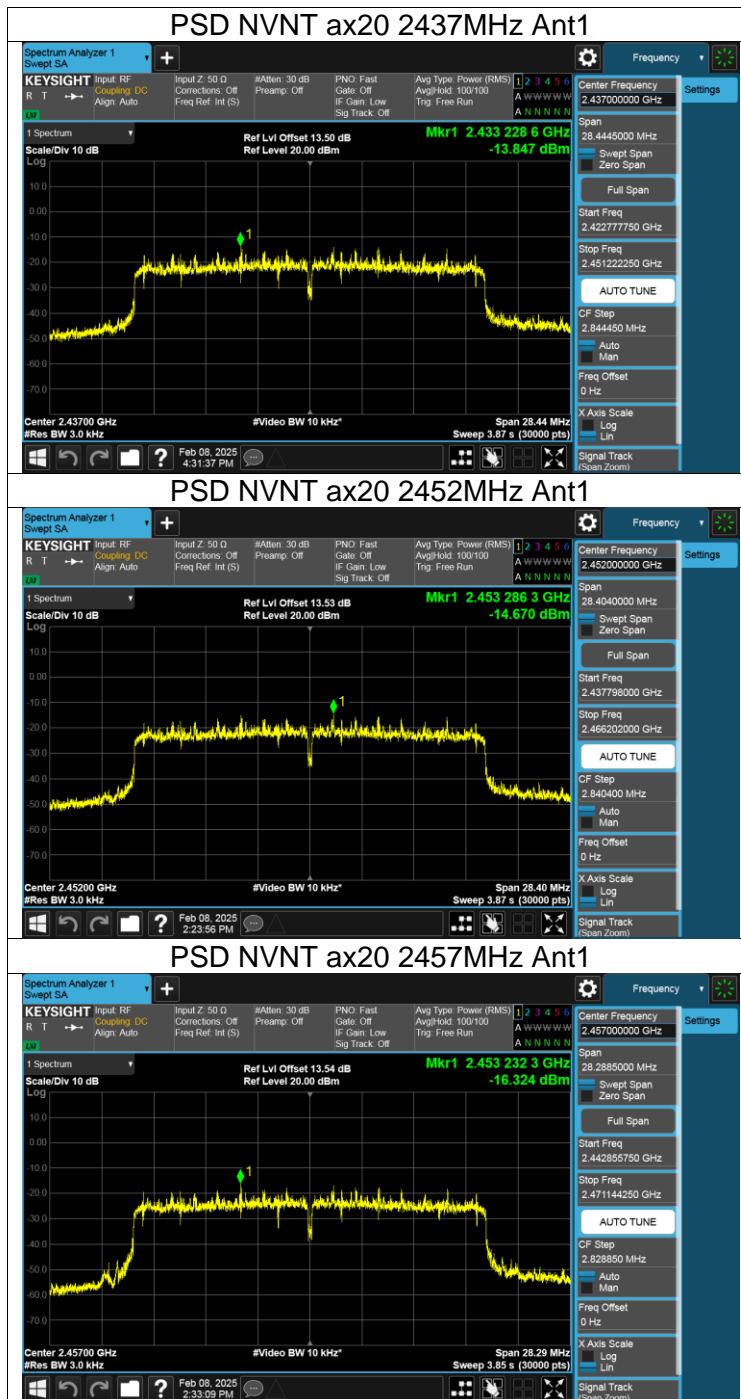

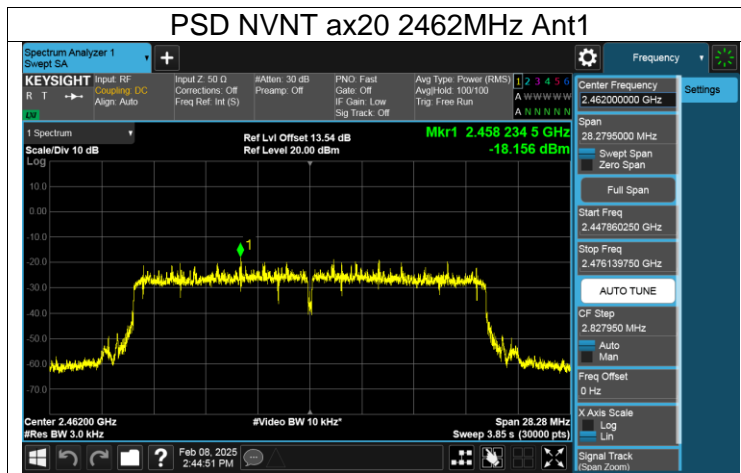

11.6. APPENDIX F: BAND EDGE

Mode	Frequency (MHz)	Antenna	Verdict
b	2412	Ant1	Pass
b	2452	Ant1	Pass
b	2457	Ant1	Pass
b	2462	Ant1	Pass
g	2412	Ant1	Pass
g	2417	Ant1	Pass
g	2457	Ant1	Pass
g	2462	Ant1	Pass
n20	2412	Ant1	Pass
n20	2417	Ant1	Pass
n20	2452	Ant1	Pass
n20	2457	Ant1	Pass
n20	2462	Ant1	Pass
ax20	2412	Ant1	Pass
ax20	2417	Ant1	Pass
ax20	2452	Ant1	Pass
ax20	2457	Ant1	Pass
ax20	2462	Ant1	Pass

