

S

T

S

L

A

B



RADIO TEST REPORT

Report No: STS1506072F01

Issued for

Sky Phone LLC

1348 Washington Av. #350 Miami Beach FL., USA

Product Name:	Smart Phone
Brand Name:	Sky Devices
Model No.:	Sky 5.0L
Series Model:	N/A
FCC ID:	2ABOSSKY50L
Test Standard:	FCC Part 22H and 24E

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.
1/F., Building B, Zhuoke Science Park, No.190,Chongqing Road,
Fuyong Street, Bao'an District, Shenzhen, Guangdong,China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail: sts@stsapp.com



**TEST RESULT CERTIFICATION****Applicant's name**..... : Sky Phone LLC

Address..... : 1348 Washington Av. #350 Miami Beach FL., USA

Manufacture's Name..... : Shenzhen Konka Telecommunications Technology Co., Ltd.

Address..... : No.9008 Shennan Road, Overseas Chinese Town, ShenZhen, Guangdong, China

Product name..... : Smart Phone

Brand name : Sky Devices

Model and/or type reference.. : Sky 5.0L

Standards..... : FCC Part 22H and 24E

Test procedure..... TIA 603 C

This device described above has been tested by STS and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test.....

Date of performance of tests..... 10 July. 2015 ~16 July. 2015

Date of Issue..... 17 July. 2015

Test Result **Pass**

Testing Engineer : _____

(Jin Ming)

Technical Manager : _____

(Vita Li)

Authorized Signatory : _____

(Bovey Yang)





TABLE OF CONTENTS	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 PRODUCT DESCRIPTION	7
2.2 RELATED SUBMITTAL(S) / GRANT (S)	8
2.3 SPECIAL ACCESSORIES	8
2.4 EUT CONFIGURATION	8
2.5 EUT EXERCISE	8
2.6 CONFIGURATION OF EUT SYSTEM	8
2.7 MEASUREMENT INSTRUMENTS	9
3. DESCRIPTION OF TEST MODES	10
4. OUTPUT POWER	11
4.1 CONDUCTED OUTPUT POWER	11
4.2 PEAK-TO-AVERAGE RADIO (PAR) OF TRANSMITTER	17
4.3 RADIATED OUTPUT POWER	23
5. SPURIOUS EMISSION	27
5.1 SPURIOUS EMISSION	27
5.2 RADIATED SPURIOUS EMISSION	30
6. FREQUENCY STABILITY	37
6.1 MEASUREMENT METHOD	37
6.2 PROVISIONS APPLICABLE	38
6.3 MEASUREMENT RESULT	39
7. OCCUPIED BANDWIDTH	44
7.1 MEASUREMENT METHOD	44
7.2 PROVISIONS APPLICABLE	44
7.3 MEASUREMENT RESULT	44
8. EMISSION BANDWIDTH	47
8.1 MEASUREMENT METHOD	47
8.2 PROVISIONS APPLICABLE	47
8.3 MEASUREMENT RESULT	47
9. BAND EDGE	50
9.1 MEASUREMENT METHOD	50



9.2 PROVISIONS APPLICABLE	50
9.3 MEASUREMENT RESULT	50
APPENDIX I	51
TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION	51
TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)	90
EMISSION BANDWIDTH (-26DBC)	90
APPENDIX III	120
TEST PLOTS FOR BAND EDGES	120
APPENDIX IV	135
PHOTOS OF TEST SETUP	135



**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	17 July. 2015	STS1506072F01	ALL	Initial Issue





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

The radiated emission testing was performed according to the procedures of ansi C63.10: 2009; TIA 603 C and fcc cfr 47 rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057

Item Number	Item Description		FCC Rules
1	Output Power	Conducted output power	22.913(a) / 24.232 (b)
		Radiated output power	
2	Spurious Emission	Conducted spurious emission	2.1051 / 22.917 / 24.238
		Radiated spurious emission	
3	Frequency Stability		2.1055 /24.235
4	Occupied Bandwidth		2.1049 (h)(i)
5	Emission Bandwidth		22.917(b) / 24.238 (b)
6	Band Edge		22.917(b) / 24.238 (b)

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F., Building B, Zhuoke Science Park, No.190,Chongqing Road, Fuyong Street, Bao'an District, Shenzhen, Guangdong,China

CNAS Registration No.: L7649;

FCC Registration No.: 842334; IC Registration No.: 12108A-1

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	$\pm 2.88\text{dB}$
2	Conducted Emission (150KHz-30MHz)	$\pm 2.67\text{dB}$
3	RF power,conducted	$\pm 0.70\text{dB}$
4	Spurious emissions,conducted	$\pm 1.19\text{dB}$
5	All emissions,radiated(<1G) 30MHz-200MHz	$\pm 2.83\text{dB}$
6	All emissions,radiated(<1G) 200MHz-1000MHz	$\pm 2.94\text{dB}$
7	All emissions,radiated(>1G)	$\pm 3.03\text{dB}$
8	Temperature	$\pm 0.5^{\circ}\text{C}$
9	Humidity	$\pm 2\%$



2. GENERAL INFORMATION

2.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	Smart Phone
Hardware version:	V1.1
Software version:	ALPS.L1.MP3.V1_KONKA6735M.35U.L
FCC ID:	2ABOSSKY50L
Frequency Bands:	☒ GSM 850 ☒ PCS 1900 (U.S. Bands) ☐ GSM 900 ☐ DCS 1800 (Non-U.S. Bands) U.S. Bands: ☒ UMTS FDD Band II ☒ UMTS FDD Band V ☒ UMTS FDD Band IV Non-U.S. Bands: ☐ UMTS FDD Band I ☐ UMTS FDD Band VIII
Max RF Output Power:	GSM850:27.21dBm,GSM1900:24.40dBm WCDMA Band V:23.26dBm,WCDMA Band II:22.63dBm WCDMA Band IV:25.35dBm
Type of Emission:	GSM(850):252KGXW; GSM(1900):254KGXW GPRS(850):255KGXW; GPRS(1900):255KGXW EDGE(850):248KG7W; EDGE(1900):243KG7W WCDMA850:4M24F9W WCDMA1900:4M24F9W WCDMA1700:4M25F9W
SIM CARD	SIM 1 and SIM 2 is a chipset unit and tested as single chipset
Antenna:	PIFA Antenna
Antenna gain:	0 dBi
Power Supply:	DC 3.8V by battery or DC 5.0V supplied by adapter
Battery parameter:	Capacitance: 2000mA, Rated Voltage: 3.8V
Adapter Input:	AC100-240V, 50-60Hz, 200mA
Adapter Output:	DC 5.0V, 1000mA
GPRS/EDGE Class	Multi-Class12
Extreme Vol. Limits:	DC3.4 V to 4.35 V (Nominal DC3.8V)
Extreme Temp. Tolerance	-30℃ to +50℃
** Note: The High Voltage 4.35V and Low Voltage 3.4V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.	



2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for fcc id: 2ABOSSKY50L filing to comply with the fcc part 22H&24E.

2.3 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with eut intended for fcc grant together.

2.4 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.5 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.6 CONFIGURATION OF EUT SYSTEM

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

EUT

Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	Smart Phone	Sky 5.0L	FCC ID: 2ABOSSKY50L	EUT

Note: All the accessories have been used during the test. the following "EUT" in setup diagram means EUT system.



2.7 MEASUREMENT INSTRUMENTS

The radiated emission testing was performed according to the procedures of ansi C 63.10: 2009; TIA 603C and fcc cfr 47 rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Spectrum Analyzer	Agilent	E4407B	MY50140340	2014.10.25	2015.10.24
Test Receiver	R&S	ESCI	101427	2014.10.25	2015.10.24
Communication Tester	Agilent	8960	MY48360751	2014.11.20	2015.11.19
Communication Tester	R&S	CMU200	112012	2014.10.25	2015.10.24
Test Receiver	R&S	ESCI	102086	2014.10.25	2015.10.24
Bilog Antenna	TESEQ	CBL6111D	34678	2014.11.25	2015.11.24
Horn Antenna	Schwarzbeck	BBHA 9120D(1201)	9120D-1343	2015.03.06	2016.03.05





3. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GPRS850 and GPRS1900 frequency band.

Note: GSM/GPRS/EDGE850, GSM/GPRS/EDGE1900, HSDPA band V, HSUPA band V And HSDPA band II, HSUPA band II, HSDPA band IV, HSUPA band IV modes have been tested during the test. the worst condition (GPRS/EDGE 850) be recorded in the test report if no other modes test data.





4. OUTPUT POWER

4.1 CONDUCTED OUTPUT POWER

4.1.1 MEASUREMENT METHOD

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM/GPRS /EDGE850, GSM/GPRS/EDGE1900, HSDPA /HSUPA band V, HSDPA /HSUPA band II,HSDPA /HSUPA band IV) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

4.1.2 MEASUREMENT RESULT

GSM 850:

Mode	Frequency (MHz)	Peak Power	AVG Power
GSM850	824.2	26.94	26.68
	836.6	26.88	26.56
	848.8	27.21	26.89
GPRS850 (1 Slot)	824.2	26.91	26.70
	836.6	26.82	26.54
	848.8	26.82	26.47
GPRS850 (2 Slot)	824.2	26.14	25.84
	836.6	25.92	25.68
	848.8	25.95	25.69
GPRS850 (3 Slot)	824.2	23.67	23.41
	836.6	23.53	23.22
	848.8	23.83	23.54
GPRS850 (4 Slot)	824.2	22.70	22.39
	836.6	22.30	22.02
	848.8	22.73	22.53
EDGE850 (1 Slot)	824.2	26.87	26.63
	836.6	26.98	26.58
	848.8	26.83	26.48
EDGE850 (2 Slot)	824.2	25.80	25.50
	836.6	26.18	25.85
	848.8	26.13	25.76
EDGE850 (3 Slot)	824.2	23.70	23.49
	836.6	24.10	23.75
	848.8	23.82	23.50
EDGE850 (4 Slot)	824.2	22.60	22.22
	836.6	22.82	22.59
	848.8	22.90	22.62



PCS 1900:

Mode	Frequency (MHz)	Peak Power	AVG Power
GSM1900	1850.2	24.21	24.01
	1880	23.93	23.59
	1909.8	24.40	24.05
GPRS1900 (1 Slot)	1850.2	24.11	23.82
	1880	24.09	23.82
	1909.8	23.85	23.60
GPRS1900 (2 Slot)	1850.2	23.12	22.86
	1880	23.08	22.83
	1909.8	23.02	22.75
GPRS1900 (3 Slot)	1850.2	20.83	20.49
	1880	20.60	20.22
	1909.8	21.02	20.76
GPRS1900 (4 Slot)	1850.2	19.77	19.45
	1880	19.50	19.25
	1909.8	19.91	19.57
EDGE1900 (1 Slot)	1850.2	24.04	23.71
	1880	23.93	23.59
	1909.8	23.83	23.61
EDGE1900 (2 Slot)	1850.2	23.00	22.77
	1880	23.41	23.15
	1909.8	23.30	22.97
EDGE1900 (3 Slot)	1850.2	20.96	20.76
	1880	21.11	20.72
	1909.8	20.99	20.69
EDGE1900 (4 Slot)	1850.2	19.52	19.28
	1880	20.12	19.88
	1909.8	20.13	19.78



UMTS BAND V

Mode	Frequency(MHz)	Peak Power	AVG Power
WCDMA 850 RMC	826.4	23.18	20.17
	836.6	22.91	19.78
	846.6	23.16	20.12
HSDPA Subtest 1	826.4	23.26	20.12
	836.6	23.00	19.94
	846.6	23.12	19.93
HSDPA Subtest 2	826.4	22.14	19.13
	836.6	21.79	18.59
	846.6	22.20	19.07
HSDPA Subtest 3	826.4	21.59	18.43
	836.6	21.29	18.24
	846.6	21.59	18.40
HSDPA Subtest 4	826.4	20.88	17.71
	836.6	20.56	17.36
	846.6	21.02	17.90
HSUPA Subtest 1	826.4	23.23	20.09
	836.6	22.90	19.84
	846.6	23.13	20.11
HSUPA Subtest 2	826.4	22.17	19.07
	836.6	21.88	18.76
	846.6	22.05	19.05
HSUPA Subtest 3	826.4	21.64	18.45
	836.6	21.29	18.29
	846.6	21.53	18.51
HSUPA Subtest 4	826.4	21.01	17.83
	836.6	20.74	17.56
	846.6	20.70	17.66
HSUPA Subtest 5	826.4	20.30	17.29
	836.6	20.07	16.88
	846.6	20.21	17.21



UMTS BAND II

Mode	Frequency(MHz)	Peak Power	AVG Power
WCDMA 1900 RMC	1852.4	22.62	19.54
	1880	22.63	19.52
	1907.6	22.44	19.35
HSDPA Subtest 1	1852.4	22.58	19.45
	1880	22.60	19.46
	1907.6	22.44	19.27
HSDPA Subtest 2	1852.4	21.55	18.45
	1880	21.44	18.34
	1907.6	21.26	18.17
HSDPA Subtest 3	1852.4	21.19	18.10
	1880	20.64	17.55
	1907.6	20.81	17.71
HSDPA Subtest 4	1852.4	20.40	17.33
	1880	20.09	17.00
	1907.6	19.83	16.81
HSUPA Subtest 1	1852.4	22.52	19.39
	1880	22.35	19.27
	1907.6	22.35	19.19
HSUPA Subtest 2	1852.4	21.61	18.58
	1880	21.18	17.99
	1907.6	21.06	18.00
HSUPA Subtest 3	1852.4	20.99	17.92
	1880	20.86	17.84
	1907.6	20.20	17.06
HSUPA Subtest 4	1852.4	20.46	17.38
	1880	20.22	17.18
	1907.6	19.56	16.50
HSUPA Subtest 5	1852.4	19.67	16.61
	1880	19.48	16.46
	1907.6	19.05	15.86



UMTS BAND IV

Mode	Frequency(MHz)	Peak Power(dBm)	AVG Power(dBm)
WCDMA 1700 RMC	1712.6	25.34	22.26
	1740	25.35	22.40
	1752.4	25.35	22.44
HSDPA Subtest 1	1712.6	24.73	21.15
	1740	24.86	21.34
	1752.4	24.86	21.40
HSDPA Subtest 2	1712.6	23.55	20.39
	1740	23.66	20.56
	1752.4	23.78	20.67
HSDPA Subtest 3	1712.6	22.98	19.84
	1740	23.04	19.99
	1752.4	23.14	20.08
HSDPA Subtest 4	1712.6	22.39	19.30
	1740	22.45	19.40
	1752.4	22.54	19.39
HSUPA Subtest 1	1712.6	24.47	21.30
	1740	24.72	21.65
	1752.4	24.67	21.56
HSUPA Subtest 2	1712.6	23.36	20.30
	1740	23.63	20.57
	1752.4	23.49	20.36
HSUPA Subtest 3	1712.6	22.75	19.60
	1740	23.13	20.09
	1752.4	22.88	19.76
HSUPA Subtest 4	1712.6	22.20	19.18
	1740	22.60	19.42
	1752.4	22.21	19.11
HSUPA Subtest 5	1712.6	21.67	18.52
	1740	21.92	18.75
	1752.4	21.65	18.61



According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	$MAX(CM-1,0)$
Note: $CM=1$ for $\beta_d / \beta_{ds} = 12/15$, $\beta_{hs} / \beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the GSM/GPRS/EDGE, HSDPA/HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.



4.2 PEAK-TO-AVERAGE RADIO (PAR) OF TRANSMITTER


4.2.1 STANDARD APPLICABLE

According to §24.232(d), Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.2.2 TEST PROCEDURE

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 30kHz and the peak-to-average ratio (PAR) of the transmission was recorded.

Test Configuration for the emission bandwidth testing:

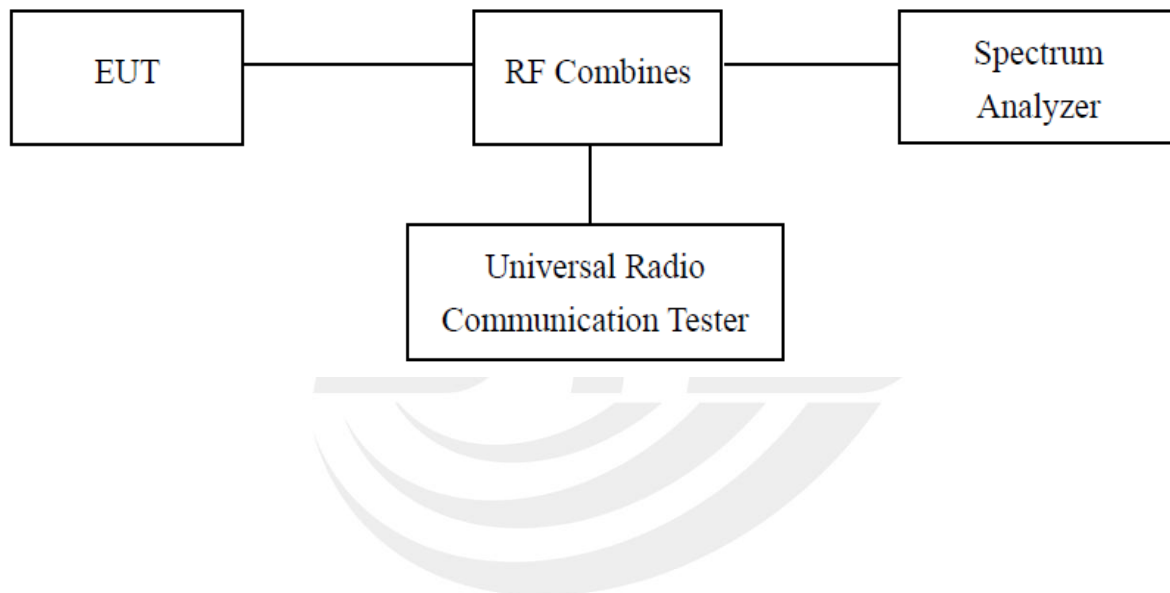



4.2.3 SUMMARY OF TEST RESULTS

GSM 850:

Mode	Frequency (MHz)	Peak Power	AVG Power	PAR	Limit
GSM850	824.20	26.94	26.68	0.26	13.00
	836.60	26.88	26.56	0.32	13.00
	848.80	27.21	26.89	0.32	13.00
GPRS850 (1 Slot)	824.20	26.91	26.70	0.21	13.00
	836.60	26.82	26.54	0.28	13.00
	848.80	26.82	26.47	0.35	13.00
GPRS850 (2 Slot)	824.20	26.14	25.84	0.30	13.00
	836.60	25.92	25.68	0.24	13.00
	848.80	25.95	25.69	0.26	13.00
GPRS850 (3 Slot)	824.20	23.67	23.41	0.26	13.00
	836.60	23.53	23.22	0.31	13.00
	848.80	23.83	23.54	0.29	13.00
GPRS850 (4 Slot)	824.20	22.70	22.39	0.31	13.00
	836.60	22.30	22.02	0.28	13.00
	848.80	22.73	22.53	0.20	13.00
EDGE850 (1 Slot)	824.20	26.87	26.63	0.24	13.00
	836.60	26.98	26.58	0.40	13.00
	848.80	26.83	26.48	0.35	13.00
EDGE850 (2 Slot)	824.20	25.80	25.50	0.30	13.00
	836.60	26.18	25.85	0.33	13.00
	848.80	26.13	25.76	0.37	13.00
EDGE850 (3 Slot)	824.20	23.70	23.49	0.21	13.00
	836.60	24.10	23.75	0.35	13.00
	848.80	23.82	23.50	0.32	13.00
EDGE850 (4 Slot)	824.20	22.60	22.22	0.38	13.00
	836.60	22.82	22.59	0.23	13.00
	848.80	22.90	22.62	0.28	13.00



PCS 1900:

Mode	Frequency (MHz)	Peak Power	AVG Power	PAR	Limit
GSM1900	1850.20	24.21	24.01	0.20	13.00
	1880.00	23.93	23.59	0.34	13.00
	1909.80	24.40	24.05	0.35	13.00
GPRS1900 (1 Slot)	1850.20	24.11	23.82	0.29	13.00
	1880.00	24.09	23.82	0.27	13.00
	1909.80	23.85	23.6	0.25	13.00
GPRS1900 (2 Slot)	1850.20	23.12	22.86	0.26	13.00
	1880.00	23.08	22.83	0.25	13.00
	1909.80	23.02	22.75	0.27	13.00
GPRS1900 (3 Slot)	1850.20	20.83	20.49	0.34	13.00
	1880.00	20.6	20.22	0.38	13.00
	1909.80	21.02	20.76	0.26	13.00
GPRS1900 (4 Slot)	1850.20	19.77	19.45	0.32	13.00
	1880.00	19.5	19.25	0.25	13.00
	1909.80	19.91	19.57	0.34	13.00
EDGE1900 (1 Slot)	1850.20	24.04	23.71	0.33	13.00
	1880.00	23.93	23.59	0.34	13.00
	1909.80	23.83	23.61	0.22	13.00
EDGE1900 (2 Slot)	1850.20	23	22.77	0.23	13.00
	1880.00	23.41	23.15	0.26	13.00
	1909.80	23.3	22.97	0.33	13.00
EDGE1900 (3 Slot)	1850.20	20.96	20.76	0.20	13.00
	1880.00	21.11	20.72	0.39	13.00
	1909.80	20.99	20.69	0.30	13.00
EDGE1900 (4 Slot)	1850.20	19.52	19.28	0.24	13.00
	1880.00	20.12	19.88	0.24	13.00
	1909.80	20.13	19.78	0.35	13.00



UMTS BAND V

Mode	Frequency (MHz)	Peak Power	AVG Power	PAR	Limit
WCDMA 850 RMC	826.40	23.18	20.17	3.01	13.00
	836.60	22.91	19.78	3.13	13.00
	846.60	23.16	20.12	3.04	13.00
HSDPA Subtest 1	826.40	23.26	20.12	3.14	13.00
	836.60	23.00	19.94	3.06	13.00
	846.60	23.12	19.93	3.19	13.00
HSDPA Subtest 2	826.40	22.14	19.13	3.01	13.00
	836.60	21.79	18.59	3.20	13.00
	846.60	22.20	19.07	3.13	13.00
HSDPA Subtest 3	826.40	21.59	18.43	3.16	13.00
	836.60	21.29	18.24	3.05	13.00
	846.60	21.59	18.40	3.19	13.00
HSDPA Subtest 4	826.40	20.88	17.71	3.17	13.00
	836.60	20.56	17.36	3.20	13.00
	846.60	21.02	17.90	3.12	13.00
HSUPA Subtest 1	826.40	23.23	20.09	3.14	13.00
	836.60	22.90	19.84	3.06	13.00
	846.60	23.13	20.11	3.02	13.00
HSUPA Subtest 2	826.40	22.17	19.07	3.10	13.00
	836.60	21.88	18.76	3.12	13.00
	846.60	22.05	19.05	3.00	13.00
HSUPA Subtest 3	826.40	21.64	18.45	3.19	13.00
	836.60	21.29	18.29	3.00	13.00
	846.60	21.53	18.51	3.02	13.00
HSUPA Subtest 4	826.40	21.01	17.83	3.18	13.00
	836.60	20.74	17.56	3.18	13.00
	846.60	20.70	17.66	3.04	13.00
HSUPA Subtest 5	826.40	20.30	17.29	3.01	13.00
	836.60	20.07	16.88	3.19	13.00
	846.60	20.21	17.21	3.00	13.00



UMTS BAND II

Mode	Frequency (MHz)	Peak Power	AVG Power	PAR	Limit
WCDMA 1900 RMC	1852.40	22.62	19.54	3.08	13.00
	1880.00	22.63	19.52	3.11	13.00
	1907.60	22.44	19.35	3.09	13.00
HSDPA Subtest 1	1852.40	22.58	19.45	3.13	13.00
	1880.00	22.6	19.46	3.14	13.00
	1907.60	22.44	19.27	3.17	13.00
HSDPA Subtest 2	1852.40	21.55	18.45	3.10	13.00
	1880.00	21.44	18.34	3.10	13.00
	1907.60	21.26	18.17	3.09	13.00
HSDPA Subtest 3	1852.40	21.19	18.1	3.09	13.00
	1880.00	20.64	17.55	3.09	13.00
	1907.60	20.81	17.71	3.10	13.00
HSDPA Subtest 4	1852.40	20.4	17.33	3.07	13.00
	1880.00	20.09	17	3.09	13.00
	1907.60	19.83	16.81	3.02	13.00
HSUPA Subtest 1	1852.40	22.52	19.39	3.13	13.00
	1880.00	22.35	19.27	3.08	13.00
	1907.60	22.35	19.19	3.16	13.00
HSUPA Subtest 2	1852.40	21.61	18.58	3.03	13.00
	1880.00	21.18	17.99	3.19	13.00
	1907.60	21.06	18	3.06	13.00
HSUPA Subtest 3	1852.40	20.99	17.92	3.07	13.00
	1880.00	20.86	17.84	3.02	13.00
	1907.60	20.2	17.06	3.14	13.00
HSUPA Subtest 4	1852.40	20.46	17.38	3.08	13.00
	1880.00	20.22	17.18	3.04	13.00
	1907.60	19.56	16.5	3.06	13.00
HSUPA Subtest 5	1852.40	19.67	16.61	3.06	13.00
	1880.00	19.48	16.46	3.02	13.00
	1907.60	19.05	15.86	3.19	13.00



UMTS BAND IV

Mode	Frequency (MHz)	Peak Power	AVG Power	PAR	Limit
WCDMA 1700 RMC	1712.6	25.34	22.26	3.08	13.00
	1740	25.35	22.40	2.95	13.00
	1752.4	25.35	22.44	2.91	13.00
HSDPA Subtest 1	1712.6	24.73	21.15	3.58	13.00
	1740	24.86	21.34	3.52	13.00
	1752.4	24.86	21.40	3.46	13.00
HSDPA Subtest 2	1712.6	23.55	20.39	3.16	13.00
	1740	23.66	20.56	3.10	13.00
	1752.4	23.78	20.67	3.11	13.00
HSDPA Subtest 3	1712.6	22.98	19.84	3.14	13.00
	1740	23.04	19.99	3.05	13.00
	1752.4	23.14	20.08	3.06	13.00
HSDPA Subtest 4	1712.6	22.39	19.30	3.09	13.00
	1740	22.45	19.40	3.05	13.00
	1752.4	22.54	19.39	3.15	13.00
HSUPA Subtest 1	1712.6	24.47	21.30	3.17	13.00
	1740	24.72	21.65	3.07	13.00
	1752.4	24.67	21.56	3.11	13.00
HSUPA Subtest 2	1712.6	23.36	20.30	3.06	13.00
	1740	23.63	20.57	3.06	13.00
	1752.4	23.49	20.36	3.13	13.00
HSUPA Subtest 3	1712.6	22.75	19.60	3.15	13.00
	1740	23.13	20.09	3.04	13.00
	1752.4	22.88	19.76	3.12	13.00
HSUPA Subtest 4	1712.6	22.20	19.18	3.02	13.00
	1740	22.60	19.42	3.18	13.00
	1752.4	22.21	19.11	3.10	13.00
HSUPA Subtest 5	1712.6	21.67	18.52	3.15	13.00
	1740	21.92	18.75	3.17	13.00
	1752.4	21.65	18.61	3.04	13.00



4.3 RADIATED OUTPUT POWER

4.3.1 MEASUREMENT METHOD

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes (GSM/GPRS/EDGE850, GSM/GPRS/EDGE1900, HSDPA/HSUPA band V, HSDPA/HSUPA band II) at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.

The measurements procedures specified in TIA-603C-2009 were applied.

1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_r) at the chamber's probe antenna is recorded.
2. The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as $AR_{pl} = P_{in} + 2.15 - P_r$. The AR_{pl} is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: $Power = P_{Mea} + AR_{pl}$
3. The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
5. The EUT is then put into continuously transmitting mode at its maximum power level.
6. Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (P_{in}).
8. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15 \text{ dBi}$.
9. Both Horizontal And Vertical Antenna Polarities Were Tested And Performed Pretest To Three Orthogonal Axis. The Worst Case Emissions Were Reported

4.3.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Mode	Nominal Peak Power
GSM 850	$\leq 38.45 \text{ dBm}$ (7W)
PCS 1900	$\leq 33 \text{ dBm}$ (2W)
UMTS BAND V	$\leq 38.45 \text{ dBm}$ (7W)
UMTS BAND II	$\leq 33 \text{ dBm}$ (2W)
UMTS BAND IV	$\leq 38.45 \text{ dBm}$ (7W)



4.3.3 MEASUREMENT RESULT

Radiated Power (ERP) for GSM 850 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GSM850	824.2	22.11	Horizontal	Pass
	824.2	24.12	Vertical	Pass
	836.6	22.01	Horizontal	Pass
	836.6	24.07	Vertical	Pass
	848.8	22.01	Horizontal	Pass
	848.8	24.06	Vertical	Pass

Radiated Power (ERP) for GPRS 850 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GPRS850	824.2	22.04	Horizontal	Pass
	824.2	23.96	Vertical	Pass
	836.6	21.91	Horizontal	Pass
	836.6	23.99	Vertical	Pass
	848.8	21.90	Horizontal	Pass
	848.8	24.03	Vertical	Pass

Radiated Power (ERP) for EDGE 850 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
EDGE850	824.2	21.92	Horizontal	Pass
	824.2	23.90	Vertical	Pass
	836.6	21.88	Horizontal	Pass
	836.6	24.05	Vertical	Pass
	848.8	22.00	Horizontal	Pass
	848.8	23.86	Vertical	Pass



Radiated Power (EIRP) for PCS 1900 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
PCS1900	1850.2	19.23	Horizontal	Pass
	1850.2	21.03	Vertical	Pass
	1880.0	19.08	Horizontal	Pass
	1880.0	21.12	Vertical	Pass
	1909.8	19.24	Horizontal	Pass
	1909.8	21.17	Vertical	Pass

Radiated Power (EIRP) for GPRS 1900 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
GPRS 1900	1850.2	19.00	Horizontal	Pass
	1850.2	21.13	Vertical	Pass
	1880.0	18.95	Horizontal	Pass
	1880.0	20.97	Vertical	Pass
	1909.8	19.01	Horizontal	Pass
	1909.8	21.01	Vertical	Pass

Radiated Power (EIRP) for EDGE 1900 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
EDGE 1900	1850.2	19.13	Horizontal	Pass
	1850.2	21.12	Vertical	Pass
	1880.0	19.16	Horizontal	Pass
	1880.0	21.02	Vertical	Pass
	1909.8	19.13	Horizontal	Pass
	1909.8	21.10	Vertical	Pass



Radiated Power (ERP) for UMTS band V				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
RMC 12.2kbps	826.4	19.35	Horizontal	Pass
	826.4	20.36	Vertical	Pass
	836.6	19.50	Horizontal	Pass
	836.6	20.39	Vertical	Pass
	846.6	19.27	Horizontal	Pass
	846.6	20.36	Vertical	Pass

Radiated Power (EIRP) for UMTS band II				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
RMC 12.2kbps	1852.4	18.28	Horizontal	Pass
	1852.4	19.13	Vertical	Pass
	1880	18.17	Horizontal	Pass
	1880	19.32	Vertical	Pass
	1907.6	18.19	Horizontal	Pass
	1907.6	19.28	Vertical	Pass

Radiated Power (ERP) for UMTS band IV				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
RMC 12.2kbps	1712.6	20.96	Horizontal	Pass
	1712.6	21.95	Vertical	Pass
	1740	20.85	Horizontal	Pass
	1740	22.06	Vertical	Pass
	1752.4	20.94	Horizontal	Pass
	1752.4	22.03	Vertical	Pass



5. SPURIOUS EMISSION

5.1 SPURIOUS EMISSION

5.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 20 GHz, For the equipment of band II, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz. For band V, data taken from 30 MHz to 9 GHz. For band IV, data taken from 30 MHz to 20 GHz.

2. Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM/GPRS/EDGE 850 MHz	
Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

Typical Channels for testing of PCS/ GPRS/EDGE 1900 MHz	
Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

Typical Channels for testing of UMTS band V	
Channel	Frequency (MHz)
4132	826.4
4183	836.6
4233	846.6

Typical Channels for testing of UMTS band II	
Channel	Frequency (MHz)
9262	1852.4
9400	1880.0
9538	1907.6



Typical Channels for testing of UMTS band IV	
Channel	Frequency (MHz)
1313	1712.6
1450	1740
1512	1752.4





5.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

5.1.3 MEASUREMENT RESULT

PLEASE REFER TO : APPENDIX I TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

Note: 1. Below 30MHz no Spurious found and The GSM modes is the worst condition.

2. As no emission found in standby or receive mode, no recording in this report.



5.2 RADIATED SPURIOUS EMISSION


5.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603C-2009 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GSM/GPRS/EDGE850, GSM/GPRS/EDGE1900, HSDPA/HSUPA band V, HSDPA/HSUPA band II, HSDPA/HSUPA band IV) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.


The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as,

$$RSE = R_x \text{ (dBuV)} + CL \text{ (dB)} + SA \text{ (dB)} + Gain \text{ (dBi)} - 107 \text{ (dBuV to dBm)}$$
The SA is calibrated using following setup.

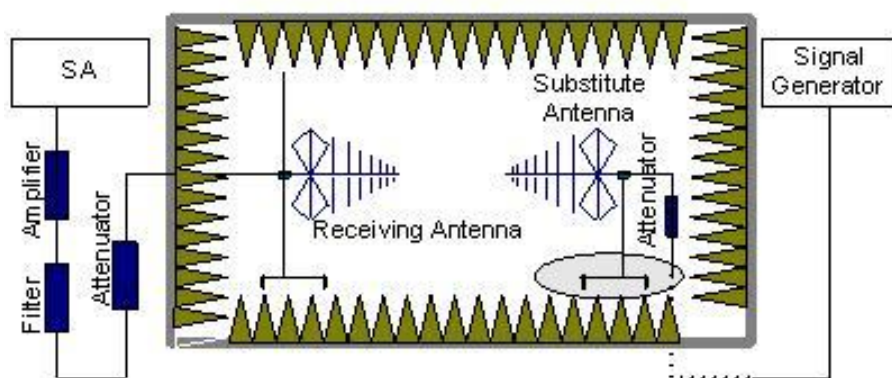

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

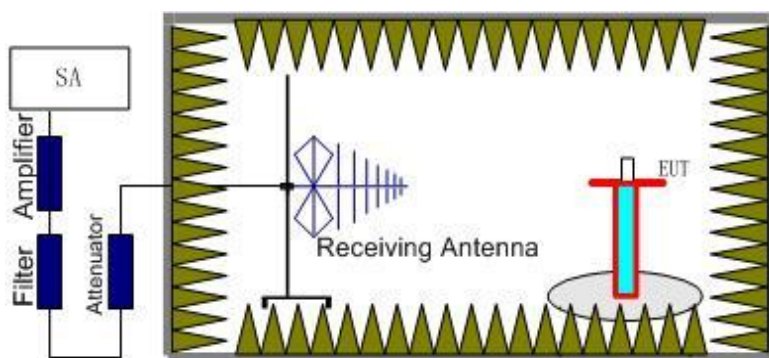



Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS 1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz), GSM850 band (824.2MHz, 836.6MHz, 848.8MHz), UMTS band V (4132 (826.4MHz), 4183(836.6MHz) and 4233 (846.6MHz) and UMTS band II (9262 (1852.4.6MHz), 9400(1880MHz) and 9538 (1907.6MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: $Power = P_{Mea} + A_{Rpl}$

5.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P , in Watts) by at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Note: only result the worst condition of each test mode.



5.2.3 MEASUREMENT RESULT

GSM 850:

The Worst Test Results Channel 128/824.2 MHz						
Frequency(MHz)	Power(dBm)	ARpl	P _{Mea} (dBm)	Limit (dBm)	Margin(dBm)	Polarity
1648.443	-35.76	-4.65	-40.41	-13	-27.41	Horizontal
2472.632	-36.97	-2.21	-39.18	-13	-26.18	Horizontal
3296.823	-31.85	0.21	-31.64	-13	-18.64	Horizontal
1648.425	-38.42	-4.65	-43.07	-13	-30.07	Vertical
2472.655	-41.63	-2.21	-43.84	-13	-30.84	Vertical
3296.836	-42.65	0.21	-42.86	-13	-29.86	Vertical
The Worst Test Results Channel 190/836.6 MHz						
Frequency(MHz)	Power(dBm)	ARpl	P _{Mea} (dBm)	Limit (dBm)	Margin(dBm)	Polarity
1673.243	-36.74	-4.65	-41.39	-13	-28.39	Horizontal
2509.851	-42.43	-2.21	-44.64	-13	-31.64	Horizontal
3346.462	-38.53	0.21	-38.32	-13	-25.32	Horizontal
1673.224	-37.74	-4.65	-42.39	-13	-29.39	Vertical
2509.881	-31.63	-2.21	-33.84	-13	-20.84	Vertical
3346.475	-36.97	0.21	-36.76	-13	-23.76	Vertical
The Worst Test Results Channel 251/848.8 MHz						
Frequency(MHz)	Power(dBm)	ARpl	P _{Mea} (dBm)	Limit (dBm)	Margin(dBm)	Polarity
1697.675	-35.76	-4.65	-40.41	-13	-27.41	Horizontal
2546.437	-43.65	-2.21	-45.86	-13	-32.86	Horizontal
3395.237	-42.75	0.21	-42.54	-13	-29.54	Horizontal
1697.636	-35.75	-4.65	-40.4	-13	-27.4	Vertical
2546.496	-41.24	-2.21	-43.45	-13	-30.45	Vertical
3395.217	-37.62	0.21	-37.41	-13	-24.41	Vertical

Note: Below 30MHz no Spurious found and The GSM modes is the worst condition.



PCS 1900:

The Worst Test Results for Channel 512/1850.2MHz						
Frequency(MHz)	Power(dBm)	A _{Rpl}	P _{Mea} (dBm)	Limit (dBm)	Margin(dBm)	Polarity
3700.436	-33.46	0.33	-33.13	-13	-20.13	Horizontal
5550.652	-35.96	4.01	-31.95	-13	-18.95	Horizontal
7400.839	-42.43	10.7	-31.73	-13	-18.73	Horizontal
3700.452	-34.45	0.33	-34.12	-13	-21.12	Vertical
5550.653	-35.86	4.01	-31.85	-13	-18.85	Vertical
7400.896	-41.54	10.7	-30.84	-13	-17.84	Vertical
The Worst Test Results for Channel 661/1880.0MHz						
Frequency(MHz)	Power(dBm)	A _{Rpl}	P _{Mea} (dBm)	Limit (dBm)	Margin(dBm)	Polarity
3760.141	-36.43	0.33	-36.1	-13	-23.1	Horizontal
5640.295	-32.57	4.01	-28.56	-13	-15.56	Horizontal
7520.286	-42.45	10.7	-31.75	-13	-18.75	Horizontal
3760.163	-31.46	0.33	-31.13	-13	-18.13	Vertical
5640.226	-36.75	4.01	-32.74	-13	-19.74	Vertical
7520.296	-37.35	10.7	-26.65	-13	-13.65	Vertical
The Worst Test Results for Channel 810/1909.8MHz						
Frequency(MHz)	Power(dBm)	A _{Rpl}	P _{Mea} (dBm)	Limit (dBm)	Margin(dBm)	Polarity
3819.673	-32.52	0.33	-32.19	-13	-19.19	Horizontal
5729.482	-35.62	4.01	-31.61	-13	-18.61	Horizontal
7639.294	-37.41	10.7	-26.71	-13	-13.71	Horizontal
3819.636	-32.56	0.33	-32.23	-13	-19.23	Vertical
5729.486	-41.21	4.01	-37.2	-13	-24.2	Vertical
7639.232	-38.64	10.7	-27.94	-13	-14.94	Vertical

Note: Below 30MHz no Spurious found and The GSM modes is the worst condition.



UMTS band V

Channel 4358/871.6MHz						
Frequency(MHz)	Power(dBm)	A _{Rpl}	P _{Mea} (dBm)	Limit (dBm)	Margin(dBm)	Polarity
1743.772	-34.43	-4.65	-39.08	-13	-26.08	Horizontal
2612.143	-35.35	-2.21	-37.56	-13	-24.56	Horizontal
1743.806	-32.75	-4.65	-37.4	-13	-24.4	Vertical
2612.209	-31.57	-2.21	-33.78	-13	-20.78	Vertical
Channel 4400/880MHz						
Frequency(MHz)	Power(dBm)	A _{Rpl}	P _{Mea} (dBm)	Limit (dBm)	Margin(dBm)	Polarity
1761.186	-31.57	-4.65	-36.22	-13	-23.22	Horizontal
2642.777	-35.52	-2.21	-37.73	-13	-24.73	Horizontal
1761.148	-27.51	-4.65	-32.16	-13	-19.16	Vertical
2642.813	-35.85	-2.21	-38.06	-13	-25.06	Vertical
Channel 4457/891.4MHz						
Frequency(MHz)	Power(dBm)	A _{Rpl}	P _{Mea} (dBm)	Limit (dBm)	Margin(dBm)	Polarity
1783.788	-36.46	-4.65	-41.11	-13	-28.11	Horizontal
2674.711	-38.08	-2.21	-40.29	-13	-27.29	Horizontal
1783.176	-26.86	-4.65	-31.51	-13	-18.51	Vertical
2674.728	-35.75	-2.21	-37.96	-13	-24.96	Vertical

Note: Below 30MHZ no Spurious found and The RMC modes is the worst condition.



UMTS band II

Channel 9663/1932.6MHz						
Frequency(MHz)	Power(dBm)	ARpl	P _{Mea} (dBm)	Limit (dBm)	Margin(dBm)	Polarity
3866.737	-34.21	0.33	-33.88	-13	-20.88	Horizontal
5998.222	-35.63	4.01	-31.62	-13	-18.62	Horizontal
3866.717	-34.46	0.33	-34.13	-13	-21.13	Vertical
5998.208	-31.36	4.01	-27.35	-13	-14.35	Vertical
Channel 9800/1960MHz						
Frequency(MHz)	Power(dBm)	ARpl	P _{Mea} (dBm)	Limit (dBm)	Margin(dBm)	Polarity
3921.100	-31.21	0.33	-30.88	-13	-17.88	Horizontal
5883.219	-35.66	4.01	-31.65	-13	-18.65	Horizontal
3921.083	-27.64	0.33	-27.31	-13	-14.31	Vertical
5883.160	-35.74	4.01	-31.73	-13	-18.73	Vertical
Channel 9937/1987.4MHz						
Frequency(MHz)	Power(dBm)	ARpl	P _{Mea} (dBm)	Limit (dBm)	Margin(dBm)	Polarity
3975.176	-36.85	0.33	-36.52	-13	-23.52	Horizontal
5961.764	-38.56	4.01	-34.55	-13	-21.55	Horizontal
3975.216	-27.46	0.33	-27.13	-13	-14.13	Vertical
5961.742	-35.36	4.01	-31.35	-13	-18.35	Vertical

Note: Below 30MHZ no Spurious found and The RMC modes is the worst condition.



UMTS band IV

Channel 1313/1712.6MHz						
Frequency(MH)	Power(dBm)	ARpl	P _{Mea} (dBm)	Limit (dBm)	Margin(dBm)	Polarity
3425.179	-34.76	-4.65	-39.41	-13	-26.41	Horizontal
5137.757	-35.57	-2.21	-37.78	-13	-24.78	Horizontal
3425.147	-32.24	-4.65	-36.89	-13	-23.89	Vertical
5137.703	-31.68	-2.21	-33.89	-13	-20.89	Vertical
Channel 1450/1740MHz						
Frequency(MH)	Power(dBm)	ARpl	P _{Mea} (dBm)	Limit (dBm)	Margin(dBm)	Polarity
3479.909	-31.68	-4.65	-36.33	-13	-23.33	Horizontal
5219.907	-35.67	-2.21	-37.88	-13	-24.88	Horizontal
3479.962	-27.67	-4.65	-32.32	-13	-19.32	Vertical
5220.099	-35.46	-2.21	-37.67	-13	-24.67	Vertical
Channel 1512/1752.4MHz						
Frequency(MH)	Power(dBm)	ARpl	P _{Mea} (dBm)	Limit (dBm)	Margin(dBm)	Polarity
3504.776	-36.63	-4.65	-41.28	-13	-28.28	Horizontal
5257.162	-38.79	-2.21	-41	-13	-28	Horizontal
3504.760	-26.36	-4.65	-31.01	-13	-18.01	Vertical
5257.116	-35.75	-2.21	-37.96	-13	-24.96	Vertical

Note: Below 30MHZ no Spurious found and The RMC modes is the worst condition.



6. FREQUENCY STABILITY

6.1 MEASUREMENT METHOD

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Note: only result the worst condition of each test mode.

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
 2. Subject the EUT to overnight soak at -30°C.
 3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band, channel 190 for GSM 850 band and channel 4183 for UMTS band V measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
 4. Repeat the above measurements at 10°C increments from -20°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
 5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
 6. Subject the EUT to overnight soak at +50°C.
 7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
 8. Repeat the above measurements at 10°C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- .At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.



6.2 PROVISIONS APPLICABLE

6.2.1 FOR HAND CARRIED BATTERY POWERED EQUIPMENT

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.3VDC and 4.2VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

6.2.2 FOR EQUIPMENT POWERED BY PRIMARY SUPPLY VOLTAGE

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20oC.



6.3 MEASUREMENT RESULT

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20oC.

Frequency Error Against Voltage for GSM 850 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	-15	-0.018
3.7	18	0.022
4.2	24	0.029

Frequency Error Against Temperature for GSM 850 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	17	0.020
-20	-14	-0.017
-10	-31	-0.037
0	32	0.038
10	-18	-0.022
20	13	0.016
30	-25	-0.030
40	31	0.037
50	25	0.030

Frequency Error Against Voltage for GPRS850 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	-18	-0.022
3.7	27	0.032
4.2	24	0.029



Frequency Error Against Temperature for GPRS850 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-18	-0.022
-20	30	0.036
-10	-17	-0.020
0	-24	-0.029
10	-23	-0.028
20	-15	-0.018
30	-23	-0.028
40	21	0.025
50	17	0.020

Frequency Error Against Voltage for EDGE 850 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	20	0.024
3.7	24	0.029
4.2	31	0.037

Frequency Error Against Temperature for EDGE 850 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	25	0.030
-20	21	0.025
-10	16	0.019
0	30	0.036
10	-25	-0.030
20	-16	-0.019
30	22	0.026
40	27	0.032
50	16	0.019

Note: The EUT doesn't work below -30°C



Frequency Error Against Voltage for GSM1900 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	27	0.014
3.7	22	0.012
4.2	19	0.010

Frequency Error Against Temperature for GSM1900 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-17	-0.009
-20	-22	-0.012
-10	19	0.010
0	25	0.013
10	22	0.012
20	21	0.011
30	30	0.016
40	-18	-0.010
50	-28	-0.015

Frequency Error Against Voltage for GPRS1900 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	16	0.009
3.7	-18	-0.010
4.2	23	0.012

Frequency Error Against Temperature for GPRS1900 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-17	-0.009
-20	25	0.013
-10	-14	-0.007
0	27	0.014
10	21	0.011
20	24	0.013
30	16	0.009
40	27	0.014
50	28	0.015



Frequency Error Against Voltage for EDGE 1900 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	29	0.015
3.7	24	0.013
4.2	-14	-0.007

Frequency Error Against Temperature for EDGE 1900 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	13	0.007
-20	25	0.013
-10	15	0.008
0	27	0.014
10	31	0.016
20	22	0.012
30	-26	-0.014
40	16	0.009
50	-11	-0.006

Note: The EUT doesn't work below -30°C

Frequency Error Against Voltage for UMTS band V		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	14	0.017
3.7	16	0.019
4.2	-17	-0.020

Frequency Error Against Temperature for UMTS band V		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-13	-0.016
-20	-16	-0.019
-10	22	0.026
0	-18	-0.022
10	14	0.017
20	17	0.020
30	13	0.016
40	20	0.024
50	15	0.018

Note: The EUT doesn't work below -30°C



Frequency Error Against Voltage for UMTS band II		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	21	0.011
3.7	27	0.014
4.2	-18	-0.010

Frequency Error Against Temperature for UMTS band II		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-15	-0.018
-20	23	0.028
-10	27	0.032
0	-13	-0.016
10	26	0.031
20	17	0.020
30	12	0.014
40	-21	-0.025
50	26	0.031

Note: The EUT doesn't work below -30°C

Frequency Error Against Voltage for UMTS band IV		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	21	0.025
3.7	15	0.018
4.2	-17	-0.020

Frequency Error Against Temperature for UMTS band IV		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-15	-0.018
-20	-18	-0.022
-10	21	0.025
0	-15	-0.018
10	17	0.020
20	13	0.016
30	16	0.019
40	26	0.031
50	17	0.020

Note: The EUT doesn't work below -30°C



7. OCCUPIED BANDWIDTH

7.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

7.2 PROVISIONS APPLICABLE

Limits applicated report test result only.

7.3 MEASUREMENT RESULT

Occupied Bandwidth (99%) for GSM 850 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	824.2	251.652
Middle Channel	836.6	245.216
High Channel	848.8	244.881
Occupied Bandwidth (99%) for GPRS 850 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	824.2	252.763
Middle Channel	836.6	243.978
High Channel	848.8	255.138
Occupied Bandwidth (99%) for EDGE 850 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	824.2	243.915
Middle Channel	836.6	247.785
High Channel	848.8	239.570



Occupied Bandwidth (99%) for GSM1900 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	1850.2	245.430
Middle Channel	1880.0	254.316
High Channel	1909.8	240.449
Occupied Bandwidth (99%) for GPRS1900 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	1850.2	249.764
Middle Channel	1880.0	243.347
High Channel	1909.8	255.377
Occupied Bandwidth (99%) for EDGE 1900 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	1850.2	240.880
Middle Channel	1880.0	235.590
High Channel	1909.8	242.772
Occupied Bandwidth (99%) for UMTS band V		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
Low Channel	826.4	4.227
Middle Channel	836.6	4.241
High Channel	846.6	4.226
Occupied Bandwidth (99%) for UMTS HSDPA band V		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
Low Channel	826.4	4.224
Middle Channel	836.6	4.233
High Channel	846.6	4.228
Occupied Bandwidth (99%) for UMTS HSUPA band V		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
Low Channel	826.4	4.234
Middle Channel	836.6	4.220
High Channel	846.6	4.215



Occupied Bandwidth (99%) for UMTS band II		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
Low Channel	1852.4	4.242
Middle Channel	1880	4.233
High Channel	1907.6	4.223
Occupied Bandwidth (99%) for UMTS HSDPA band II		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
Low Channel	1852.4	4.236
Middle Channel	1880	4.219
High Channel	1907.6	4.237
Occupied Bandwidth (99%) for UMTS HSUPA band II		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
Low Channel	1852.4	4.234
Middle Channel	1880	4.217
High Channel	1907.6	4.239

Occupied Bandwidth (99%) for UMTS band IV		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
Low Channel	1712.6	4.225
Middle Channel	1740	4.245
High Channel	1752.4	4.223
Occupied Bandwidth (99%) for UMTS HSDPA band IV		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
Low Channel	1712.6	4.214
Middle Channel	1740	4.236
High Channel	1752.4	4.216
Occupied Bandwidth (99%) for UMTS HSUPA band IV		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
Low Channel	1712.6	4.229
Middle Channel	1740	4.231
High Channel	1752.4	4.222



8. EMISSION BANDWIDTH

8.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

8.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

8.3 MEASUREMENT RESULT

Emission Bandwidth (-26dBc) for GSM850 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	824.2	316.702
Middle Channel	836.6	314.271
High Channel	848.8	318.700
Emission Bandwidth (-26dBc) for GPRS850 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	824.2	318.842
Middle Channel	836.6	310.585
High Channel	848.8	312.156
Emission Bandwidth (-26dBc) for EDGE 850 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	824.2	312.781
Middle Channel	836.6	313.280
High Channel	848.8	309.659



Emission Bandwidth (-26dBc) for GSM1900 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	1850.2	317.761
Middle Channel	1880.0	321.351
High Channel	1909.8	321.871
Emission Bandwidth (-26dBc) for GPRS1900 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	1850.2	313.139
Middle Channel	1880.0	322.242
High Channel	1909.8	324.614
Emission Bandwidth (-26dBc) for EDGE 1900 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	1850.2	310.634
Middle Channel	1880.0	314.360
High Channel	1909.8	297.133

Emission Bandwidth (-26dBc) for UMTS band V		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)
Low Channel	826.4	4.898
Middle Channel	836.6	4.906
High Channel	846.6	4.911
Emission Bandwidth (-26dBc) for UMTS HSDPA band V		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)
Low Channel	826.4	4.897
Middle Channel	836.6	4.908
High Channel	846.6	4.876
Emission Bandwidth (-26dBc) for UMTS HSUPA band V		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)
Low Channel	826.4	4.894
Middle Channel	836.6	4.894
High Channel	846.6	4.870



Emission Bandwidth (-26dBc) for UMTS band II		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)
Low Channel	1852.4	4.903
Middle Channel	1880	4.894
High Channel	1907.6	4.881
Emission Bandwidth (-26dBc) for UMTS HSDPA band II		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)
Low Channel	1852.4	4.904
Middle Channel	1880	4.923
High Channel	1907.6	4.886
Emission Bandwidth (-26dBc) for UMTS HSUPA band II		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)
Low Channel	1852.4	4.905
Middle Channel	1880	4.896
High Channel	1907.6	4.878

Emission Bandwidth (-26dBc) for UMTS band IV		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)
Low Channel	1712.6	4.903
Middle Channel	1740	4.925
High Channel	1752.4	4.902
Emission Bandwidth (-26dBc) for UMTS HSDPA band IV		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)
Low Channel	1712.6	4.859
Middle Channel	1740	4.906
High Channel	1752.4	4.868
Emission Bandwidth (-26dBc) for UMTS HSUPA band IV		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)
Low Channel	1712.6	4.855
Middle Channel	1740	4.899
High Channel	1752.4	4.887



9. BAND EDGE

9.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

9.2 PROVISIONS APPLICABLE

as Specified in FCC rules of 22.917(b) and 24.238(b)

9.3 MEASUREMENT RESULT

Please refers to Appendix III for compliance test plots for band edges






APPENDIX I


TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

CONDUCTED EMISSION IN GSM 850 BAND

Conducted Emission Transmitting Mode CH 128 30MHz – 9GHz

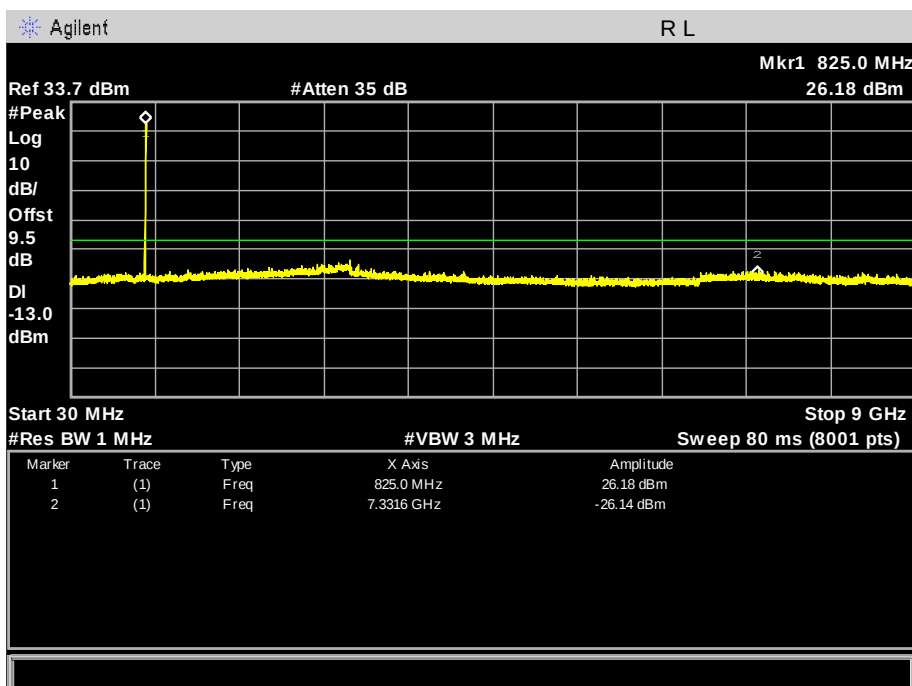


Conducted Emission Transmitting Mode CH 190 30MHz – 9GHz

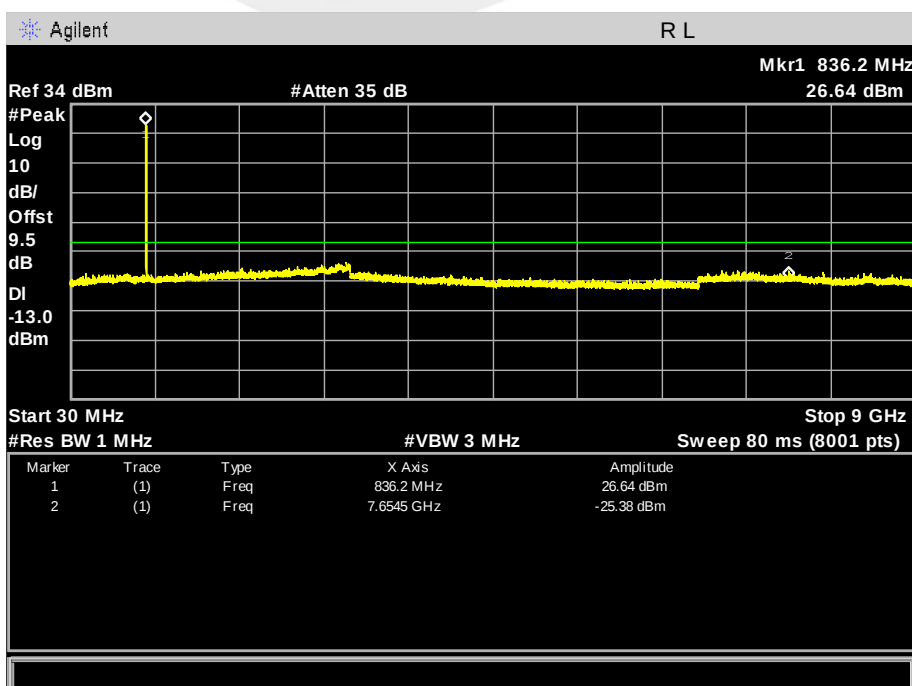




Conducted Emission Transmitting Mode CH 251 30MHz – 9GHz

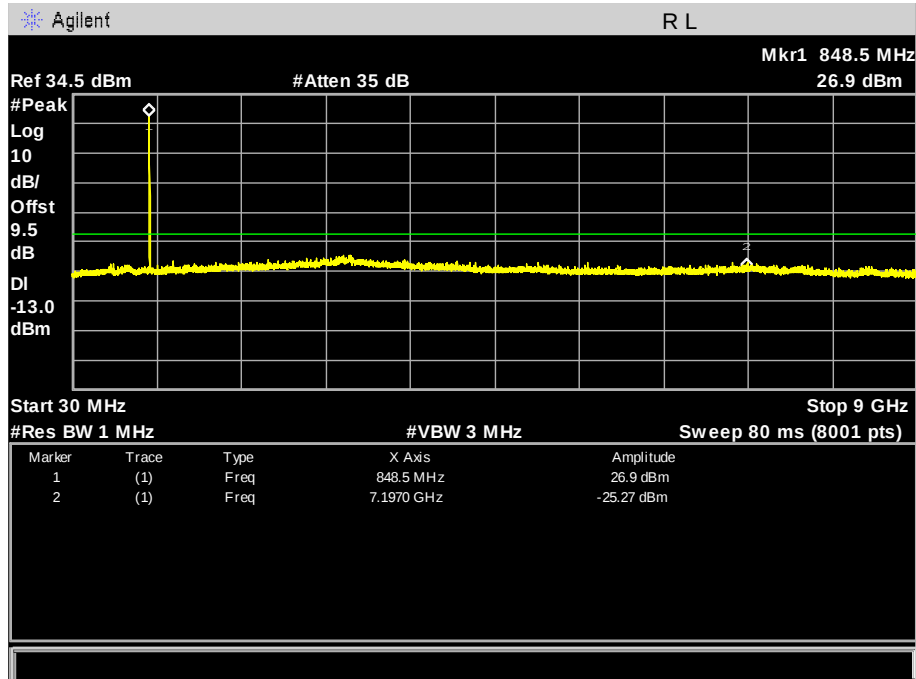




CONDUCTED EMISSION IN GPRS 850 BAND

Conducted Emission Transmitting Mode CH 128 30MHz – 9GHz

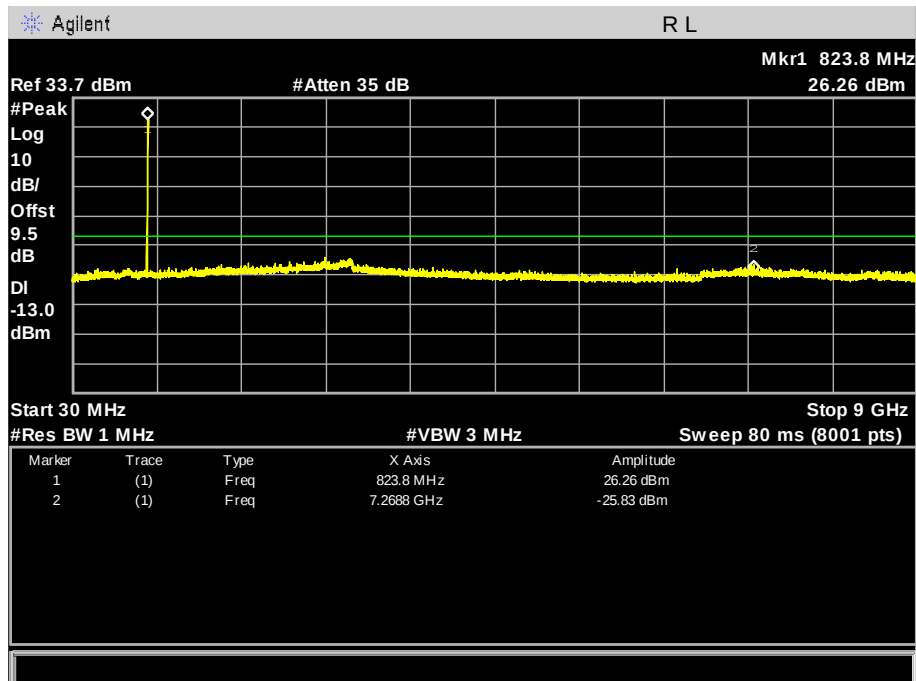


Conducted Emission Transmitting Mode CH 190 30MHz – 9GHz

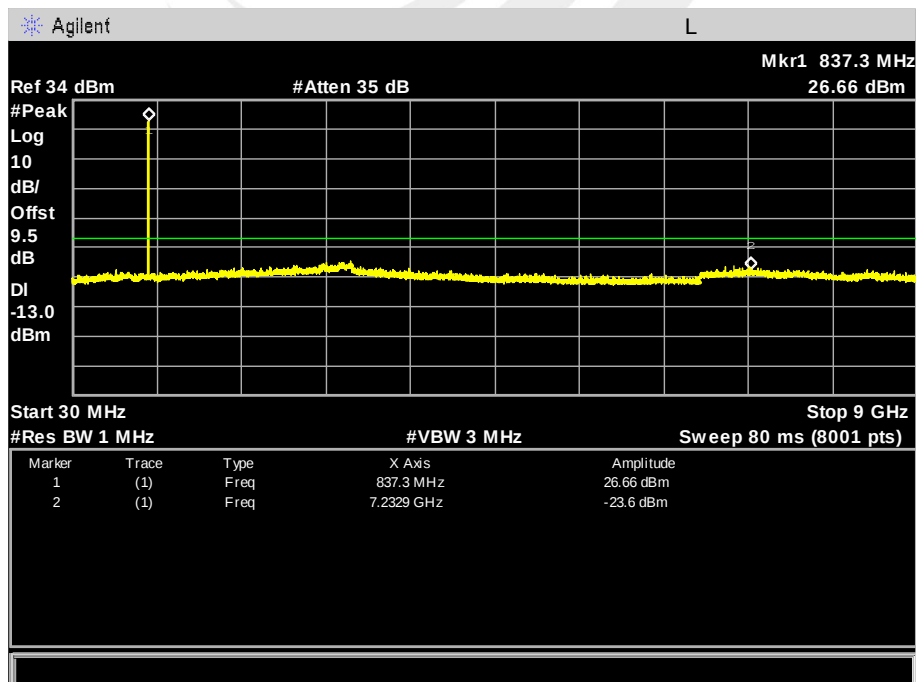




Conducted Emission Transmitting Mode CH 251 30MHz – 9GHz

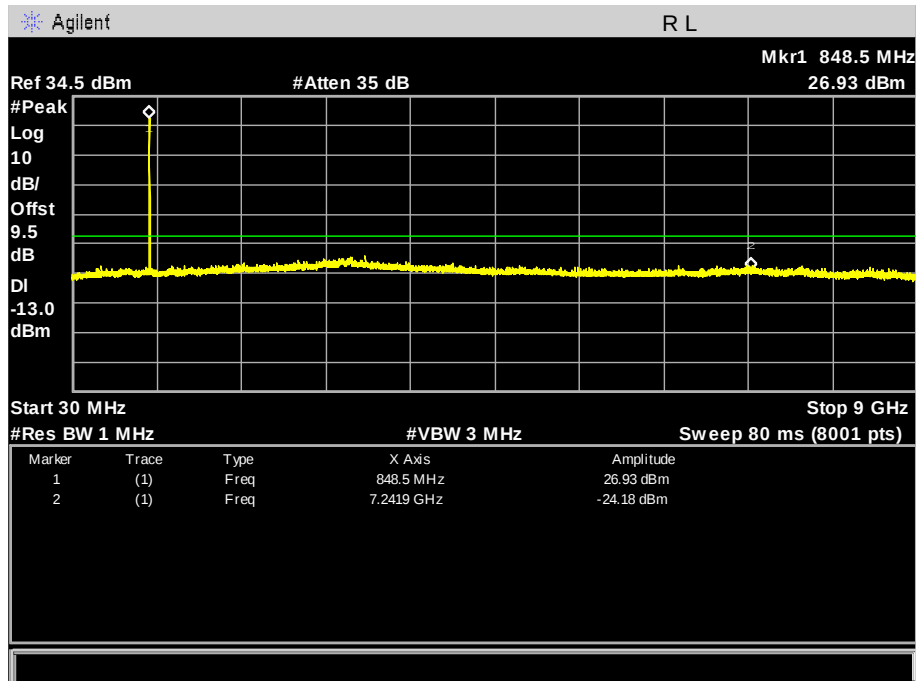




CONDUCTED EMISSION IN EDGE 850 BAND

Conducted Emission Transmitting Mode CH 128 30MHz – 9GHz

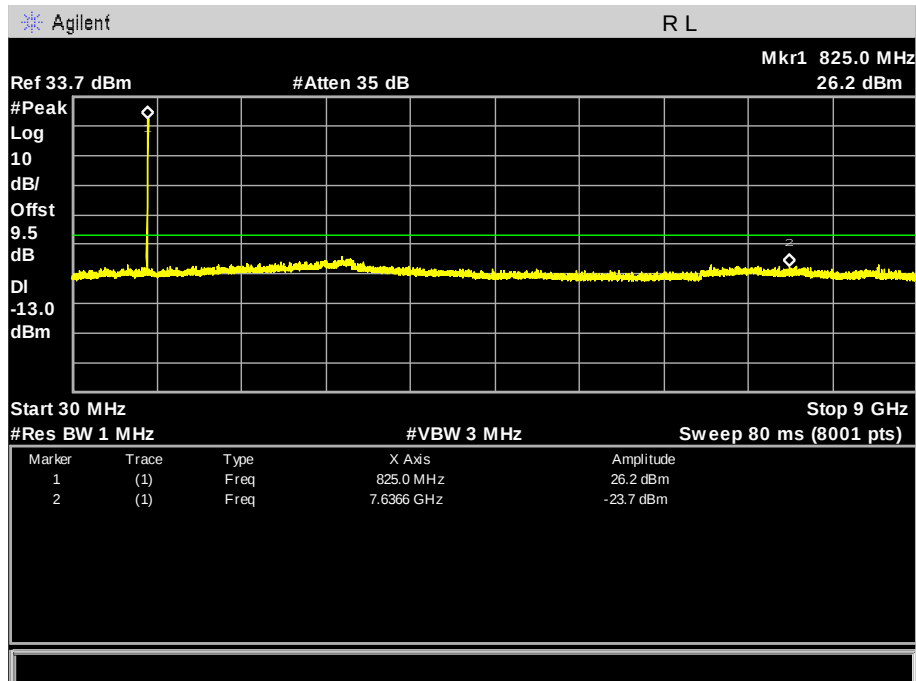


Conducted Emission Transmitting Mode CH 190 30MHz – 9GHz

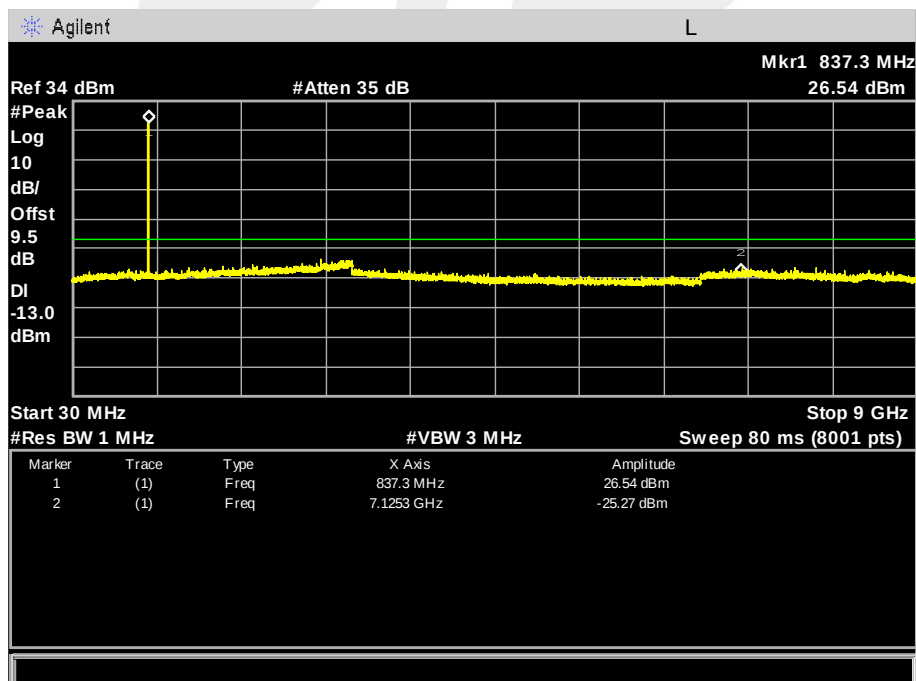





Conducted Emission Transmitting Mode CH 251 30MHz – 9GHz

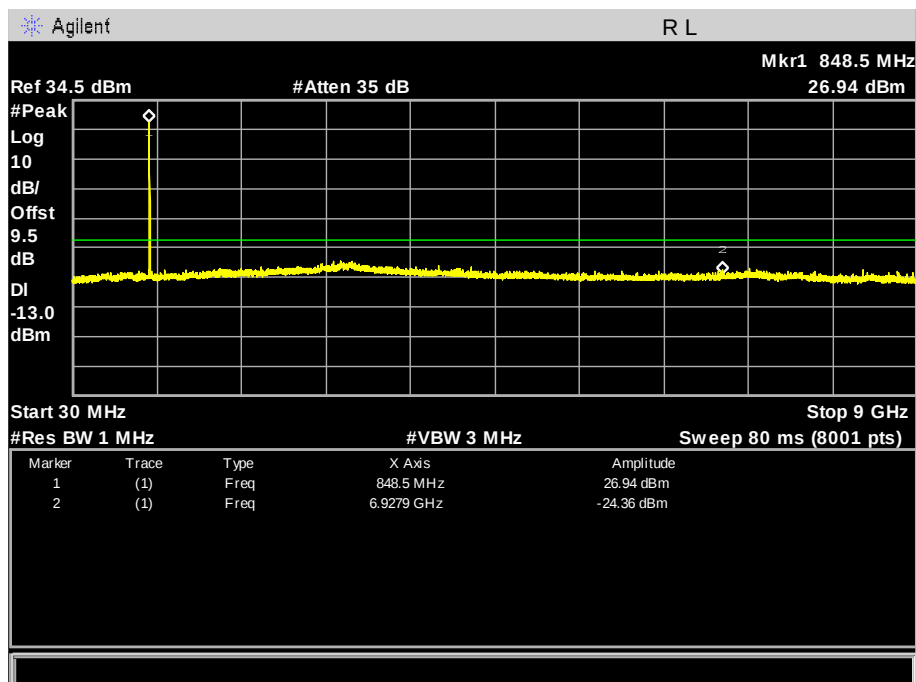





CONDUCTED EMISSION IN GSM1900 BAND

Conducted Emission Transmitting Mode CH 512 30MHz – 20GHz

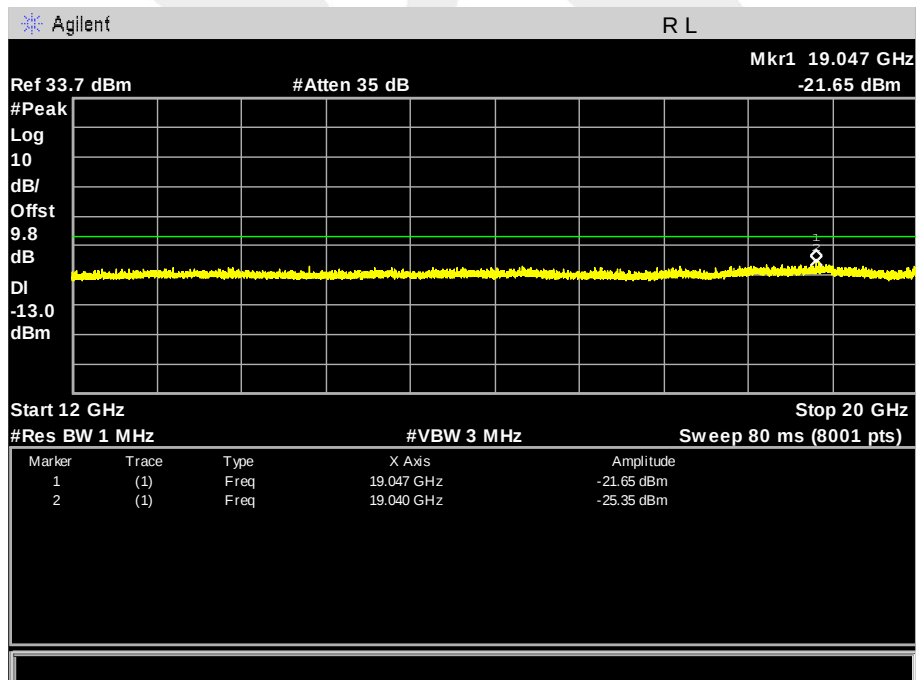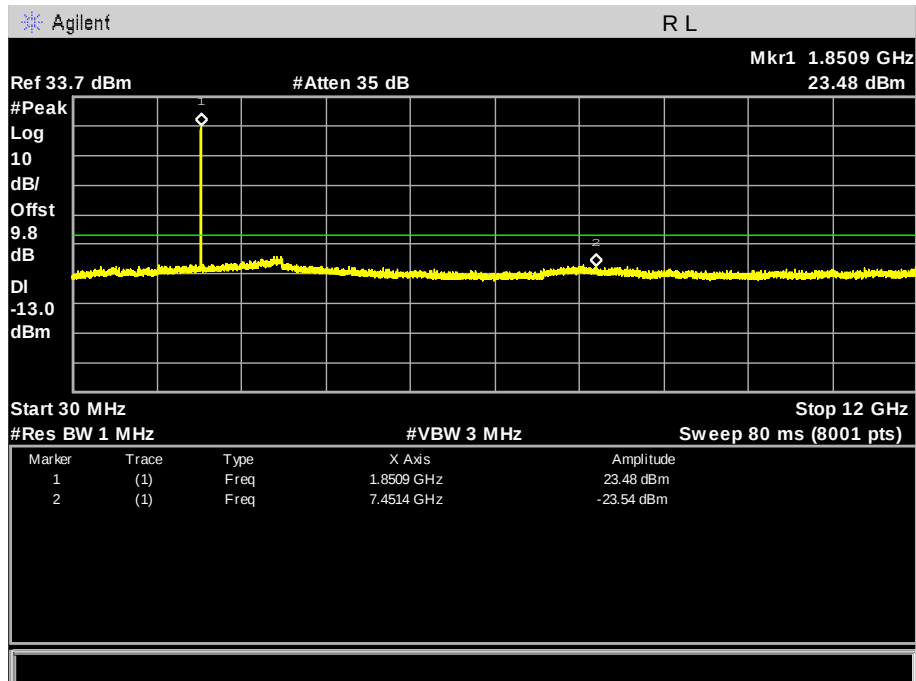





Conducted Emission Transmitting Mode CH 661 30MHz – 20GHz

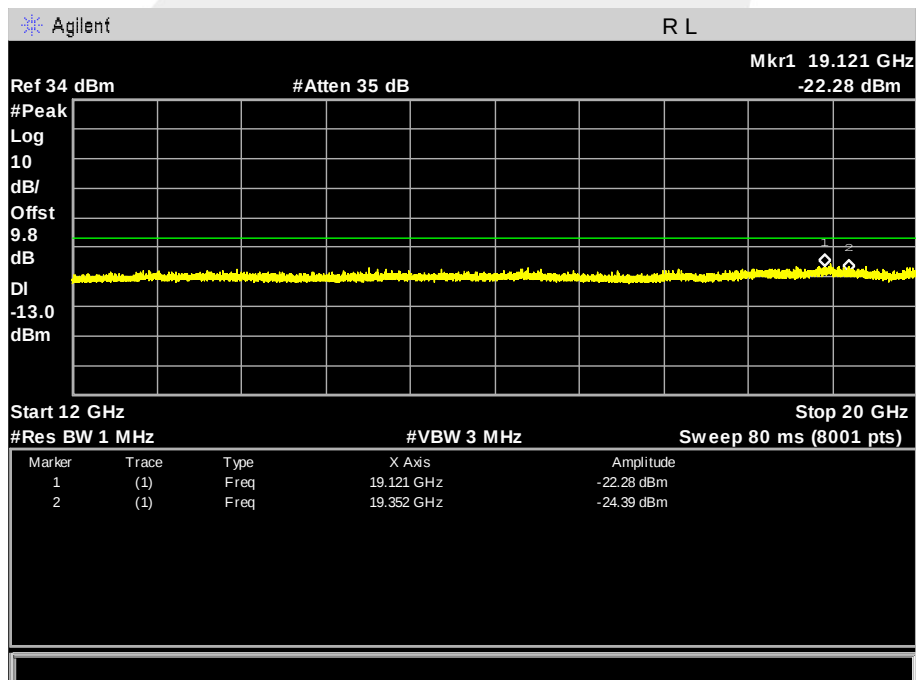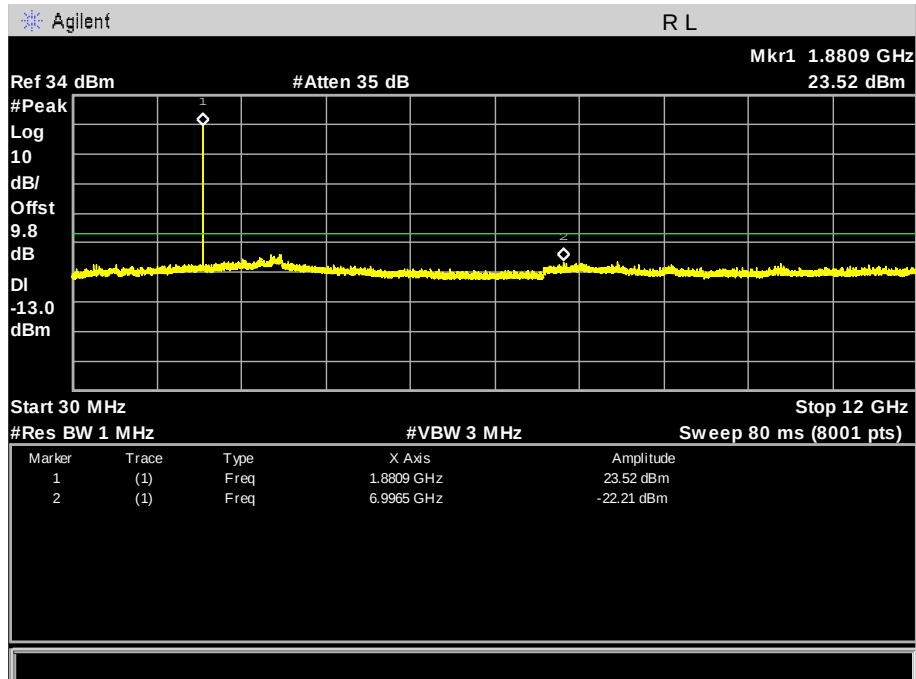





Conducted Emission Transmitting Mode CH 810 30MHz – 20GHz

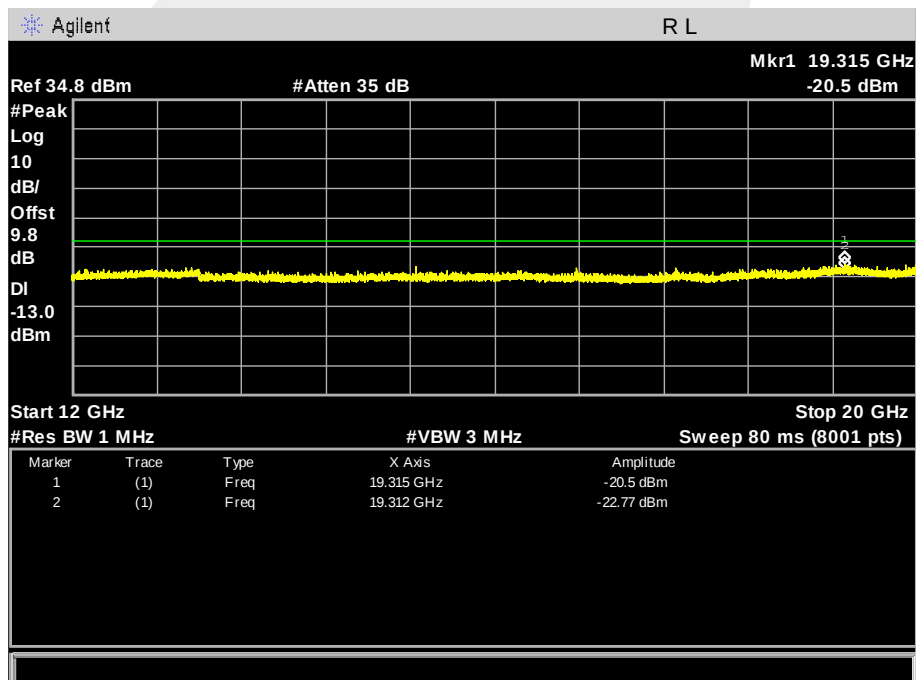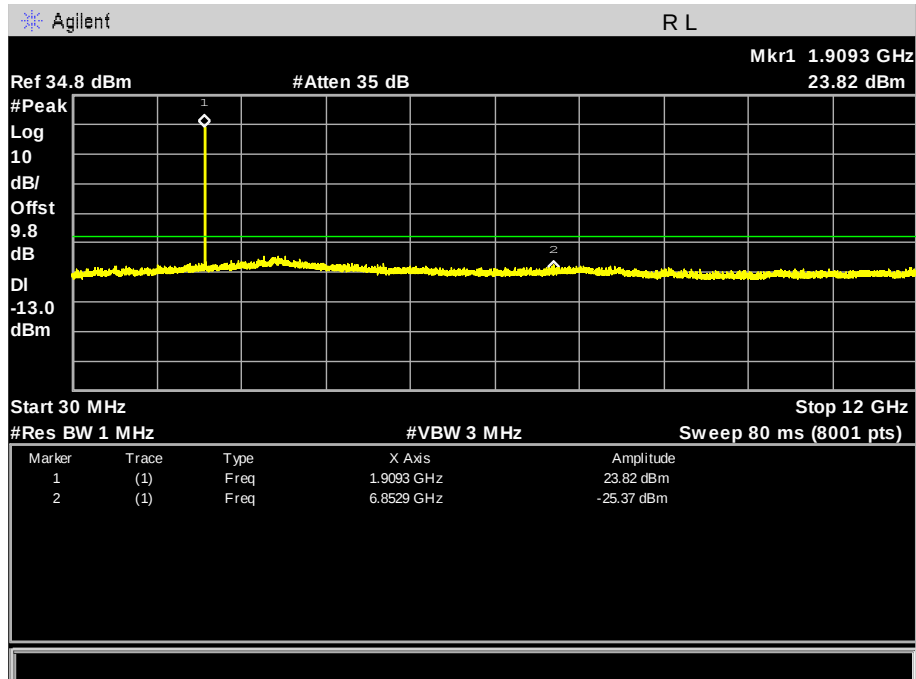





CONDUCTED EMISSION IN GPRS1900 BAND

Conducted Emission Transmitting Mode CH 512 30MHz – 20GHz

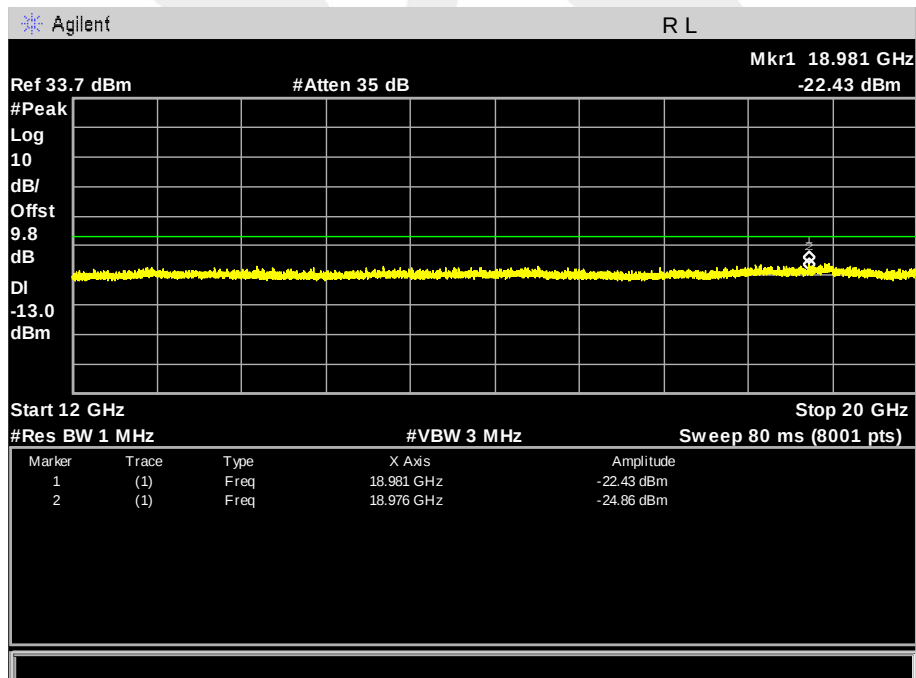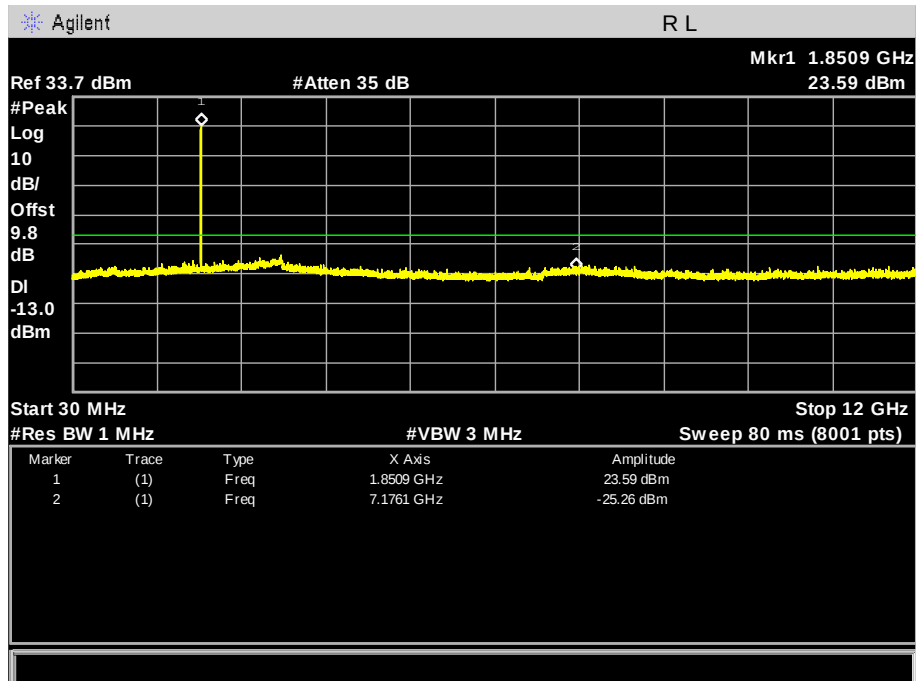





Conducted Emission Transmitting Mode CH 661 30MHz – 20GHz

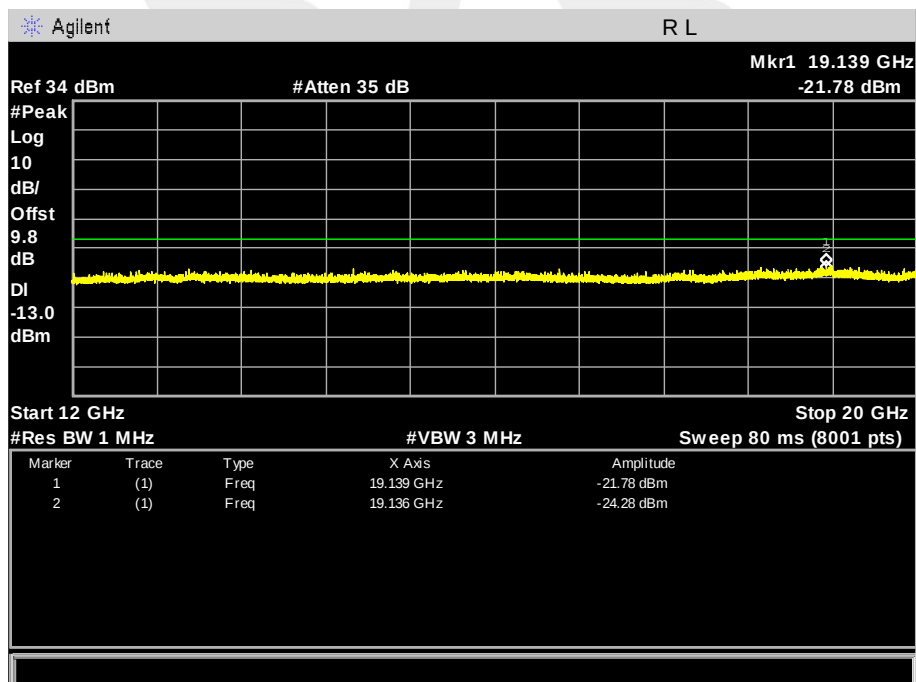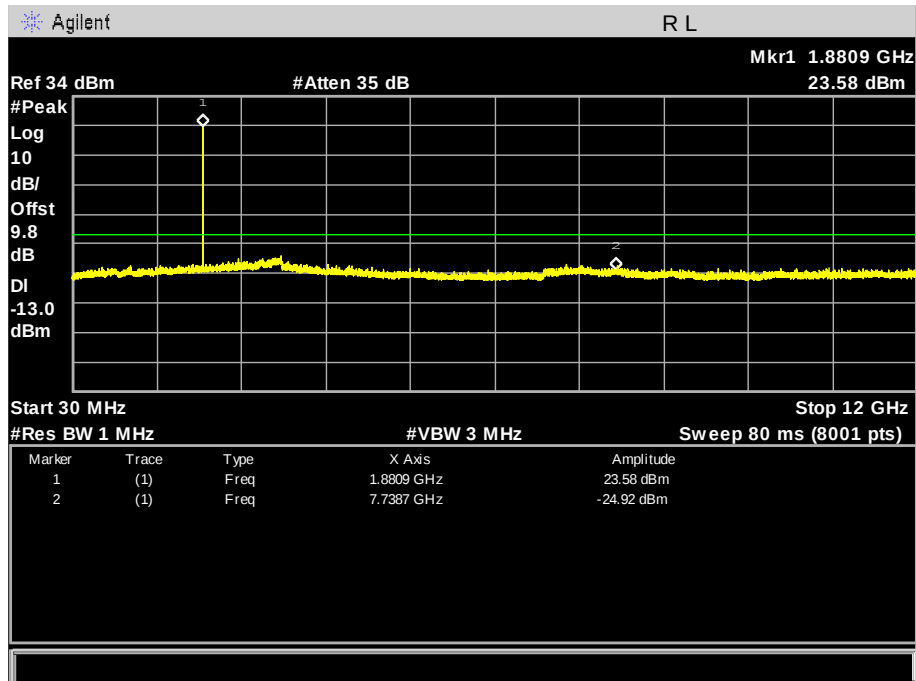





Conducted Emission Transmitting Mode CH 810 30MHz – 20GHz

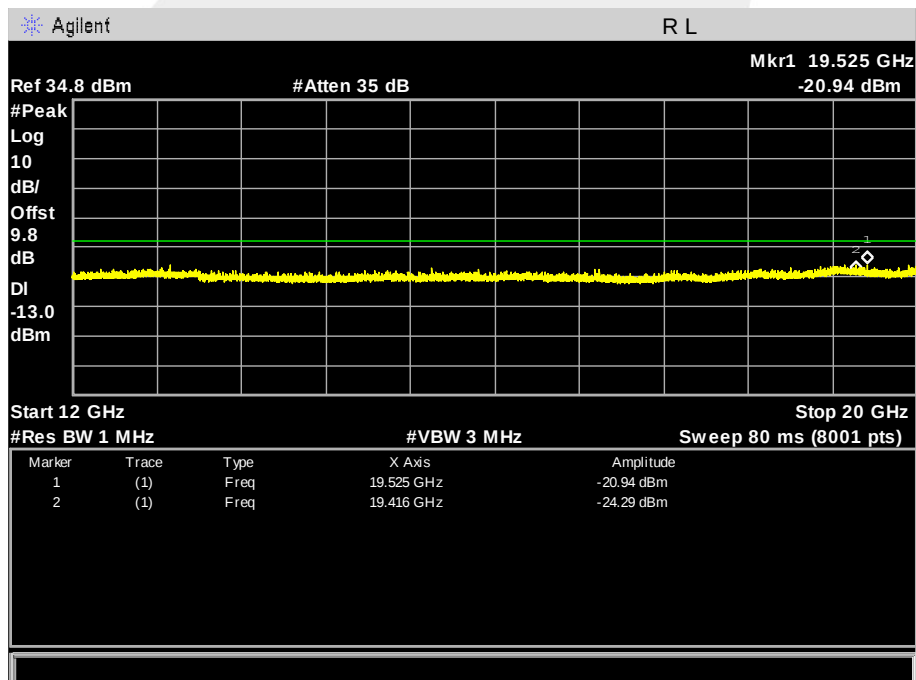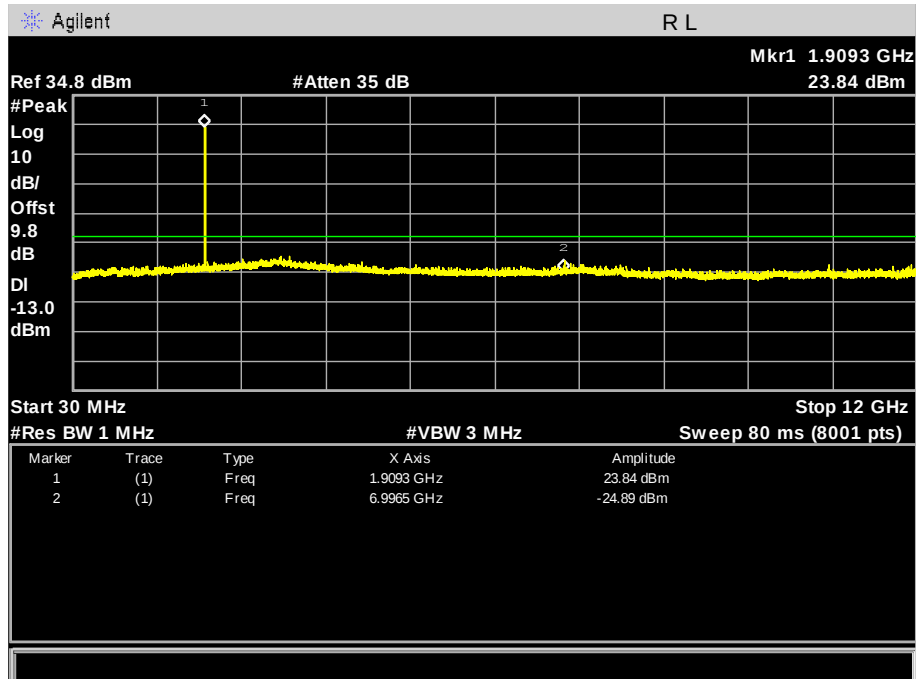





CONDUCTED EMISSION IN EDGE 1900 BAND

Conducted Emission Transmitting Mode CH 512 30MHz – 20GHz

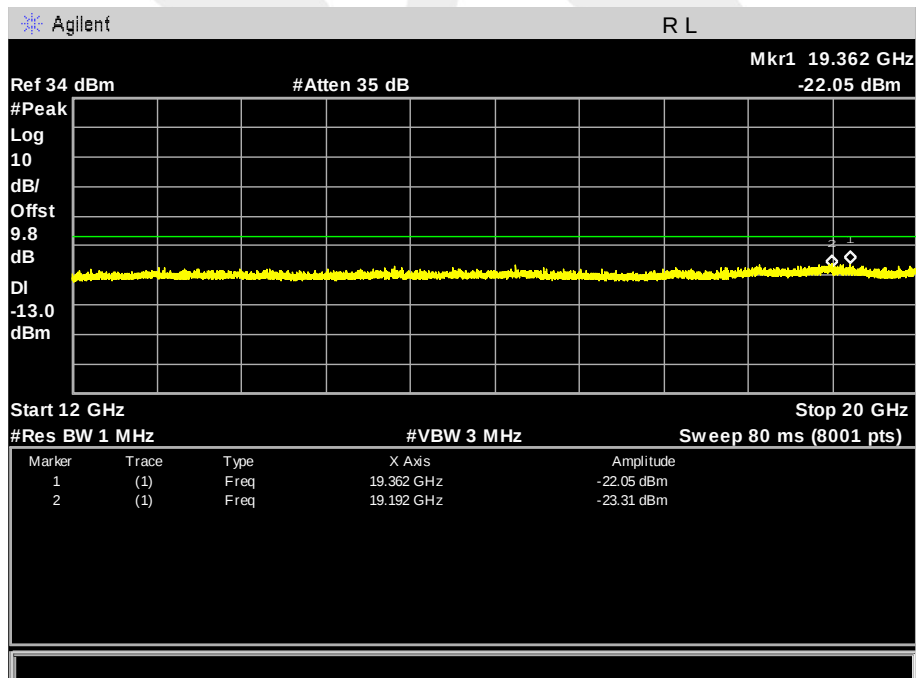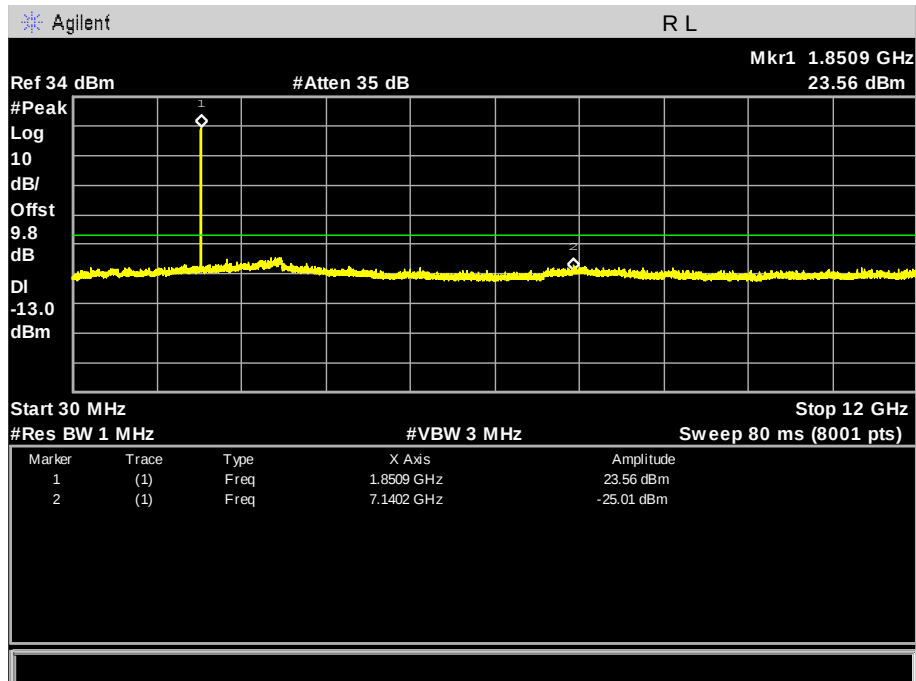





Conducted Emission Transmitting Mode CH 661 30MHz – 20GHz

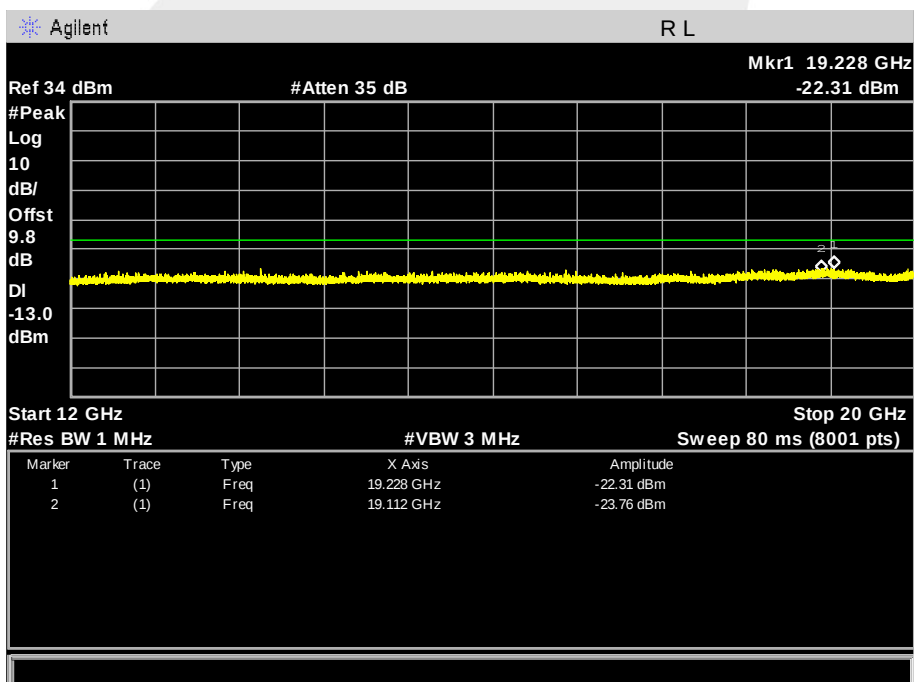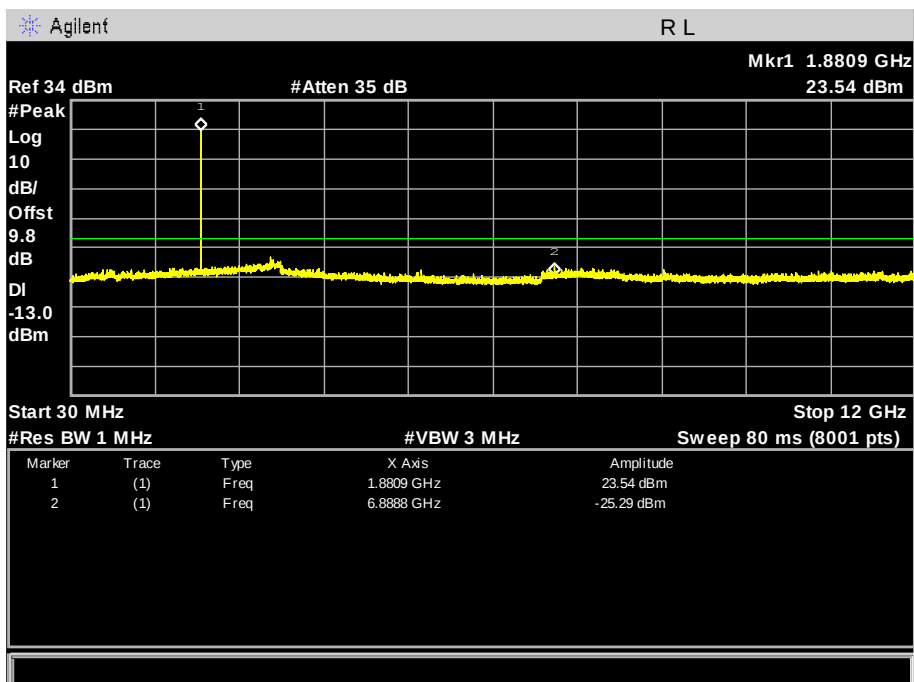




Conducted Emission Transmitting Mode CH 810 30MHz – 20GHz

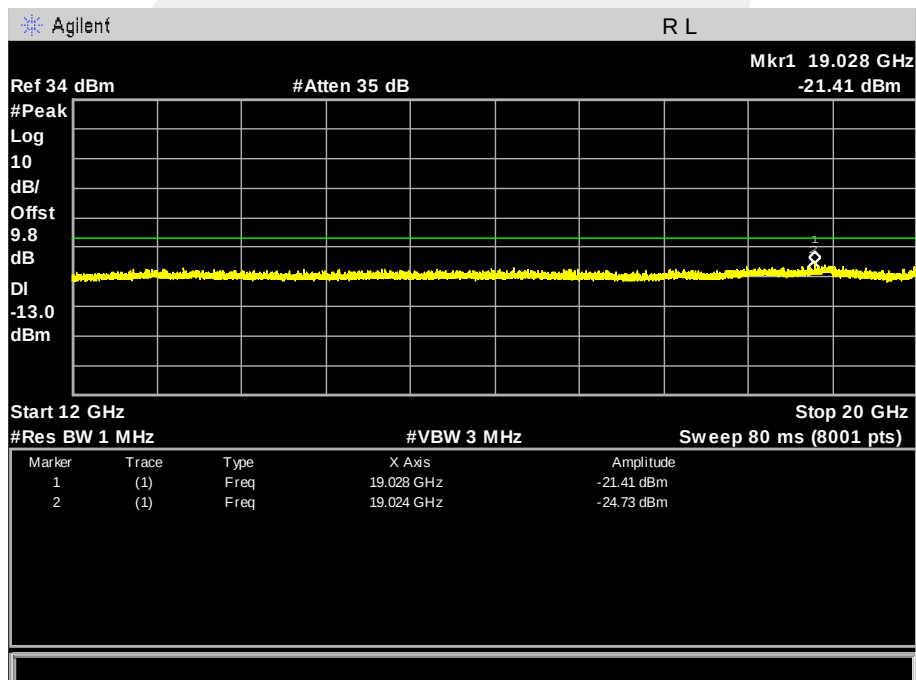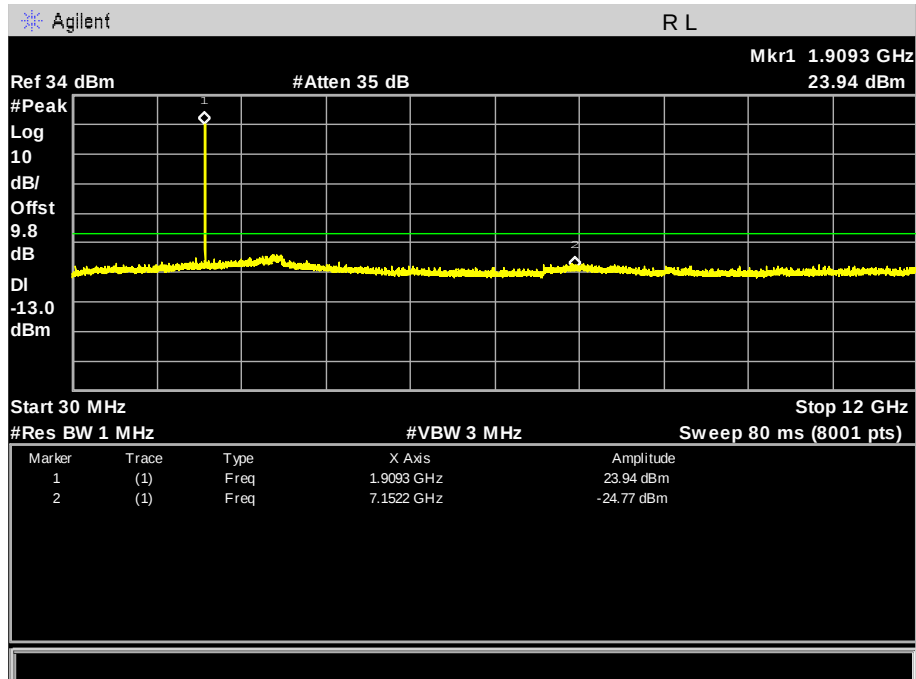




CONDUCTED EMISSION IN UMTS band V

Conducted Emission Transmitting Mode 4132 30MHz – 9GHz

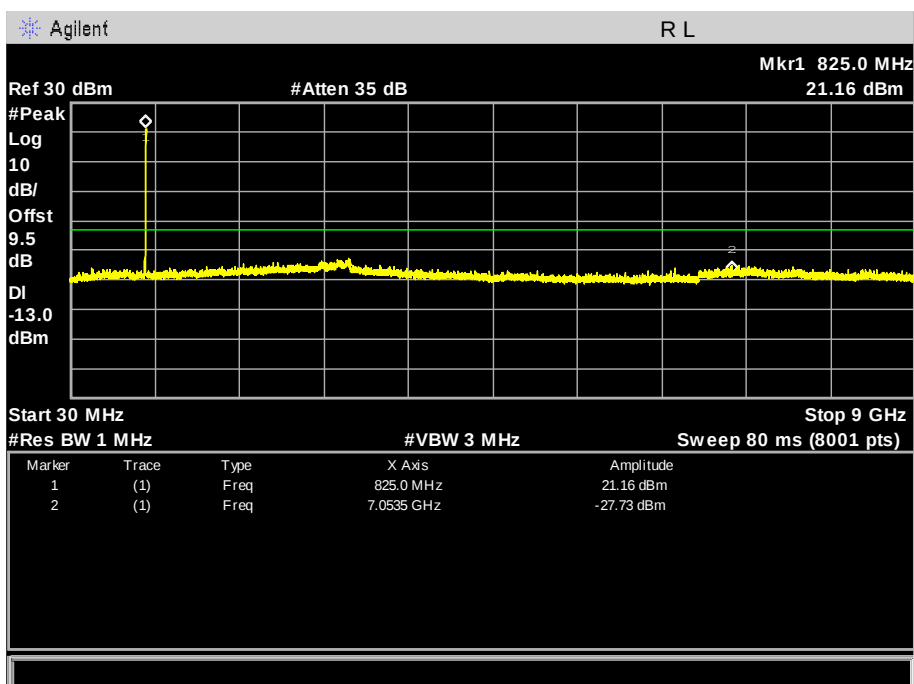


Conducted Emission Transmitting Mode CH 4183 30MHz – 9GHz

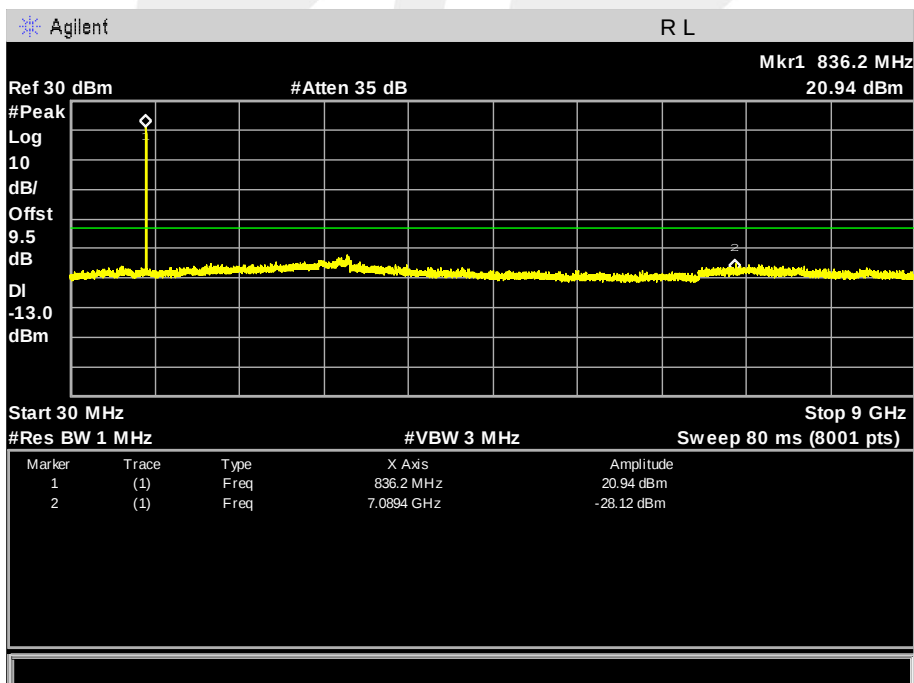




Conducted Emission Transmitting Mode CH 4233 30MHz – 9GHz

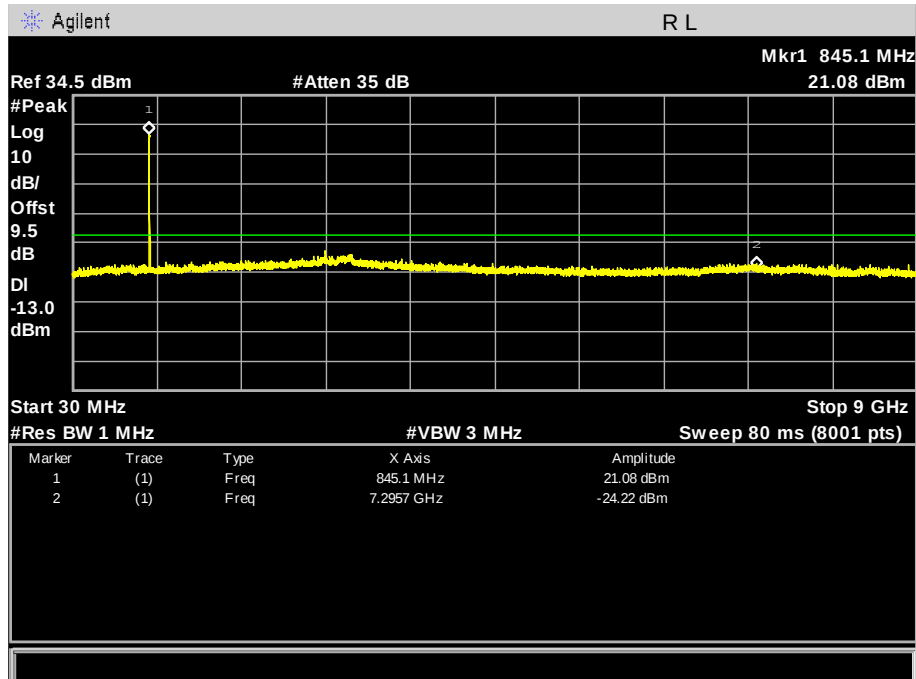




CONDUCTED EMISSION IN UMTS HSDPA band V

Conducted Emission Transmitting Mode CH 4132 30MHz – 9GHz

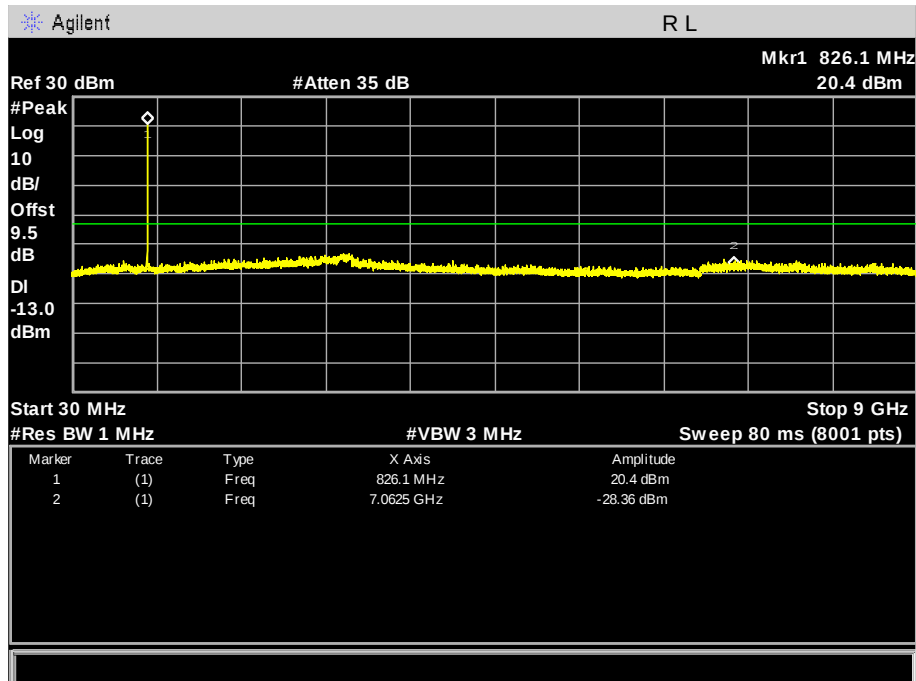


Conducted Emission Transmitting Mode CH 4132 30MHz – 9GHz

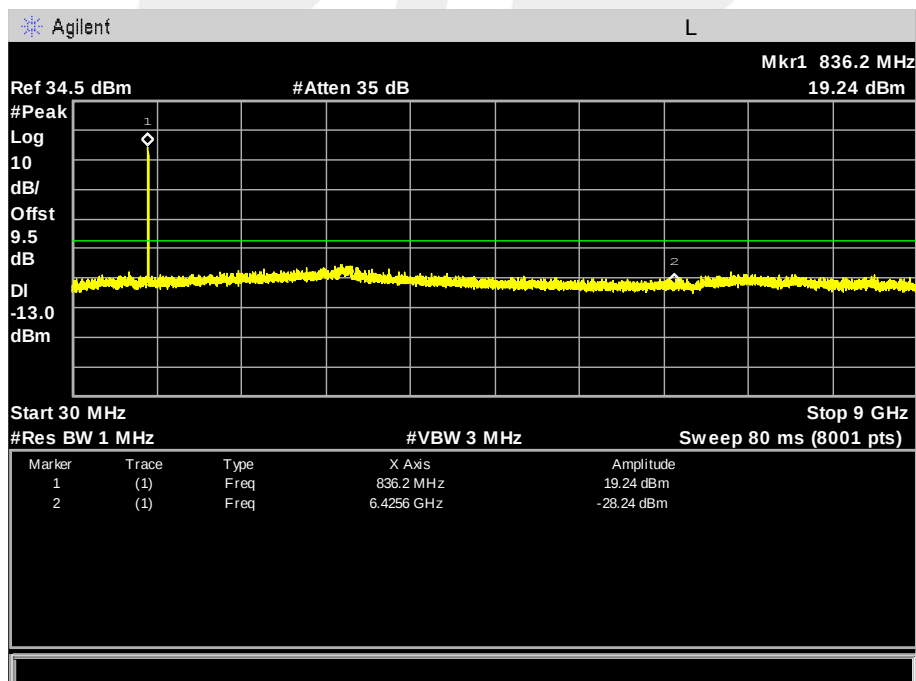




Conducted Emission Transmitting Mode CH 4233 30MHz – 9GHz

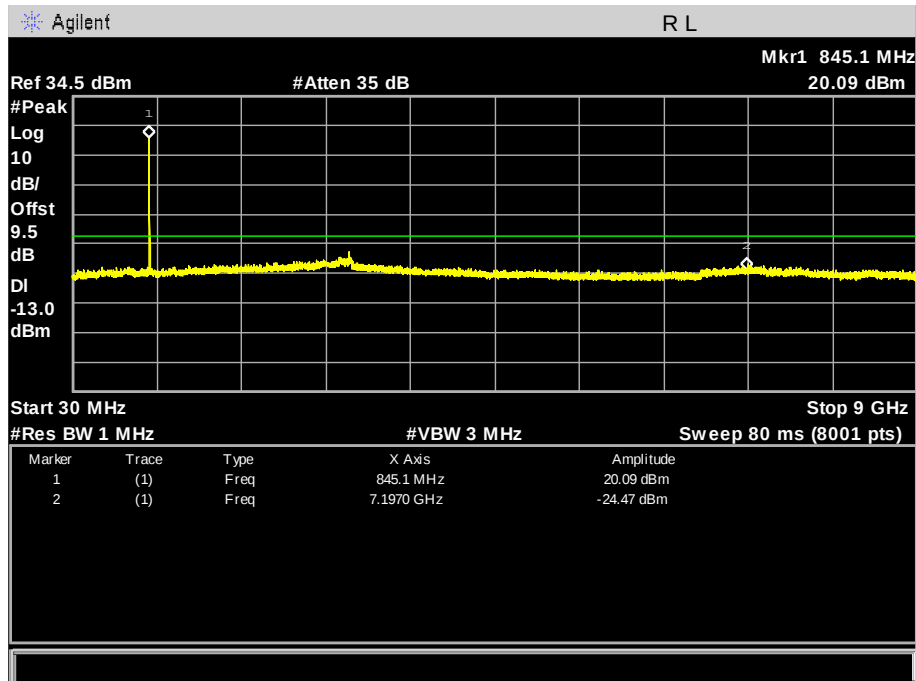




CONDUCTED EMISSION IN UMTS HSUPA band V

Conducted Emission Transmitting Mode CH 4132 30MHz – 9GHz

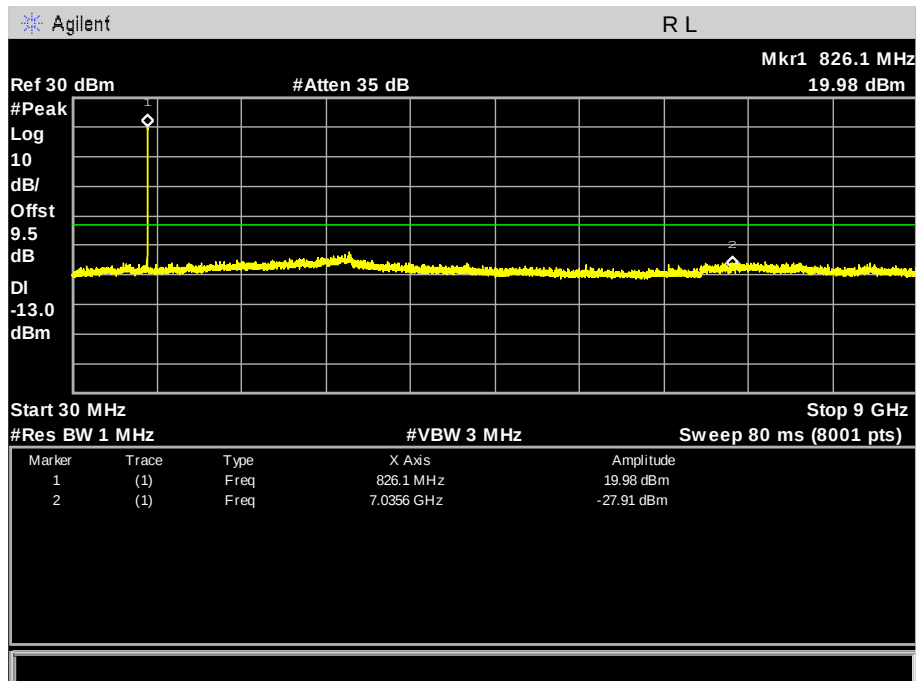


Conducted Emission Transmitting Mode CH 4183 30MHz – 9GHz

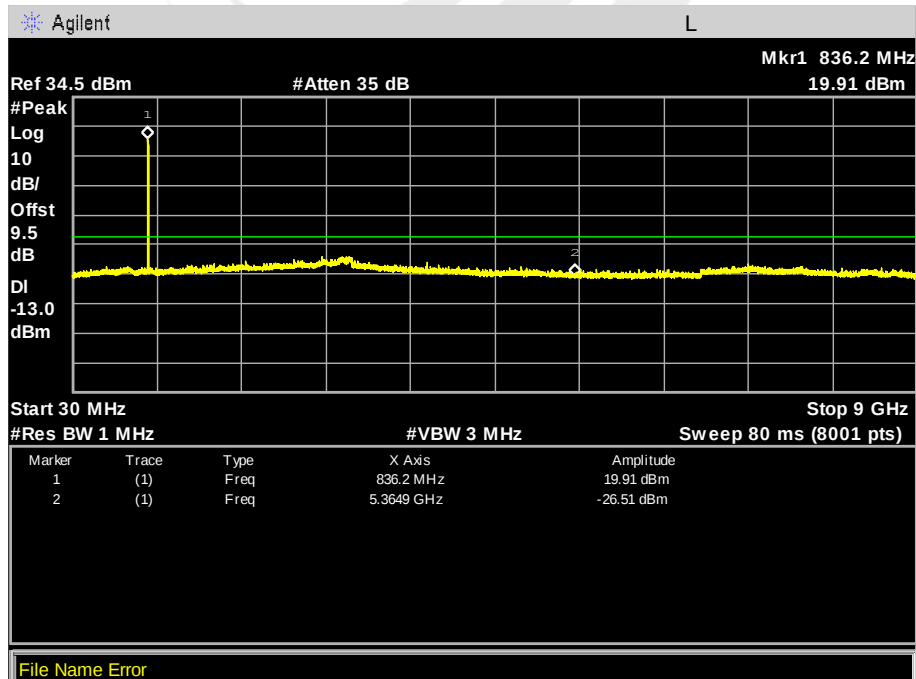





Conducted Emission Transmitting Mode CH 4233 30MHz – 9GHz

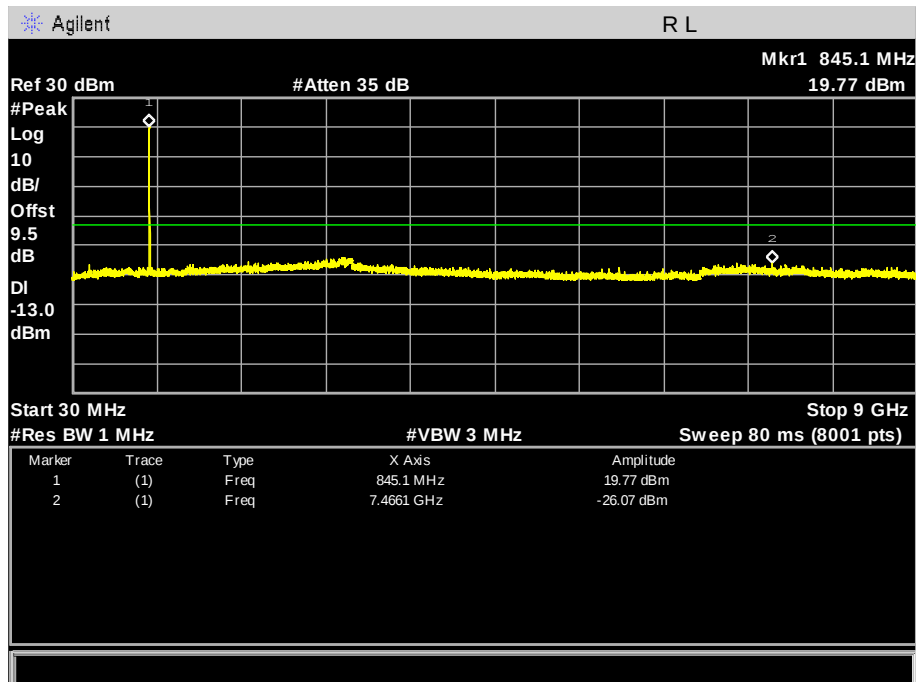





CONDUCTED EMISSION IN UMTS band II

Conducted Emission Transmitting Mode 9262 30MHz – 20GHz

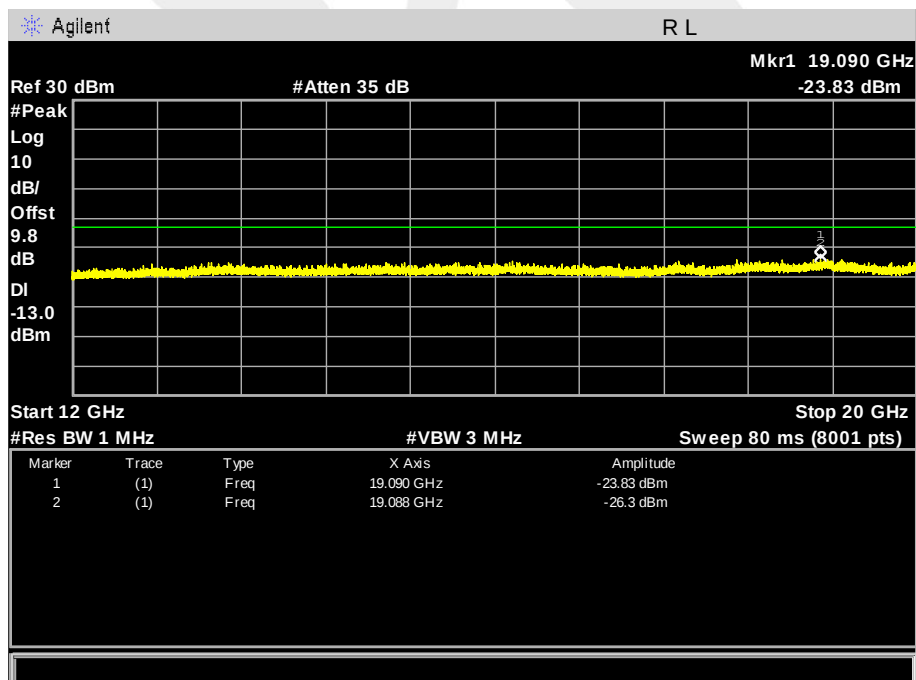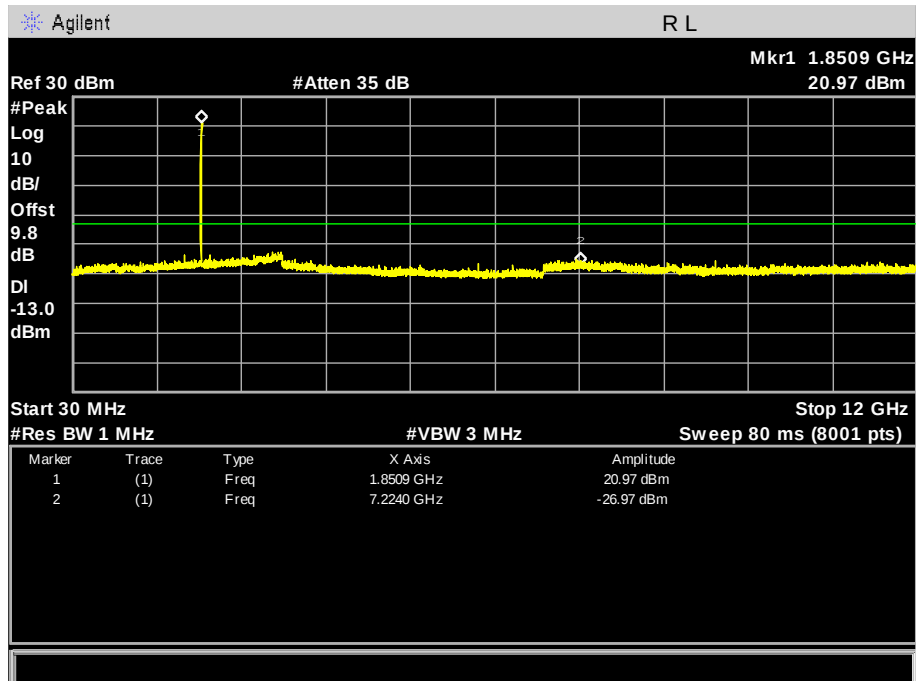





Conducted Emission Transmitting Mode CH 9400 30MHz – 20GHz

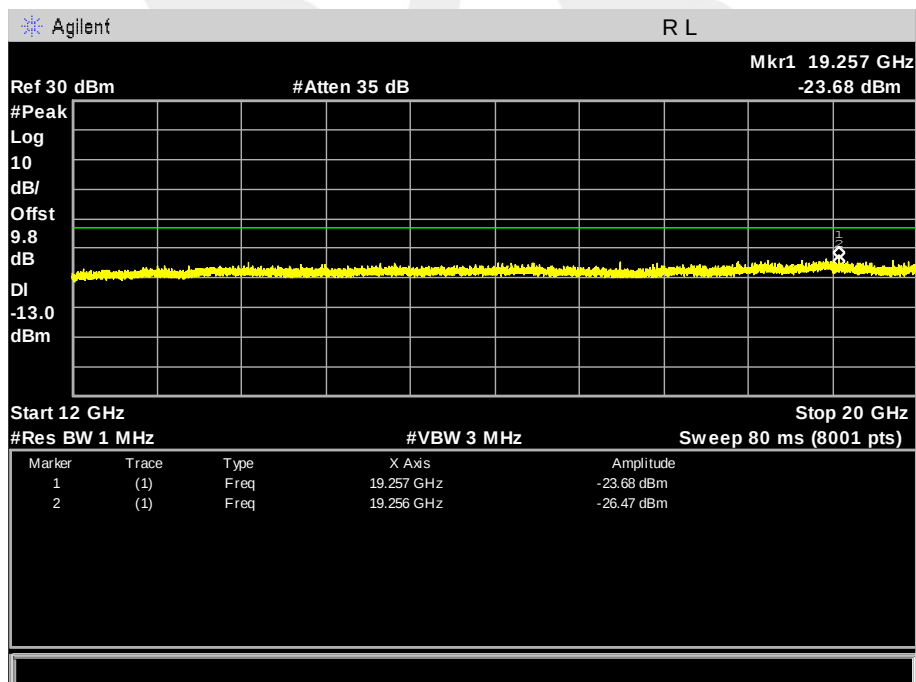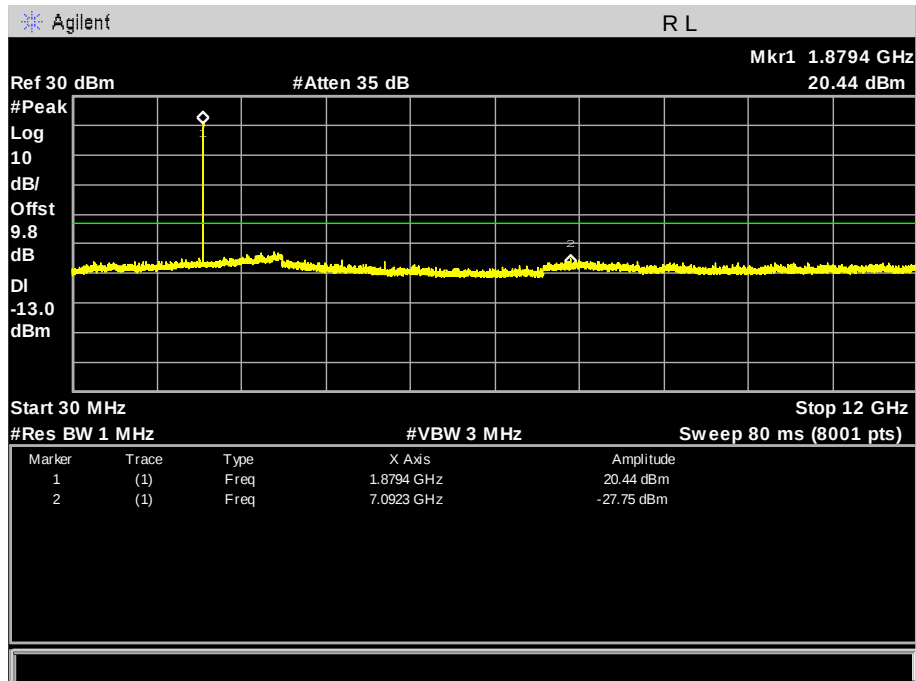





Conducted Emission Transmitting Mode CH 9538 30MHz – 20GHz

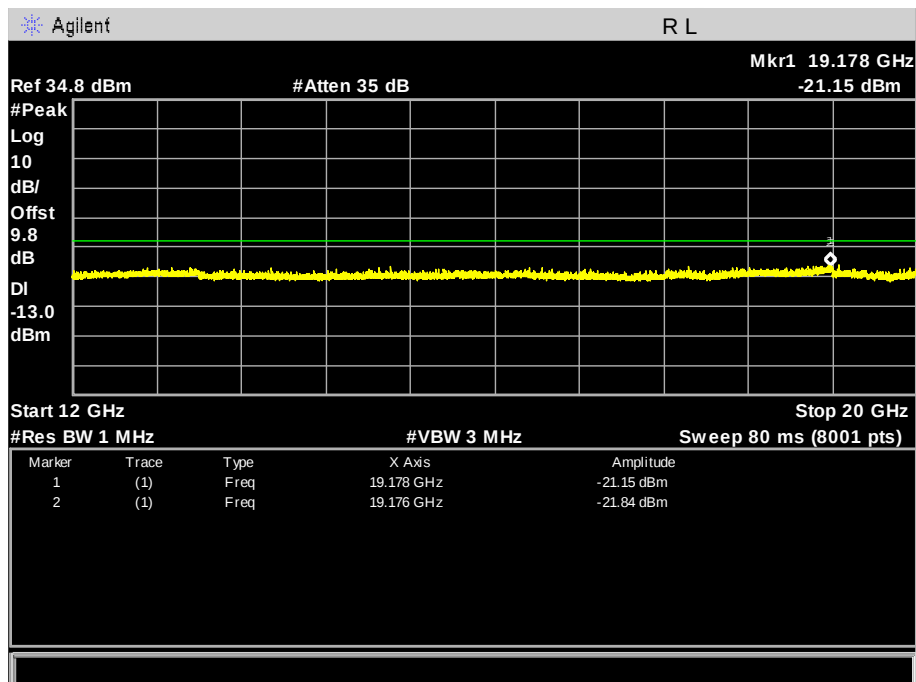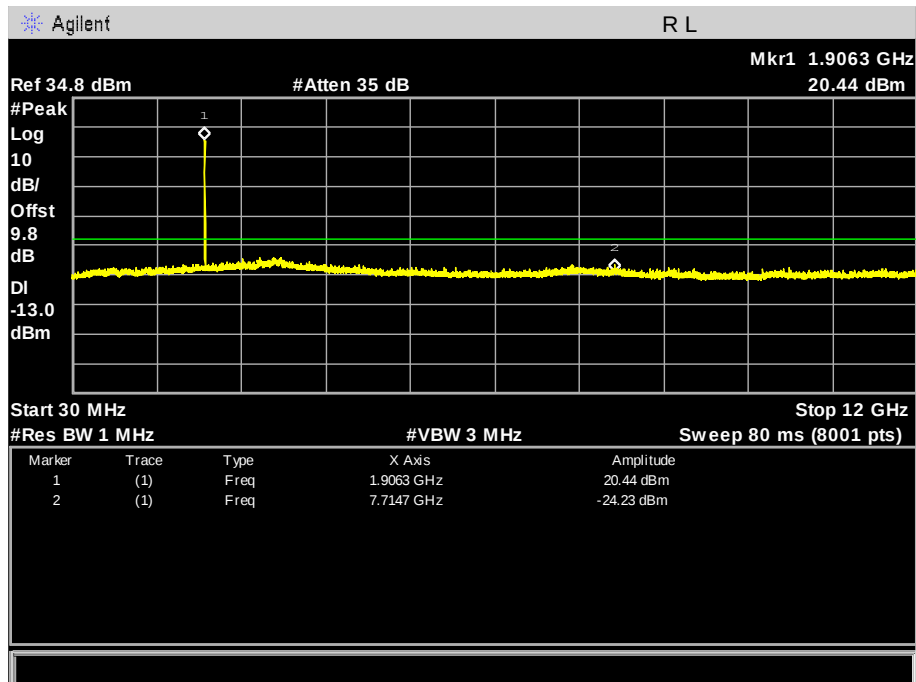





CONDUCTED EMISSION IN UMTS HSDPA band II

Conducted Emission Transmitting Mode CH 9262 30MHz – 20GHz

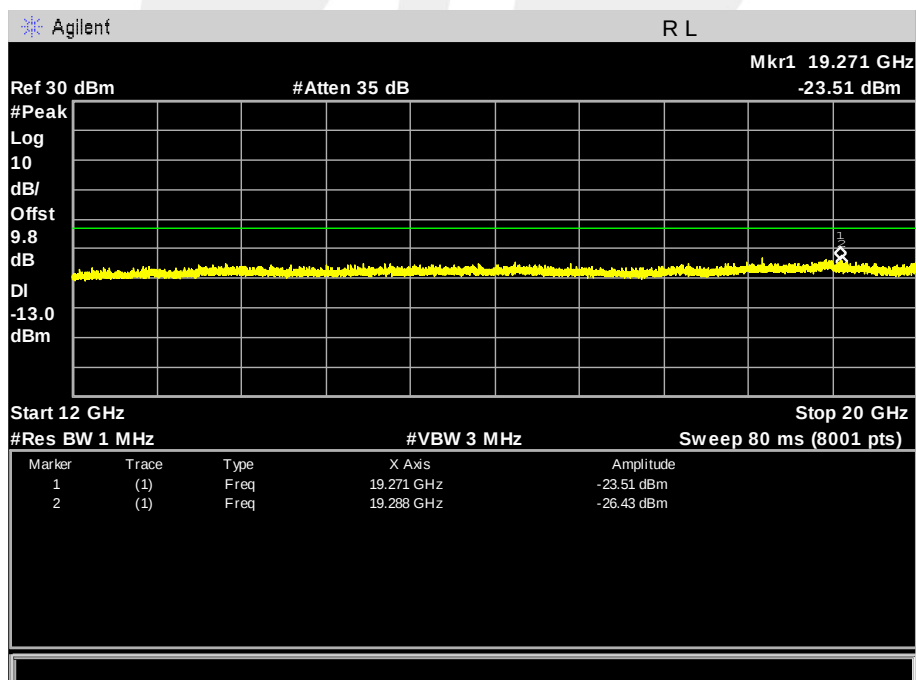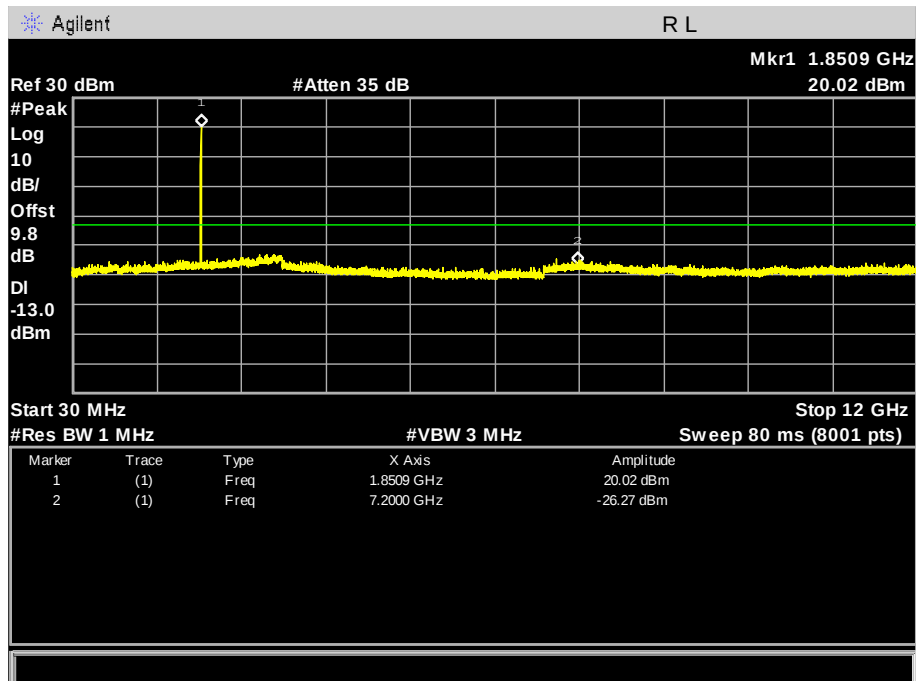





Conducted Emission Transmitting Mode CH 9400 30MHz – 20GHz

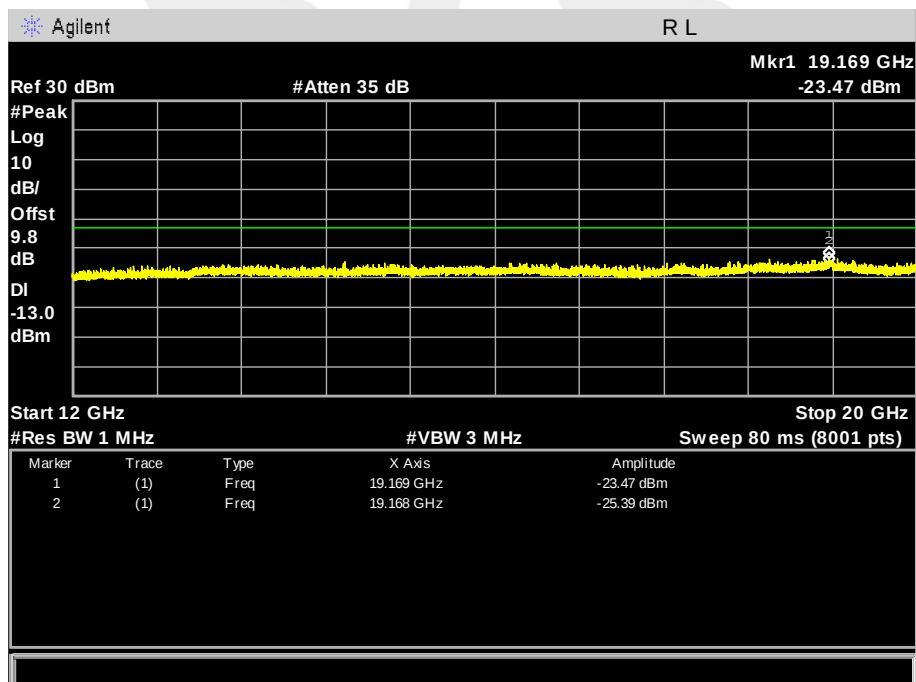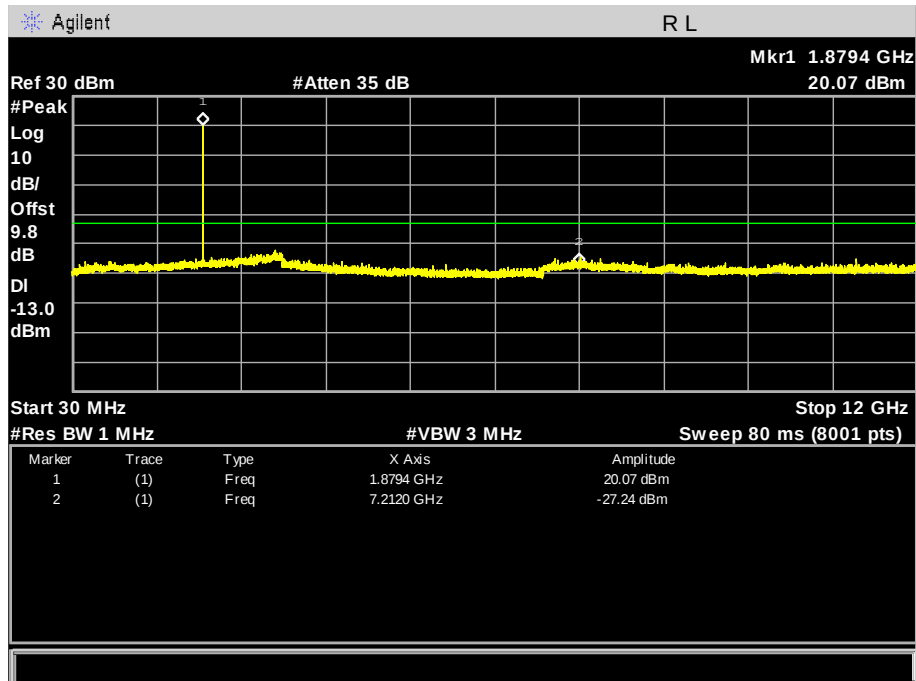





Conducted Emission Transmitting Mode CH 9538 30MHz – 20GHz

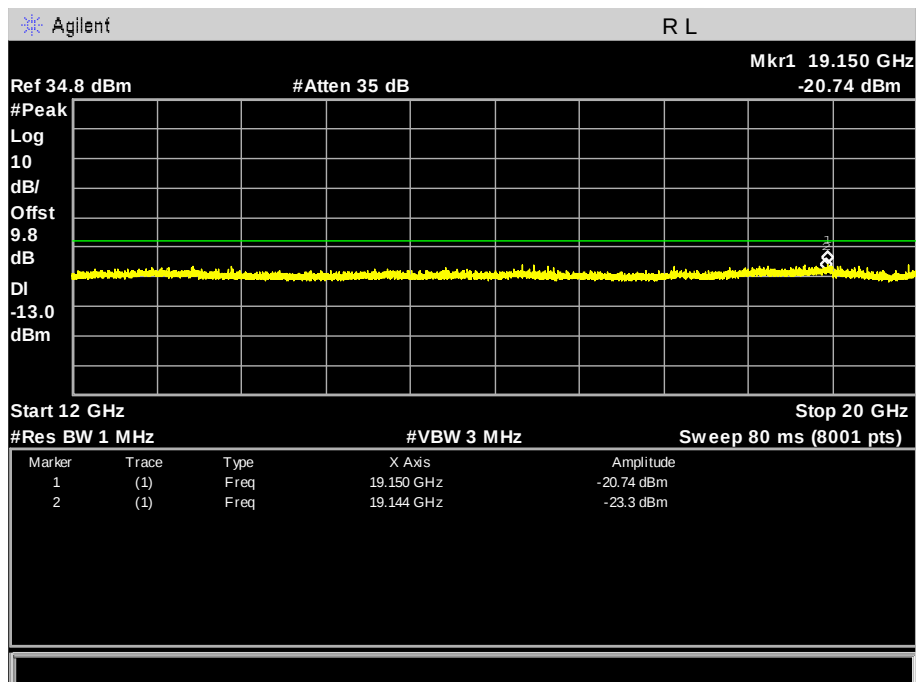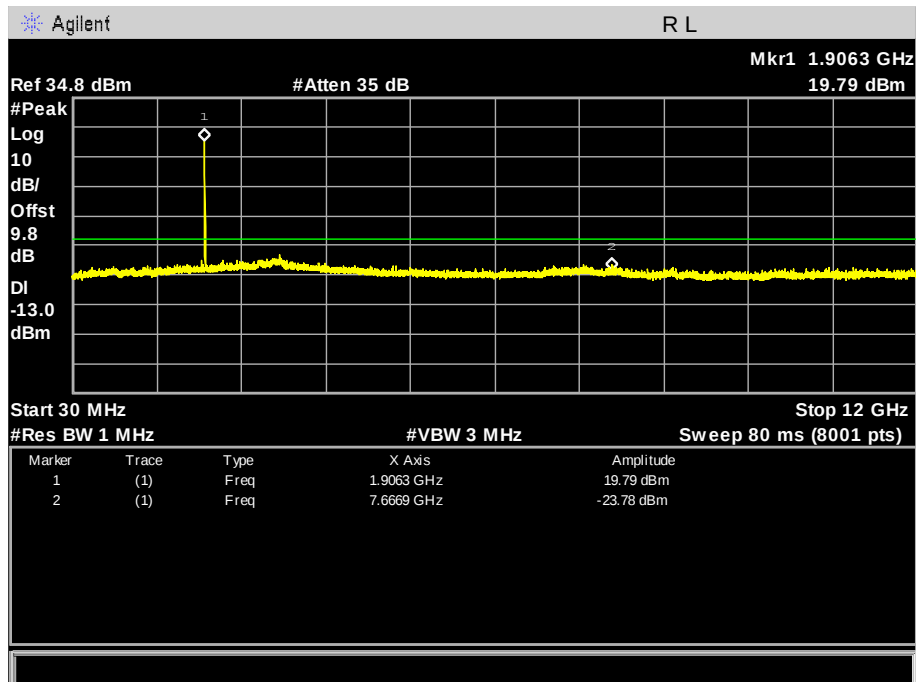





CONDUCTED EMISSION IN UMTS HSUPA band II

Conducted Emission Transmitting Mode CH 9262 30MHz – 20GHz

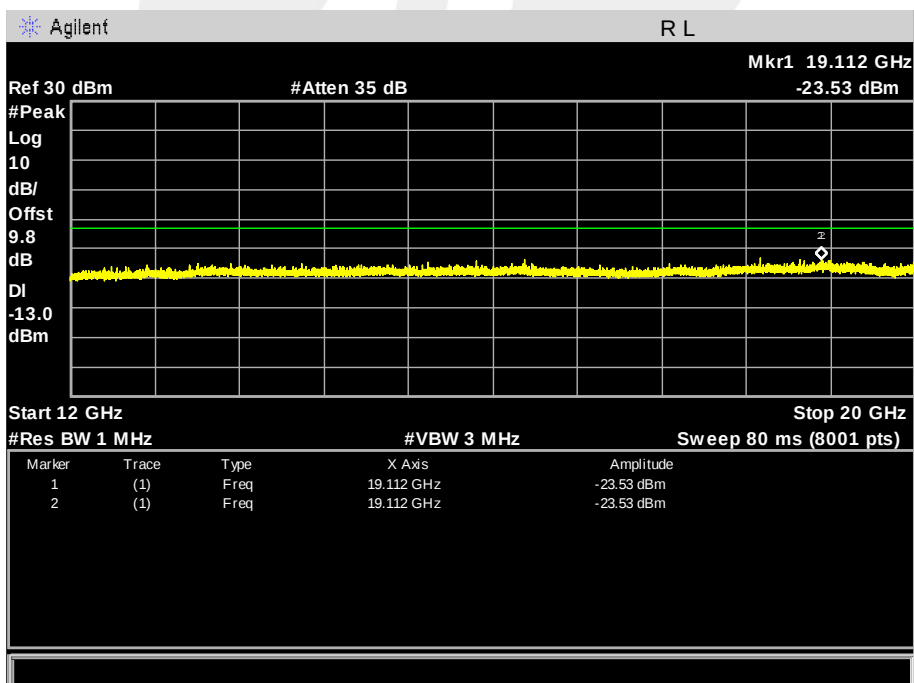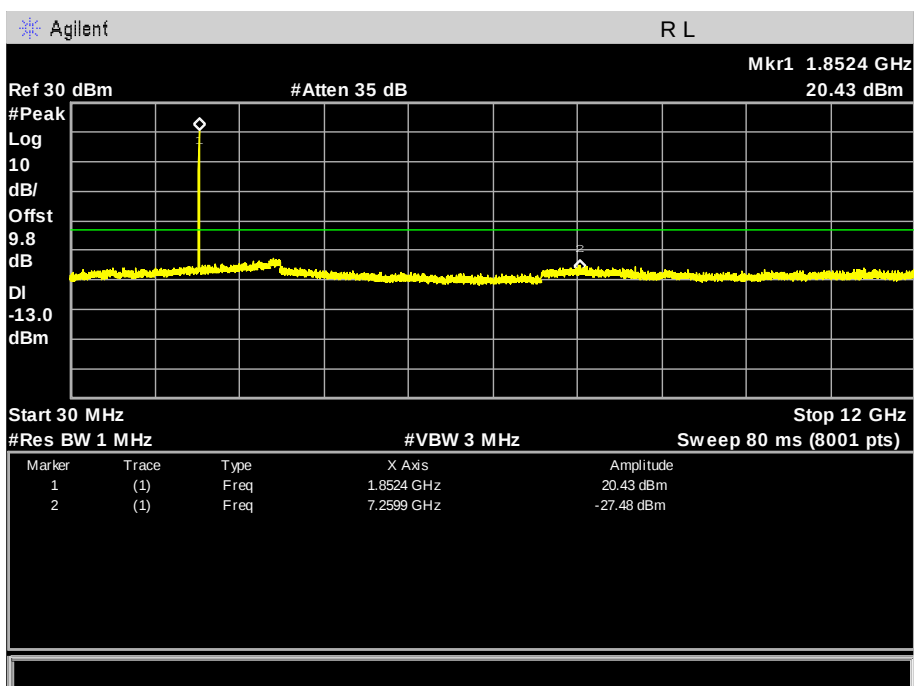





Conducted Emission Transmitting Mode CH 9400 30MHz – 20GHz

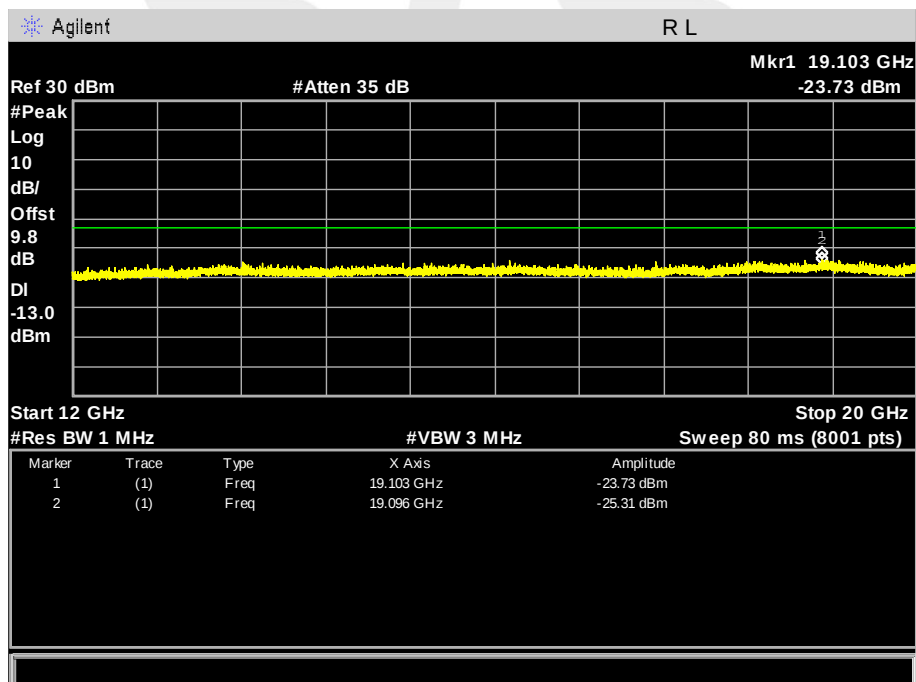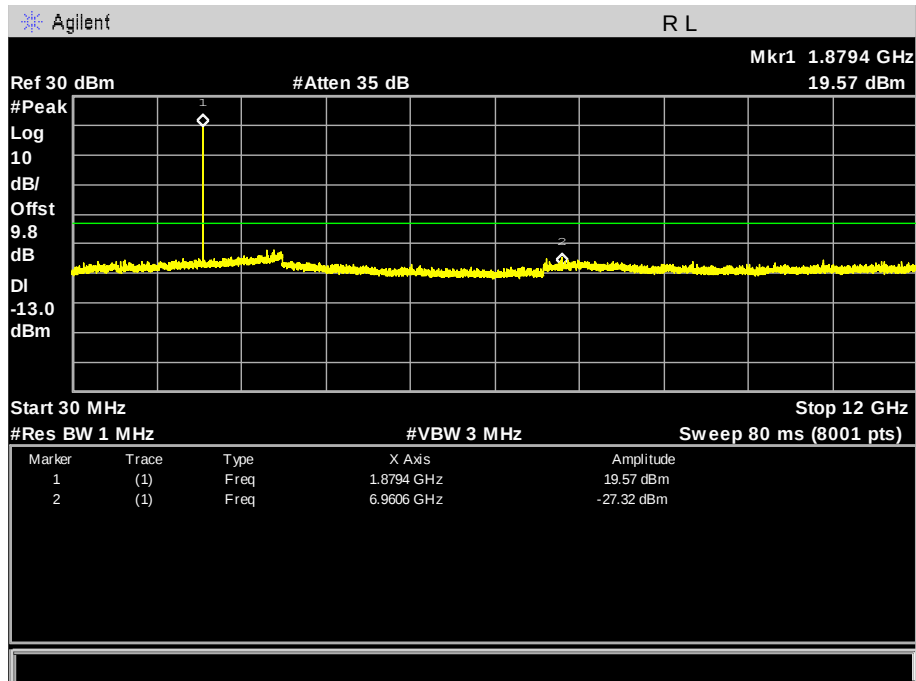





Conducted Emission Transmitting Mode CH 9538 30MHz – 20GHz

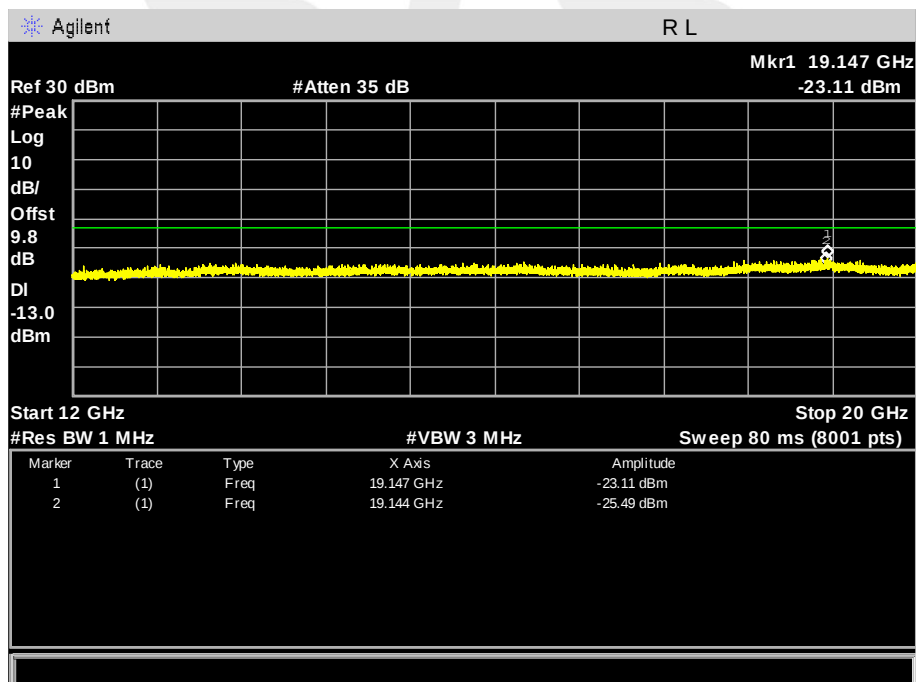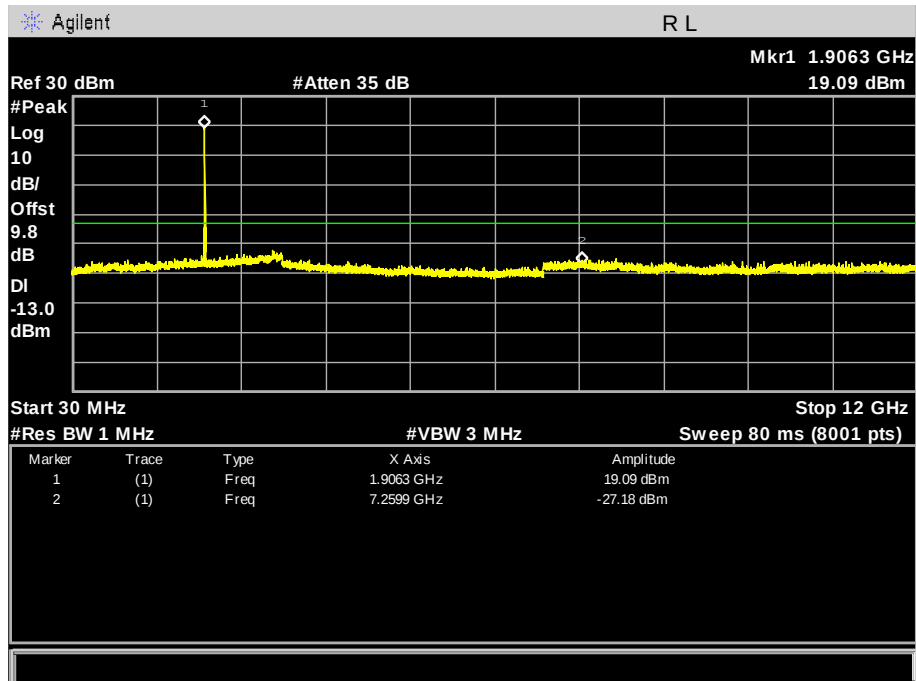





CONDUCTED EMISSION IN UMTS band IV

Conducted Emission Transmitting Mode 8563 30MHz – 20GHz

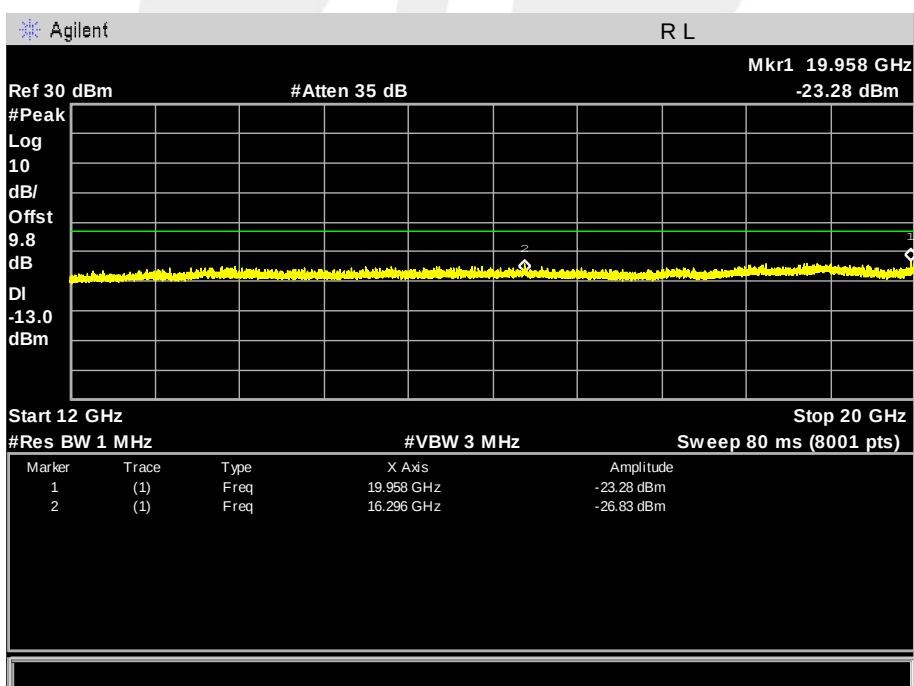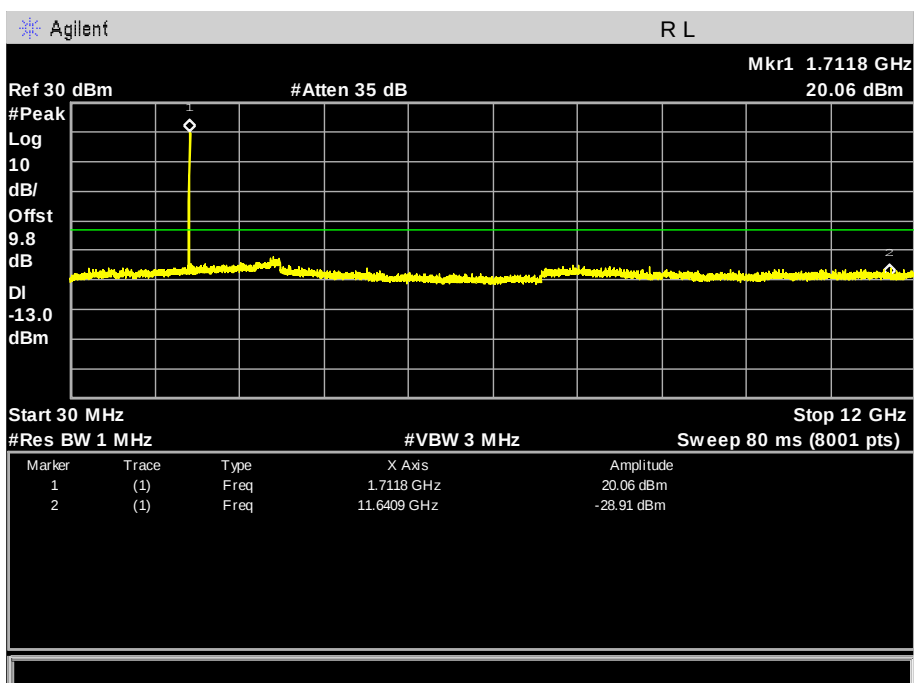





Conducted Emission Transmitting Mode CH 8700 30MHz – 20GHz

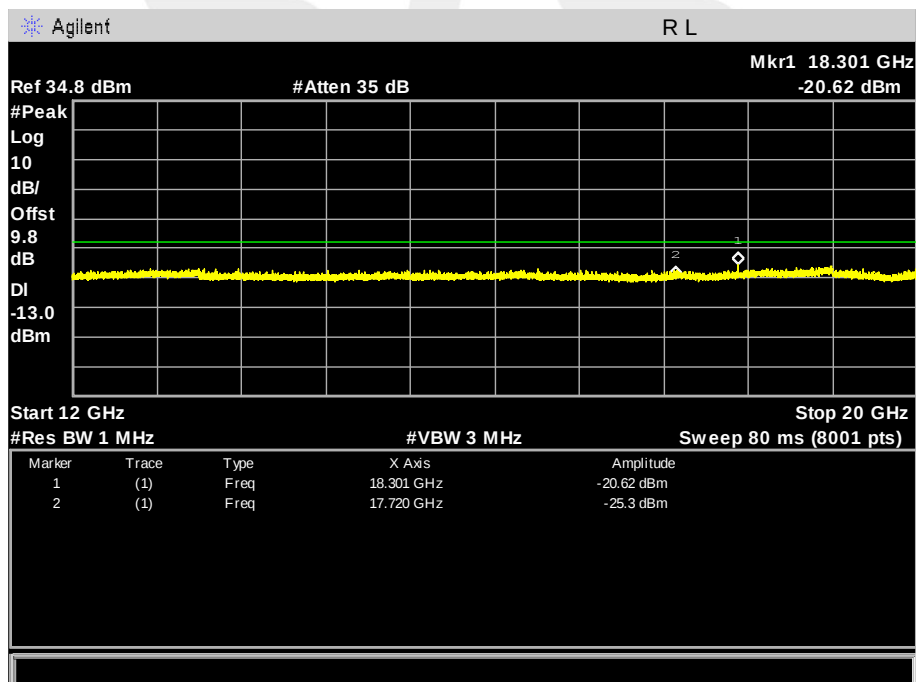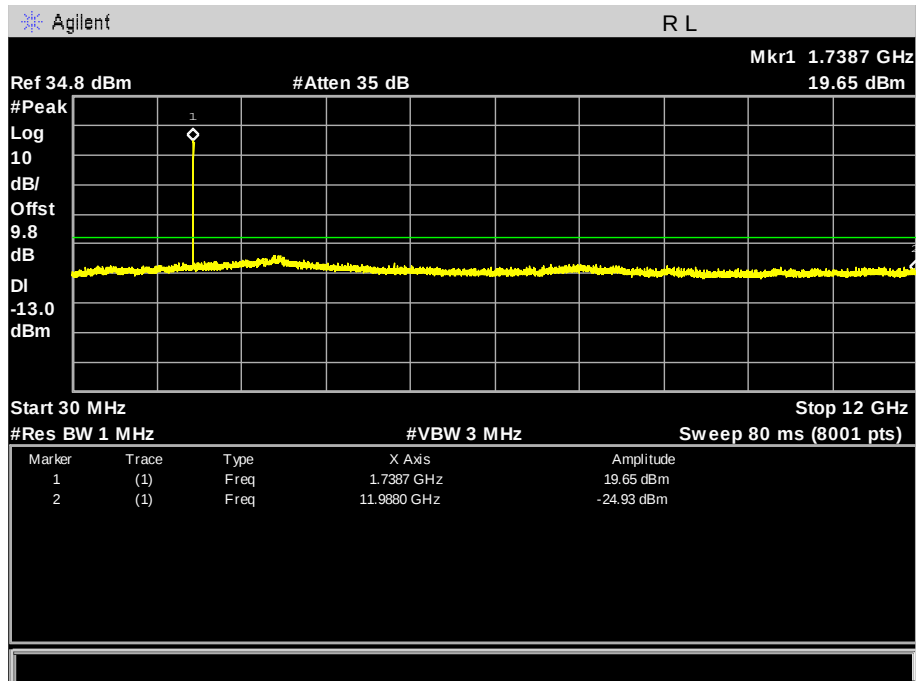





Conducted Emission Transmitting Mode CH 8762 30MHz – 20GHz

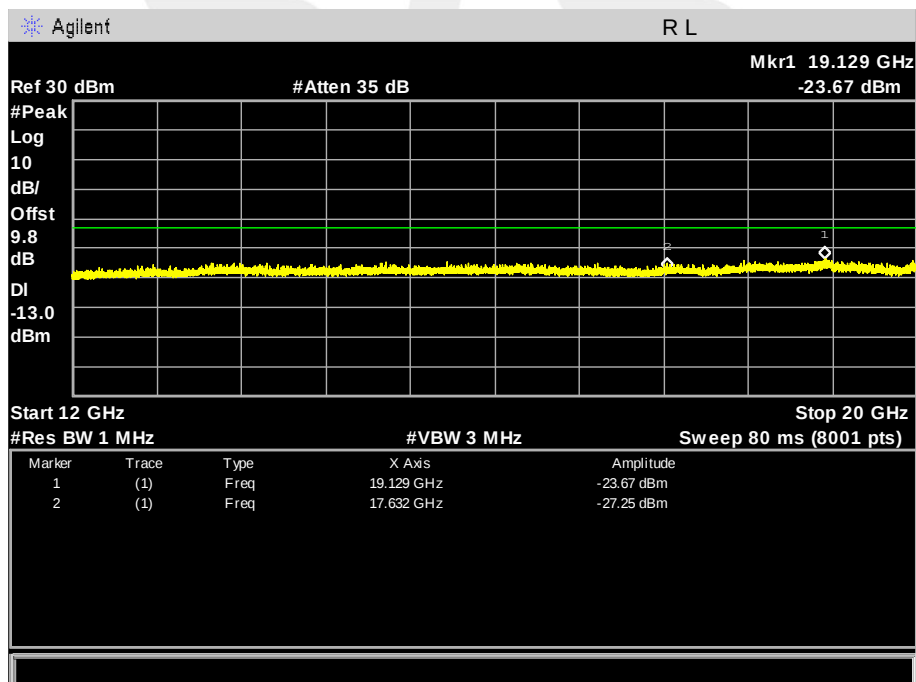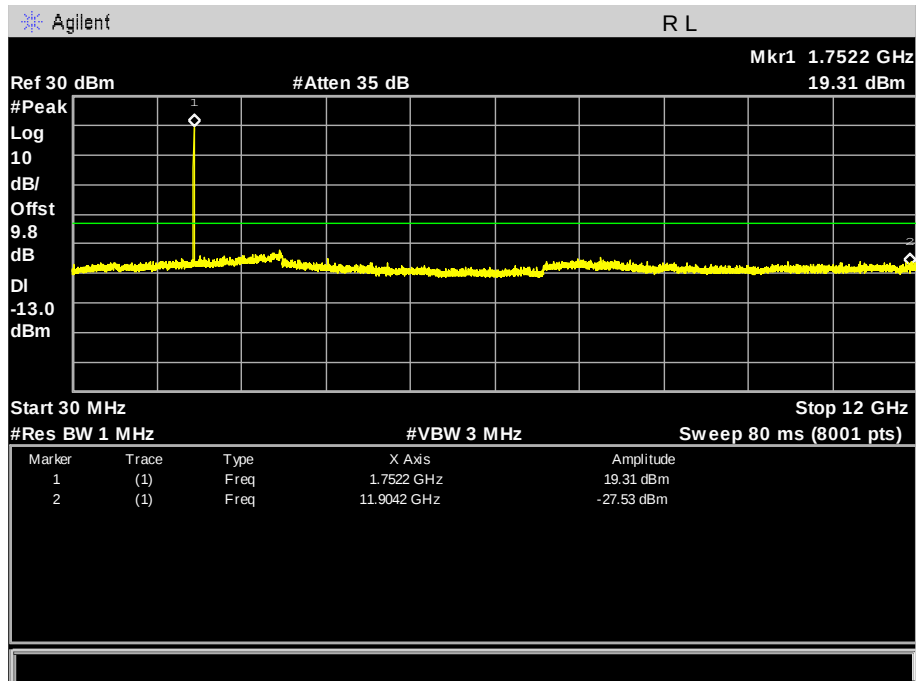





CONDUCTED EMISSION IN UMTS HSDPA band IV

Conducted Emission Transmitting Mode CH 8563 30MHz – 20GHz

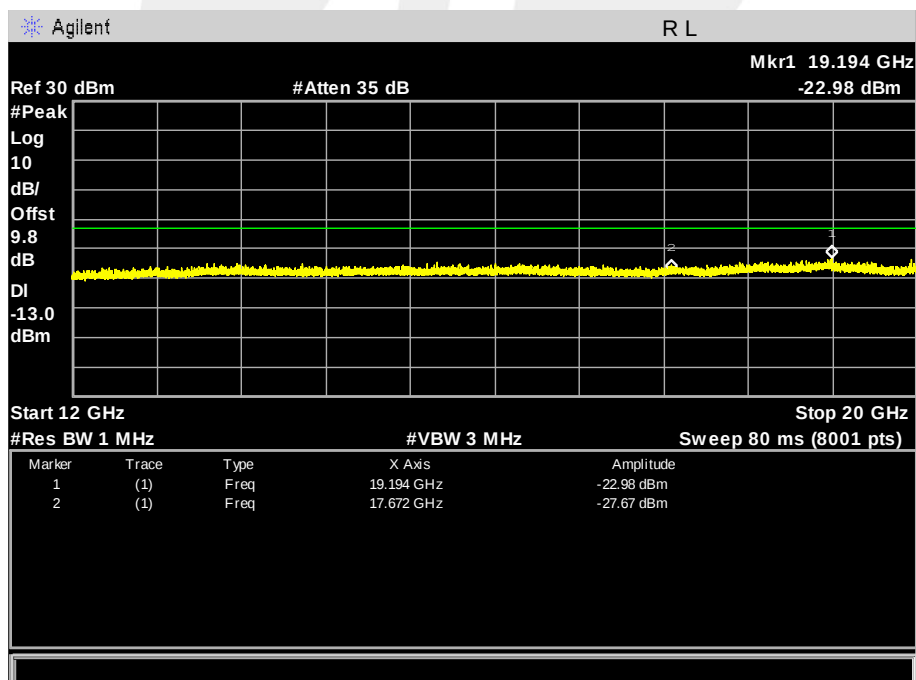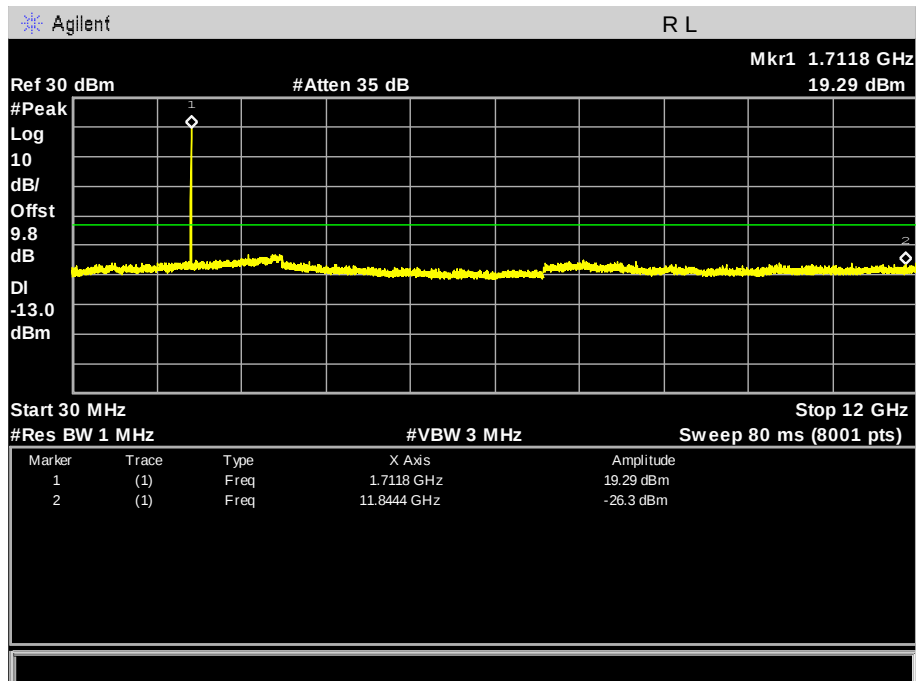





Conducted Emission Transmitting Mode CH 8700 30MHz – 20GHz

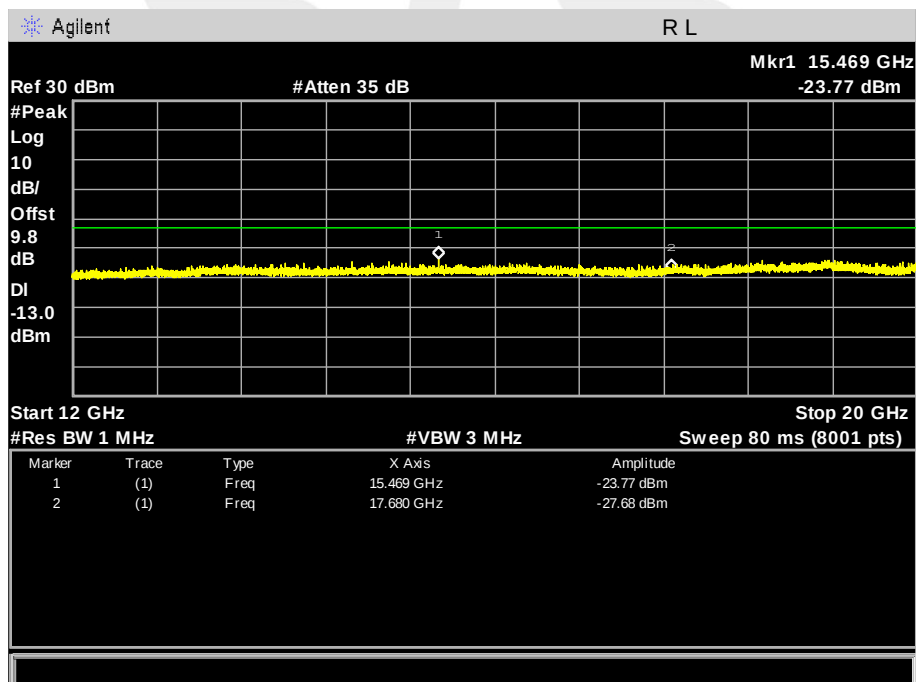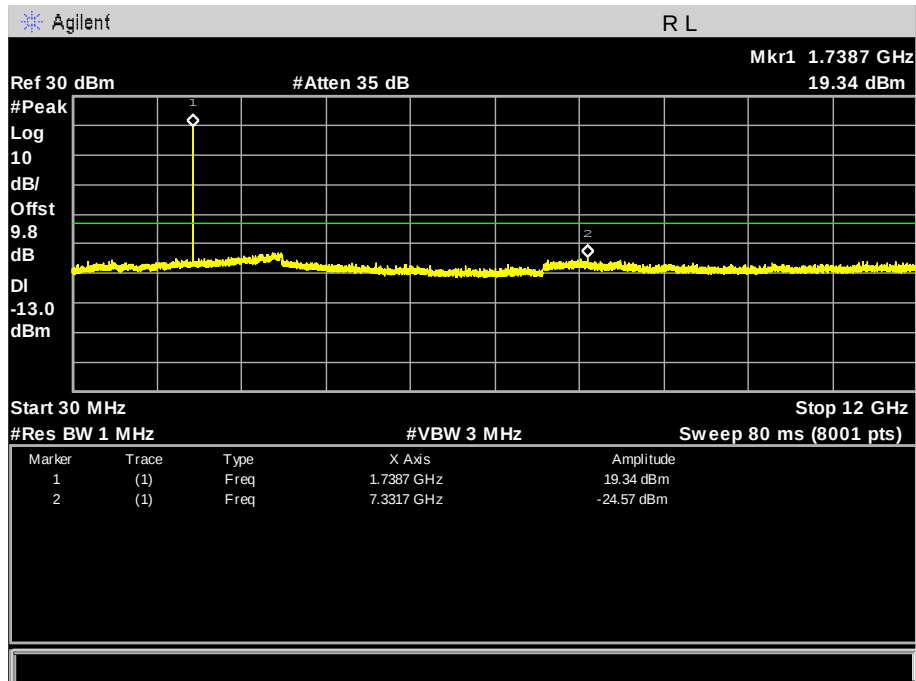





Conducted Emission Transmitting Mode CH 8762 30MHz – 20GHz

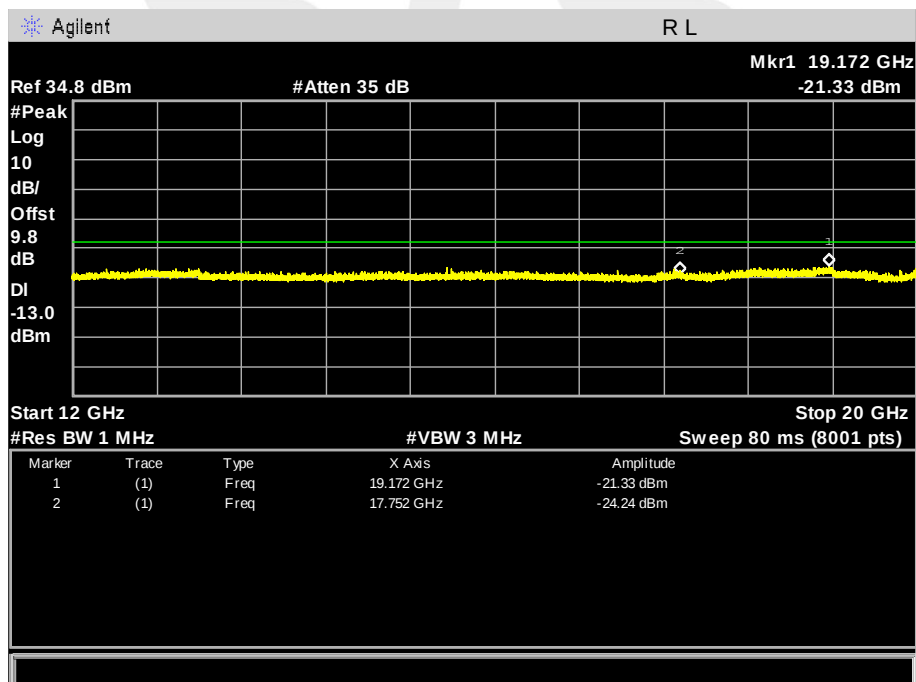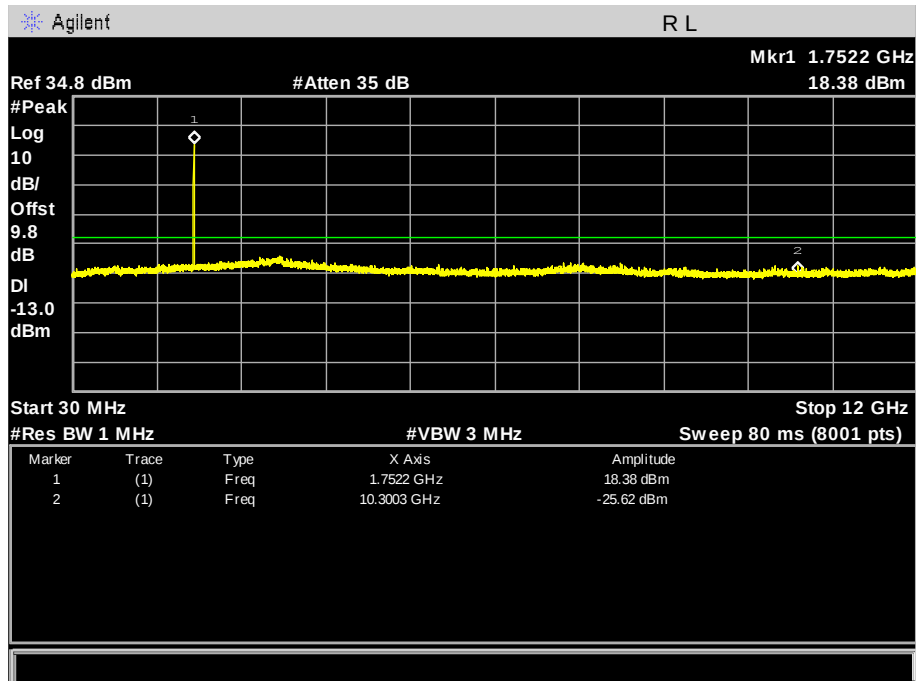





CONDUCTED EMISSION IN UMTS HSUPA band IV

Conducted Emission Transmitting Mode CH 8563 30MHz – 20GHz

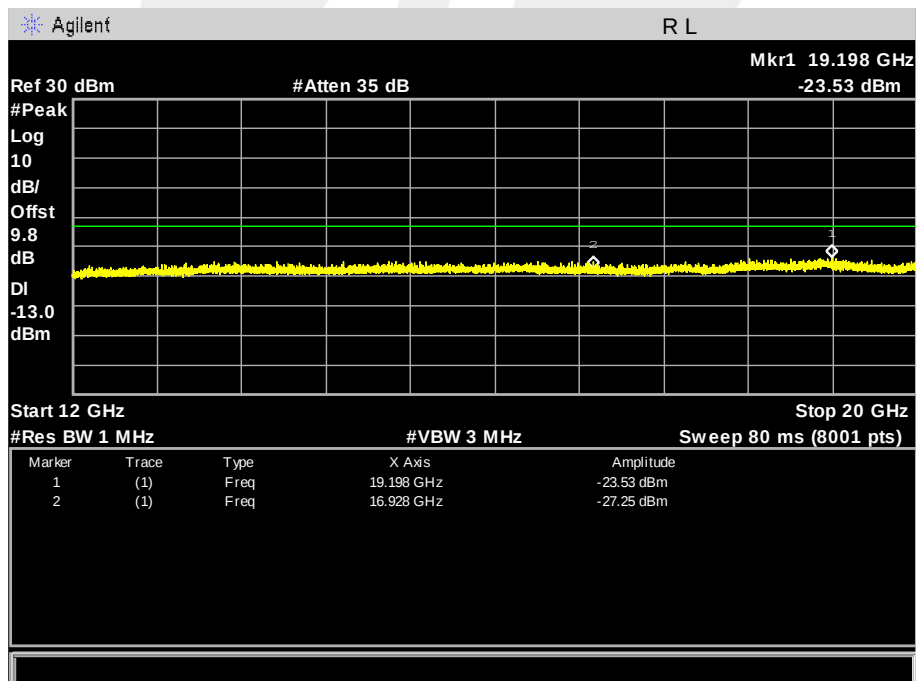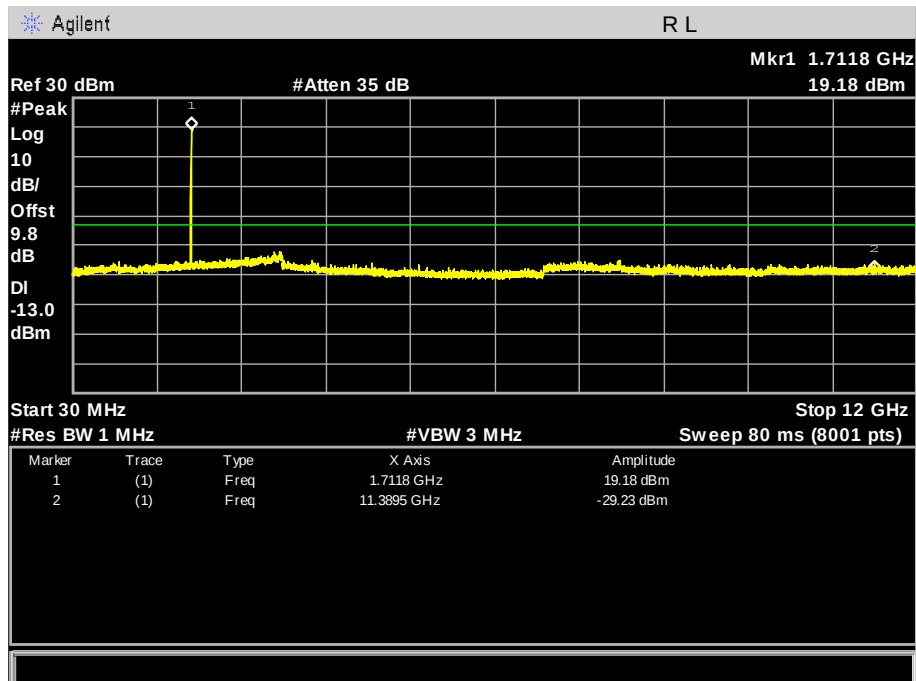





Conducted Emission Transmitting Mode CH 8700 30MHz – 20GHz

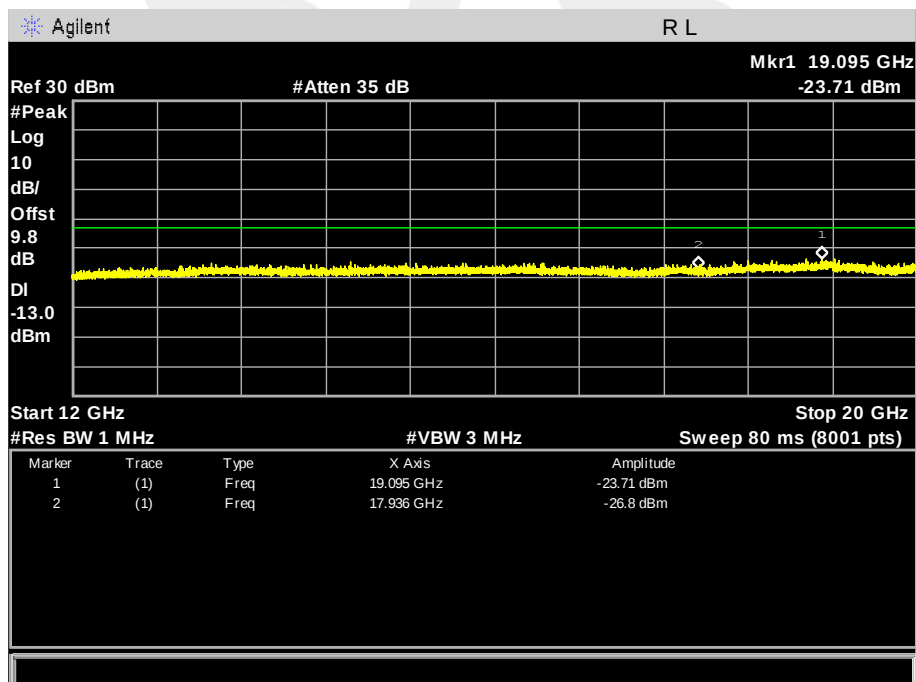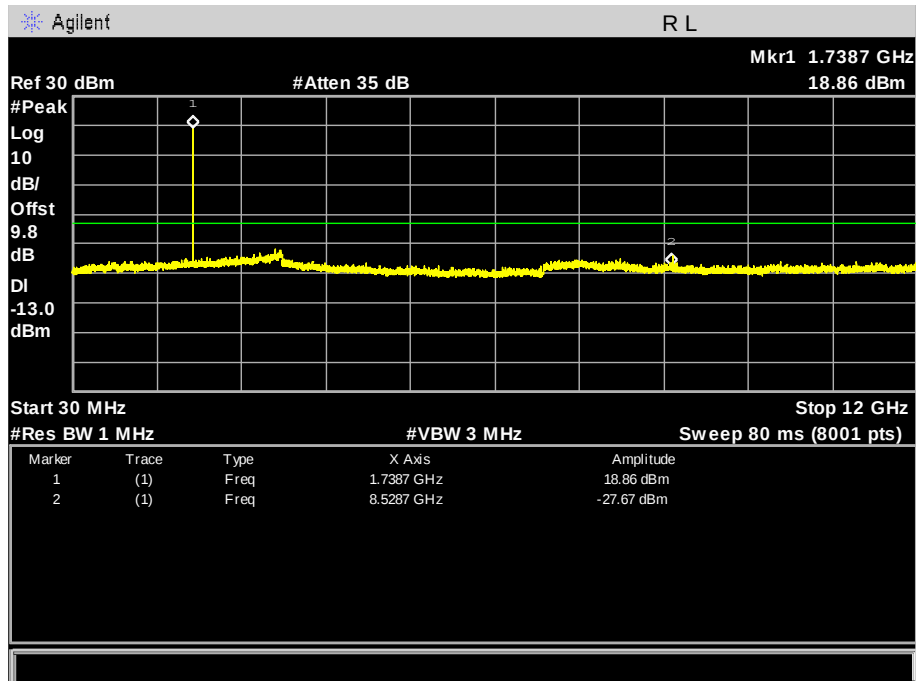



Conducted Emission Transmitting Mode CH 8762 30MHz – 20GHz

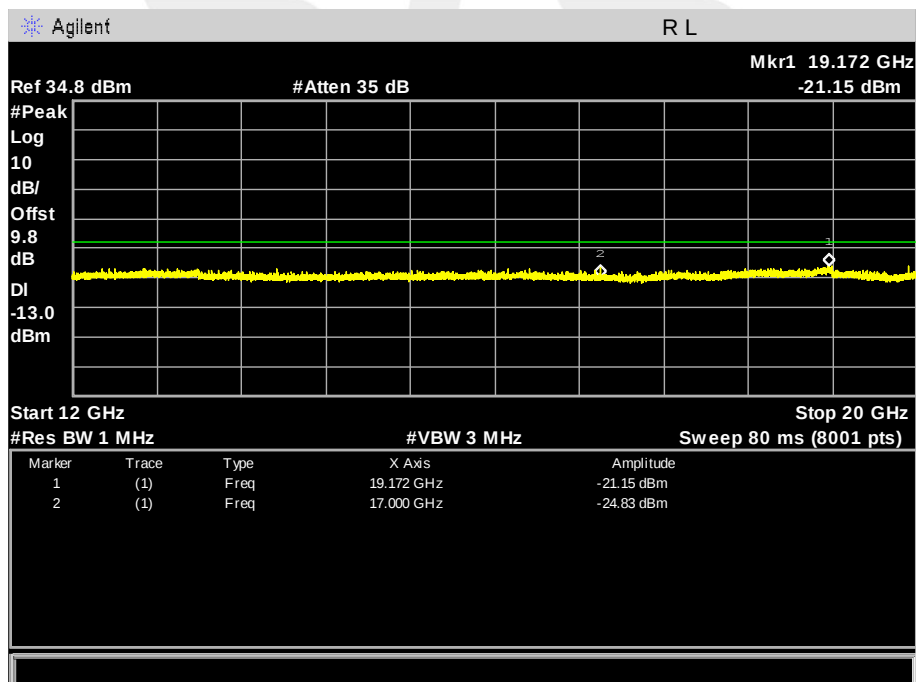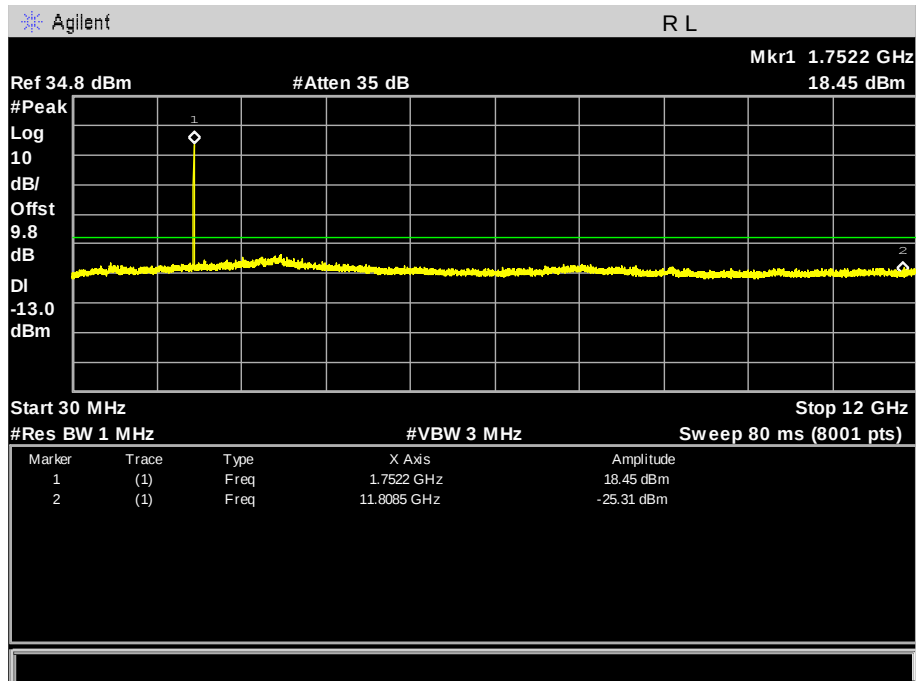




APPENDIX II


TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)

EMISSION BANDWIDTH (-26dBC)

Occupied Bandwidth (99%) GSM 850 BAND CH 128

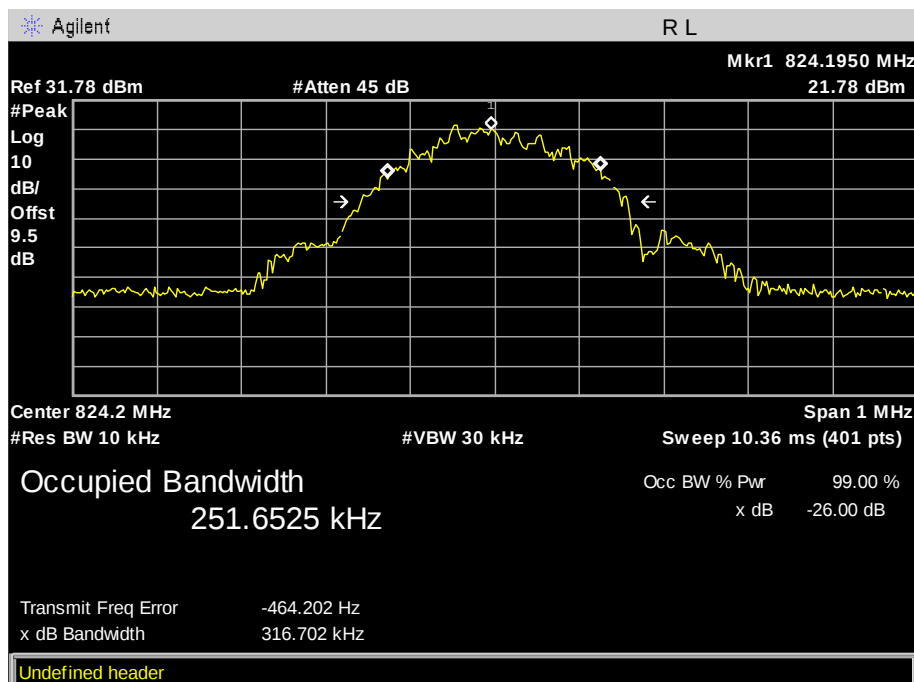


Occupied Bandwidth (99%) GSM 850 BAND CH 190

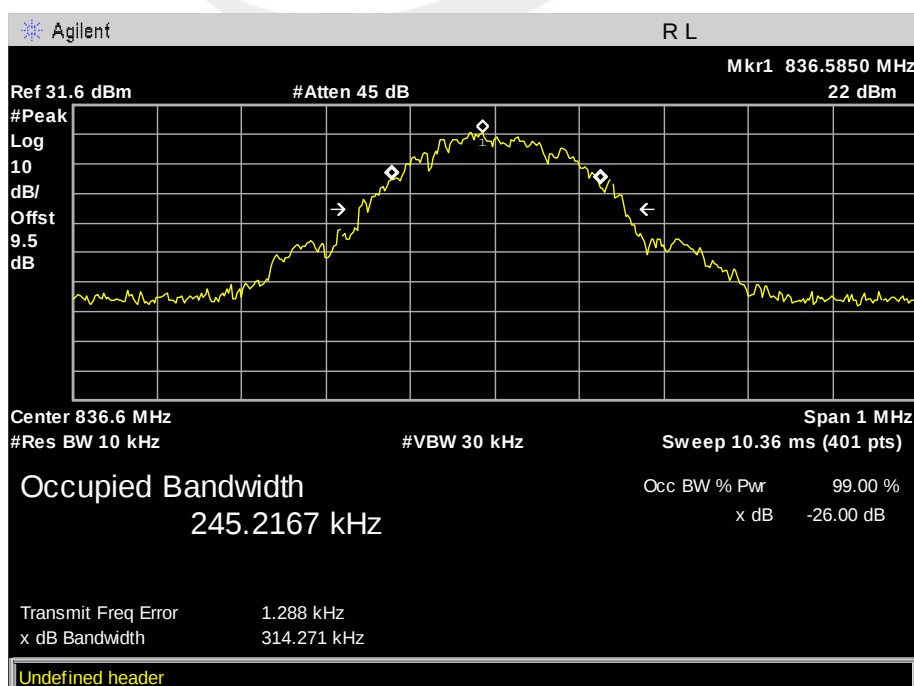




Occupied Bandwidth (99%) GSM 850 BAND CH 251

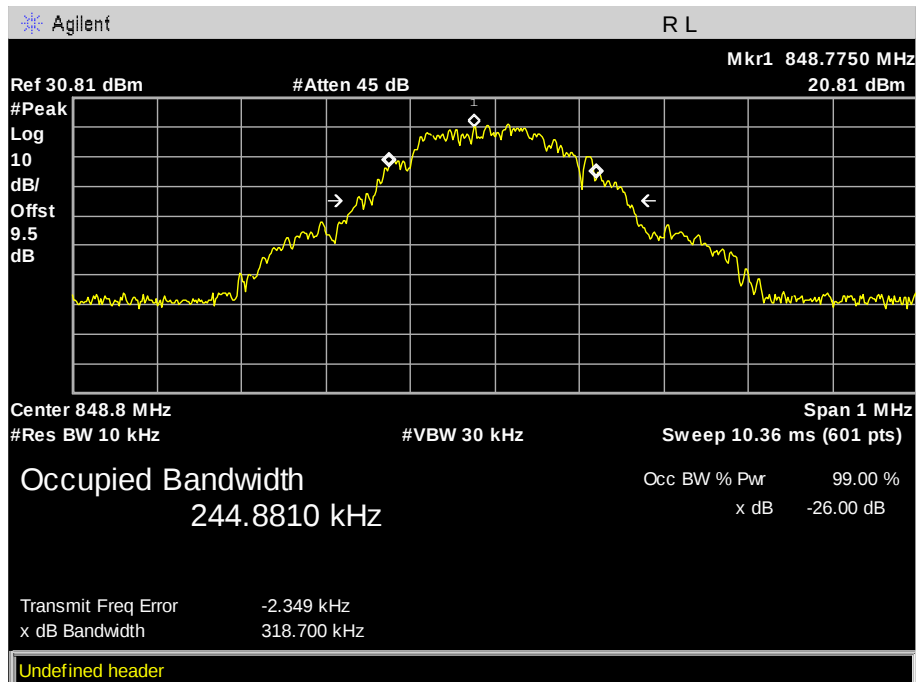




Occupied Bandwidth (99%) GPRS 850 BAND CH 128

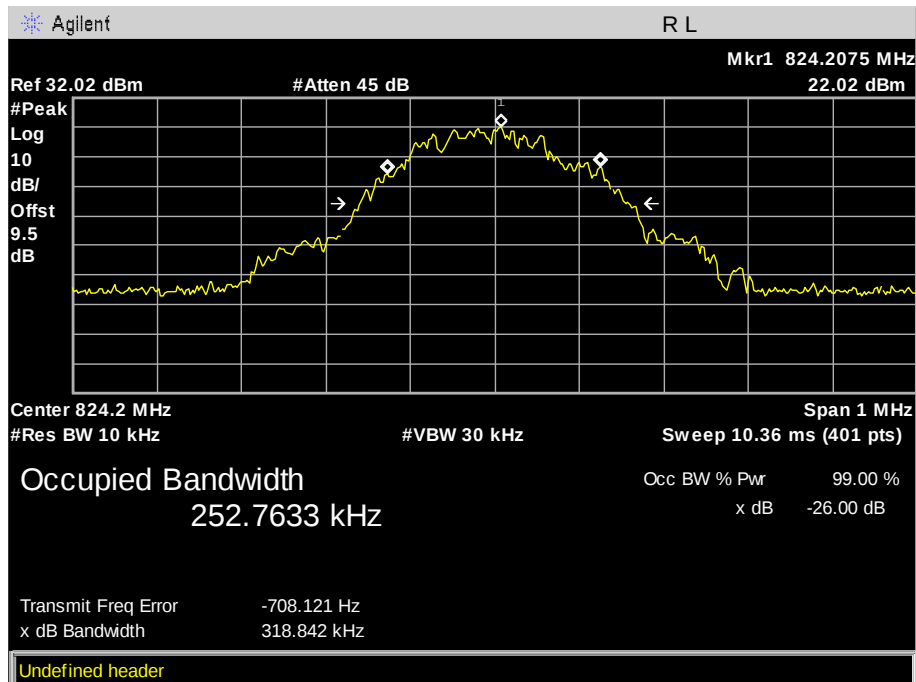


Occupied Bandwidth (99%) GPRS 850 BAND CH 190

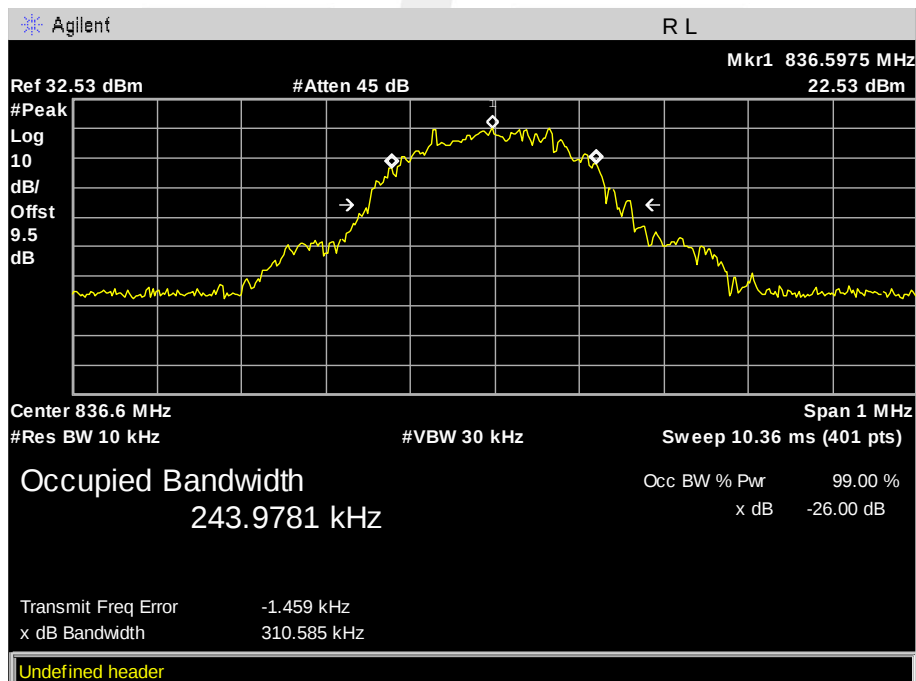




Occupied Bandwidth (99%) GRPS 850 BAND CH 251

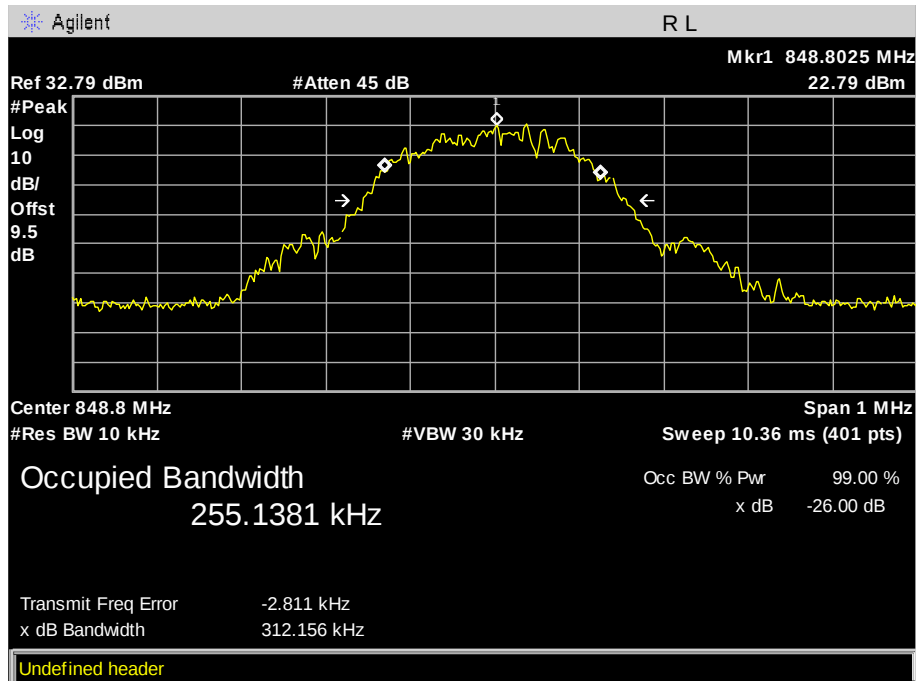




Occupied Bandwidth (99%) EDGE 850 BAND CH 128

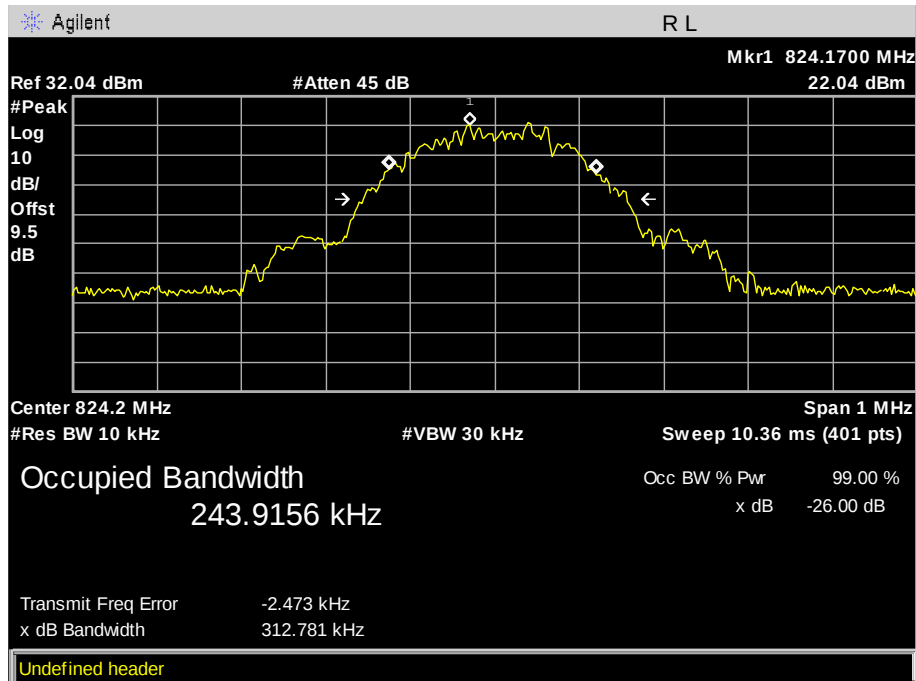


Occupied Bandwidth (99%) EDGE 850 BAND CH 190

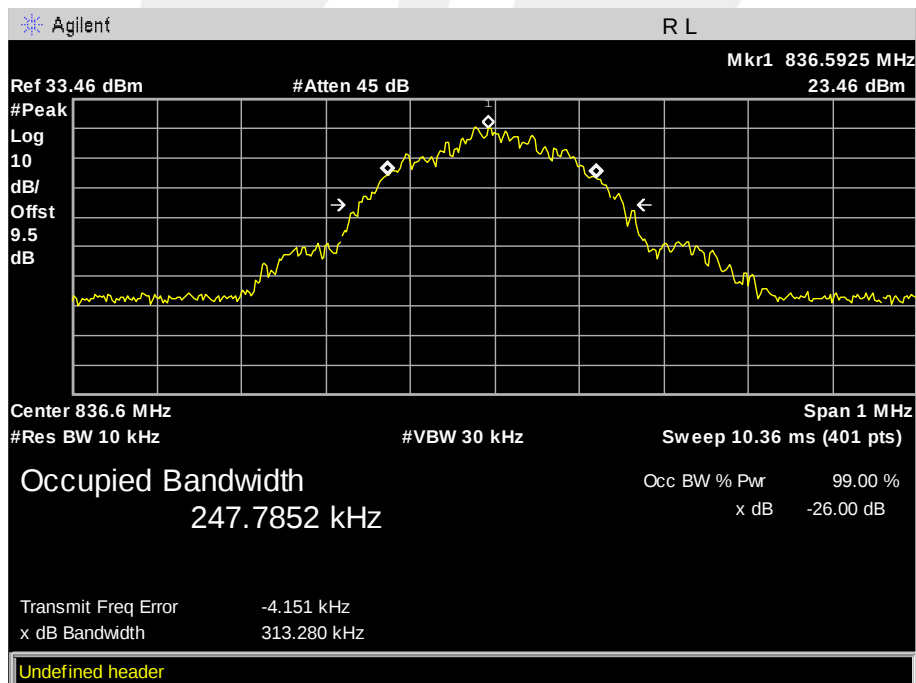




Occupied Bandwidth (99%) EDGE 850 BAND CH 251

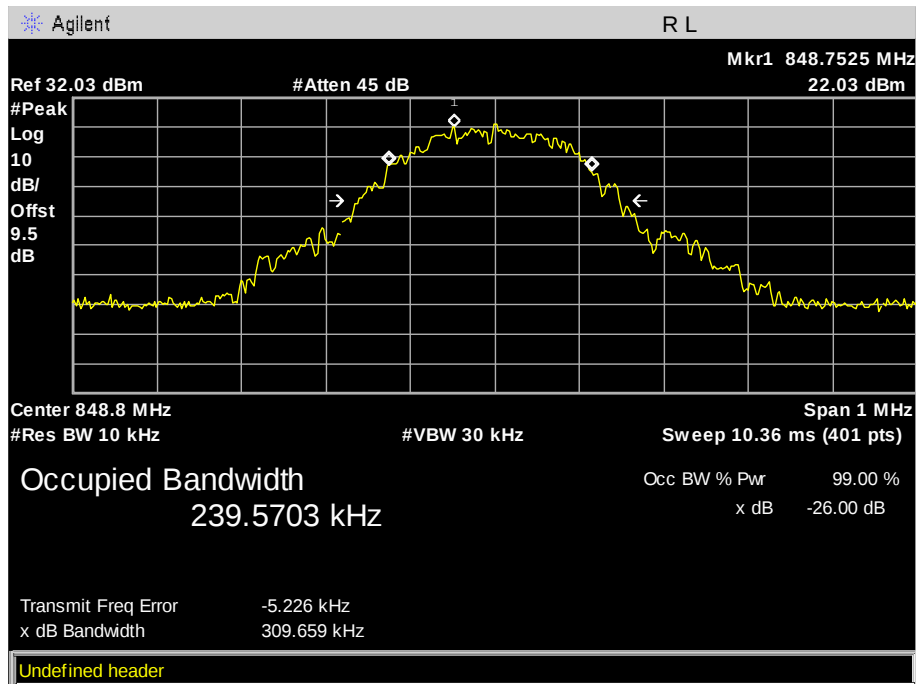




Occupied Bandwidth (99%) PCS 1900 BAND CH 512

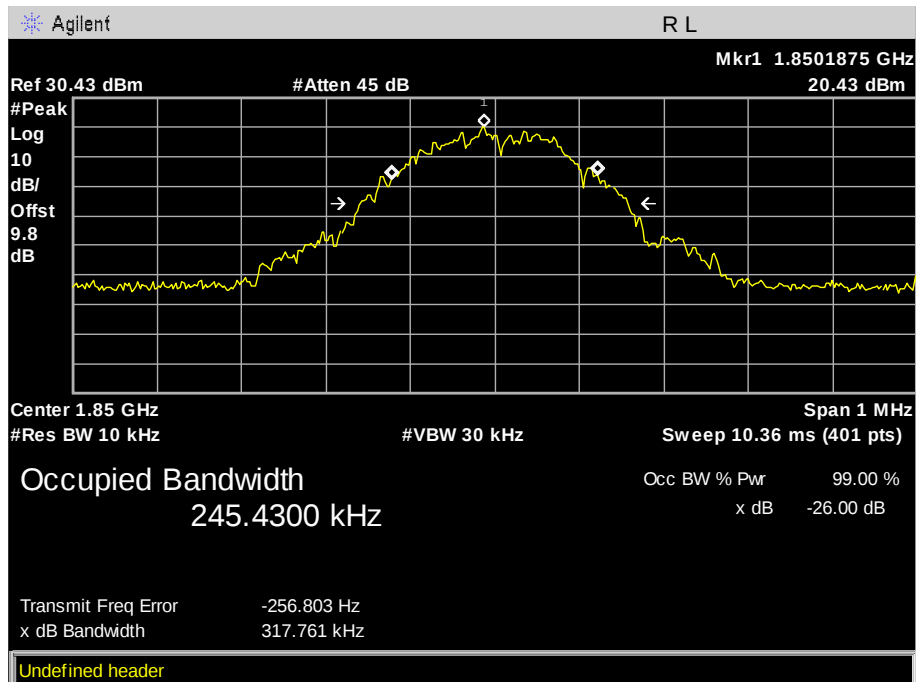


Occupied Bandwidth (99%) PCS 1900 BAND CH 661

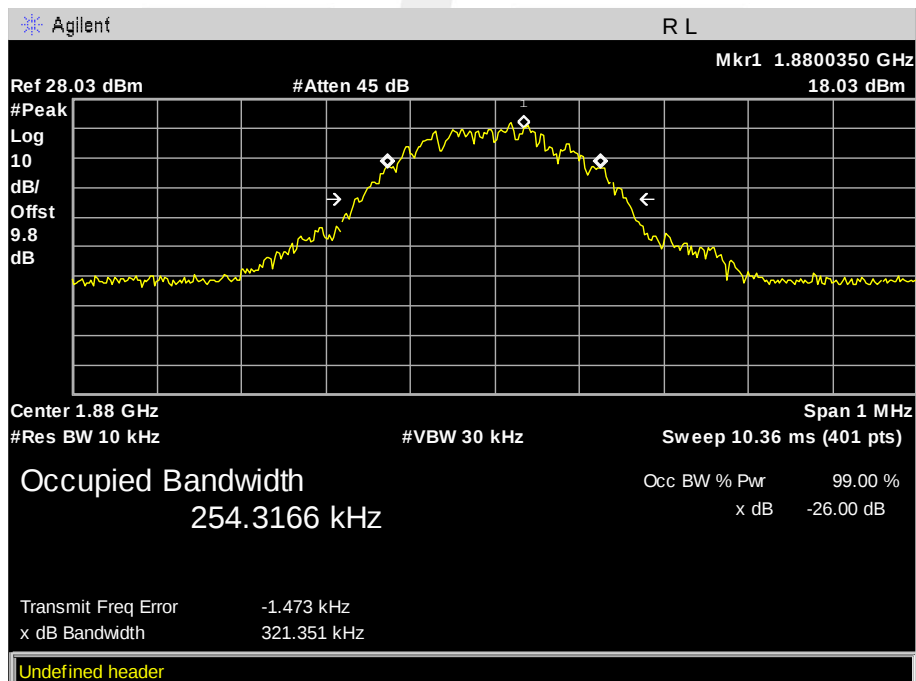




Occupied Bandwidth (99%) PCS 1900 BAND CH 810

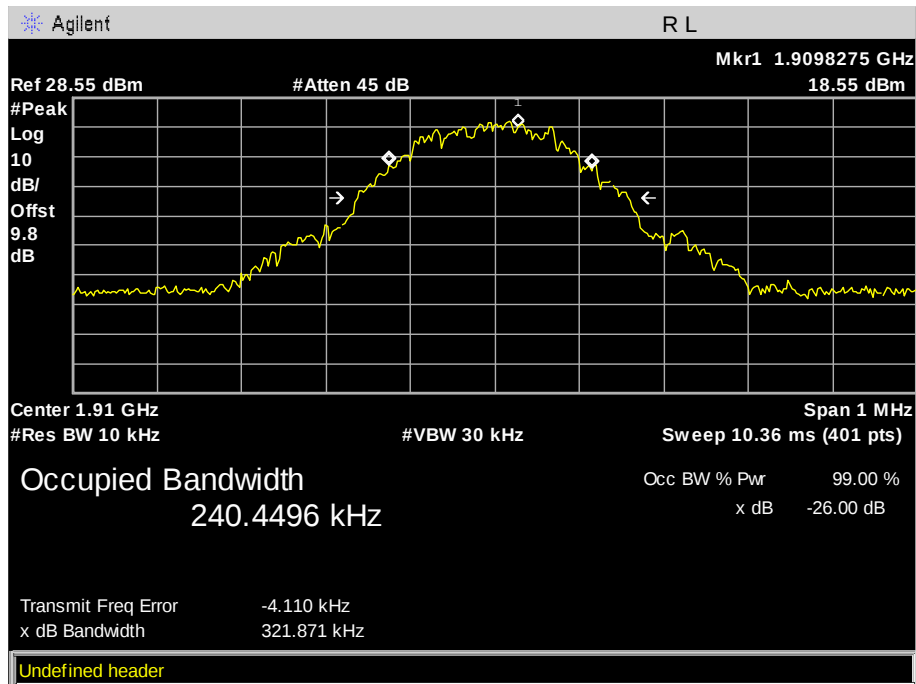




Occupied Bandwidth (99%) GPRS 1900 BAND CH 512

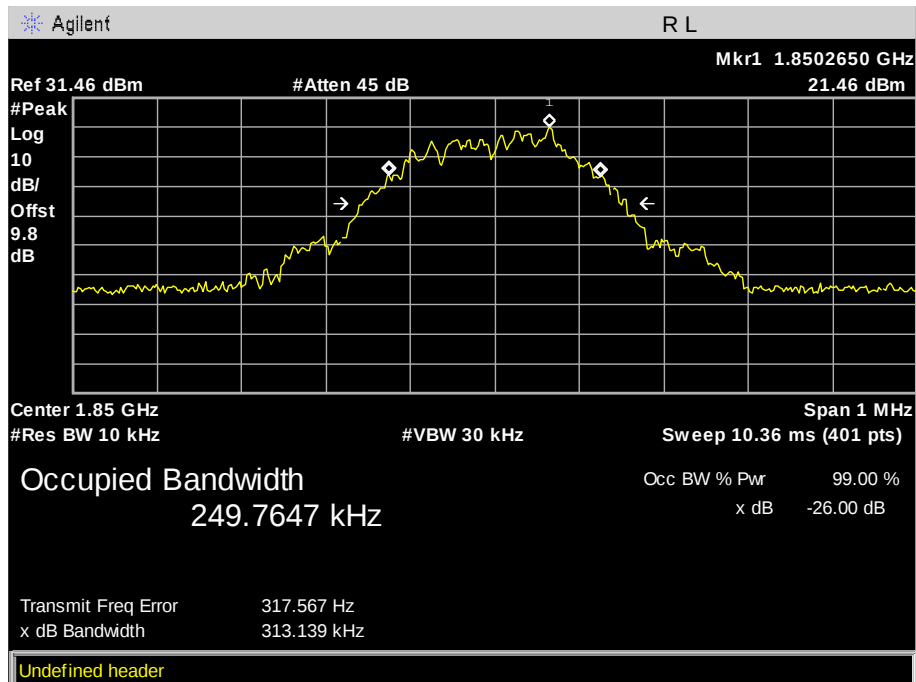


Occupied Bandwidth (99%) GPRS 1900 BAND CH 661

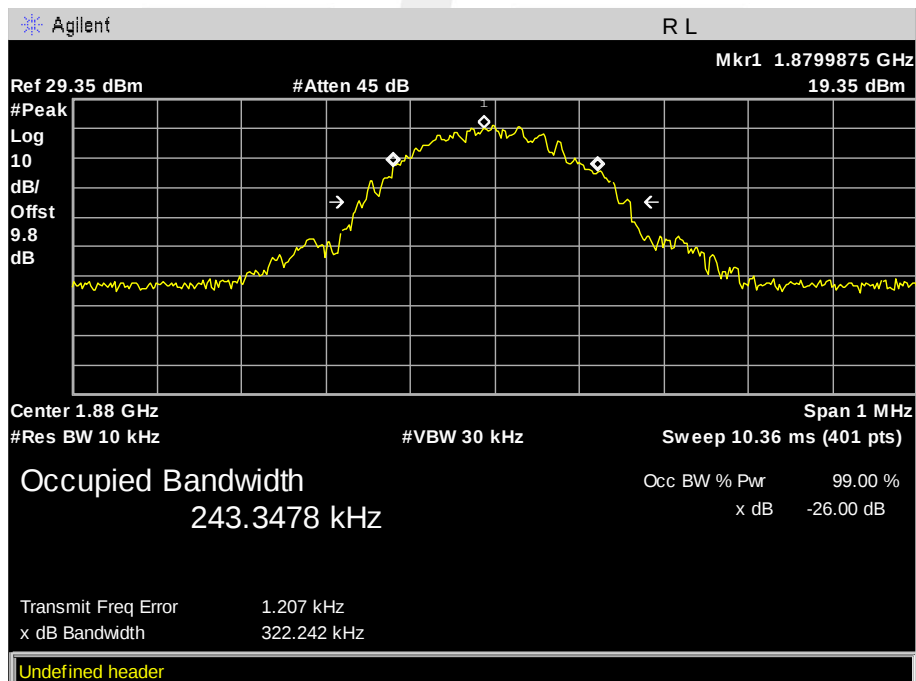




Occupied Bandwidth (99%) GPRS 1900 BAND CH 810

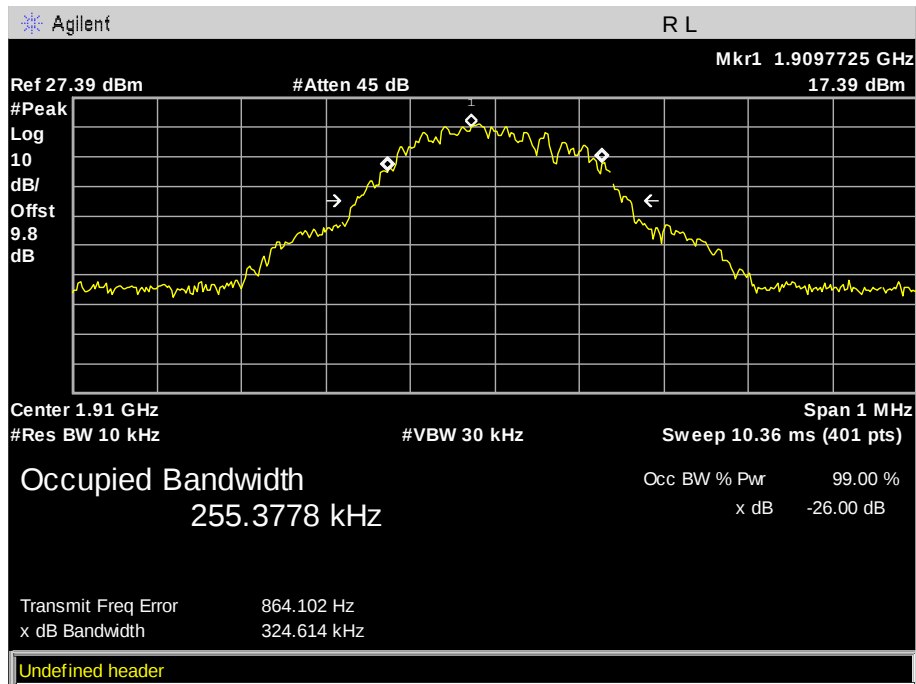




Occupied Bandwidth (99%) EDGE 1900 BAND CH 512

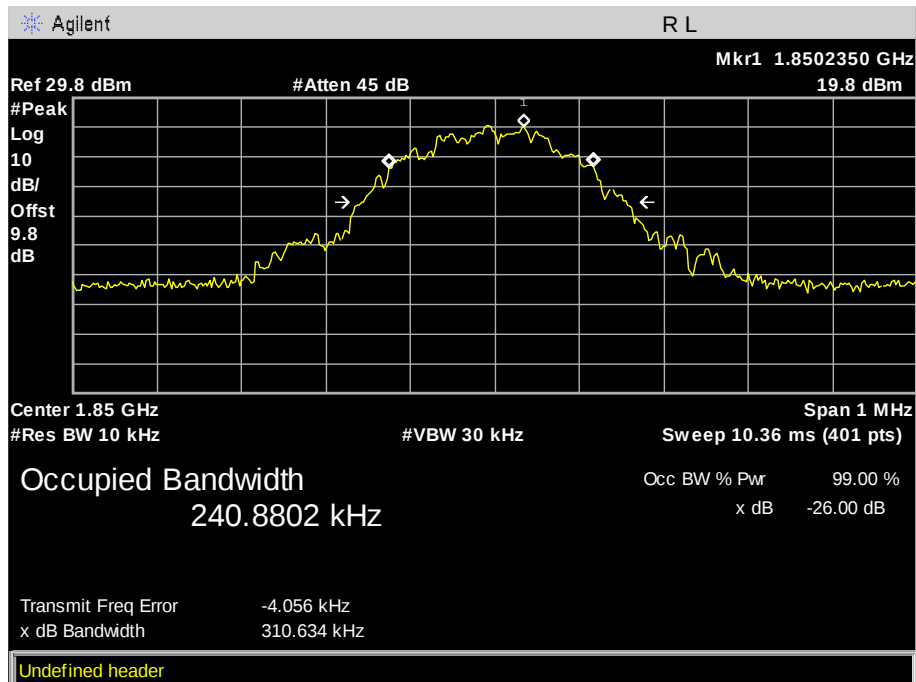


Occupied Bandwidth (99%) EDGE 1900 BAND CH 661

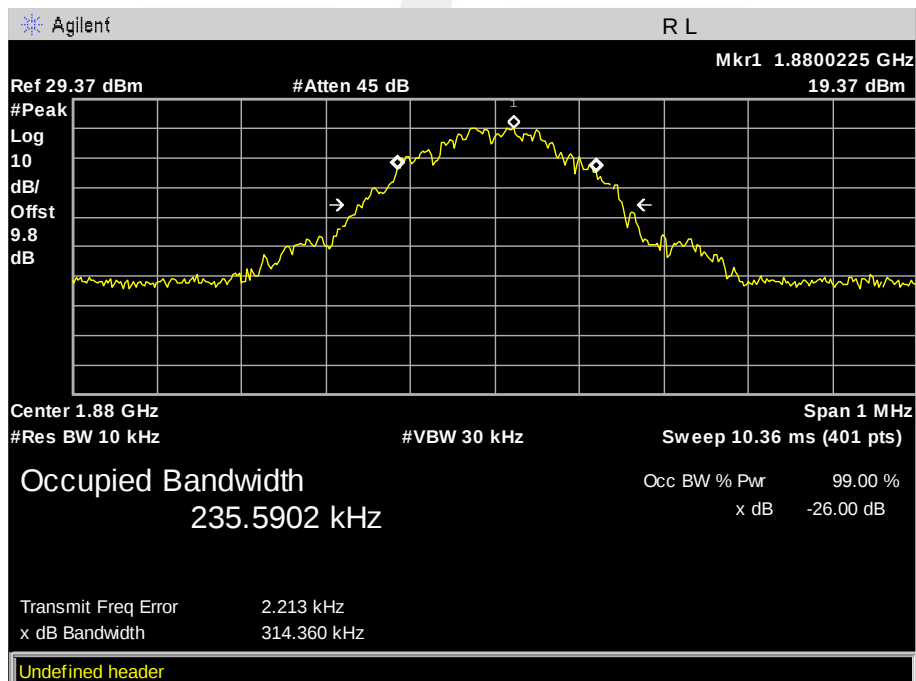




Occupied Bandwidth (99%) EDGE 1900 BAND CH 810

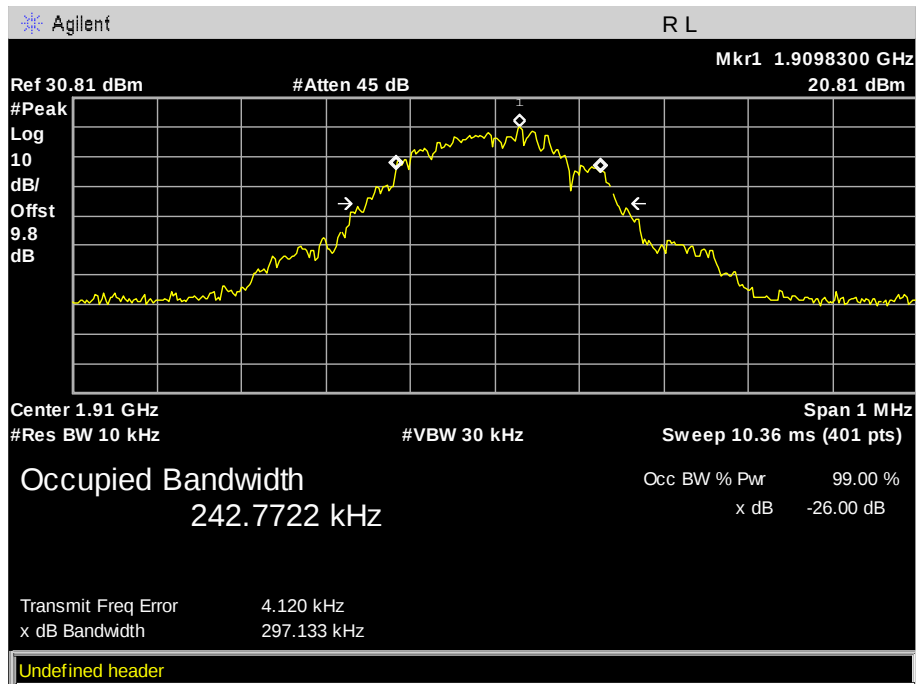




Occupied Bandwidth (99%) UMTS BAND V CH 4132

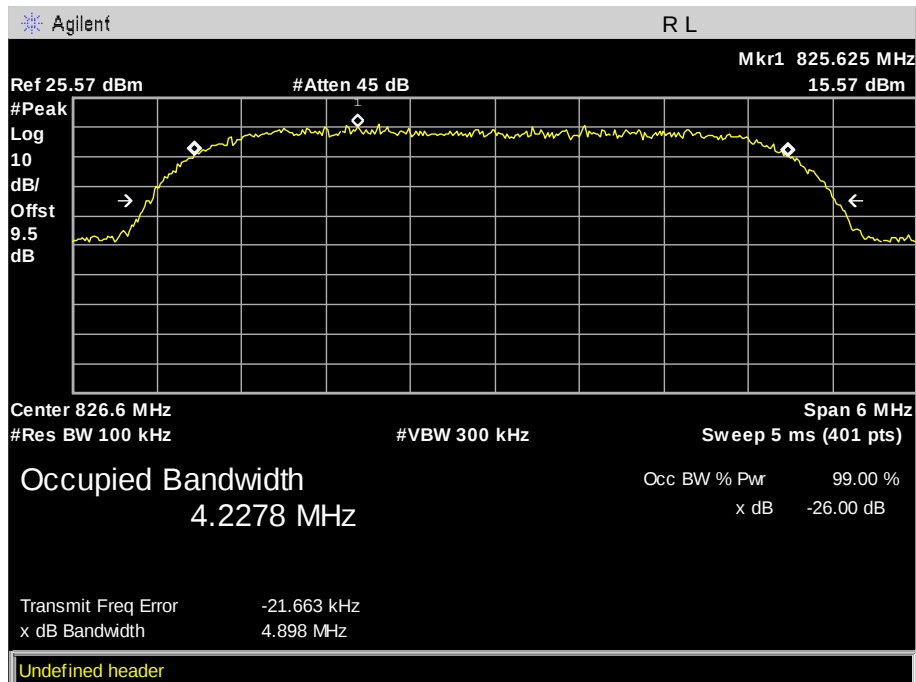


Occupied Bandwidth (99%) UMTS BAND V CH 4183

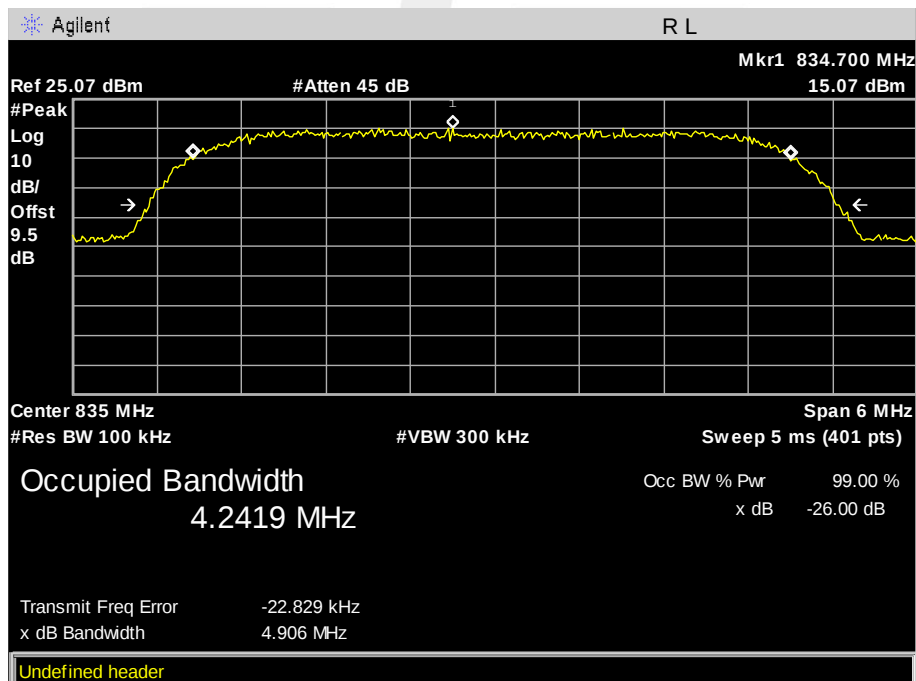




Occupied Bandwidth (99%) UMTS BAND V CH 4233

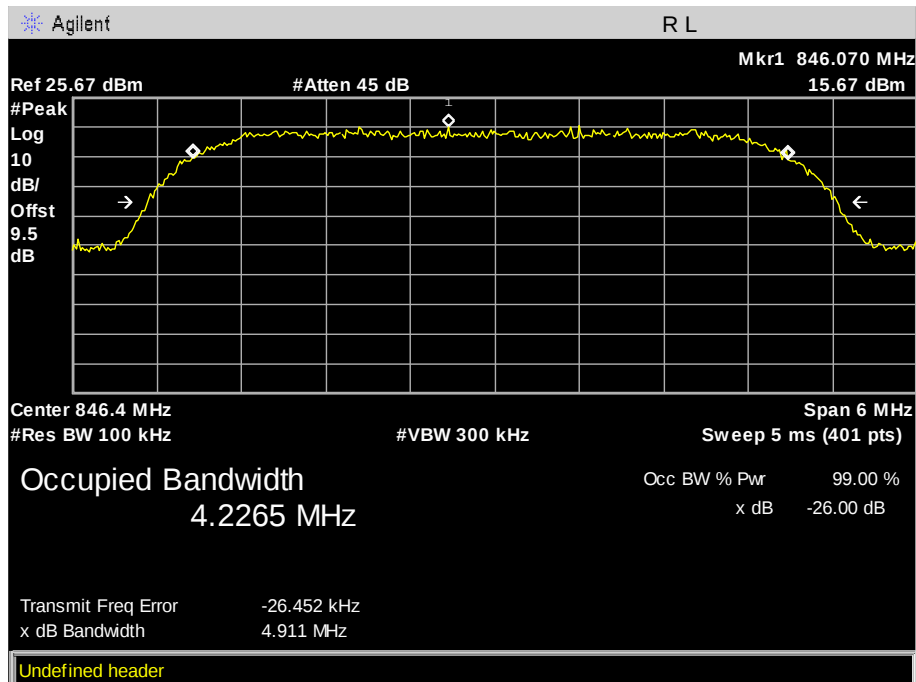




Occupied Bandwidth (99%) UMTS HSDPA BAND V CH 4132

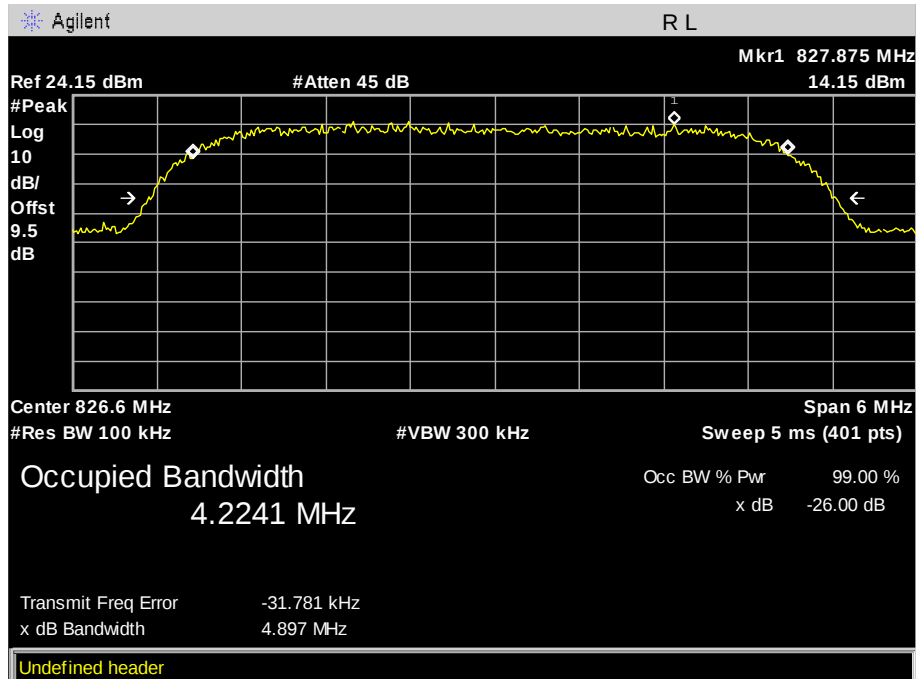


Occupied Bandwidth (99%) UMTS HSDPA BAND V CH 4183

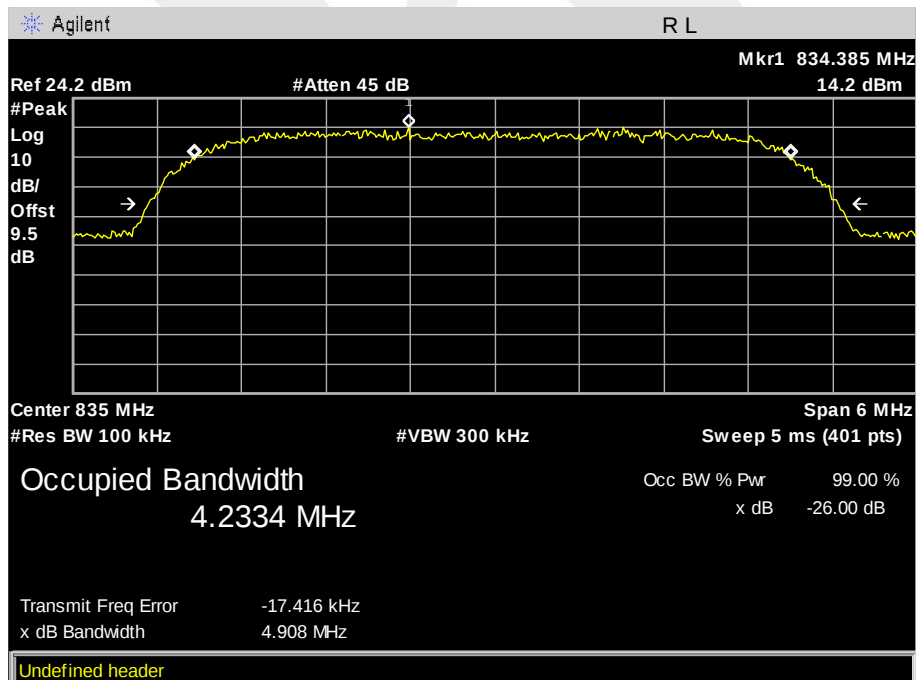




Occupied Bandwidth (99%) UMTS HSDPA BAND V CH 4233

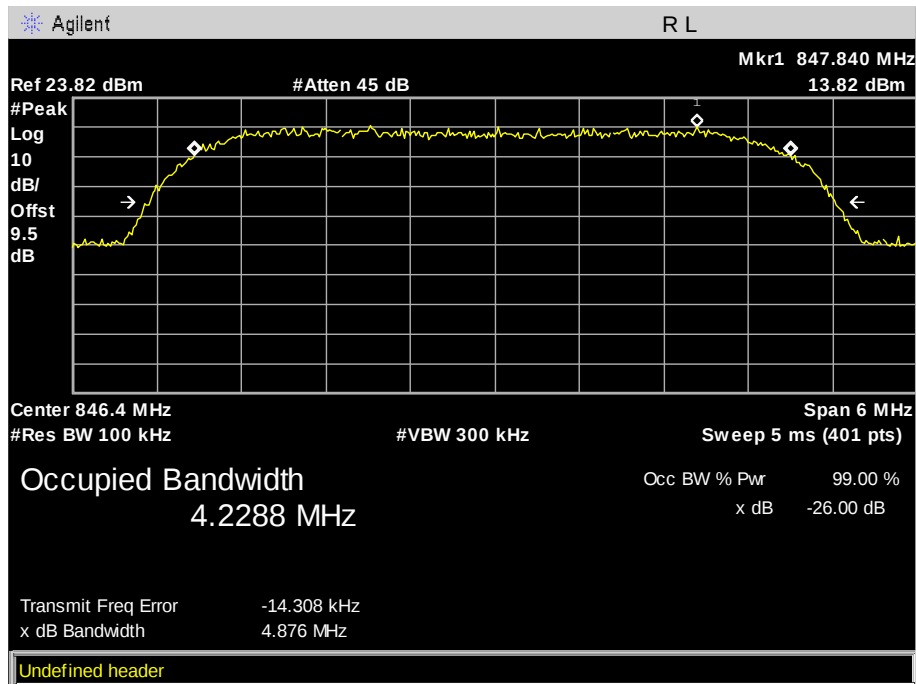




Occupied Bandwidth (99%) UMTS HSUPA BAND V CH 4132

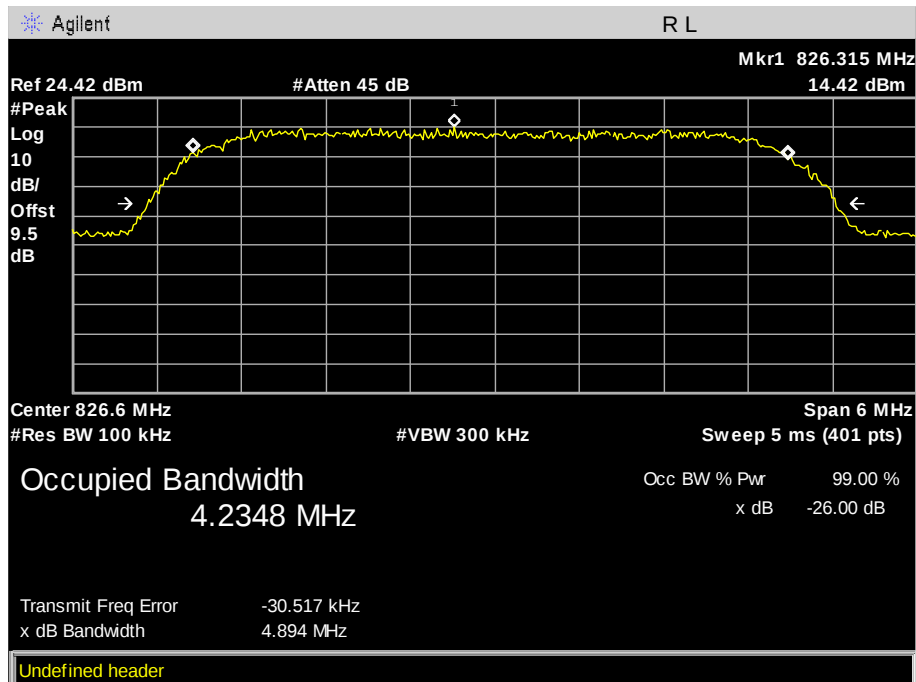


Occupied Bandwidth (99%) UMTS HSUPA BAND V CH 4183

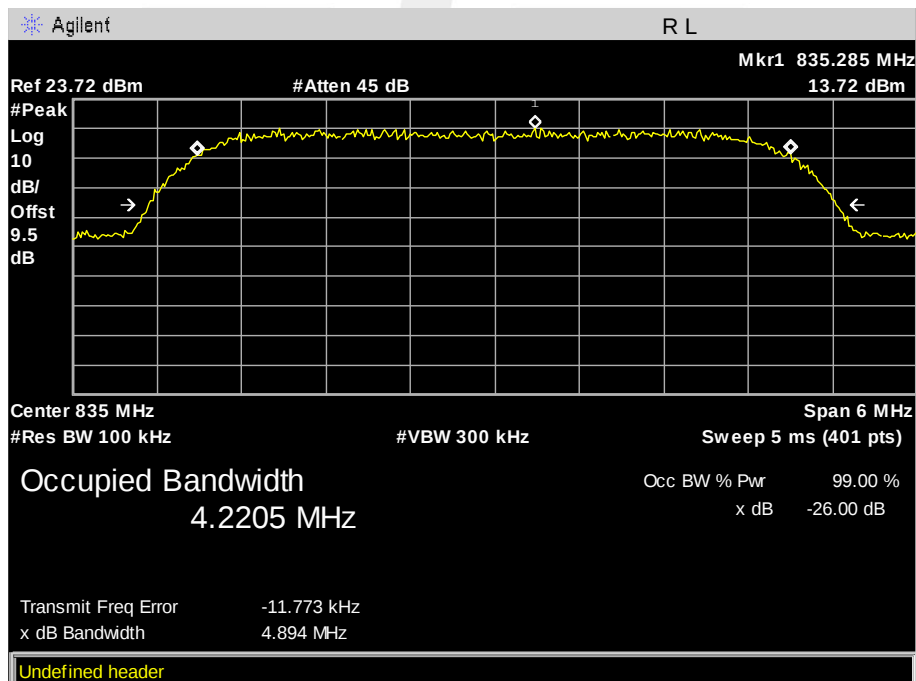




Occupied Bandwidth (99%) UMTS HSUPA BAND V CH 4233

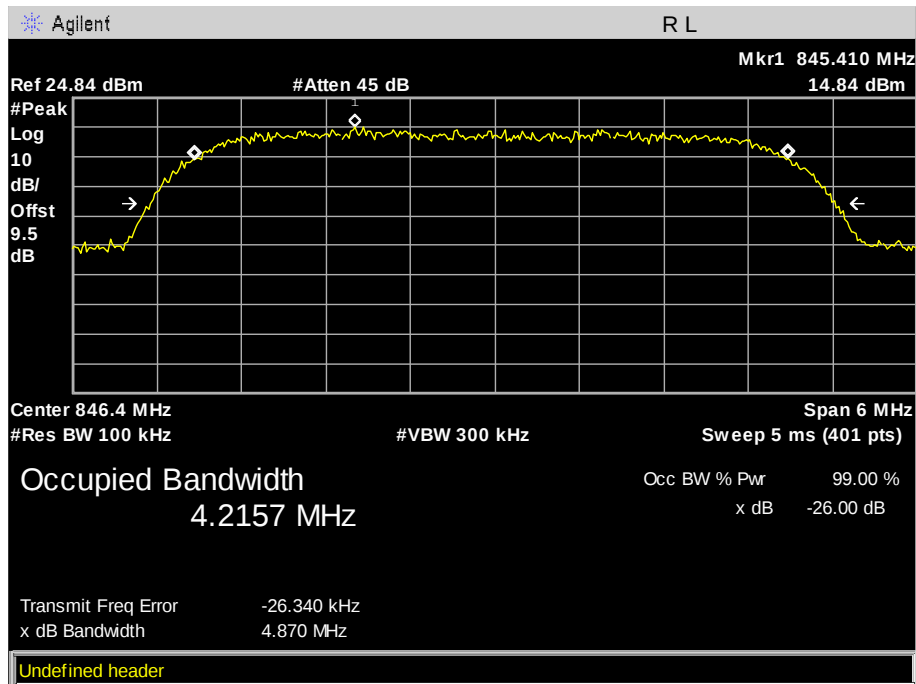




Occupied Bandwidth (99%) UMTS BAND II CH 9262

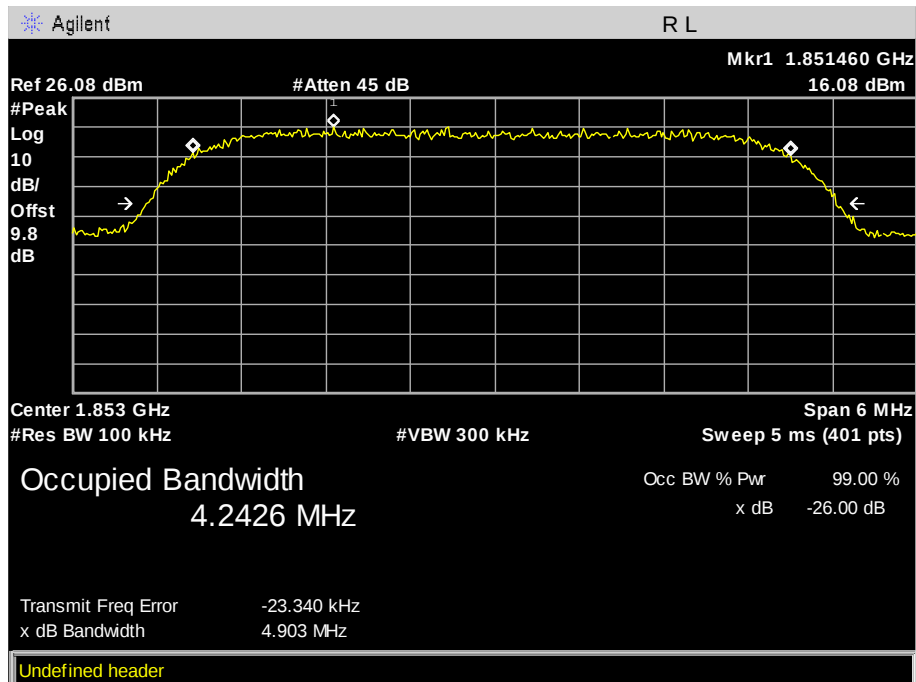


Occupied Bandwidth (99%) UMTS BAND II CH 9400

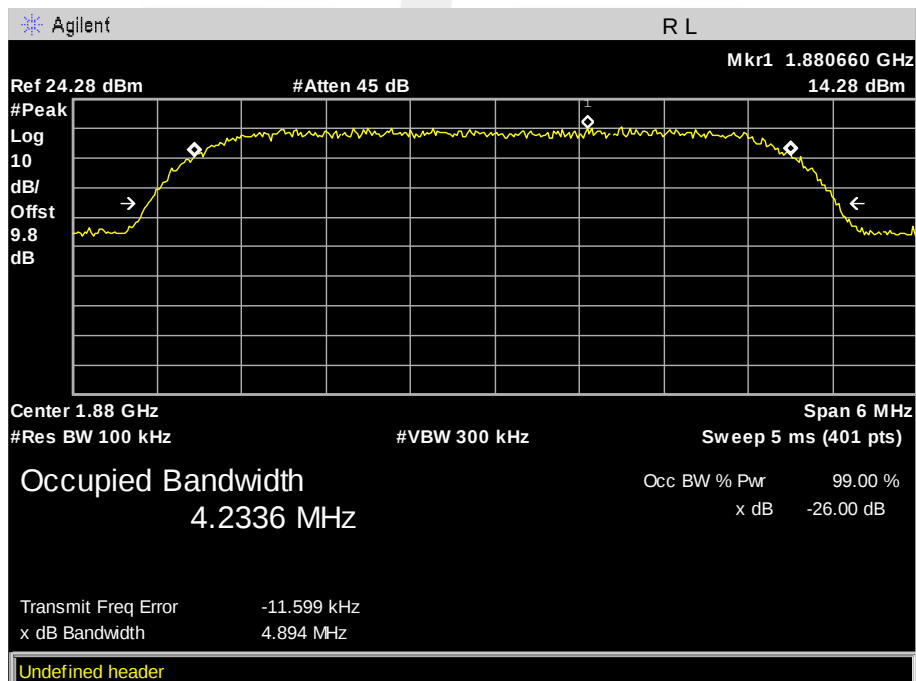




Occupied Bandwidth (99%) UMTS BAND II CH 9538

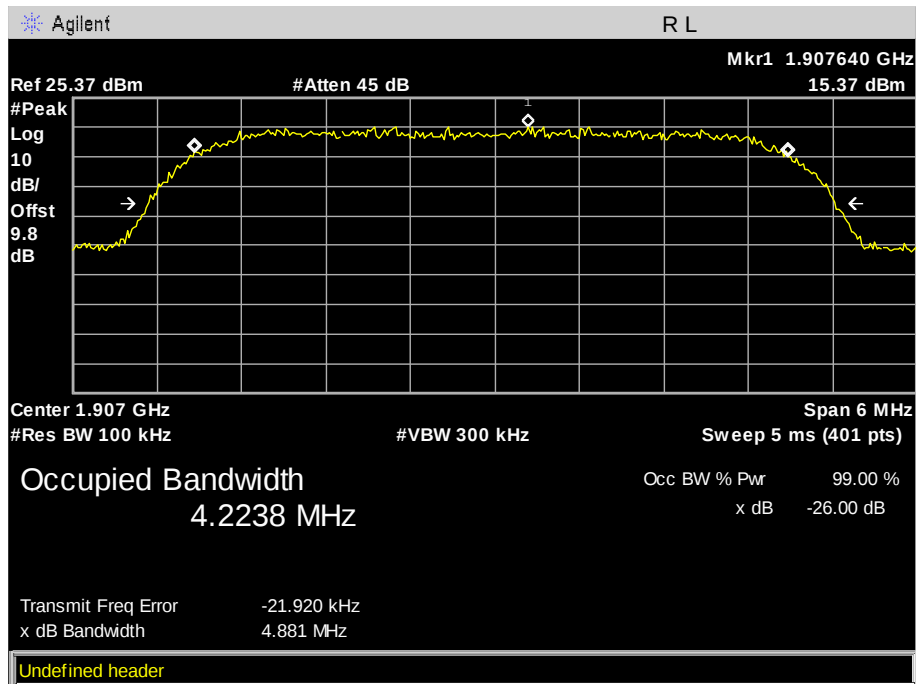




Occupied Bandwidth (99%) UMTS HSDPA BAND II CH 9262

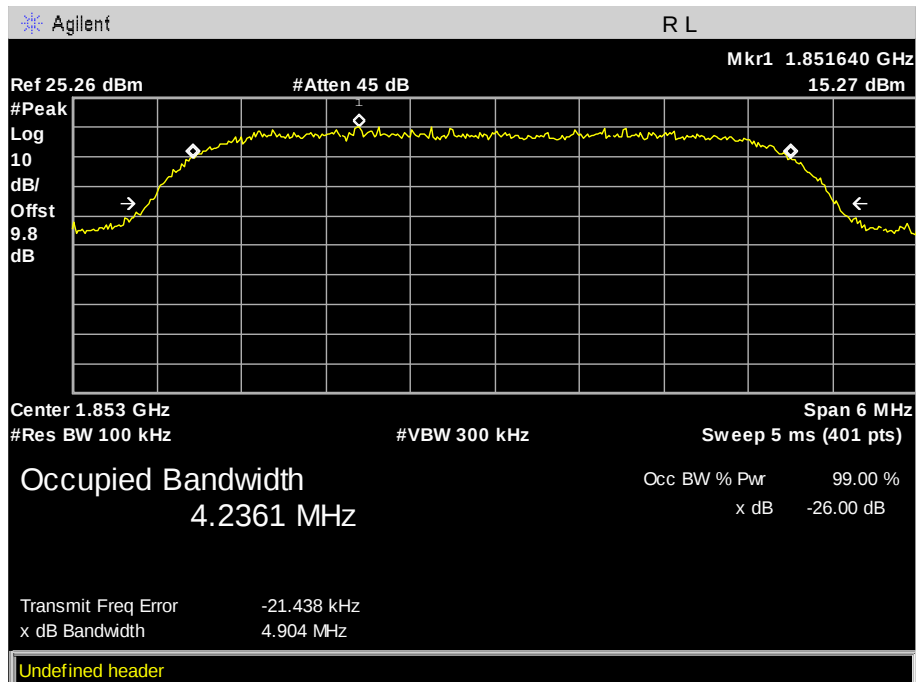


Occupied Bandwidth (99%) UMTS HSDPA BAND II CH 9400

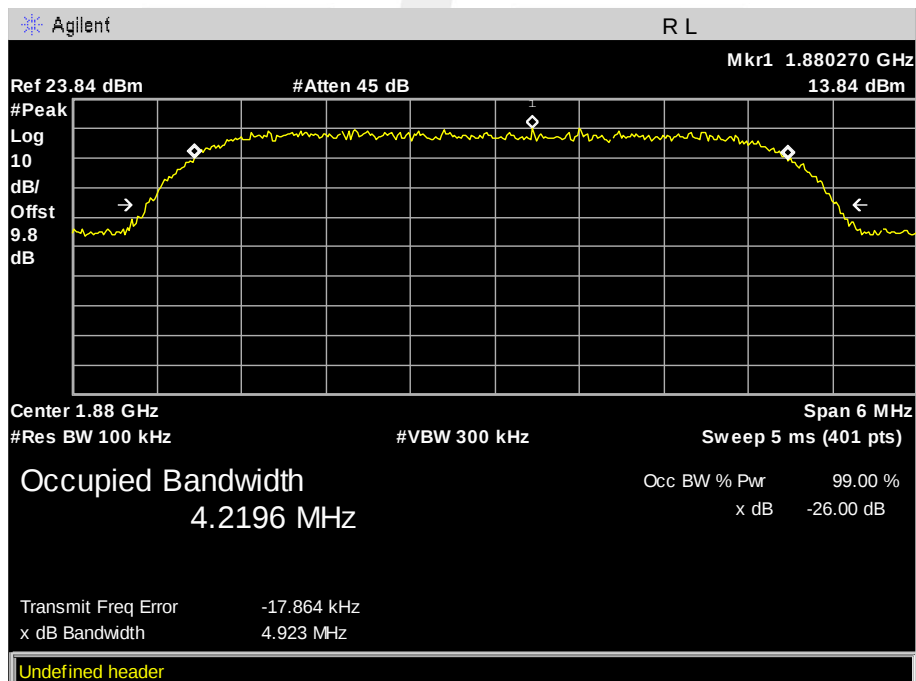




Occupied Bandwidth (99%) UMTS HSDPA BAND II CH 9538

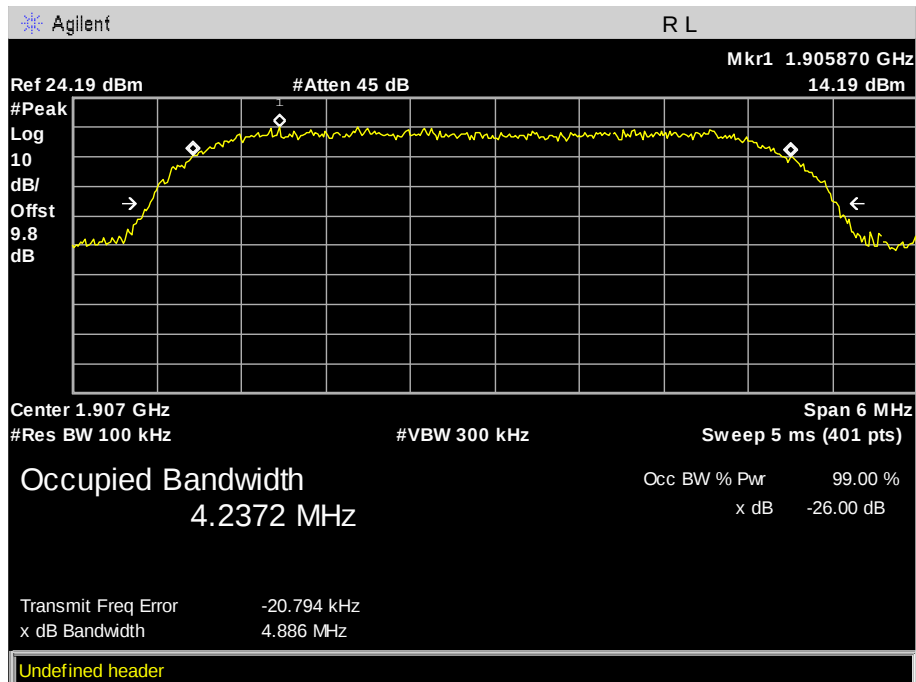




Occupied Bandwidth (99%) UMTS HSUPA BAND II CH 9262

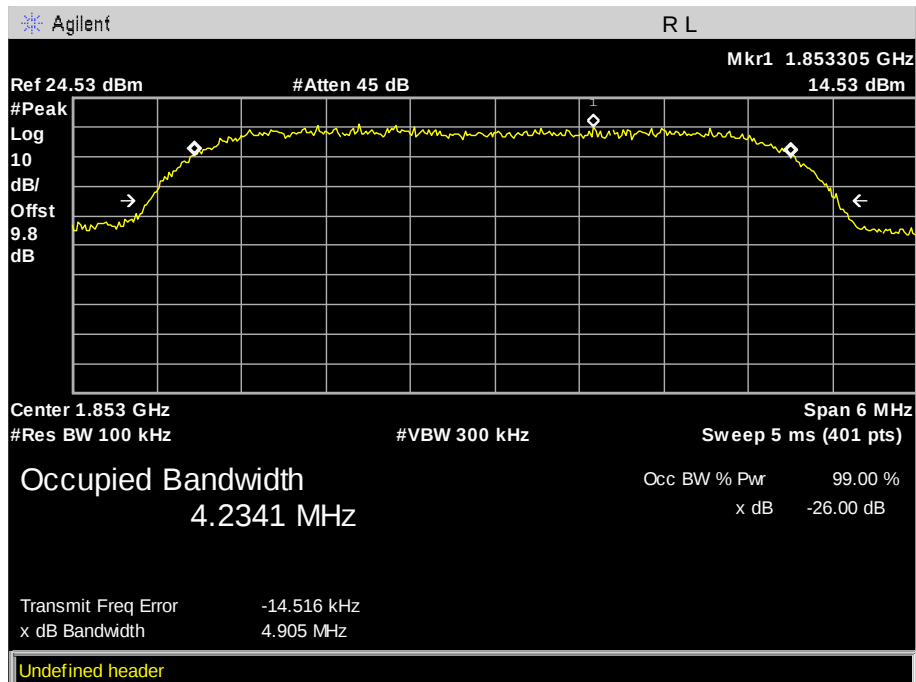


Occupied Bandwidth (99%) UMTS HSUPA BAND II CH 9400

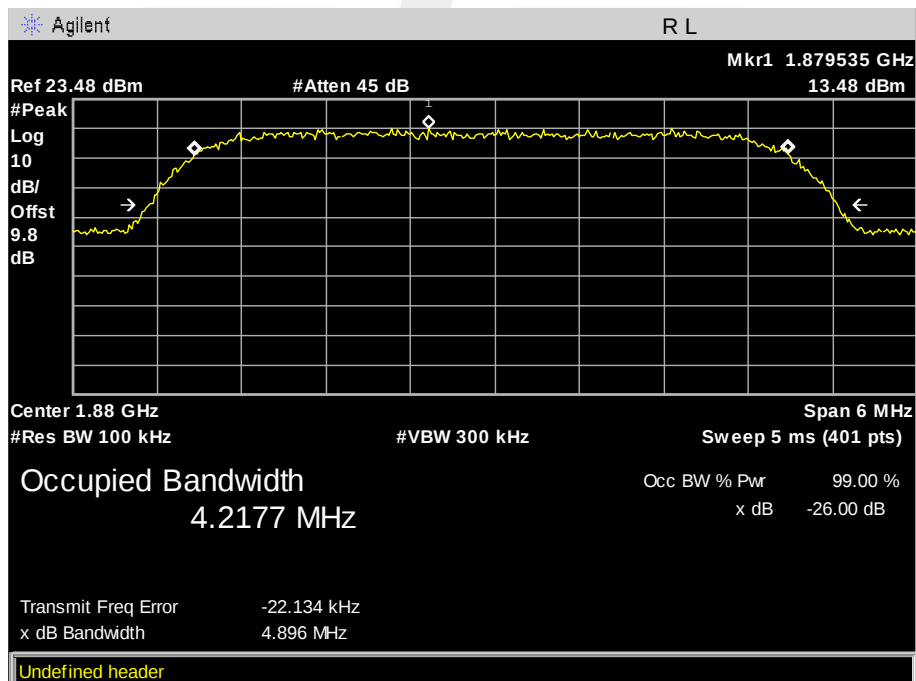




Occupied Bandwidth (99%) UMTS HSUPA BAND II CH 9538

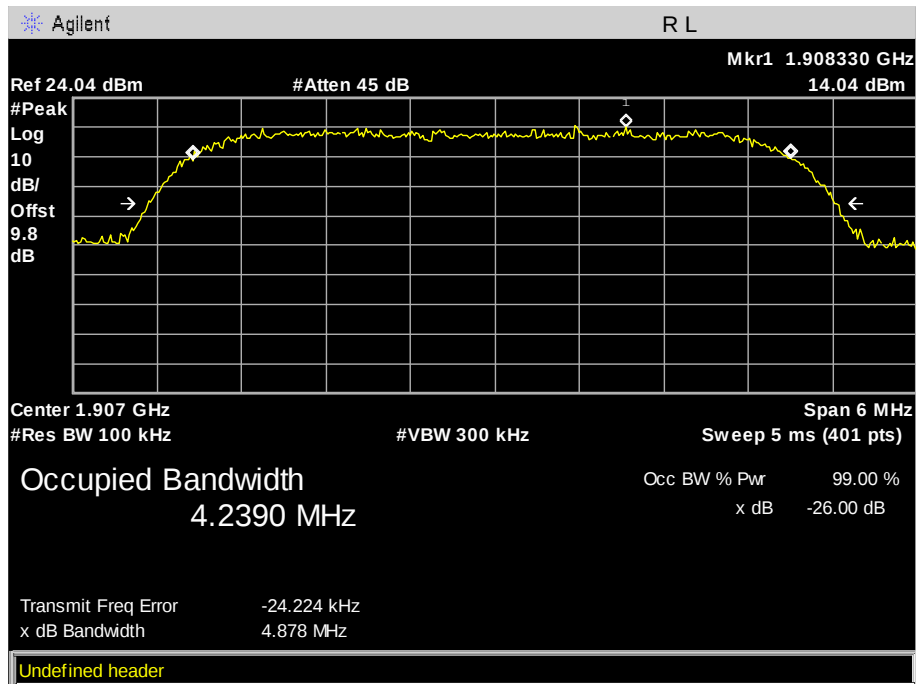




Occupied Bandwidth (99%) UMTS BAND IV CH 1313

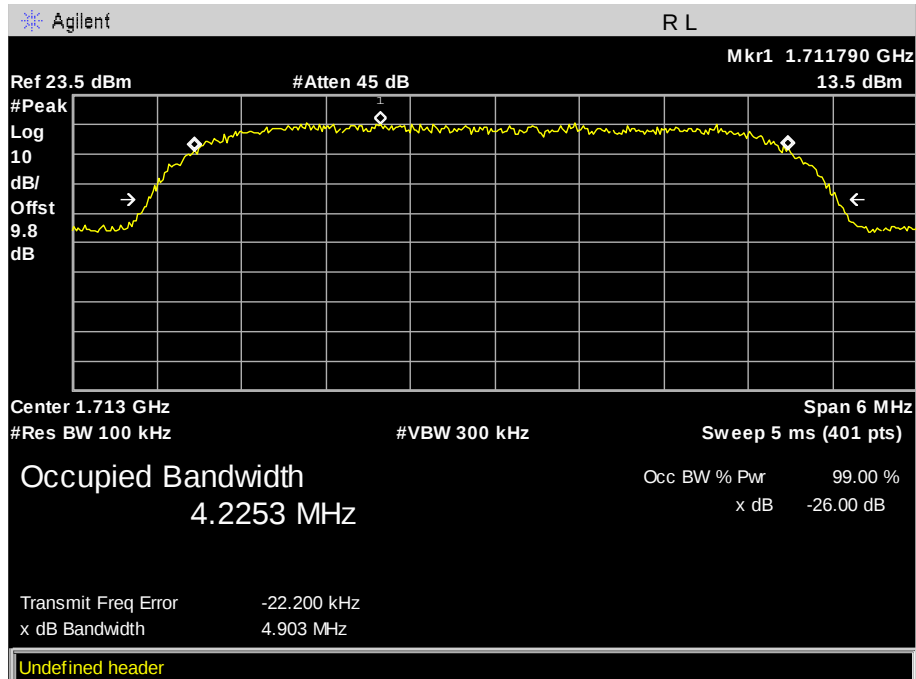


Occupied Bandwidth (99%) UMTS BAND IV CH 1450

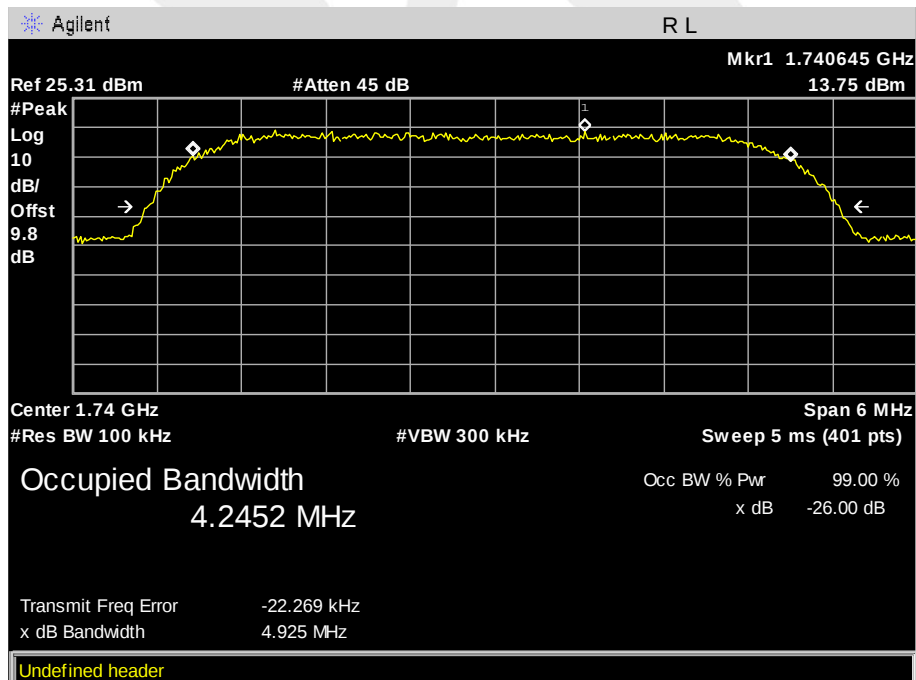




Occupied Bandwidth (99%) UMTS BAND IV CH 1512

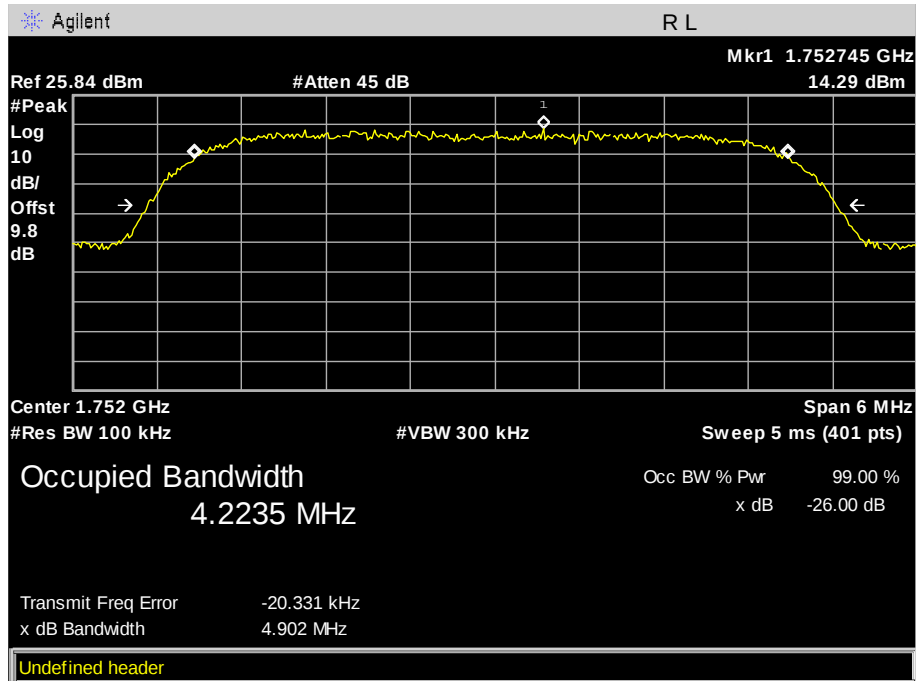




Occupied Bandwidth (99%) UMTS HSDPA BAND IV CH 1313

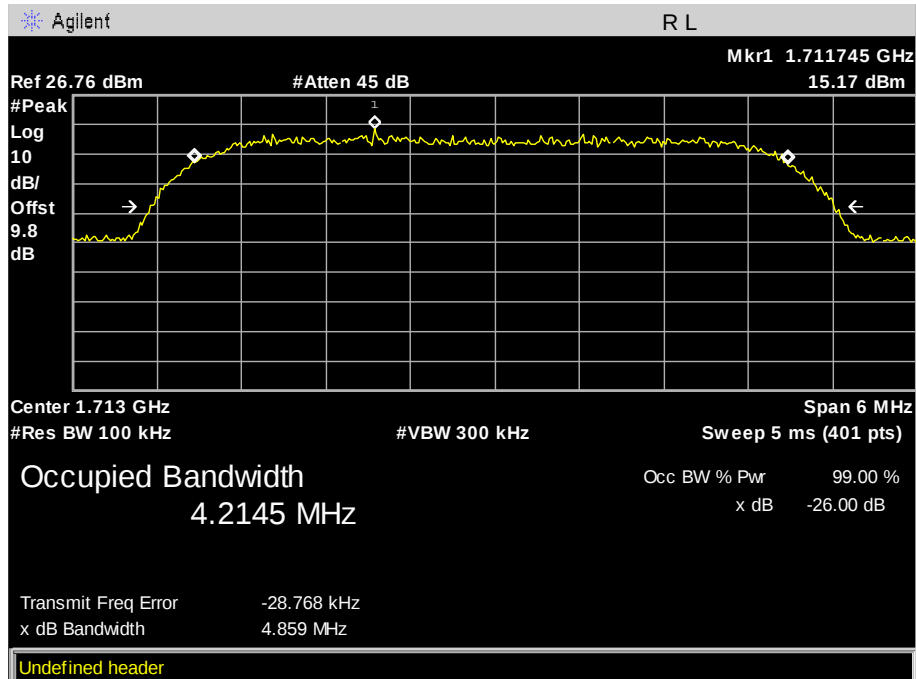


Occupied Bandwidth (99%) UMTS HSDPA BAND IV CH 1450

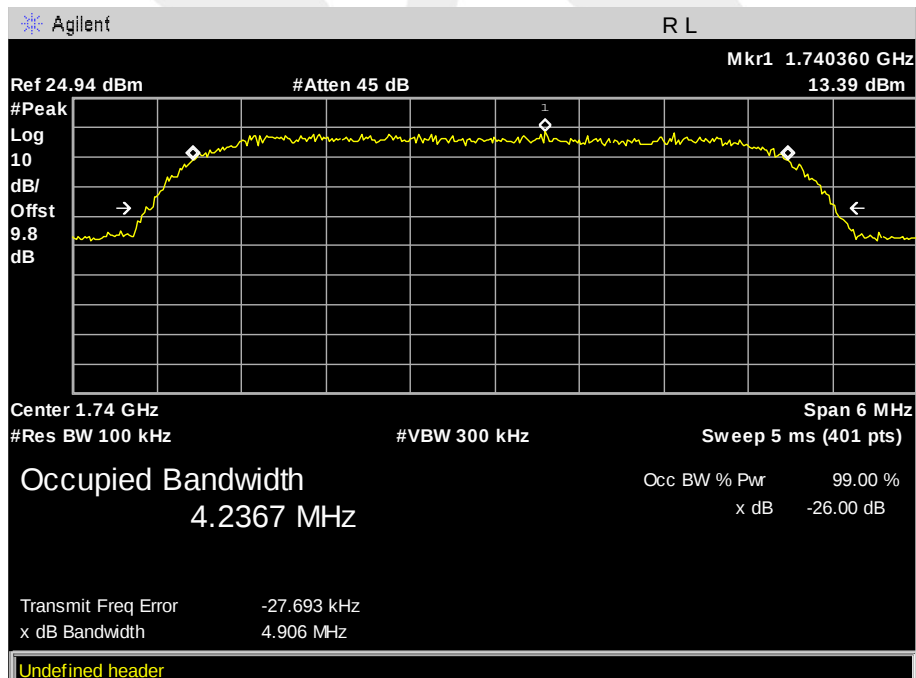




Occupied Bandwidth (99%) UMTS HSDPA BAND IV CH 1512

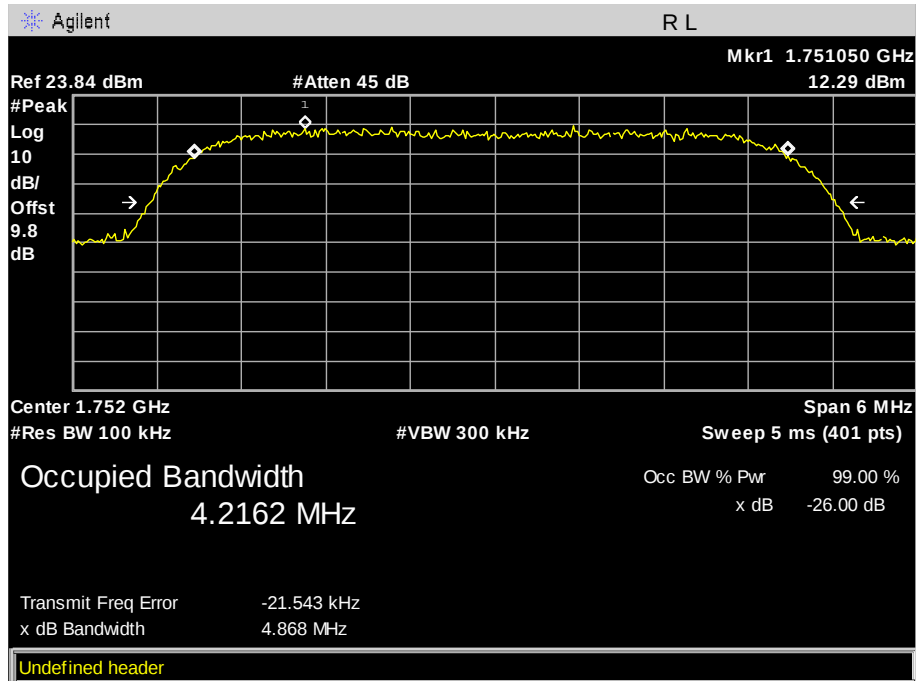




Occupied Bandwidth (99%) UMTS HSUPA BAND IV CH 1313

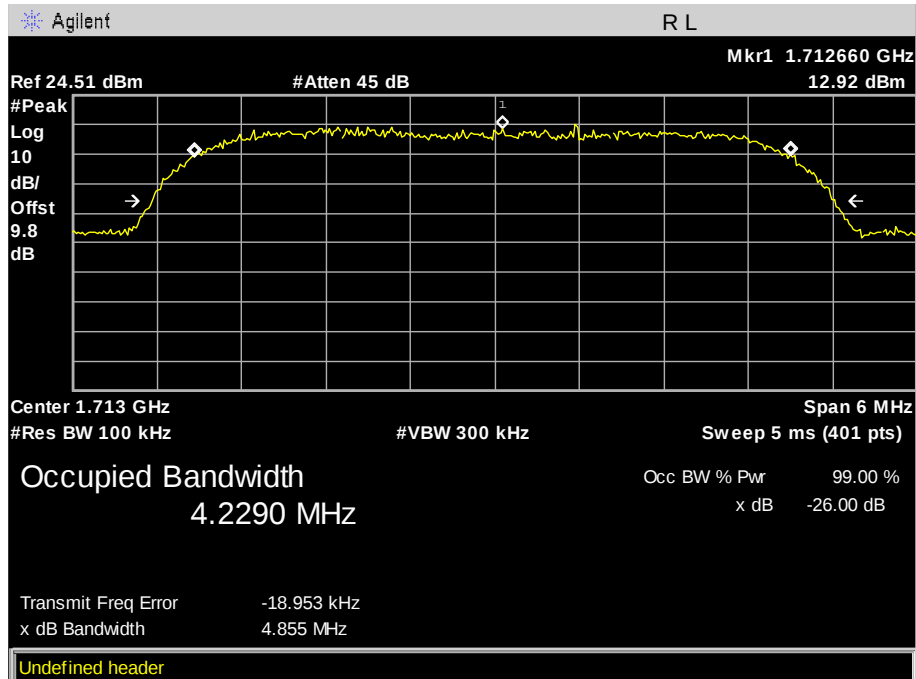


Occupied Bandwidth (99%) UMTS HSUPA BAND IV CH 1450

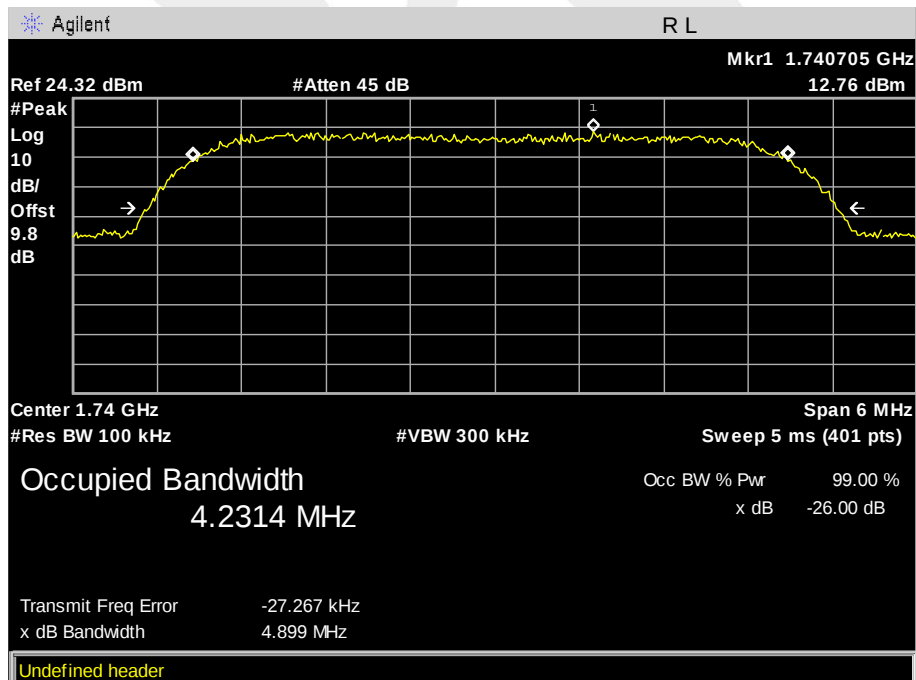



Occupied Bandwidth (99%) UMTS HSUPA BAND IV CH 1512

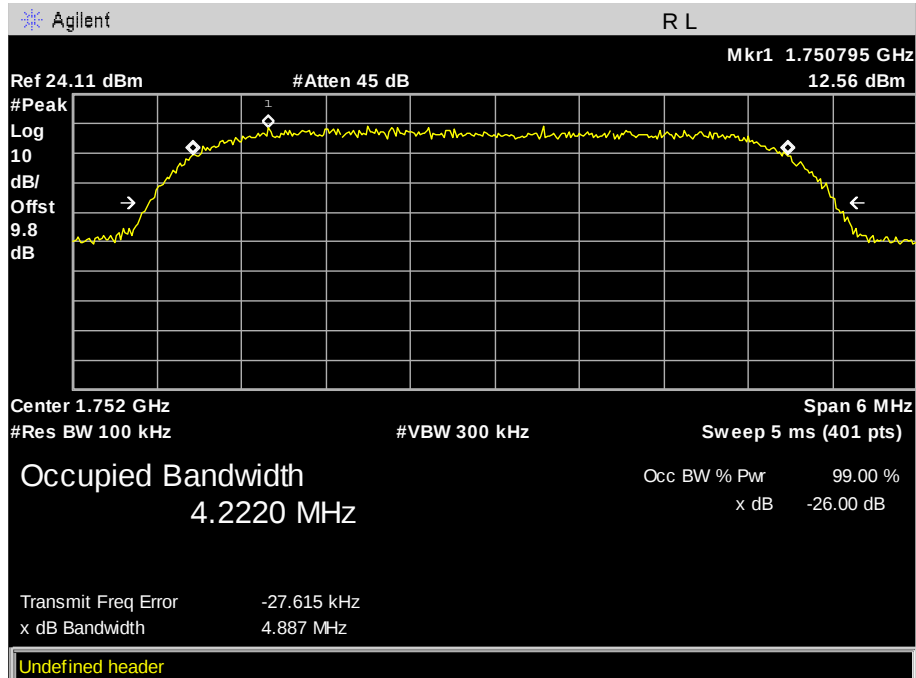




APPENDIX III


TEST PLOTS FOR BAND EDGES

Low Band Edge GSM 850 BAND CH 128

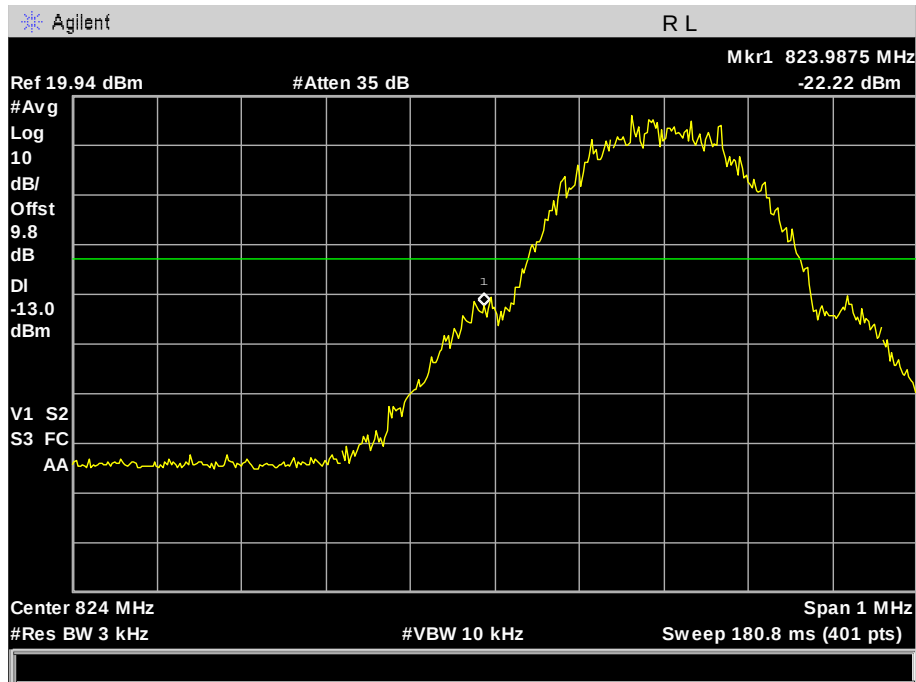

Note: Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB


High Band Edge GSM 850 BAND CH 251

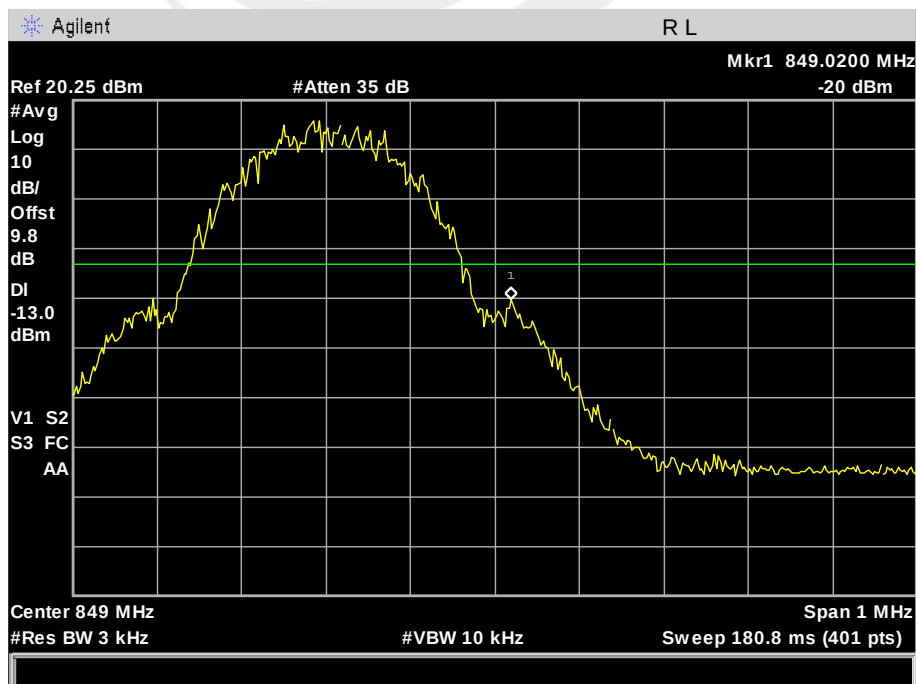

Note: Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB




Low Band Edge GPRS 850 BAND CH 128

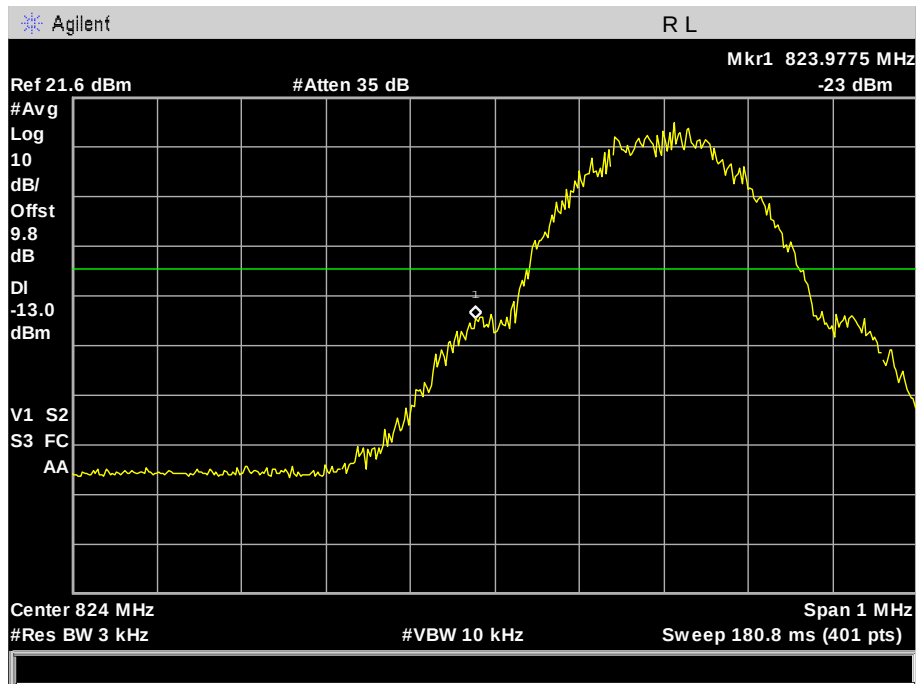

Note: Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB


High Band Edge GPRS 850 BAND CH 251

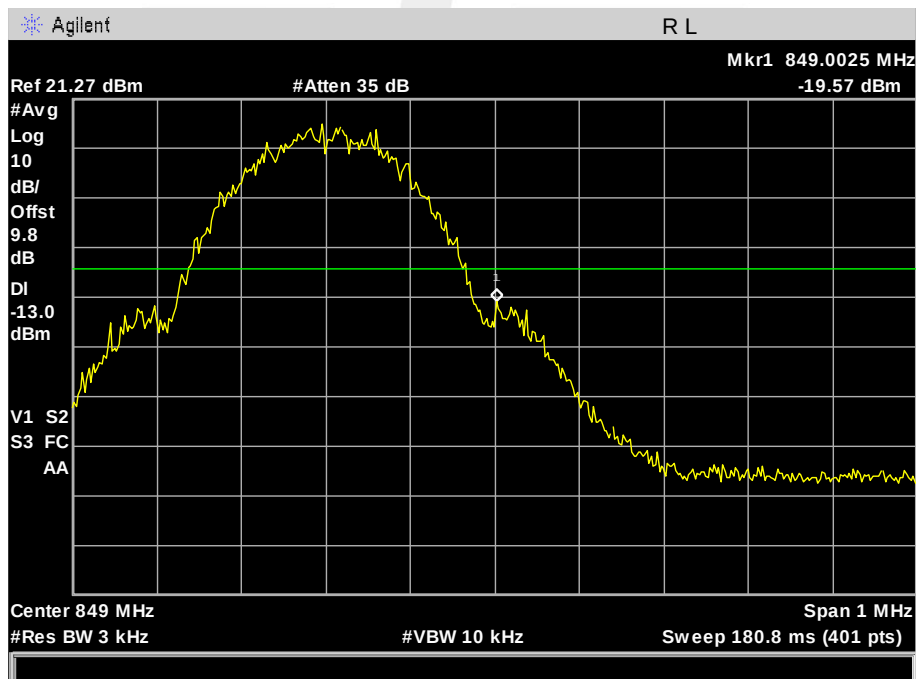

Note: Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB




Low Band Edge EDGE 850 BAND CH 128

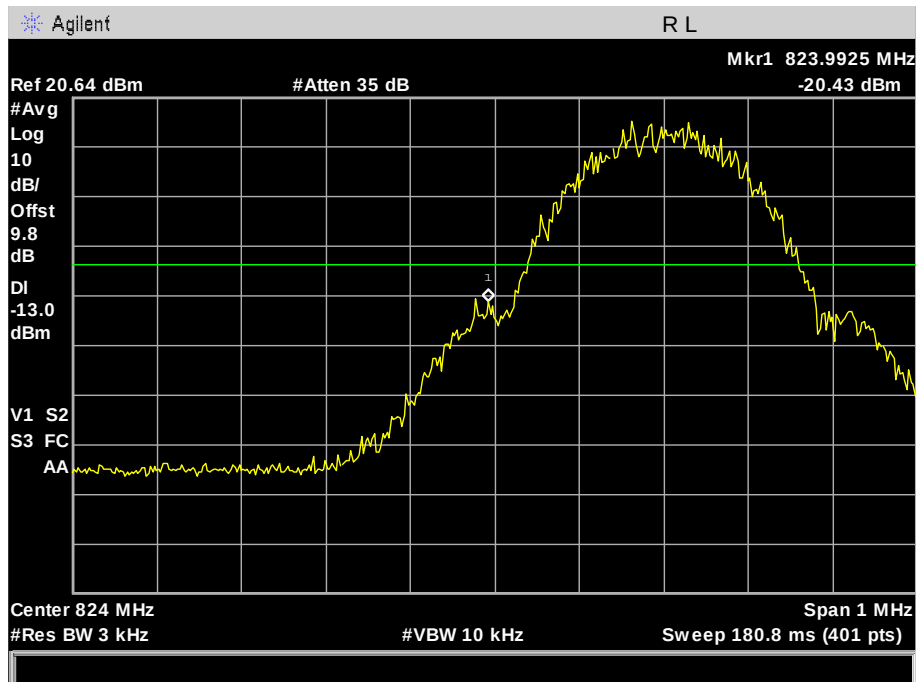

Note: Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB


High Band Edge EDGE 850 BAND CH 251

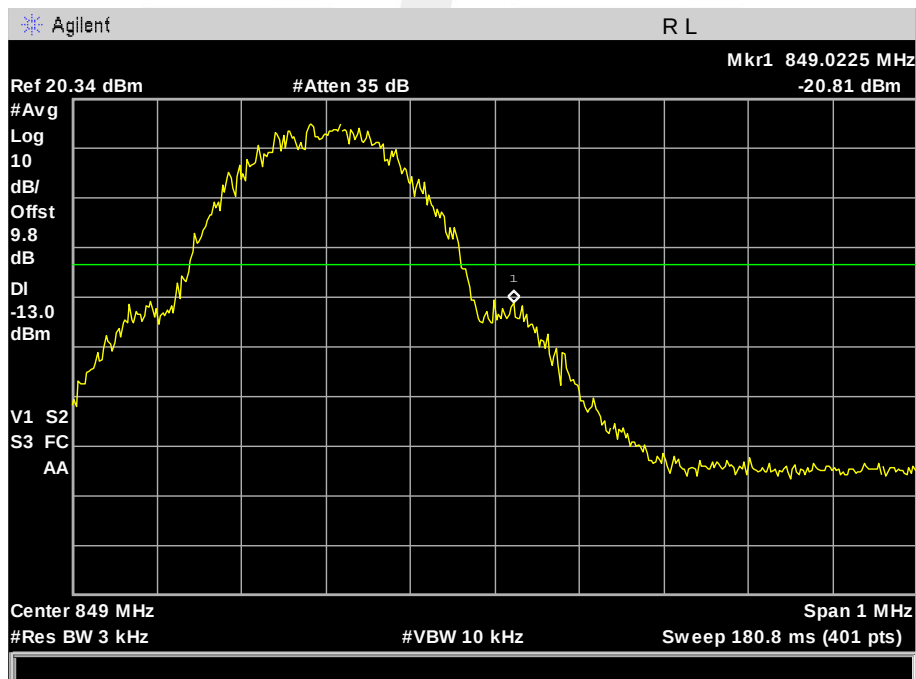

Note: Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB




Low Band Edge PCS 1900 BAND CH 512

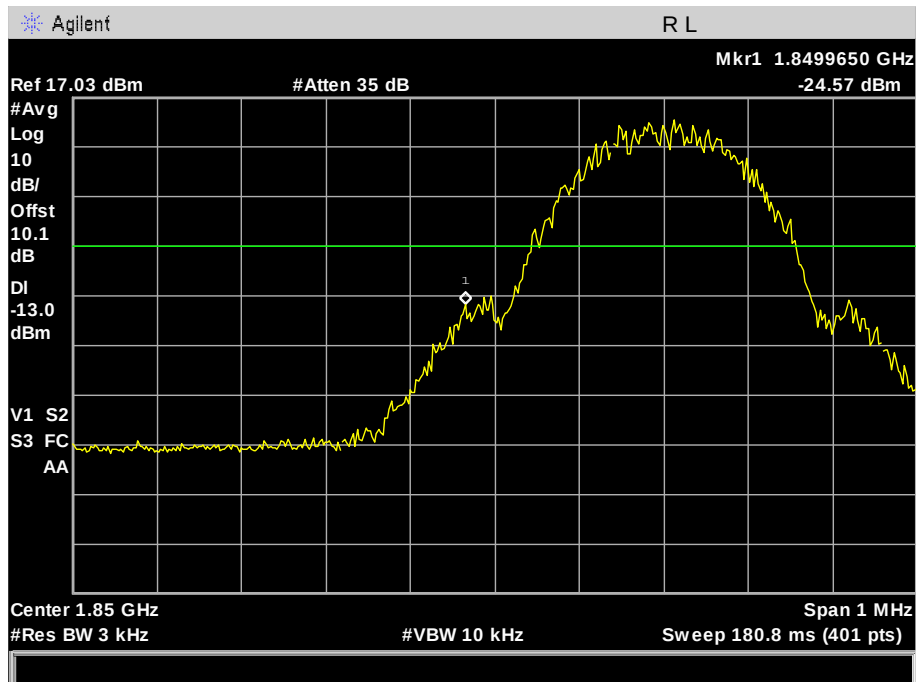

Note: Offset=Cable loss(9.8)+10log(3.2/3)=9.8+0.3=10.1 dB


High Band Edge PCS 1900 BAND CH 810

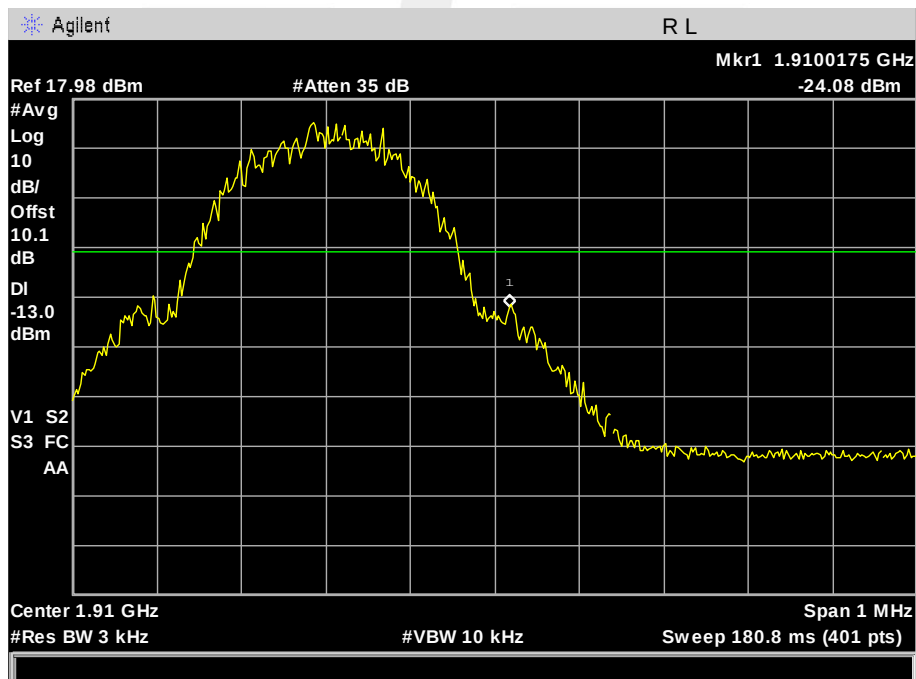

Note: Offset=Cable loss(9.8)+10log(3.2/3)=9.8+0.3=10.1 dB




Low Band Edge GPRS 1900 BAND CH 512

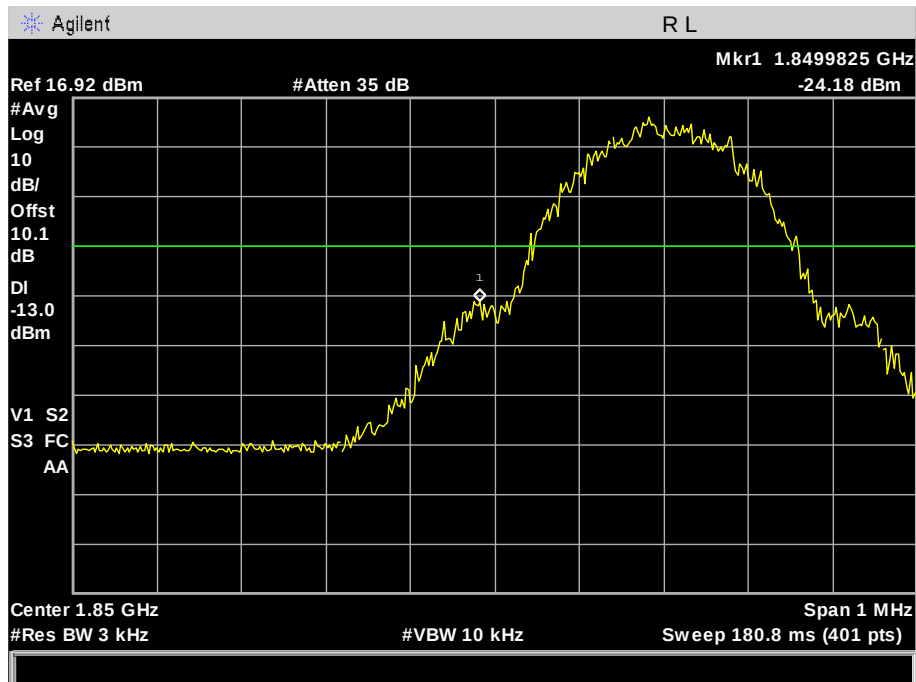

Note: Offset=Cable loss(9.8)+10log(3.2/3)=9.8+0.3=10.1 dB


High Band Edge GPRS 1900 BAND CH 810

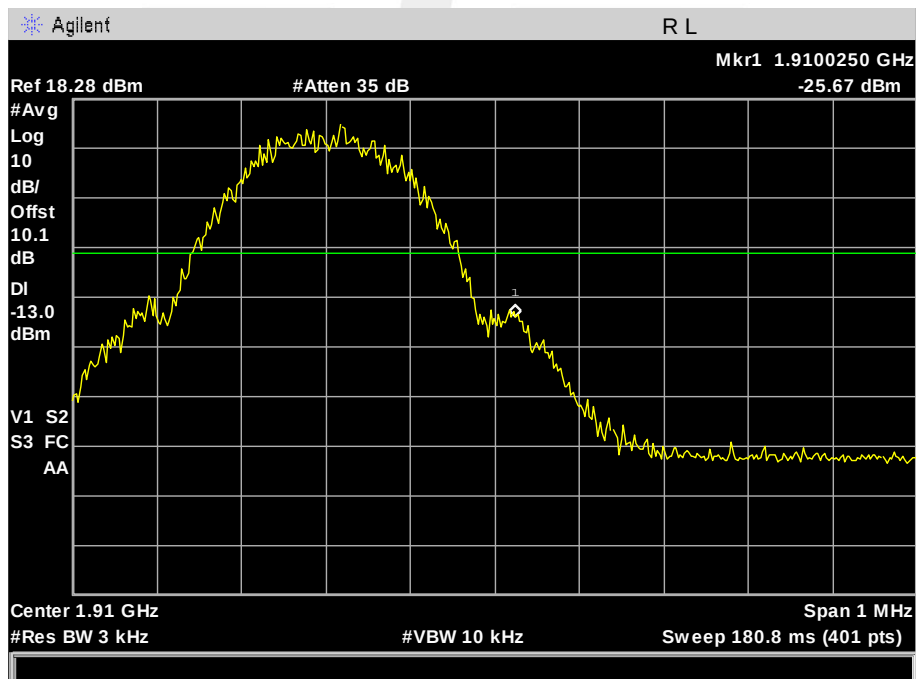

Note: Offset=Cable loss(9.8)+10log(3.2/3)=9.8+0.3=10.1 dB




Low Band Edge EDGE 1900 BAND CH 512

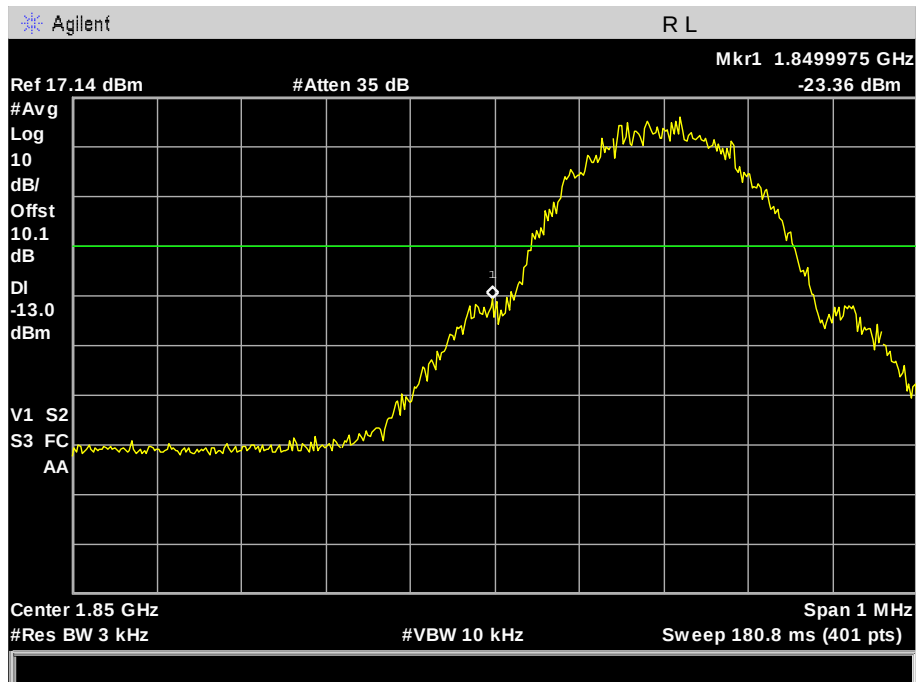

Note: Offset=Cable loss(9.8)+10log(3.2/3)=9.8+0.3=10.1 dB


High Band Edge EDGE 1900 BAND CH 810

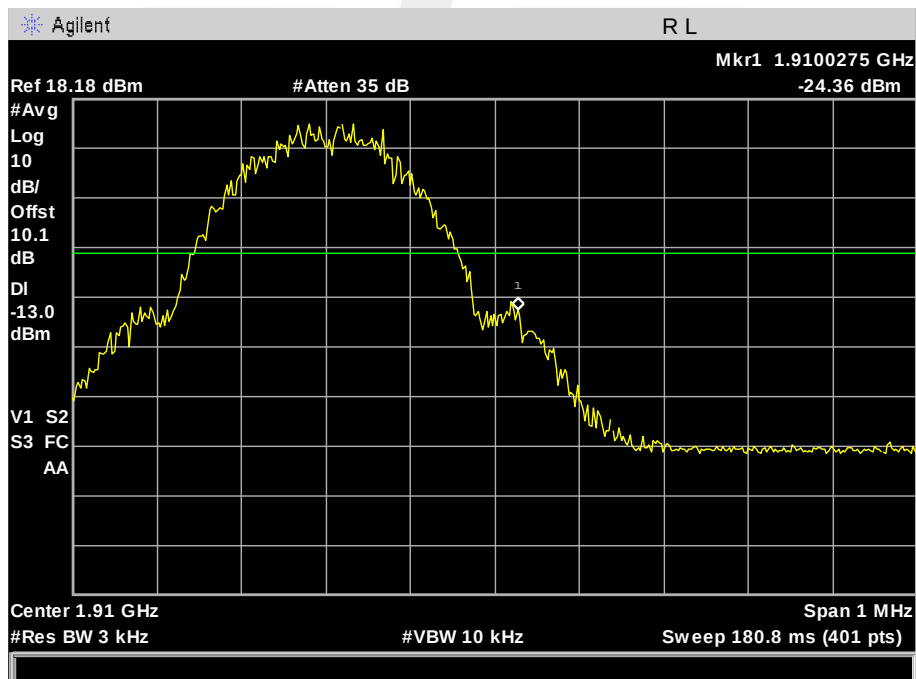


Note: Offset=Cable loss(9.8)+10log(3.2/3)=9.8+0.3=10.1 dB



Low Band Edge UMTS BAND V CH 4132

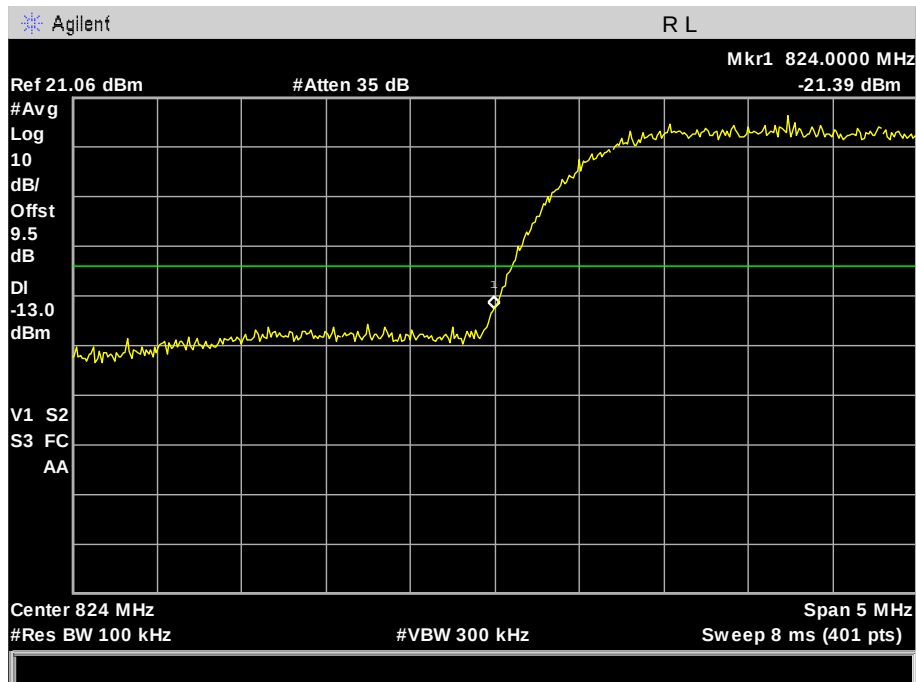


High Band Edge UMTS BAND V CH 4233

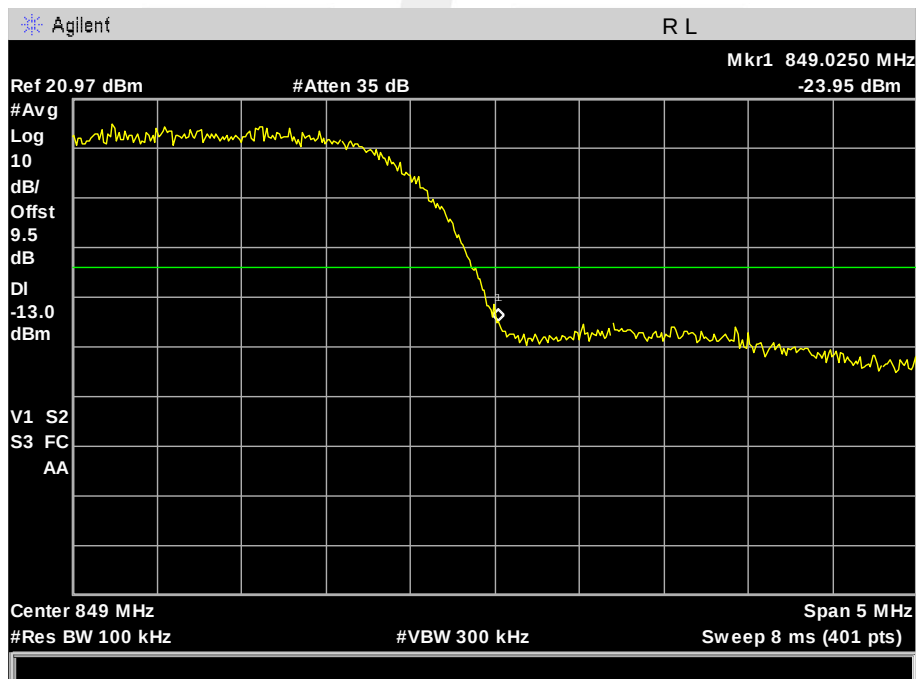




Low Band Edge HSDPA BAND V CH 4132

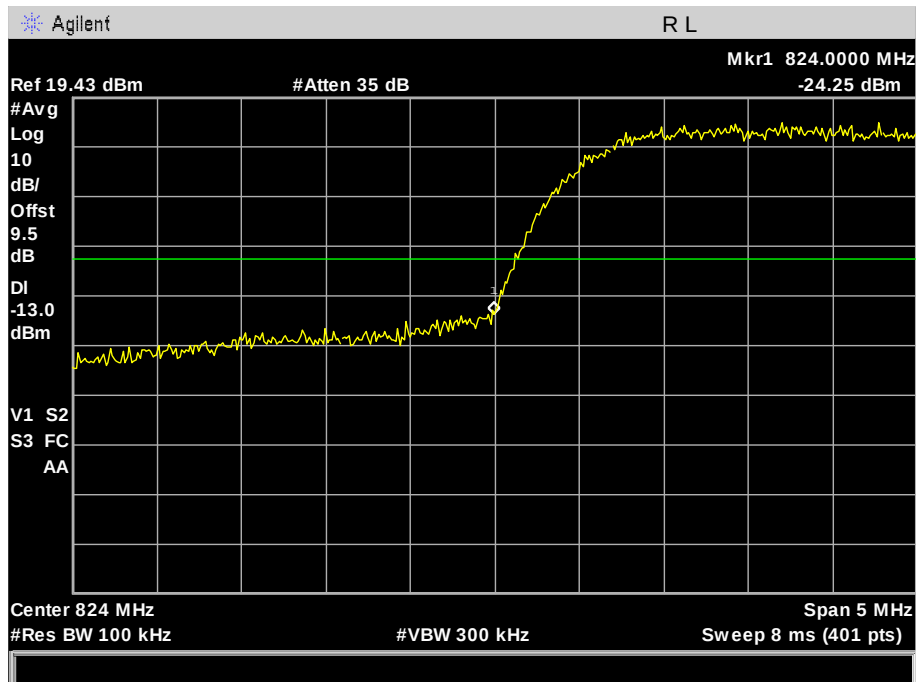


High Band Edge HSDPA BAND V CH 4233

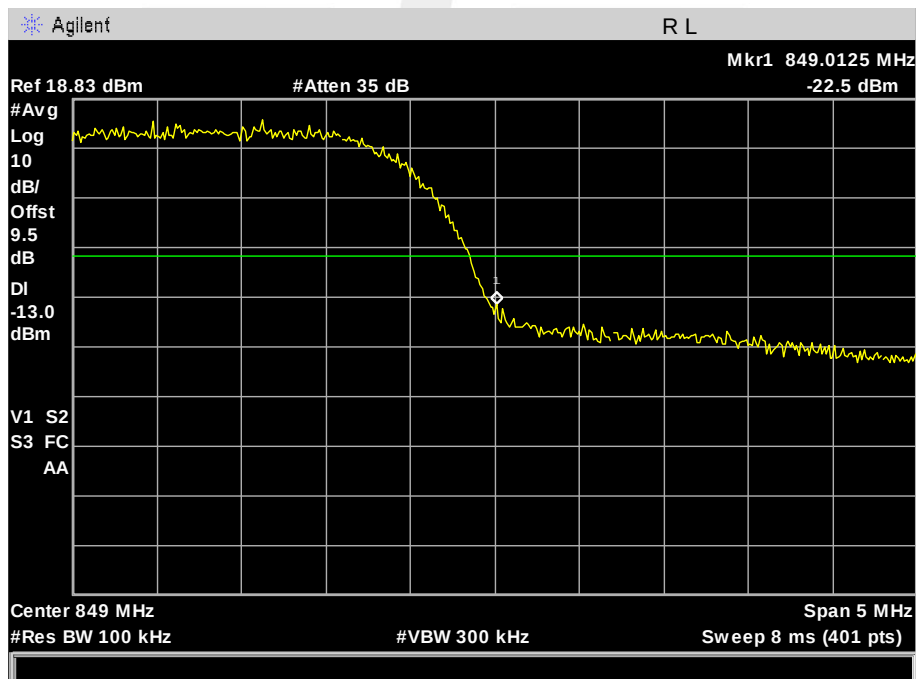




Low Band Edge HSUPA BAND V CH 4132

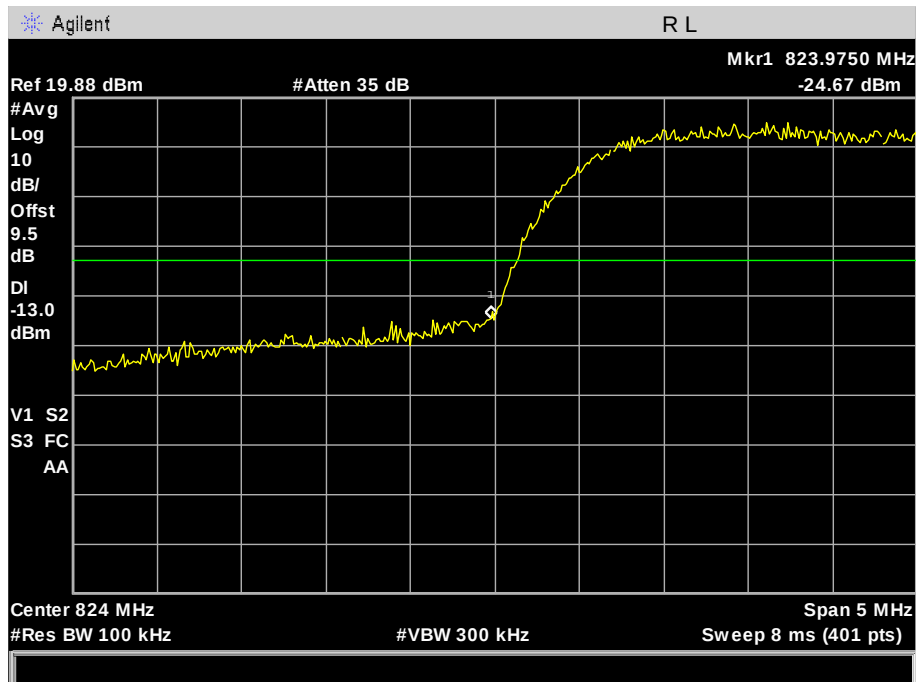


High Band Edge HSUPA BAND V CH 4233

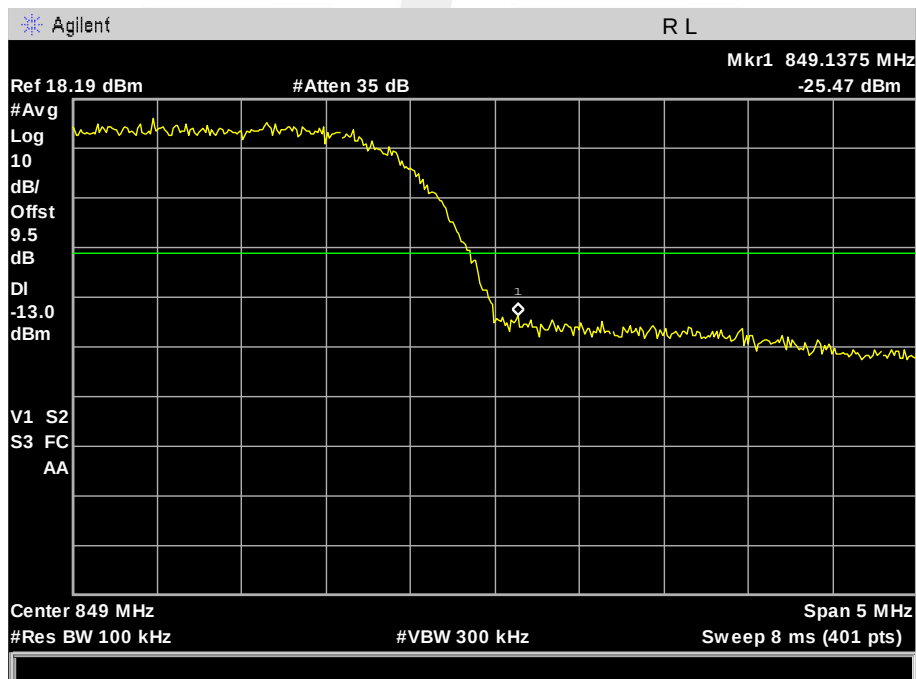




Low Band Edge UMTS BAND II CH 9262

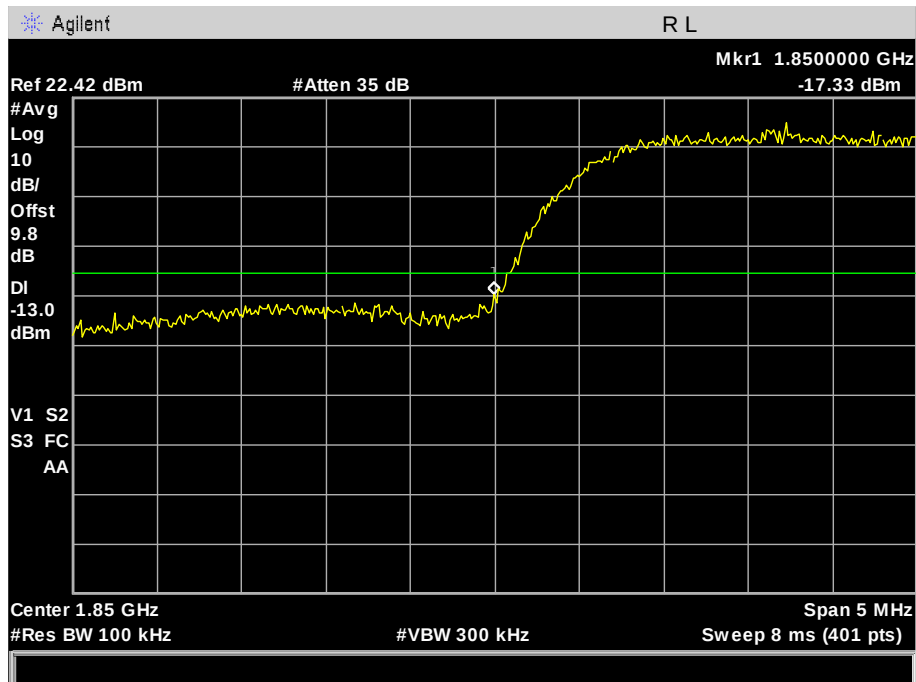


High Band Edge UMTS BAND II CH 9538

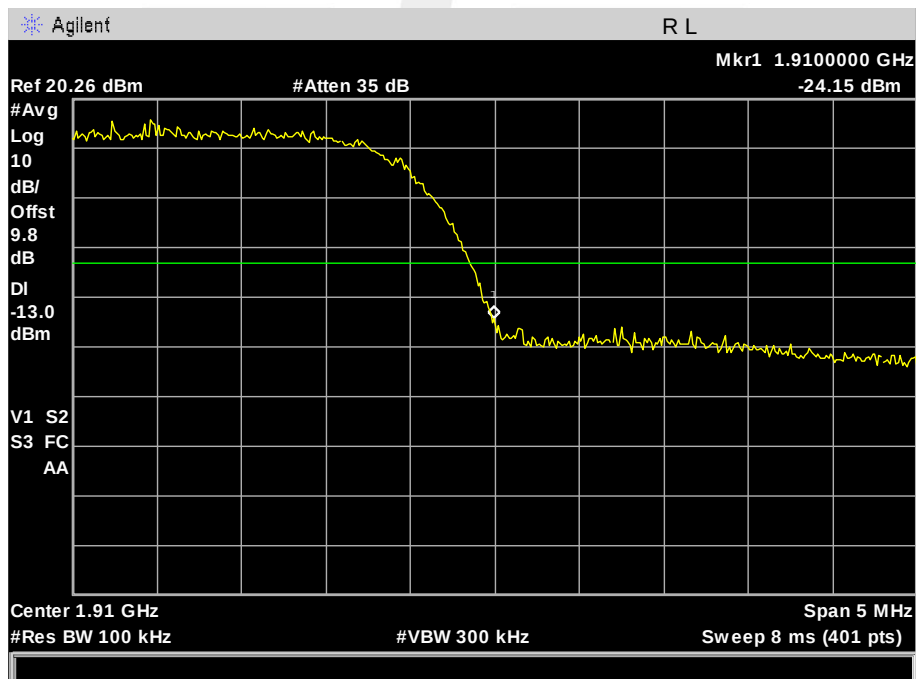




Low Band Edge HSDPA BAND II CH 9262

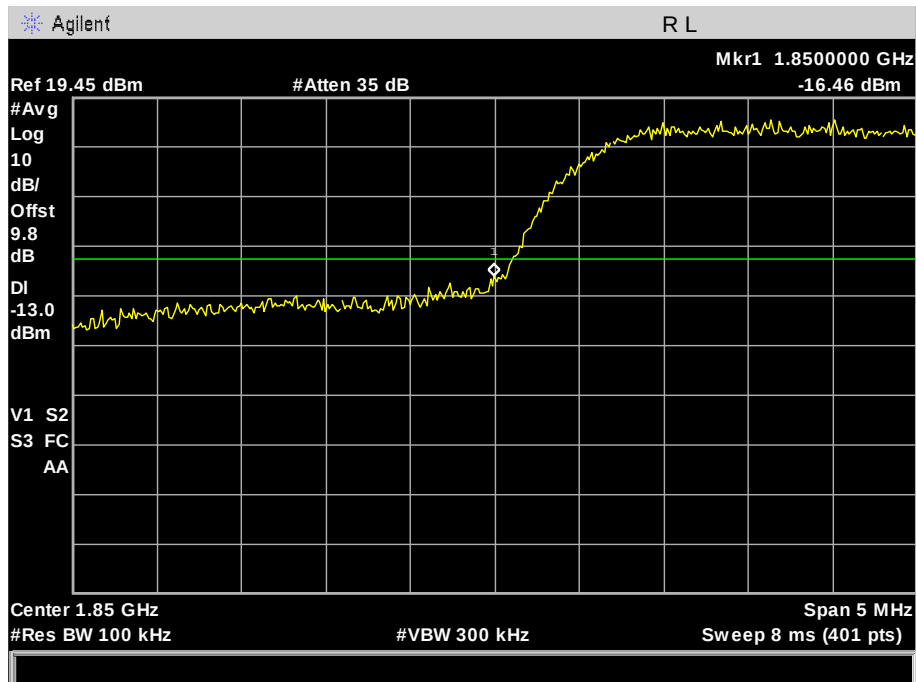


Low Band Edge HSDPA BAND II CH 9538

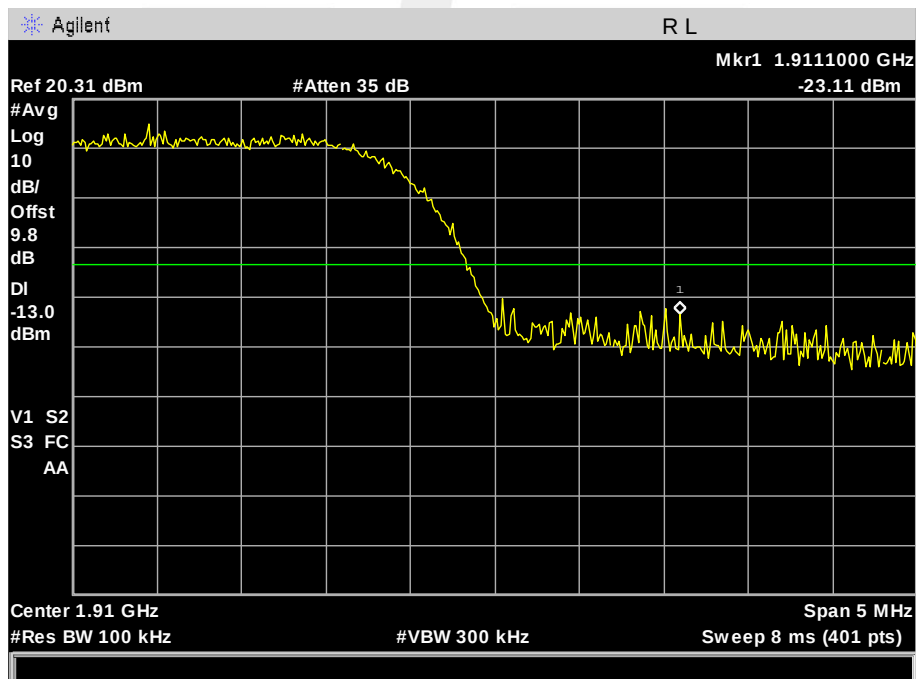




Low Band Edge HSUPA BAND II CH 9262

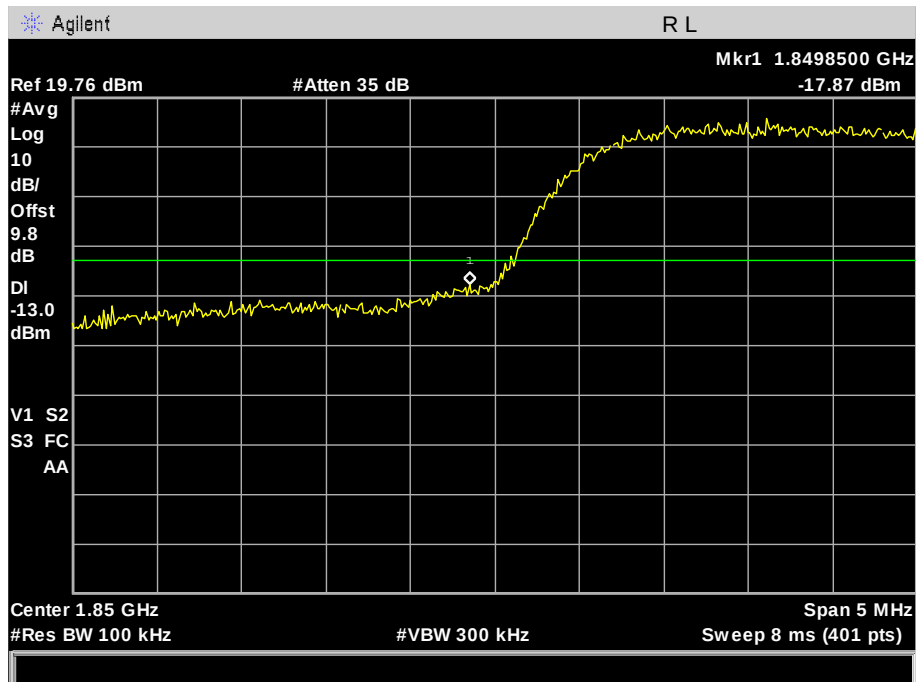


High Band Edge HSUPA BAND II CH 9538

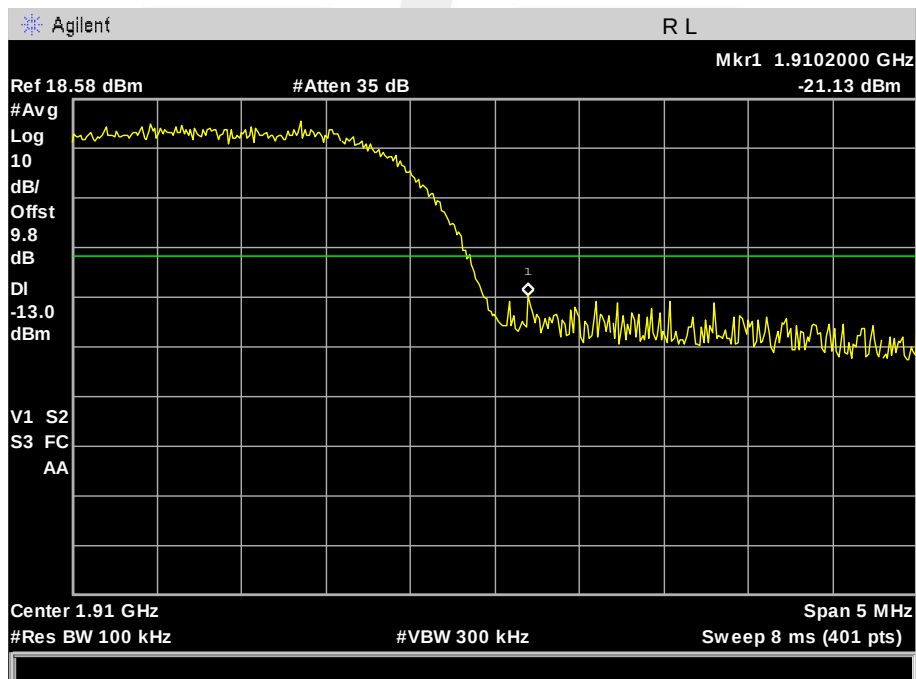




Low Band Edge UMTS BAND IV CH 1313

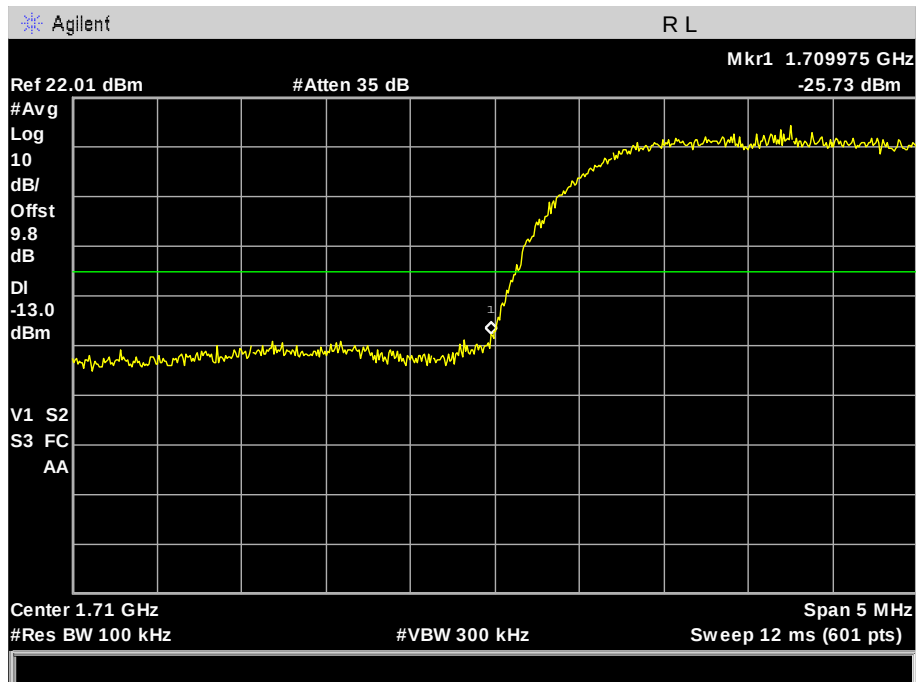


High Band Edge UMTS BAND IV CH 1512

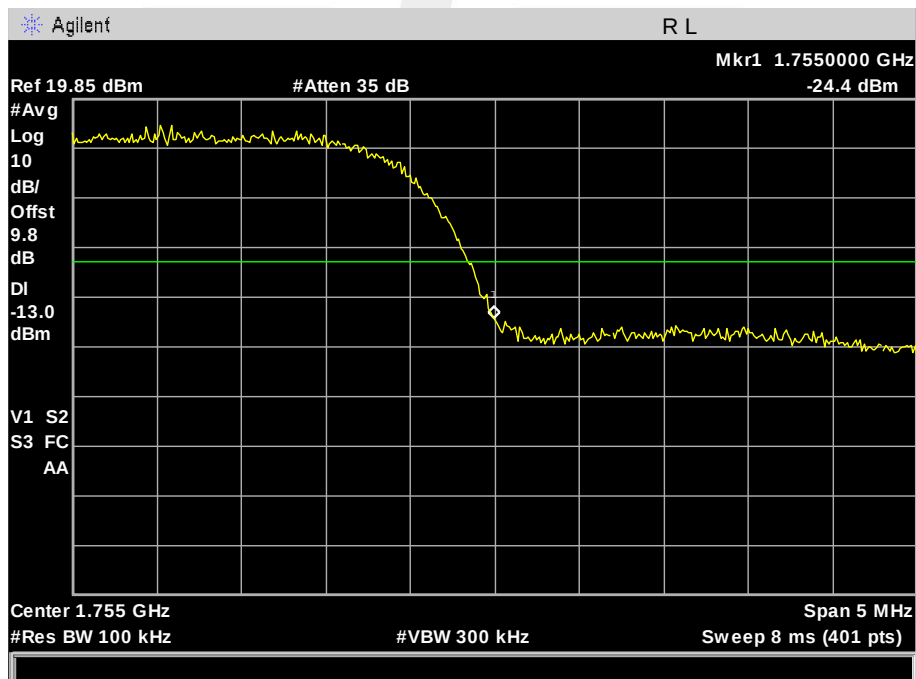




Low Band Edge HSDPA BAND IV CH 1313

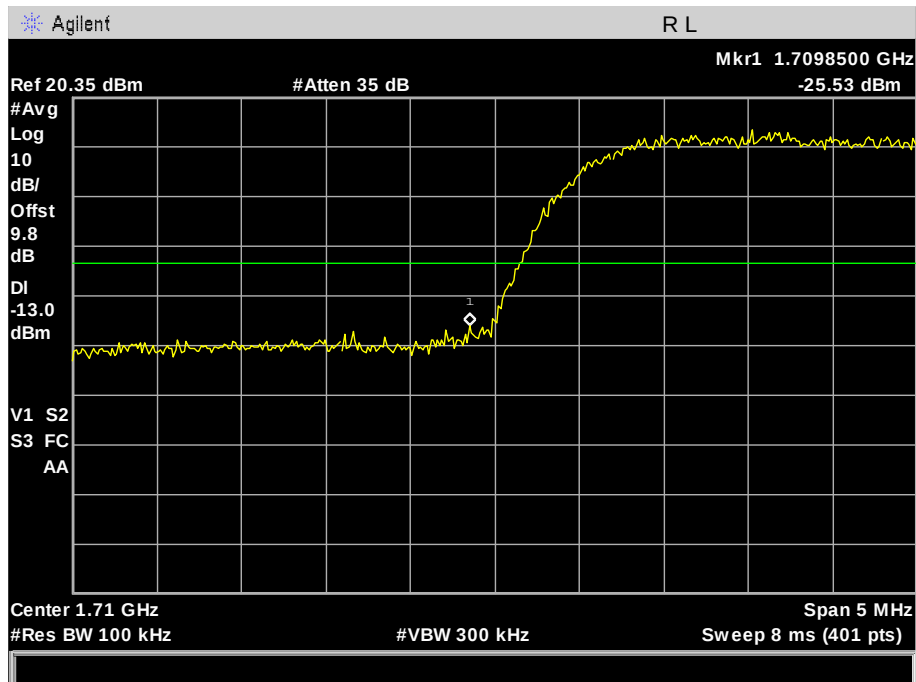


Low Band Edge HSDPA BAND IV CH 1512

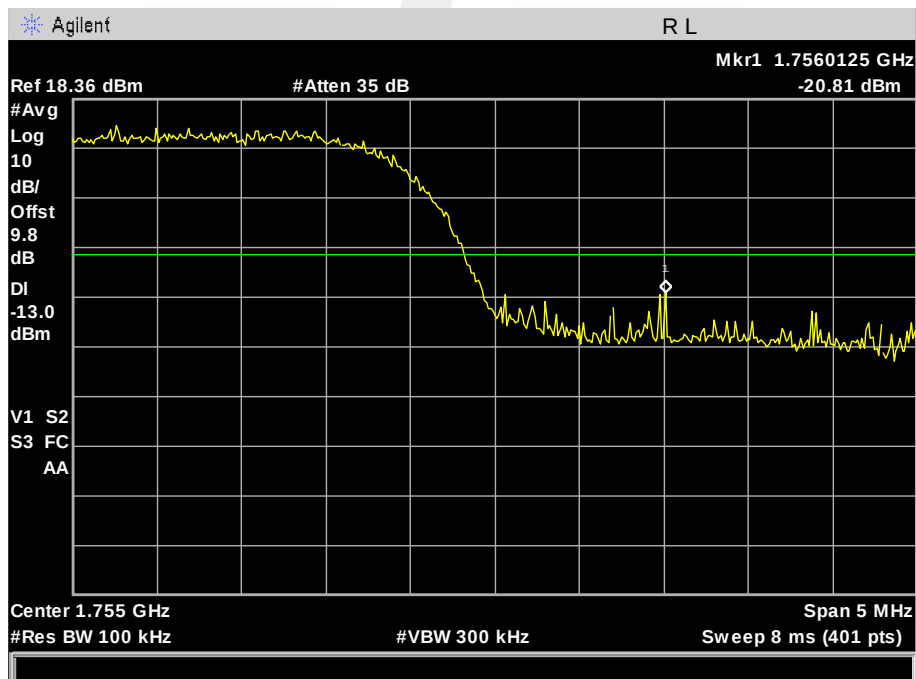




Low Band Edge HSUPA BAND IV CH 1313

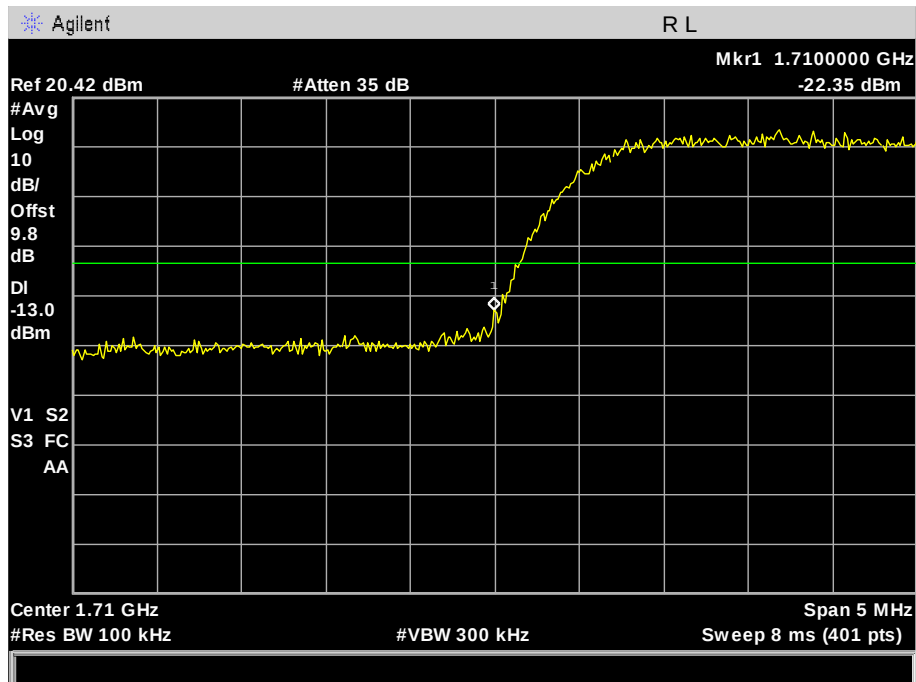



High Band Edge HSUPA BAND IV CH 1512

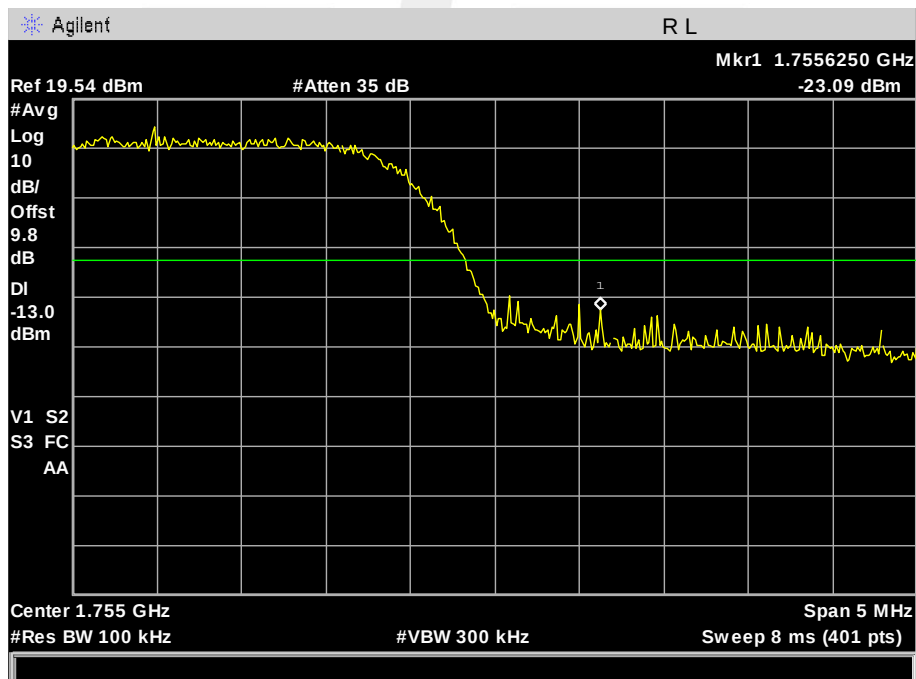

APPENDIX IV

PHOTOS OF TEST SETUP

RADIATED SPURIOUS EMISSION

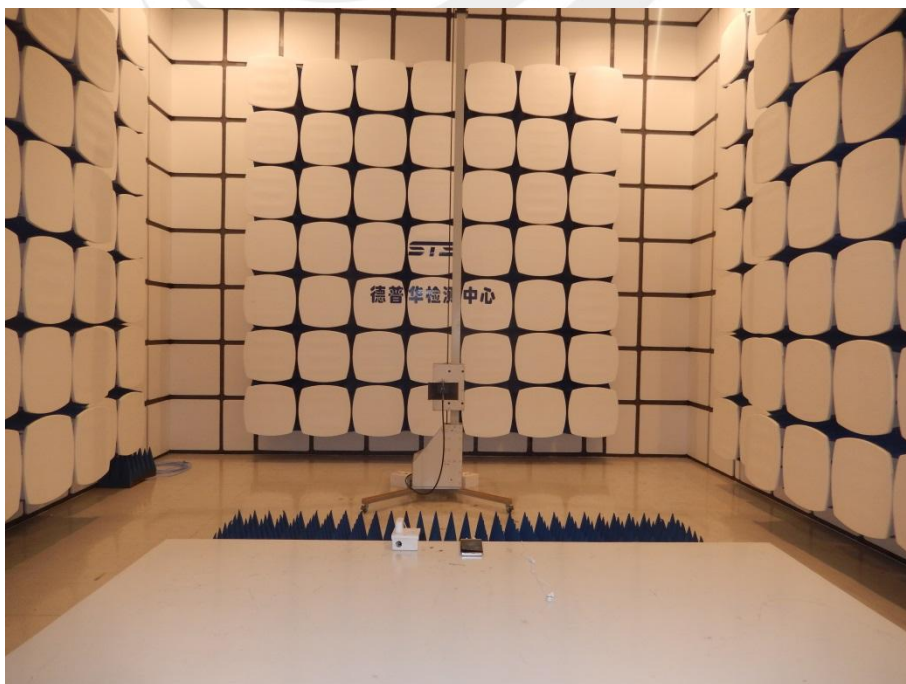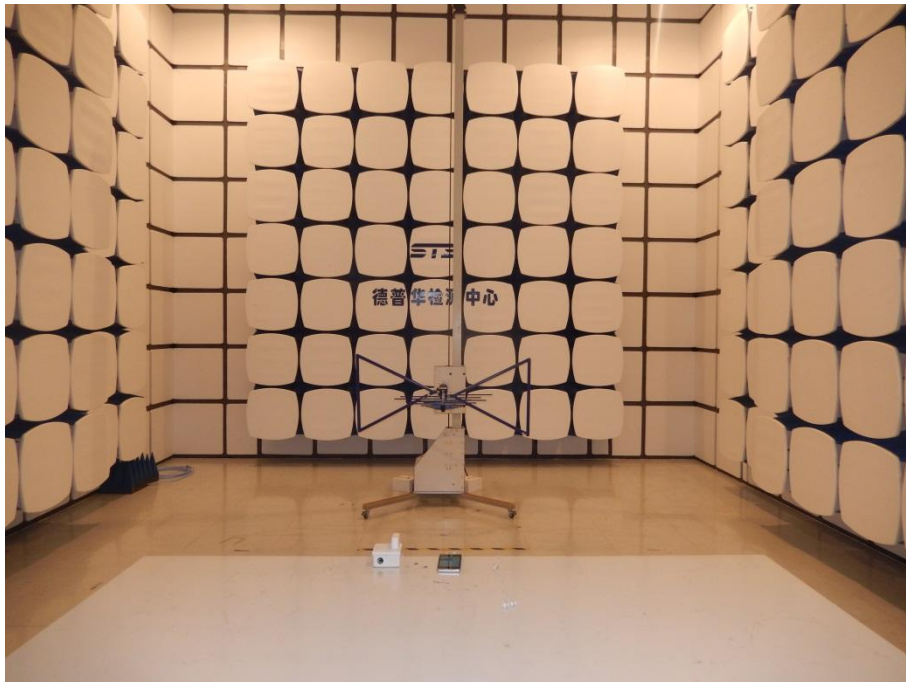

*****END OF THE REPORT*****