



## Q5 Pro Bluetooth Mechanical Keyboard

Knob  
Version

# Fully Assembled Version

## Keyboard

1x Fully Assembled Keyboard

## Including

1x Aluminum Case

1x PCB

1x PC Plate

1x Sound Absorbing Foam

1x Case Foam

14x Gaskets (10 Installed and 4 in the Box)

7 Sets x Stabilizers

1 Set x Keycaps (PBT Double-shot)

1 Set x Switches

## Cable

1x Type-C to Type-C Cable

1x Type-A to Type-C Adapter



## Tools

1x Switch Puller

1x Keycap Puller

1x Screwdriver

1x Hex Key

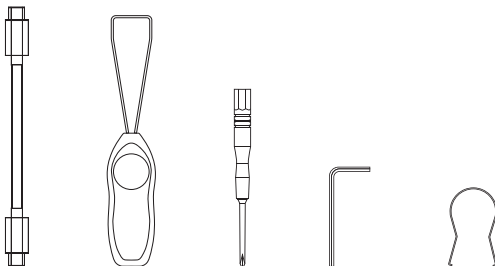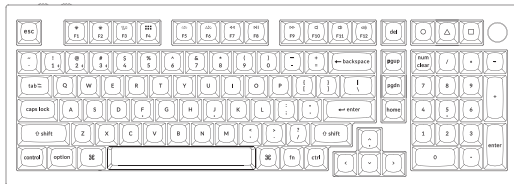

# Barebone Version

## Keyboard Kit

1x Keyboard Kit (Without Keycaps & Switches)

### Including

1x Aluminum Case

1x PCB


1x PC Plate

1x Sound Absorbing Foam

1x Case Foam

14x Gaskets (10 Installed and 4 in the Box)

7 Sets x Stabilizers

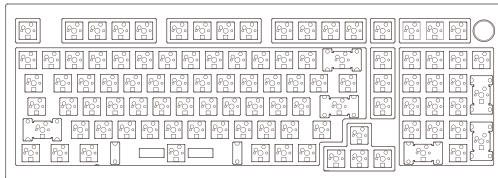

## Cable

1x Type-C to Type-C Cable

1x Type-A to Type-C Adapter


## Tools

1x Switch Puller

1x Keycap Puller

1x Screwdriver


1x Hex Key

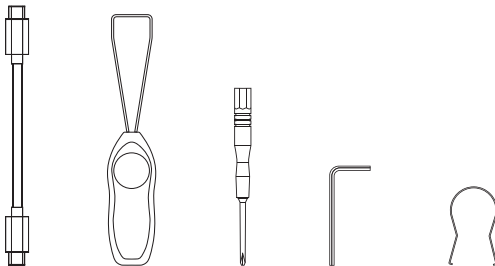

# Quick Start Guide


If you are a Windows user, please find the appropriate keycaps in the box, then follow the instructions below to find and replace the following keycaps.

## Mac / Windows

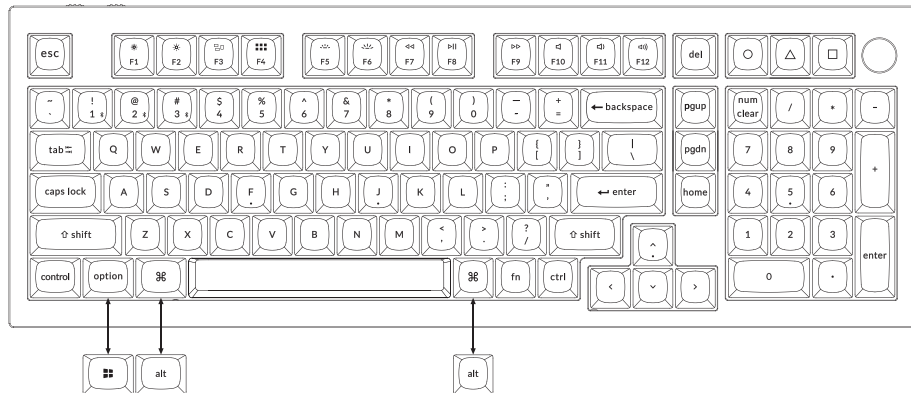





## 1 Connect Bluetooth



Switch toggle to Bluetooth



Press fn + 1 (for 4 seconds) and pair with device named Keychron Q5 Pro.




---

## 2 Connect Cable



Switch toggle to Cable



### 3 The VIA Key Remapping Software

Please visit [caniusevia.com](https://caniusevia.com) to download the latest VIA software to remap the keys. If the VIA software cannot recognize your keyboard, please reach out to our support to get the instruction. (VIA only works when the keyboard is connected by wire to the computer.)





---

### 4 The Layers

There are four layers of key settings on the keyboard. The layer 0 and layer 1 are for the Mac system. The layer 2 and layer 3 are for the Windows system.

If your system toggle is switched to Mac, then the layer 0 will be activated.

If your system toggle is switched to Windows, then the layer 2 will be activated. Remember that if you are using it in Windows mode, please make changes to the layer 2 instead of the top layer (the layer 0). This is a common mistake people are making.



## 5 The Backlight

Press fn + Q to change the lighting effect



fn + Q

Press fn + tab to turn the backlight on/off



fn + tab

---

## 6 Adjust The Backlight Brightness

Press fn + W to increase the backlight brightness



fn + W

Press fn + S to decrease the backlight brightness



fn + S

## 7 Adjust The Backlight Speed

Press fn + T to increase the light effect speed



fn + T

Press fn + G to decrease the light effect speed



fn + G

---

## 8 Warranty

The keyboard is highly customizable and easy to be rebuilt. If anything goes wrong with any of the keyboard components of keyboard during the warranty period, we will only replace the defective parts of the keyboard, not the whole keyboard.



## 9 Watch The Building Tutorial On Our Website

If you are building the keyboard for the first time, we highly recommend you watch the building tutorial video on our website first, then start building the keyboard yourself.



---

## 10 Factory Reset



Troubleshooting? Don't know what's going on with the keyboard?

- ① Plug in the power cable and switch the keyboard to Cable mode.
- ② Factory reset the keyboard by pressing fn + J + Z (for 4 seconds).
- ③ Download the right firmware and QMK Toolbox from our website.
- ④ Switch the keyboard to OFF mode and remove the space bar keycap to find the reset button on the PCB.
- ⑤ Hold the reset key first, then switch the keyboard to Cable mode. Release the reset key, and the keyboard will now enter DFU mode.
- ⑥ Flash the firmware with the QMK Toolbox.
- ⑦ Factory reset the keyboard again by pressing fn + J + Z (for 4 seconds).

\* Step by step guide can be found on our website.

## **Q5 PRO BLUETOOTH MECHANICAL KEYBOARD SPECIFICATIONS**

Number of keys: 101

Switch type: Mechanical

Battery: 4000mAh

Bluetooth working time (RGB): Up to 100 hours (Lowest brightness)

Charging time: Around 5 hours

Charging port: USB Type-C

Mode: Bluetooth / Wired

Bluetooth operating distance: Within 10 meters (open space)

Name of Bluetooth device: Keychron Q5 Pro

Operating environment: -10 to 50°C

Technical specifications can be subjected to change without notice, we apologize for any inconvenience caused.