

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.3 MAXIMUM POWER SPECTRAL DENSITY

Test Date	2023/01/16 ~ 30	Temp./Hum.	16 ~ 17°C/52 ~ 62%
Cable Loss	1.50dB	Tested By	Sam Chang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.3.1 Power Spectral Density Result

● OFDM Modulation

Modulation Type	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) ^{Note3}	Total Power Spectral Density (dBm/1MHz) ^{Note 2}	Limit (dBm/MHz)
			AUX	Main				
802.11ax-HE20	5	5955	-9.161	-9.106	N/A	1.60	-4.523	-1
		6175	-9.649	-9.587		1.60	-5.008	
		6415	-9.041	-9.420		-0.08	-6.296	
	6	6435	-9.185	-9.432		-0.08	-6.376	
		6475	-9.451	-9.553		-0.08	-6.571	
		6515	-9.502	-9.819		-0.08	-6.727	
	7	6535	-11.730	-11.190		-0.08	-8.521	
		6695	-13.427	-12.192		-0.08	-9.835	
		6855	-12.467	-12.456		3.47	-5.981	
	8	6875	-12.440	-12.420		3.47	-5.950	
		6995	-11.537	-11.658		3.47	-5.117	
		7115	-15.169	-15.531		3.47	-8.866	
802.11ax-HE40	5	5965	-8.463	-8.971	N/A	1.60	-4.099	-1
		6165	-9.103	-9.362		1.60	-4.620	
		6405	-8.843	-9.217		-0.08	-6.096	
	6	6445	-8.858	-9.116		-0.08	-6.055	
		6485	-8.989	-9.329		-0.08	-6.225	
	7	6525	-9.458	-9.307		-0.08	-6.452	
		6685	-9.987	-10.151		-0.08	-7.138	
		6845	-10.216	-10.593		3.47	-3.920	
	8	6885	-10.203	-10.242		3.47	-3.742	
		7005	-9.621	-9.980		3.47	-3.316	
		7085	-9.877	-9.835		3.47	-3.376	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: Directional gain = $10 \log[(10^{1.6/10} + 10^{1.6/10})/2] = 1.60$ dBi

6525MHz: Directional gain = $10 \log[(10^{-0.5/10} + 10^{0.3/10})/2] = -0.08$ dBi

7125MHz: Directional gain = $10 \log[(10^{3.9/10} + 10^{3.0/10})/2] = 3.47$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Modulation Type	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) ^{Note3}	Total Power Spectral Density (dBm/1MHz) ^{Note 2}	Limit (dBm/MHz)
			AUX	Main				
802.11ax-HE80	5	5985	-8.772	-8.902	N/A	1.60	-4.226	-1
		6145	-8.970	-9.336		1.60	-4.539	
		6385	-8.806	-9.102		-0.08	-6.021	
	6	6465	-9.096	-9.429		-0.08	-6.329	
		6545	-9.473	-9.590		-0.08	-6.601	
		6625	-9.905	-9.872		-0.08	-6.958	
	7	6705	-10.260	-9.955		-0.08	-7.175	
		6785	-10.290	-10.476		-0.08	-7.452	
	8	6865	-10.317	-10.421		3.47	-3.888	
		6945	-9.878	-10.128		3.47	-3.521	
		7025	-9.937	-10.037		3.47	-3.506	
802.11ax-HE160	5	6025	-8.941	-9.081	N/A	1.60	-4.400	-1
		6185	-9.300	-9.138		1.60	-4.608	
		6345	-9.073	-9.458		-0.08	-6.331	
	6	6505	-9.298	-9.242		-0.08	-6.340	
		6665	-9.915	-10.136		-0.08	-7.094	
	7	6825	-10.300	-10.007		3.47	-3.671	
		6985	-9.722	-9.975		3.47	-3.366	
	8							

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: Directional gain = $10 \log[(10^{1.6/10} + 10^{1.6/10})/2] = 1.60$ dBi

6525MHz: Directional gain = $10 \log[(10^{-0.5/10} + 10^{0.3/10})/2] = -0.08$ dBi

7125MHz: Directional gain = $10 \log[(10^{3.9/10} + 10^{3.0/10})/2] = 3.47$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

● OFDMA Modulation

Tones	RU Index	Modulation Type	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) ^{Note3}	Total Power Spectral Density (dBm/1MHz) ^{Note 2}	Limit (dBm/MHz)
					AUX	Main				
26T	18	802.11ax-HE80	8	6945	-13.977	-11.460	0.223	3.47	-5.835	-1
52T	37	802.11ax-HE40	8	7085	-9.782	-10.119	0.146	3.47	-3.321	
106T	60	802.11ax-HE160	8	6985	-12.399	-12.629	N/A	3.47	-6.032	
242T	62	802.11ax-HE80	8	7025	-11.669	-11.556	0.150	3.47	-4.982	
484T	65	802.11ax-HE40	8	6885	-10.409	-10.141	N/A	3.47	-3.793	
996T	67	802.11ax-HE80	8	7025	-10.312	-10.297	0.159	3.47	-3.665	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain:

5925MHz: Directional gain = $10 \log[(10^{1.6/10} + 10^{1.6/10})/2] = 1.60$ dBi

6525MHz: Directional gain = $10 \log[(10^{-0.5/10} + 10^{0.3/10})/2] = -0.08$ dBi

7125MHz: Directional gain = $10 \log[(10^{3.9/10} + 10^{3.0/10})/2] = 3.47$ dBi


The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


A.3.2 Measurement Plots


● OFDM Modulation

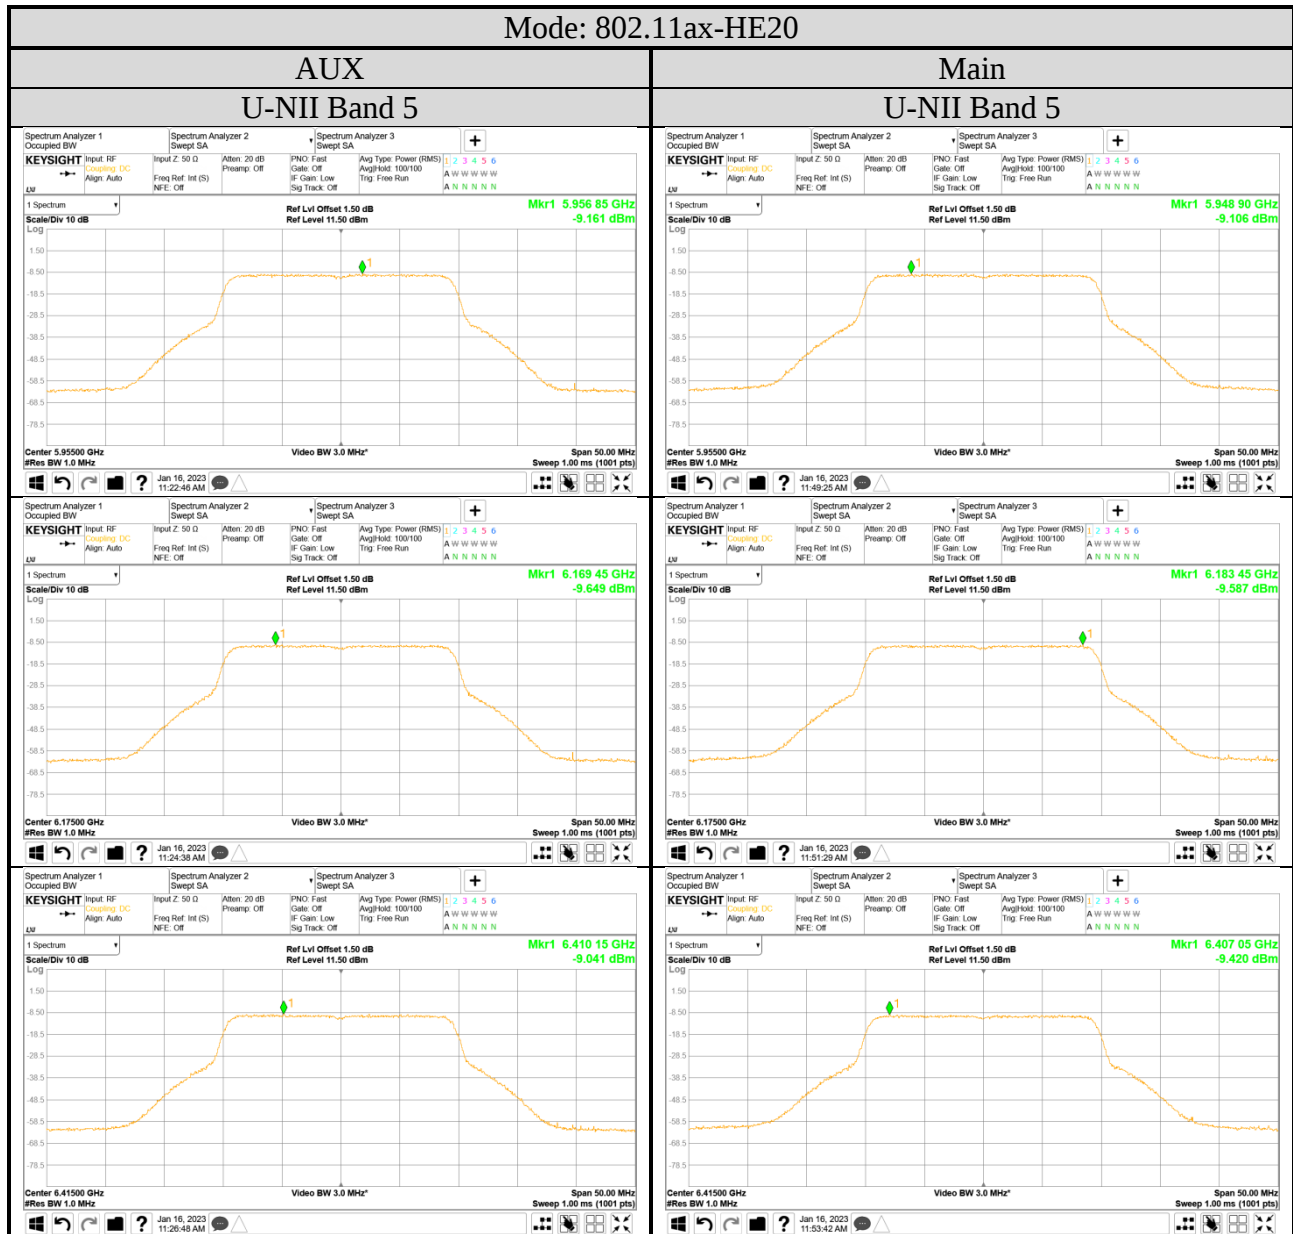


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

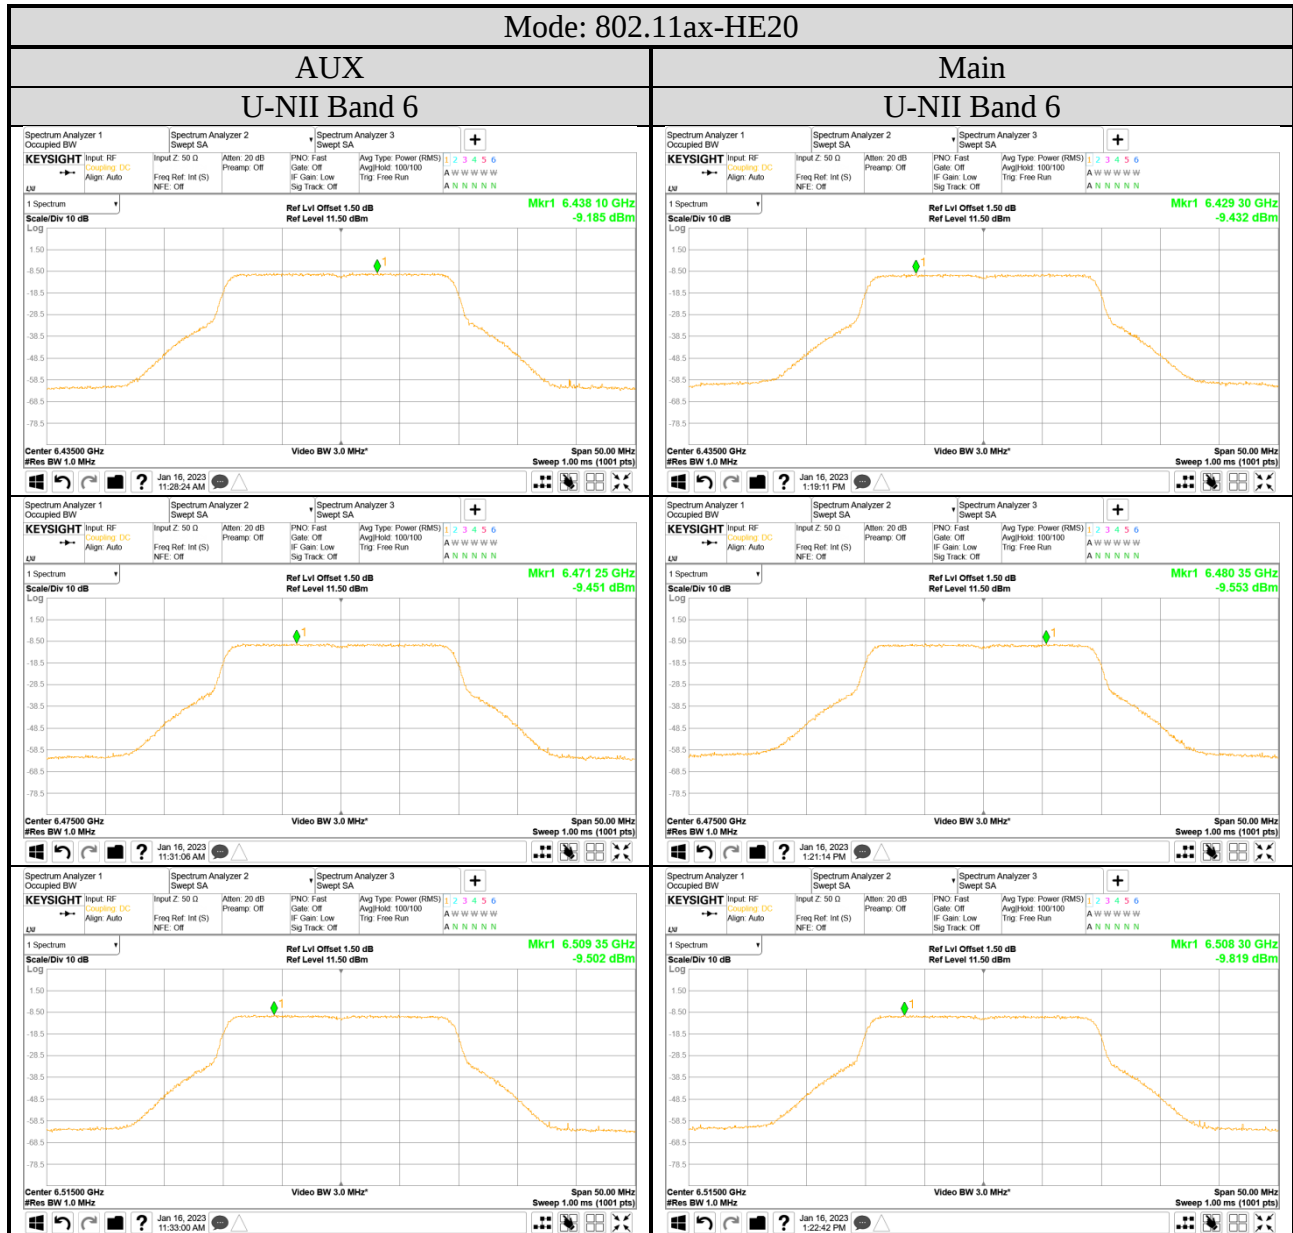


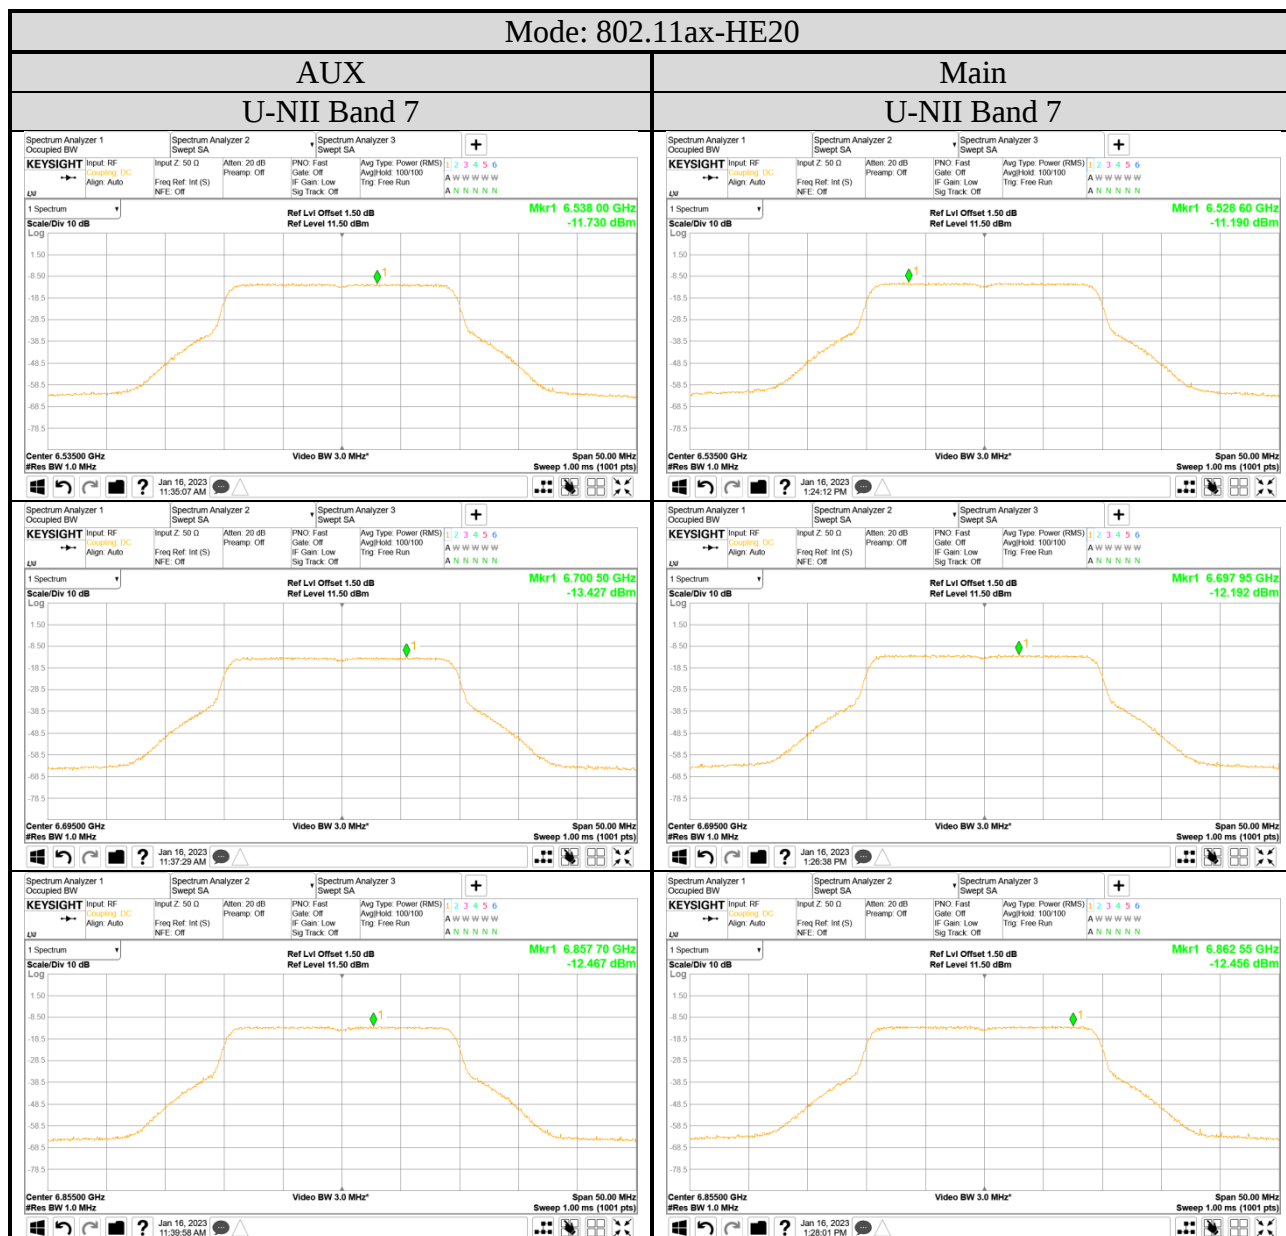

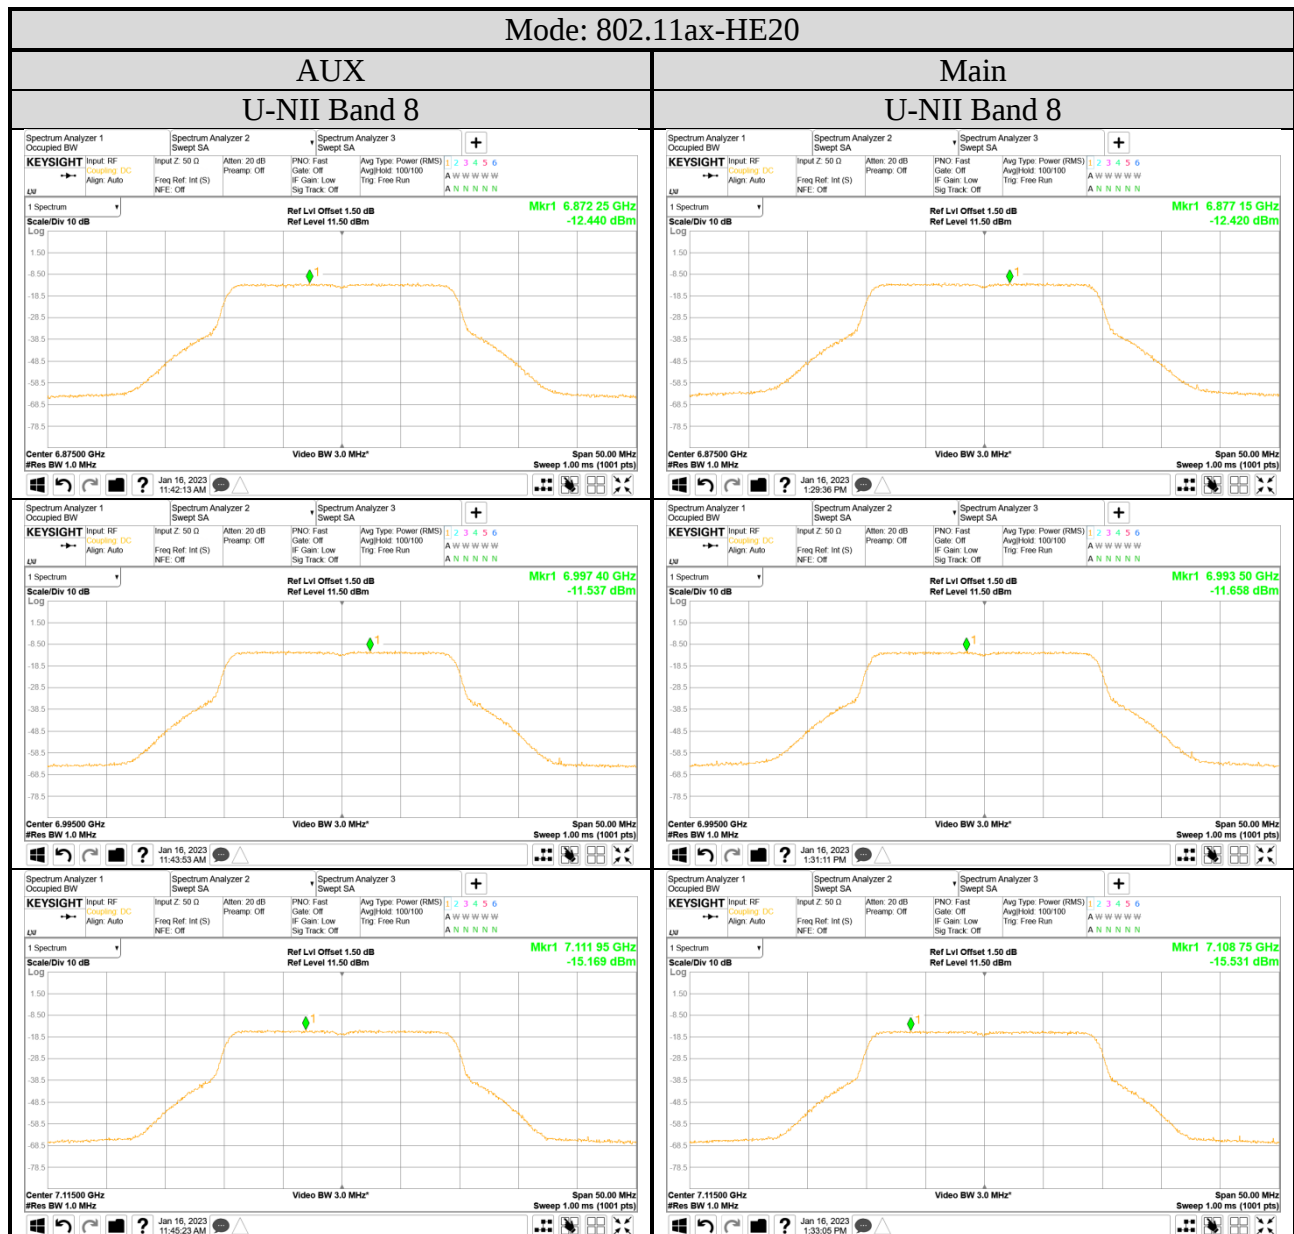


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

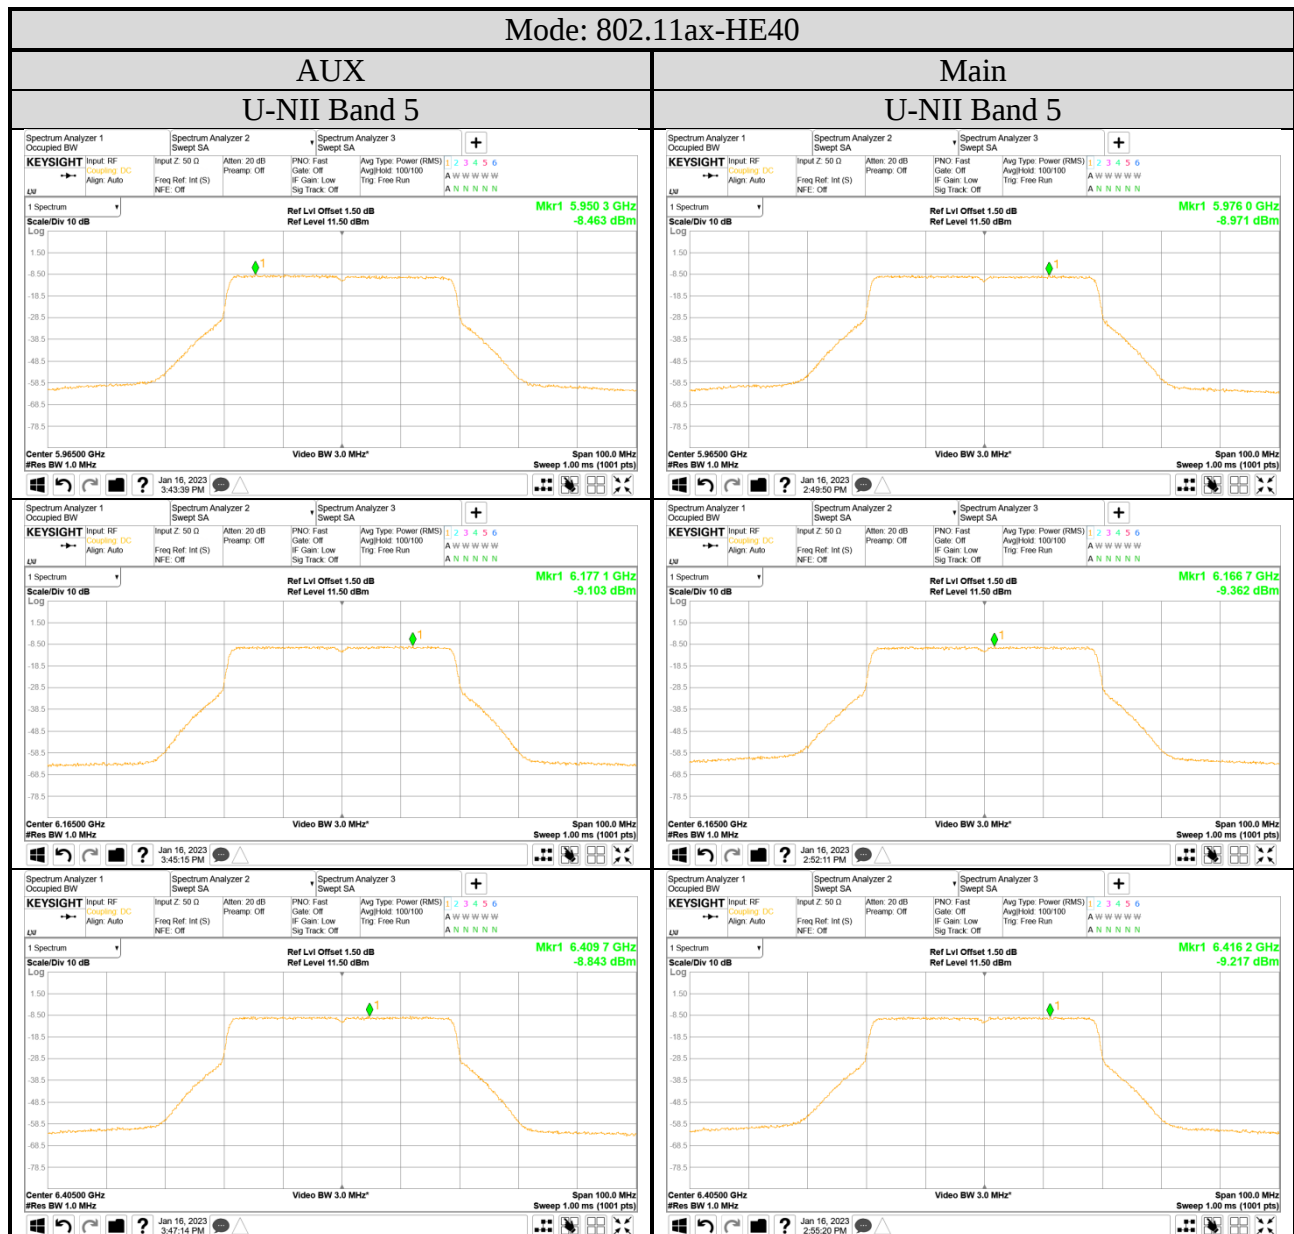


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

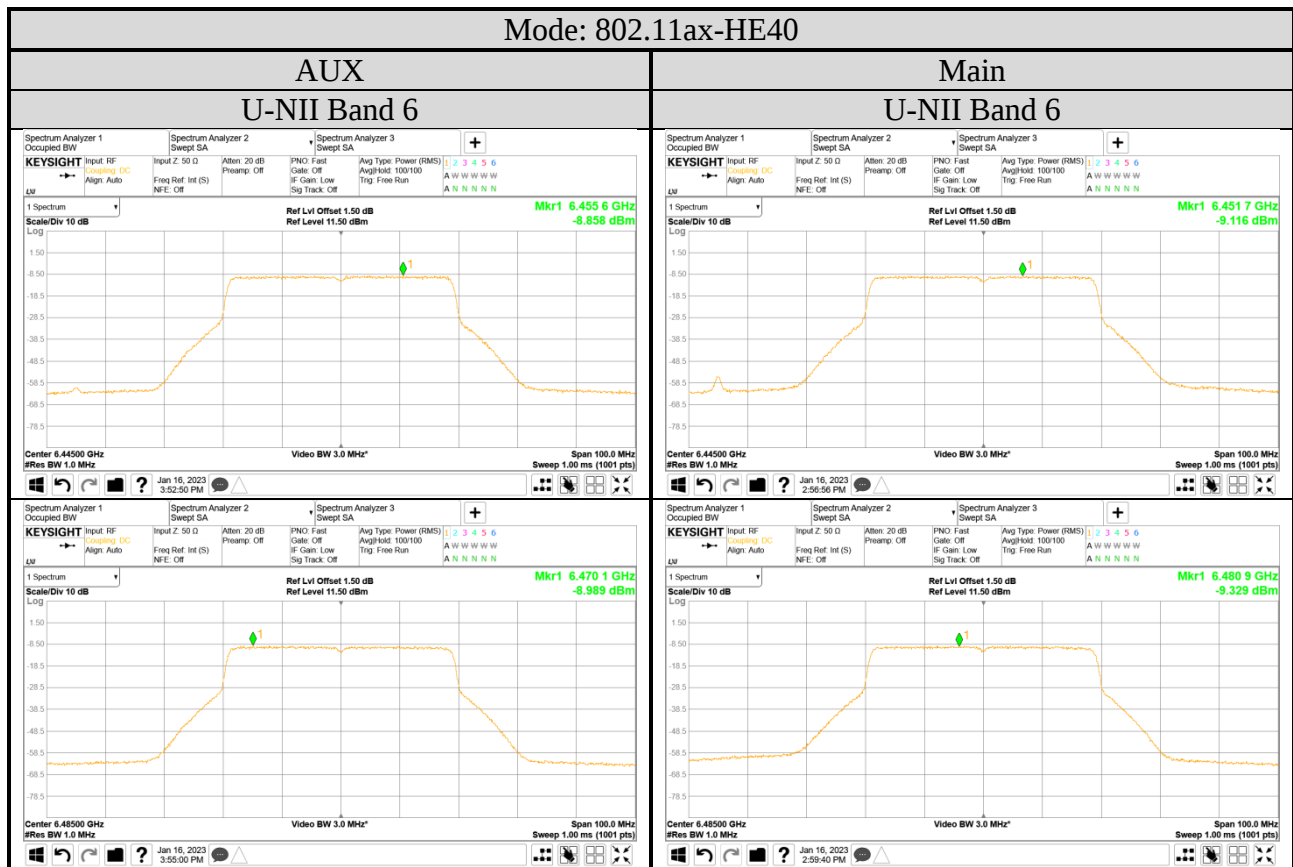


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

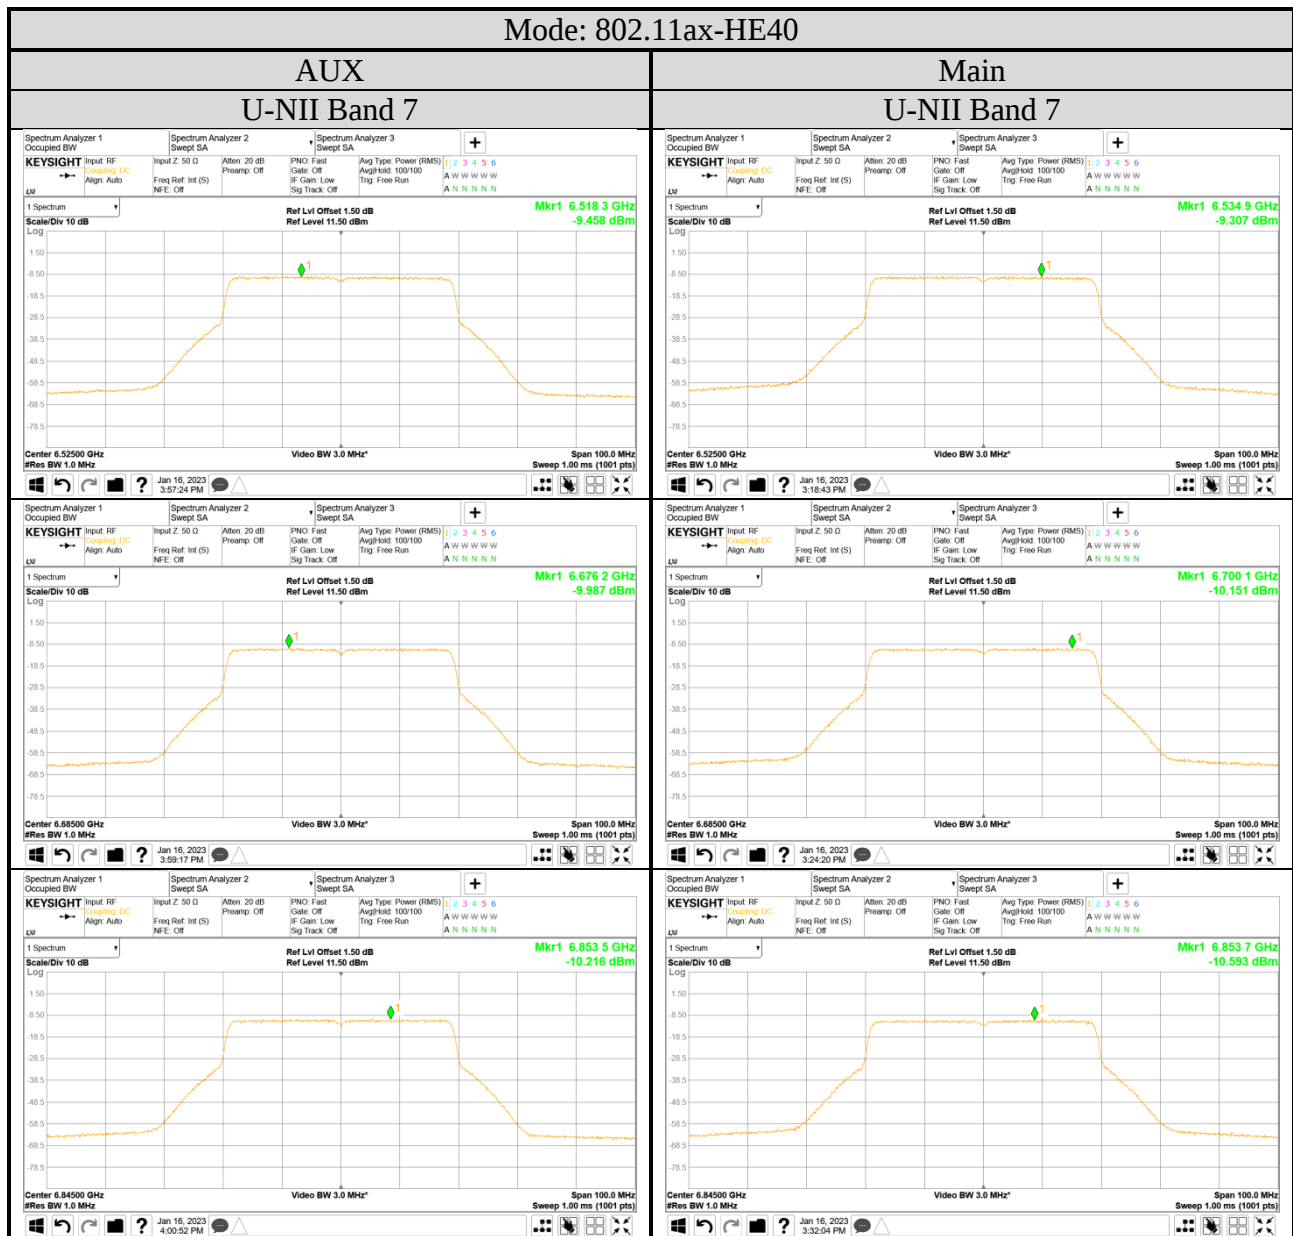

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

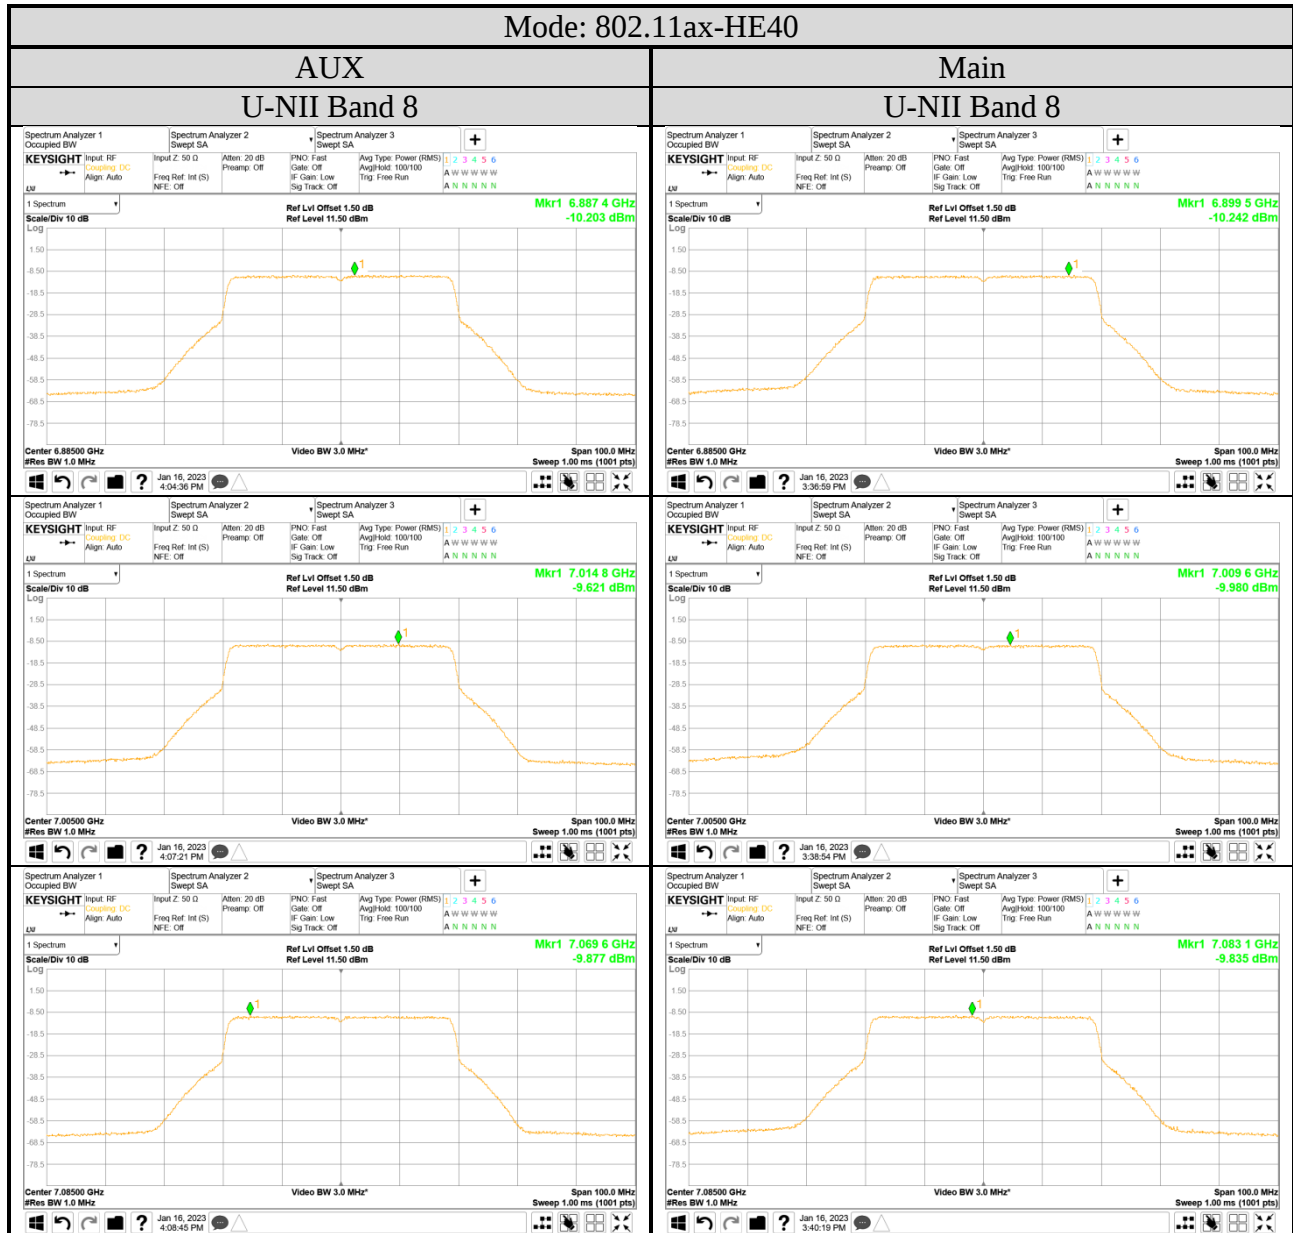

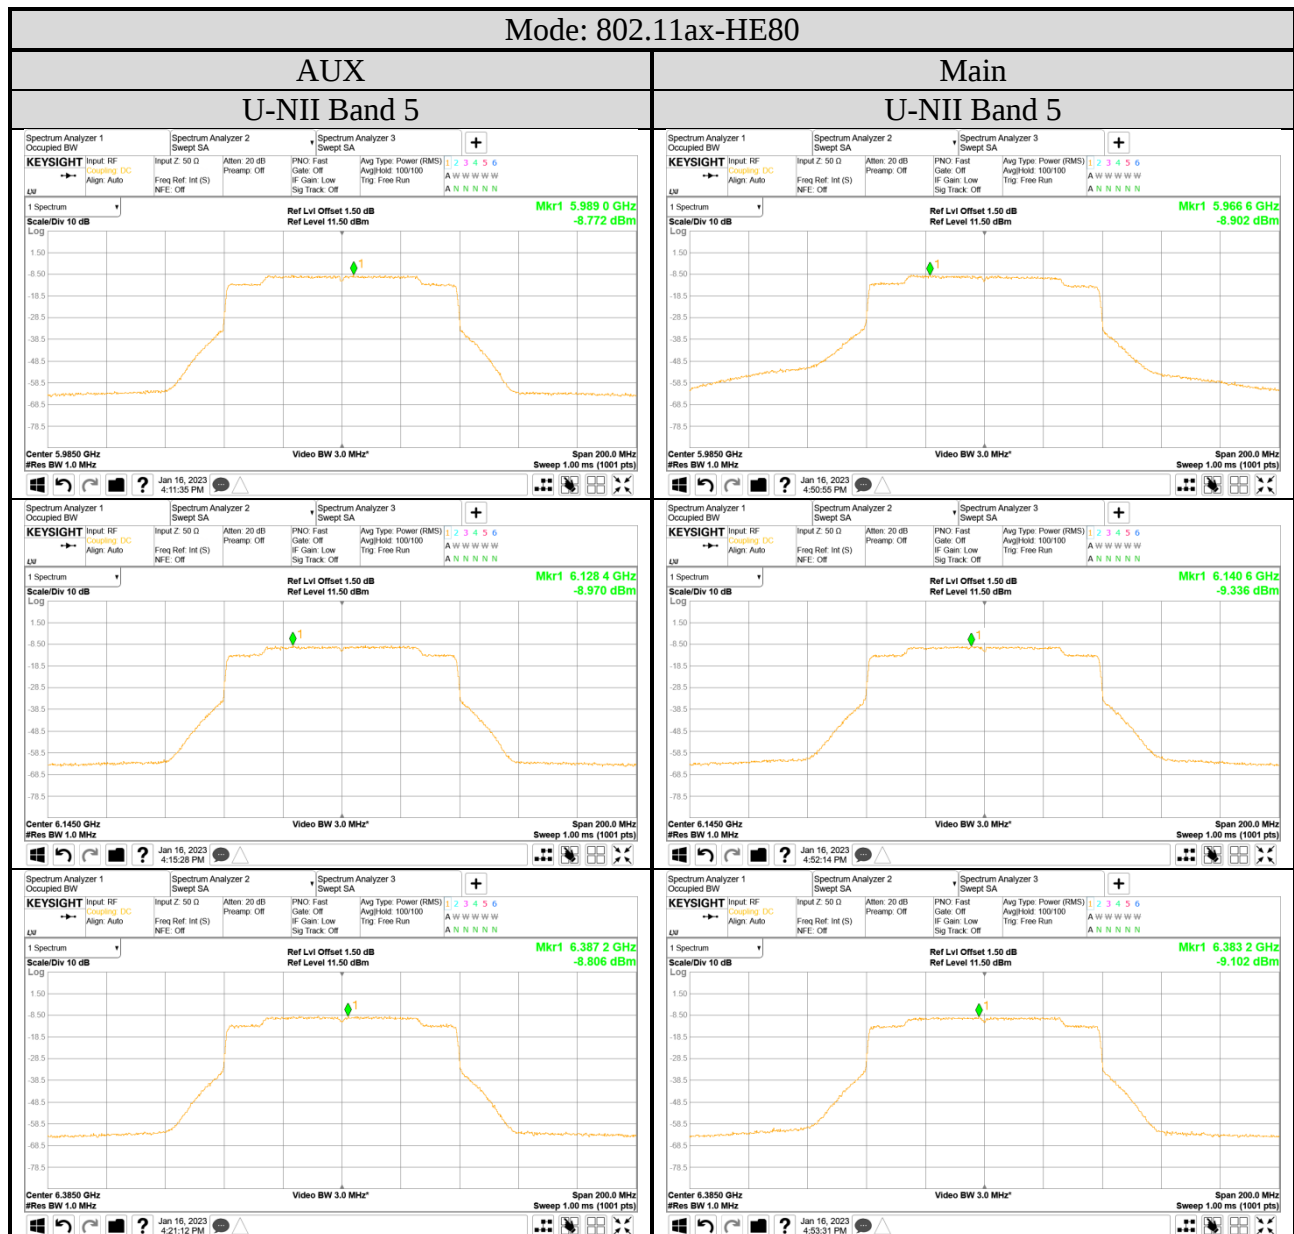


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

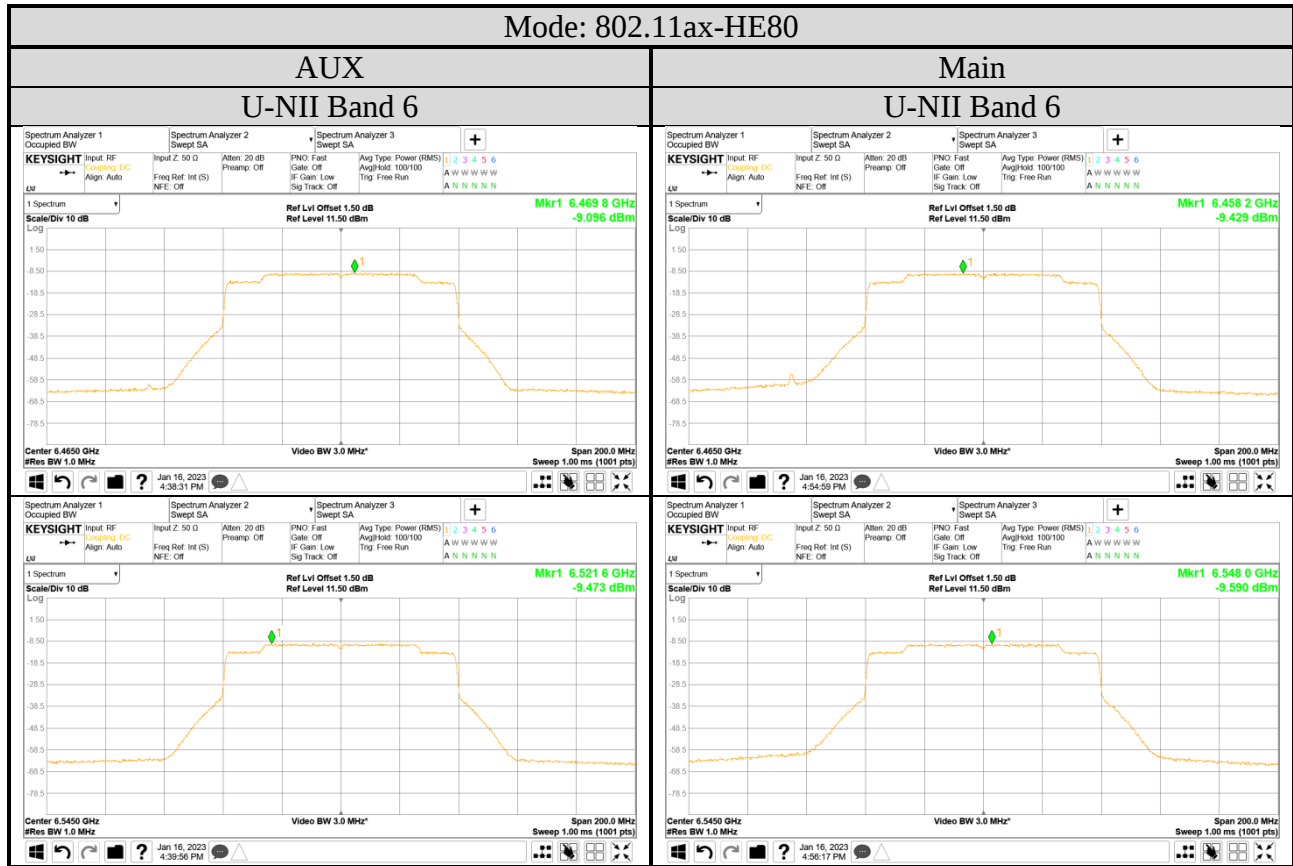


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

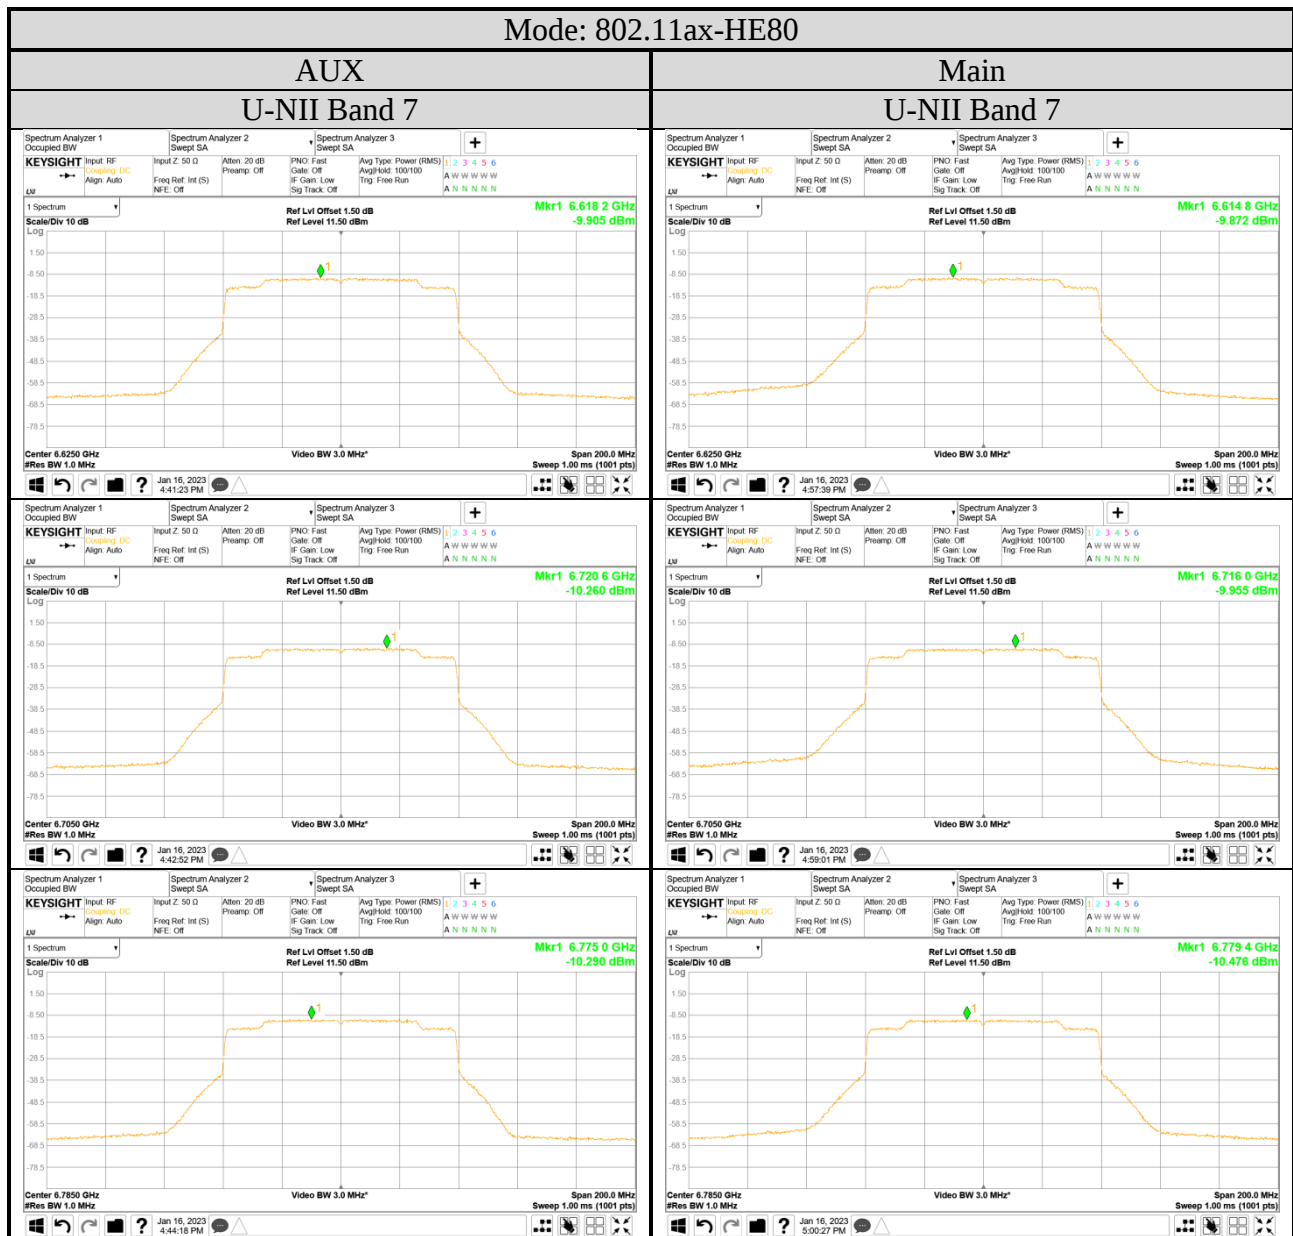



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

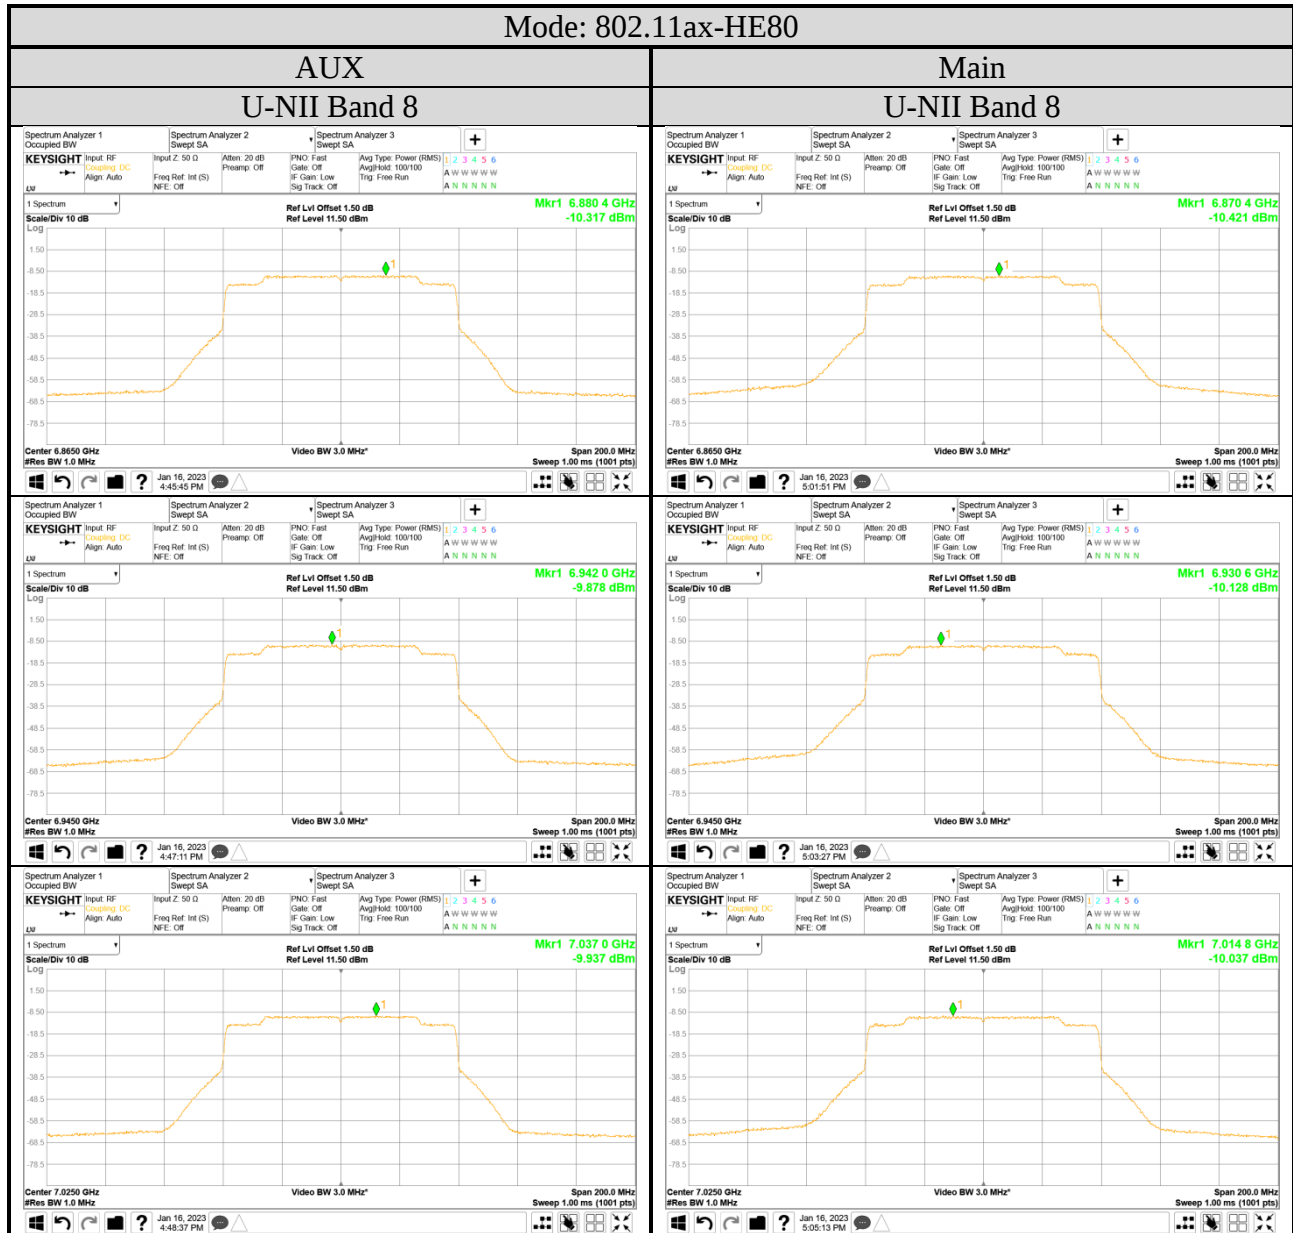

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

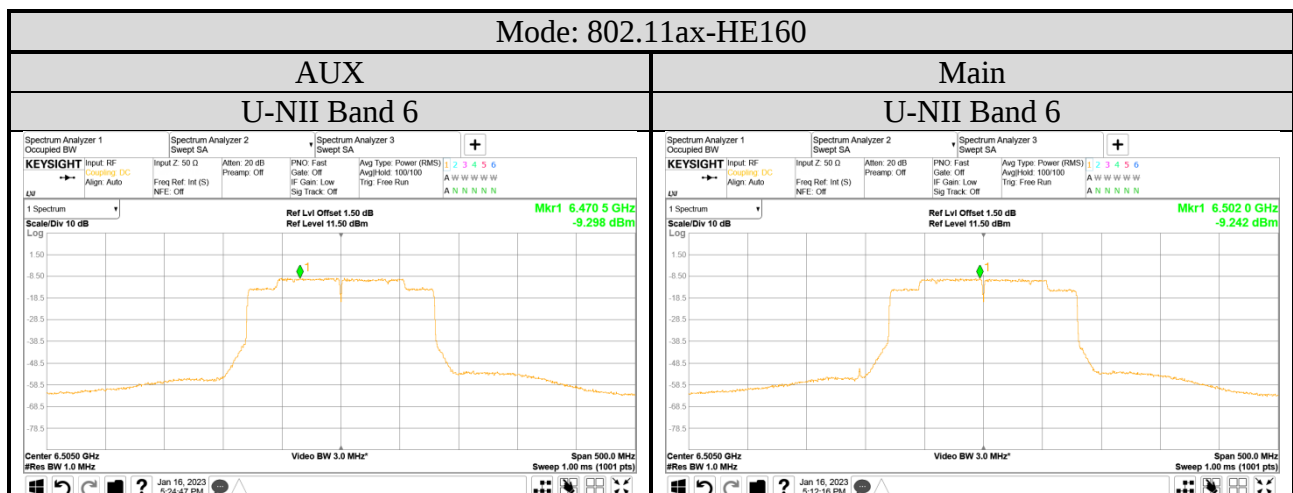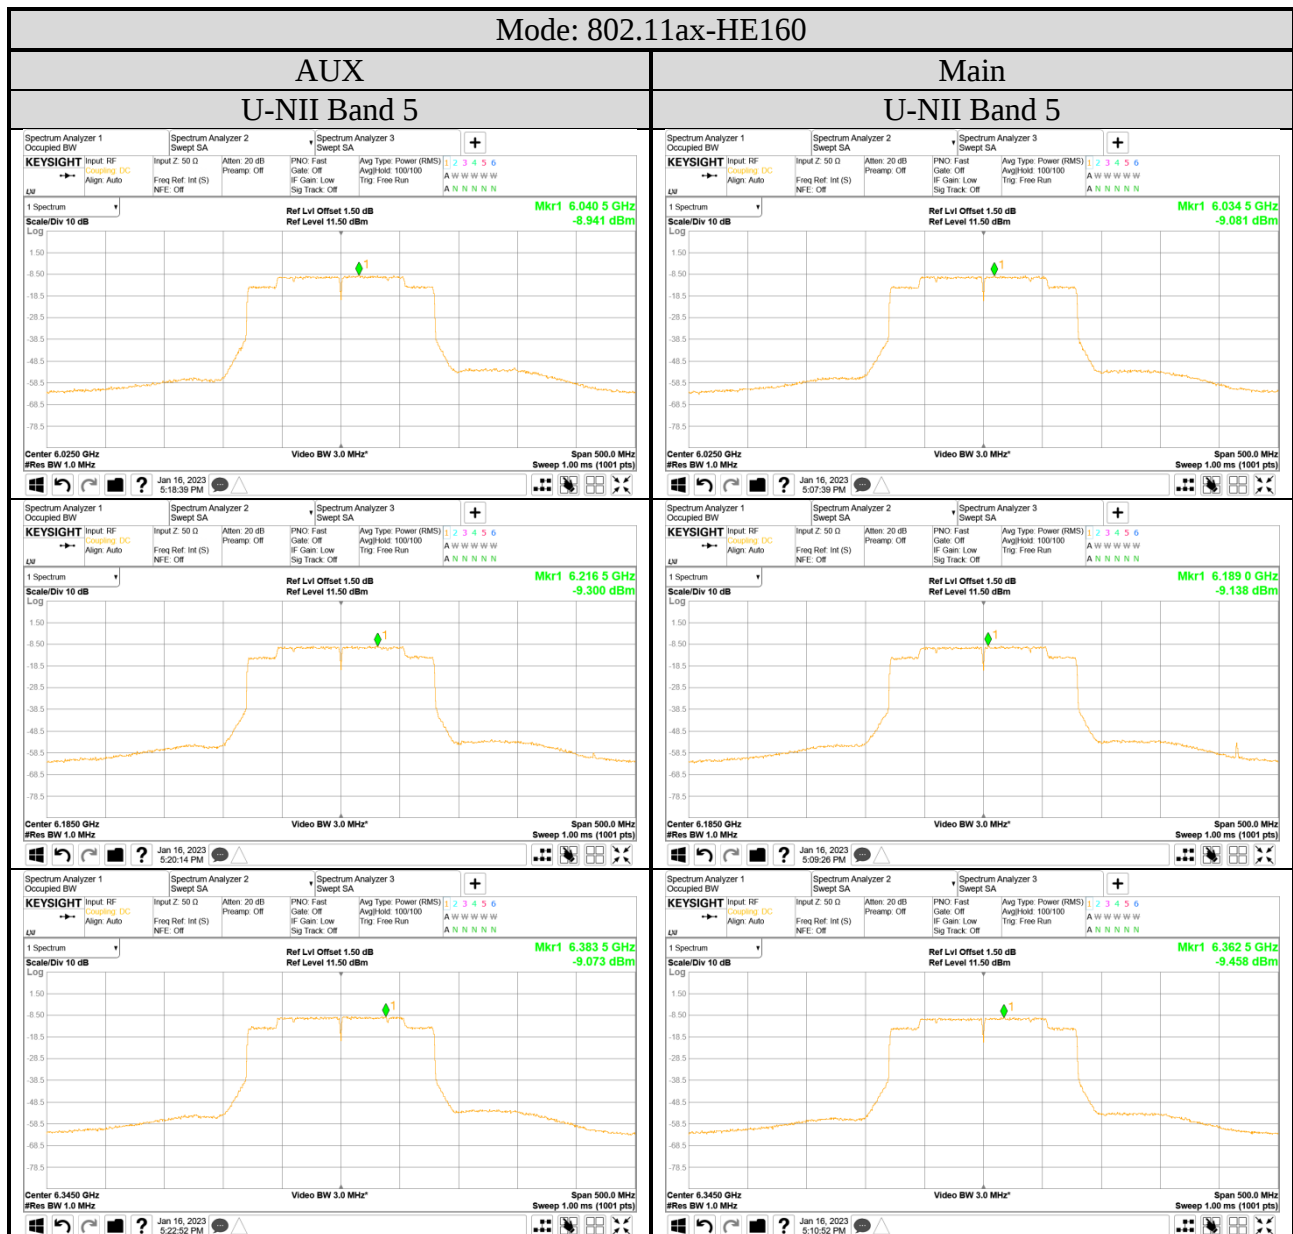

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

