

# FCC RADIO TEST REPORT

FCC ID : PY7-57442Y  
Equipment : GSM/WCDMA/LTE PHONE+BLUETOOTH,  
DTS/UNII A/B/G/N/AC AND NFC  
Brand Name : SONY  
Applicant : SONY MOBILE COMMUNICATIONS INC.  
4-12-3 HIGASHI-SHINAGAWA,  
SHINAGAWA-KU, TOKYO, 140-0002, JAPAN  
Manufacturer : SONY MOBILE COMMUNICATIONS INC.  
4-12-3 HIGASHI-SHINAGAWA,  
SHINAGAWA-KU, TOKYO, 140-0002, JAPAN  
Standard : FCC Part 15 Subpart C §15.247

The product was received on Aug. 30, 2018 and testing was started from Sep. 13, 2018 and completed on Sep. 24, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Jones Tsai

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

|                                                                |           |
|----------------------------------------------------------------|-----------|
| <b>History of this test report.....</b>                        | <b>3</b>  |
| <b>Summary of Test Result .....</b>                            | <b>4</b>  |
| <b>1 General Description.....</b>                              | <b>5</b>  |
| 1.1 Product Feature of Equipment Under Test .....              | 5         |
| 1.2 Modification of EUT .....                                  | 5         |
| 1.3 Testing Location .....                                     | 6         |
| 1.4 Applicable Standards .....                                 | 6         |
| <b>2 Test Configuration of Equipment Under Test .....</b>      | <b>7</b>  |
| 2.1 Carrier Frequency Channel.....                             | 7         |
| 2.2 Test Mode.....                                             | 8         |
| 2.3 Connection Diagram of Test System.....                     | 9         |
| 2.4 Support Unit used in test configuration and system.....    | 10        |
| 2.5 EUT Operation Test Setup.....                              | 10        |
| 2.6 Measurement Results Explanation Example .....              | 10        |
| <b>3 Test Result .....</b>                                     | <b>11</b> |
| 3.1 Number of Channel Measurement .....                        | 11        |
| 3.2 Hopping Channel Separation Measurement.....                | 13        |
| 3.3 Dwell Time Measurement .....                               | 19        |
| 3.4 20dB and 99% Bandwidth Measurement .....                   | 21        |
| 3.5 Output Power Measurement .....                             | 32        |
| 3.6 Conducted Band Edges Measurement.....                      | 33        |
| 3.7 Conducted Spurious Emission Measurement.....               | 40        |
| 3.8 Radiated Band Edges and Spurious Emission Measurement..... | 50        |
| 3.9 AC Conducted Emission Measurement.....                     | 54        |
| 3.10 Antenna Requirements .....                                | 56        |
| <b>4 List of Measuring Equipment.....</b>                      | <b>57</b> |
| <b>5 Uncertainty of Evaluation.....</b>                        | <b>59</b> |
| <b>Appendix A. Conducted Test Results</b>                      |           |
| <b>Appendix B. AC Conducted Emission Test Result</b>           |           |
| <b>Appendix C. Radiated Spurious Emission</b>                  |           |
| <b>Appendix D. Radiated Spurious Emission Plots</b>            |           |
| <b>Appendix E. Duty Cycle Plots</b>                            |           |



## History of this test report

| Report No.   | Version | Description             | Issued Date   |
|--------------|---------|-------------------------|---------------|
| FR882920-01A | 01      | Initial issue of report | Dec. 07, 2018 |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |

## Summary of Test Result

| Report Clause | Ref Std. Clause       | Test Items                                         | Result (PASS/FAIL) | Remark                                  |
|---------------|-----------------------|----------------------------------------------------|--------------------|-----------------------------------------|
| 3.1           | 15.247(a)(1)          | Number of Channels                                 | Pass               | -                                       |
| 3.2           | 15.247(a)(1)          | Hopping Channel Separation                         | Pass               | -                                       |
| 3.3           | 15.247(a)(1)          | Dwell Time of Each Channel                         | Pass               | -                                       |
| 3.4           | 15.247(a)(1)          | 20dB Bandwidth                                     | Pass               | -                                       |
| 3.4           | 2.1049                | 99% Occupied Bandwidth                             | Reporting only     | -                                       |
| 3.5           | 15.247(b)(1)          | Peak Output Power                                  | Pass               | -                                       |
| 3.6           | 15.247(d)             | Conducted Band Edges                               | Pass               | -                                       |
| 3.7           | 15.247(d)             | Conducted Spurious Emission                        | Pass               | -                                       |
| 3.8           | 15.247(d)             | Radiated Band Edges and Radiated Spurious Emission | Pass               | Under limit<br>5.79 dB at<br>40.800 MHz |
| 3.9           | 15.207                | AC Conducted Emission                              | Pass               | Under limit<br>9.95 dB at<br>1.068 MHz  |
| 3.10          | 15.203 &<br>15.247(b) | Antenna Requirement                                | Pass               | -                                       |

**Reviewed by: Wii Chang**

**Report Producer: Natasha Hsieh**

# 1 General Description

## 1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII a/b/g/n/ac, FM Receiver, NFC, and GNSS.

| Standards-related Product Specification |                                  |
|-----------------------------------------|----------------------------------|
| Antenna Type / Gain                     | PIFA Antenna with gain -1.65 dBi |

| EUT Information List |            |            |                            |
|----------------------|------------|------------|----------------------------|
| HW Version           | SW Version | S/N        | Performed Test Item        |
| A                    | 1.129      | CQ30015WW8 | RF conducted measurement   |
|                      |            | CQ3001BNCD | Radiated Spurious Emission |
|                      |            | CQ30015X2P | AC Conducted Emission      |

| Accessory List |                                                                                         |
|----------------|-----------------------------------------------------------------------------------------|
| AC Adapter     | Model Name: UCH32                                                                       |
|                | S/N:<br>6218W30200215 (for radiated emission)<br>6218W30200140 (for conducted emission) |
|                |                                                                                         |
| Earphone       | Model Name: MH410c                                                                      |
|                | S/N: N/A                                                                                |
| USB Cable      | Model Name: UCB24                                                                       |
|                | S/N: N/A                                                                                |

**Note:**

1. Above EUT list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test, and the serial number of each type of accessories is listed in each section of this report. .
3. For other wireless features of this EUT, test report will be issued separately.

## 1.2 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.3 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

|                    |                                                                                                                       |         |
|--------------------|-----------------------------------------------------------------------------------------------------------------------|---------|
| Test Site          | SPORTON INTERNATIONAL INC.                                                                                            |         |
| Test Site Location | No.52, Huaya 1st Rd., Guishan Dist.,<br>Taoyuan City, Taiwan (R.O.C.)<br>TEL: +886-3-327-3456<br>FAX: +886-3-328-4978 |         |
| Test Site No.      | Sporton Site No.                                                                                                      |         |
|                    | TH05-HY                                                                                                               | CO05-HY |

**Note:** The test site complies with ANSI C63.4 2014 requirement.

|                    |                                                                                                                                           |  |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------|--|
| Test Site          | SPORTON INTERNATIONAL INC.                                                                                                                |  |
| Test Site Location | No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist.,<br>Taoyuan City, Taiwan (R.O.C.)<br>TEL: +886-3-327-0868<br>FAX: +886-3-327-0855 |  |
| Test Site No.      | Sporton Site No.                                                                                                                          |  |
|                    | 03CH11-HY                                                                                                                                 |  |

**Note:** The test site complies with ANSI C63.4 2014 requirement.

### 1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

| Frequency Band  | Channel | Freq.<br>(MHz) | Channel | Freq.<br>(MHz) | Channel | Freq.<br>(MHz) |
|-----------------|---------|----------------|---------|----------------|---------|----------------|
| 2400-2483.5 MHz | 0       | 2402           | 27      | 2429           | 54      | 2456           |
|                 | 1       | 2403           | 28      | 2430           | 55      | 2457           |
|                 | 2       | 2404           | 29      | 2431           | 56      | 2458           |
|                 | 3       | 2405           | 30      | 2432           | 57      | 2459           |
|                 | 4       | 2406           | 31      | 2433           | 58      | 2460           |
|                 | 5       | 2407           | 32      | 2434           | 59      | 2461           |
|                 | 6       | 2408           | 33      | 2435           | 60      | 2462           |
|                 | 7       | 2409           | 34      | 2436           | 61      | 2463           |
|                 | 8       | 2410           | 35      | 2437           | 62      | 2464           |
|                 | 9       | 2411           | 36      | 2438           | 63      | 2465           |
|                 | 10      | 2412           | 37      | 2439           | 64      | 2466           |
|                 | 11      | 2413           | 38      | 2440           | 65      | 2467           |
|                 | 12      | 2414           | 39      | 2441           | 66      | 2468           |
|                 | 13      | 2415           | 40      | 2442           | 67      | 2469           |
|                 | 14      | 2416           | 41      | 2443           | 68      | 2470           |
|                 | 15      | 2417           | 42      | 2444           | 69      | 2471           |
|                 | 16      | 2418           | 43      | 2445           | 70      | 2472           |
|                 | 17      | 2419           | 44      | 2446           | 71      | 2473           |
|                 | 18      | 2420           | 45      | 2447           | 72      | 2474           |
|                 | 19      | 2421           | 46      | 2448           | 73      | 2475           |
|                 | 20      | 2422           | 47      | 2449           | 74      | 2476           |
|                 | 21      | 2423           | 48      | 2450           | 75      | 2477           |
|                 | 22      | 2424           | 49      | 2451           | 76      | 2478           |
|                 | 23      | 2425           | 50      | 2452           | 77      | 2479           |
|                 | 24      | 2426           | 51      | 2453           | 78      | 2480           |
|                 | 25      | 2427           | 52      | 2454           | -       | -              |
|                 | 26      | 2428           | 53      | 2455           | -       | -              |

## 2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


| Summary table of Test Cases |                                                                                                         |                                       |                               |
|-----------------------------|---------------------------------------------------------------------------------------------------------|---------------------------------------|-------------------------------|
| Test Item                   | Data Rate / Modulation                                                                                  |                                       |                               |
|                             | Bluetooth BR 1Mbps<br>GFSK                                                                              | Bluetooth EDR 2Mbps<br>$\pi/4$ -DQPSK | Bluetooth EDR 3Mbps<br>8-DPSK |
| Conducted<br>Test Cases     | Mode 1: CH00_2402 MHz                                                                                   | Mode 4: CH00_2402 MHz                 | Mode 7: CH00_2402 MHz         |
|                             | Mode 2: CH39_2441 MHz                                                                                   | Mode 5: CH39_2441 MHz                 | Mode 8: CH39_2441 MHz         |
|                             | Mode 3: CH78_2480 MHz                                                                                   | Mode 6: CH78_2480 MHz                 | Mode 9: CH78_2480 MHz         |
| Radiated<br>Test Cases      | Bluetooth 1Mbps GFSK / EDR 2Mbps $\pi/4$ -DQPSK / EDR 3Mbps 8-DPSK                                      |                                       |                               |
|                             | Mode 1: CH00_2402 MHz for 1Mbps                                                                         |                                       |                               |
|                             | Mode 2: CH39_2441 MHz for 1Mbps                                                                         |                                       |                               |
|                             | Mode 3: CH78_2480 MHz for 1Mbps                                                                         |                                       |                               |
|                             | Mode 4: CH00_2402 MHz for 2Mbps                                                                         |                                       |                               |
|                             | Mode 5: CH39_2441 MHz for 2Mbps                                                                         |                                       |                               |
|                             | Mode 6: CH78_2480 MHz for 2Mbps                                                                         |                                       |                               |
|                             | Mode 7: CH00_2402 MHz for 3Mbps                                                                         |                                       |                               |
|                             | Mode 8: CH39_2441 MHz for 3Mbps                                                                         |                                       |                               |
|                             | Mode 9: CH78_2480 MHz for 3Mbps                                                                         |                                       |                               |
| AC<br>Conducted<br>Emission | Mode 1 :Bluetooth Link + WLAN (2.4GHz) Link + Earphone + Battery + USB Cable<br>(Charging from Adapter) |                                       |                               |

## 2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

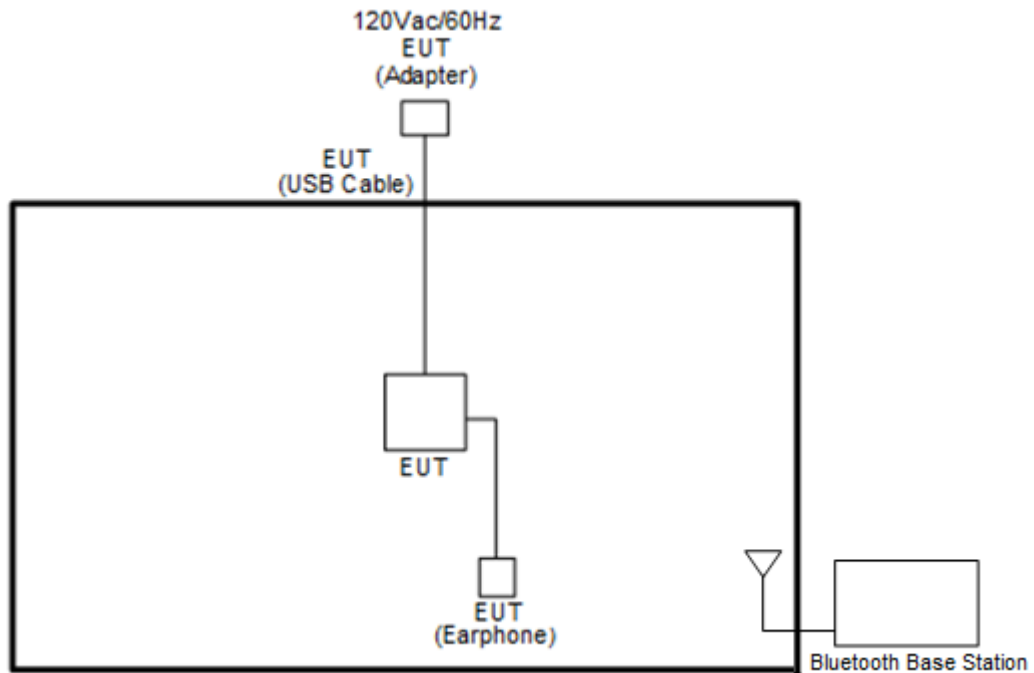

<AC Conducted Emission Mode>

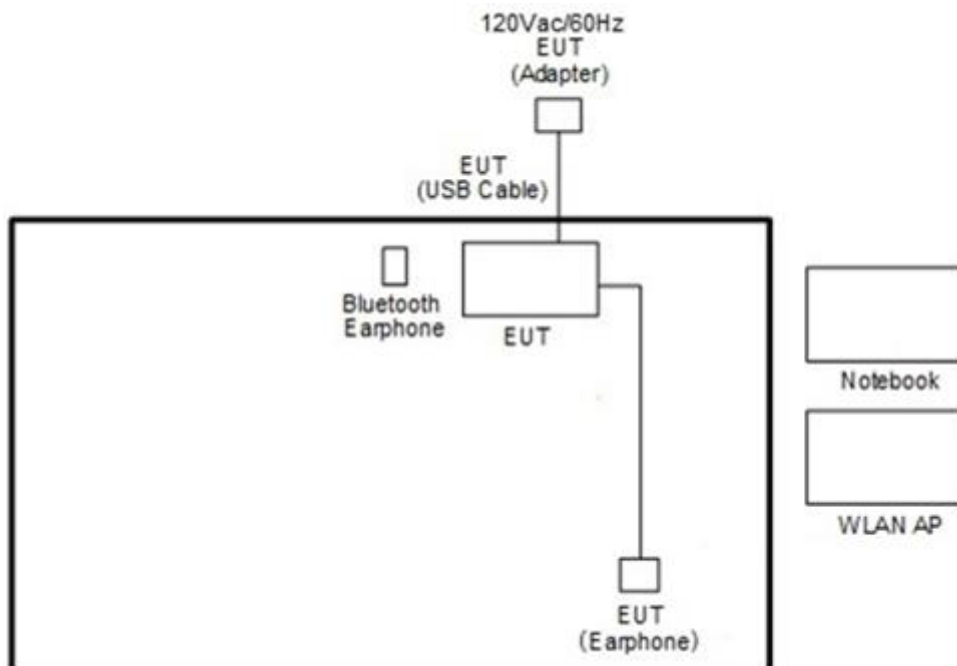

## 2.4 Support Unit used in test configuration and system

| Item | Equipment              | Trade Name | Model Name | FCC ID                                       | Data Cable | Power Cord                                                 |
|------|------------------------|------------|------------|----------------------------------------------|------------|------------------------------------------------------------|
| 1.   | Bluetooth Base Station | R&S        | CBT32      | N/A                                          | N/A        | Unshielded, 1.8 m                                          |
| 2.   | WLAN AP                | ASUS       | RT-AC66U   | MSQ-RTAC66U                                  | N/A        | Unshielded, 1.8 m                                          |
| 3.   | Bluetooth Earphone     | Sony       | SBH20      | PY7-RD0010                                   | N/A        | N/A                                                        |
| 4.   | Notebook               | DELL       | P20G       | FCC DoC/<br>Contains FCC ID:<br>QDS-BRCM1051 | N/A        | AC I/P:<br>Unshielded, 1.2 m<br>DC O/P:<br>Shielded, 1.8 m |
| 5.   | SD Card                | SanDisk    | MicroSD HC | FCC DoC                                      | N/A        | N/A                                                        |

## 2.5 EUT Operation Test Setup

The RF test items, utility “QRCT” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to contact with base station to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


##### 3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

##### 3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW = 300kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

##### 3.1.4 Test Setup

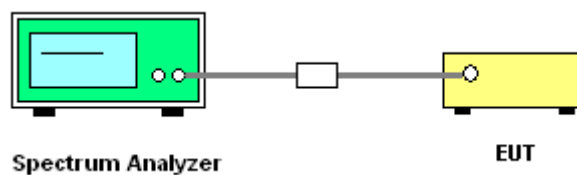





### 3.1.5 Test Result of Number of Hopping Frequency

Please refer to Appendix A.

Number of Hopping Channel Plot on Channel 00 - 78

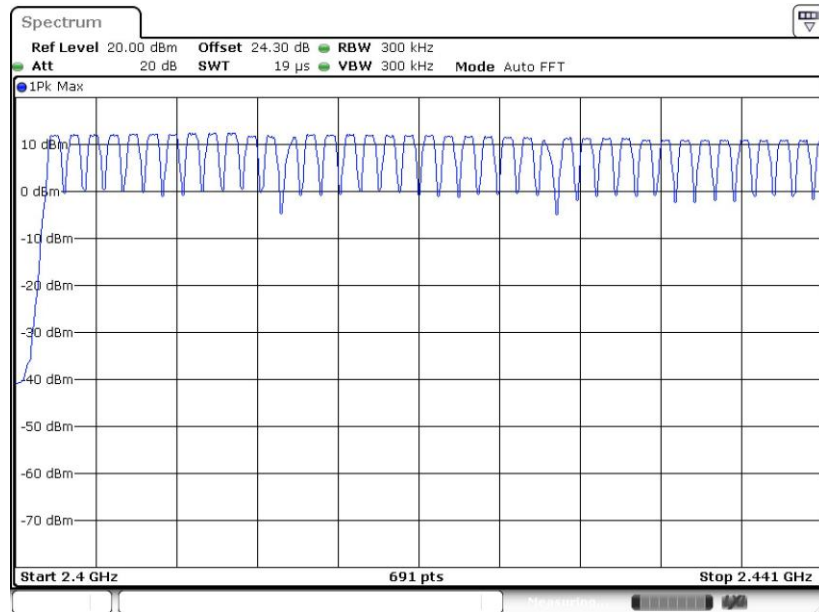

Date: 15 SEP 2018 10:49:45

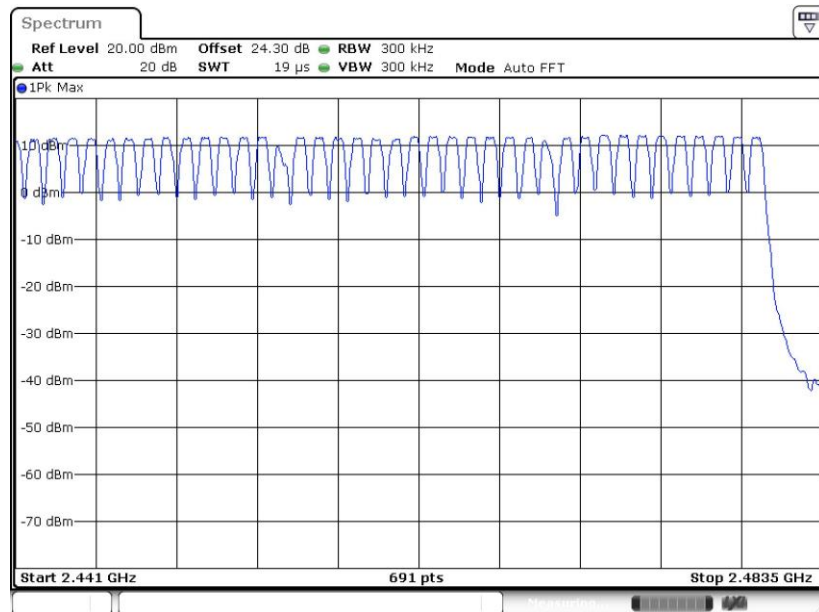

Date: 15 SEP 2018 10:50:09

## 3.2 Hopping Channel Separation Measurement

### 3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


### 3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

### 3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels;  
RBW = 300kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

### 3.2.4 Test Setup

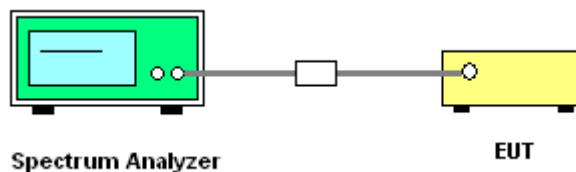


### 3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.




&lt;1Mbps&gt;

## Channel Separation Plot on Channel 00 - 01

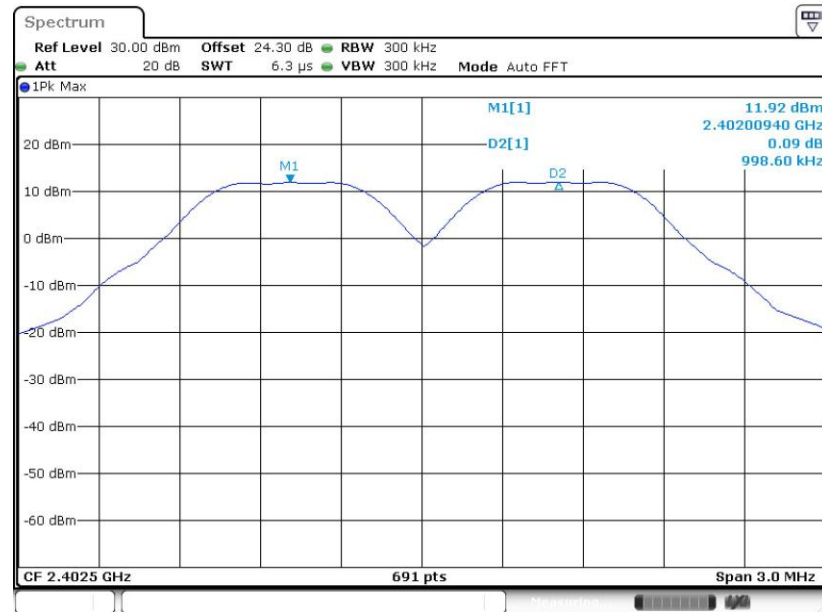

Date: 15.SEP.2018 10:36:27


## Channel Separation Plot on Channel 39 - 40

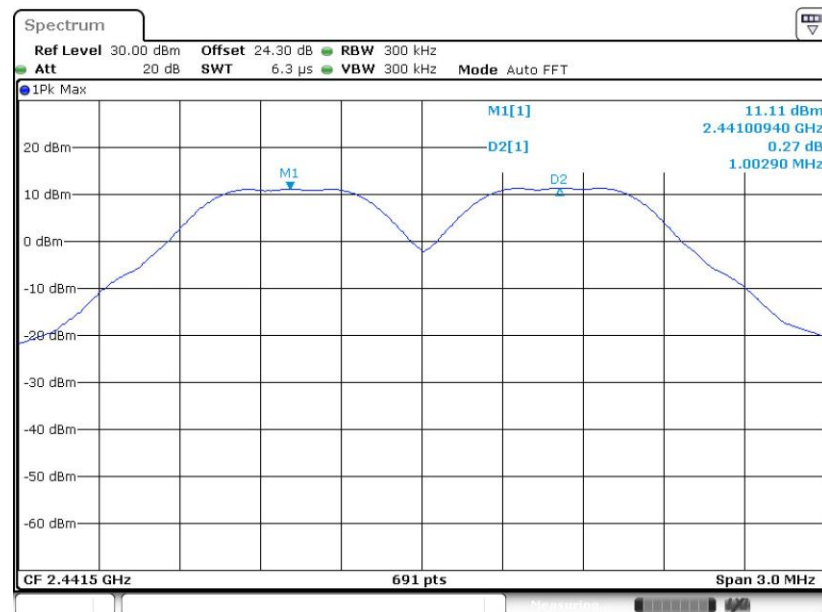

Date: 15.SEP.2018 10:39:49




## Channel Separation Plot on Channel 77 - 78

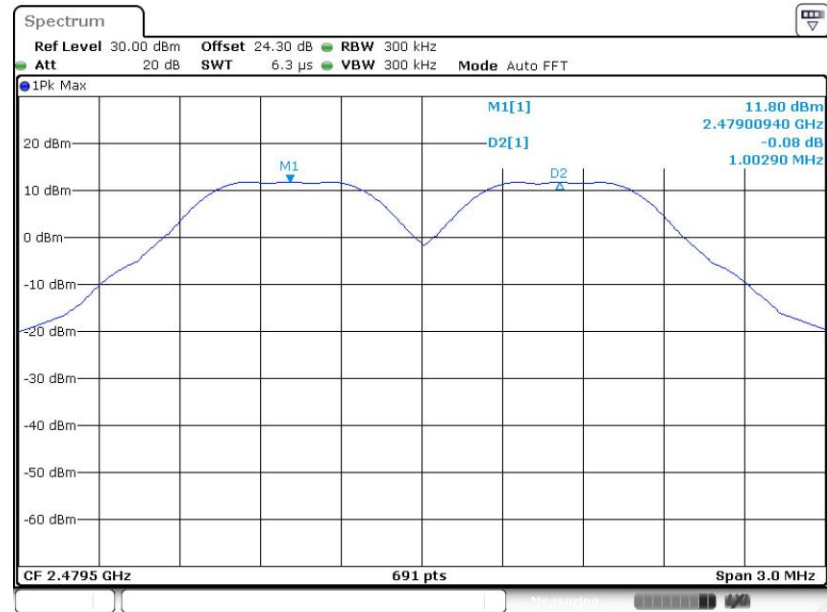

Date: 15.SEP.2018 10:40:56

## &lt;2Mbps&gt;


## Channel Separation Plot on Channel 00 - 01

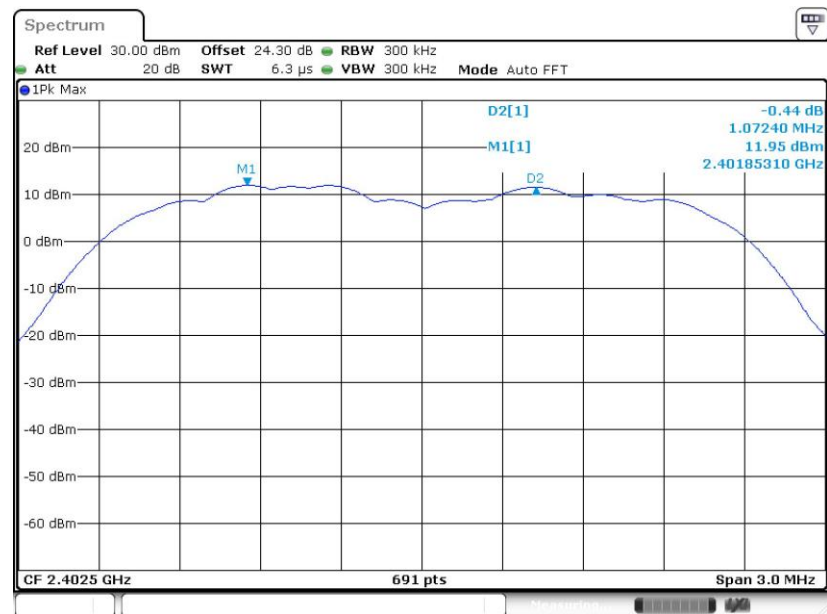

Date: 15.SEP.2018 11:47:59




Channel Separation Plot on Channel 39 - 40

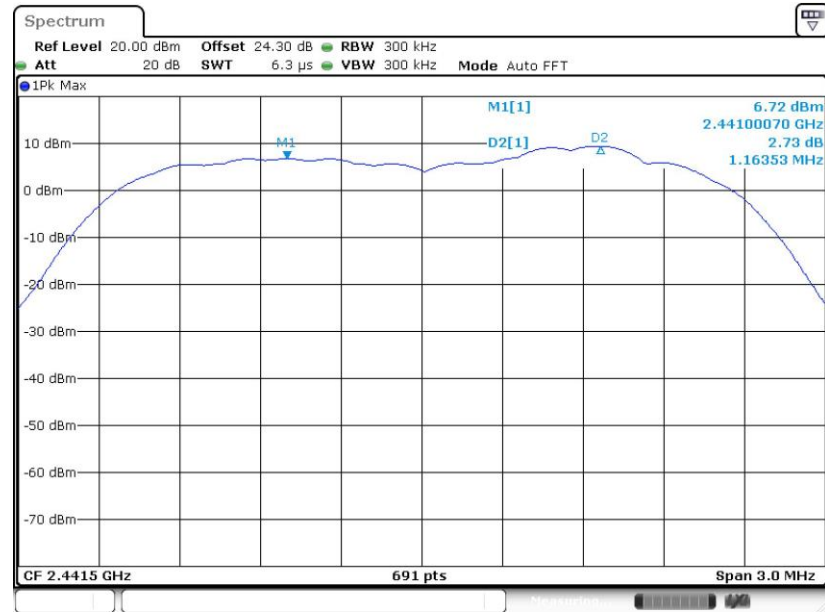

Date: 16.SEP.2018 02:36:11

Channel Separation Plot on Channel 77 - 78

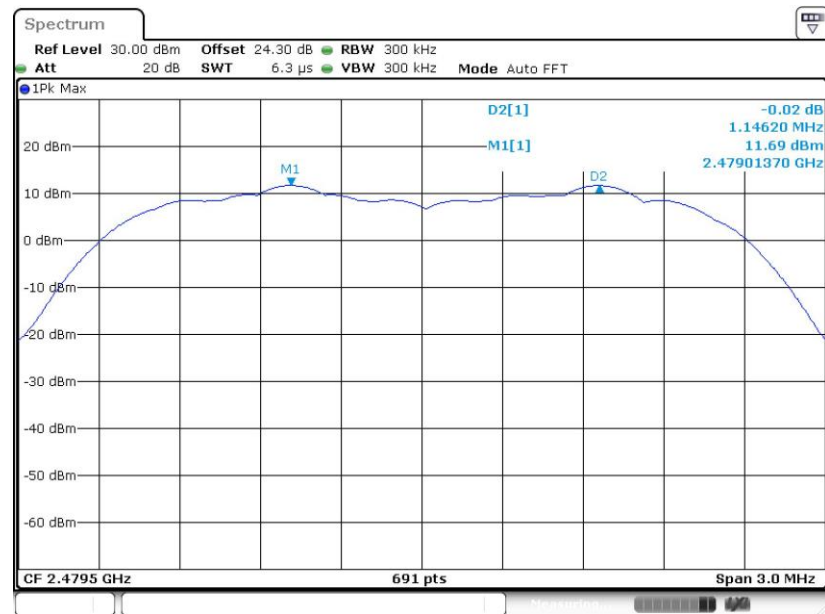


Date: 15.SEP.2018 11:36:16




**<3Mbps>**

### Channel Separation Plot on Channel 00 - 01

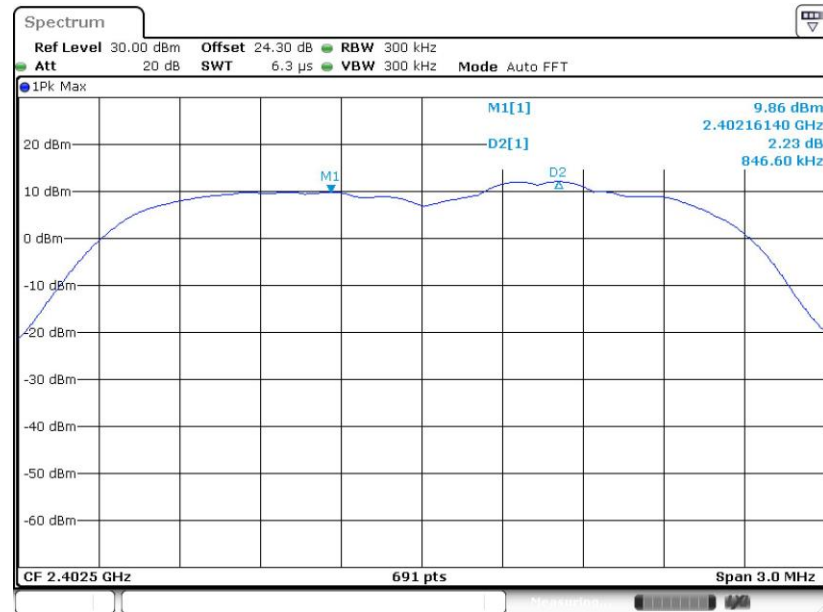

Date: 15.SEP.2018 11:08:43


### Channel Separation Plot on Channel 39 - 40

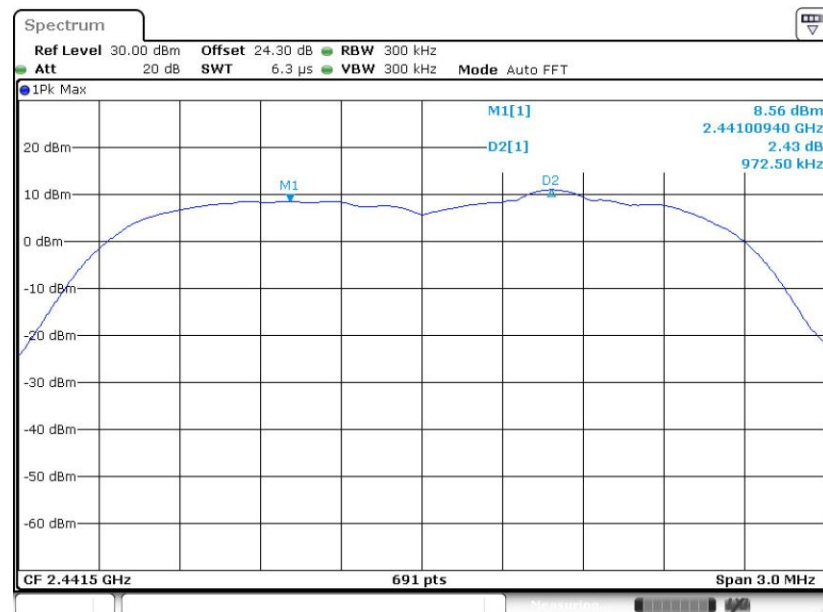

Date: 15.SEP.2018 11:14:38



Channel Separation Plot on Channel 77 - 78

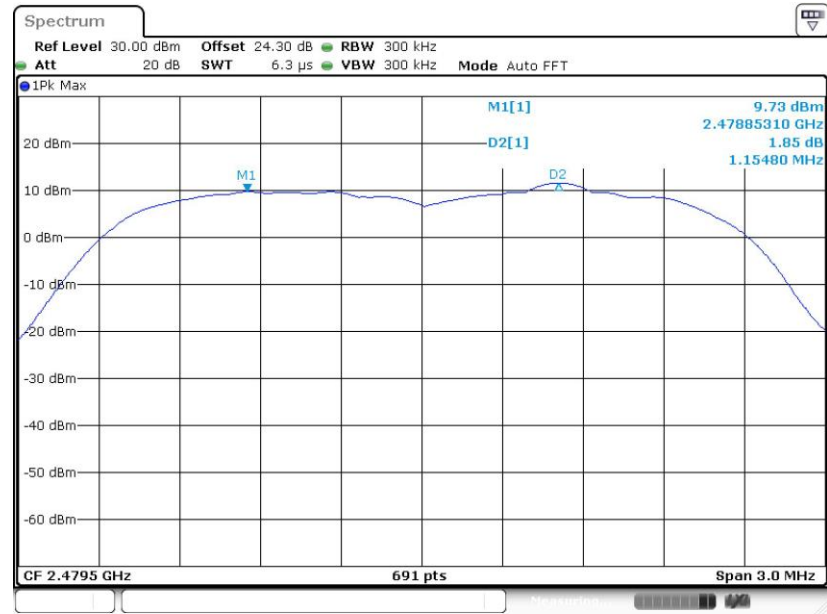

Date: 15.SEP.2018 11:17:16

### 3.3 Dwell Time Measurement

#### 3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### 3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.3.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW  $\geq$  RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup



#### 3.3.5 Test Result of Dwell Time

Please refer to Appendix A.

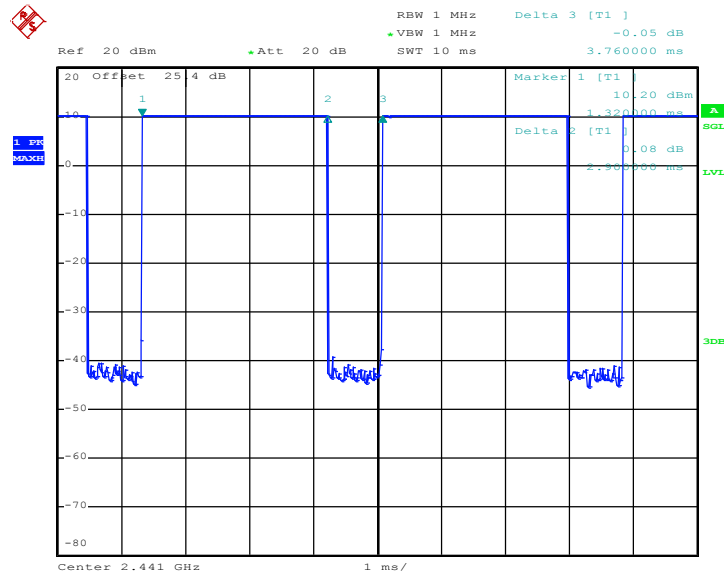**Package Transfer Time Plot**


Date: 14.SEP.2018 05:59:19

**Remark:**

1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels. With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s), Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels. With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s), Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

### 3.4 20dB and 99% Bandwidth Measurement

#### 3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


#### 3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.  
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.  
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;  
RBW  $\geq$  1-5% of the 99% bandwidth; VBW  $\geq$  3 \* RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
6. Measure and record the results in the test report.

#### 3.4.4 Test Setup

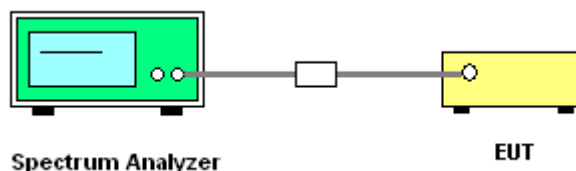


#### 3.4.5 Test Result of 20dB Bandwidth

Please refer to Appendix A.





## 20 dB Bandwidth Plot on Channel 78

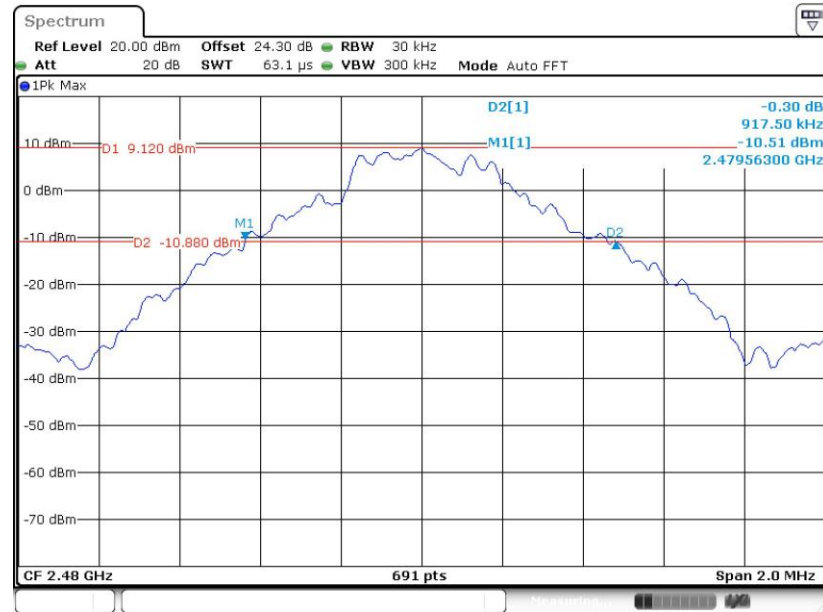

Date: 15.SEP.2018 10:44:18

## &lt;2Mbps&gt;


## 20 dB Bandwidth Plot on Channel 00



Date: 15.SEP.2018 11:23:31




### 20 dB Bandwidth Plot on Channel 39

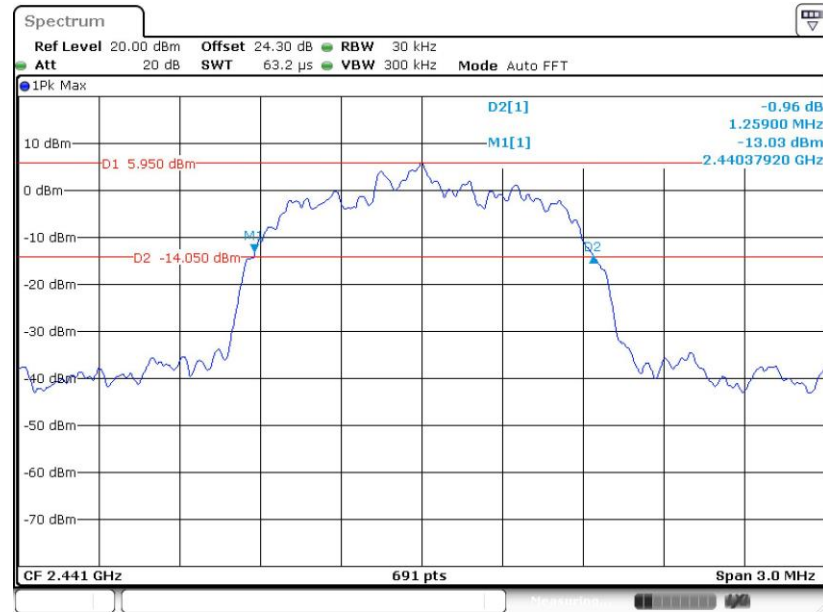

Date: 15.SEP.2018 11:29:00

### 20 dB Bandwidth Plot on Channel 78

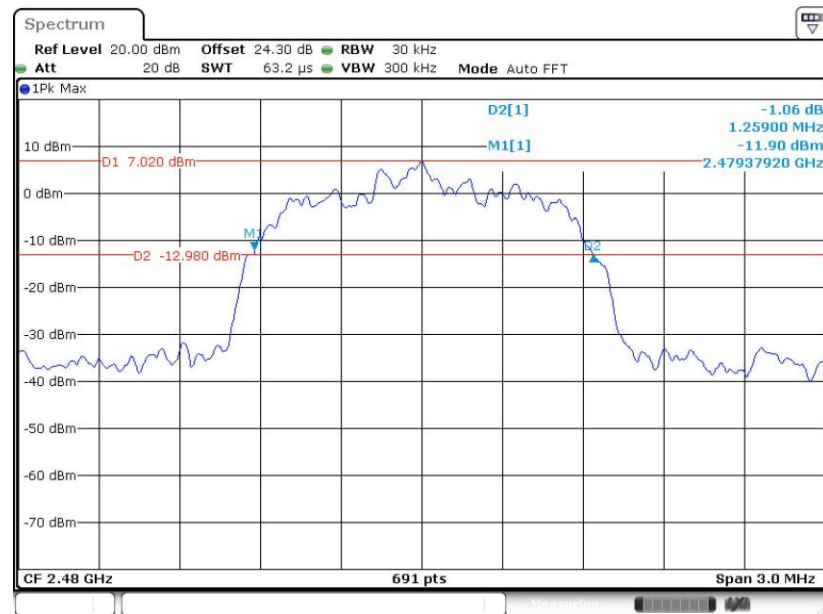

Date: 15.SEP.2018 11:37:28




&lt;3Mbps&gt;

## 20 dB Bandwidth Plot on Channel 00



Date: 15.SEP.2018 11:04:53


## 20 dB Bandwidth Plot on Channel 39

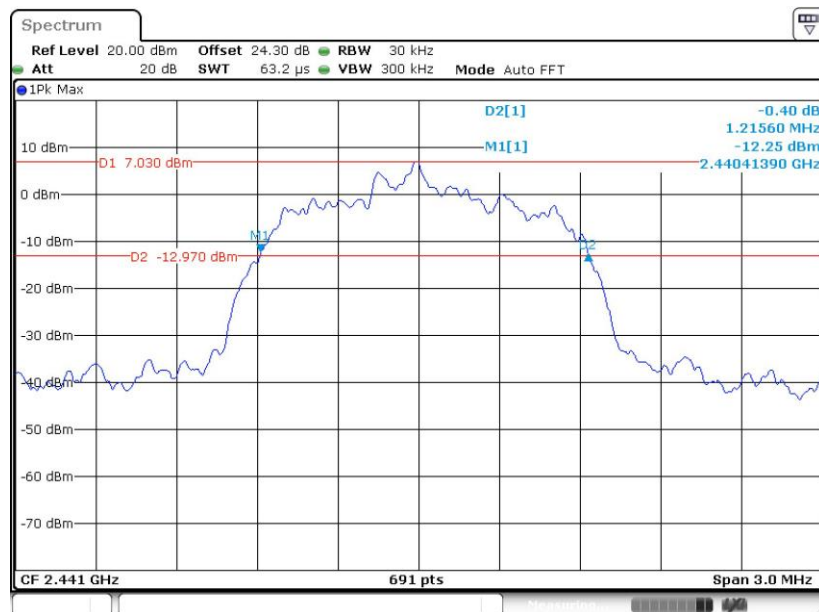

Date: 15.SEP.2018 11:10:51



20 dB Bandwidth Plot on Channel 78

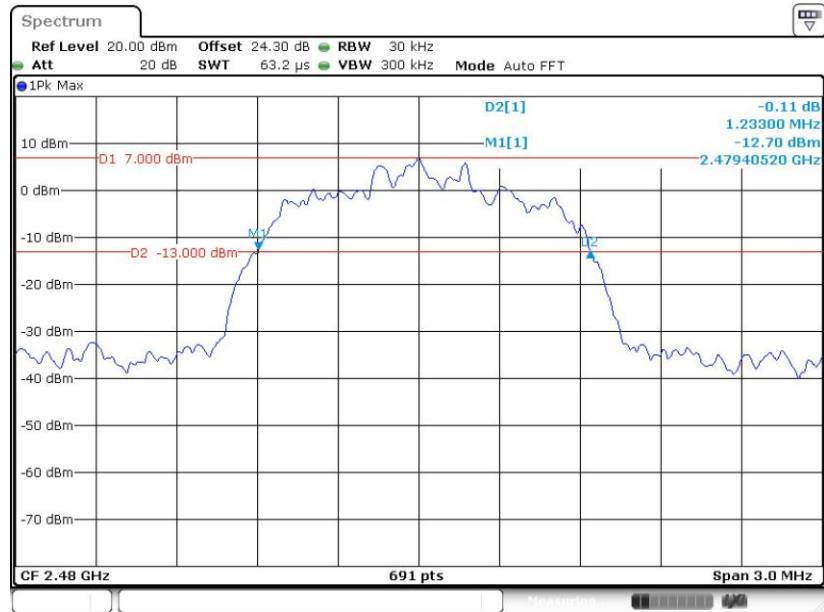

Date: 15.SEP.2018 11:19:28



### 3.4.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

<1Mbps>

#### 99% Occupied Bandwidth Plot on Channel 00



Date: 15 SEP 2018 10:35:29




99% Occupied Bandwidth Plot on Channel 39



Date: 15.SEP.2018 10:38:54

99% Occupied Bandwidth Plot on Channel 78

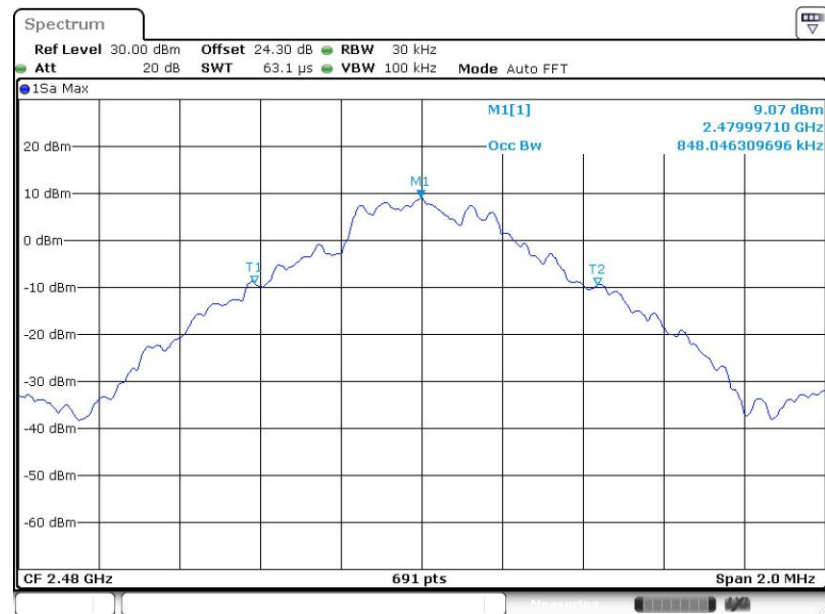

Date: 15.SEP.2018 10:45:27



<2Mbps>

99% Occupied Bandwidth Plot on Channel 00



Date: 15.SEP.2018 11:24:29

99% Occupied Bandwidth Plot on Channel 39



Date: 15.SEP.2018 11:29:41



99% Occupied Bandwidth Plot on Channel 78




Date: 15.SEP.2018 11:38:37

<3Mbps>

99% Occupied Bandwidth Plot on Channel 00



Date: 15.SEP.2018 11:06:24

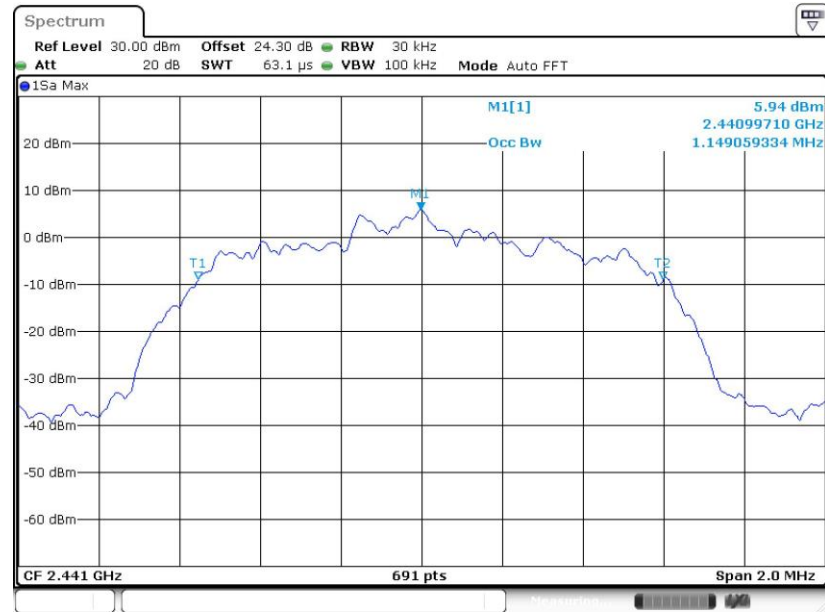**99% Occupied Bandwidth Plot on Channel 39**


Date: 15.SEP.2018 11:12:04

**99% Occupied Bandwidth Plot on Channel 78**


Date: 15.SEP.2018 11:20:40

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

### 3.5 Output Power Measurement

#### 3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


#### 3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

#### 3.5.4 Test Setup

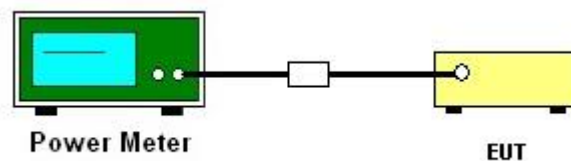

#### 3.5.5 Test Result of Peak Output Power

Please refer to Appendix A.

#### 3.5.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

## 3.6 Conducted Band Edges Measurement

### 3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

### 3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

### 3.6.4 Test Setup

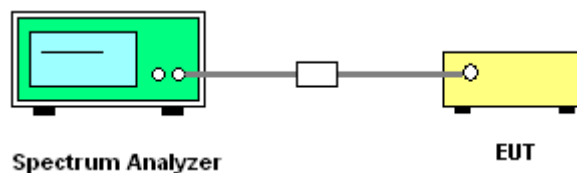





### 3.6.5 Test Result of Conducted Band Edges

&lt;1Mbps&gt;

#### Low Band Edge Plot on Channel 00

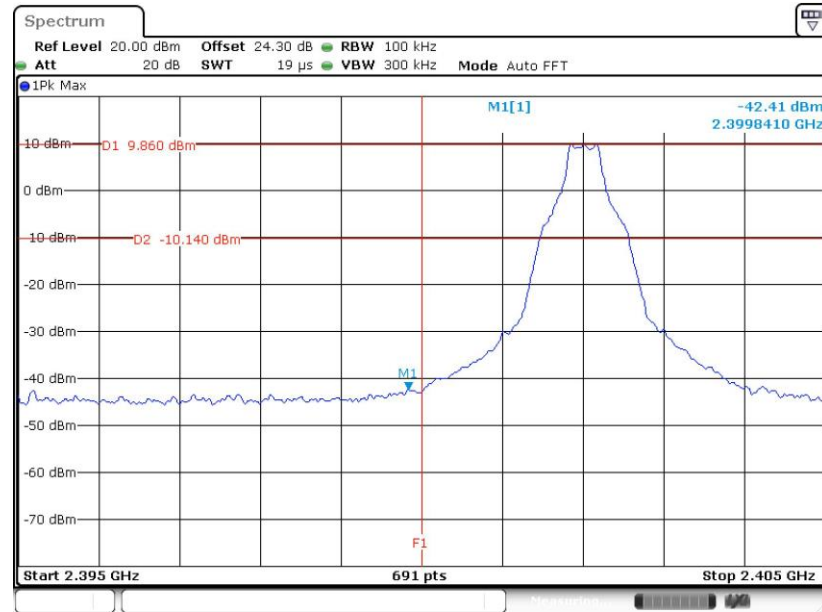


#### High Band Edge Plot on Channel 78

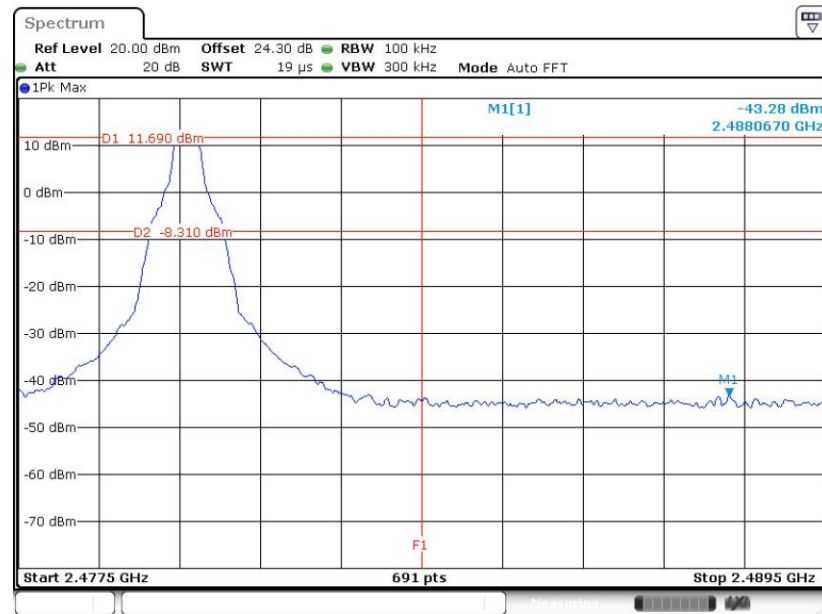




&lt;2Mbps&gt;

## Low Band Edge Plot on Channel 00

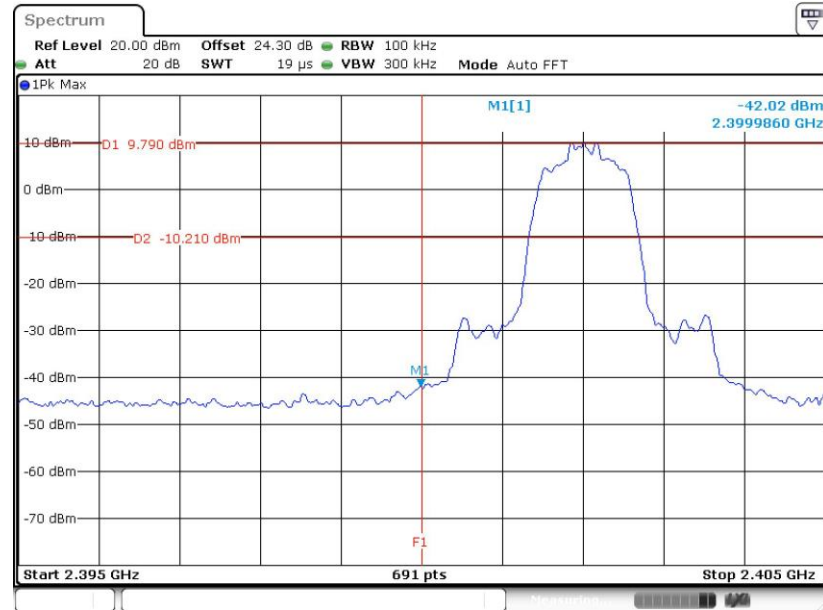

Date: 15.SEP.2018 11:23:52

## High Band Edge Plot on Channel 78

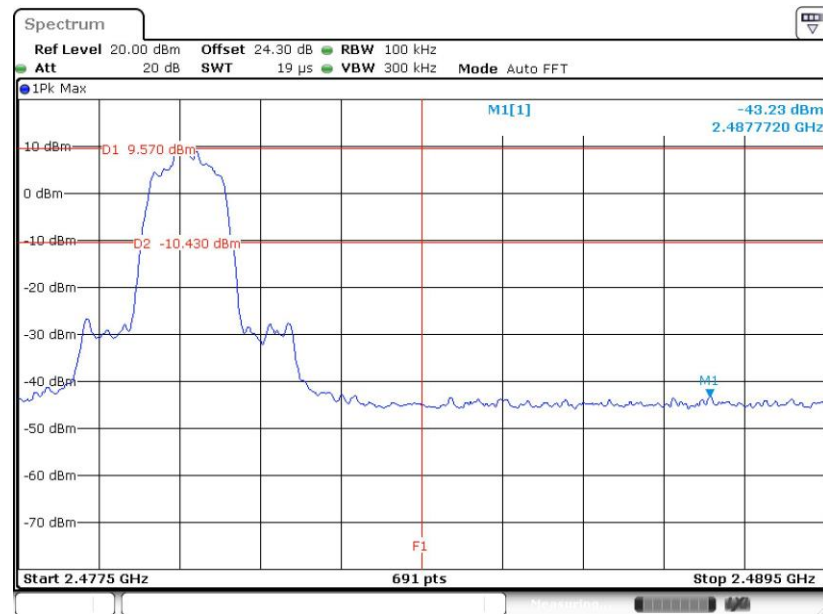


Date: 15.SEP.2018 11:37:55




&lt;3Mbps&gt;

## Low Band Edge Plot on Channel 00

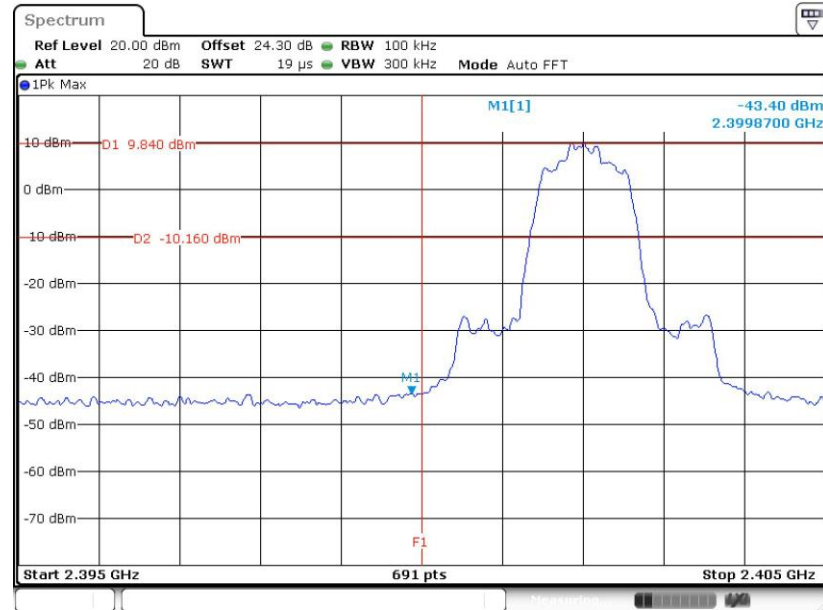

Date: 15.SEP.2018 11:05:26

## High Band Edge Plot on Channel 78

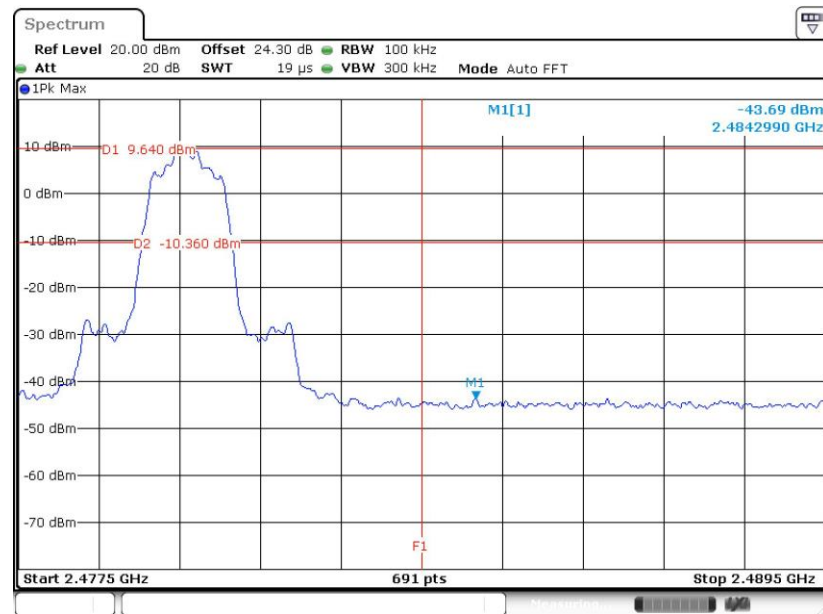


Date: 15.SEP.2018 11:19:56



### 3.6.6 Test Result of Conducted Hopping Mode Band Edges


&lt;1Mbps&gt;

#### Hopping Mode Low Band Edge Plot

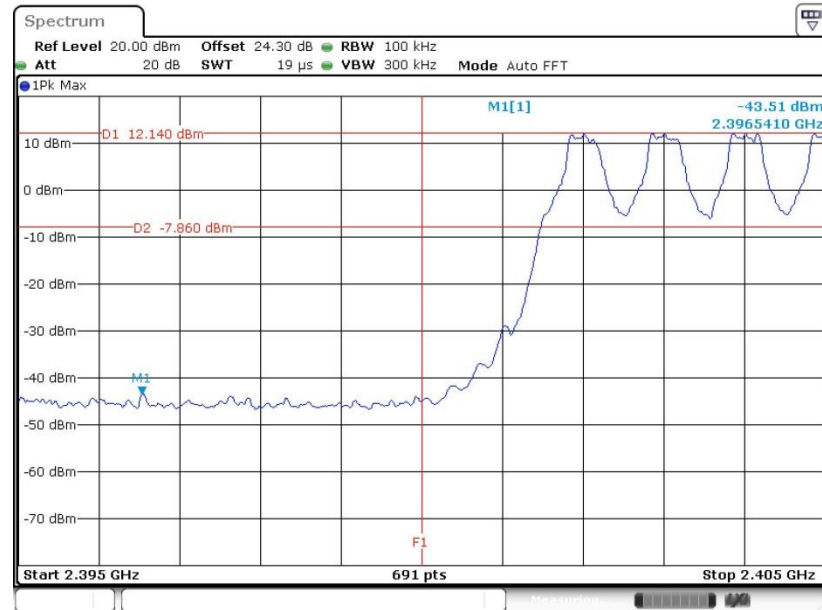

Date: 15 SEP.2018 10:48:24

#### Hopping Mode High Band Edge Plot

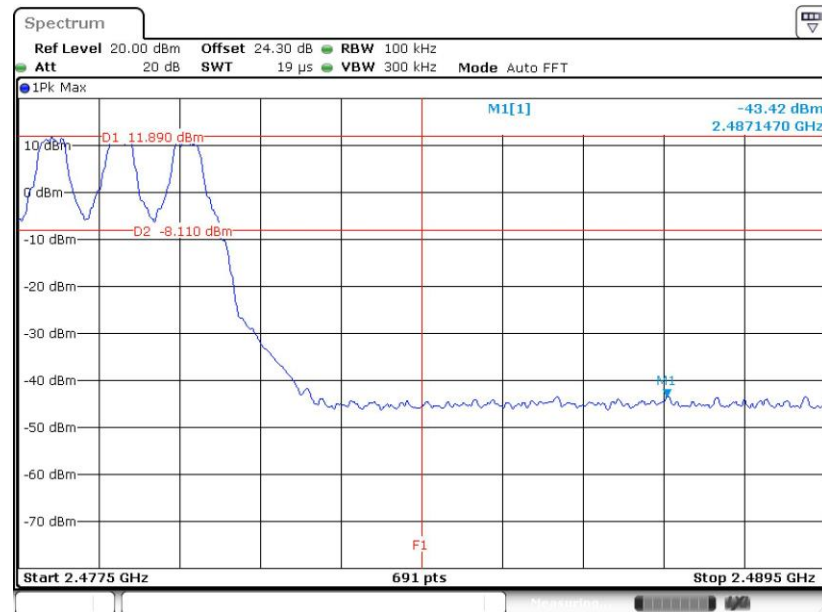


Date: 15 SEP.2018 10:48:51




&lt;2Mbps&gt;

## Hopping Mode Low Band Edge Plot

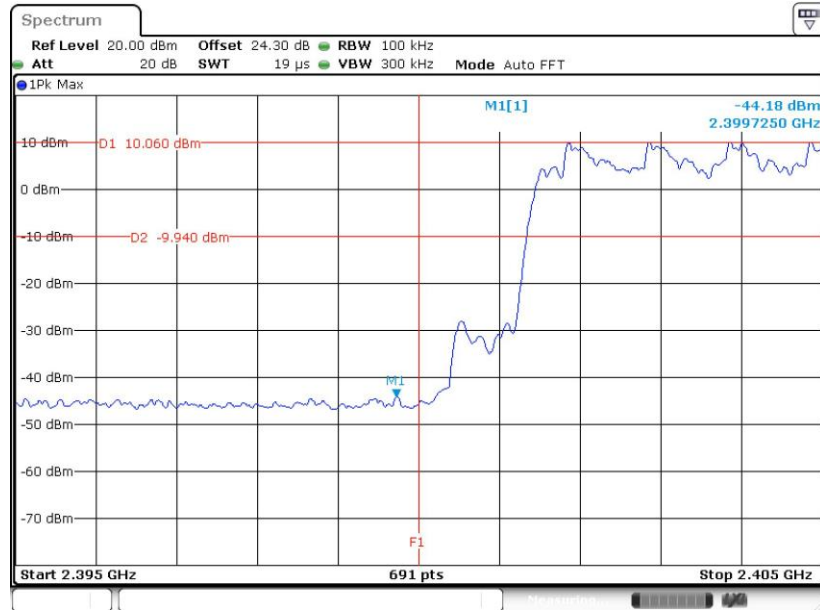

Date: 15.SEP.2018 11:01:56

## Hopping Mode High Band Edge Plot

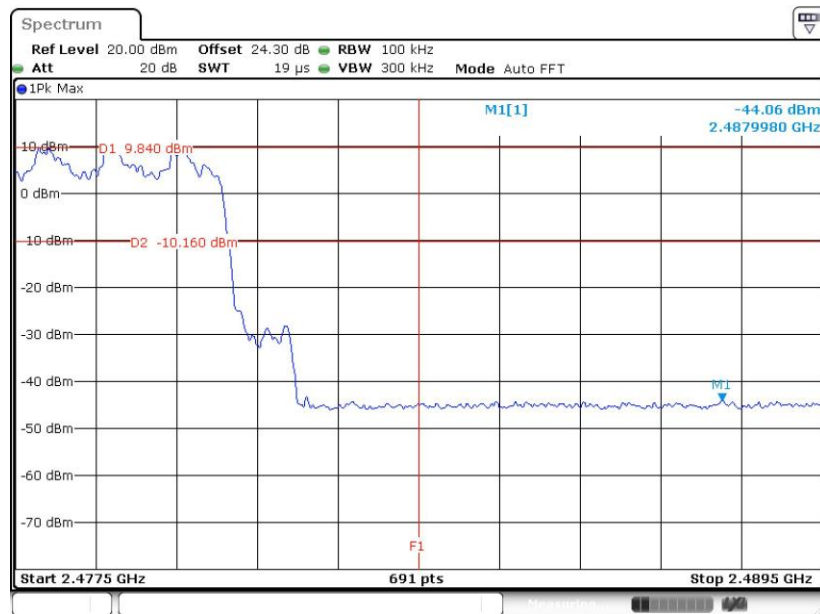


Date: 15.SEP.2018 11:02:14




&lt;3Mbps&gt;

## Hopping Mode Low Band Edge Plot

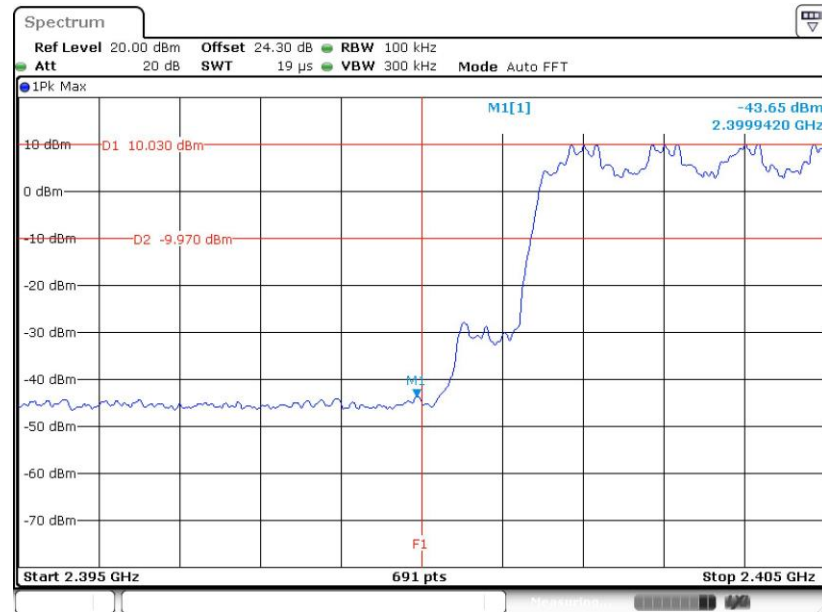

Date: 15.SEP.2018 11:02:42

## Hopping Mode High Band Edge Plot

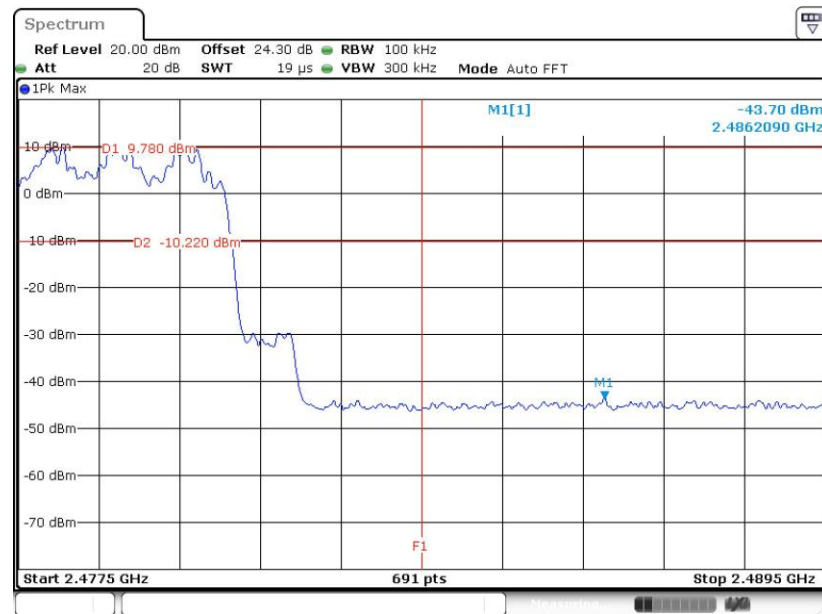

Date: 15.SEP.2018 11:03:01

## 3.7 Conducted Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.7.2 Measuring Instruments

See list of measuring equipment of this test report.

### 3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.7.4 Test Setup

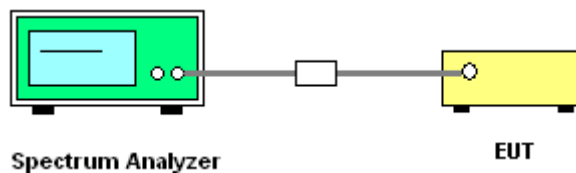

### 3.7.5 Test Result of Conducted Spurious Emission


<1Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

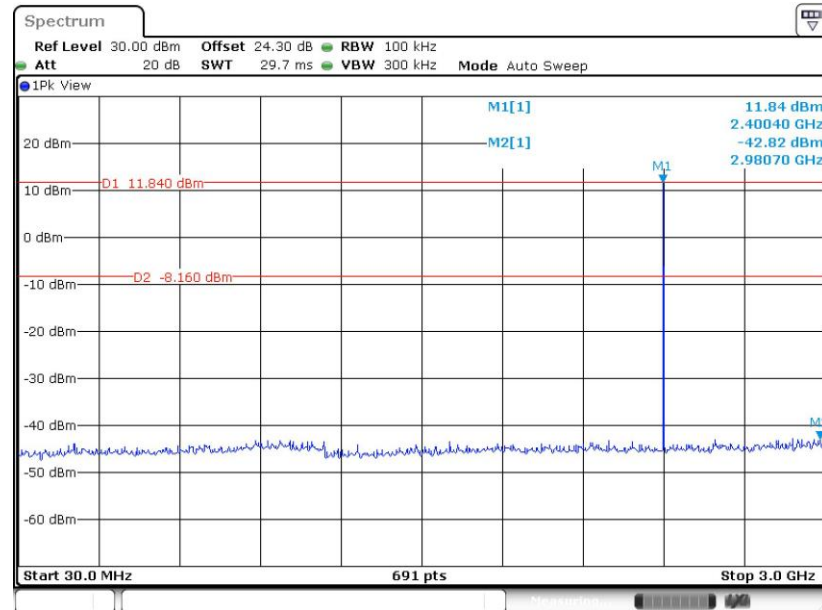


Date: 15 SEP.2018 10:55:31


1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

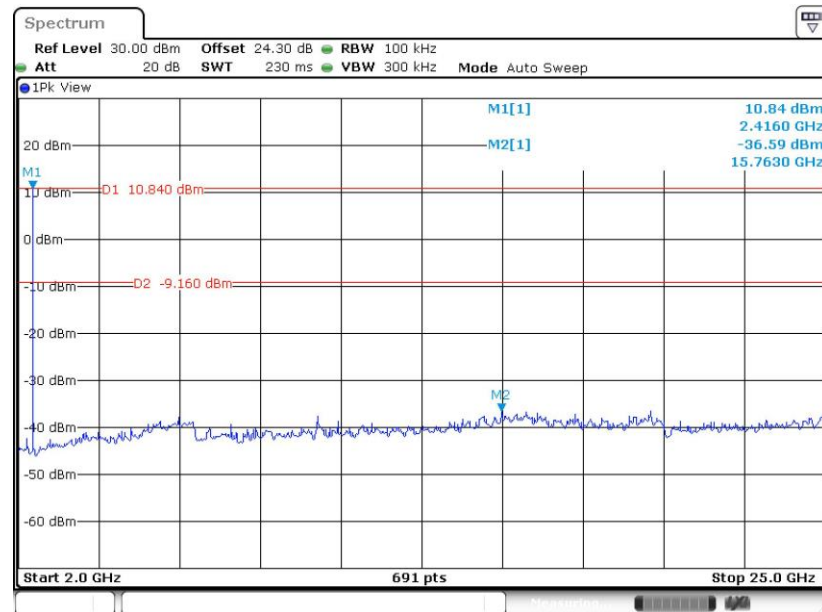


Date: 15 SEP.2018 10:56:06

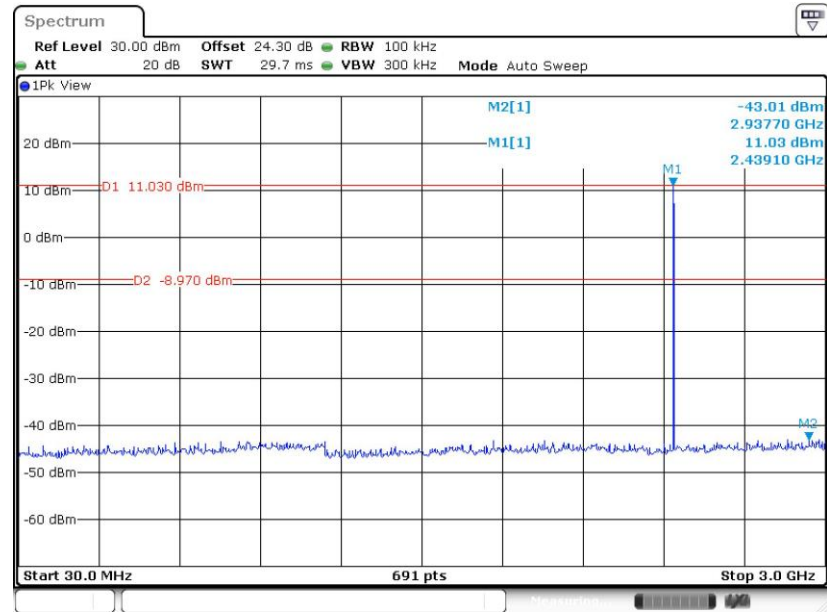**CSE Plot on Ch 39 between 30MHz ~ 3 GHz**


Date: 15.SEP.2018 10:59:11

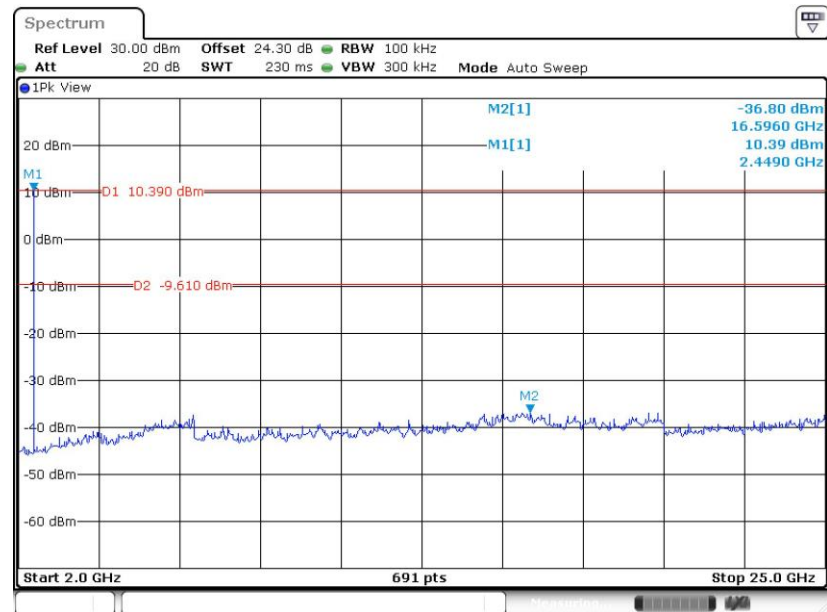**CSE Plot on Ch 39 between 2 GHz ~ 25 GHz**

Date: 15.SEP.2018 10:59:54

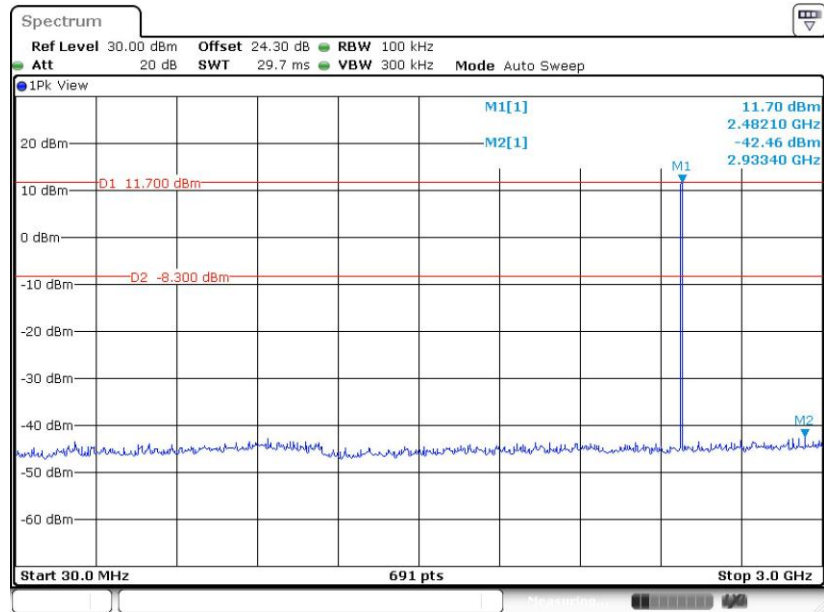**CSE Plot on Ch 78 between 30MHz ~ 3 GHz**

Date: 15.SEP.2018 11:00:38

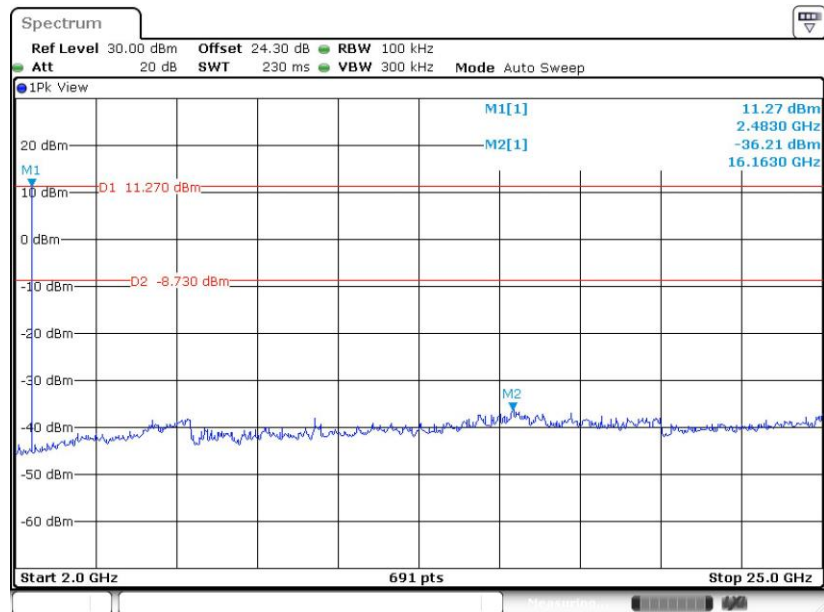
**CSE Plot on Ch 78 between 2 GHz ~ 25 GHz**

Date: 15.SEP.2018 11:01:12




<2Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

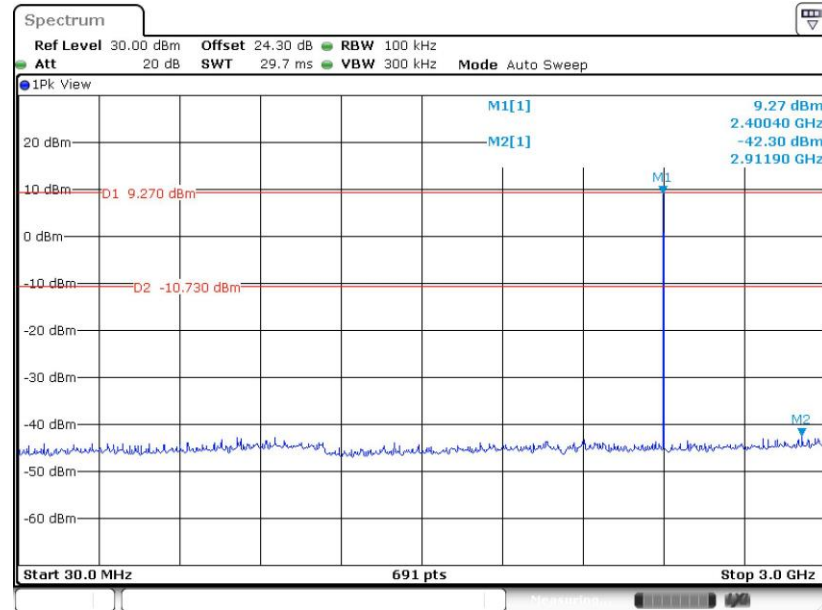


Date: 15.SEP.2018 11:26:12


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

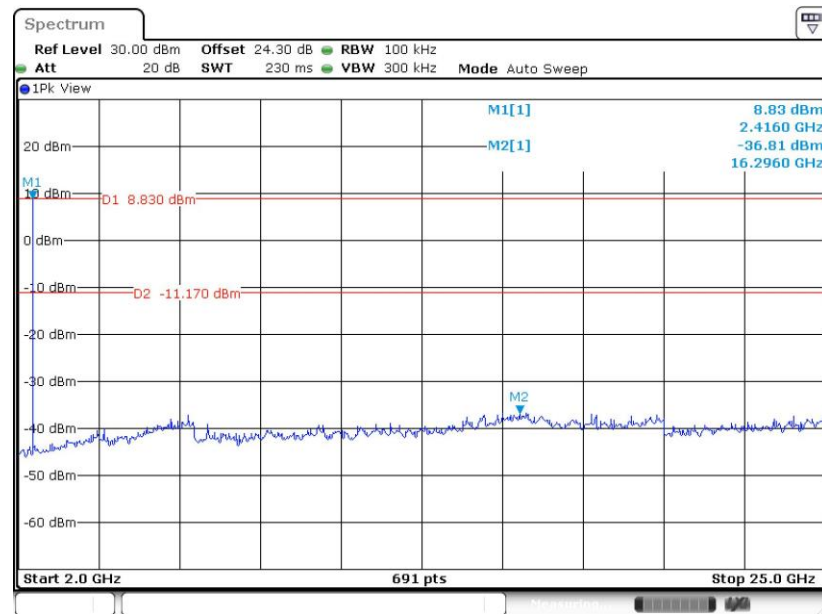


Date: 15.SEP.2018 11:26:40

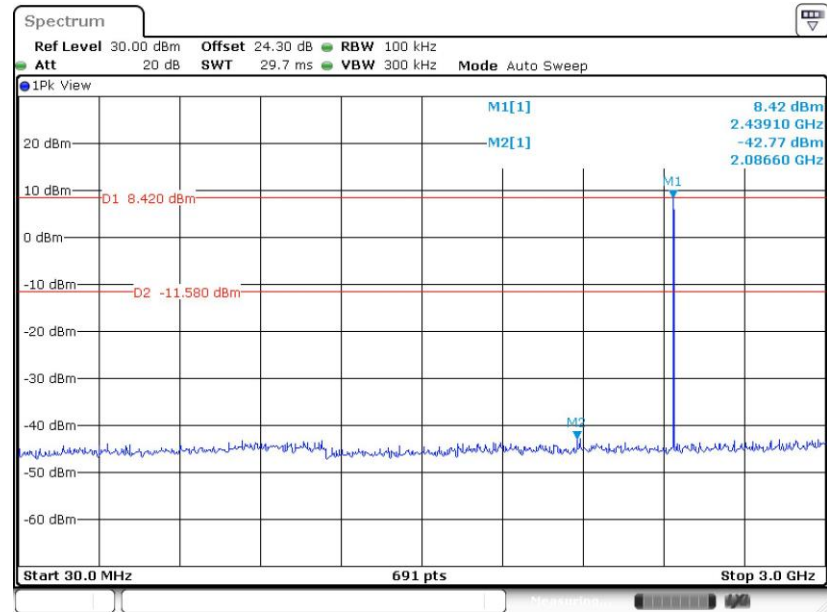**CSE Plot on Ch 39 between 30MHz ~ 3 GHz**


Date: 15.SEP.2018 11:31:05

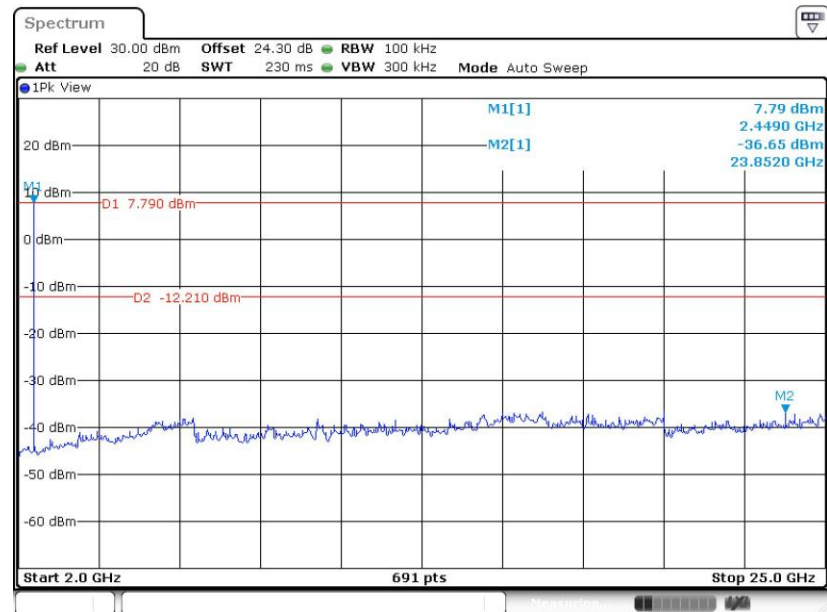**CSE Plot on Ch 39 between 2 GHz ~ 25 GHz**

Date: 15.SEP.2018 11:31:35

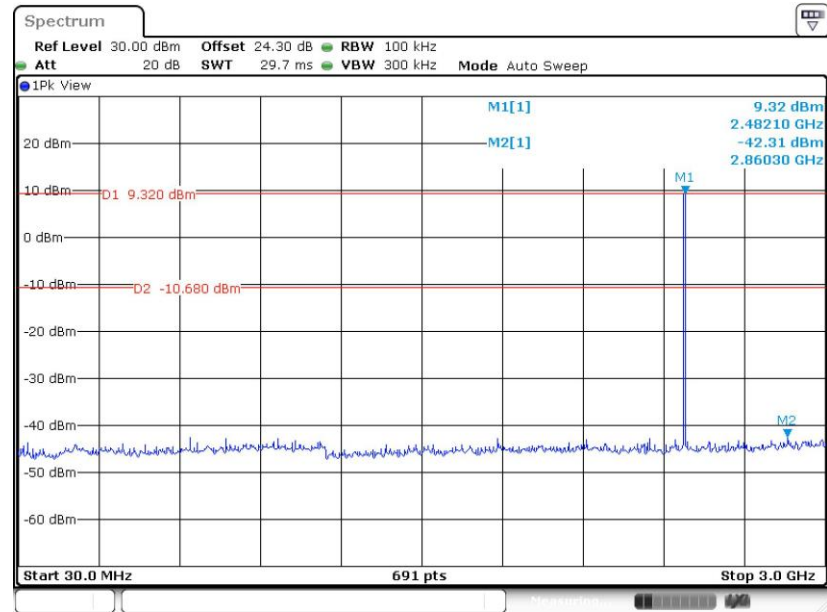**CSE Plot on Ch 78 between 30MHz ~ 3 GHz**

Date: 15.SEP.2018 11:39:09

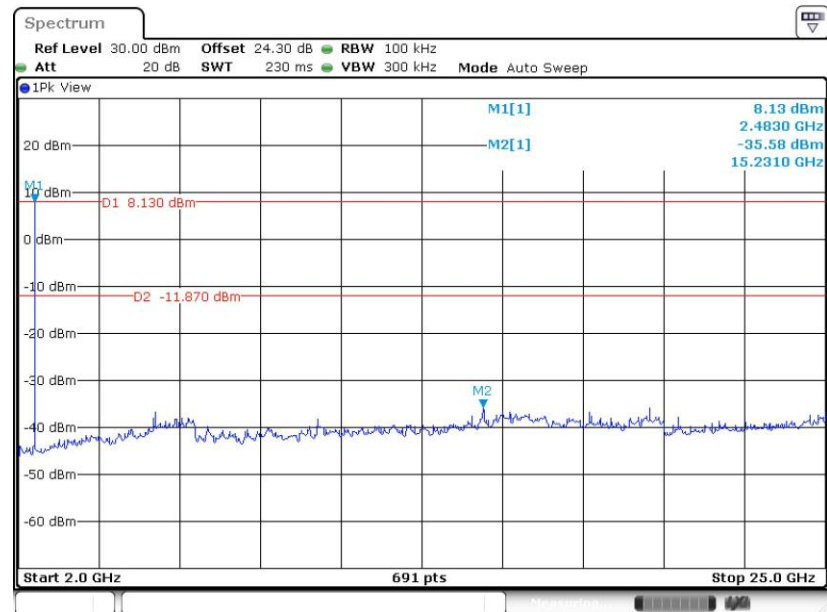**CSE Plot on Ch 78 between 2 GHz ~ 25 GHz**

Date: 15.SEP.2018 11:40:01