



Rockerz 260

Functions

- (1) Power on: When switched off, press and hold the MFB for 3 seconds. The voice prompt confirms the powering on. The white LED flashes thrice to indicate the same.
- (2) Power off: In powered on state, press and hold the MFB for 5 seconds. A voice prompt confirms the powering off. The red LED flashes before the device gets turned off.
- (3) Play/Pause: Short press the MFB to play/pause music at your convenience.
- (4) Volume Up: Short press the Volume Up “+” button in steps to increase the volume. A voice prompt indicates maximum volume.
- (5) Volume Down: Short press the Volume Down “-” button in steps to decrease the volume. A voice prompt indicates minimum volume.
- (6) Answer/End call: Short press the MFB once when answering or ending a call to complete the action.
- (7) Reject call: Press and hold the MFB for 2 seconds during an incoming call to reject the call.
- (8) Redial: To redial the previous contacted phone number, double press the MFB
- (9) Previous Track: To go back to the previous track or start the track from beginning, press and hold the Volume Down “-” button for 2 seconds.

Manual


Thank you for choosing boAt Rockerz 260. This manual is meant to guide you through the functionality of the wireless earphone neckband. Knowledge of Bluetooth and device connection is essential for the usage of the headset. Therefore, we strongly advise that this manual is thoroughly read before use, and referred to in times of difficulty, so that you can always be easily guided towards the shores of musical bliss.



- (10) Next Track: To skip to the next track, press and hold the Volume Up “+” button for 2 seconds.
- (11) Reset Device (Clear Paired List): In pairing mode (when white and red LEDs flash) press and hold the Volume Up and Volume Down buttons simultaneously for 5 seconds to clear the list of paired devices. The white LED stays on for 2 seconds to indicate the same.
- (12) Dual Pairing: To connect Rockerz 260 to two devices simultaneously, firstly connect the earphone to one of the devices. Then, switch off both: the earphone and the device’s Bluetooth. Thereafter, connect the earphone to the second device, and again switch on the first device’s Bluetooth. The earphone gets connected to both devices. If not, connect the first device manually once again to activate dual pairing.
- (13) BEAST™ Mode: Triple press the MFB to switch to Low Latency mode, also known as the BEAST™ Mode. Once switched on, it gets notified via a sound prompt. Triple press the MFB to turn it off and return to normal mode.
Made for the Gamers - By Gamers, BEAST™ Mode reduces the latency significantly and improves the overall gaming experience.
- (14) ENx™ Tech: Our ENx™ tech algorithm cancels out the background noise so that you can be heard crystal clear via voice calls. One need not activate ENx™ as the mic is equipped with the same and activated by default.
- Deliver your voice without interruptions anywhere – traffic, railway stations, airports, work space; literally anywhere!*
- (15) Voice Assistant: Long press the MFB for 2 seconds to wake up smart voice assistant.

Package Contents

- 1 x Rockerz 260
- 1 x USB Type C charging cable
- 2 x Pairs of additional earmuffs (Small & Large)
- 1 x Manual
- 1 x Warranty Card
- 1 x Catalogue

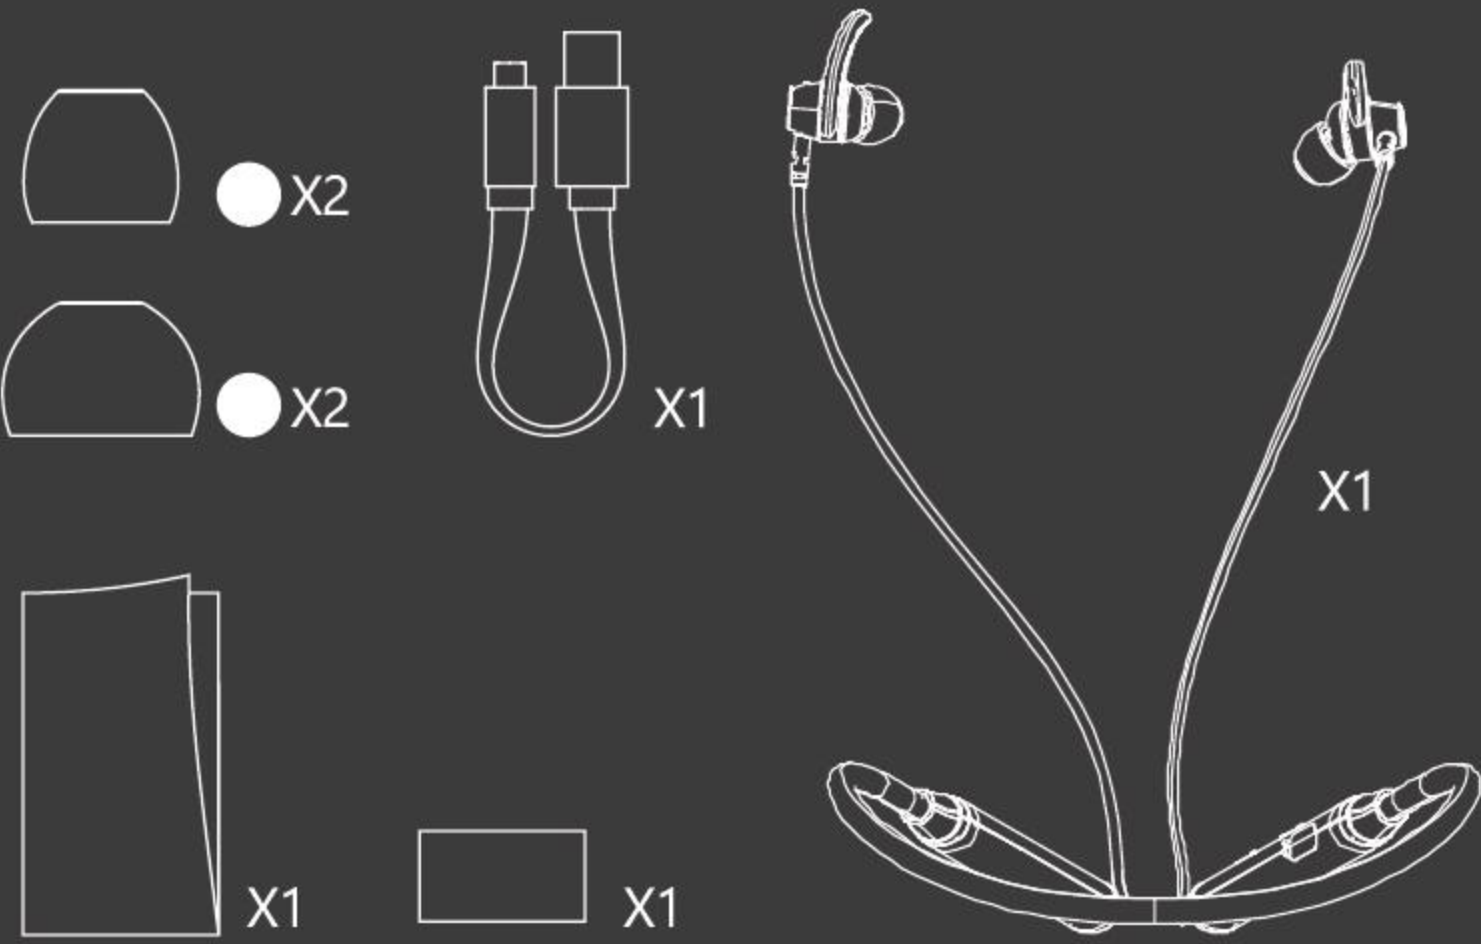

To Charge

Use a USB Type C charging cable to charge the earphone through either a laptop or an adaptor.

- (1) Low Battery: When the remaining battery is below 10%, there is a ‘Battery Low’ prompt every 1 minute and red LED quickly flashes to indicate the same.
- (2) Charging: Solid red LED indicates that the earphone is being charged (please note that the earphone cannot / should not be turned on while charging).
- (3) Fully charged: Solid white LED indicates the same.

Specifications

Bluetooth Version	V5.2
Operating Range	10m
Frequency	20Hz~20kHz
Driver Size	10mm*2
Battery	180mAh
Talk time	Up to 20 hours
Music time	Up to 25 hours
Bluetooth Profile	HFP/HSP/A2DP/AVRCP
Charging Time	About 1 hour
Charge Interface	Type C
Driver Impedance	16Ω
BEAST Mode	Yes
Water Resistance	IPX5

To Pair with Bluetooth

- (1) When switched off, press and hold the MFB (*Multifunction Button) for 5 seconds to switch on the wireless earphones & put them into pairing mode. The earphones automatically enter pairing mode with a voice prompt, the white and red LEDs flash alternatively to indicate the same.
- (2) Open Bluetooth functionality on your media device and search for “Rockerz 260” from the list of available devices.
- (3) Choose “Rockerz 260” from the list and if asked for a passcode, enter the pairing code “0000” to establish Bluetooth connectivity.
- (4) Once successfully connected, the white LED flashes once every 5 seconds to indicate the same



FCC Warning

- This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
 - Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction. Rockerz 260 FCC ID: 2BARQ-R260

Charging norms & Precautionary Guidelines: -	
1) Charger/Brick/Adapter 2) Cable/Wire	: 5V 2A : Standard Cable (35 strands @0.06mm diameter/ strand)
Any other accessory can be paired up with the product as long as the specifications are as per above norms.	

Front

Back