

# BARTEC

## SC9EX2 label specification

---

Status:

Approved

Last modified by:

Anders Larsson

Date:

2024-08-21

Approved by:

Sebastian Kuhn

Revision:

1.0

Page:

1(14)

# Table of Contents

1 Device Marking – SC9EX2

Device marking. Marking is in the battery pack compartment. Not visible when battery pack is inserted in the device

1.1 Device marking content - SC9EX2

1.1.1 Device marking – drawing SC9EX2

1.1.2 Laser warning sticker - SC9EX2

2 Device Marking – e-label – SC9EX2

2.1 How to access the information

2.2 IMEI numbers

2.3 Regulatory labels – SC9EX2

2.3.1 Regulatory labels – image stored in the device – SC9EX2

3 Battery Pack Marking

3.1 Battery Marking Top

3.1.1 Battery Marking Top – drawing

3.2 Battery Marking Bottom

3.2.1 Battery Marking Bottom - drawing

# 1 Device Marking – SC9<sup>EX2</sup>


Device marking. Marking is in the battery pack compartment. Not visible when battery pack is inserted in the device

## 1.1 Device marking content - SC9<sup>EX2</sup>

Info	Device marking text	Logo
	BARTEC SC9 <sup>EX2</sup>	
Model	Model: SC9 <sup>EX2</sup>	
Type	Type: B7-S29C-****/*****”	
Bartec address/info	BARTEC GmbH Max-Eyth-Straße 16 97980 Bad Mergentheim, Germany <a href="http://www.bartec.com">http://www.bartec.com</a>	
Serial: TTTTTT = Product variant code YY = year of manufacture SSSSSS = Unique serial nr	S/N: TTTTTTYSSSSSS  example: SC9EX2YY000001	QR/Data matrix (for manufacturer to decide)
CE logo notify body nr	“LOGO”	CE LOGO
WEEE	“LOGO”	WEEE LOGO (without bar)
UL listed	UL listed logo + “ I.T.E. EQ. for Haz. Loc + “cert nr” UL listed logo + “I.T.E” + “cert nr”	UL listed LOGO  UL listed LOGO
Safety info (UL related?)	USB port: USB-PD compatible – 5-20 Vdc / max 3 A DC-In port: 12 Vdc / max 1.5 A USB Um = 20 V / DCin Um = 12 V	
ATEX / IECEx marking	UL 24 ATEX xxxxx II 3G Ex ic op is IIC T4 Gc II 3D Ex ic op is IIIC T135°C Dc IP64 IECEx UL 24.xxxxx	ATEX / IECEx marking
NEC500 / NEC505	Class I, Div 2, Groups A, B, C and D; Class II, Div 2, Groups E, F and G; Class III, T4 Zone 2, AEx ic op is IIC T4 Gc Zone 22, AEx ic op is IIIC T135°C Dc Ex ic op is IIC T4 Gc Ex ic op is IIIC T135°C Dc -20° < Ta < +55°C	

EX warning text	<div>WARNING/ATTENTION:</div> <div>Use only replaceable battery pack BARTEC GmbH type: 17-S1Z0-0020/**** Utiliser uniquement la batterie BARTEC GmbH type: 17-S1Z0-0020/****</div> <div>INTRINSICALLY SAFE/SÉCURITÉ INTRINSÈQUE Warning - Substitution of components may impair intrinsic safety. Avertissement - La substitution des composants peut nuire à la sécurité intrinsèque.</div>	
Country of origin	Made in Thailand	


1.1.1 Device marking – drawing SC9EX2

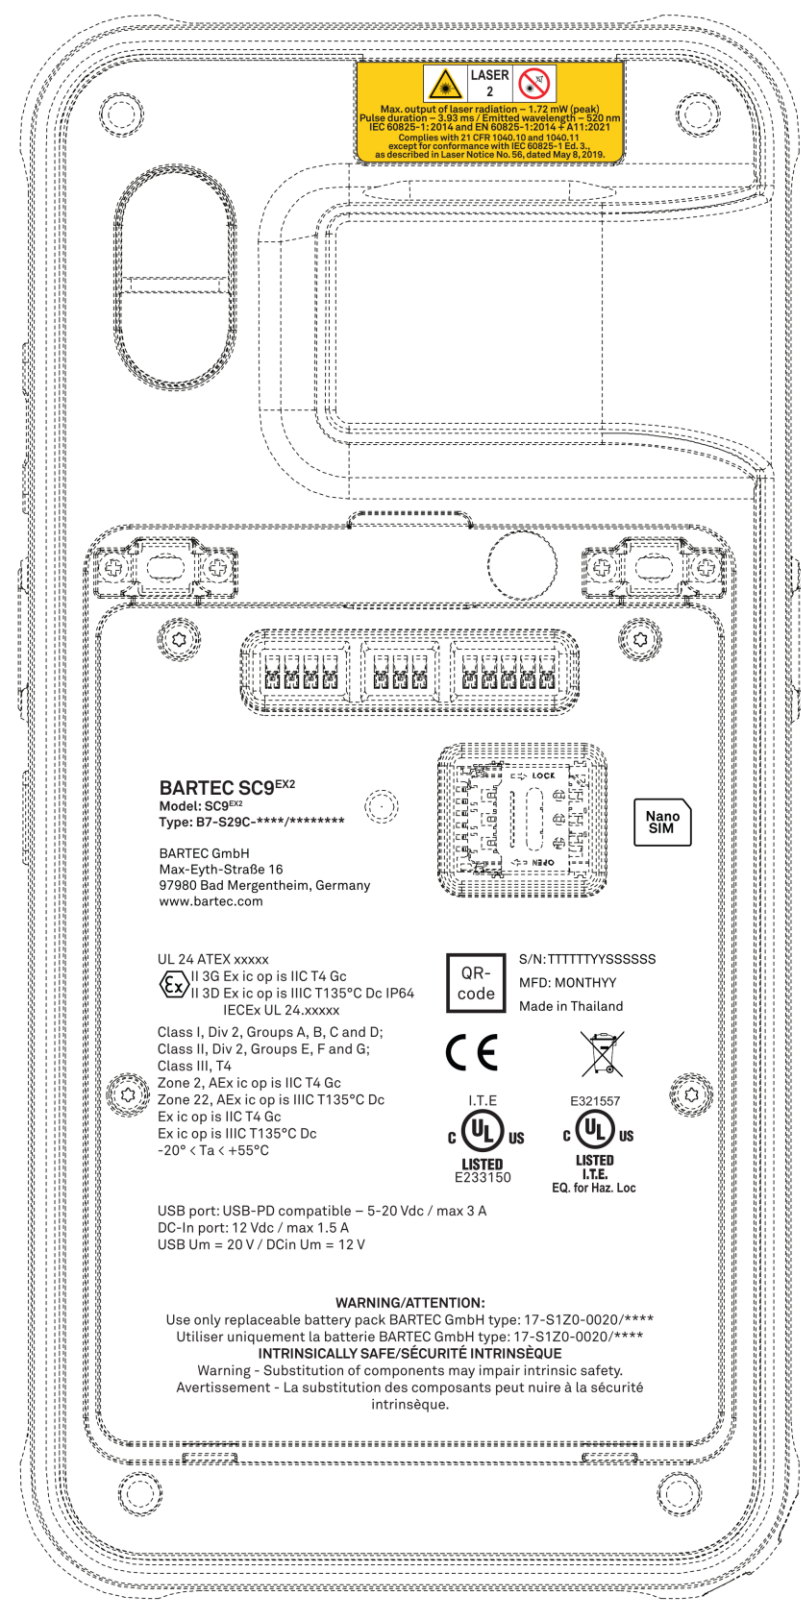

## 1.1.2 Laser warning sticker - SC9<sup>EX2</sup>

Sticker placed on the outside for scanner version.

Placement on back side “north” of the scanner bump.

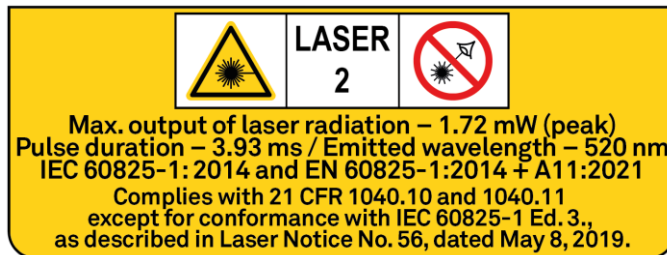


## 2 Device Marking – e-label – SC9<sup>EX2</sup>

This chapter covers mandatory markings and labels that are stored electrically in the device and accessible for the end user.

### 2.1 How to access the information

Go to the device “SETTINGS” menu.


Go to “ABOUT PHONE”

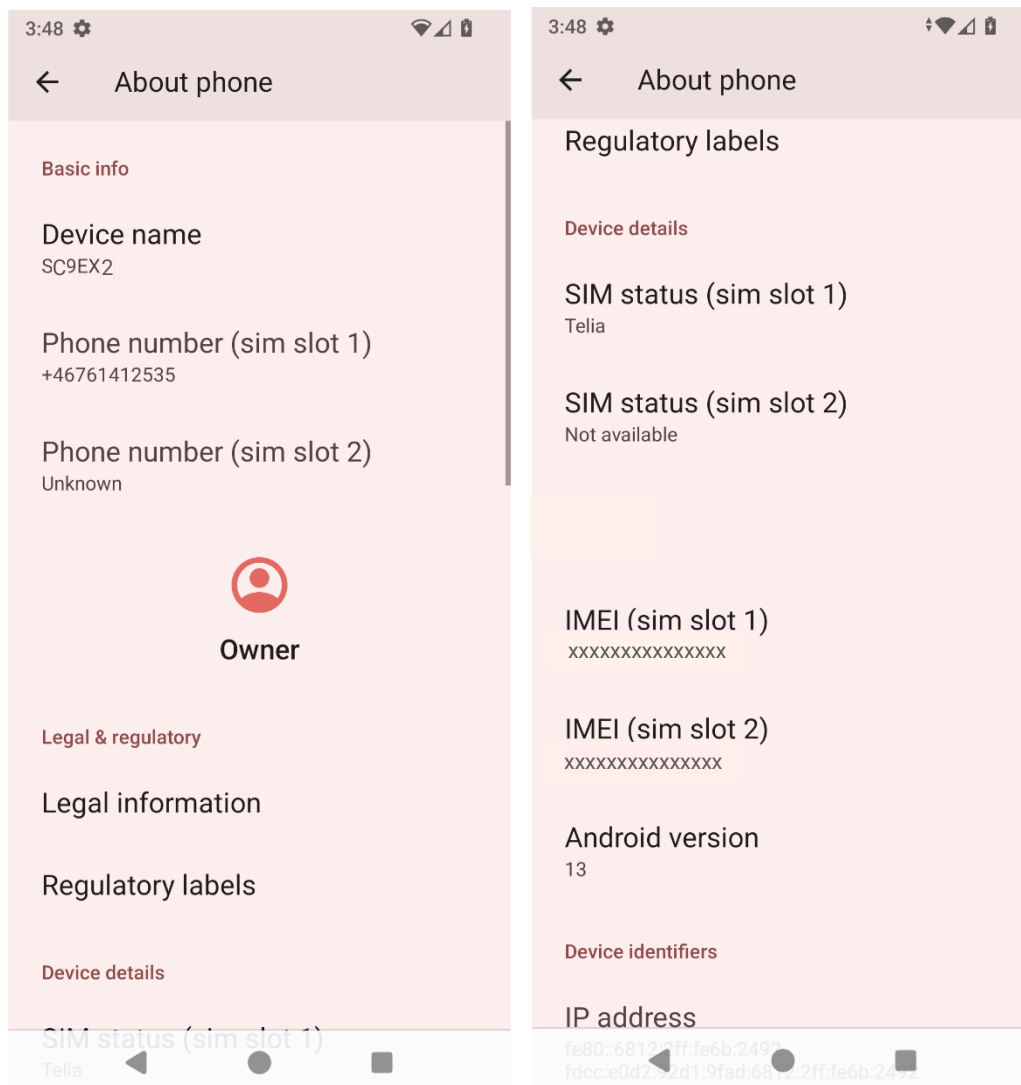

## 2.2 IMEI numbers

The IMEI numbers can be found in menu “ABOUT PHONE”



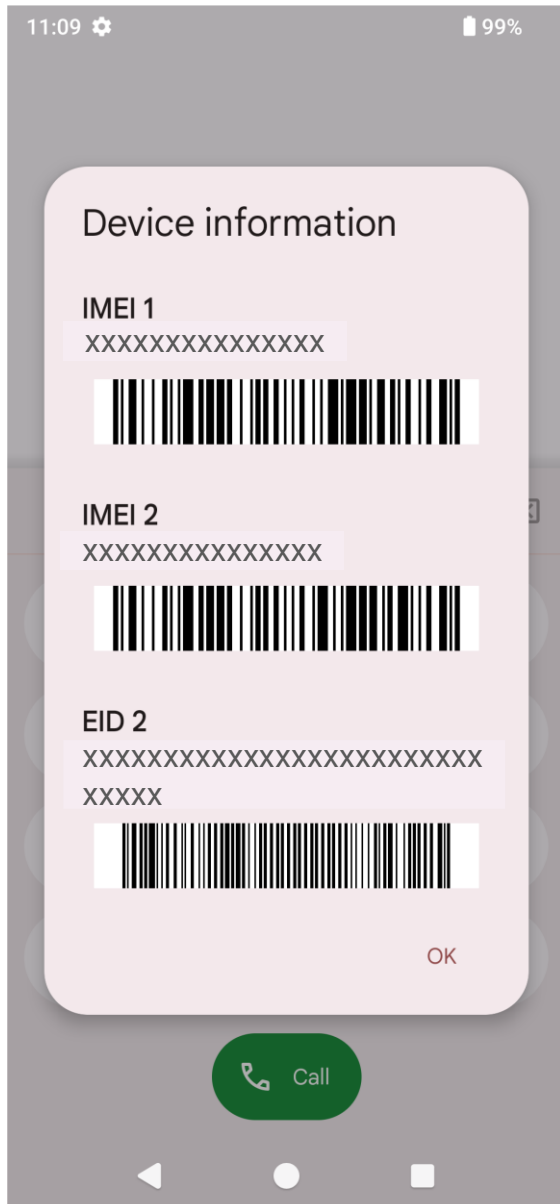

The IMEI numbers can also be found by typing: \*#06#





## 2.3 Regulatory labels – SC9<sup>EX2</sup>

To be updated with actual certificate numbers and approval codes when type approval has been granted in each country.

Country	Device marking explanation	Logo
Australia	the Regulatory Compliance Mark (RCM) symbol	
Brazil	“ANATEL” followed by the approval code	
Canada	A certification number made up of a Company Number (CN) assigned by ISED's CEB, followed by the Unique Product Number (UPN) assigned by the applicant.	IC: 5736C-SX9EX
Oman	TRA label label design must match the below image and must contain the following information: <ul style="list-style-type: none"> <li>Telecommunications Regulatory Authority (TRA)</li> <li>Dealer/Importer Registration Number issued by the TRA</li> <li>Approval/Registration Number issued by the TRA</li> </ul>	<div>Oman - TRA</div> <div>Dealer No.</div> <div>Certificate No.</div>
Saudi Arabia	Devices are required to have CITC E-Label embedded in their software as a proof of compliance. Shall show the certificate number issued by CITC	<div>Kingdom of Saudi Arabia</div>  <div>(Certificate number starts with TA)</div>
Singapore	Label containing the Dealer's Individual Licence	<div>Complies with</div> <div>IMDA Standards</div> <div>[Dealer's Licence No.]</div>
South Korea	<p>Label to display: KC logo, Korea ID</p> <p>The identification mark format is R-X-ABC-YYYYYYY. “R” is the broadcasting and communication equipment identifier. “X” is the authentication field identification number. The certification field depends on a certification scheme. The identification number can be:</p> <p>“C” - certification “R” - registration “I” - interim</p> <p>“ABC” is the RRA's applicant identification code</p> <p>“YYYYYYY” is the applicant's "Product Identification Code"</p>	 <div>R-CRM-ABC-XXXXXXXXXX</div>



## 2.3.2 Regulatory labels – image stored in the device – SC9<sup>EX2</sup>

Australia



Brazil



Canada

IC: 5736C-SX9EX

Oman

Oman - TRA
Dealer No.
Certificate No.

Saudi Arabia



Singapore

Complies with IMDA Standards [Dealer's Licence No.]
-----------------------------------------------------------

South Korea



United States

FCC ID: TBUSX9EX

### 3 Battery Pack Marking


### 3.1 Battery Marking Top

Laser engraved on PC material

Marking on the outside of the battery pack. Always visible. Marking will be the same for all devices and variants.

Info	Device marking text	Logo
EX warning text	<p>WARNING/ATTENTION</p> <p>Explosion hazard - Do not replace or charge battery pack or use USB port in hazardous locations! Read Quick Start Guide 11 -S190-7E0001 before use!</p> <p>Risque d'explosion - Ne pas remplacer ou charger la batterie ou utiliser le port USB a l'intérieur d'une zone explosive</p> <p>Lire attentivement le manuel rapide 11 -S190-7E0001 avant toute utilisation!</p>	
Other		<p>Bartec Logo</p> <p>NFC Wayfinding Mark</p> <p>Battery locking marks</p>

### 3.1.1 Battery Marking Top – drawing

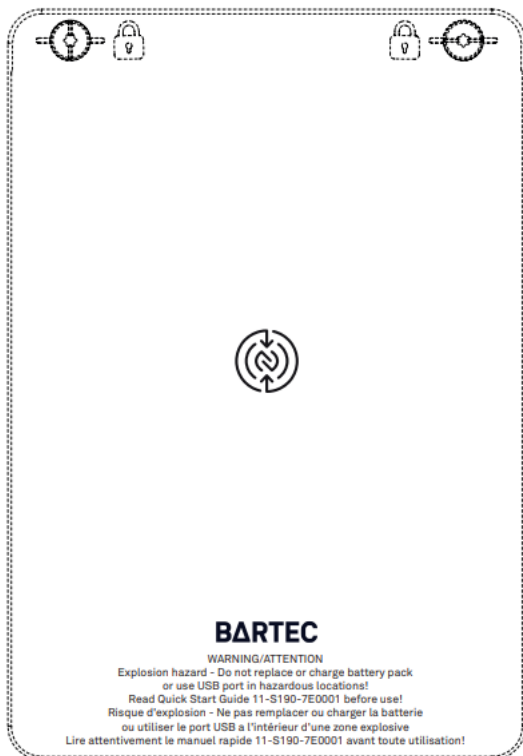

## 3.2 Battery Marking Bottom

Laser engraved on PC material

Battery pack marking (internal): marking is on the back side of the battery pack. Not visible when battery pack is inserted in the device.

Info	Device marking text	Logo
Model	BARTEC BA9 <sup>EX1</sup>	
Type	Type: 17-S1Z0-0020	
Bartec address/info	Mfr: BARTEC GmbH Max-Eyth-Straße 16/ 97980 Bad Mergentheim, Germany	
Serial: TTTTTT= Product variant code YY= year of manufacture SSSSSS= Unique serial nr	S/N: BA9EX1YYSSSSSS  example: BA9EX1YY000001	QR/Data matrix (for manufacturer to decide)
Safety info	Battery info 3.68 V , 4300 mAh , 15,8 Wh Limited Charge Voltage (4.2 V)	
Warning text	CAUTION Do not disassemble, short circuit or dispose of in fire! Dispose of used batteries properly!  Use only in BARTEC SP9EX1 Smartphone or BARTEC SC9EX1 Smartscanner Type 17-S19*-****/***** Utiliser uniquement en BARTEC SP9EX1Smartphone ou BARTEC SC9EX1 Smartscanner Type 17-S19*-****/*****	
CE logo notify body nr	“LOGO” 0044	CE LOGO
Recognized Component Mark UL	Recognized Component Mark UL logo + “cert nr”	Recognized Component Mark UL LOGO
WEEE	LOGO	WEEE LOGO (without bar)
Country of origin	Made in Thailand	

### 3.2.1 Battery Marking Bottom - drawing

