

Appendix A: Effective (Isotropic) Radiated Power Output Data

Test Result

Band	Channel	PCL	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
GSM850	128	5	33.43	26.78	38.45	PASS
GSM850	190	5	33.54	26.89	38.45	PASS
GSM850	251	5	33.55	26.9	38.45	PASS
GSM1900	512	0	29.44	25.67	33.00	PASS
GSM1900	661	0	29.58	25.81	33.00	PASS
GSM1900	810	0	29.51	25.74	33.00	PASS

Band	Channel	PCL	Slot	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
GPRS850	128	5	1	33.41	26.76	38.45	PASS
GPRS850	128	5	2	32.38	25.73	38.45	PASS
GPRS850	128	5	3	30.26	23.61	38.45	PASS
GPRS850	128	5	4	29.10	22.45	38.45	PASS
GPRS850	190	5	1	33.50	26.85	38.45	PASS
GPRS850	190	5	2	32.52	25.87	38.45	PASS
GPRS850	190	5	3	30.46	23.81	38.45	PASS
GPRS850	190	5	4	29.33	22.68	38.45	PASS
GPRS850	251	5	1	33.52	26.87	38.45	PASS
GPRS850	251	5	2	32.54	25.89	38.45	PASS
GPRS850	251	5	3	30.50	23.85	38.45	PASS
GPRS850	251	5	4	29.40	22.75	38.45	PASS
GPRS1900	512	0	1	29.38	25.61	33.00	PASS
GPRS1900	512	0	2	28.64	24.87	33.00	PASS
GPRS1900	512	0	3	26.92	23.15	33.00	PASS
GPRS1900	512	0	4	25.79	22.02	33.00	PASS
GPRS1900	661	0	1	29.51	25.74	33.00	PASS
GPRS1900	661	0	2	28.77	25	33.00	PASS
GPRS1900	661	0	3	27.05	23.28	33.00	PASS
GPRS1900	661	0	4	25.91	22.14	33.00	PASS
GPRS1900	810	0	1	29.46	25.69	33.00	PASS
GPRS1900	810	0	2	28.71	24.94	33.00	PASS
GPRS1900	810	0	3	27.01	23.24	33.00	PASS
GPRS1900	810	0	4	25.88	22.11	33.00	PASS

Band	Channel	PCL	Slot	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
EGPRS850	128	8	1	27.51	20.86	38.45	PASS
EGPRS850	128	8	2	26.35	19.7	38.45	PASS
EGPRS850	128	8	3	24.24	17.59	38.45	PASS
EGPRS850	128	8	4	22.99	16.34	38.45	PASS
EGPRS850	190	8	1	27.75	21.1	38.45	PASS
EGPRS850	190	8	2	26.63	19.98	38.45	PASS
EGPRS850	190	8	3	24.53	17.88	38.45	PASS
EGPRS850	190	8	4	23.24	16.59	38.45	PASS
EGPRS850	251	8	1	27.70	21.05	38.45	PASS
EGPRS850	251	8	2	26.61	19.96	38.45	PASS
EGPRS850	251	8	3	24.49	17.84	38.45	PASS
EGPRS850	251	8	4	23.20	16.55	38.45	PASS
EGPRS1900	512	2	1	25.64	21.87	33.00	PASS
EGPRS1900	512	2	2	24.66	20.89	33.00	PASS
EGPRS1900	512	2	3	22.78	19.01	33.00	PASS
EGPRS1900	512	2	4	21.58	17.81	33.00	PASS
EGPRS1900	661	2	1	25.70	21.93	33.00	PASS
EGPRS1900	661	2	2	24.72	20.95	33.00	PASS
EGPRS1900	661	2	3	22.84	19.07	33.00	PASS
EGPRS1900	661	2	4	21.66	17.89	33.00	PASS
EGPRS1900	810	2	1	25.39	21.62	33.00	PASS
EGPRS1900	810	2	2	24.38	20.61	33.00	PASS
EGPRS1900	810	2	3	22.58	18.81	33.00	PASS
EGPRS1900	810	2	4	21.34	17.57	33.00	PASS

Remark: EIRP (dBm) = Conducted power (dBm) + Antenna Gain (dBi). (For GSM1900)

ERP (dBm) = EIRP (dBm) - 2.15 (dB). (For GSM850)


Appendix B: Peak-to-Average Ratio(CCDF)

Test Result

Band	Channel	PCL	Result(dB)	Limit(dB)	Verdict
GSM850	190	5	2.6	13	PASS
EGPRS850	190	8	5.55	13	PASS
GSM1900	661	0	2.66	13	PASS
EGPRS1900	661	2	5.25	13	PASS

Remark: All channel and all modulation had been tested, but only the worst case data displayed in this report.

Test Graphs

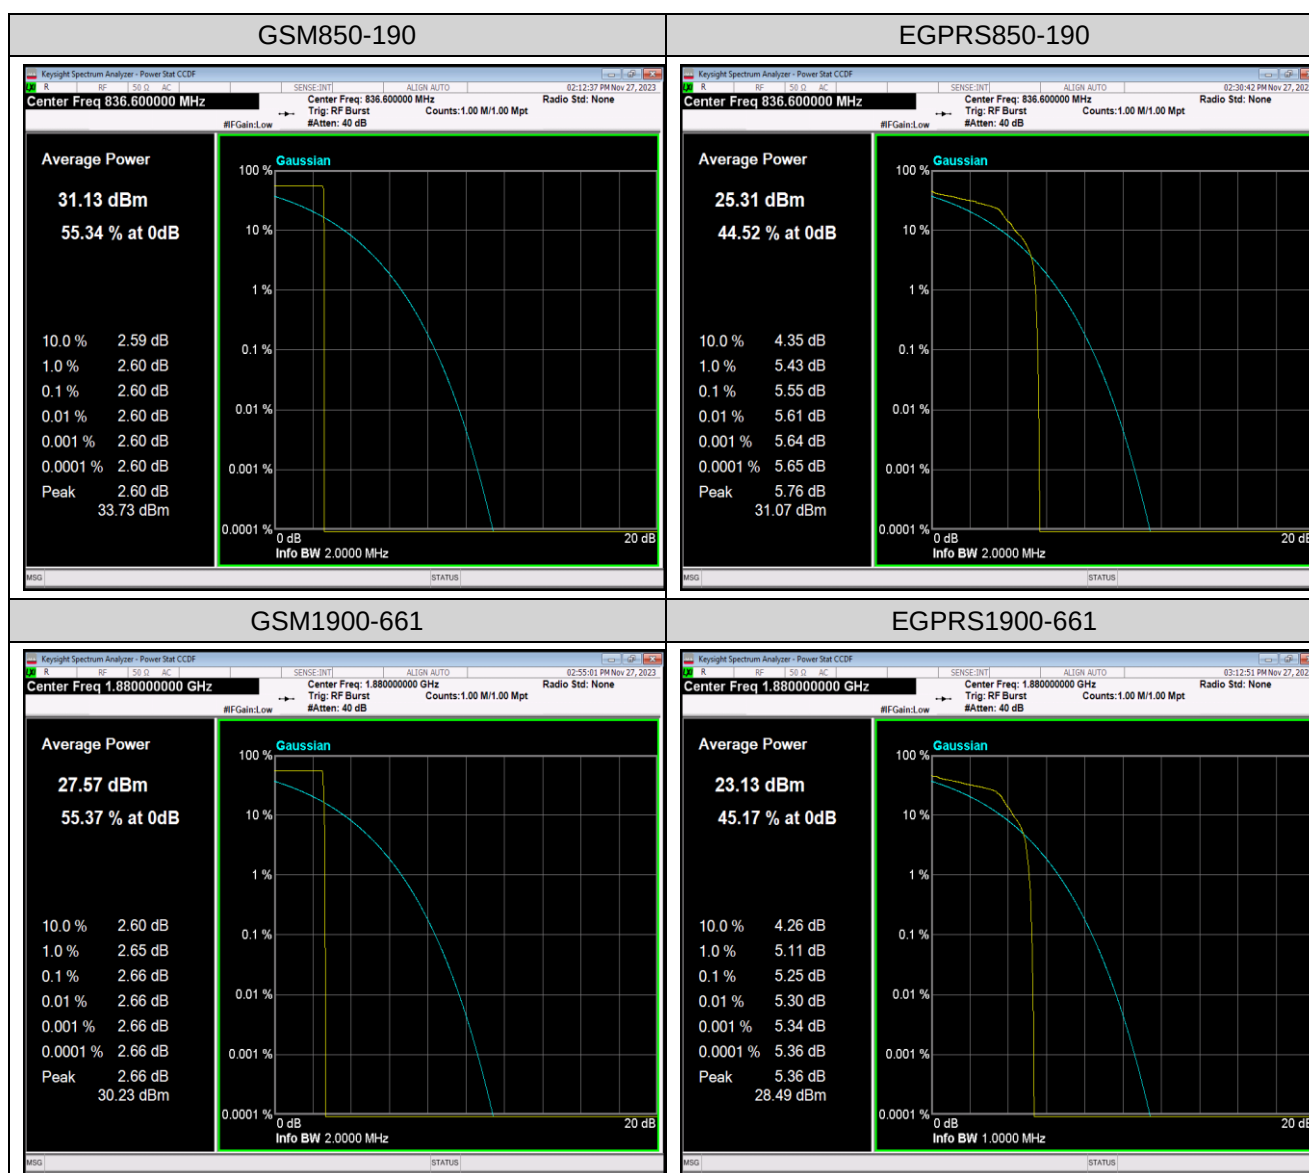



Appendix C: 26dB Bandwidth and Occupied Bandwidth

Test Result

Band	Channel	PCL	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)	Verdict
GSM850	128	5	0.24656	0.3170	---	PASS
GSM850	190	5	0.24572	0.3158	---	PASS
GSM850	251	5	0.24735	0.3129	---	PASS
EGPRS850	128	8	0.24900	0.3163	---	PASS
EGPRS850	190	8	0.25045	0.3142	---	PASS
EGPRS850	251	8	0.24742	0.3171	---	PASS
GSM1900	512	0	0.24524	0.3164	---	PASS
GSM1900	661	0	0.24602	0.3130	---	PASS
GSM1900	810	0	0.24565	0.3164	---	PASS
EGPRS1900	512	2	0.25439	0.3239	---	PASS
EGPRS1900	661	2	0.25285	0.3222	---	PASS
EGPRS1900	810	2	0.25261	0.3094	---	PASS

Test Graphs

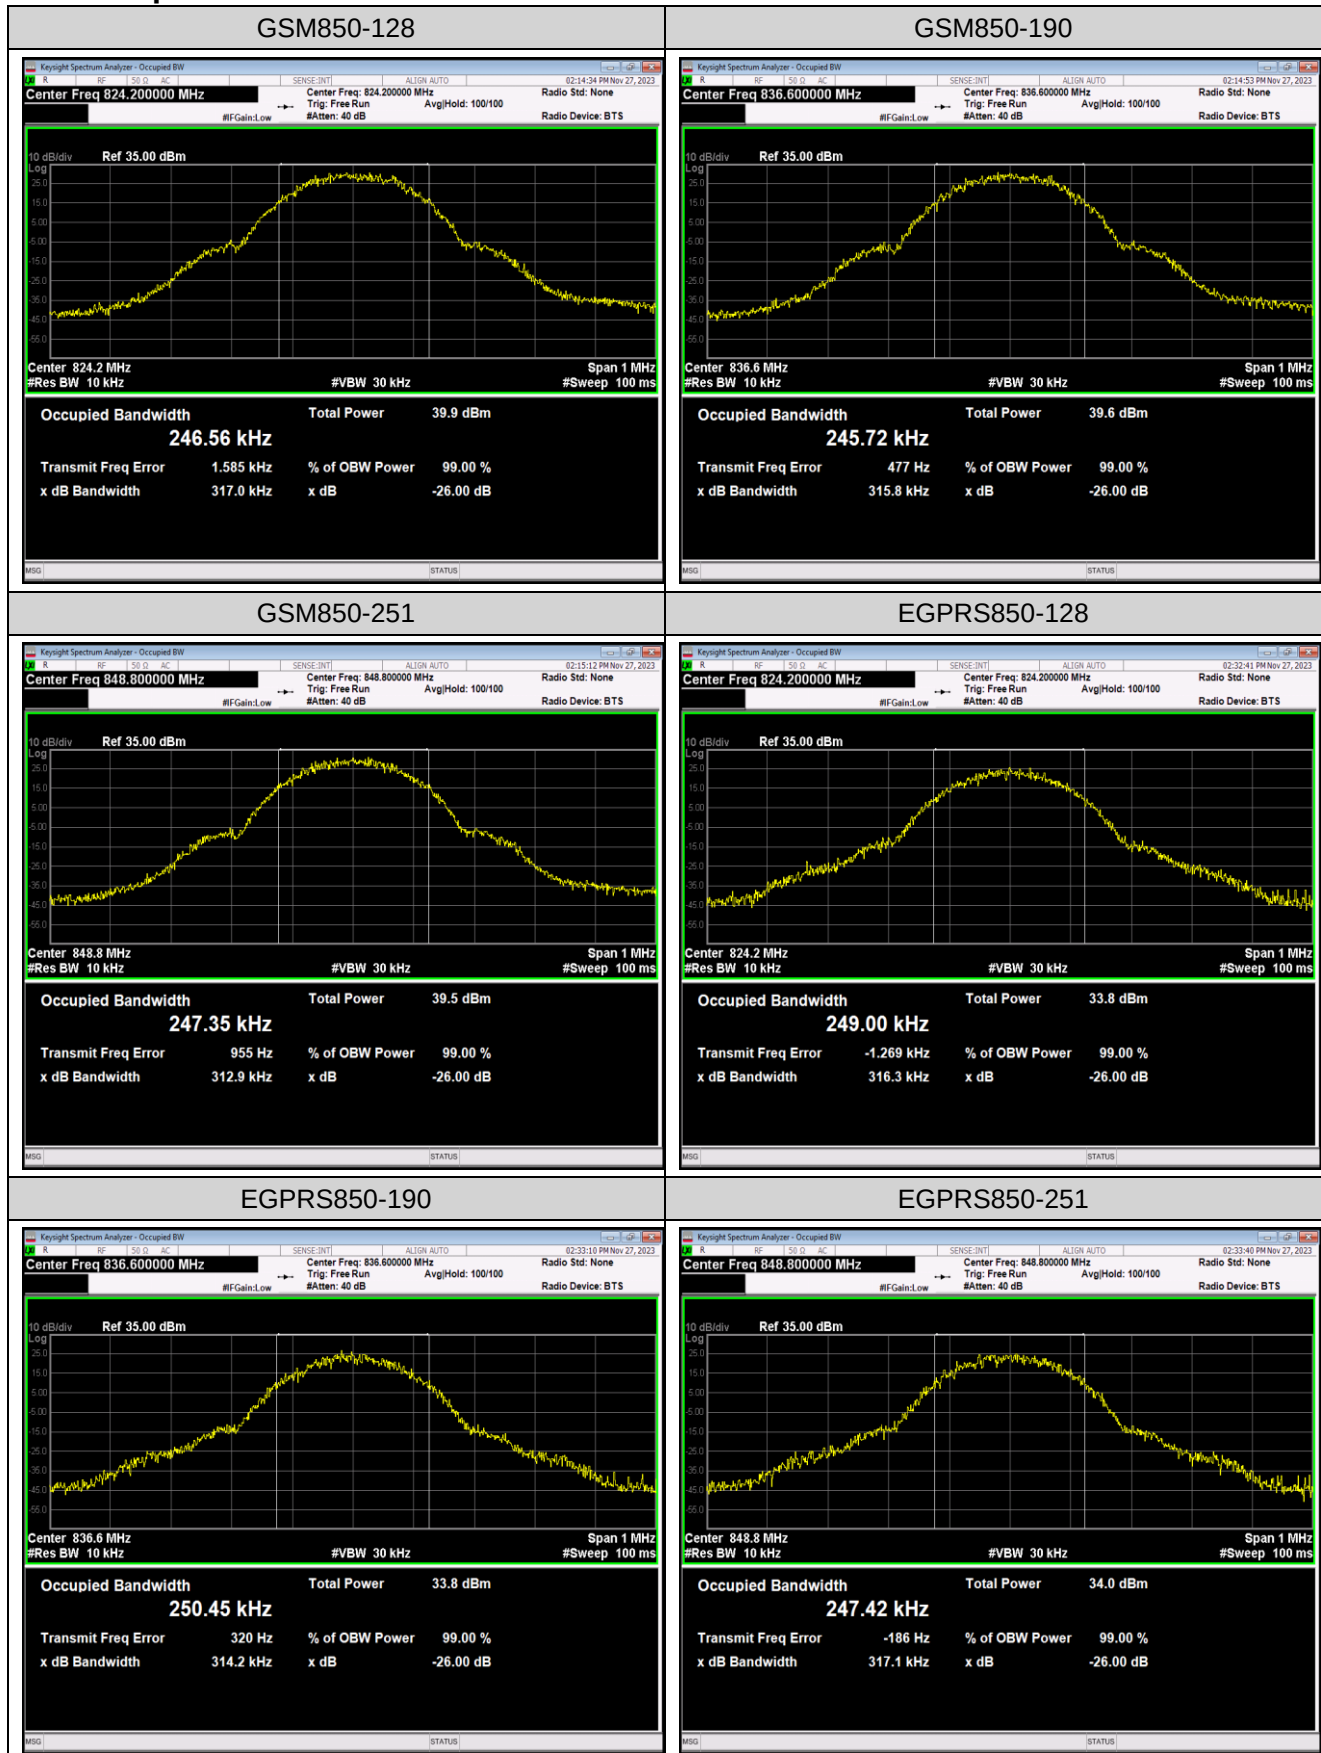

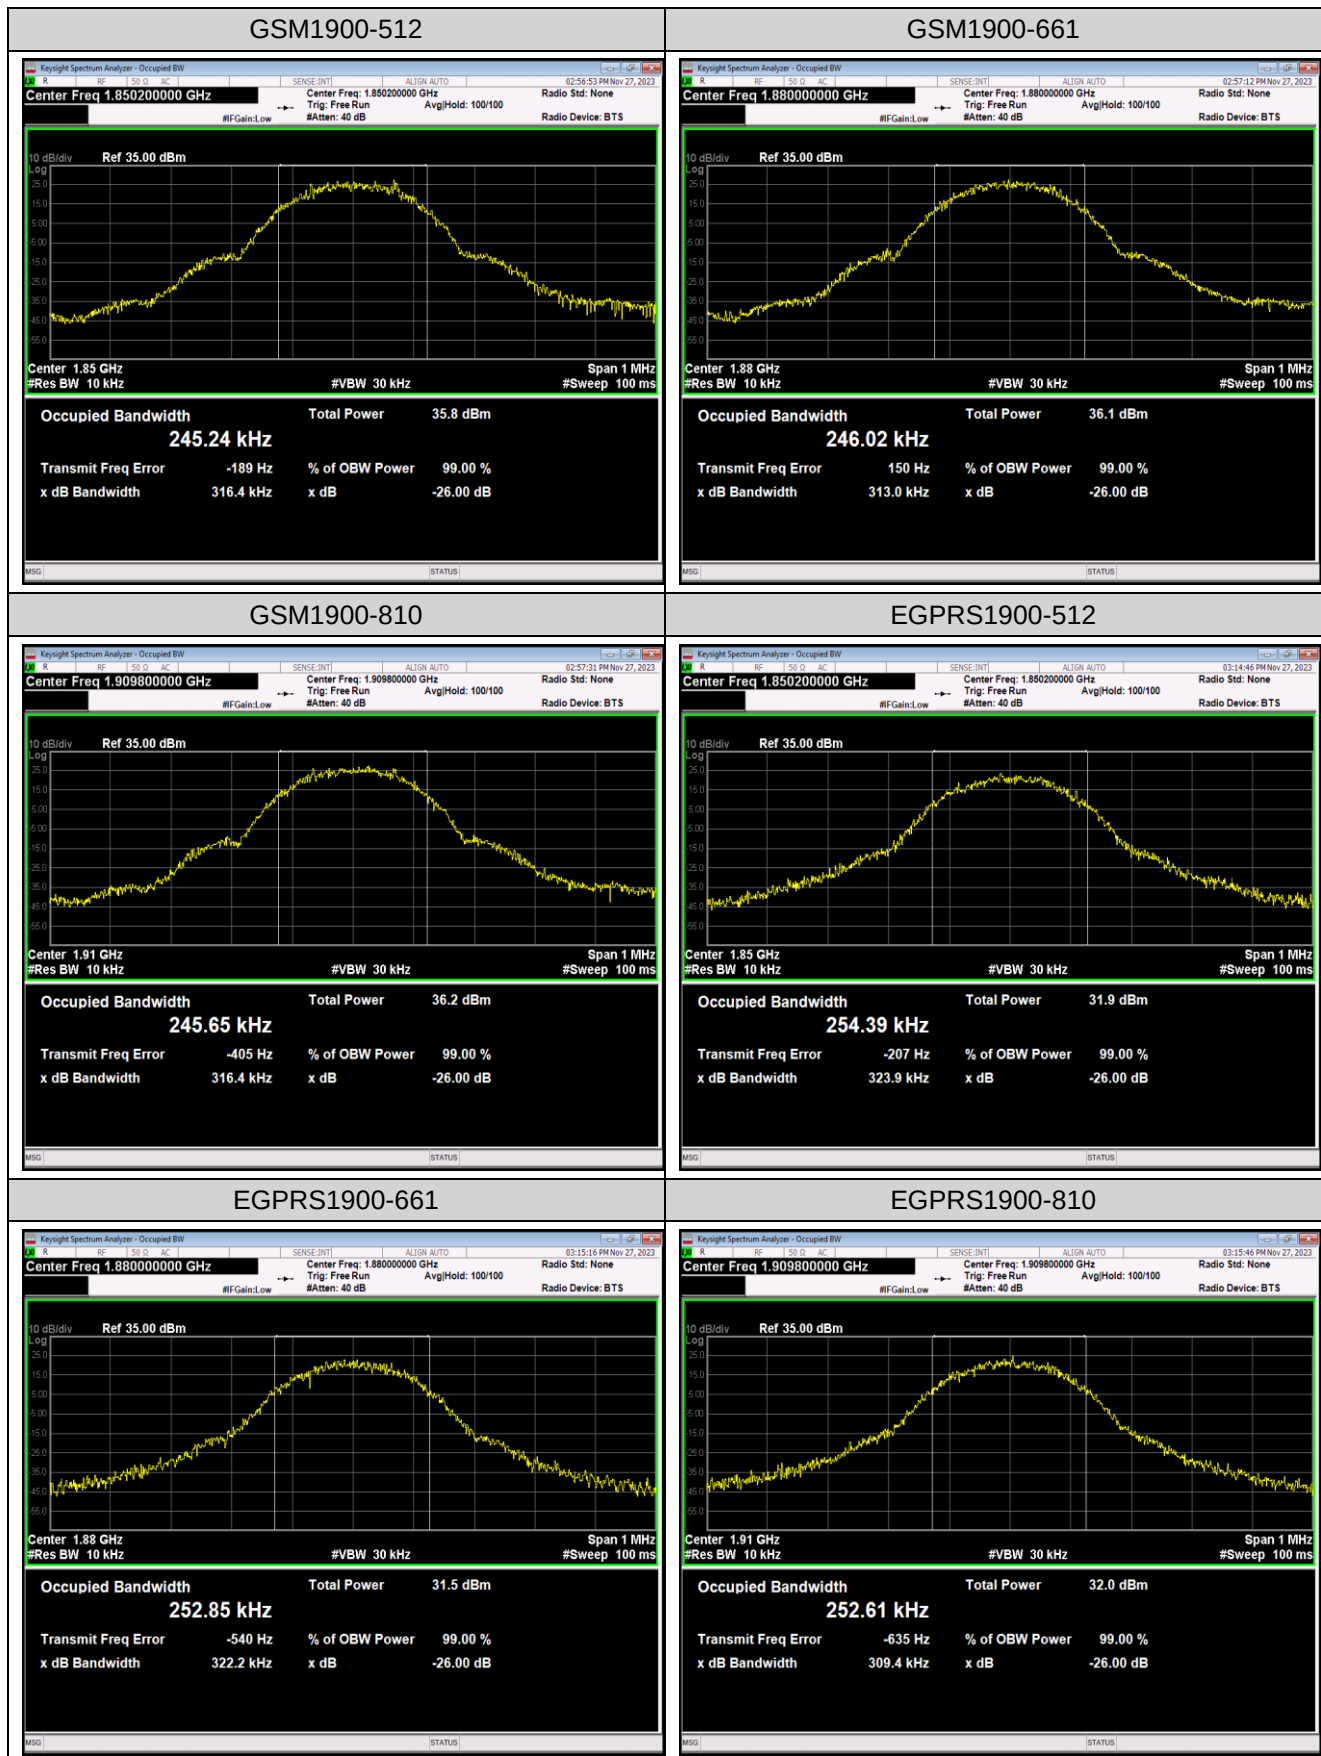



Appendix D: Band Edge

Test Result

Band	Channel	PCL	Freq (MHz)	Result (dBm)	Limit(dBm)	Verdict
GSM850	128	5	824.00	-23.94	-13	PASS
GSM850	251	5	849.02	-22.77	-13	PASS
EGPRS850	128	8	823.99	-30.30	-13	PASS
EGPRS850	251	8	849.03	-32.28	-13	PASS
GSM1900	512	0	1849.97	-29.46	-13	PASS
GSM1900	810	0	1910.02	-25.26	-13	PASS
EGPRS1900	512	2	1849.99	-18.50	-13	PASS
EGPRS1900	810	2	1910.00	-20.22	-13	PASS

Test Graphs

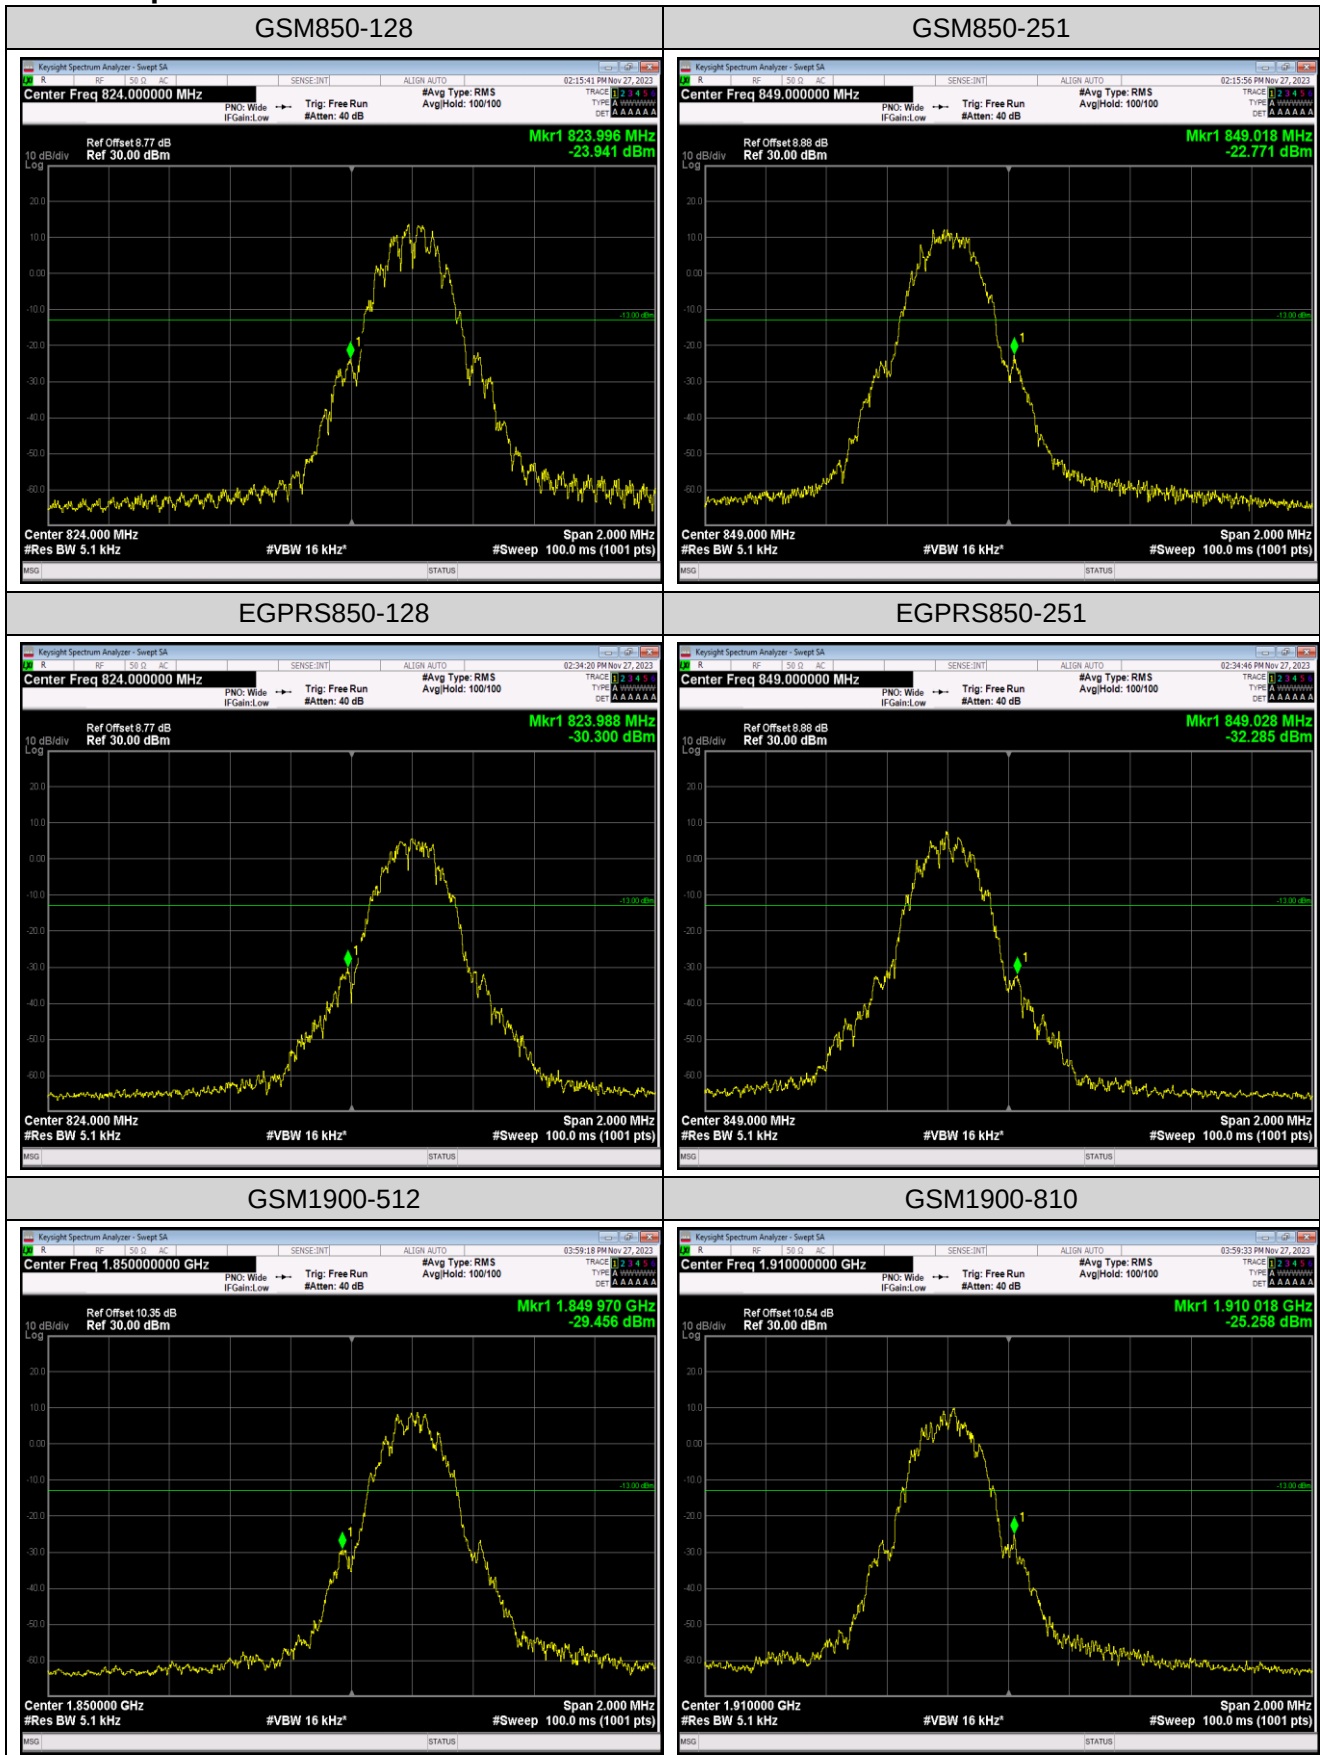

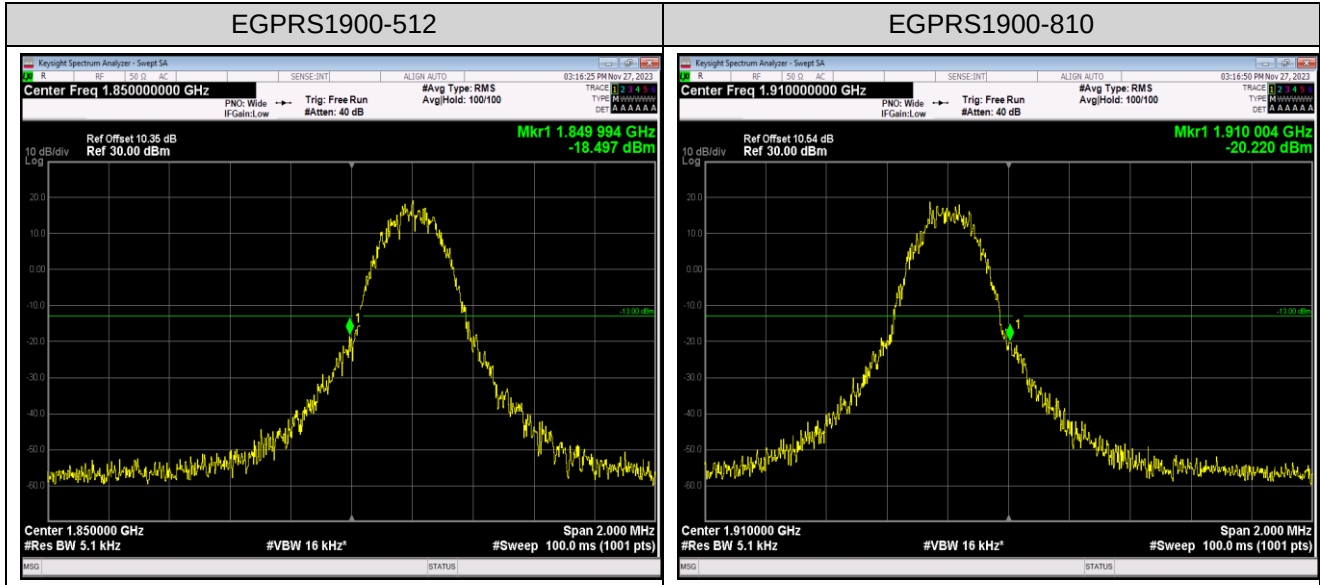


Appendix E: Conducted Spurious Emission

Test Result

Band	Channel	PCL	Frequency Range(MHz)	Max.Freq. (MHz)	Result (dBm)	Limit (dBm)	Verdict
GSM850	128	5	0.009~0.15MHz	0.01	-54.96	-33	PASS
GSM850	128	5	0.15~30MHz	0.16	-42.41	-13	PASS
GSM850	128	5	30~1000MHz	227.78	-45.37	-13	PASS
GSM850	128	5	1000~10000MHz	1648.6	-28.41	-13	PASS
GSM850	190	5	0.009~0.15MHz	0.01	-56.83	-33	PASS
GSM850	190	5	0.15~30MHz	0.15	-45.31	-13	PASS
GSM850	190	5	30~1000MHz	489.78	-45.23	-13	PASS
GSM850	190	5	1000~10000MHz	1673.2	-28.9	-13	PASS
GSM850	251	5	0.009~0.15MHz	0.01	-55.97	-33	PASS
GSM850	251	5	0.15~30MHz	0.16	-44.53	-13	PASS
GSM850	251	5	30~1000MHz	748.03	-44.49	-13	PASS
GSM850	251	5	1000~10000MHz	1697.5	-29.72	-13	PASS
GSM1900	512	0	0.009~0.15MHz	0.01	-55.76	-43	PASS
GSM1900	512	0	0.15~30MHz	0.15	-42.7	-23	PASS
GSM1900	512	0	30~1000MHz	820.65	-45.49	-13	PASS
GSM1900	512	0	1000~18000MHz	17038.37	-22.69	-13	PASS
GSM1900	661	0	0.009~0.15MHz	0.01	-56.62	-43	PASS
GSM1900	661	0	0.15~30MHz	0.15	-41.78	-23	PASS
GSM1900	661	0	30~1000MHz	726.72	-45.91	-13	PASS
GSM1900	661	0	1000~18000MHz	16887.07	-22.12	-13	PASS
GSM1900	810	0	0.009~0.15MHz	0.01	-57.39	-43	PASS
GSM1900	810	0	0.15~30MHz	0.15	-45.41	-23	PASS
GSM1900	810	0	30~1000MHz	671.69	-45.55	-13	PASS
GSM1900	810	0	1000~18000MHz	16457.53	-22.38	-13	PASS

Remark: All channel and all modulation had been tested, but only the worst case data displayed in this report.

Test Graphs

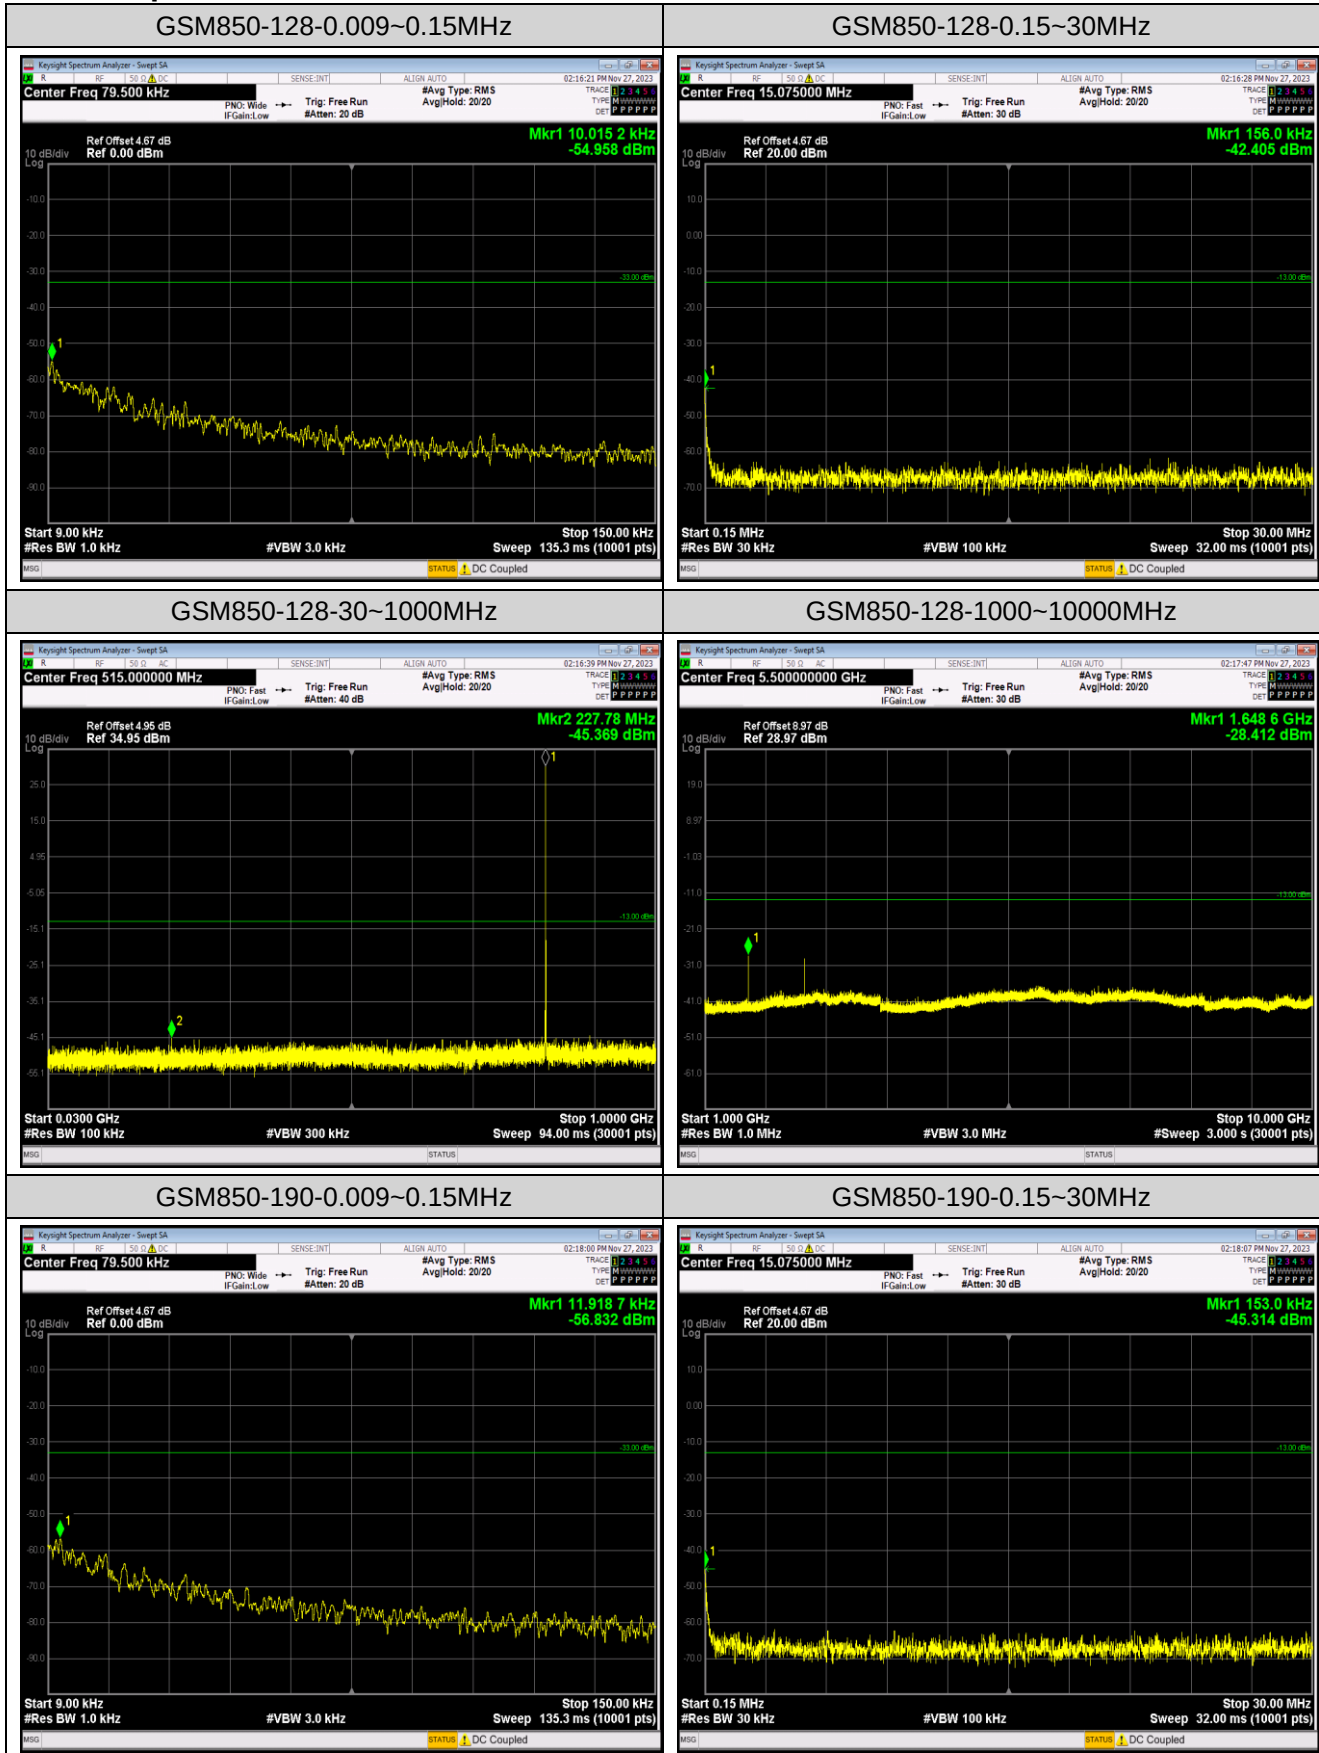



JianYan Testing Group Shenzhen Co., Ltd.


No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Project No.: JYTSZR2311068

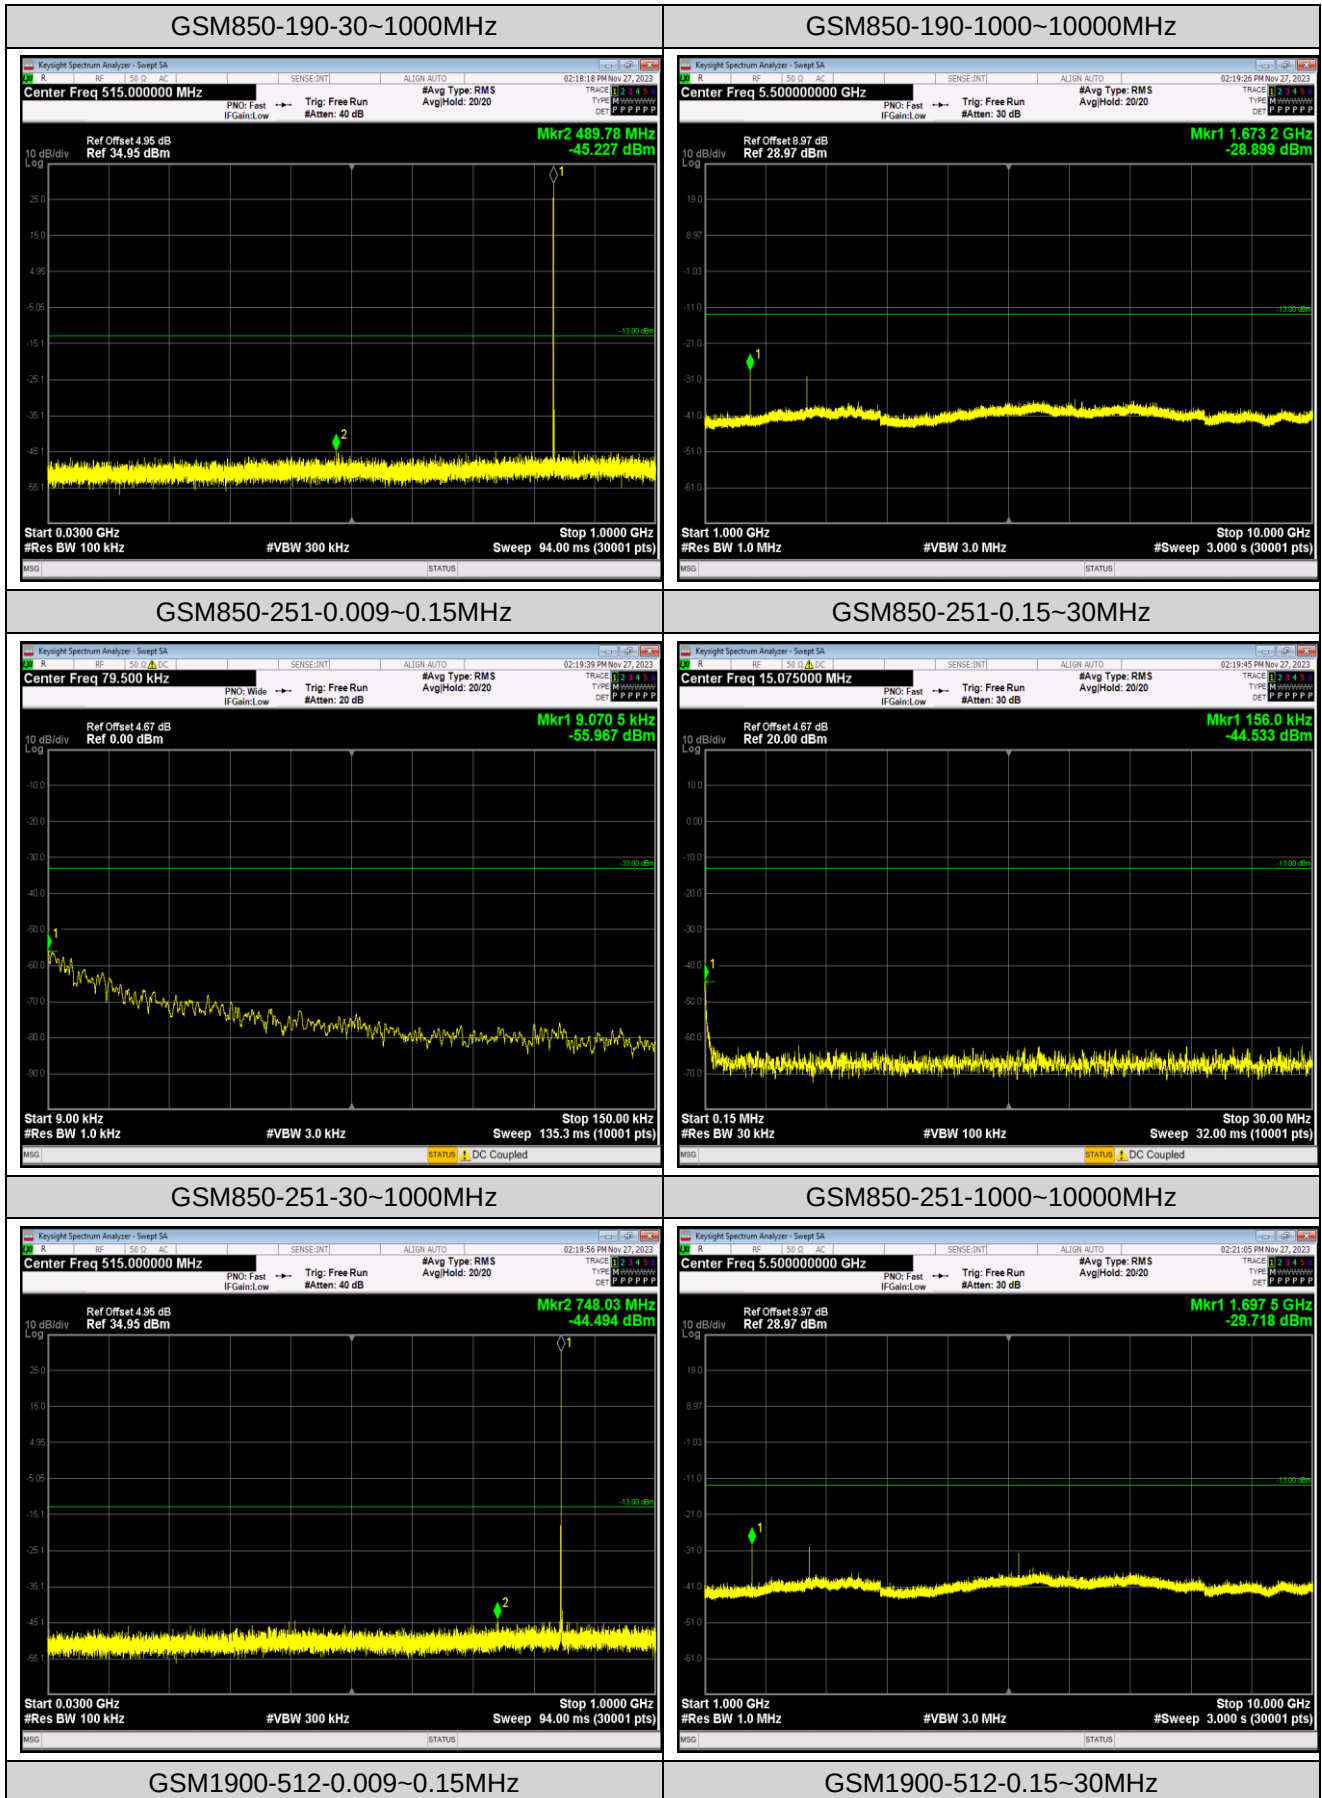

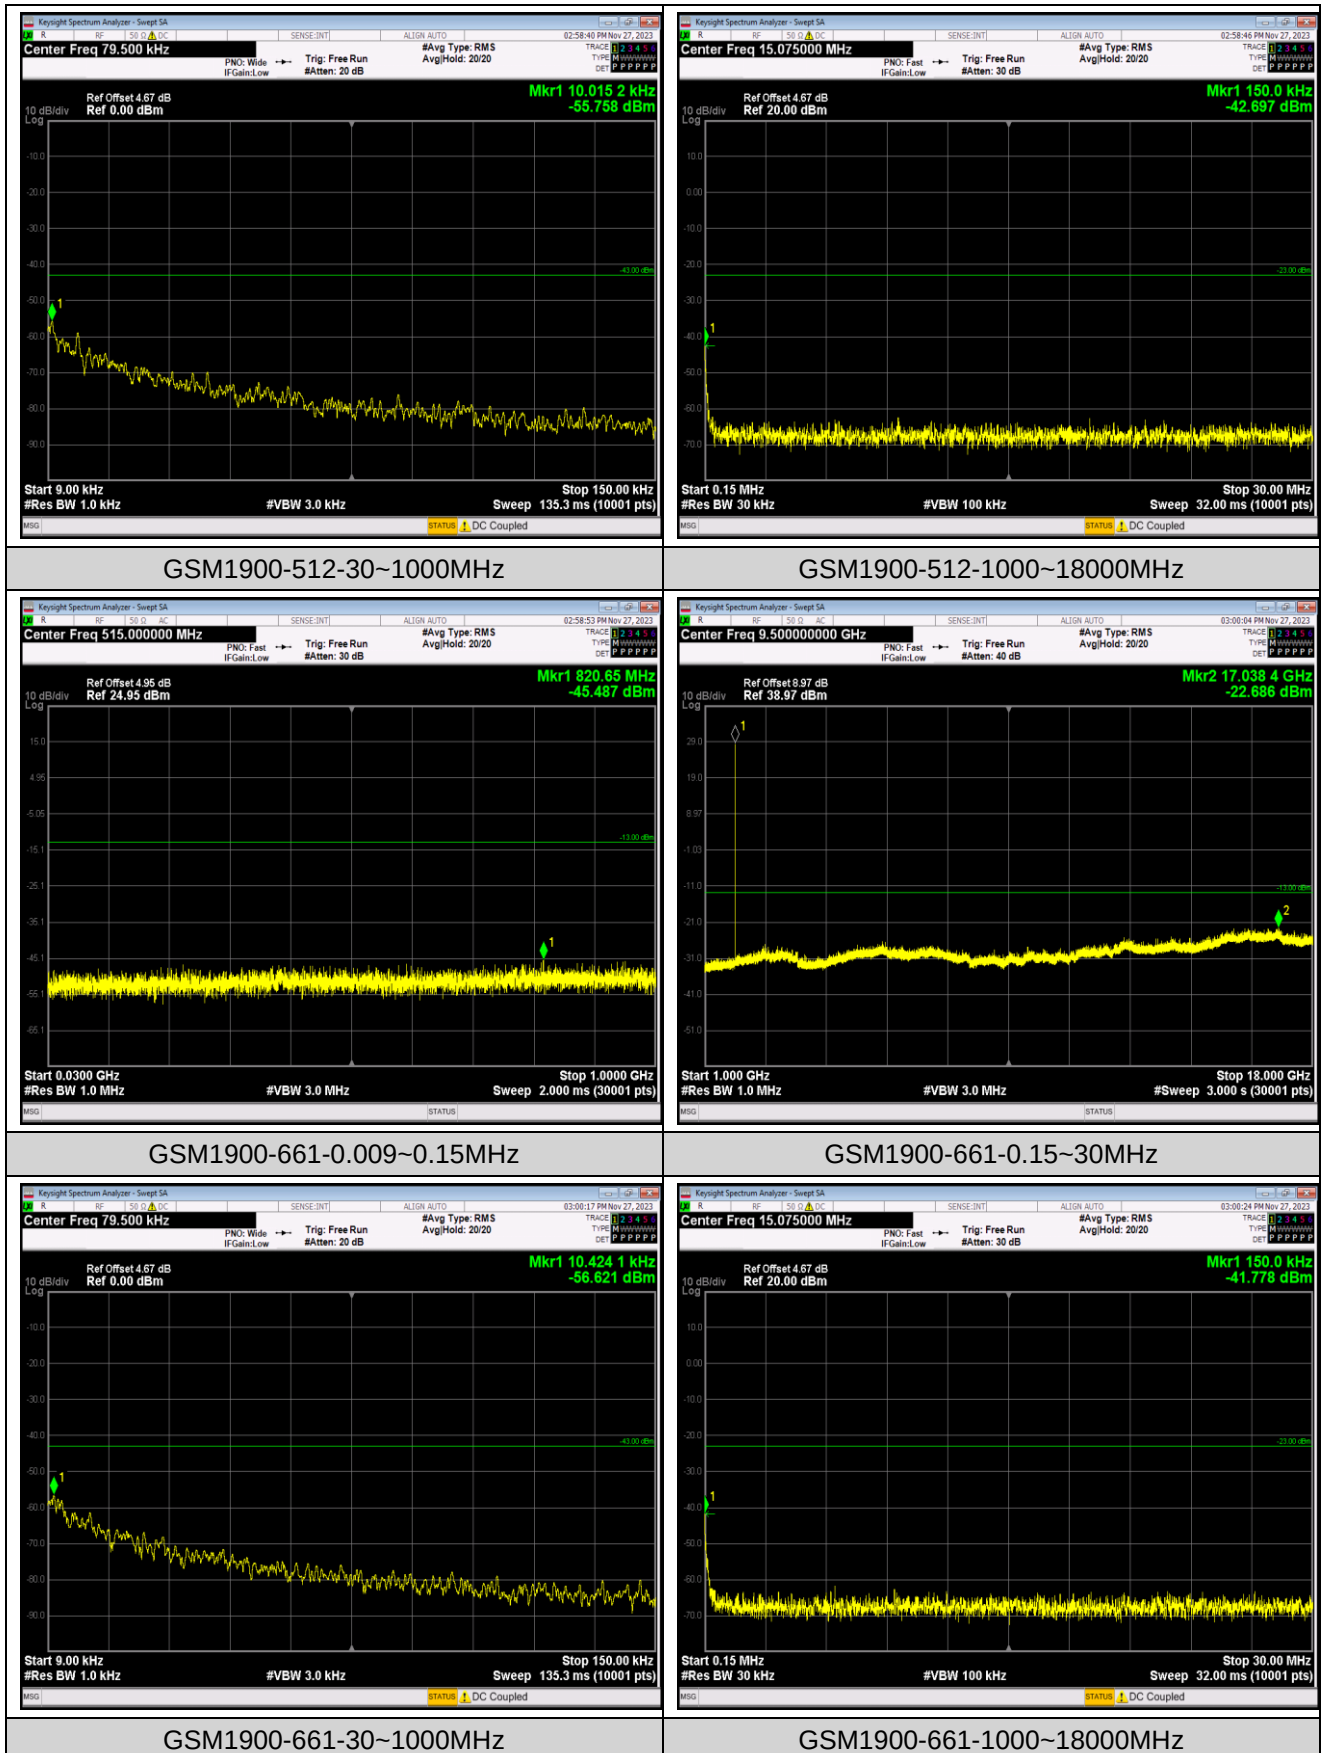

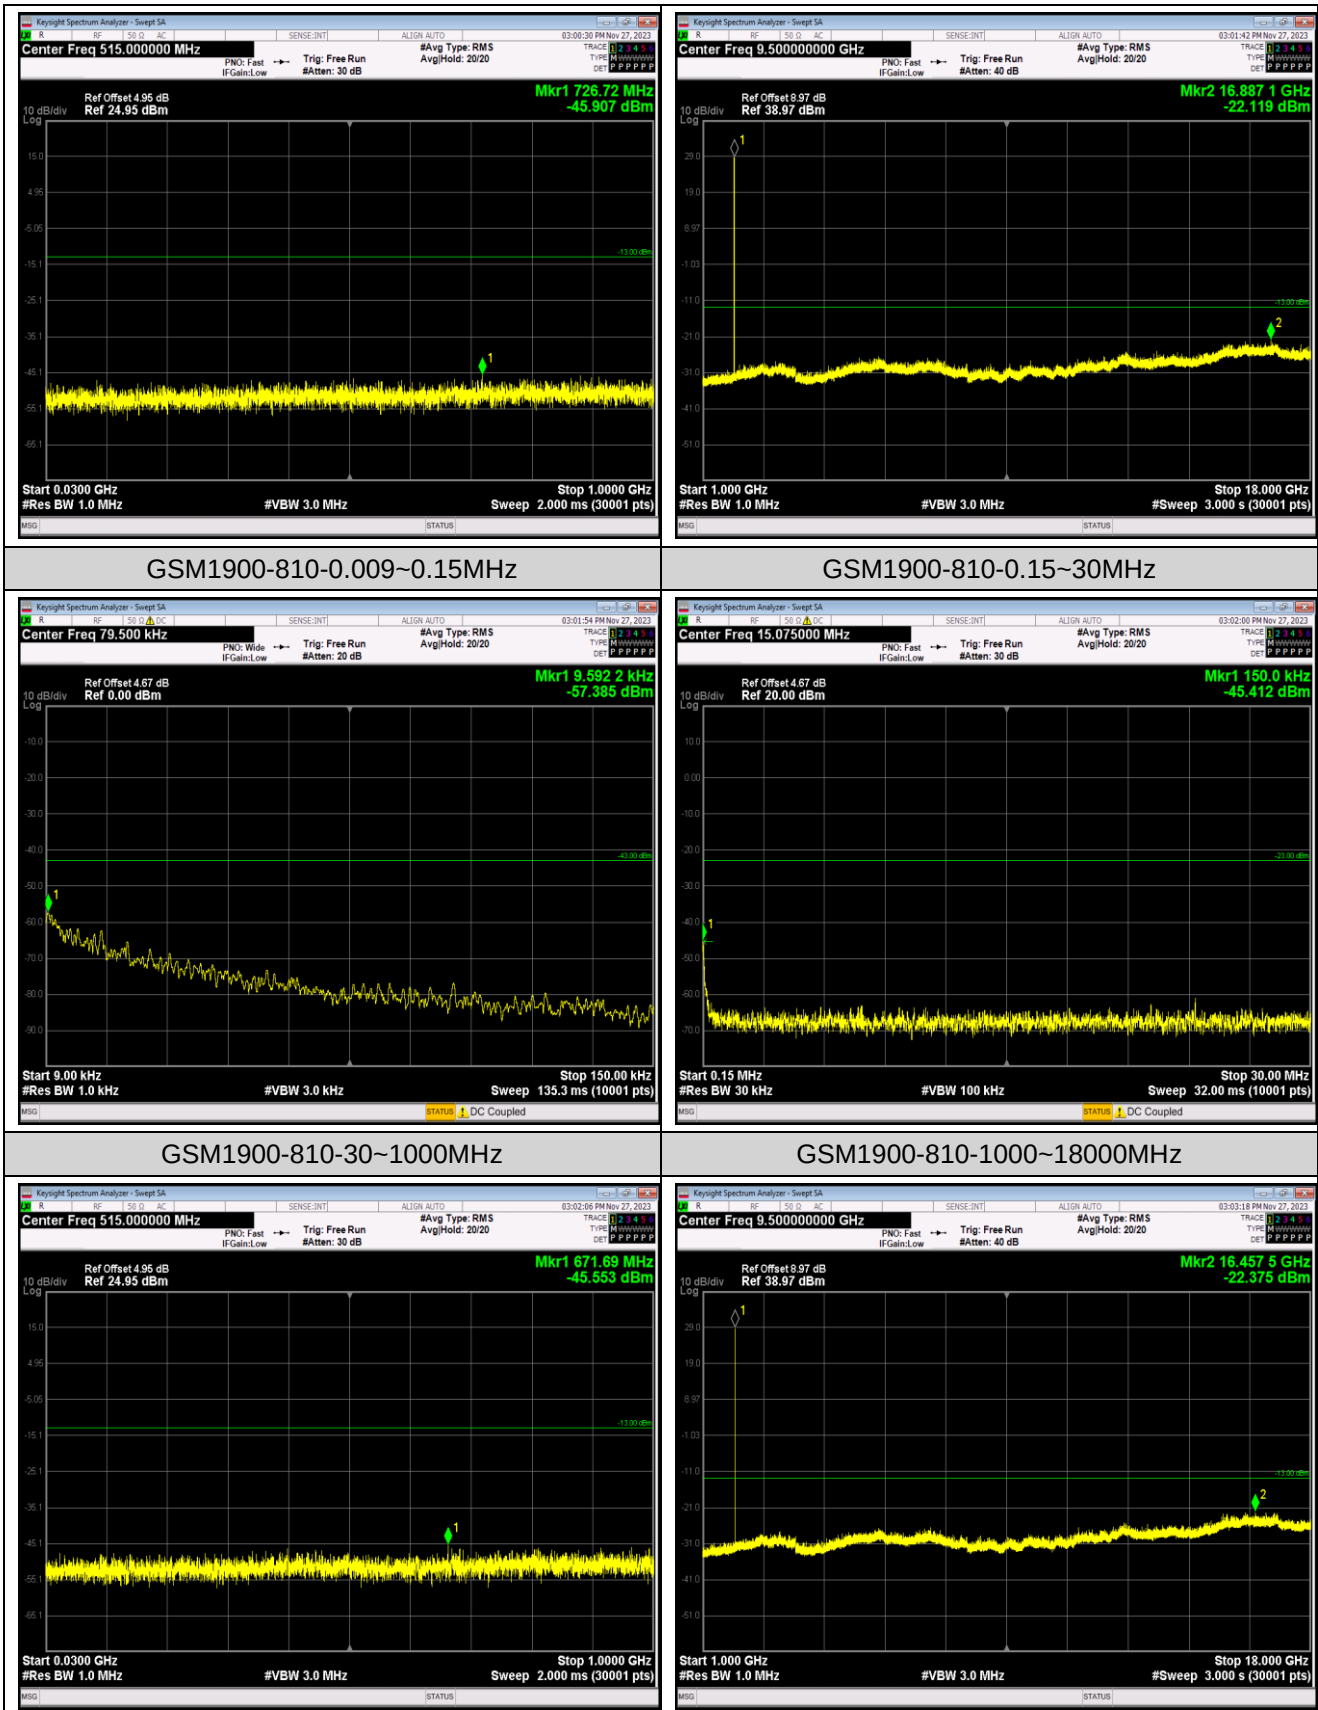

Appendix F: Frequency Stability

Test Result

Reference Frequency: GSM850 Middle channel=190 Frequency=836.6MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.91	-30	-13.62	-0.016280	±2.5	Pass
	-20	-15.98	-0.019101		
	-10	-14.72	-0.017595		
	0	-14.27	-0.017057		
	10	-10.14	-0.012120		
	20	-8.62	-0.010304		
	30	-12.79	-0.015288		
	40	-7.72	-0.009228		
	50	-12.75	-0.015240		
Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.45	-11.85	-0.014164	±2.5	Pass
	3.91	-14.40	-0.017213		
	4.50	-10.59	-0.012658		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Reference Frequency: EGPRS850 Middle channel=190 Frequency=836.6MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.91	-30	-11.53	-0.013782	±2.5	Pass
	-20	-10.23	-0.012228		
	-10	-14.66	-0.017523		
	0	-13.79	-0.016483		
	10	-11.24	-0.013435		
	20	-8.68	-0.010375		
	30	-11.27	-0.013471		
	40	-9.65	-0.011535		
	50	-10.04	-0.012001		
Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.45	-12.33	-0.014738	±2.5	Pass
	3.91	-11.72	-0.014009		
	4.50	-11.30	-0.013507		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Reference Frequency: PCS1900 Middle channel=661 Frequency=1880MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.91	-30	-18.47	-0.009824	Within authorized band for PCS 1900	Pass
	-20	-26.51	-0.014101		
	-10	-24.05	-0.012793		
	0	-26.31	-0.013995		
	10	-21.79	-0.011590		
	20	-23.21	-0.012346		
	30	-14.72	-0.007830		
	40	-18.14	-0.009649		
	50	-15.79	-0.008399		
Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.45	-17.98	-0.009564	Within authorized band for PCS 1900	Pass
	3.91	-23.54	-0.012521		
	4.50	-27.12	-0.014426		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Reference Frequency: EGPRS1900 Middle channel=661 Frequency=1880MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.91	-30	-24.86	-0.013223	Within authorized band for PCS 1900	Pass
	-20	-23.89	-0.012707		
	-10	-27.70	-0.014734		
	0	-15.34	-0.008160		
	10	-16.50	-0.008777		
	20	-26.64	-0.014170		
	30	-24.15	-0.012846		
	40	-17.92	-0.009532		
	50	-24.21	-0.012878		
Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.45	-23.76	-0.012638	Within authorized band for PCS 1900	Pass
	3.91	-21.60	-0.011489		
	4.50	-22.28	-0.011851		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Appendix G: Modulation Characteristics

Test Result

Band	Channel	Result	Verdict
GSM850	190	PASS	PASS
EGPRS850	190	PASS	PASS
GSM1900	661	PASS	PASS
EGPRS1900	661	PASS	PASS

Remark: All channel had been tested, but only the worst case data displayed in this report.

Test Graphs

