

# **FCC Test Report**

FCC ID : MXF-WVRTM127ACN

Equipment : Indoor Wi-Fi Router

Model No. : WVRTM-127ACN

Brand Name : Gemtek

Applicant : Gemtek Technology Co., Ltd.

Address : No. 15-1 Zhonghua Road, Hsinchu Industrial

Park, Hukou, Hsinchu, Taiwan, 30352.

Standard : 47 CFR FCC Part 15.407

Received Date : Fed. 23, 2017

Tested Date : Mar. 01 ~ Oct. 24, 2017

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

Along Chen / Assistant Manager Gary Chang / Manager

Testing Laboratory

Report No.: FR7O1102AN Page: 1 of 75



## **Table of Contents**

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	9
1.3	Test Setup Chart	
1.4	The Equipment List	10
1.5	Testing Applied Standards	11
1.6	Measurement Uncertainty	12
2	TEST CONFIGURATION	13
2.1	Testing Condition	13
2.2	The Worst Test Modes and Channel Details	13
3	TRANSMITTER TEST RESULTS	15
3.1	Conducted Emissions	15
3.2	Emission Bandwidth	20
3.3	RF Output Power	23
3.4	Peak Power Spectral Density	25
3.5	Transmitter Radiated and Band Edge Emissions	29
3.6	Frequency Stability	72
4	TEST LABORATORY INFORMATION	75



## **Release Record**

Report No.	Version	Description	Issued Date
FR7O1102AN	Rev. 01	Initial issue	Nov. 13, 2017

Report No.: FR7O1102AN Page: 3 of 75



# **Summary of Test Results**

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.471MHz 38.32 (Margin -8.17dB) - AV	Pass
15.407(b) 15.209	Radiated Emissions	[dBuV/m at 3m]: 5150.00MHz 53.68 (Margin -0.32dB) - AV	Pass
15.407(a)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(e)	6dB bandwidth	Meet the requirement of limit	Pass
15.407(a)	RF Output Power	Max Power [dBm]: 5150-5250MHz: 20.45 5725-5850MHz: 22.71	Pass
15.407(a)	Peak Power Spectral Density	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Report No.: FR7O1102AN

Page: 4 of 75



## 1 General Description

## 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

	RF General Information				
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS
5150-5250	а	5180-5240	36-48 [4]	2	6-54 Mbps
5150-5250	n (HT20)	5180-5240	36-48 [4]	2	MCS 0-15
5150-5250	n (HT40)	5190-5230	38-46 [2]	2	MCS 0-15
5150-5250	ac (VHT20)	5180-5240	36-48 [4]	2	MCS 0-9
5150-5250	ac (VHT40)	5190-5230	38-46 [2]	2	MCS 0-9
5150-5250	ac (VHT80)	5210	42 [1]	2	MCS 0-9

Note 1: RF output power specifies that Maximum Conducted Output Power.

Note 2: 802.11a/n/ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation

	RF General Information				
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>⊤x</sub> )	Data Rate / MCS
5725-5850	а	5745-5825	149-165 [5]	2	6-54 Mbps
5725-5850	n (HT20)	5745-5825	149-165 [5]	2	MCS 0-15
5725-5850	n (HT40)	5755-5795	151-159 [2]	2	MCS 0-15
5725-5850	ac (VHT20)	5745-5825	149-165 [5]	2	MCS 0-9
5725-5850	ac (VHT40)	5755-5795	151-159 [2]	2	MCS 0-9
5725-5850	ac (VHT80)	5775	155 [1]	2	MCS 0-9

Note 1: RF output power specifies that Maximum Conducted Output Power.

Note 2: 802.11a/n/ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.

#### 1.1.2 Antenna Details

Ant No	t. No. Model Type Connector	Type	Connector	Operating Fr	equency (MHz	) / Gain (dBi)
Ant. No.		2400~2483.5	5150~5250	5725~5850		
1	BLACK	PIFA	IPEX	2.34	2.48	5.06
2	GRAY	PIFA	IPEX	2.4	2	4.14

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type 56Vdc from adapter
--------------------------------------

Report No.: FR7O1102AN Page: 5 of 75



## 1.1.4 Accessories

No.	Equipment	Description
1	Adapter	Brand: PHIHONG Model: PSAA30R-560 Power Rating: I/P: 100-240Vac, 50-60Hz, 0.8A O/P: 56Vdc, 0.536A Power Line: 1.5m non-shielded without core
2	Adapter	Brand: Gospell Model: G0753-560-054 Power Rating: I/P: 100-240Vac, 50-60Hz, 0.75A O/P: 56Vdc, 0.54A Power Line: 1.2m non-shielded without core
3	RJ45 (EEKSONG)	1.4m non-shielded without core
4	RJ45 (Tong-Li)	1.4m non-shielded without core

## 1.1.5 Channel List

	For Frequency band 5150-5250 MHz				
802.11 a / H	802.11 a / HT20 / VHT20 HT40 / VHT40				
Channel	Frequency(MHz)	Channel	Frequency(MHz)		
36	5180	38	5190		
40	5200	46	5230		
44	5220	VHT 80			
48	5240	42	5210		

For Frequency band 5725~5850 MHz				
802.11 a / HT20 / VHT20 HT40 / VHT40				
Channel	Frequency(MHz)	Channel	Frequency(MHz)	
149	5745	151	5755	
153	5765	159	5795	
157	5785	VH	T80	
161	5805	155	5775	
165	5825			

Report No.: FR7O1102AN Page: 6 of 75



## 1.1.6 Test Tool and Duty Cycle

Test Tool	MT7662, V0.0.2.3		
	Mode	Duty cycle (%)	Duty factor (dB)
Duty Cycle and Duty	11a	1a 94.01% 0	0.27
	VHT20	94.72%	0.24
	89.58%	0.48	
	VHT80	82.39%	0.84

Report No.: FR7O1102AN Page: 7 of 75



## 1.1.7 Power Setting

	For Frequency band 5150-5250 MHz				
Modulation Mode	Test Frequency (MHz)	Power Set			
11a	5180	13/11			
11a	5200	13/11			
11a	5240	13/11			
HT20	5180	13/11			
HT20	5200	13/11			
HT20	5240	13/11			
HT40	5190	13/11			
HT40	5230	1A/18			
VHT20	5180	13/11			
VHT20	5200	13/11			
VHT20	5240	13/11			
VHT40	5190	13/11			
VHT40	5230	1A/18			
VHT80	5210	0E/0E			

F	For Frequency band 5725~5850 MHz							
Modulation Mode	Test Frequency (MHz)	Power Set						
11a	5745	20/1F						
11a	5785	20/1F						
11a	5825	20/20						
HT20	5745	20/1F						
HT20	5785	20/1F						
HT20	5825	20/20						
HT40	5755	1F/1F						
HT40	5795	1F/1F						
VHT20	5745	20/1F						
VHT20	5785	20/1F						
VHT20	5825	20/20						
VHT40	5755	1F/1F						
VHT40	5795	1F/1F						
VHT80	5775	1B/1A						


Report No.: FR7O1102AN Page: 8 of 75



## 1.2 Local Support Equipment List

	Support Equipment List								
No. Equipment Brand Model FCC ID Signal cable / Length									
1	Notebook	DELL	Latitude E6430	DoC	RJ45, 10m non-shielded.				
	Notebook	DELL	Latitude E6430	DoC	RJ45, 10m non-shielded.				
2	Phone	HTT	HTT-806		RJ11, 1.5m non-shielded.				
3	USB Flash	Kingston	DTSE9						

## 1.3 Test Setup Chart

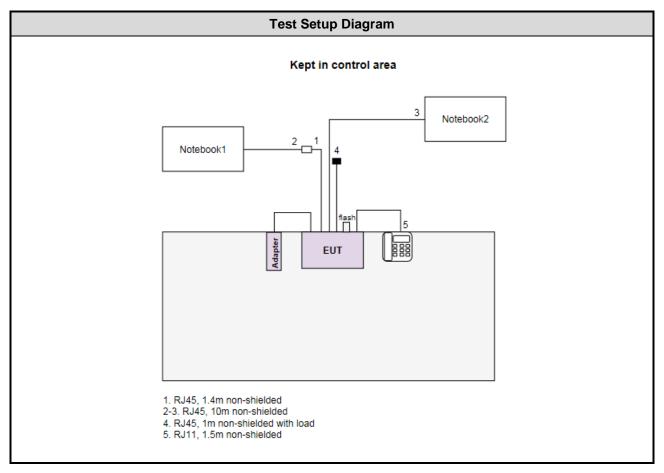

Report No.: FR7O1102AN Page: 9 of 75



## 1.4 The Equipment List

Test Item	Conducted Emission	Conducted Emission							
Test Site	Conduction room 1 / (	Conduction room 1 / (CO01-WS)							
Tested Date	Oct. 24, 2017	Oct. 24, 2017							
Instrument	Manufacturer	Manufacturer Model No. Serial No. Calibration Date Calibration Until							
Receiver	R&S	ESR3	101657	Dec. 21, 2016	Dec. 20, 2017				
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 08, 2016	Nov. 07, 2017				
RF Cable-CON	EMC	EMCCFD300-BM-B M-6000	50821	Dec. 20, 2016	Dec. 19, 2017				
Measurement Software	AUDIX	e3	6.120210k	NA	NA				
Note: Calibration Inte	erval of instruments liste	d above is one year.							

Test Item	Radiated Emission be	Radiated Emission below 1GHz						
Test Site	966 chamber 3 / (03C	966 chamber 3 / (03CH03-WS)						
Tested Date	Oct. 23, 2017	Oct. 23, 2017						
Instrument	Manufacturer	Manufacturer Model No. Serial No. Calibration Date Calibration U						
Receiver	Agilent	N9038A	MY53290044	Sep. 26, 2017	Sep. 25, 2018			
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 28, 2017	Apr. 27, 2018			
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 10, 2016	Nov. 09, 2017			
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Dec. 09, 2016	Dec. 08, 2017			
Preamplifier	EMC	EMC02325	980187	Sep. 04, 2017	Sep. 03, 2018			
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800 -001	Feb. 04, 2017	Feb. 03, 2018			
LF cable-3M	EMC	EMC8D-NM-NM-300 0	131103	Feb. 04, 2017	Feb. 03, 2018			
LF cable-13M	EMC	EMC8D-NM-NM-130 00	131104	Feb. 04, 2017	Feb. 03, 2018			
Measurement Software	AUDIX	e3	6.120210g	NA	NA			
Note: Calibration Inter	rval of instruments liste	d above is one year.						

Test Item	RF Conducted	RF Conducted							
Test Site	(TH01-WS)	TH01-WS)							
Tested Date	Mar. 08, 2017								
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until				
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40	101486	Nov. 15, 2016	Nov. 14, 2017				
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Nov. 21, 2016	Nov. 20, 2017				
Power Meter	Anritsu	ML2495A	1241002	Oct. 06, 2016	Oct. 05, 2017				
Power Sensor	Anritsu	MA2411B	1207366	Oct. 06, 2016	Oct. 05, 2017				
AC POWER SOURCE	APC	AFC-500W	F312060012	Oct. 28, 2016	Oct. 27, 2017				
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA				
Note: Calibration Inter	rval of instruments liste	d above is one year.							

Report No.: FR7O1102AN Page: 10 of 75



Test Item	Radiated Emission ab	ove 1GHz							
Test Site	966 chamber 3 / (03C	H03-WS)							
Tested Date	Mar. 01, 2017								
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until				
Spectrum Analyzer	Agilent	N9010A	MY53400091	Sep. 09, 2016	Sep. 08, 2017				
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Feb. 09, 2017	Feb. 08, 2018				
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 25, 2016	Oct. 24, 2017				
Preamplifier	Agilent	83017A	MY53270014	Aug. 22, 2016	Aug. 21, 2017				
Preamplifier	EMC	EMC184045B	980192	Aug. 24, 2016	Aug. 23, 2017				
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Feb. 04, 2017	Feb. 03, 2018				
RF cable-8M	HUBER+SUHNER	SUCOFLEX104	MY22600/4	Feb. 04, 2017	Feb. 03, 2018				
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Feb. 04, 2017	Feb. 03, 2018				
Measurement Software	AUDIX	e3	6.120210g	NA	NA				
Note: Calibration Inte	rval of instruments liste	d above is one year.	,						

## 1.5 Testing Applied Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.407

ANSI C63.10-2013

FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04

FCC KDB 644545 D03 Guidance for IEEE 802 11ac New Rules v01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Report No.: FR7O1102AN
Report Version: Rev. 01

Page: 11 of 75



## 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty					
Parameters	Uncertainty				
Bandwidth	±34.134 Hz				
Conducted power	±0.808 dB				
Frequency error	±34.134 Hz				
Power density	±0.463 dB				
Conducted emission	±2.670 dB				
AC conducted emission	±2.90 dB				
Radiated emission ≤ 1GHz	±3.66 dB				
Radiated emission > 1GHz	±5.37 dB				
Time	±0.1%				
Temperature	±0.6 °C				

Report No.: FR7O1102AN Page: 12 of 75



## 2 Test Configuration

## 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	22°C / 56%	Alex Tsai
Radiated Emissions	03CH03-WS	22-25°C / 64-65%	Brad Wu Vincent Yeh
RF Conducted	TH01-WS	20°C / 65%	Brad Wu

FCC Designation No.: TW0009
 FCC site registration No.: 207696
 IC site registration No.: 10807C-1

### 2.2 The Worst Test Modes and Channel Details

	For Frequency band 5150-5250 MHz								
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration					
Conducted Emissions	VHT40	5230	MCS 0						
Radiated Emissions ≤1GHz	VHT40	5230	MCS 0						
	11a	5180 / 5200 / 5240	6 Mbps						
	HT20	5180 / 5200 / 5240	MCS 0						
RF Output Power	HT40	5190 / 5230	MCS 0	ı					
Tri Odiput i owei	VHT20	5180 / 5200 / 5240	MCS 0						
	VHT40	5190 / 5230	MCS 0						
	VHT80	5210	MCS 0						
	11a	5180 / 5200 / 5240	6 Mbps						
Radiated Emissions >1GHz	VHT20	5180 / 5200 / 5240	MCS 0						
Emission Bandwidth Peak Power Spectral Density	VHT40	5190 / 5230	MCS 0						
Total Tomor Opposition Donoity	VHT80	5210	MCS 0						
Frequency Stability	Un-modulation	5200							

#### NOTE:

- The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement X, Y, and Z-plane. The Y-plane results were found as the worst case and were shown in this report.
- 2. Two RJ45 cables (EEKSONG & Tong-Li) had been covered during the pretest and found that **EEKSONG RJ45** cable was the worst case and was selected for final testing.
- Two adapters (PHIHONG & Gospell) had been covered during the pretest and found that PHIHONG adapter was the worst case for radiated emission test, and Gospell adapter was the worst case for conducted emission test.

Report No.: FR7O1102AN Page: 13 of 75



	For Frequency band 5725-5850 MHz								
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration					
Conducted Emissions	VHT40	5755	MCS 0						
Radiated Emissions ≤1GHz	VHT40	5755	MCS 0						
	11a	5745 / 5785 / 5825	6 Mbps						
	HT20	5745 / 5785 / 5825	MCS 0						
RF Output Power	HT40	5755 / 5795	MCS 0						
The Guiput's ower	VHT20	5745 / 5785 / 5825	MCS 0						
	VHT40	5755 / 5795	MCS 0						
	VHT80	5775	MCS 0						
Radiated Emissions >1GHz	11a	5745 / 5785 / 5825	6 Mbps						
Emission Bandwidth	VHT20	5745 / 5785 / 5825	MCS 0						
6dB bandwidth	VHT40	5755 / 5795	MCS 0						
Peak Power Spectral Density	VHT80	5775	MCS 0						
Frequency Stability	Un-modulation	5785							

### NOTE:

- 1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement X, Y, and Z-plane. The **Y-plane** results were found as the worst case and were shown in this report.
- 2. Two RJ45 cables (EEKSONG & Tong-Li) had been covered during the pretest and found that **EEKSONG RJ45** cable was the worst case and was selected for final testing.
- 3. Two adapters (PHIHONG & Gospell) had been covered during the pretest and found that **PHIHONG adapter was** the worst case for radiated emission test, and **Gospell adapter was the worst case for conducted emission** test.

Report No.: FR7O1102AN Page: 14 of 75



## 3 Transmitter Test Results

### 3.1 Conducted Emissions


#### 3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit						
Frequency Emission (MHz) Quasi-Peak Average						
0.15-0.5	66 - 56 *	56 - 46 *				
0.5-5	56	46				
5-30	60	50				
Note 1: * Decreases with the logarithm of the frequency.						

#### 3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V / 60Hz.

#### 3.1.3 Test Setup

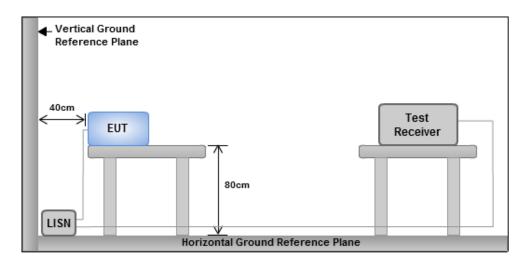


Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR7O1102AN Page: 15 of 75




### 3.1.4 Test Result of Conducted Emissions

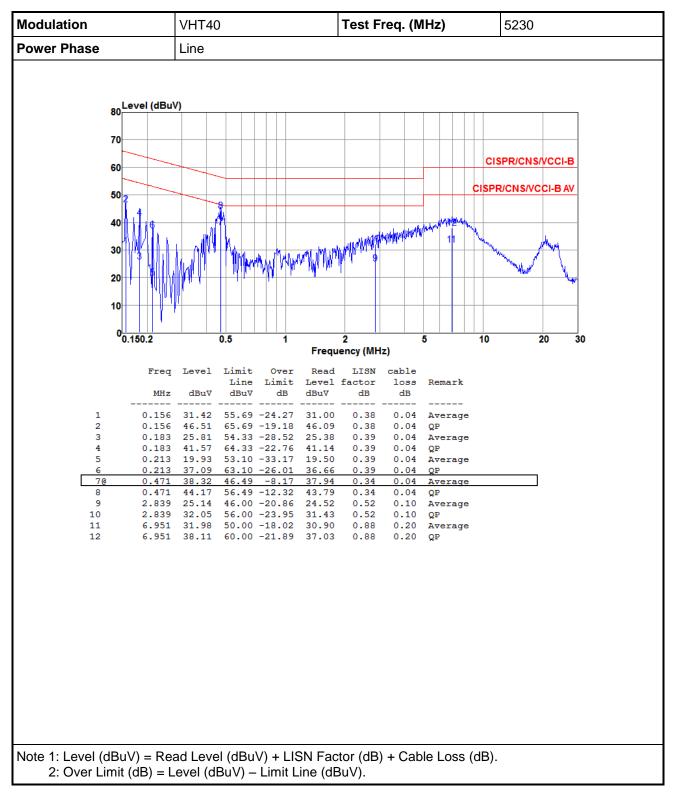


Report No.: FR7O1102AN Page: 16 of 75



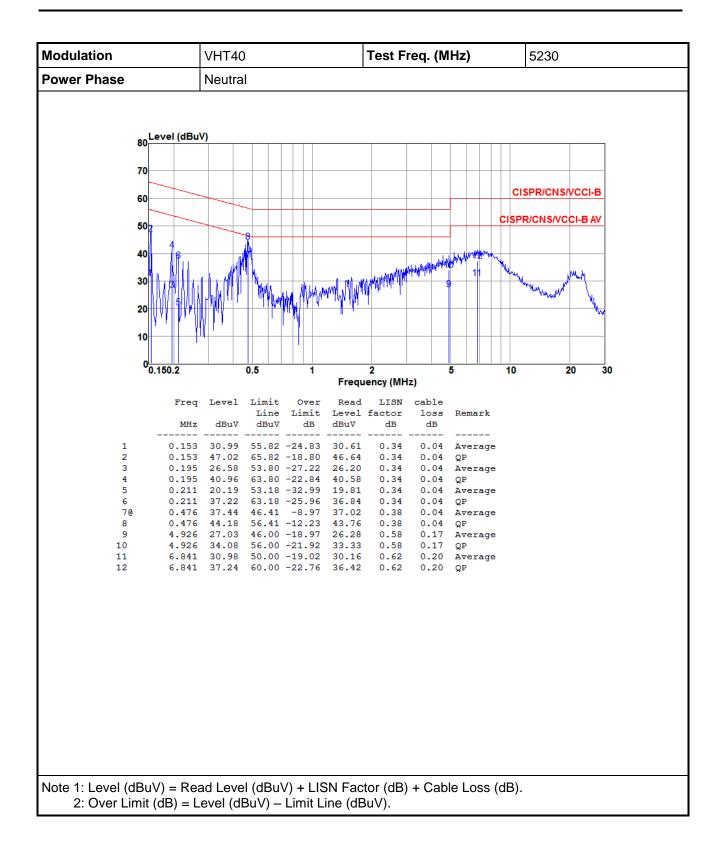


Report No.: FR7O1102AN Page: 17 of 75



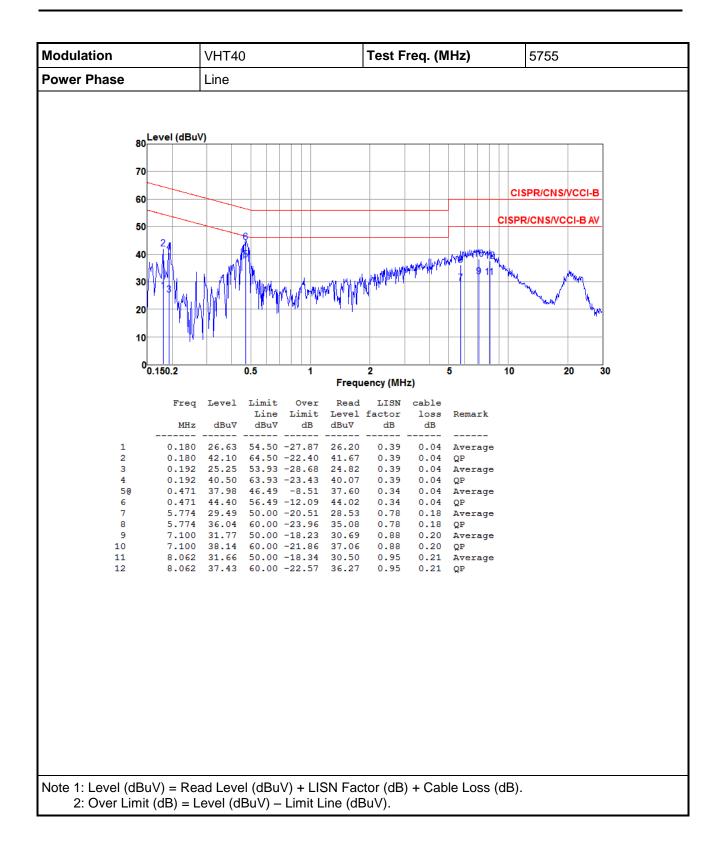

Report No.: FR7O1102AN Page: 18 of 75



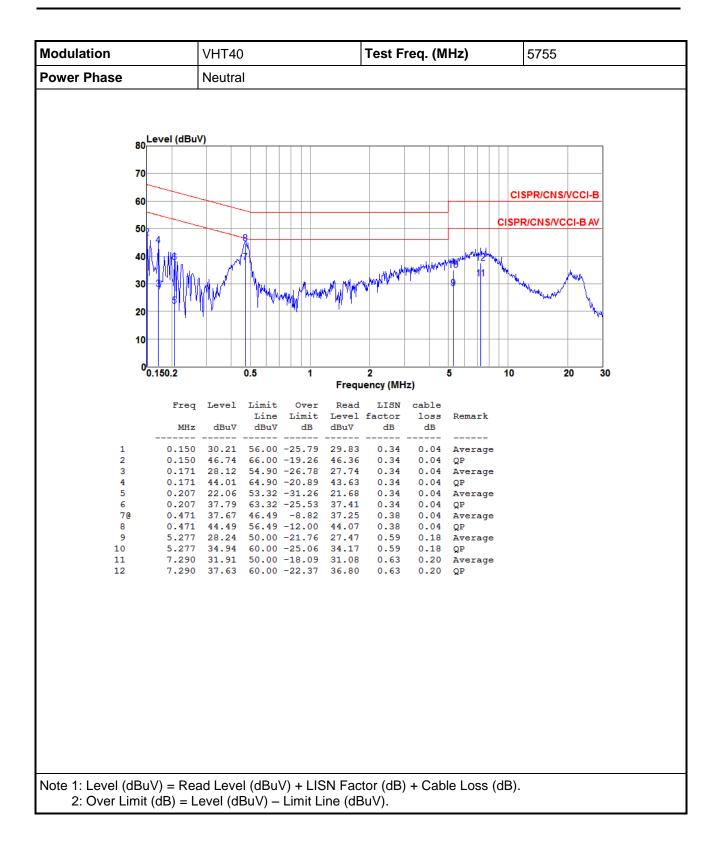

Report No.: FR7O1102AN Page: 19 of 75



### 3.2 Emission Bandwidth

#### 3.2.1 Limit of Emission bandwidth

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

#### 3.2.2 Test Procedures

#### 26dB Bandwidth

- 1. Set RBW = approximately 1% of the emission bandwidth.
- 2. Set the VBW > RBW, Detector = Peak.
- Trace mode = max hold.
- 4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.


#### **Occupied Bandwidth**

- 1. Set RBW = 1 % to 5 % of the OBW
- 2. Set VBW ≥ 3 RBW
- 3. Sample detection and single sweep mode shall be used
- 4. Use the 99 % power bandwidth function of the instrument

#### 6dB Bandwidth

- 1. Set RBW = 100kHz, VBW = 300kHz
- 2. Detector = Peak, Trace mode = max hold.
- 3. Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

### 3.2.3 Test Setup




Report No.: FR7O1102AN Page: 20 of 75



### 3.2.4 Test Result of Emission Bandwidth


	For Frequency band 5150-5250 MHz									
	Emission Bandwidth									
Mode	N <sub>TX</sub>	Freq.	2	26dB Band	width (MHz	)		99% Bandv	width (MHz)	
Wode	INTX	(MHz)	Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3
11a	2	5180	21.28	20.12			16.85	16.85		
11a	2	5200	20.23	20.17			16.87	16.83		
11a	2	5240	22.61	20.12			16.88	16.85		
VHT20	2	5180	20.93	20.41			17.71	17.69		
VHT20	2	5200	21.68	20.35			17.71	17.69		
VHT20	2	5240	24.93	20.41			17.73	17.70		
VHT40	2	5190	41.51	41.39			36.22	36.18		
VHT40	2	5230	72.46	68.17			36.60	36.50		
VHT80	2	5210	81.39	81.39			75.36	75.28		

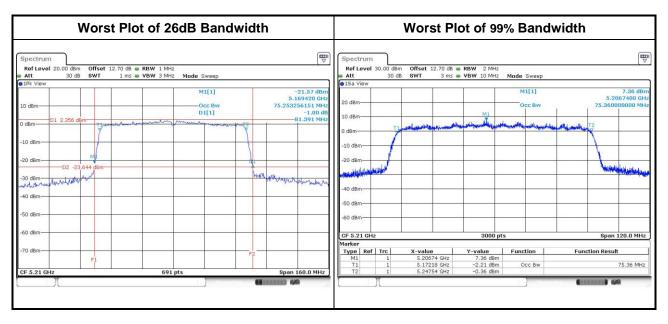

Report No.: FR7O1102AN Page: 21 of 75



				For Fre	quency b	and 5725-	5850 MHz					
					Emission	Bandwid	th					
			o	BW Band	width (MH	z)	6dB Bandwidth (MHz)					
Mode	N <sub>TX</sub>	Freq. (MHz)	Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3	6dB BW Limit (MHz)	
11a	2	5745	21.95	23.33			16.06	15.94			0.5	
11a	2	5785	22.43	23.67			15.71	15.65			0.5	
11a	2	5825	22.80	25.24			16.29	15.94			0.5	
VHT20	2	5745	23.53	24.64			16.00	16.64			0.5	
VHT20	2	5785	23.84	23.76			16.06	16.93			0.5	
VHT20	2	5825	23.17	26.29			16.52	16.93			0.5	
VHT40	2	5755	43.60	48.53			35.13	35.13			0.5	
VHT40	2	5795	44.88	50.59			35.13	35.13			0.5	
VHT80	2	5775	76.43	76.53			16.00	16.64			0.5	

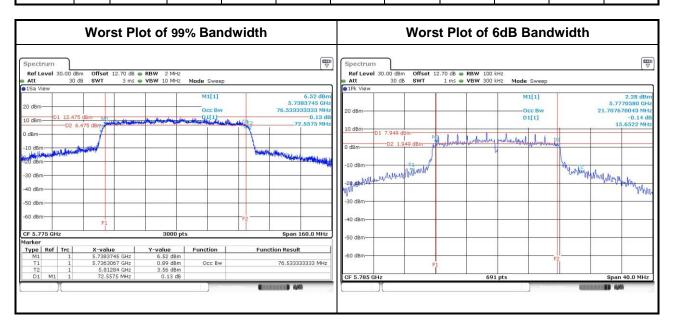

Report No.: FR7O1102AN Page: 22 of 75



## 3.3 RF Output Power

### 3.3.1 Limit of RF Output Power

	Frequ	iency band 5150-5250 MHz
Оре	erating Mode	Limit
	Outdoor access point	Conducted Power: 1 W The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm)
	Indoor access point	Conducted Power: 1 W
	Fixed point-to-point access points	Conducted Power: 1 W
	Client devices	Conducted Power: 250 mW


Fred	quency Band (MHz)	Limit
	5250 ~ 5350	250mW or 11dBm+10 log B
	5470 ~ 5725	250mW or 11dBm+10 log B
	5725 ~ 5850	1 W
Note	e: "B" is the 26dB emission bandwidth i	n MHz.

#### 3.3.2 Test Procedures

#### Method PM-G (Measurement using a gated RF average power meter)

Measurements may is performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

### 3.3.3 Test Setup



Report No.: FR7O1102AN Page: 23 of 75



## 3.3.4 Test Result of Maximum Conducted Output Power

			For Frequ	uency band	5150-5250	MHz			
BA - d -		F (MIII-)	С	onducted I	n)	Total	Total	Limit	
Mode	N <sub>TX</sub>	Freq. (MHz)	Chain 0	Chain 1	Chain 2	Chain 3	Power (mW)	Power (dBm)	(dBm)
11a	2	5180	14.06	14.15			51.470	17.12	30.00
11a	2	5200	14.14	14.18			52.124	17.17	30.00
11a	2	5240	14.12	14.23			52.308	17.19	30.00
HT20	2	5180	14.12	14.23			52.308	17.19	30.00
HT20	2	5200	13.94	14.04			50.126	17.00	30.00
HT20	2	5240	13.93	14.06			50.186	17.01	30.00
HT40	2	5190	14.25	14.11			52.370	17.19	30.00
HT40	2	5230	17.26	17.28			106.667	20.28	30.00
VHT20	2	5180	14.21	14.35			53.590	17.29	30.00
VHT20	2	5200	14.06	14.15			51.470	17.12	30.00
VHT20	2	5240	14.08	14.21			51.949	17.16	30.00
VHT40	2	5190	14.42	14.23			54.154	17.34	30.00
VHT40	2	5230	17.45	17.42			110.798	20.45	30.00
VHT80	2	5210	11.86	12.72			34.053	15.32	30.00

			For Freque	uency band	5725-5850	MHz			
			C	onducted I	Power (dBn	n)	Total	Total	Limit
Mode	N <sub>TX</sub>	Freq. (MHz)	Chain 0	Chain 1	Chain 2	Chain 3	Power (mW)	Power (dBm)	(dBm)
11a	2	5745	19.12	19.35			167.758	22.25	30.00
11a	2	5785	19.04	19.38			166.864	22.22	30.00
11a	2	5825	19.45	19.34			174.006	22.41	30.00
HT20	2	5745	18.91	18.94			156.147	21.94	30.00
HT20	2	5785	19.22	19.03			163.544	22.14	30.00
HT20	2	5825	19.08	19.53			170.652	22.32	30.00
HT40	2	5755	19.72	19.41			181.053	22.58	30.00
HT40	2	5795	19.39	19.54			176.846	22.48	30.00
VHT20	2	5745	19.06	19.05			160.890	22.07	30.00
VHT20	2	5785	19.34	19.11			167.372	22.24	30.00
VHT20	2	5825	19.22	19.68			176.457	22.47	30.00
VHT40	2	5755	19.86	19.54			186.778	22.71	30.00
VHT40	2	5795	19.51	19.66			181.800	22.60	30.00
VHT80	2	5775	17.16	17.24			104.966	20.21	30.00

Report No.: FR7O1102AN Page: 24 of 75



## 3.4 Peak Power Spectral Density

#### 3.4.1 Limit of Peak Power Spectral Density

	Frequ	iency band 5150-5250 MHz
Ope	erating Mode	Limit
	Outdoor access point	17 dBm / MHz
$\boxtimes$	Indoor access point	17 dBm / MHz
	Fixed point-to-point access points	17 dBm / MHz
	Client devices	11 dBm / MHz

Free	quency Band (MHz)	Limit
	5250 ~ 5350	11 dBm / MHz
	5470 ~ 5725	11 dBm / MHz
$\boxtimes$	5725 ~ 5850	30 dBm / 500 kHz

#### 3.4.2 Test Procedures

#### For 5150 ~ 5250 MHz

- ☐ Method SA-1
  - 1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
  - 2. Trace average 100 traces.
  - 3. Use the peak marker function to determine the maximum amplitude level.
- Method SA-2 Alternative
  - 1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
  - 2. Set sweep time ≥ 10 \* (number of points in sweep) \* (total on/off period of the transmitted signal).
  - 3. Perform a single sweep.
  - 4. Use the peak marker function to determine the maximum amplitude level.
  - 5. Add 10 log(1/x), where x is the duty cycle.

#### For 5725 ~ 5850 MHz

- - 1. Set RBW = 500 kHz, VBW = 2 MHz, Sweep time = auto, Detector = RMS.
  - 2. Trace average 100 traces.
  - 3. Use the peak marker function to determine the maximum amplitude level.
- - 1. Set RBW = 500 kHz, VBW = 2 MHz, Detector = RMS.
  - 2. Set sweep time ≥ 10 \* (number of points in sweep) \* (total on/off period of the transmitted signal).
  - 3. Perform a single sweep.
  - 4. Use the peak marker function to determine the maximum amplitude level.
  - 5. Add 10 log(1/x), where x is the duty cycle.

Report No.: FR7O1102AN Page: 25 of 75



## 3.4.3 Test Setup



Report No.: FR7O1102AN Page: 26 of 75




## 3.4.4 Test Result of Peak Power Spectral Density

			For Frequency	band 5150-5250 MH	lz	
Co	ndition	1		Peak Power Spectra	al Density (dBm/MH	z)
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	PPSD w/o D.F (dBm/MHz)	Duty Factor (dB)	PPSD with D.F (dBm/MHz)	PPSD Limit (dBm/MHz)
11a	2	5180	4.22	0.27	4.49	17
11a	2	5200	4.15	0.27	4.42	17
11a	2	5240	4.20	0.27	4.47	17
VHT20	2	5180	4.03	0.24	4.27	17
VHT20	2	5200	4.41	0.24	4.65	17
VHT20	2	5240	4.20	0.24	4.44	17
VHT40	2	5190	-0.31	0.48	0.17	17
VHT40	2	5230	3.87	0.48	4.35	17
VHT80	2	5210	-6.06	0.84	-5.22	17

#### Note:

- 1. D.F is duty factor.
- 2. Test results are bin-by-bin summing measured value of each TX port.

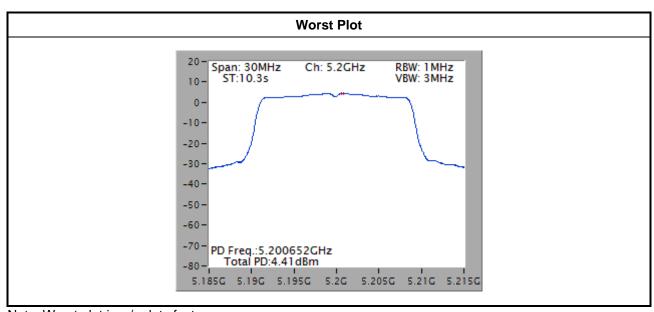

Note: Worst plot is w/o duty factor.


Report No.: FR7O1102AN Page: 27 of 75



			For Frequency	band 5725-5850 MH	łz	
Co	ondition	1	F	Peak Power Spectral	Density (dBm/500kl	Hz)
Mode	N <sub>TX</sub>	Freq. (MHz)	PPSD w/o D.F (dBm/500kHz)	Duty Factor (dB)	PPSD with D.F (dBm/500kHz)	PPSD Limit (dBm/500kHz)
11a	2	5745	7.38	0.27	7.65	28.38
11a	2	5785	7.35	0.27	7.62	28.38
11a	2	5825	7.35	0.27	7.62	28.38
VHT20	2	5745	6.96	0.24	7.20	28.38
VHT20	2	5785	6.83	0.24	7.07	28.38
VHT20	2	5825	6.94	0.24	7.18	28.38
VHT40	2	5755	3.47	0.48	3.95	28.38
VHT40	2	5795	3.49	0.48	3.97	28.38
VHT80	2	5775	-2.02	0.84	-1.18	28.38

#### Note:

- 1. D.F is duty factor.
- Test results are bin-by-bin summing measured value of each TX port.
   Directional gain = 10 \* log((10<sup>5.06/20</sup>+10<sup>4.14/20</sup>)<sup>2</sup>/2) = 7.62 dBi > 6dBi Limit shall be reduced to 30 dBm - (7.62 dBi - 6 dBi) = 28.38 dBm.

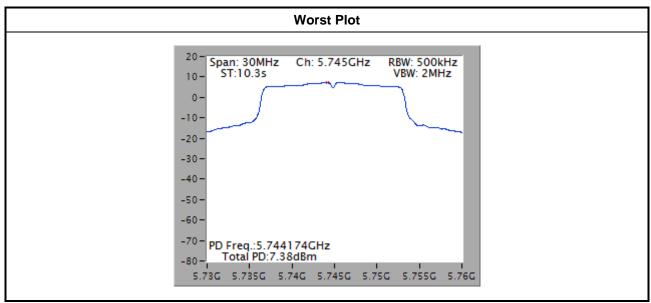

Note: The plot without duty factor.

Report No.: FR7O1102AN Page: 28 of 75



## 3.5 Transmitter Radiated and Band Edge Emissions

### 3.5.1 Limit of Transmitter Radiated and Band Edge Emissions

	Restricted Band	Emissions Limit	
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

#### Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:** 

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

	Un-restricted band emissions above 1GHz Limit
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p27 dBm [68.2 dBuV/m@3m]
5.725 - 5.850 GHz	15.407(b)(4)(i) All emissions shall be limited to a level of −27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
	15.407(b)(4)(ii) ,compliance with the emission limits in § 15.247(d) Shall be at least 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power,. Attenuation below the general limits specified in §15.209(a) is not required. In addition,radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see § 15.205(c))

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Report No.: FR7O1102AN Page: 29 of 75



#### 3.5.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


#### Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR7O1102AN Page: 30 of 75




## 3.5.3 Test Setup

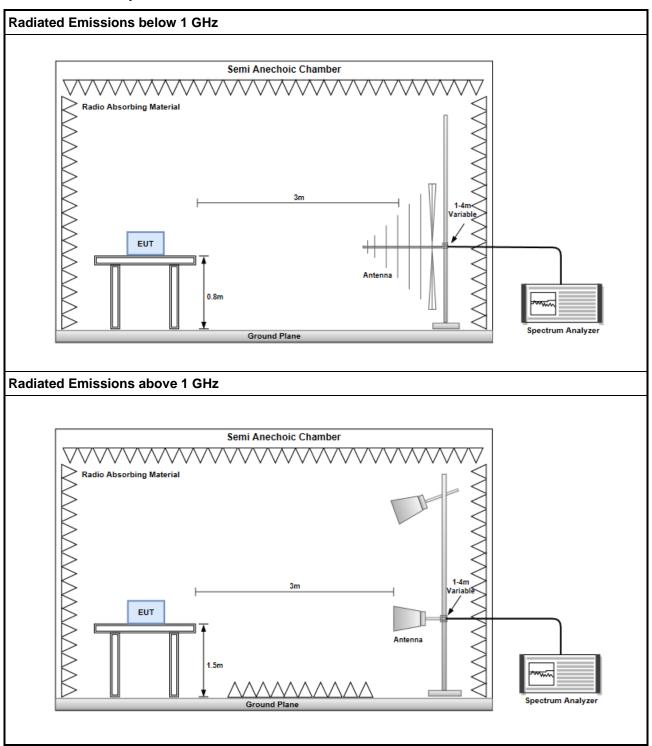

Report No.: FR7O1102AN Page: 31 of 75



### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

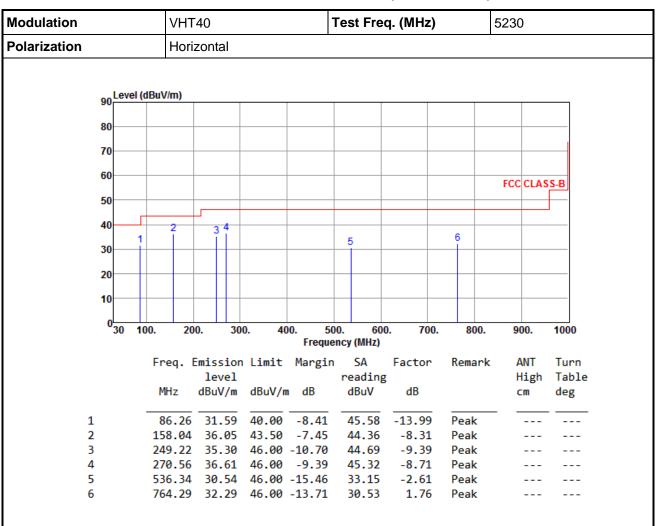

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR7O1102AN Page: 32 of 75



Modulation			VHT	40			Test Fre	q. (MHz)		5230	
Polarization			Verti	cal		•					
	90 Le	vel (dBu	ıV/m)								
	80										
	70										
	60									FCC CLAS	SS-B
	50										
	40 1								_		
	30		2	3 4		,			6		
	20										
	10										
	030	100.	200	0.	300.		00. 600	0. 700.	800.	900.	1000
							ency (MHz)				
		F	req. E	missi leve		t Margin		Factor	Remark		Turn
			MHz		ı m dBuV,	/m dB	reading dBuV	dB		High cm	Table deg
		_								_	
	1		43.77	38.9		0 -1.09	47.38	-8.47	QP	100	119
	2		48.34	32.5		-11.00	40.97	-8.47	Peak		
	3		49.22			7 -12.11	43.28	-9.39	Peak		
	4 5		70.56	31.9		0 -14.10 0 -12.59	40.61 36.77	-8.71 -3.36	Peak Peak		
	5 6				2 46.00		31.28	1.44	Peak Peak		

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR7O1102AN Page: 33 of 75



Modulation Polarization			VHT	40		-	Test Fre	q. (MHz)	5755			
		Horizontal										
	on Lev	el (dBu	ıV/m)									
	30											
	80											
	70-											
	60									FCC CLA	ASS-B	
	50											
	40			34								
		1	2	ii l		5			6			
	30-											
	20											
	10											
	030	100.	20	0. 30	0. 40		00. 600 ency (MHz)	0. 700.	800.	900.	1000	
		F	req. E	mission	Limit	Margin	SA	Factor	Remark	ANT	Turn	
				level			reading			High		
			MHz	dBuV/m	dBuV/r	n dB	dBuV	dB		cm	deg	
	l	_	86.26	30 51	10 00	-9.49	44.50	-13.99	Peak			
	2		63.86	34.61	43.50		43.00	-8.39	Peak			
	3		49.22	35.72		-10.28	45.11	-9.39	Peak			
	1		67.65	36.59		-9.41	45.41	-8.82	Peak			
	5	4	47.10	30.16	46.00	-15.84	34.29	-4.13	Peak			

1.58 Peak

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

749.74 32.97 46.00 -13.03 31.39

Report No.: FR7O1102AN Page: 34 of 75



Modulation Polarization			VHT40					Test Freq. (MHz)				5755			
			Vertical												
		Leve	l (dBuV	//m)											
	90		1	,											
	80														
	70														
	70														
	60												FCC	CLAS	S B
	50												100	CLAS	3-0
		١.													J
	40	1		2	3			5							
	30			1	Ī	4		5				6			
	20					$\Box$									
	10	-				+									
	0														
	U	30	100.	20	0.	300	0. 40		00. 60 ency (MHz)		00.	800.	9	00.	1000
			Γ.,		Emic.	.ion	limi+				. D	emark	. ,	ANT	Turn
			Fr	eq. i		olon Vel	LIMIC	margi	n SA readin			emark		anı High	Table
			М	Hz			dBuV/r	n dB	dBuV	в dB				:m	deg
						_									
	1							-1.11				įΡ		100	114
	2							-10.72				eak			
	3 4							-12.11 -15.20				eak eak			
	4			/.05			46.00	-15.20	39.62			eak			

-3.59

1.78

30.54

Peak

Peak

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

482.99 32.58 46.00 -13.42 36.17

766.23 32.32 46.00 -13.68

Report No.: FR7O1102AN Page: 35 of 75


Report Version: Rev. 01

5

6



### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

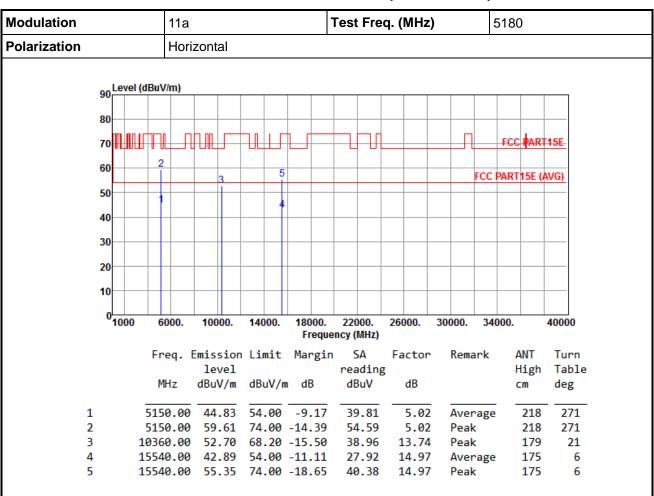


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR7O1102AN Page: 36 of 75



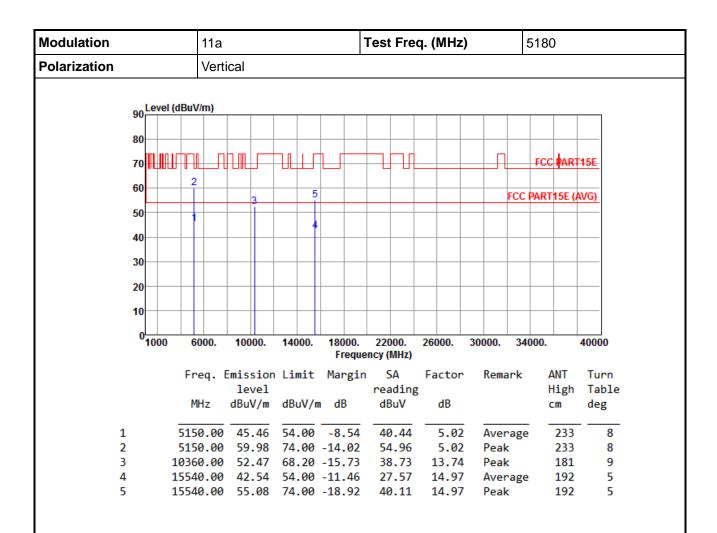


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 37 of 75



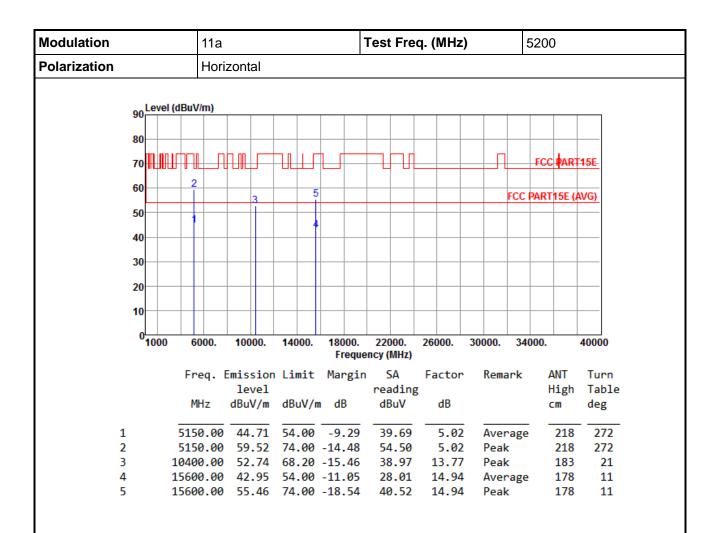


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 38 of 75



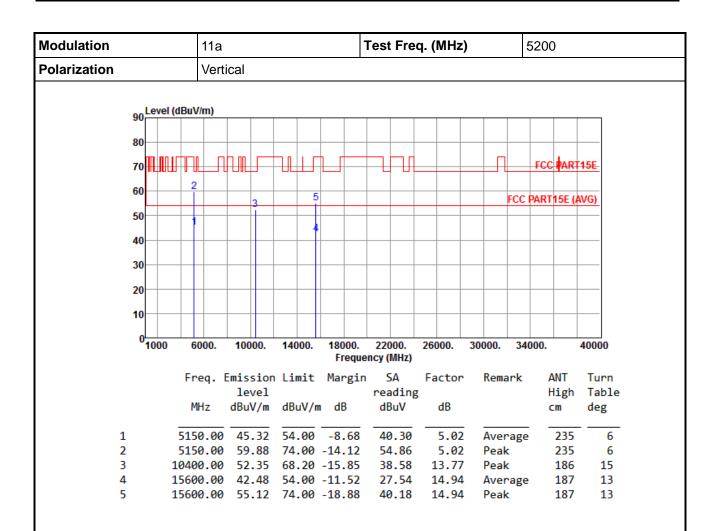


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 39 of 75



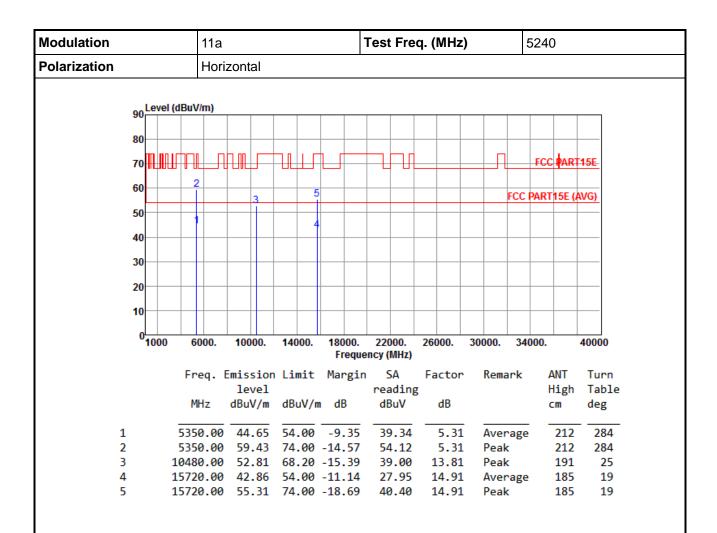


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 40 of 75



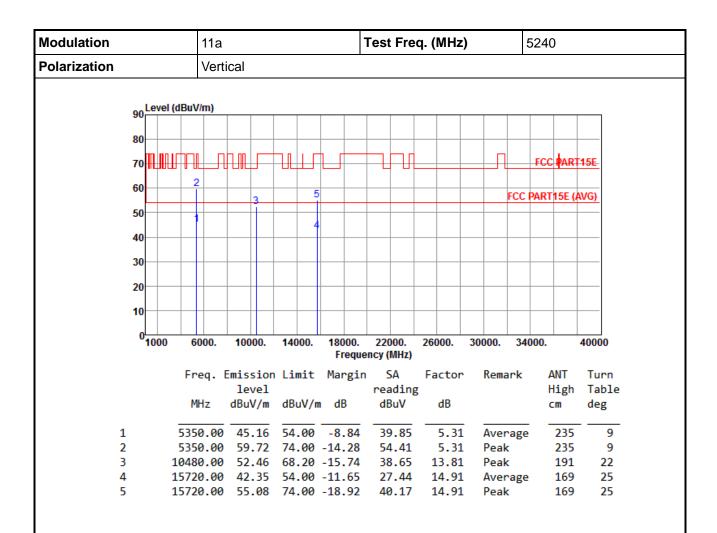


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 41 of 75



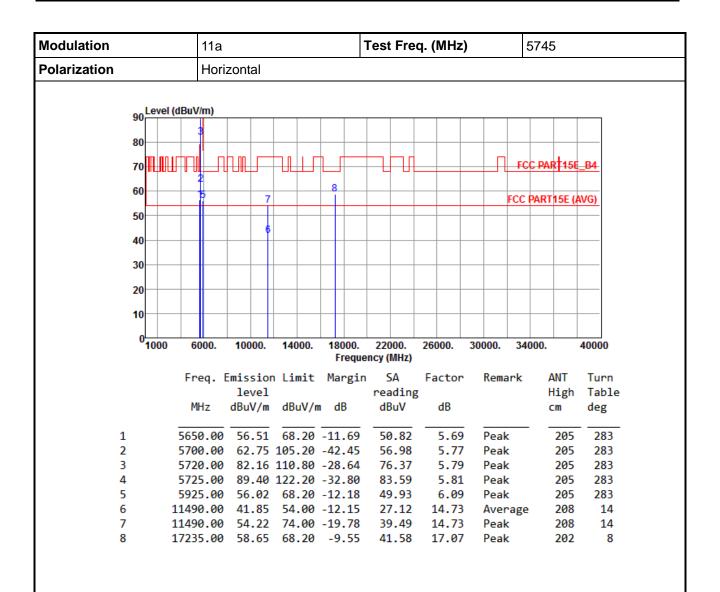


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 42 of 75



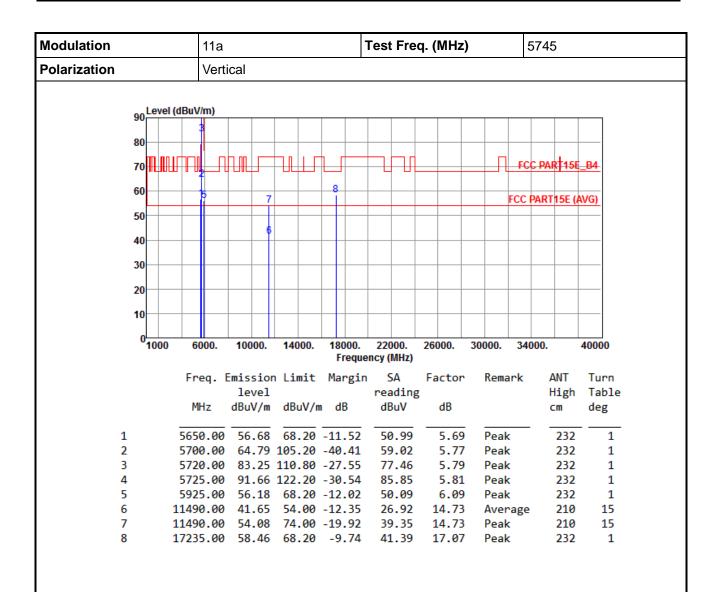

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 43 of 75






\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 44 of 75



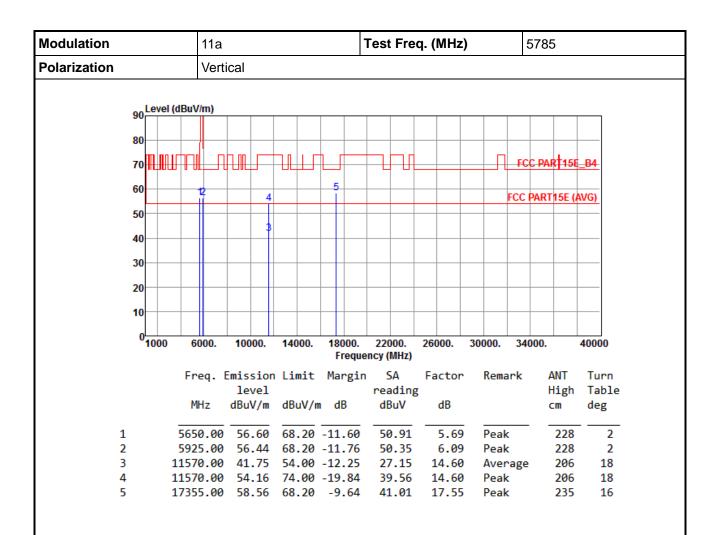


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 45 of 75



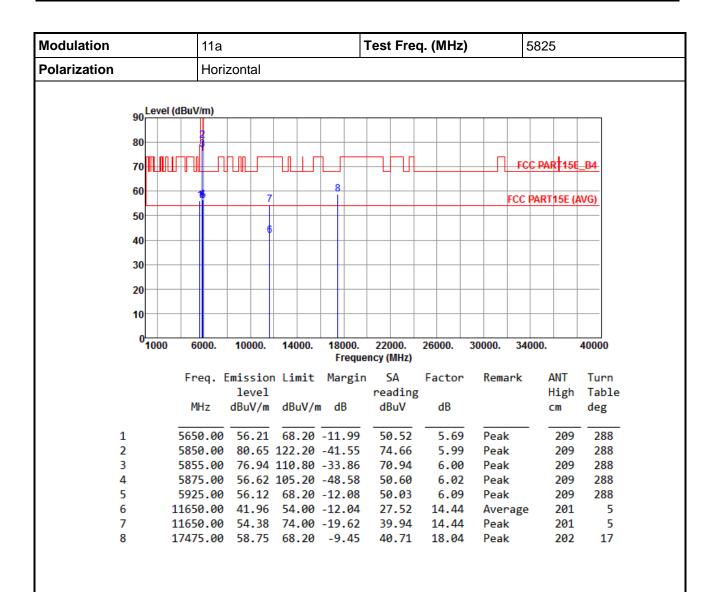


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 46 of 75



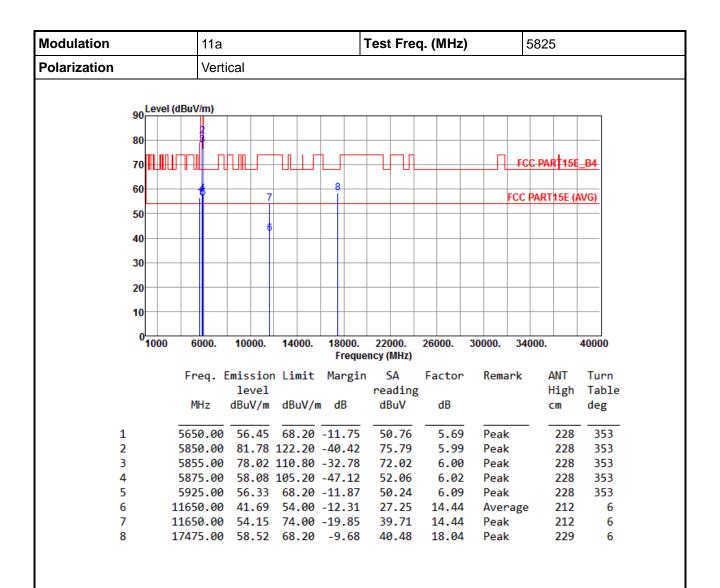


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 47 of 75



### 3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT20

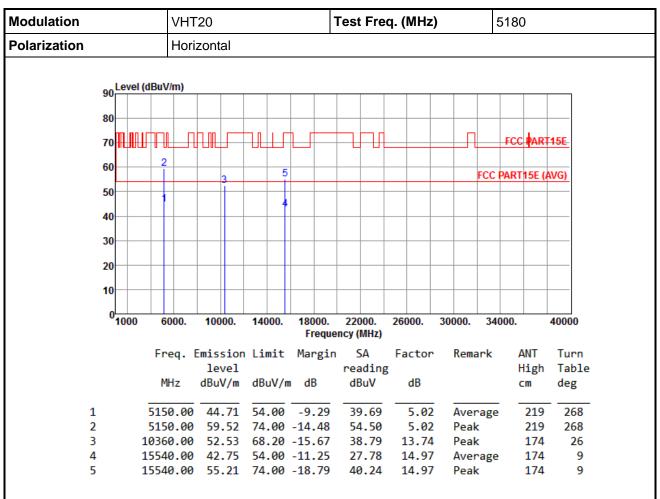


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR7O1102AN Page: 48 of 75



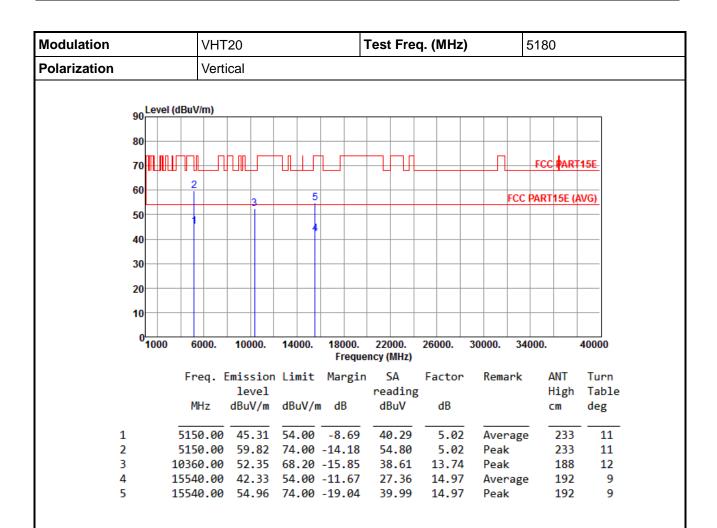


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 49 of 75



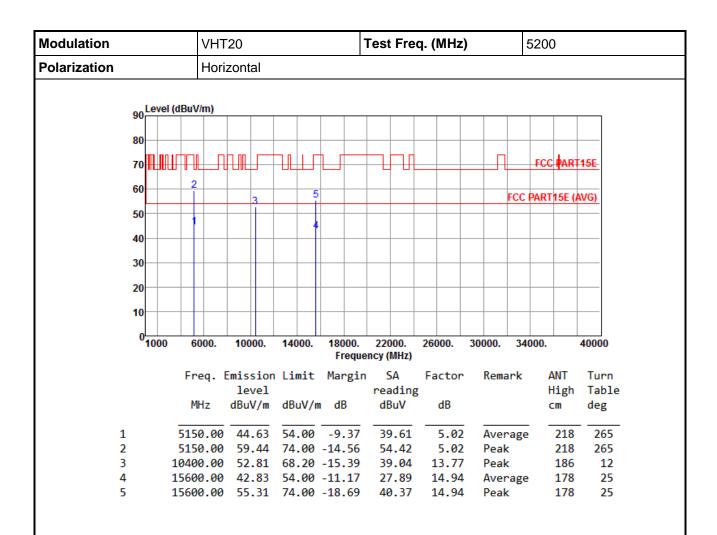


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 50 of 75



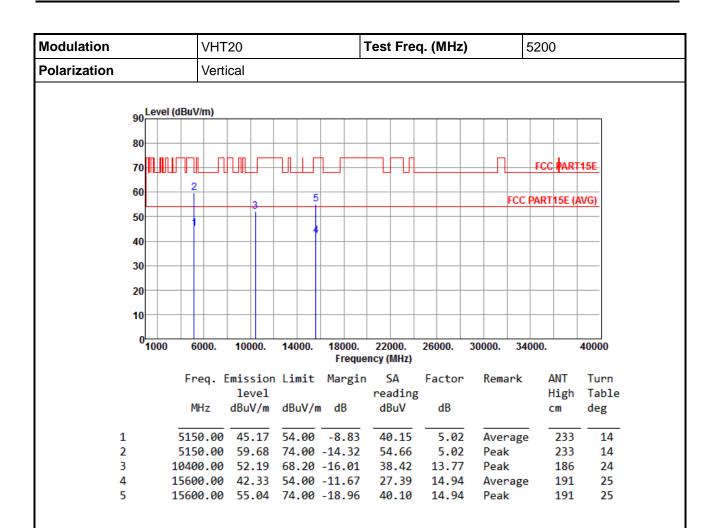


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 51 of 75



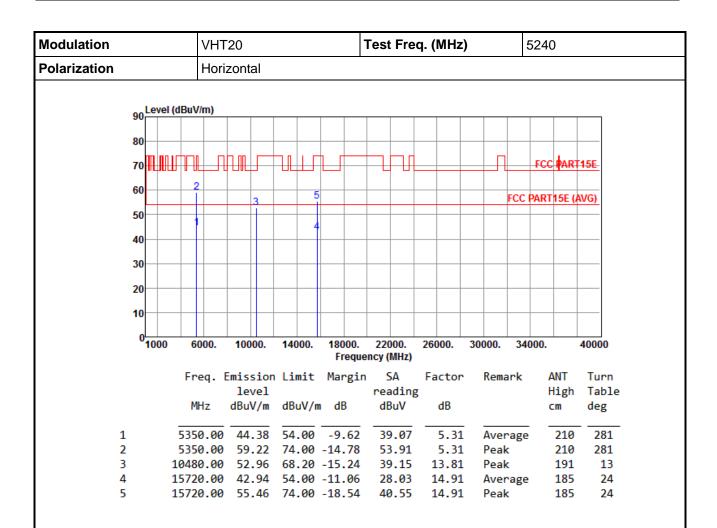


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 52 of 75



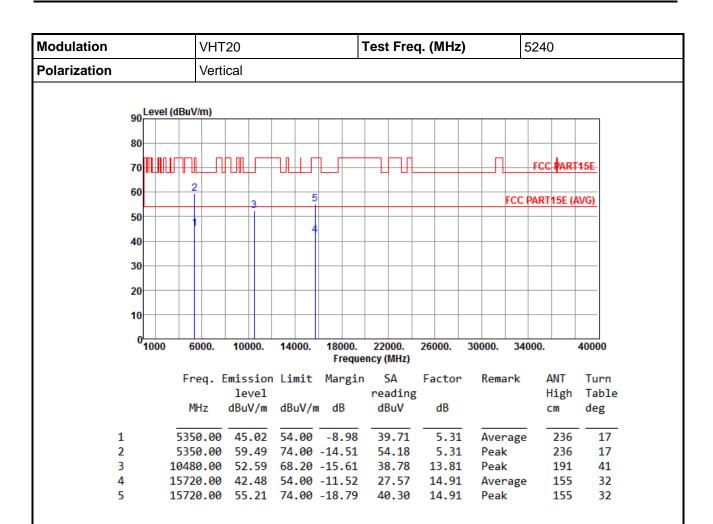


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 53 of 75



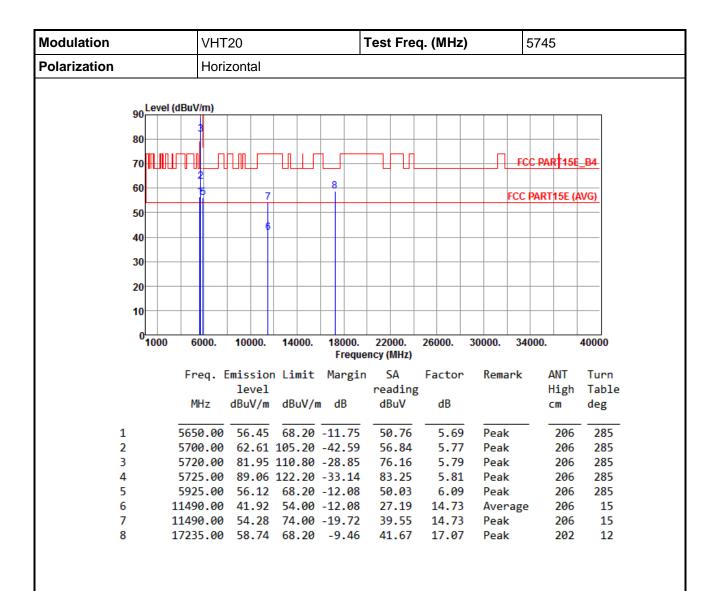


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 54 of 75



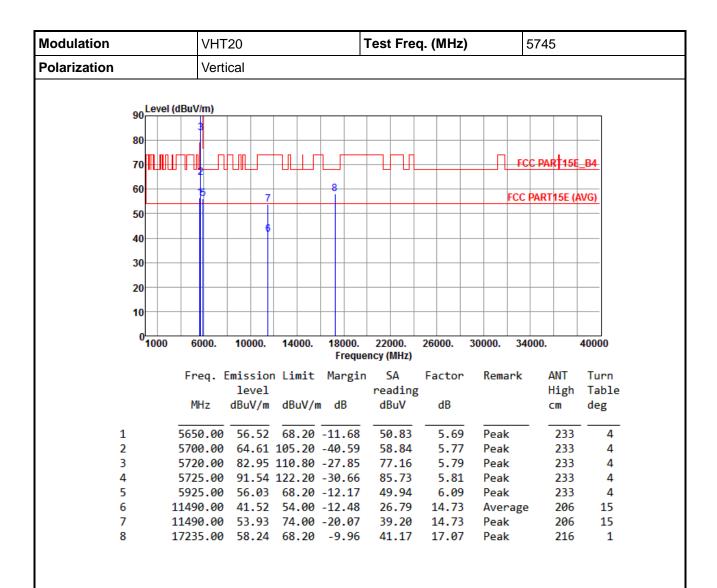


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 55 of 75



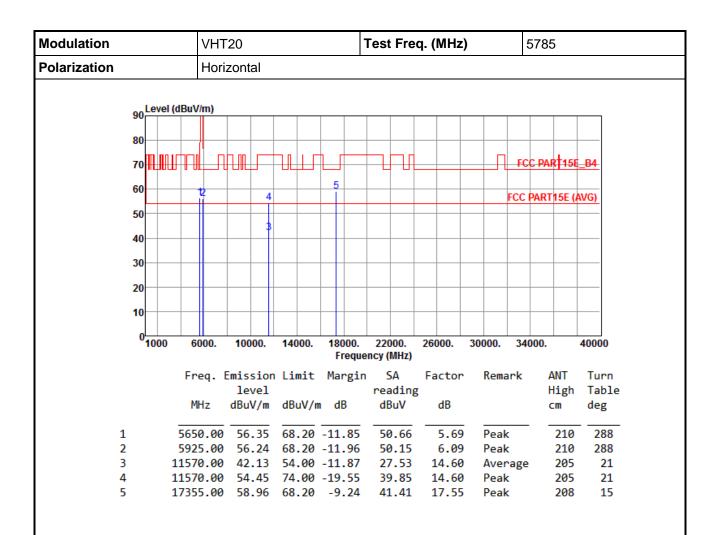


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 56 of 75



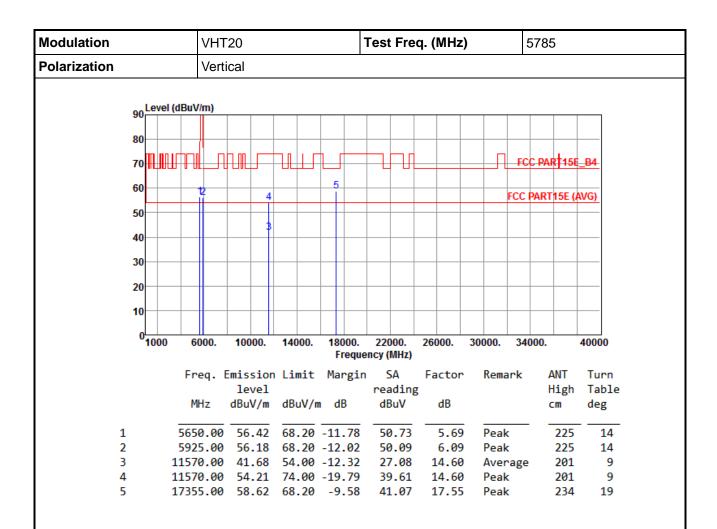


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 57 of 75



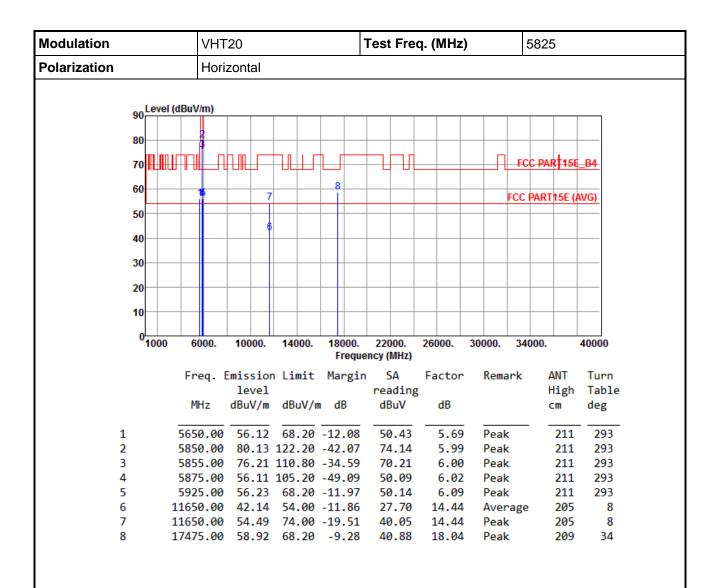


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 58 of 75



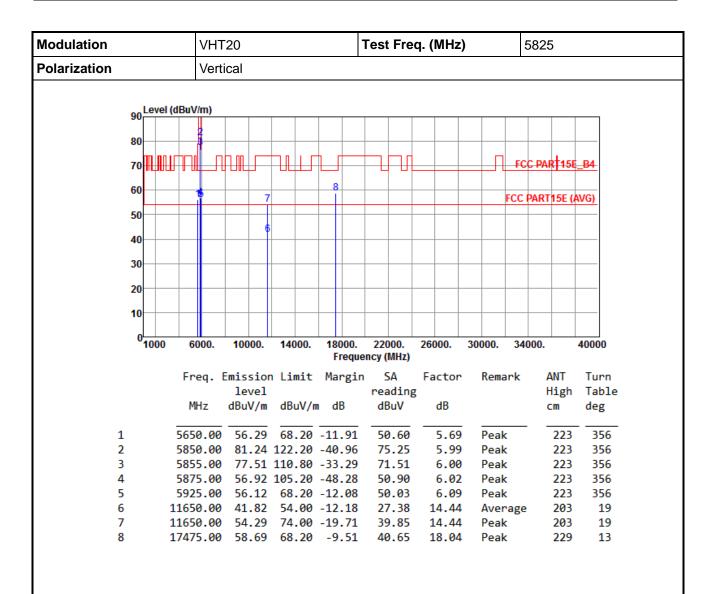


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 59 of 75



### 3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40

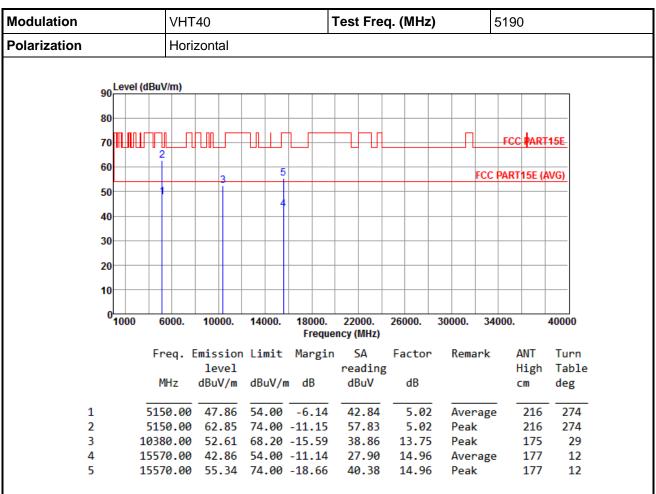


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 60 of 75



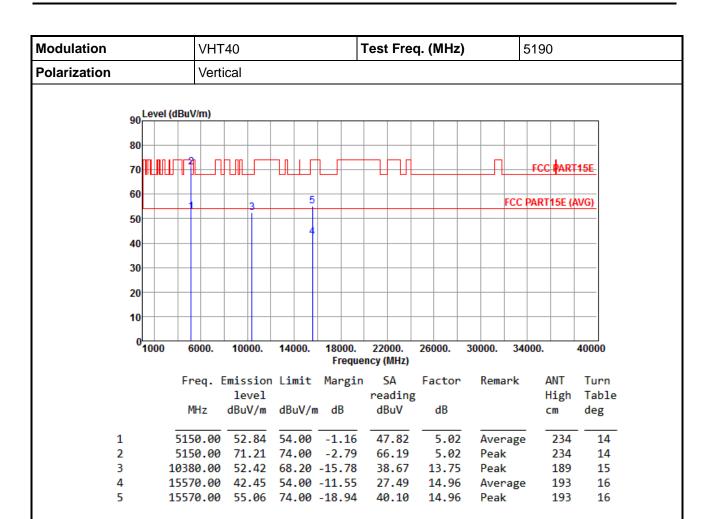


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 61 of 75



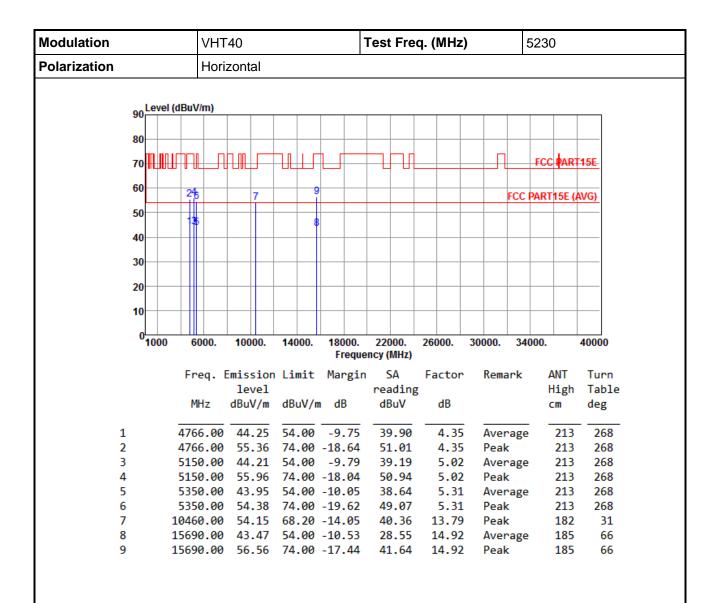


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 62 of 75



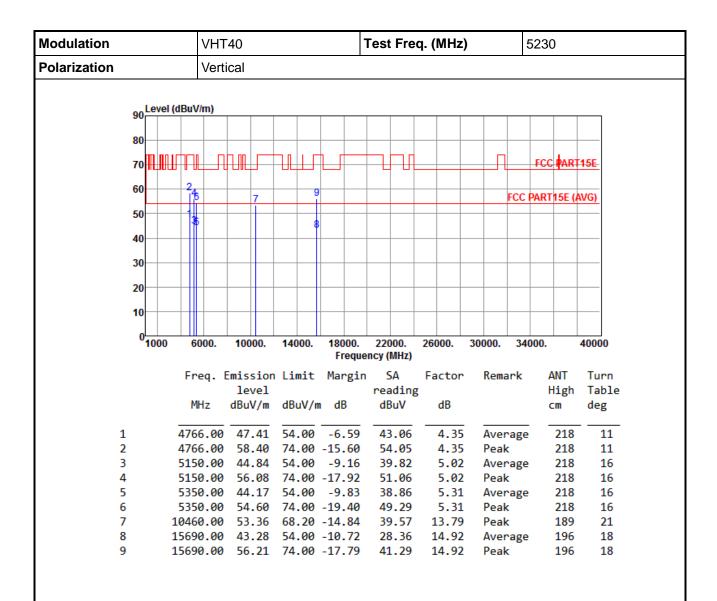


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 63 of 75



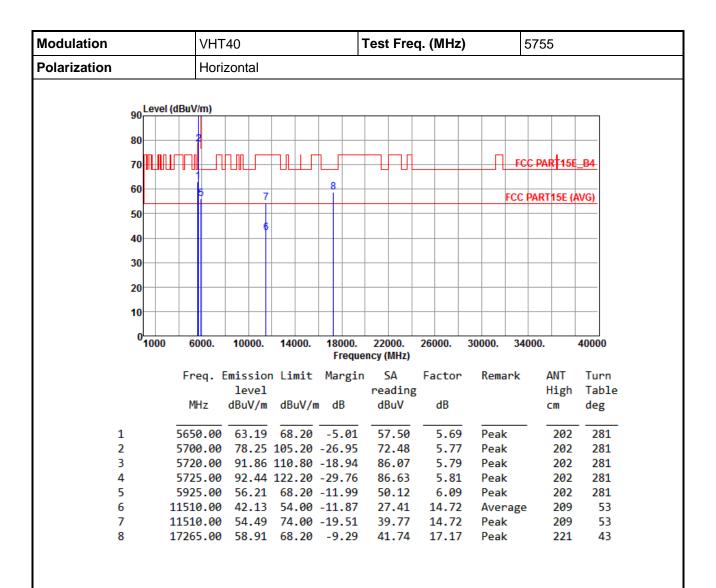


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 64 of 75



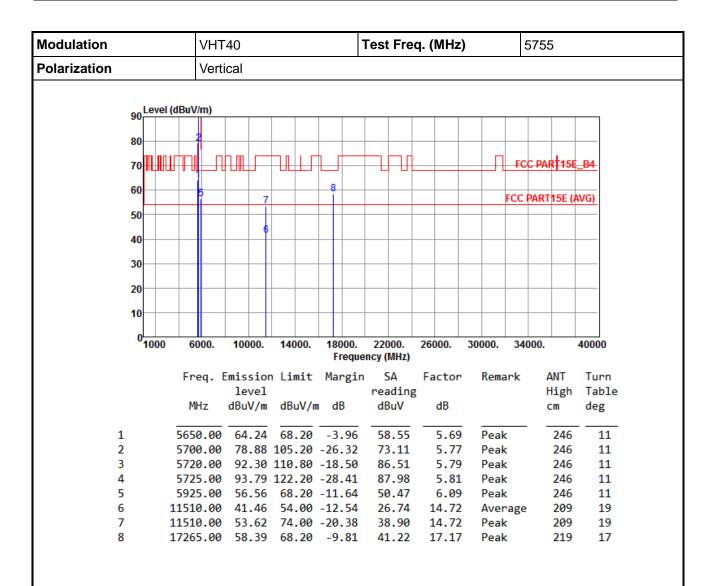


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 65 of 75



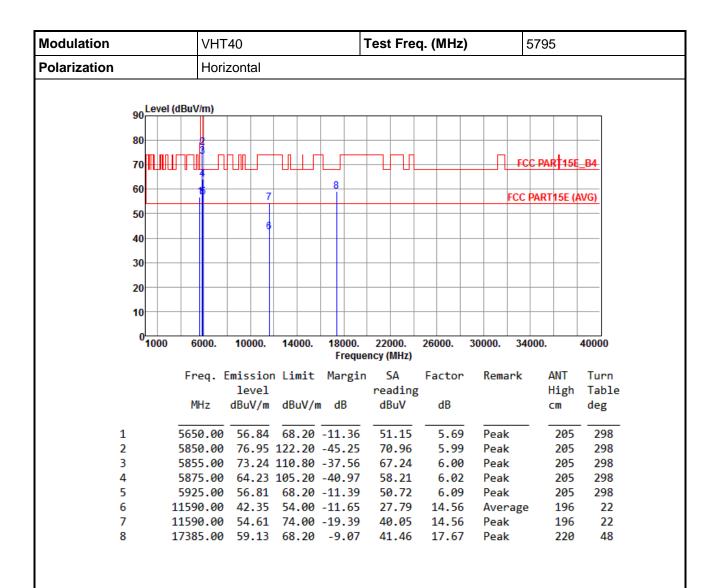


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 66 of 75



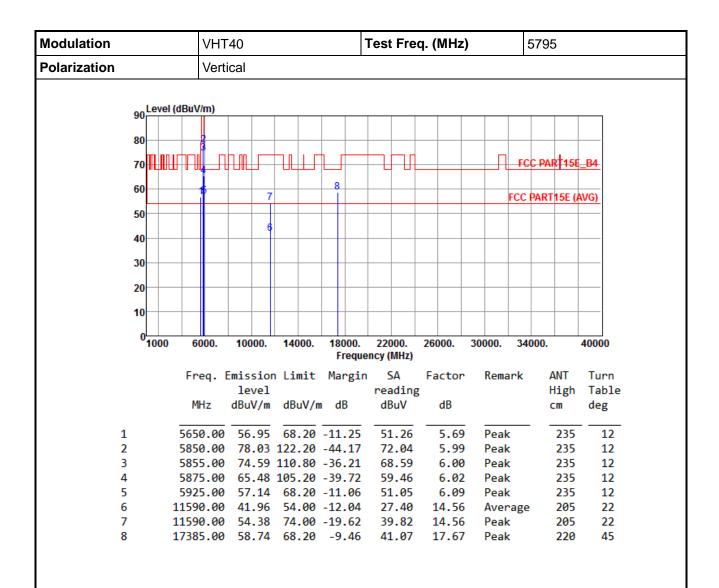


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 67 of 75



## 3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT80

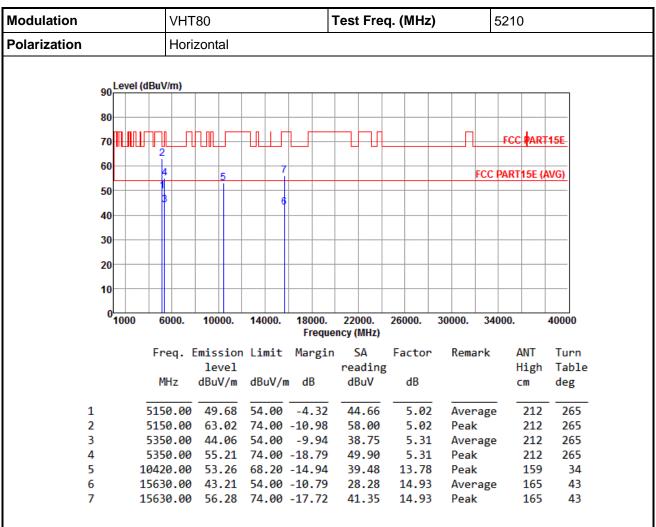


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR7O1102AN Page: 68 of 75

<sup>\*</sup>Factor includes antenna factor, cable loss and amplifier gain



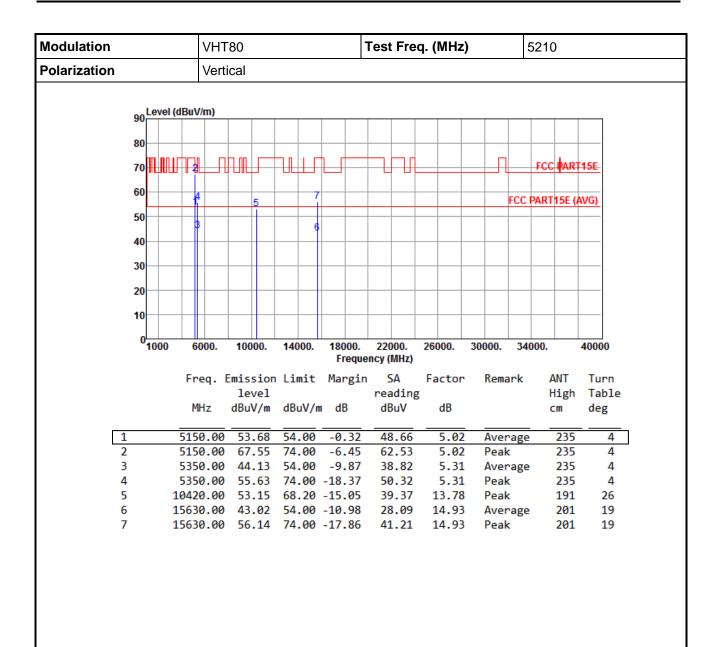


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 69 of 75



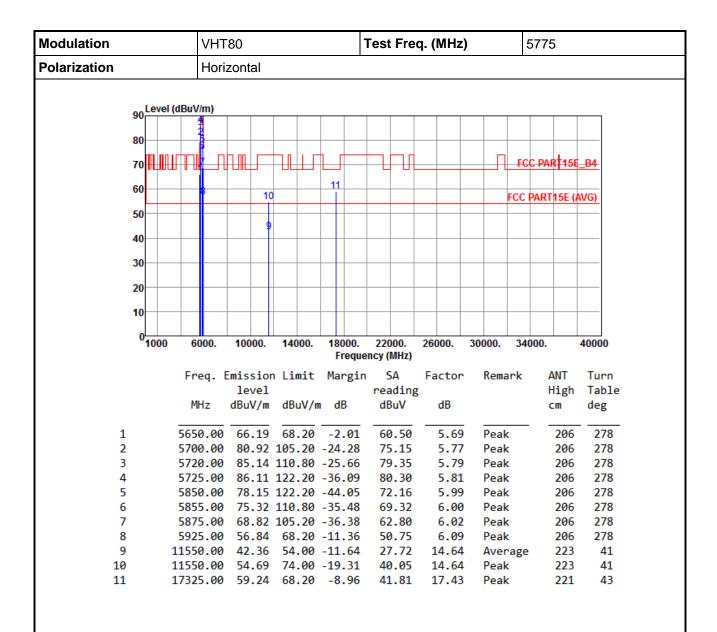


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 70 of 75



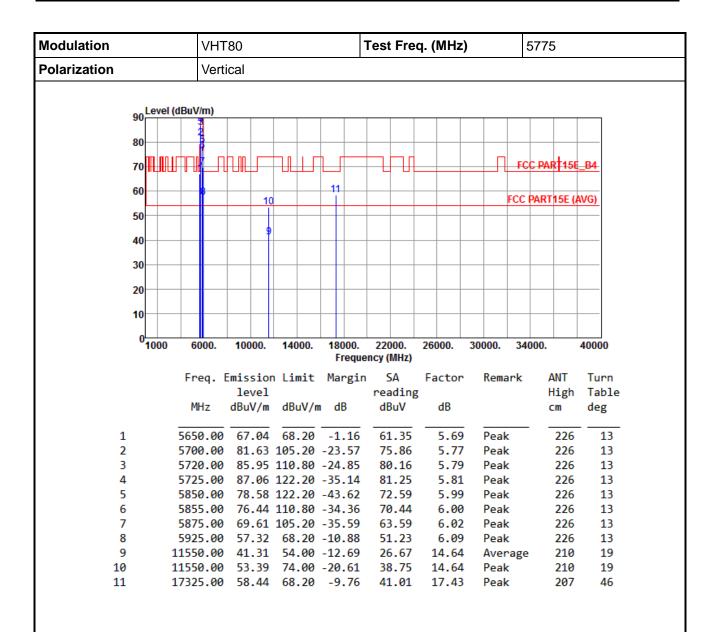

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AN Page: 71 of 75



## 3.6 Frequency Stability


#### 3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

#### 3.6.2 Test Procedures

- 1. The EUT is installed in an environment test chamber with external power source.
- 2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT.
- 3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
- 4. When temperature is stabled, measure the frequency stability.
- 5. The test shall be performed under -30 to 75 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.

#### 3.6.3 Test Setup



Report No.: FR7O1102AN Page: 72 of 75



# 3.6.4 Test Result of Frequency Stability

Frequency: 5200 MHz	Frequency Drift (ppm)					
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes		
T20°CVmax	5.46	5.29	6.85	5.62		
T20°CVmin	5.63	4.77	6.47	6.10		
T75°CVnom	4.40	5.87	5.77	4.28		
T70°CVnom	3.83	4.05	3.46	3.61		
T60°CVnom	4.49	4.73	4.46	3.79		
T50°CVnom	3.41	3.66	3.99	3.30		
T40°CVnom	3.60	3.75	3.69	3.84		
T30°CVnom	3.18	4.09	3.96	3.19		
T20°CVnom	3.28	4.99	3.21	2.32		
T10°CVnom	1.26	1.79	1.32	2.49		
T0°CVnom	0.61	1.78	0.50	2.06		
T-10°CVnom	1.12	1.16	0.62	0.69		
T-20°CVnom	1.53	2.46	2.52	1.71		
T-30°CVnom	1.64	1.66	3.10	1.97		
Vnom [Vac]: 120		max [Vac]: 138	Vmin [Vac]: 1	Vmin [Vac]: 102		
Tnom [°C]: 20		max [°C]: 75	Tmin [°C]: -30	Tmin [°C]: -30		

Report No.: FR7O1102AN Page: 73 of 75



Frequency: 5785 MHz	Frequency Drift (ppm)					
Temperature (°C)	0 minute	2 minutes	inutes 5 minutes		s 10 minutes	
T20°CVmax	5.21	6.32	6.16		6.20	
T20°CVmin	3.57	3.50	3.90		3.76	
T75°CVnom	4.53	4.49	4.13		4.98	
T70°CVnom	3.02	3.37	2.95		3.55	
T60°CVnom	3.54	3.86	3.18		3.50	
T50°CVnom	2.50	2.96	2.55		2.77	
T40°CVnom	2.40	2.61	2.13		2.52	
T30°CVnom	3.44	3.22	3.41		3.34	
T20°CVnom	1.91	2.12		2.18	1.74	
T10°CVnom	0.61	1.16	0.77		1.60	
T0°CVnom	0.80	0.34	0.60		-0.08	
T-10°CVnom	0.87	1.04		0.58	0.21	
T-20°CVnom	1.03	1.67	1.68		1.33	
T-30°CVnom	-0.21	0.23		0.28	0.08	
Vnom [Vac]: 120		max [Vac]: 138		Vmin [Vac]: 102		
Tnom [°C]: 20		Гmax [°C]: 75		Tmin [°C]: -30		

Report No.: FR7O1102AN Page: 74 of 75



## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <a href="http://www.icertifi.com.tw">http://www.icertifi.com.tw</a>.

#### Linkou

Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City,

Taiwan, R.O.C.

#### Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

#### Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==

Report No.: FR7O1102AN Page: 75 of 75