




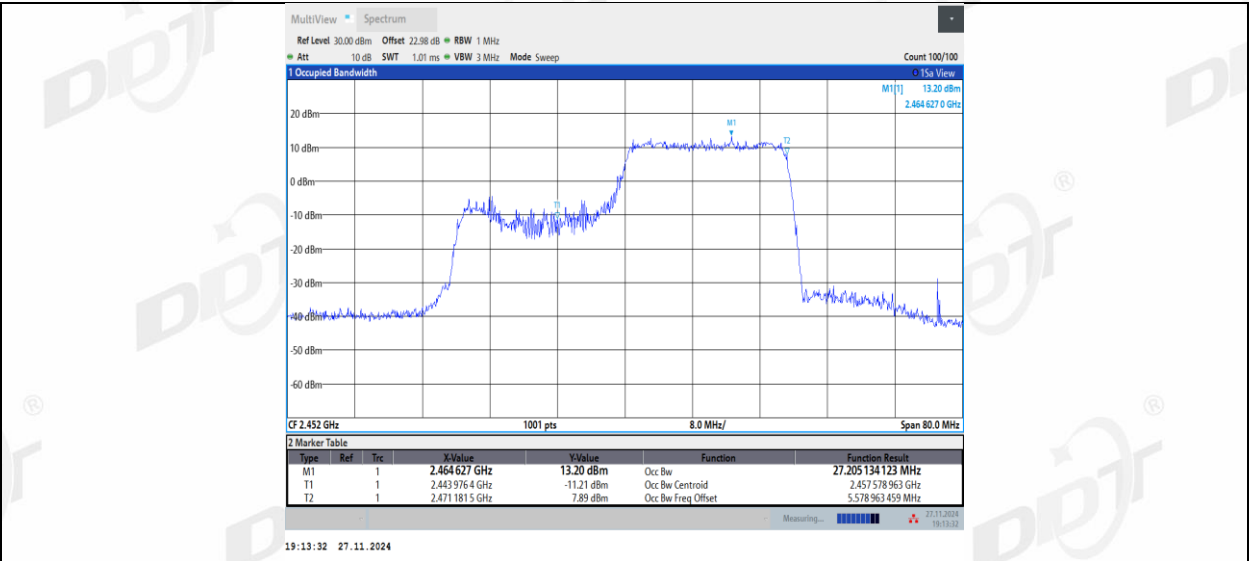

11AX40MIMO_Ant2_2452_242Tone_RU61

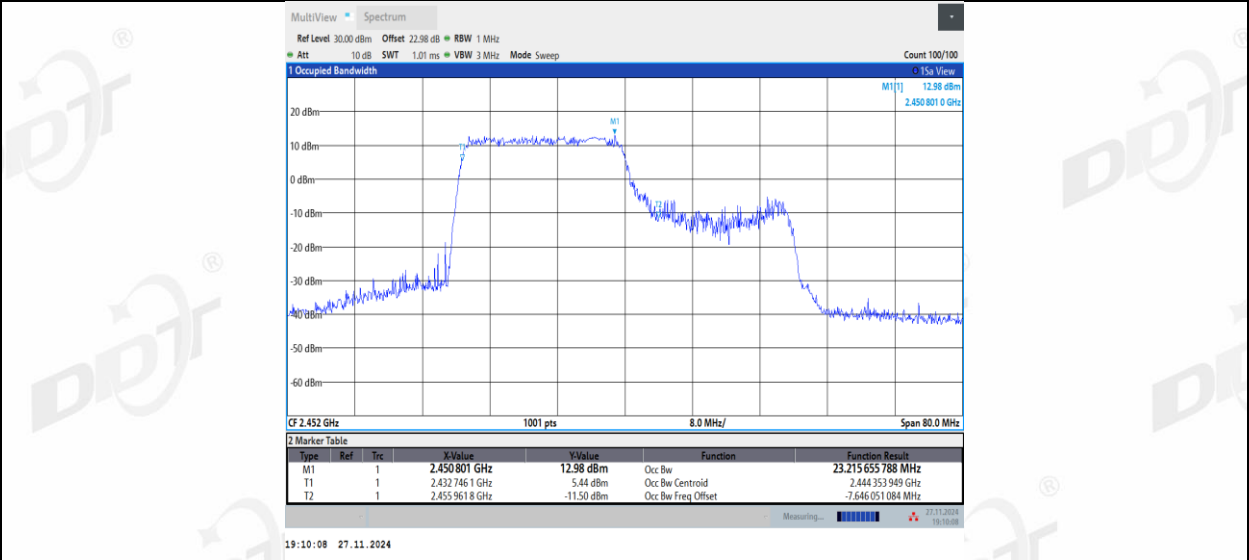


11AX40MIMO_Ant2_2452_242Tone_RU62

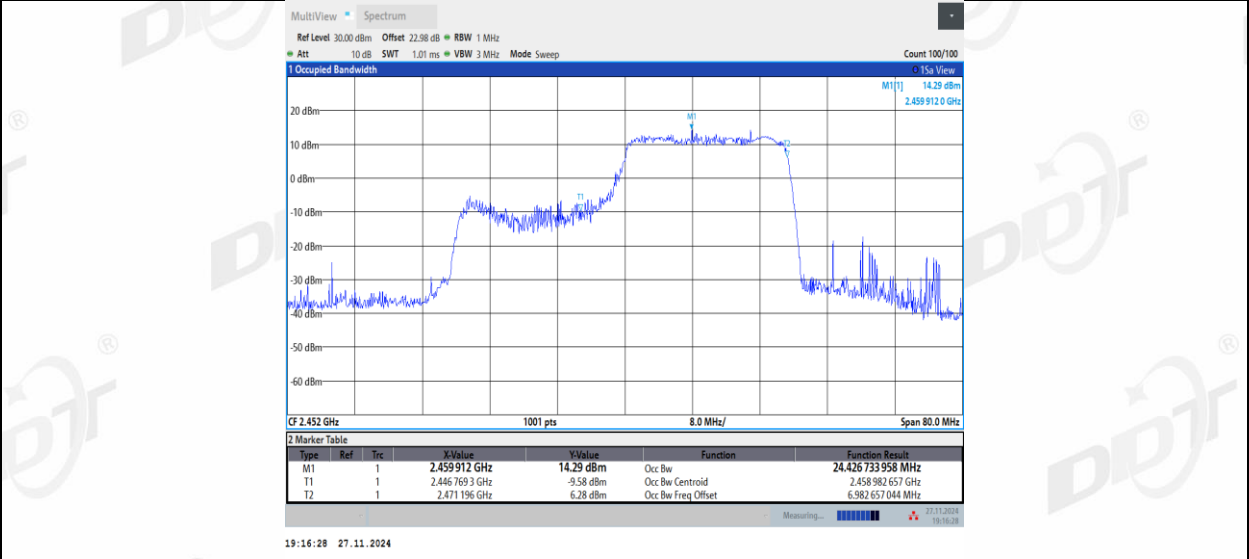

6. Conducted Output Power

6.1. Block diagram of test setup

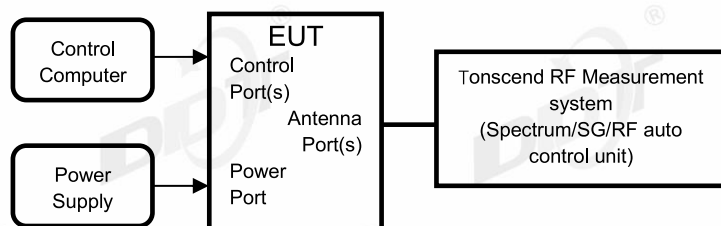

6.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.9.2.3.
- (2) Connect EUT's antenna output to RF power meter by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously, If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal.
- (4) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- (5) Adjust the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.
- (6) Record the RF average power of each antenna port.

6.4. Test result average

Test Engineer:	Zoe Peng	Test Site:	RF Measurement System 4#
Ambient Condition:	22.3-23.5℃,47.2-48.3%RH	Test Date:	2024.11.22-2025.01.06
Test Power Supply:	AC 100-240V	Sample Number:	S24111522-014

Test Mode	Ant.	Freq. [MHz]	Duty Cycle [%]	Result [dBm]	Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11B	Ant1	2412	99.64	16.88	≤30.00	19.05	≤36.00	PASS
	Ant2	2412	99.52	16.78	≤30.00	19.07	≤36.00	PASS
	Ant1	2437	99.64	16.98	≤30.00	19.15	≤36.00	PASS
	Ant2	2437	99.64	16.77	≤30.00	19.06	≤36.00	PASS
	Ant1	2462	99.64	17.00	≤30.00	19.17	≤36.00	PASS
	Ant2	2462	99.64	16.69	≤30.00	18.98	≤36.00	PASS
11G	Ant1	2412	97.18	16.03	≤30.00	18.20	≤36.00	PASS
	Ant2	2412	97.18	15.98	≤30.00	18.27	≤36.00	PASS
	Ant1	2437	97.22	15.96	≤30.00	18.13	≤36.00	PASS
	Ant2	2437	97.22	16.03	≤30.00	18.32	≤36.00	PASS
	Ant1	2462	97.18	15.59	≤30.00	17.76	≤36.00	PASS
	Ant2	2462	97.18	15.96	≤30.00	18.25	≤36.00	PASS
11N20MIM O	Ant1	2412	94.37	13.15	≤30.00	15.32	≤36.00	PASS
	Ant2	2412	94.37	13.16	≤30.00	15.45	≤36.00	PASS
	total	2412	---	16.17	≤30.00	18.40	≤36.00	PASS
	Ant1	2437	94.37	13.15	≤30.00	15.32	≤36.00	PASS
	Ant2	2437	95.71	13.23	≤30.00	15.52	≤36.00	PASS
	total	2437	---	16.20	≤30.00	18.43	≤36.00	PASS
	Ant1	2462	95.71	12.83	≤30.00	15.00	≤36.00	PASS
	Ant2	2462	94.37	13.22	≤30.00	15.51	≤36.00	PASS
11N40MIM O	total	2462	---	16.04	≤30.00	18.27	≤36.00	PASS
	Ant1	2422	92.11	9.11	≤30.00	11.28	≤36.00	PASS
	Ant2	2422	89.47	9.13	≤30.00	11.42	≤36.00	PASS
	total	2422	---	12.13	≤30.00	14.36	≤36.00	PASS
	Ant1	2437	89.47	9.16	≤30.00	11.33	≤36.00	PASS
	Ant2	2437	89.47	9.02	≤30.00	11.31	≤36.00	PASS
	total	2437	---	12.10	≤30.00	14.33	≤36.00	PASS
	Ant1	2452	89.47	9.13	≤30.00	11.30	≤36.00	PASS
11AX20MIM O	Ant2	2452	89.47	9.04	≤30.00	11.33	≤36.00	PASS
	total	2452	---	12.10	≤30.00	14.33	≤36.00	PASS
	Ant1	2412	96.23	11.41	≤30.00	13.58	≤36.00	PASS
	Ant2	2412	96.19	11.48	≤30.00	13.77	≤36.00	PASS
	total	2412	---	14.46	≤30.00	16.69	≤36.00	PASS
	Ant1	2437	96.19	11.17	≤30.00	13.34	≤36.00	PASS
	Ant2	2437	96.19	11.51	≤30.00	13.80	≤36.00	PASS
	total	2437	---	14.35	≤30.00	16.59	≤36.00	PASS
11AX40MIM O	Ant1	2462	96.19	11.25	≤30.00	13.42	≤36.00	PASS
	Ant2	2462	96.19	11.24	≤30.00	13.53	≤36.00	PASS
	total	2462	---	14.26	≤30.00	16.49	≤36.00	PASS
	Ant1	2422	92.98	8.53	≤30.00	10.70	≤36.00	PASS
	Ant2	2422	92.98	8.43	≤30.00	10.72	≤36.00	PASS
	total	2422	---	11.49	≤30.00	13.72	≤36.00	PASS
	Ant1	2437	92.98	8.47	≤30.00	10.64	≤36.00	PASS
	Ant2	2437	92.98	8.39	≤30.00	10.68	≤36.00	PASS
11AX40MIM O	total	2437	---	11.44	≤30.00	13.67	≤36.00	PASS
	Ant1	2452	92.98	8.41	≤30.00	10.58	≤36.00	PASS
	Ant2	2452	92.98	8.35	≤30.00	10.64	≤36.00	PASS
	total	2452	---	11.39	≤30.00	13.62	≤36.00	PASS


Test Mode	Ant.	Freq. [MHz]	Ru Size	Ru Index	Result [dBm]	Conducted Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11AX20 MIMO	Ant1	2412	26Tone	RU0	8.14	≤30.00	10.31	≤36.00	PASS
				RU4	8.58	≤30.00	10.75	≤36.00	PASS
				RU8	8.25	≤30.00	10.42	≤36.00	PASS
			52Tone	RU37	8.77	≤30.00	10.94	≤36.00	PASS
				RU39	8.83	≤30.00	11.00	≤36.00	PASS
				RU40	8.59	≤30.00	10.76	≤36.00	PASS
			106Tone	RU53	9.42	≤30.00	11.59	≤36.00	PASS
				RU54	9.11	≤30.00	11.28	≤36.00	PASS
	Ant2	2412	26Tone	RU0	7.97	≤30.00	10.26	≤36.00	PASS
				RU4	8.18	≤30.00	10.47	≤36.00	PASS
				RU8	8.16	≤30.00	10.45	≤36.00	PASS
			52Tone	RU37	8.37	≤30.00	10.66	≤36.00	PASS
				RU39	8.73	≤30.00	11.02	≤36.00	PASS
				RU40	8.66	≤30.00	10.95	≤36.00	PASS
			106Tone	RU53	8.89	≤30.00	11.18	≤36.00	PASS
				RU54	9.02	≤30.00	11.31	≤36.00	PASS
	total	2412	26Tone	RU0	11.07	≤30.00	13.30	≤36.00	PASS
				RU4	11.39	≤30.00	13.62	≤36.00	PASS
				RU8	11.22	≤30.00	13.45	≤36.00	PASS
			52Tone	RU37	11.58	≤30.00	13.81	≤36.00	PASS
				RU39	11.79	≤30.00	14.02	≤36.00	PASS
				RU40	11.64	≤30.00	13.87	≤36.00	PASS
			106Tone	RU53	12.17	≤30.00	14.40	≤36.00	PASS
				RU54	12.08	≤30.00	14.31	≤36.00	PASS
	Ant1	2437	26Tone	RU0	8.14	≤30.00	10.31	≤36.00	PASS
				RU4	8.28	≤30.00	10.45	≤36.00	PASS
				RU8	7.95	≤30.00	10.12	≤36.00	PASS
			52Tone	RU37	8.44	≤30.00	10.61	≤36.00	PASS
				RU39	8.65	≤30.00	10.82	≤36.00	PASS
				RU40	8.42	≤30.00	10.59	≤36.00	PASS
			106Tone	RU53	8.72	≤30.00	10.89	≤36.00	PASS
				RU54	8.85	≤30.00	11.02	≤36.00	PASS
	Ant2	2437	26Tone	RU0	7.93	≤30.00	10.22	≤36.00	PASS
				RU4	8.14	≤30.00	10.43	≤36.00	PASS
				RU8	7.90	≤30.00	10.19	≤36.00	PASS
			52Tone	RU37	8.34	≤30.00	10.63	≤36.00	PASS
				RU39	8.56	≤30.00	10.85	≤36.00	PASS
				RU40	8.21	≤30.00	10.50	≤36.00	PASS
			106Tone	RU53	8.65	≤30.00	10.94	≤36.00	PASS
				RU54	8.61	≤30.00	10.90	≤36.00	PASS
	total	2437	26Tone	RU0	11.05	≤30.00	13.28	≤36.00	PASS
				RU4	11.22	≤30.00	13.45	≤36.00	PASS
				RU8	10.94	≤30.00	13.17	≤36.00	PASS
			52Tone	RU37	11.40	≤30.00	13.63	≤36.00	PASS
				RU39	11.62	≤30.00	13.85	≤36.00	PASS
				RU40	11.33	≤30.00	13.56	≤36.00	PASS
			106Tone	RU53	11.70	≤30.00	13.93	≤36.00	PASS
				RU54	11.74	≤30.00	13.97	≤36.00	PASS
	Ant1	2462	26Tone	RU0	7.96	≤30.00	10.13	≤36.00	PASS
				RU4	7.95	≤30.00	10.12	≤36.00	PASS
				RU8	7.72	≤30.00	9.89	≤36.00	PASS
			52Tone	RU37	8.06	≤30.00	10.23	≤36.00	PASS
				RU39	8.20	≤30.00	10.37	≤36.00	PASS
				RU40	8.15	≤30.00	10.32	≤36.00	PASS
			106Tone	RU53	8.68	≤30.00	10.85	≤36.00	PASS
				RU54	8.44	≤30.00	10.61	≤36.00	PASS
	Ant2	2462	26Tone	RU0	7.90	≤30.00	10.19	≤36.00	PASS
				RU4	7.83	≤30.00	10.12	≤36.00	PASS
				RU8	7.84	≤30.00	10.13	≤36.00	PASS
			52Tone	RU37	8.15	≤30.00	10.44	≤36.00	PASS

			106Tone	RU39	8.41	≤30.00	10.70	≤36.00	PASS
				RU40	8.24	≤30.00	10.53	≤36.00	PASS
				RU53	8.39	≤30.00	10.68	≤36.00	PASS
				RU54	8.46	≤30.00	10.75	≤36.00	PASS
	total	2462	26Tone	RU0	10.94	≤30.00	13.17	≤36.00	PASS
				RU4	10.90	≤30.00	13.13	≤36.00	PASS
				RU8	10.79	≤30.00	13.02	≤36.00	PASS
		52Tone		RU37	11.12	≤30.00	13.35	≤36.00	PASS
				RU39	11.32	≤30.00	13.55	≤36.00	PASS
				RU40	11.21	≤30.00	13.44	≤36.00	PASS
		106Tone		RU53	11.55	≤30.00	13.78	≤36.00	PASS
				RU54	11.46	≤30.00	13.69	≤36.00	PASS
11AX40 MIMO	Ant1	2422	242Tone	RU61	10.70	≤30.00	12.87	≤36.00	PASS
				RU62	10.38	≤30.00	12.55	≤36.00	PASS
	Ant2	2422	242Tone	RU61	10.82	≤30.00	12.67	≤36.00	PASS
				RU62	10.71	≤30.00	13.11	≤36.00	PASS
	total	2422	242Tone	RU61	13.77	≤30.00	15.78	≤36.00	PASS
				RU62	13.56	≤30.00	15.85	≤36.00	PASS
	Ant1	2437	242Tone	RU61	10.09	≤30.00	12.26	≤36.00	PASS
				RU62	10.49	≤30.00	12.66	≤36.00	PASS
	Ant2	2437	242Tone	RU61	10.95	≤30.00	12.78	≤36.00	PASS
				RU62	10.67	≤30.00	13.24	≤36.00	PASS
	total	2437	242Tone	RU61	13.55	≤30.00	15.54	≤36.00	PASS
				RU62	13.59	≤30.00	15.97	≤36.00	PASS
	Ant1	2452	242Tone	RU61	10.28	≤30.00	12.45	≤36.00	PASS
				RU62	10.73	≤30.00	12.90	≤36.00	PASS
	Ant2	2452	242Tone	RU61	10.23	≤30.00	13.02	≤36.00	PASS
				RU62	10.14	≤30.00	12.52	≤36.00	PASS
	total	2452	242Tone	RU61	13.27	≤30.00	15.75	≤36.00	PASS
				RU62	13.46	≤30.00	15.72	≤36.00	PASS

Note: EIRP (dBm)=Conducted Output Power (dBm)+ Antenna Gain (dBi)

7. Power Spectral Density

7.1. Block diagram of test setup

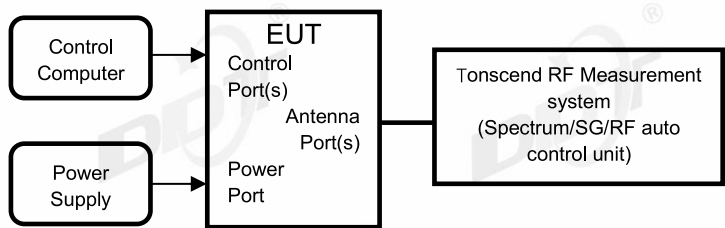

7.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.10.5.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for Power Spectral Density measurement:

Center frequency	DTS Channel center frequency
RBW:	$3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	RMS
Sweep time:	auto
Trace mode	max hold
	Employ trace averaging (rms)
Trace	mode over a minimum of 100 traces.

(5) Add $[10 \log (1 / D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time.
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.4. Test result

Test Engineer:	Zoe Peng	Test Site:	RF Measurement System 4#
Ambient Condition:	22.3-23.5℃,47.2-48.3%RH	Test Date:	2024.11.22-2025.01.06
Test Power Supply:	AC 100-240V	Sample Number:	S24111522-014


Test Mode	Antenna	Frequency [MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-10.90	≤8.00	PASS
	Ant2	2412	-11.76	≤8.00	PASS
	Ant1	2437	-12.34	≤8.00	PASS
	Ant2	2437	-11.81	≤8.00	PASS
	Ant1	2462	-12.71	≤8.00	PASS
	Ant2	2462	-10.17	≤8.00	PASS
11G	Ant1	2412	-16.14	≤8.00	PASS
	Ant2	2412	-15.59	≤8.00	PASS
	Ant1	2437	-16.27	≤8.00	PASS
	Ant2	2437	-15.36	≤8.00	PASS
	Ant1	2462	-16.06	≤8.00	PASS
	Ant2	2462	-15.79	≤8.00	PASS
11N20MIMO	Ant1	2412	-19.58	≤8.00	PASS
	Ant2	2412	-19.58	≤8.00	PASS
	total	2412	-16.57	≤8.00	PASS
	Ant1	2437	-19.98	≤8.00	PASS
	Ant2	2437	-19.45	≤8.00	PASS
	total	2437	-16.70	≤8.00	PASS
	Ant1	2462	-19.91	≤8.00	PASS
	Ant2	2462	-19.46	≤8.00	PASS
11N40MIMO	total	2462	-16.67	≤8.00	PASS
	Ant1	2422	-24.79	≤8.00	PASS
	Ant2	2422	-24.80	≤8.00	PASS
	total	2422	-21.78	≤8.00	PASS
	Ant1	2437	-24.19	≤8.00	PASS
	Ant2	2437	-24.56	≤8.00	PASS
	total	2437	-21.36	≤8.00	PASS
	Ant1	2452	-27.09	≤8.00	PASS
11AX20MIMO	Ant2	2452	-25.10	≤8.00	PASS
	total	2452	-22.97	≤8.00	PASS
	Ant1	2412	-21.59	≤8.00	PASS
	Ant2	2412	-21.96	≤8.00	PASS
	total	2412	-18.76	≤8.00	PASS
	Ant1	2437	-21.13	≤8.00	PASS
	Ant2	2437	-21.04	≤8.00	PASS
	total	2437	-18.07	≤8.00	PASS
11AX40MIMO	Ant1	2462	-21.47	≤8.00	PASS
	Ant2	2462	-21.20	≤8.00	PASS
	total	2462	-18.32	≤8.00	PASS
	Ant1	2422	-27.64	≤8.00	PASS
	Ant2	2422	-26.81	≤8.00	PASS
	total	2422	-24.19	≤8.00	PASS
	Ant1	2437	-27.33	≤8.00	PASS
	Ant2	2437	-26.79	≤8.00	PASS
11AX40MIMO	total	2437	-24.04	≤8.00	PASS
	Ant1	2452	-27.46	≤8.00	PASS
	Ant2	2452	-26.60	≤8.00	PASS
	total	2452	-24.00	≤8.00	PASS


Test Mode	Ant.	Freq. [MHz]	Ru Size	Ru Index	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11AX20 MIMO	Ant1	2412	26Tone	RU0	-14.81	≤8.00	PASS
				RU4	-14.90	≤8.00	PASS
				RU8	-15.98	≤8.00	PASS
			52Tone	RU37	-16.68	≤8.00	PASS
				RU39	-18.94	≤8.00	PASS
				RU40	-15.67	≤8.00	PASS
			106Tone	RU53	-16.69	≤8.00	PASS
				RU54	-19.21	≤8.00	PASS
	Ant2	2412	26Tone	RU0	-15.05	≤8.00	PASS
				RU4	-14.37	≤8.00	PASS
				RU8	-14.53	≤8.00	PASS
			52Tone	RU37	-16.86	≤8.00	PASS
				RU39	-17.45	≤8.00	PASS
				RU40	-17.07	≤8.00	PASS
			106Tone	RU53	-17.79	≤8.00	PASS
				RU54	-18.17	≤8.00	PASS
	total	2412	26Tone	RU0	-11.92	≤8.00	PASS
				RU4	-11.62	≤8.00	PASS
				RU8	-12.18	≤8.00	PASS
			52Tone	RU37	-13.76	≤8.00	PASS
				RU39	-15.12	≤8.00	PASS
				RU40	-13.30	≤8.00	PASS
			106Tone	RU53	-14.19	≤8.00	PASS
				RU54	-15.65	≤8.00	PASS
	Ant1	2437	26Tone	RU0	-14.42	≤8.00	PASS
				RU4	-13.93	≤8.00	PASS
				RU8	-13.98	≤8.00	PASS
			52Tone	RU37	-17.25	≤8.00	PASS
				RU39	-17.71	≤8.00	PASS
				RU40	-16.12	≤8.00	PASS
			106Tone	RU53	-18.94	≤8.00	PASS
				RU54	-18.38	≤8.00	PASS
	Ant2	2437	26Tone	RU0	-7.65	≤8.00	PASS
				RU4	-14.78	≤8.00	PASS
				RU8	-14.73	≤8.00	PASS
			52Tone	RU37	-16.60	≤8.00	PASS
				RU39	-16.74	≤8.00	PASS
				RU40	-17.06	≤8.00	PASS
			106Tone	RU53	-18.30	≤8.00	PASS
				RU54	-18.65	≤8.00	PASS
	total	2437	26Tone	RU0	-4.72	≤8.00	PASS
				RU4	-11.32	≤8.00	PASS
				RU8	-11.33	≤8.00	PASS
			52Tone	RU37	-13.90	≤8.00	PASS
				RU39	-14.19	≤8.00	PASS
				RU40	-13.55	≤8.00	PASS
			106Tone	RU53	-15.60	≤8.00	PASS
				RU54	-15.50	≤8.00	PASS
	Ant1	2462	26Tone	RU0	-14.45	≤8.00	PASS
				RU4	-15.06	≤8.00	PASS
				RU8	-14.79	≤8.00	PASS
			52Tone	RU37	-17.71	≤8.00	PASS
				RU39	-20.22	≤8.00	PASS
				RU40	-16.67	≤8.00	PASS
			106Tone	RU53	-19.49	≤8.00	PASS
				RU54	-21.85	≤8.00	PASS
	Ant2	2462	26Tone	RU0	-14.87	≤8.00	PASS
				RU4	-14.40	≤8.00	PASS
				RU8	-14.05	≤8.00	PASS
			52Tone	RU37	-16.57	≤8.00	PASS
				RU39	-17.49	≤8.00	PASS

			106Tone	RU40	-15.51	≤8.00	PASS
				RU53	-18.89	≤8.00	PASS
				RU54	-19.78	≤8.00	PASS
	total	2462	26Tone	RU0	-11.64	≤8.00	PASS
				RU4	-11.71	≤8.00	PASS
				RU8	-11.39	≤8.00	PASS
			52Tone	RU37	-14.09	≤8.00	PASS
				RU39	-15.63	≤8.00	PASS
				RU40	-13.04	≤8.00	PASS
			106Tone	RU53	-16.17	≤8.00	PASS
				RU54	-17.68	≤8.00	PASS
				RU61	-19.27	≤8.00	PASS
11AX40 MIMO	Ant1	2422	242Tone	RU62	-18.92	≤8.00	PASS
				RU61	-18.32	≤8.00	PASS
	Ant2	2422	242Tone	RU62	-18.38	≤8.00	PASS
				RU61	-15.76	≤8.00	PASS
	total	2422	242Tone	RU62	-15.63	≤8.00	PASS
				RU61	-19.05	≤8.00	PASS
	Ant1	2437	242Tone	RU62	-20.57	≤8.00	PASS
				RU61	-16.68	≤8.00	PASS
	Ant2	2437	242Tone	RU62	-17.78	≤8.00	PASS
				RU61	-14.69	≤8.00	PASS
	total	2437	242Tone	RU62	-15.94	≤8.00	PASS
				RU61	-18.92	≤8.00	PASS
	Ant1	2452	242Tone	RU62	-18.62	≤8.00	PASS
				RU61	-18.84	≤8.00	PASS
	Ant2	2452	242Tone	RU62	-18.53	≤8.00	PASS
				RU61	-15.87	≤8.00	PASS
	total	2452	242Tone	RU62	-15.56	≤8.00	PASS
				RU61	-15.56	≤8.00	PASS


Note: The Duty Cycle Factor is compensated in the graph.

7.5. Test graphs

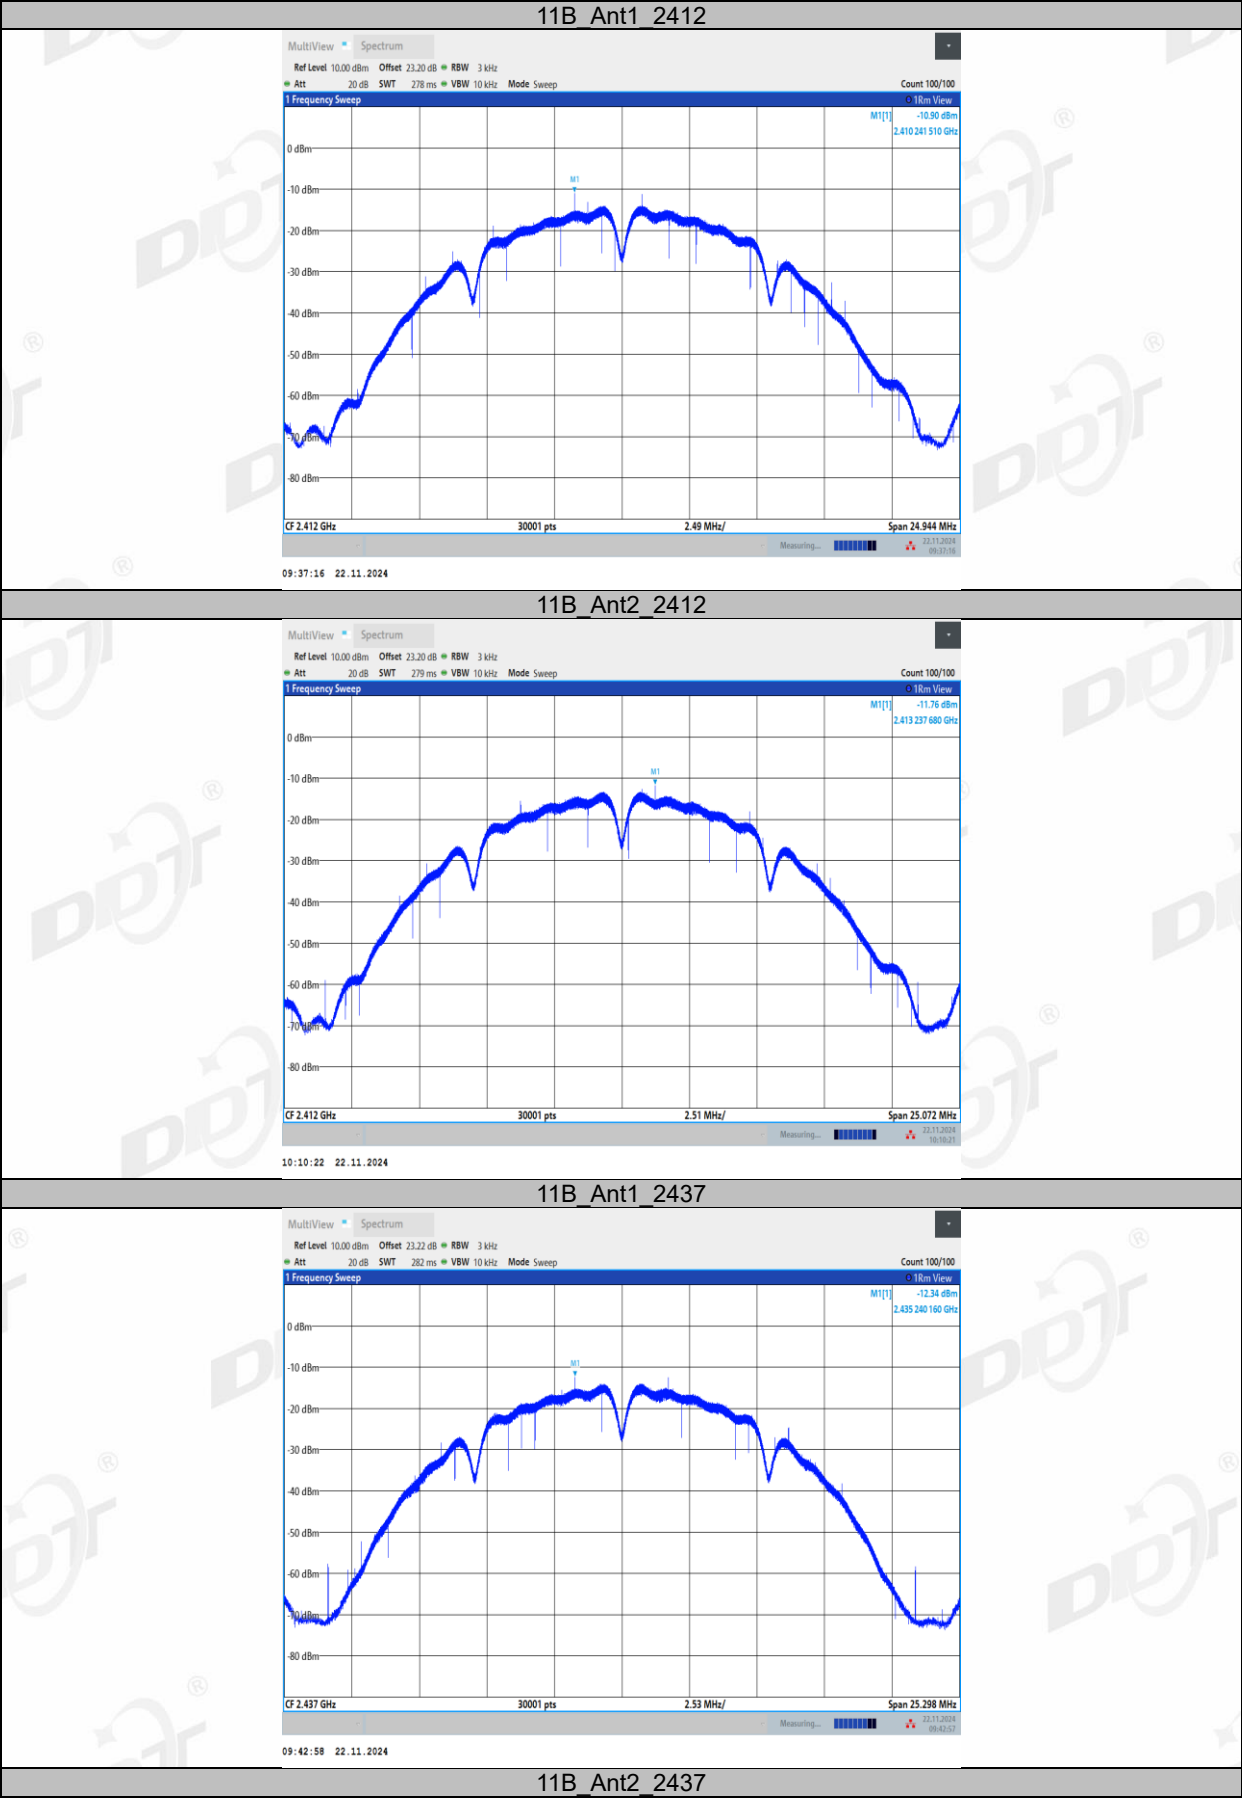


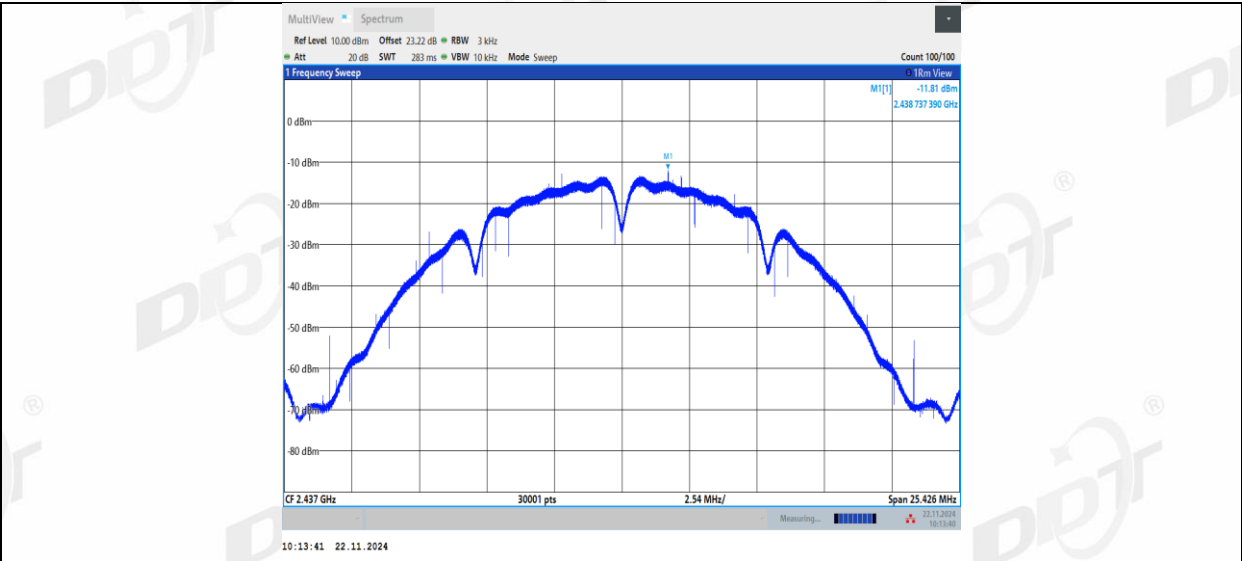


11B_Ant1_2462

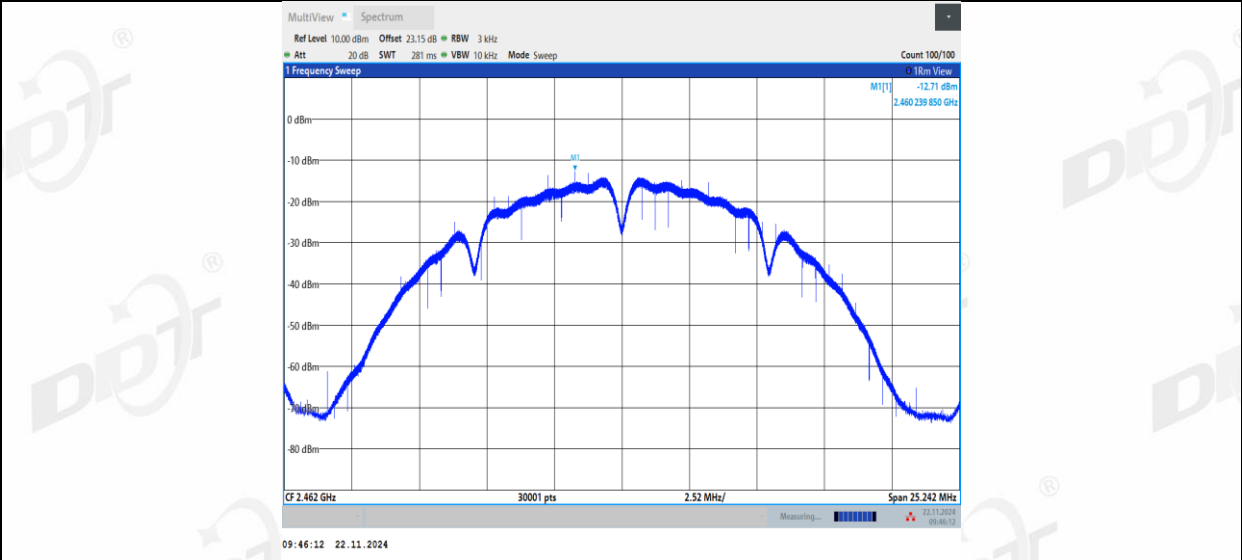


11B_Ant2_2462

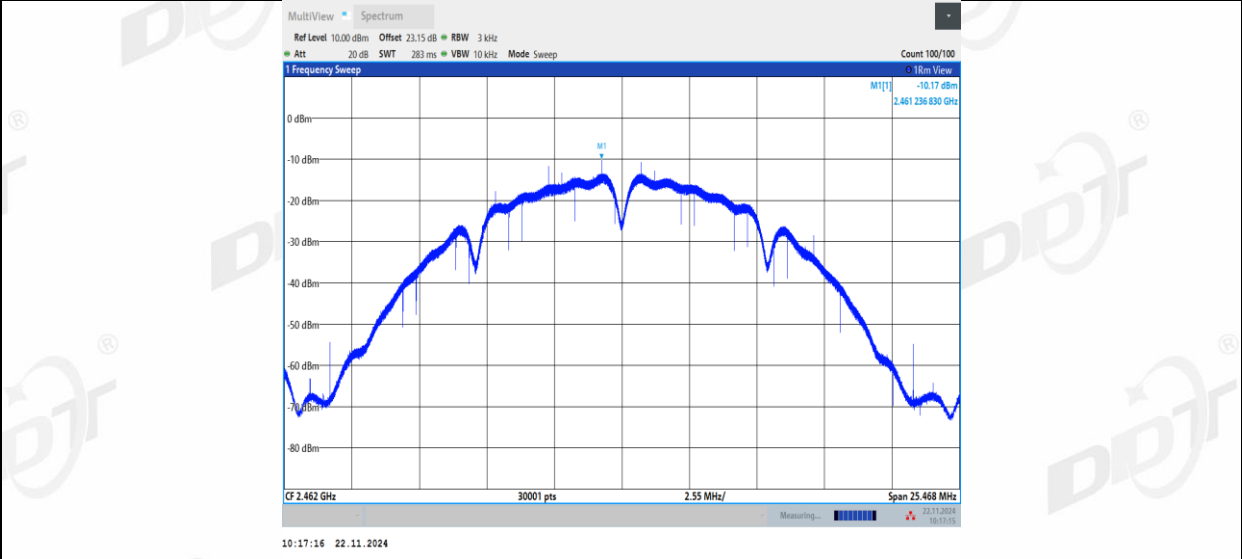


11G_Ant1_2412

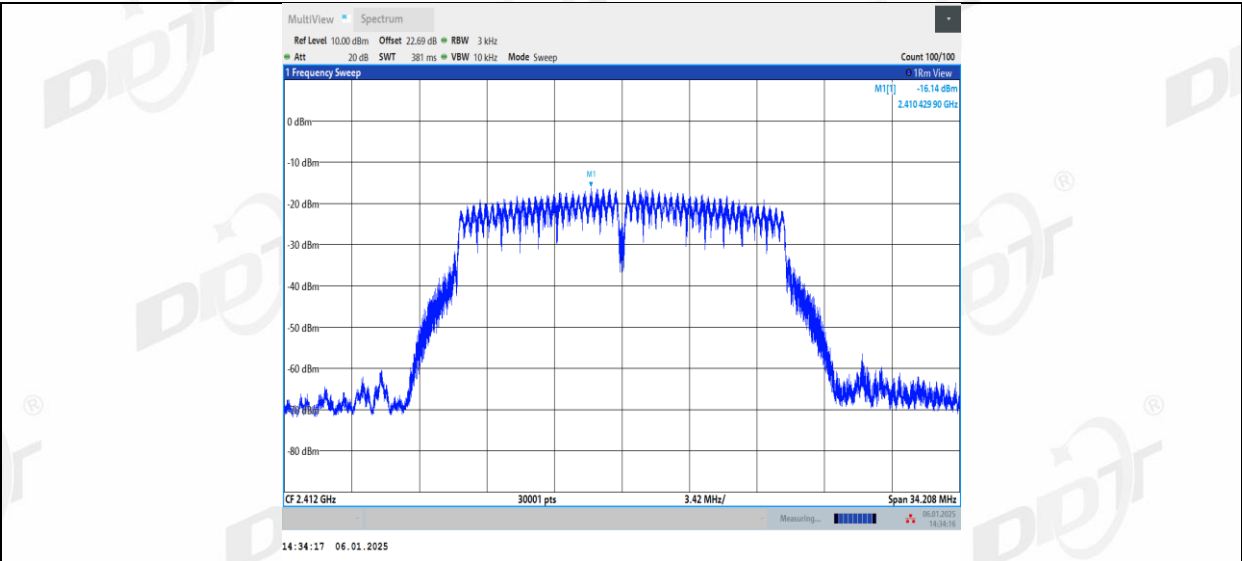


11G_Ant2_2412

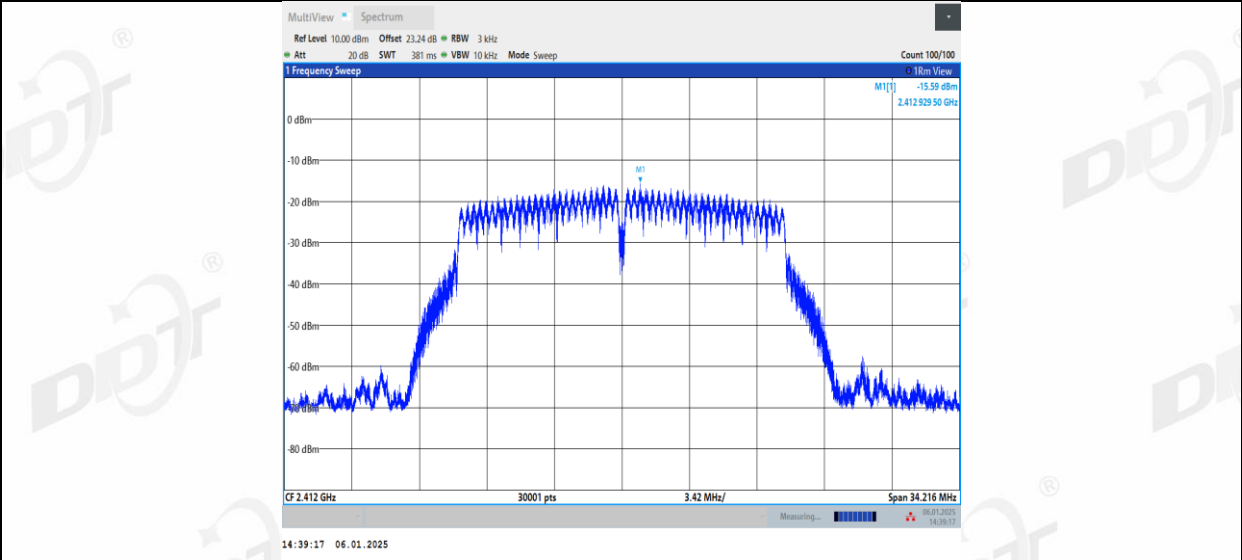


11G_Ant1_2437

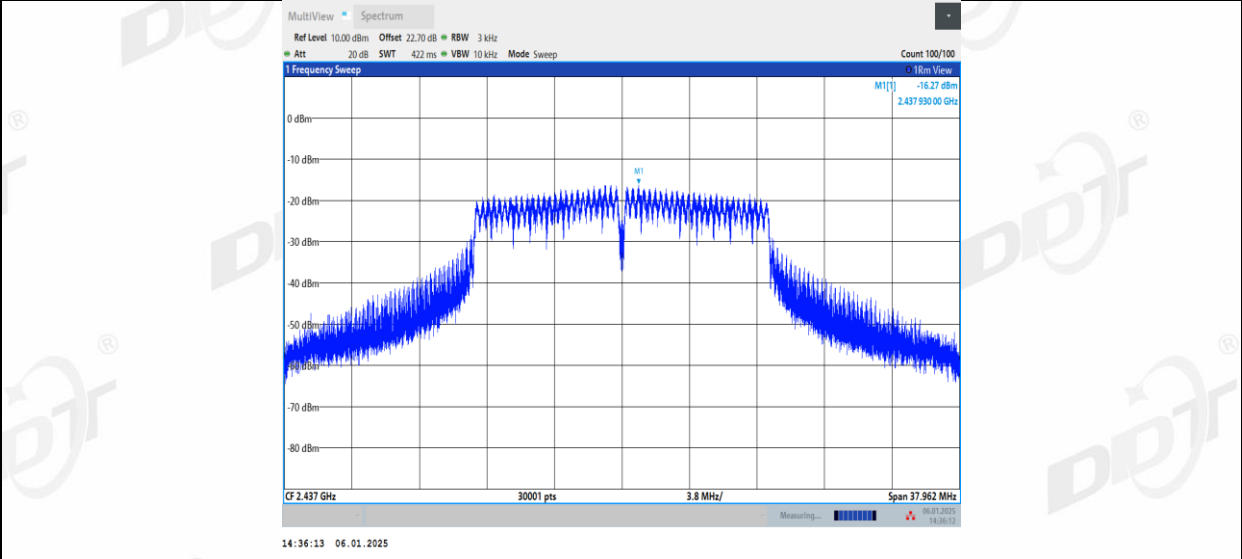


11G_Ant2_2437

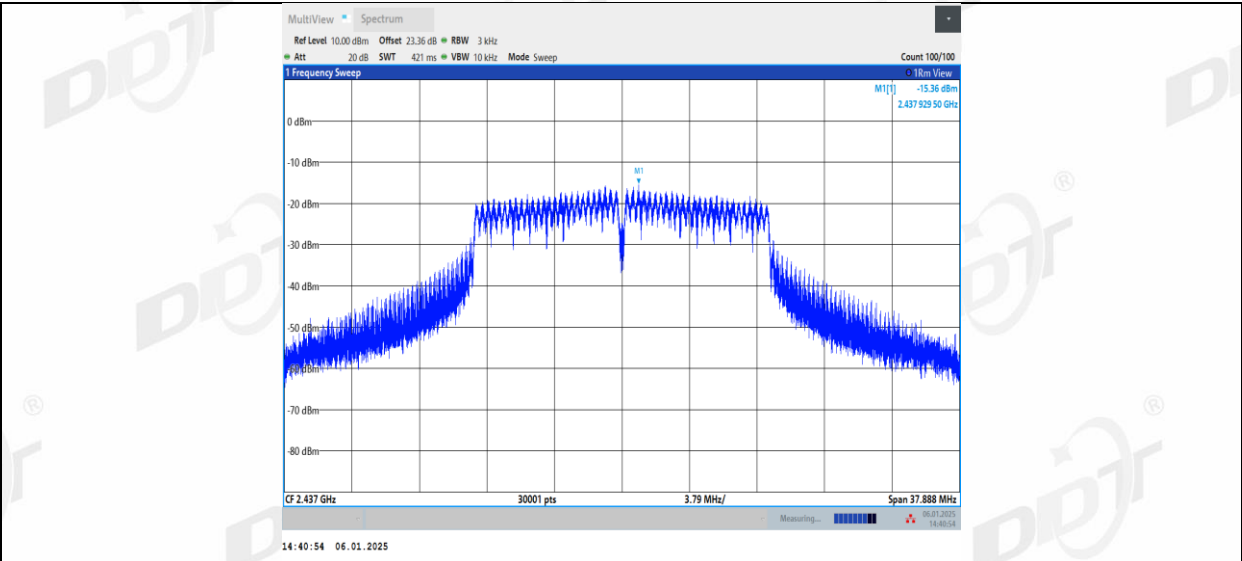


11G_Ant1_2462

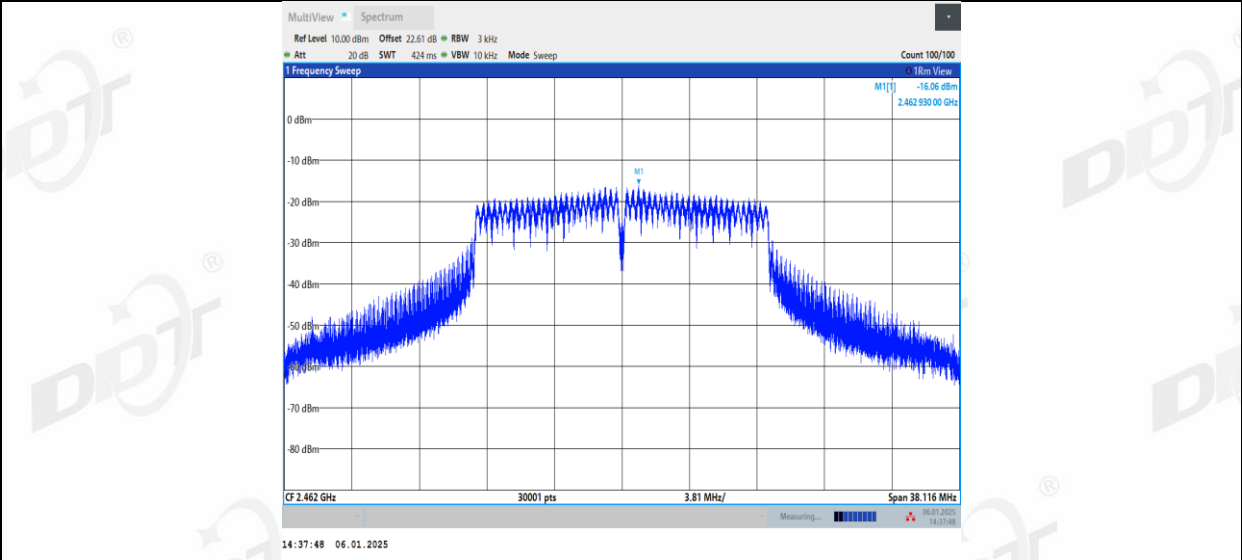


11G_Ant2_2462

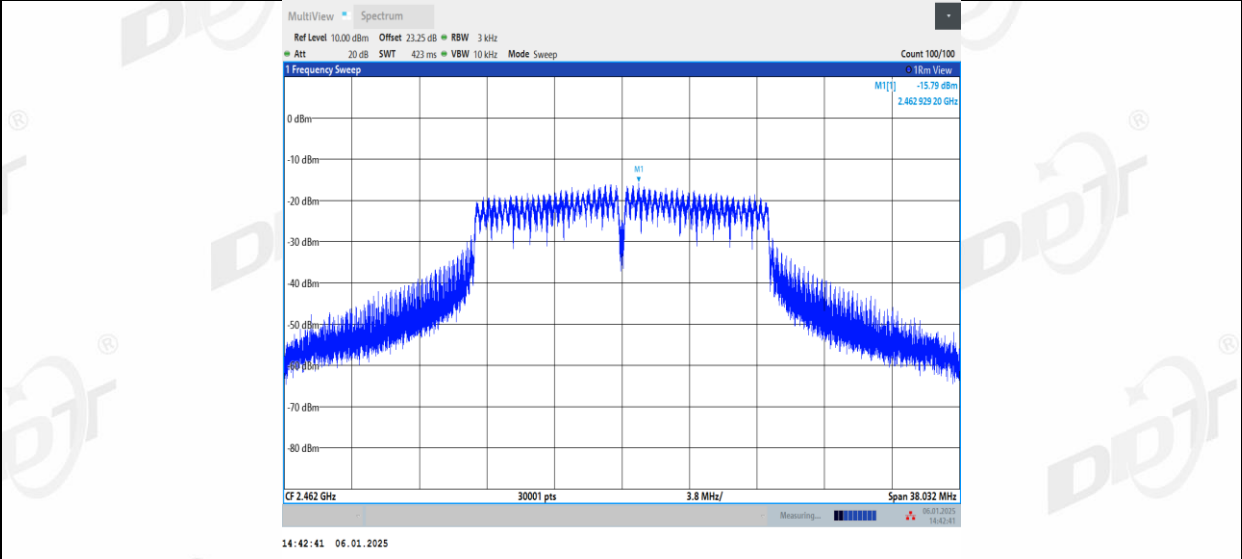


11N20MIMO_Ant1_2412

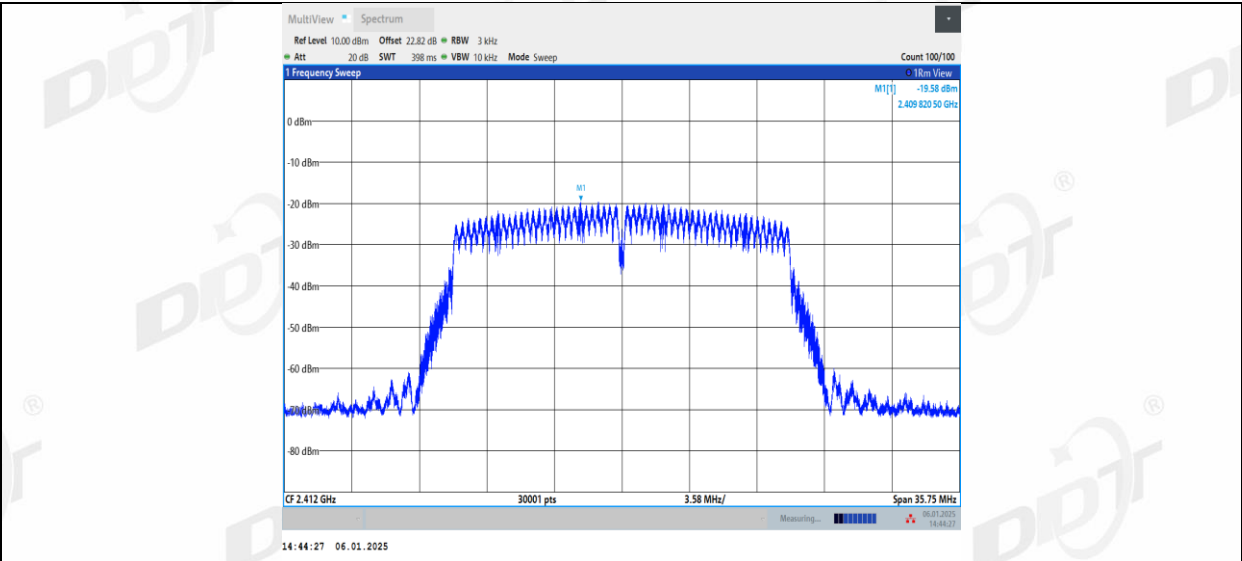


11N20MIMO_Ant2_2412

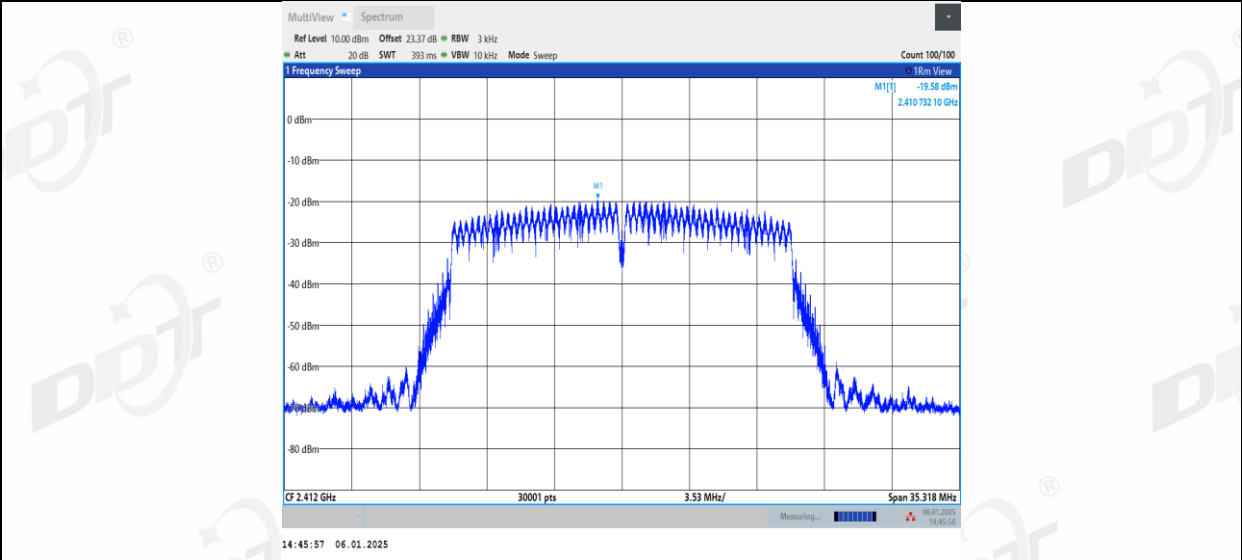


11N20MIMO_Ant1_2437

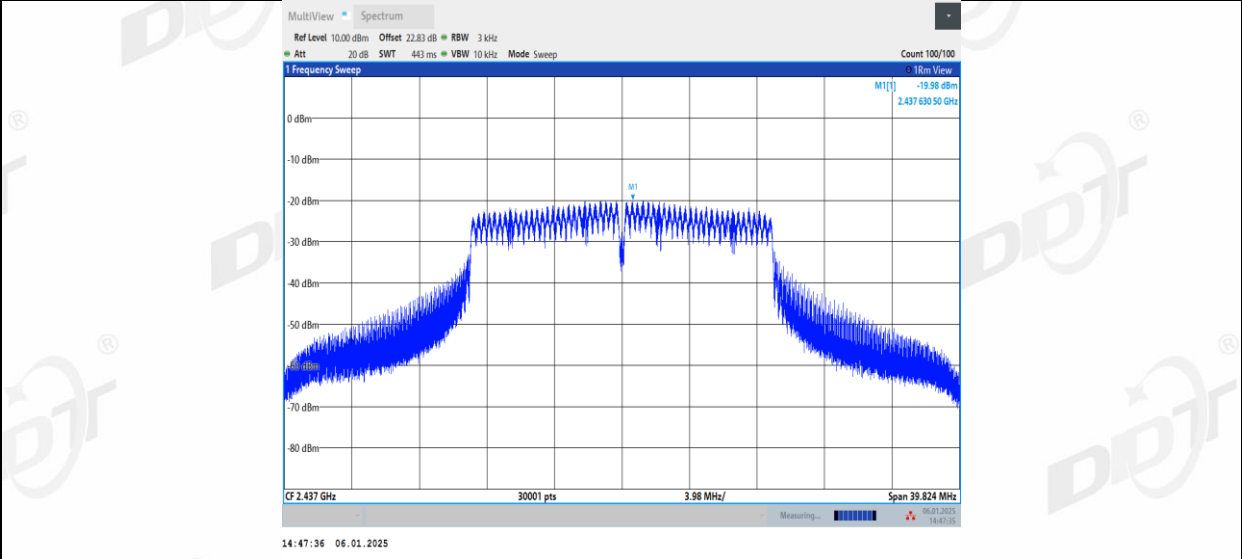


11N20MIMO_Ant2_2437

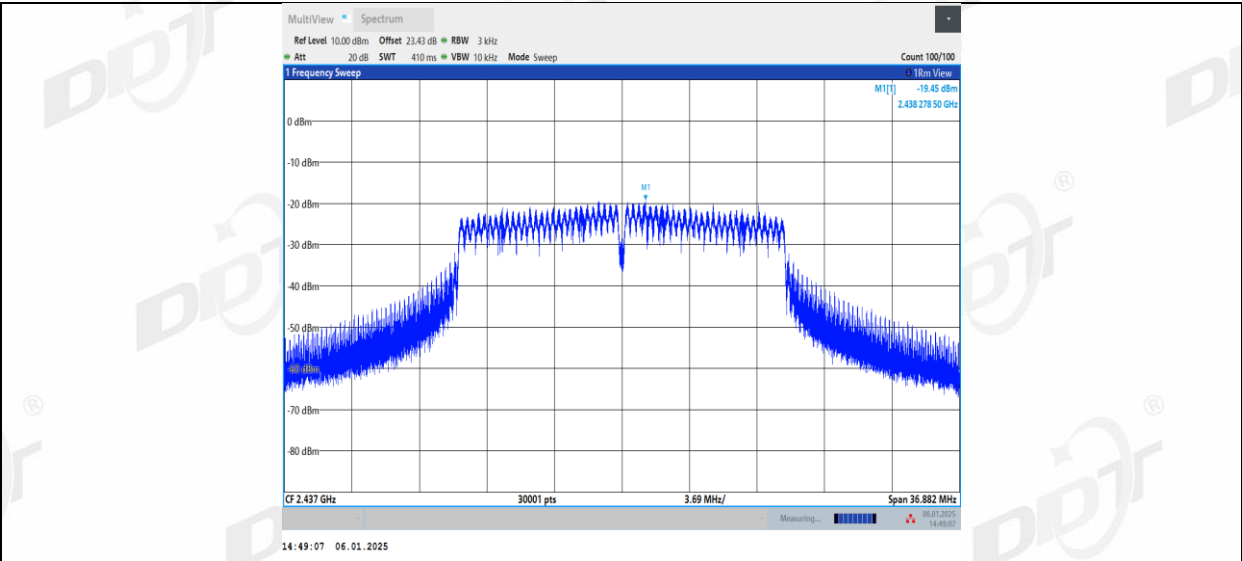


11N20MIMO_Ant1_2462

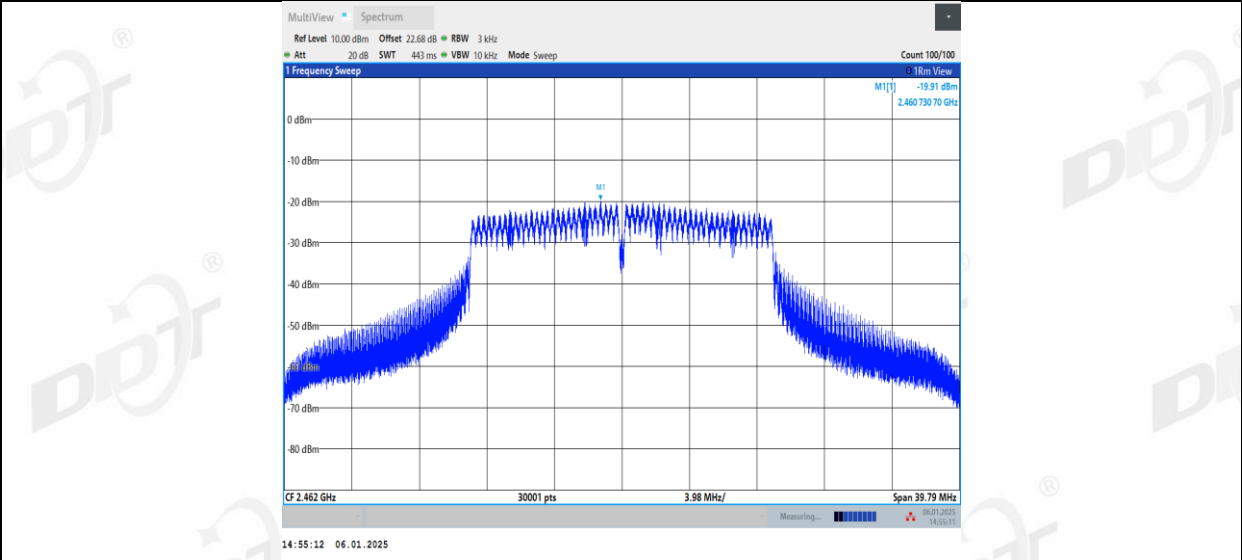


11N20MIMO_Ant2_2462

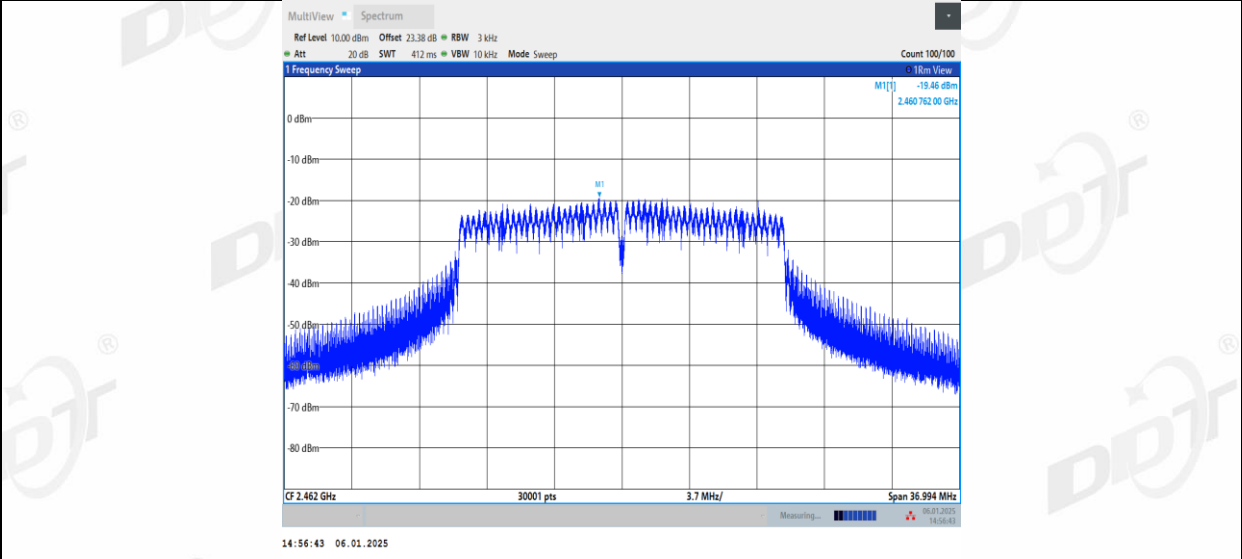


11N40MIMO_Ant1_2422

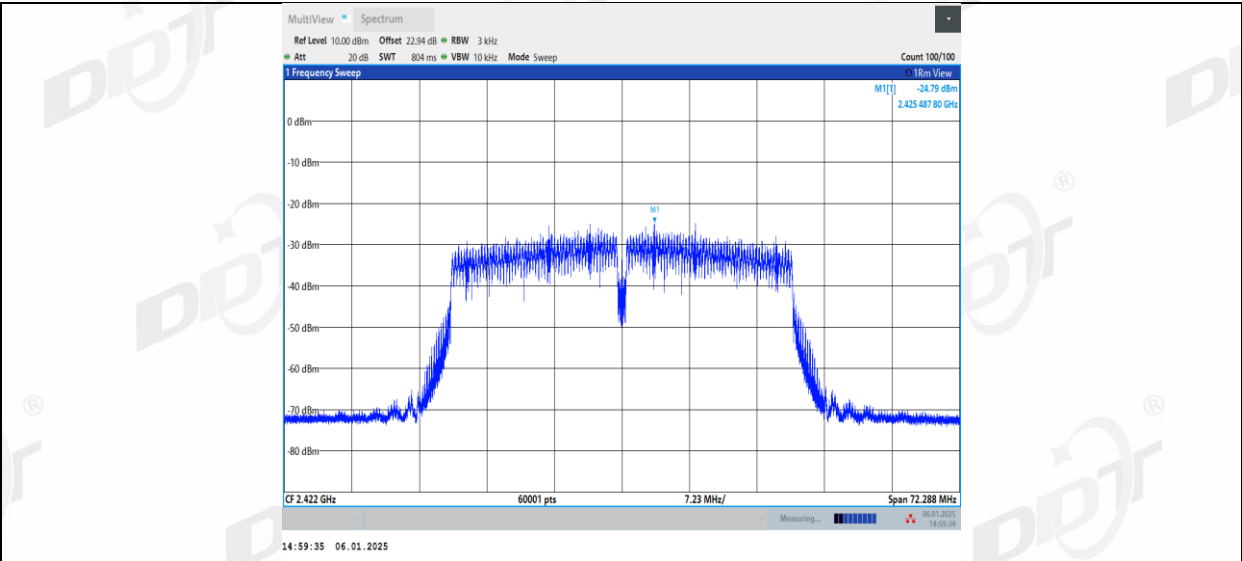


11N40MIMO_Ant2_2422

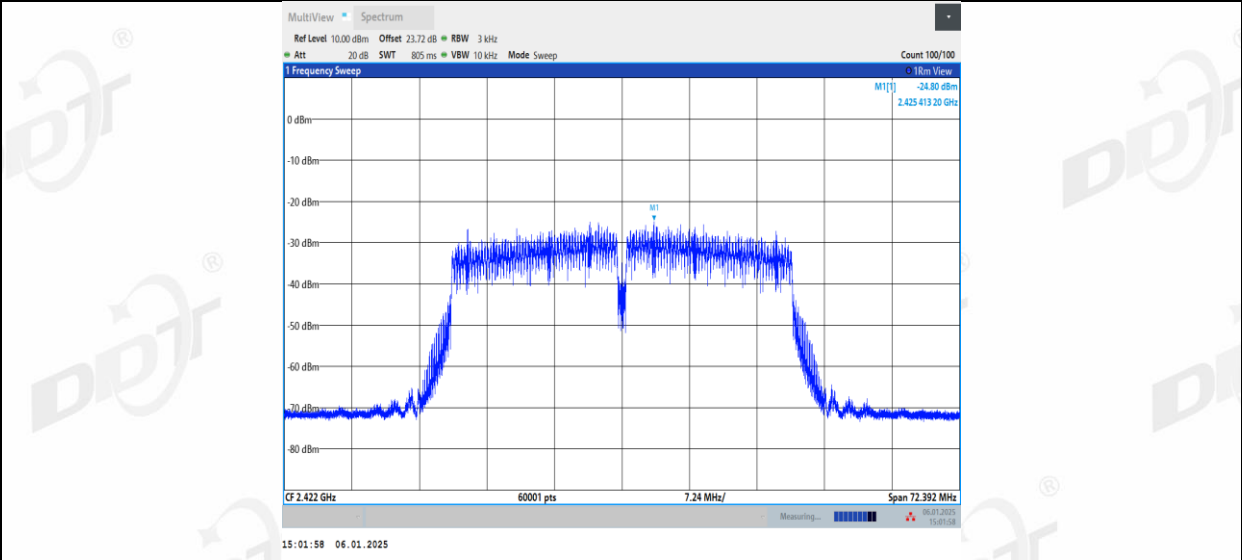


11N40MIMO_Ant1_2437

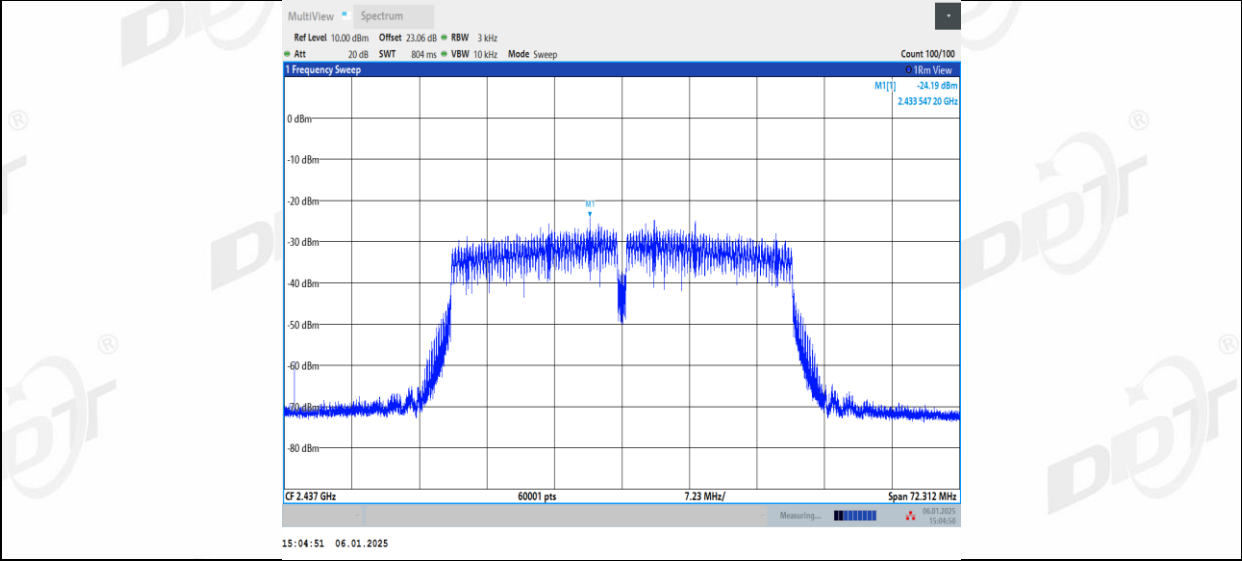


11N40MIMO_Ant2_2437

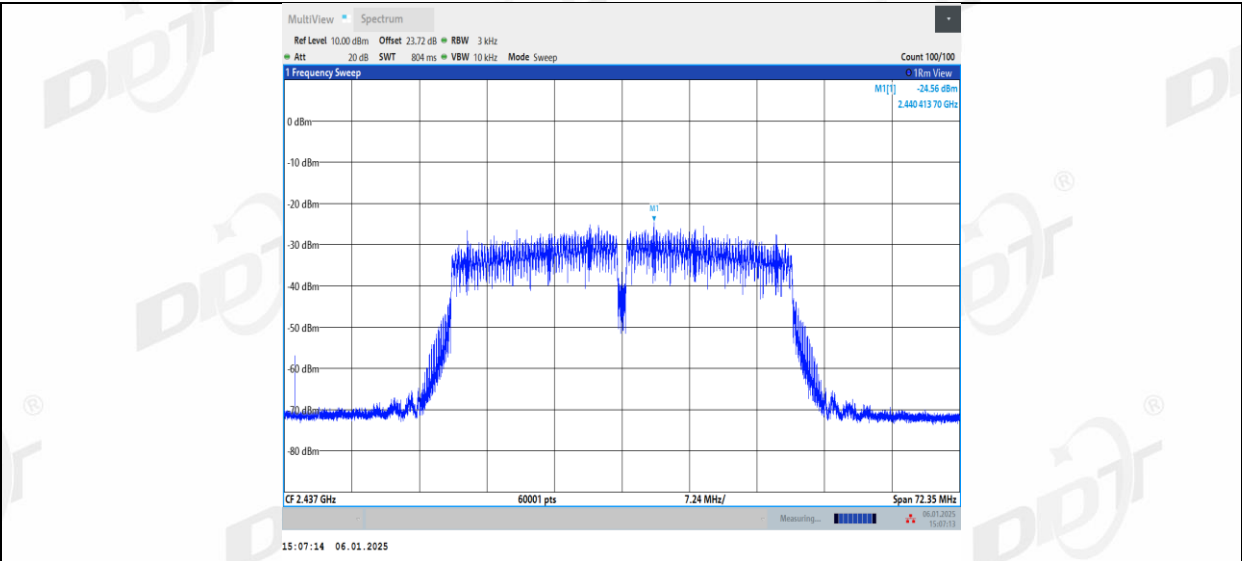


11N40MIMO_Ant1_2452

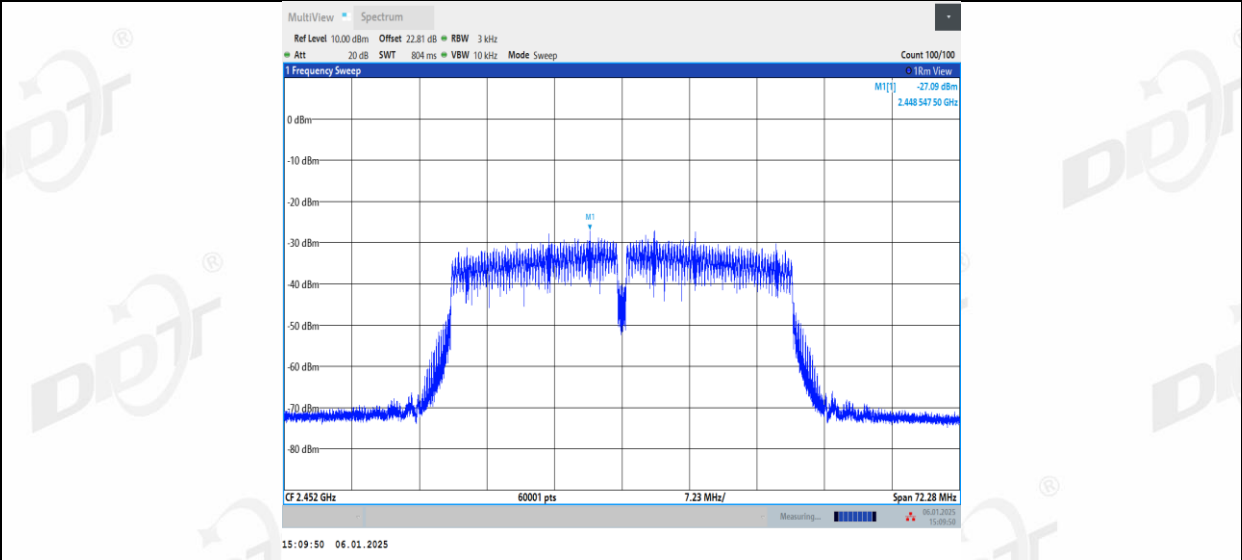


11N40MIMO_Ant2_2452

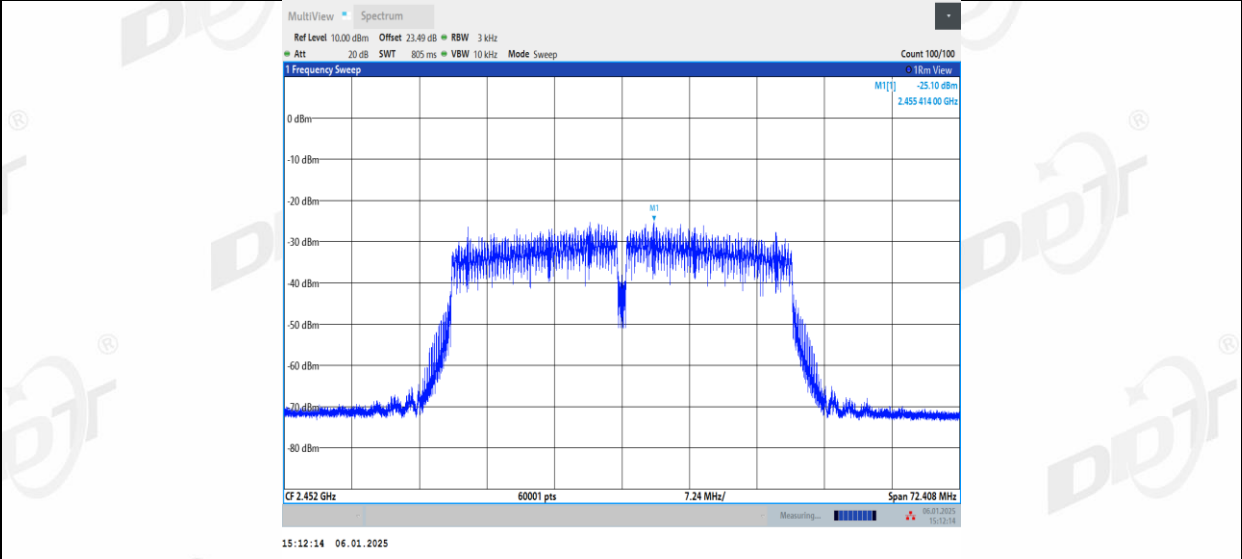


11AX20MIMO_Ant1_2412

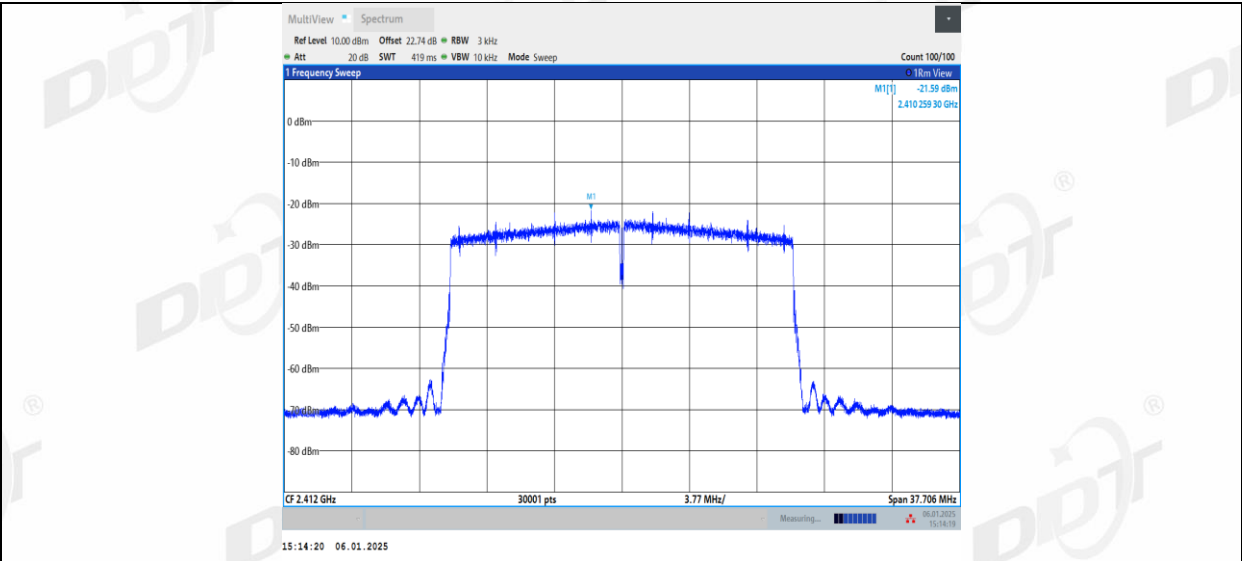


11AX20MIMO_Ant2_2412

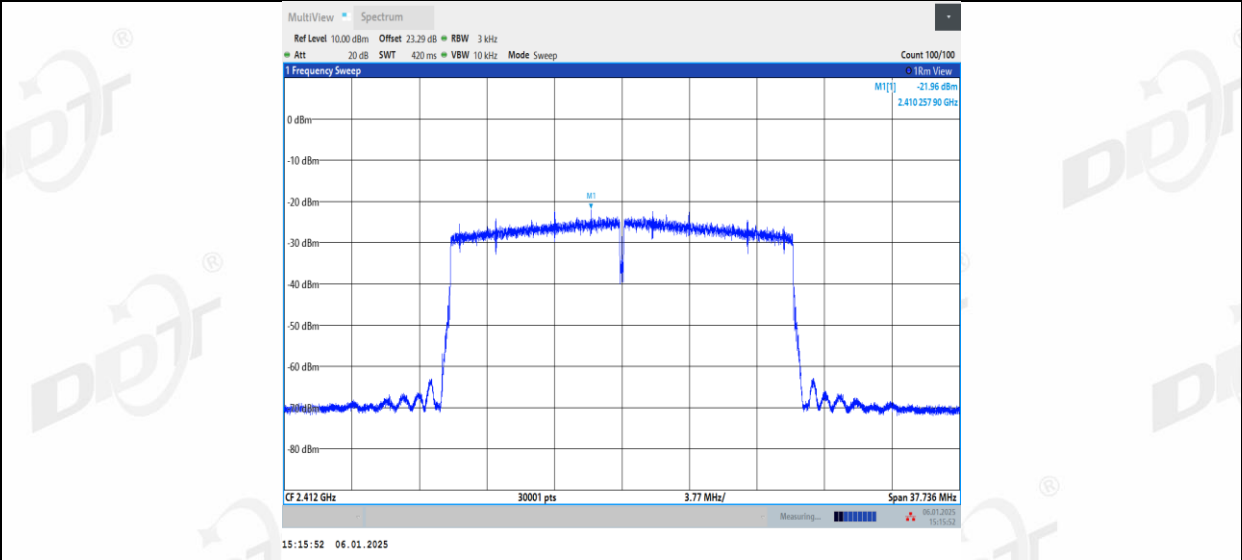


11AX20MIMO_Ant1_2437

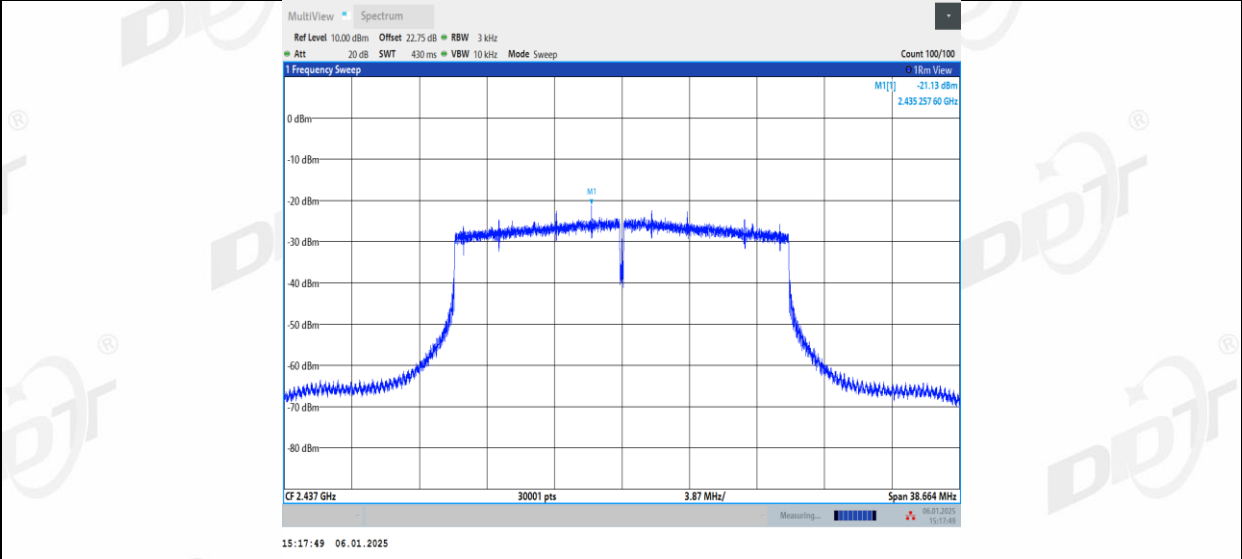


11AX20MIMO_Ant2_2437

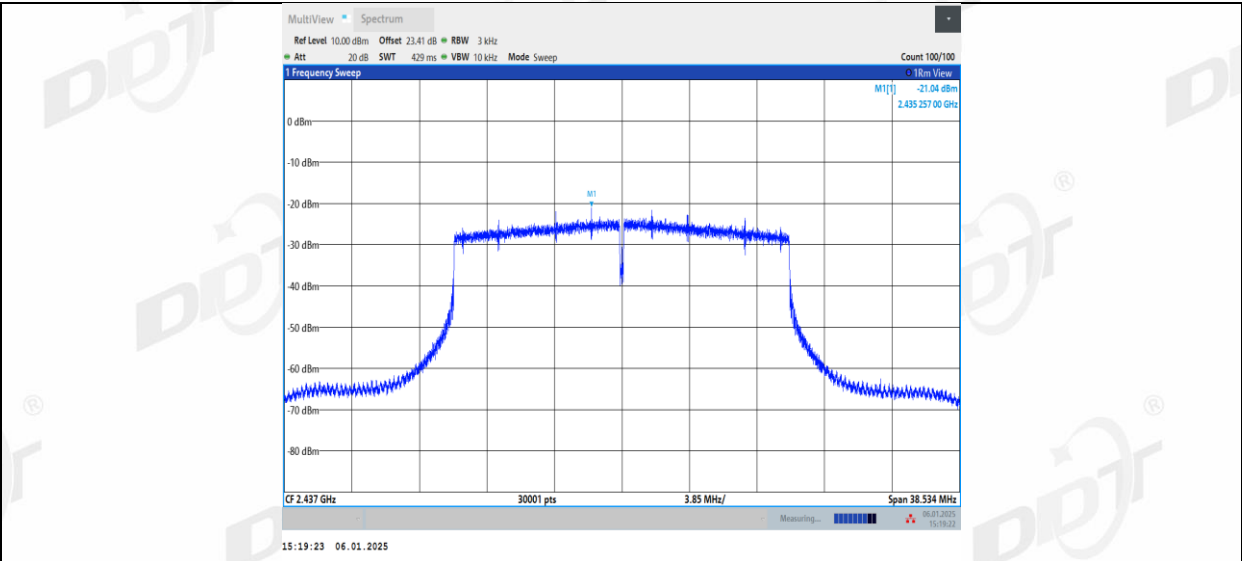


11AX20MIMO_Ant1_2462

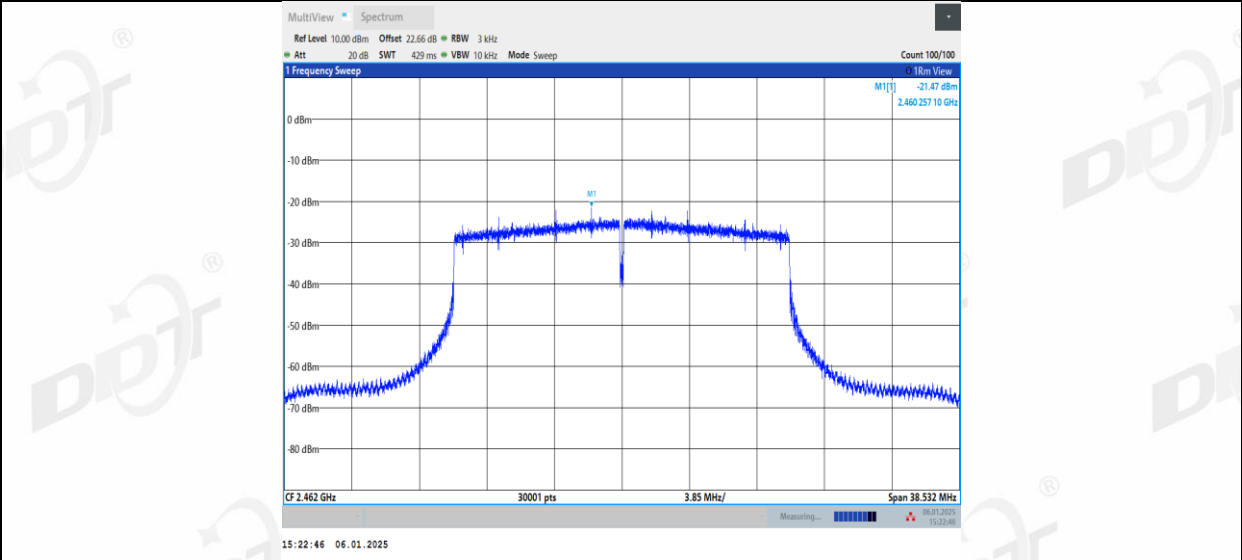


11AX20MIMO_Ant2_2462

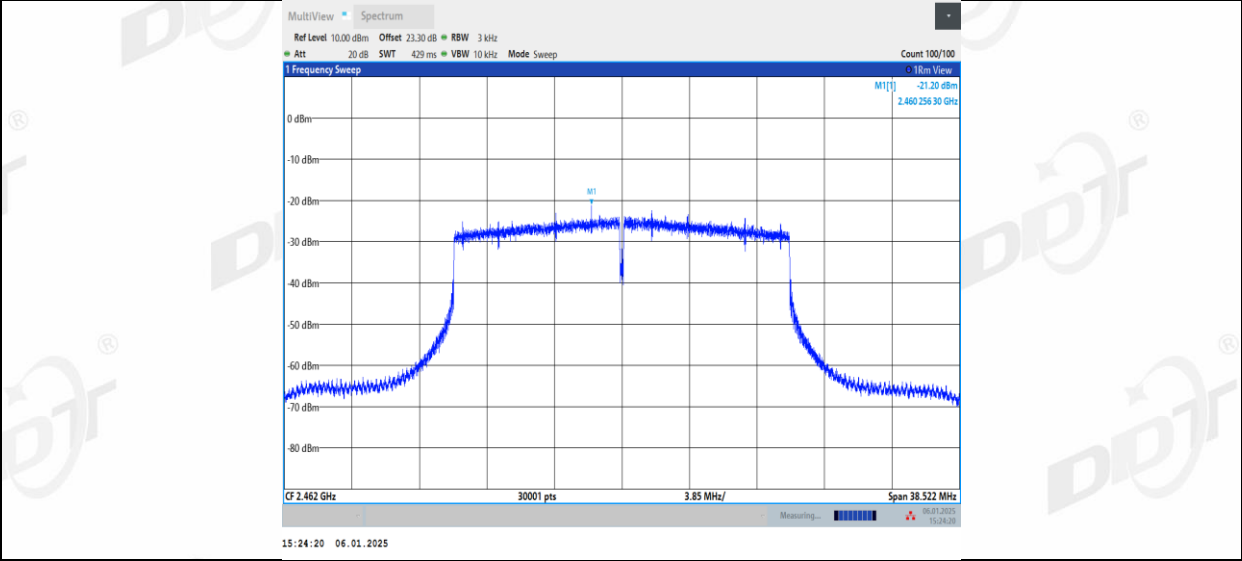


11AX40MIMO_Ant1_2422

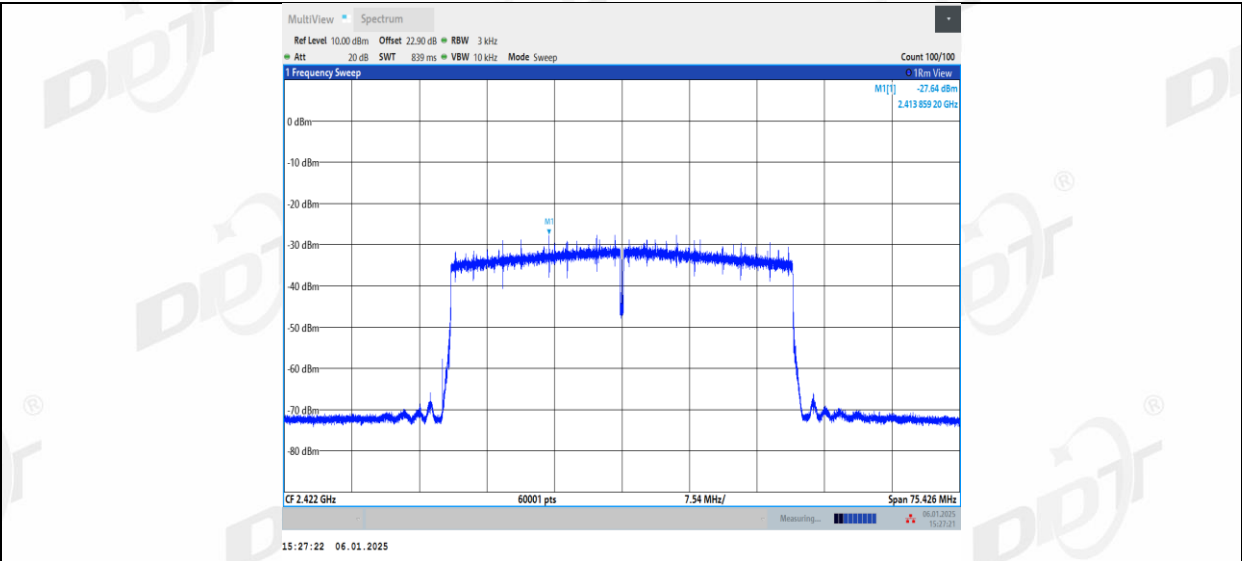


11AX40MIMO_Ant2_2422

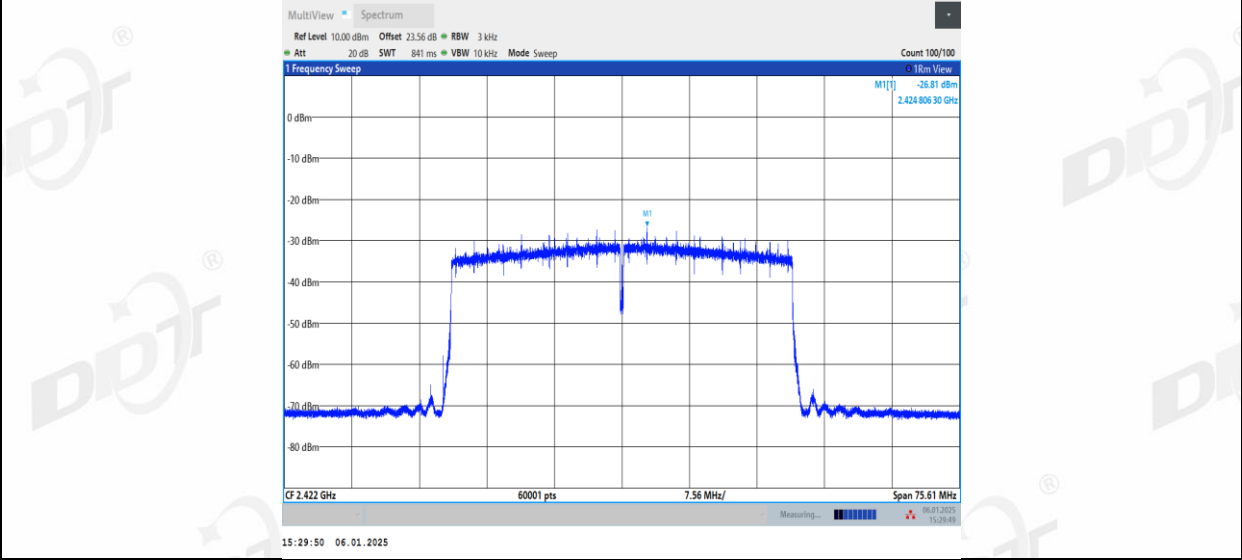


11AX40MIMO_Ant1_2437

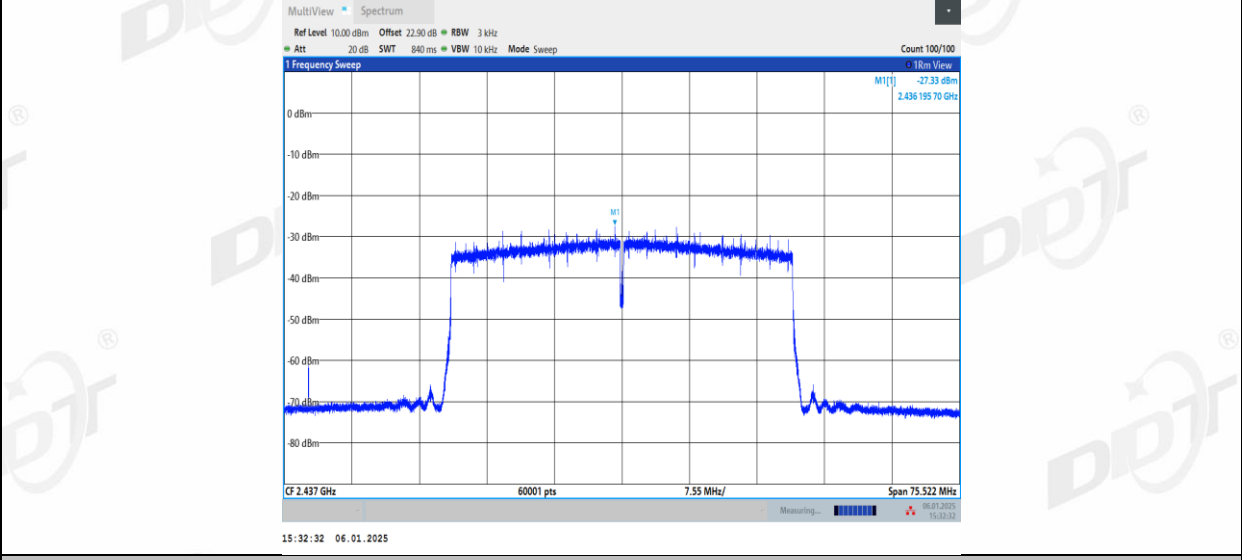


11AX40MIMO_Ant2_2437

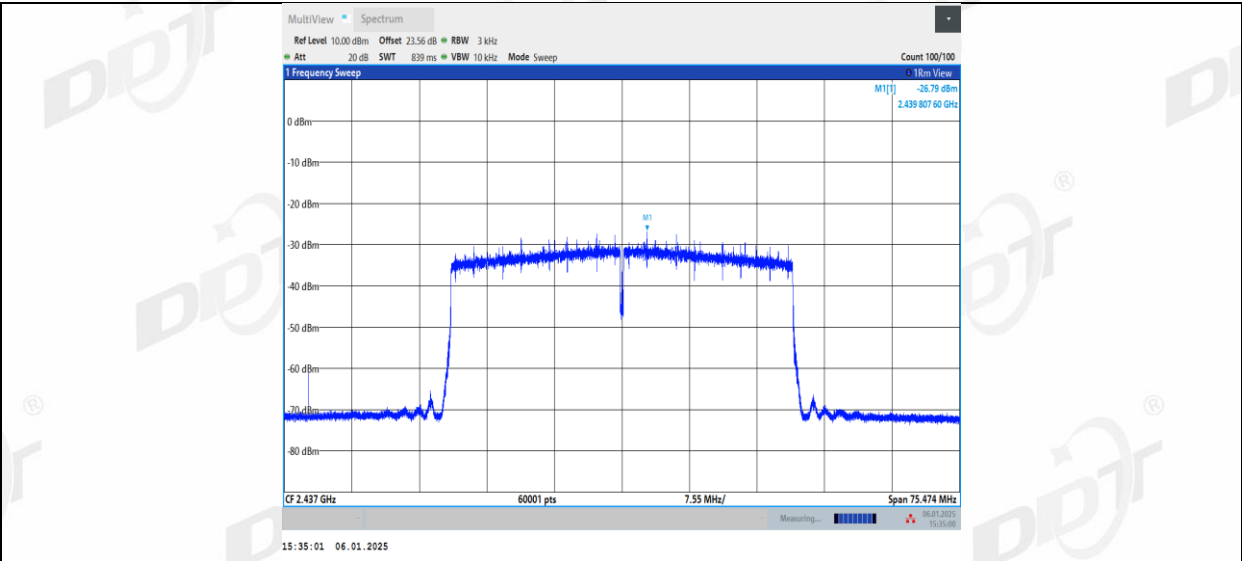



11AX40MIMO_Ant1_2452

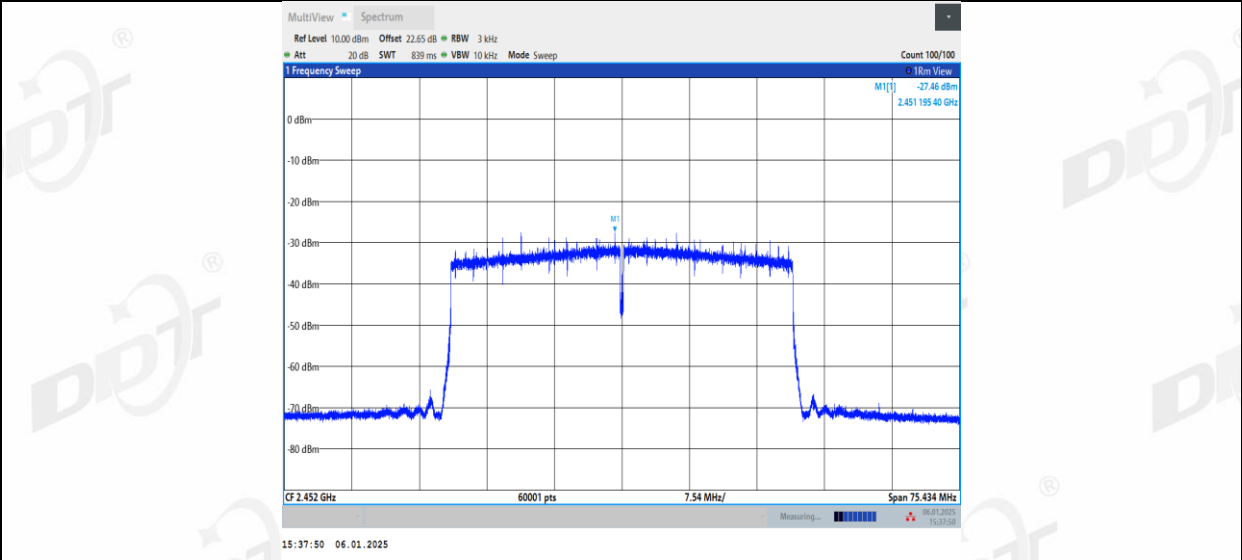


11AX40MIMO_Ant2_2452

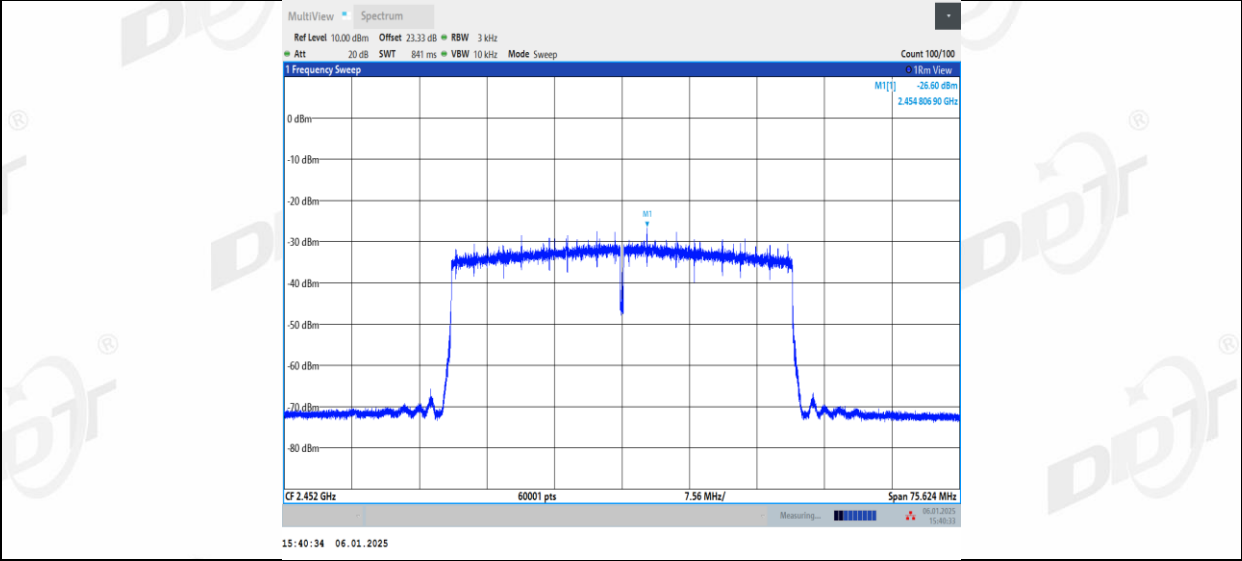

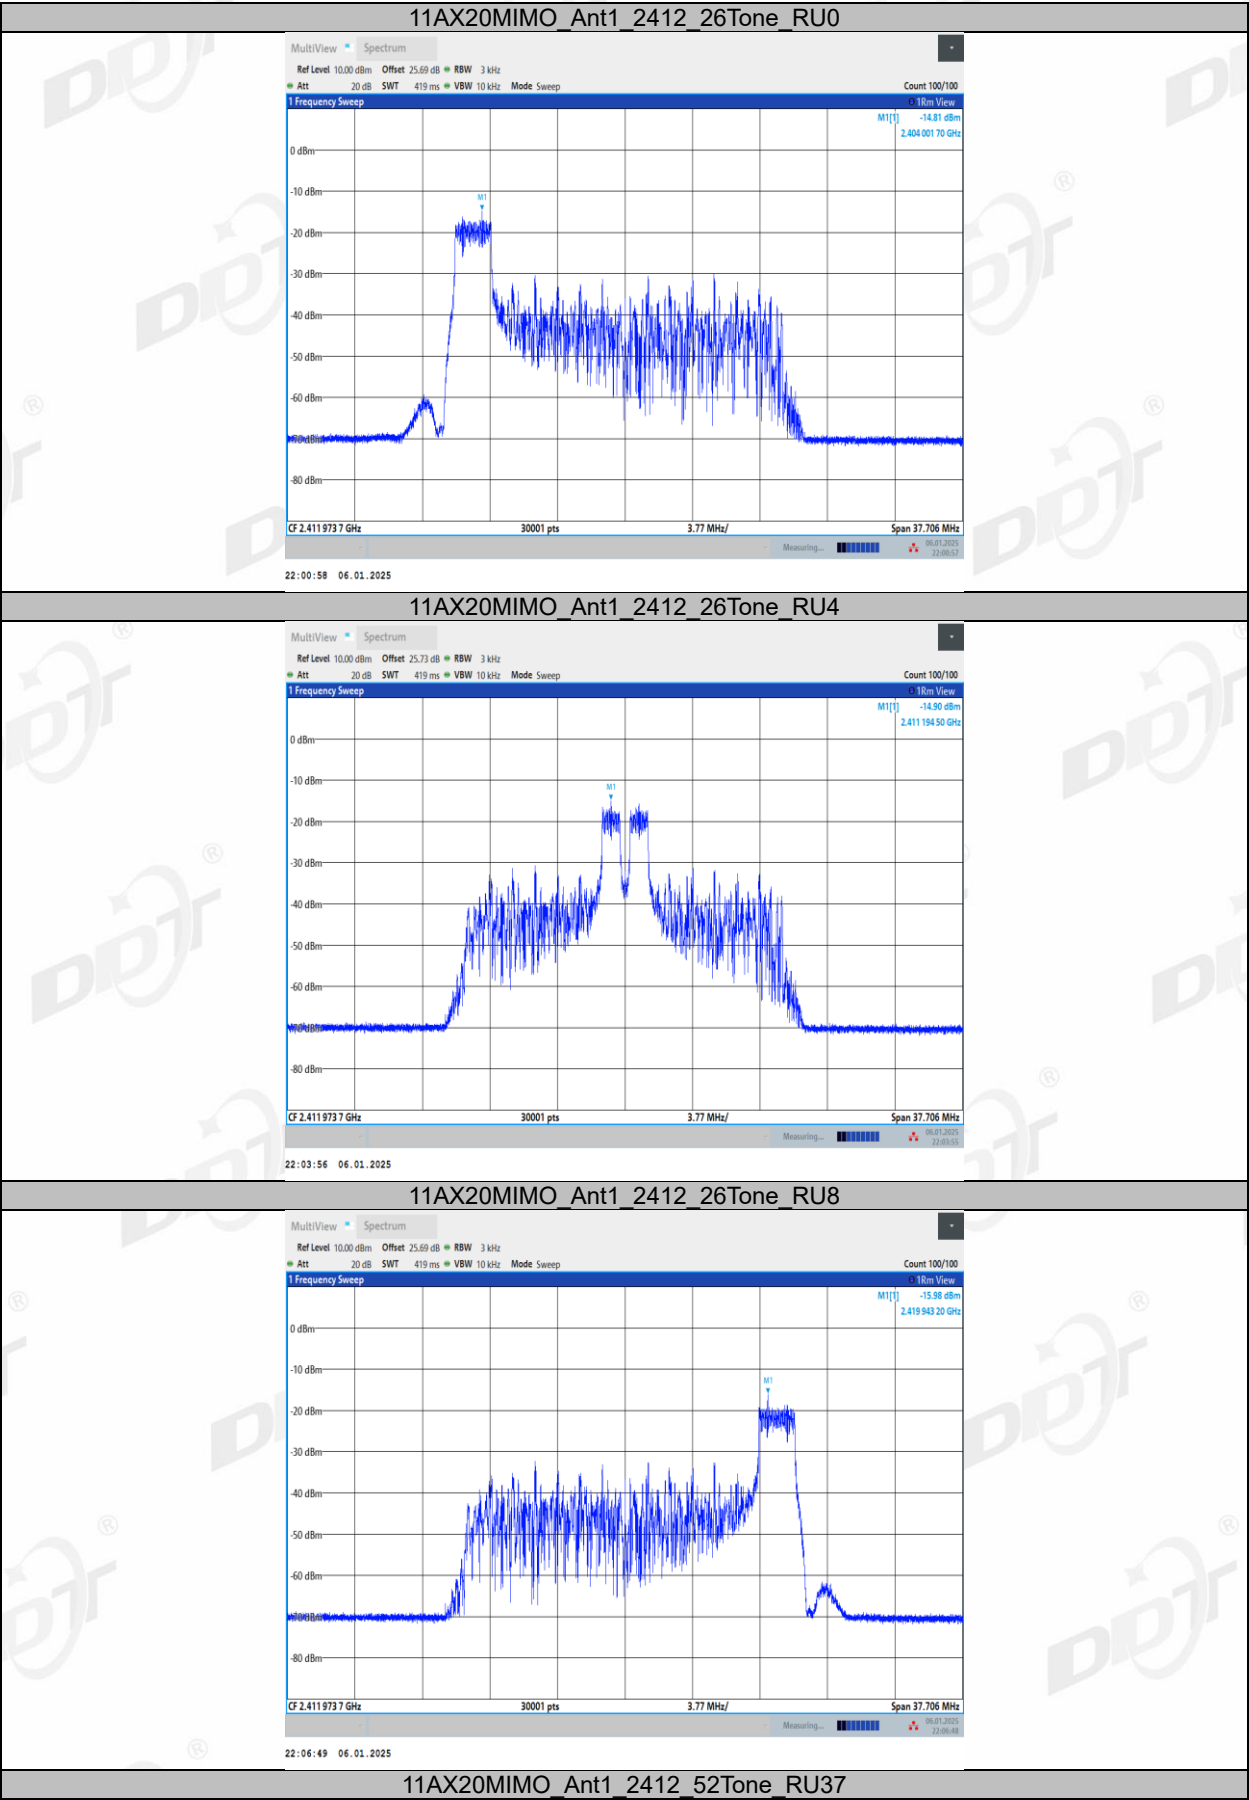


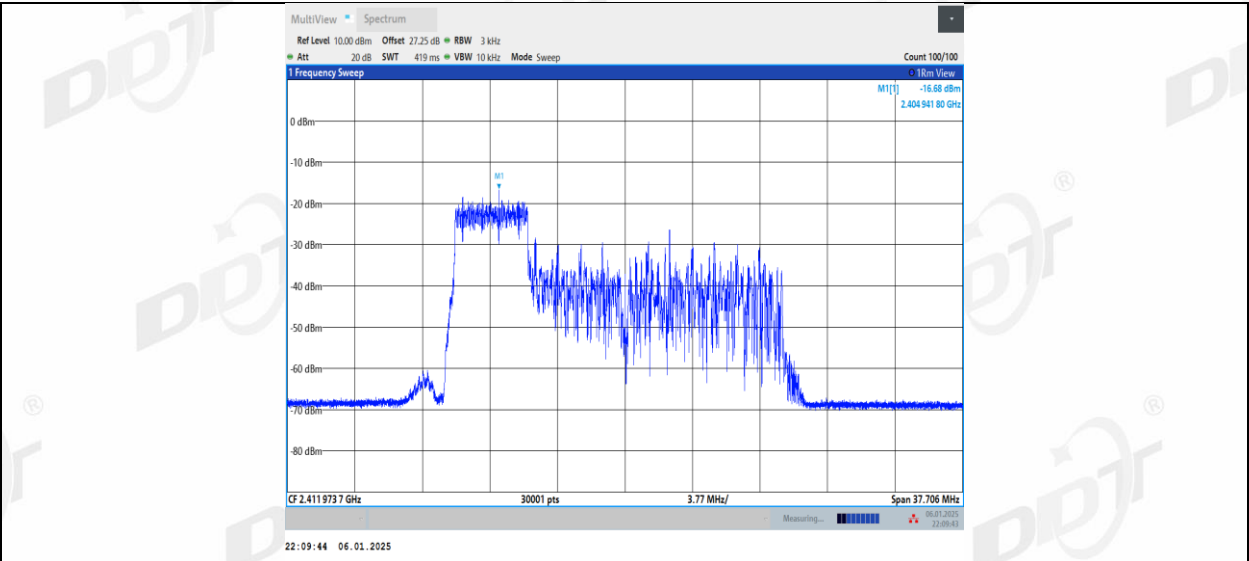


11AX20MIMO_Ant1_2412_52Tone_RU39

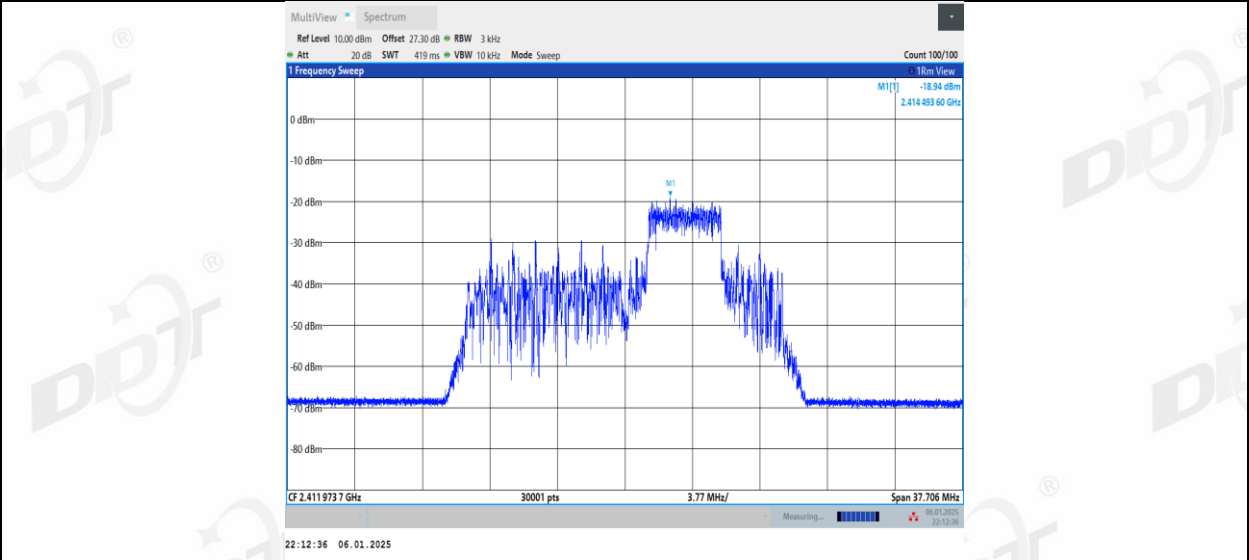


11AX20MIMO_Ant1_2412_52Tone_RU40

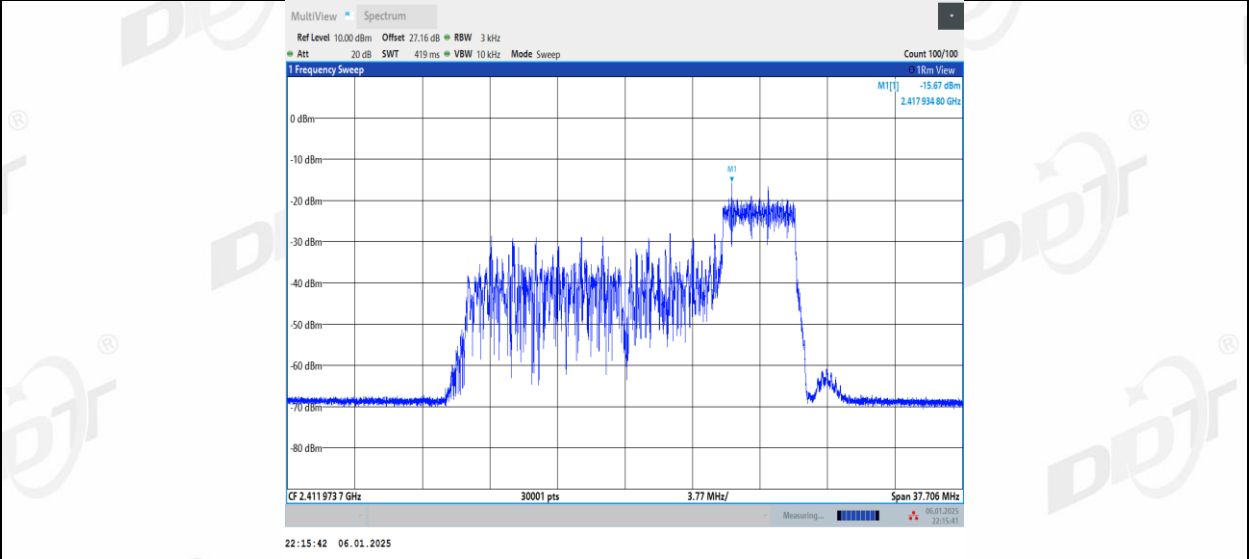


11AX20MIMO_Ant1_2412_106Tone_RU53

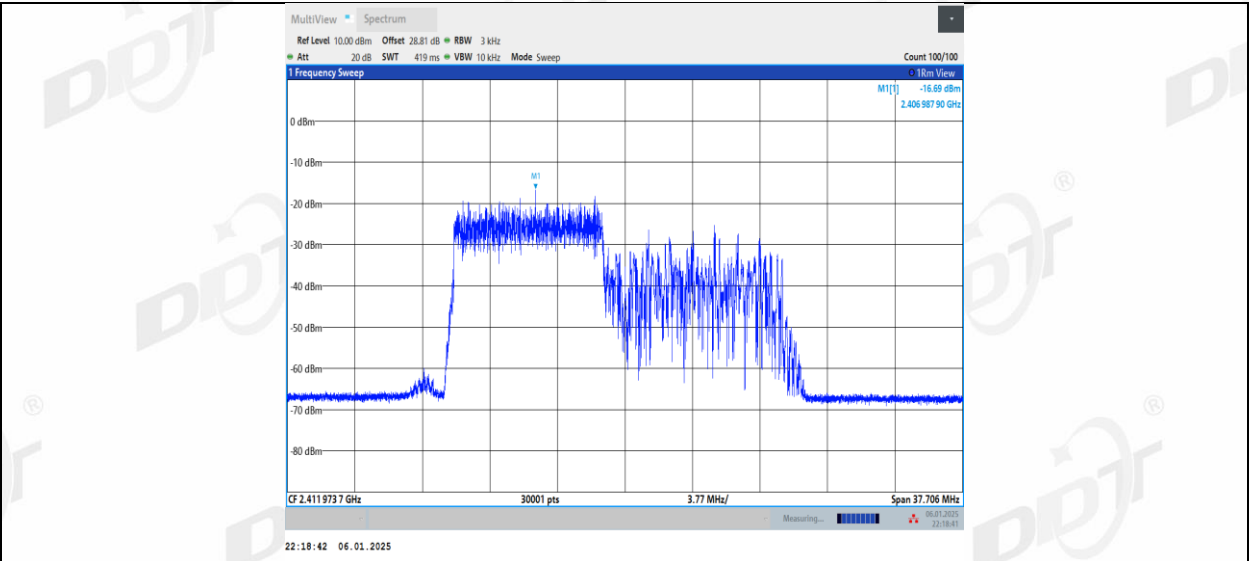


11AX20MIMO_Ant1_2412_106Tone_RU54

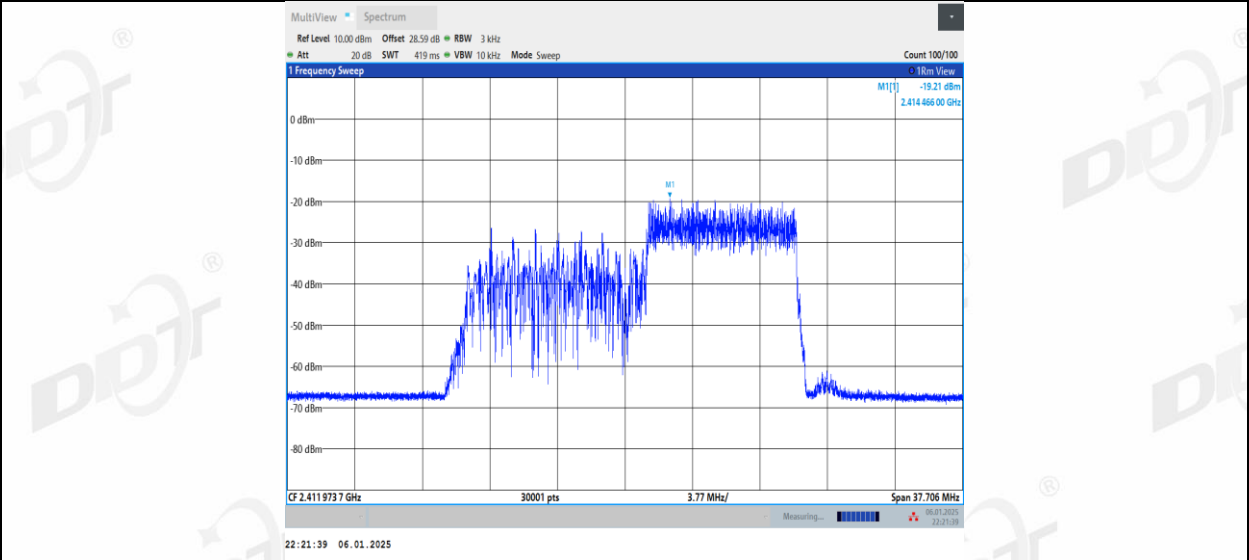


11AX20MIMO_Ant2_2412_26Tone_RU0

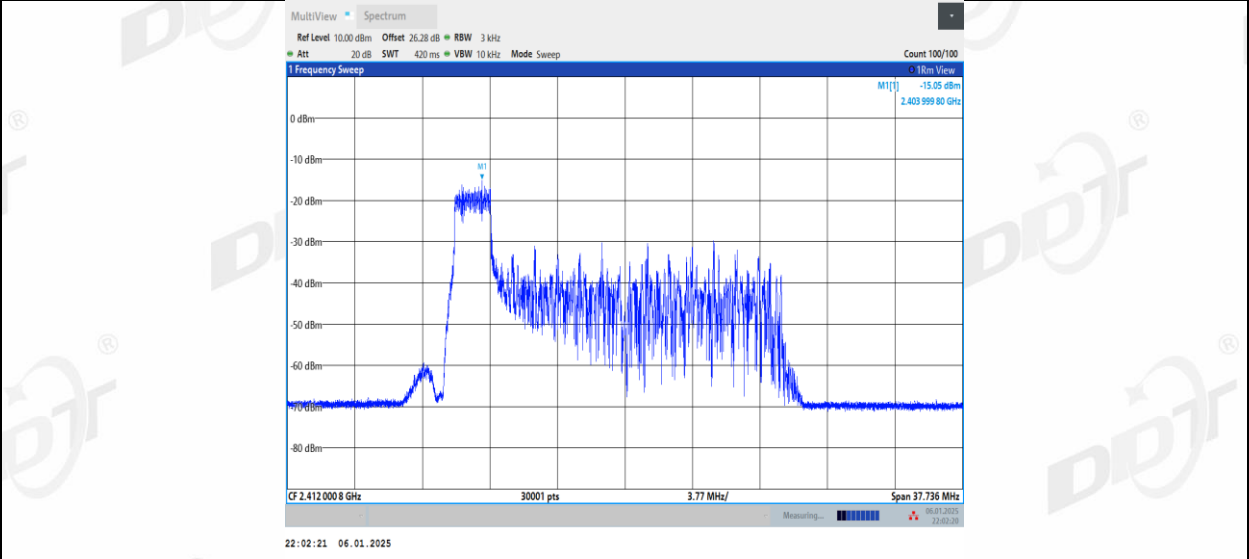


11AX20MIMO_Ant2_2412_26Tone_RU4

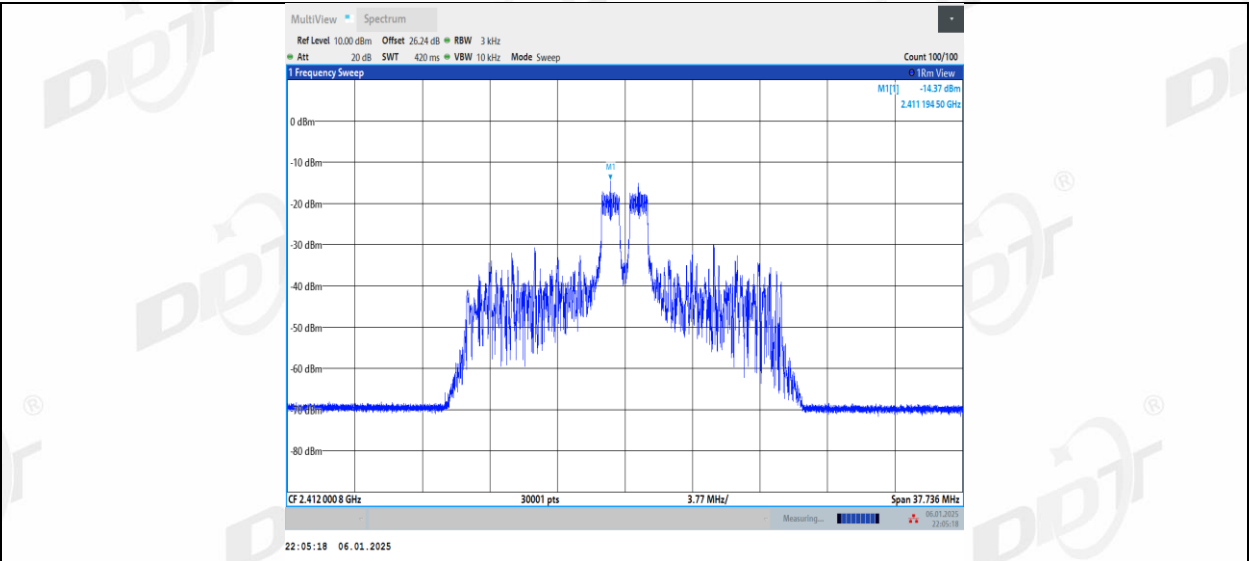


11AX20MIMO_Ant2_2412_26Tone_RU8

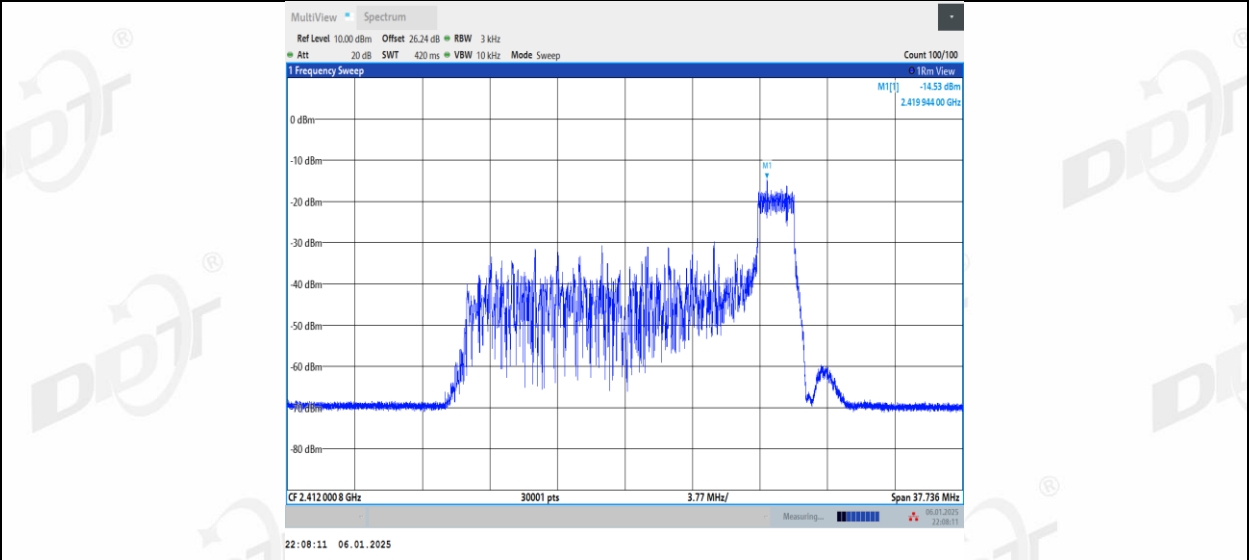


11AX20MIMO_Ant2_2412_52Tone_RU37

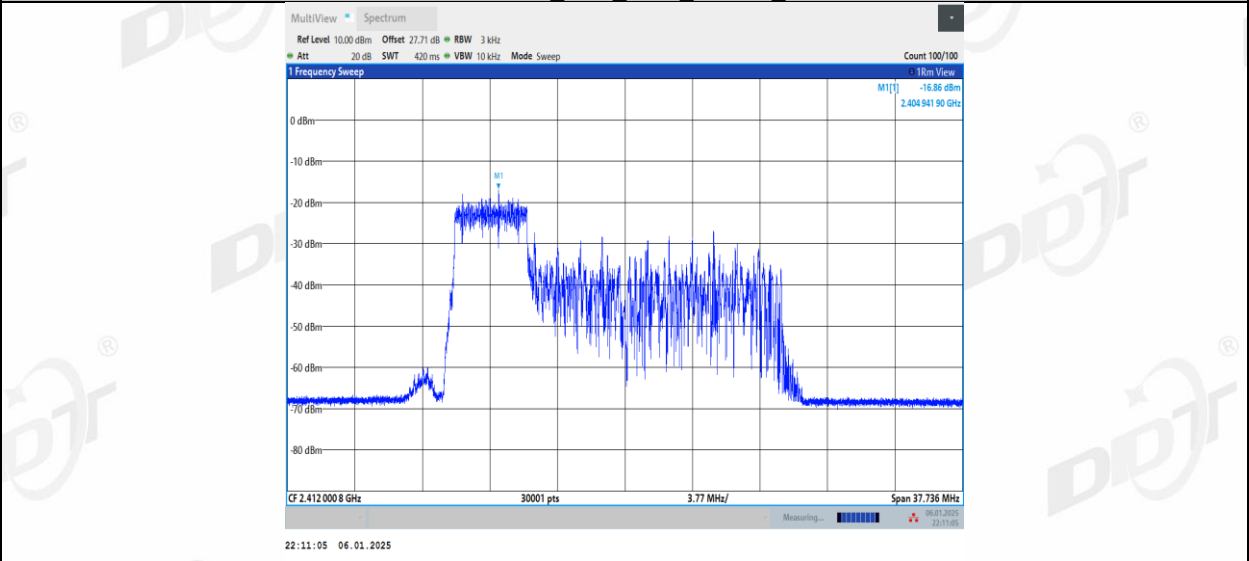


11AX20MIMO_Ant2_2412_52Tone_RU39

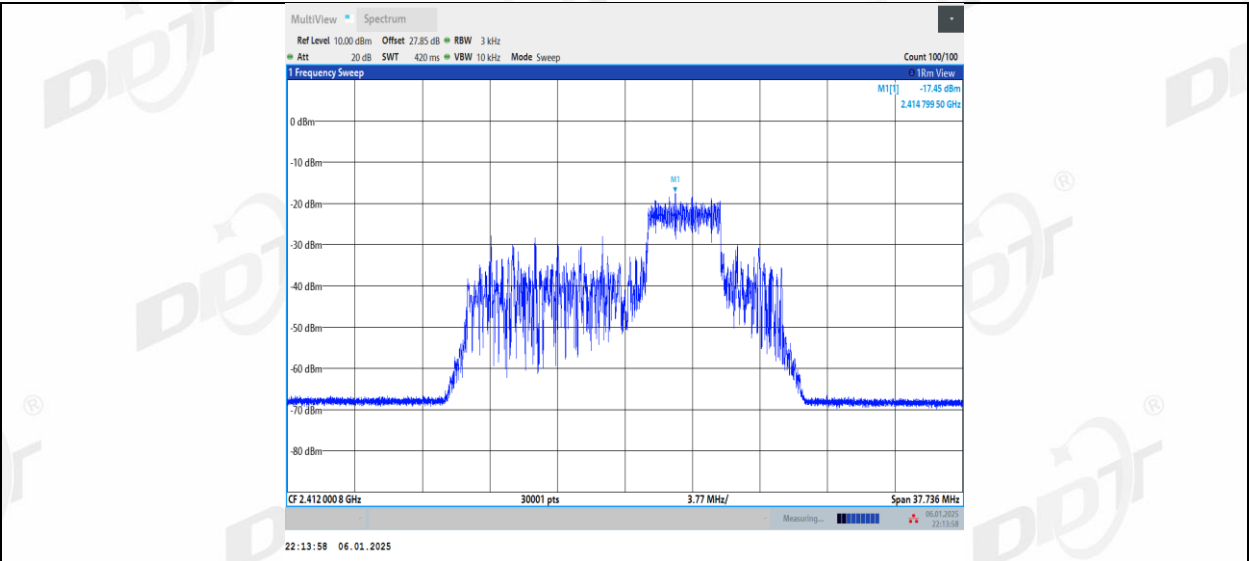


11AX20MIMO_Ant2_2412_52Tone_RU40

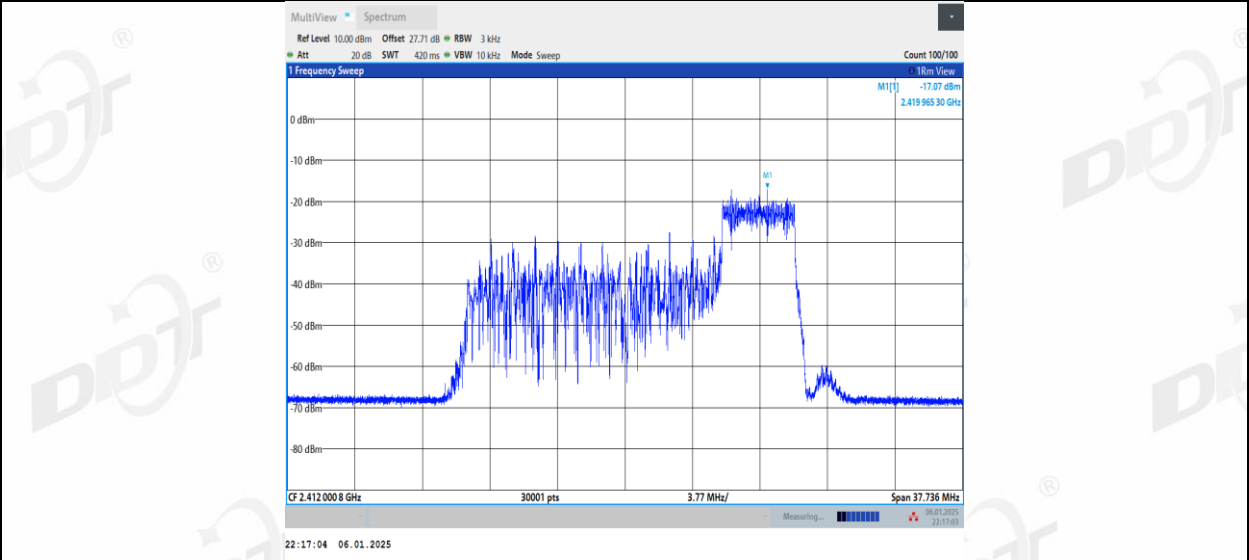


11AX20MIMO_Ant2_2412_106Tone_RU53

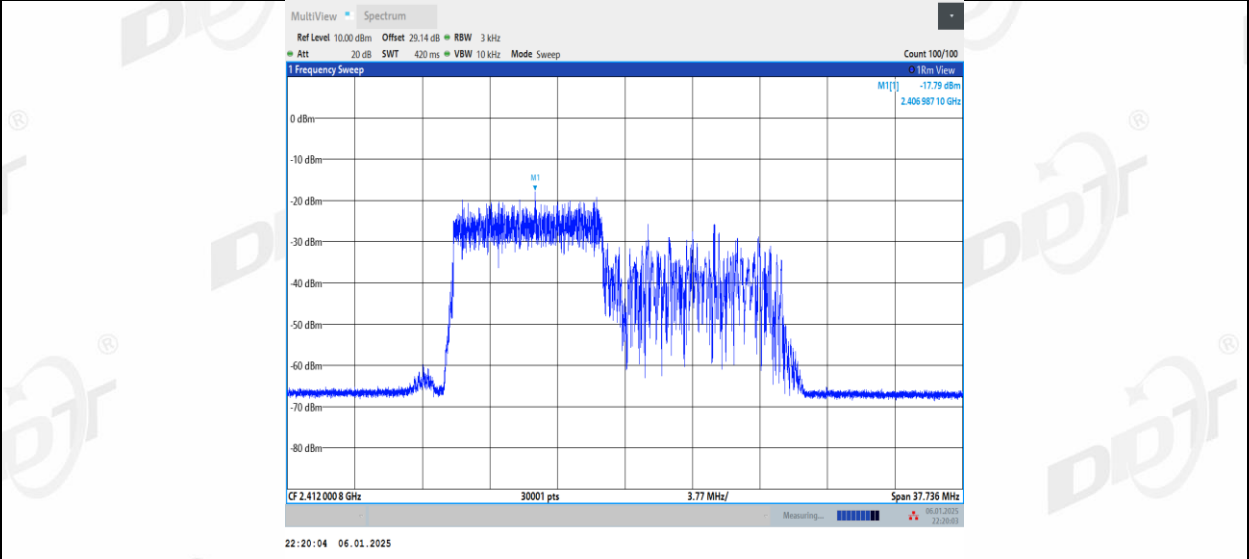


11AX20MIMO_Ant2_2412_106Tone_RU54

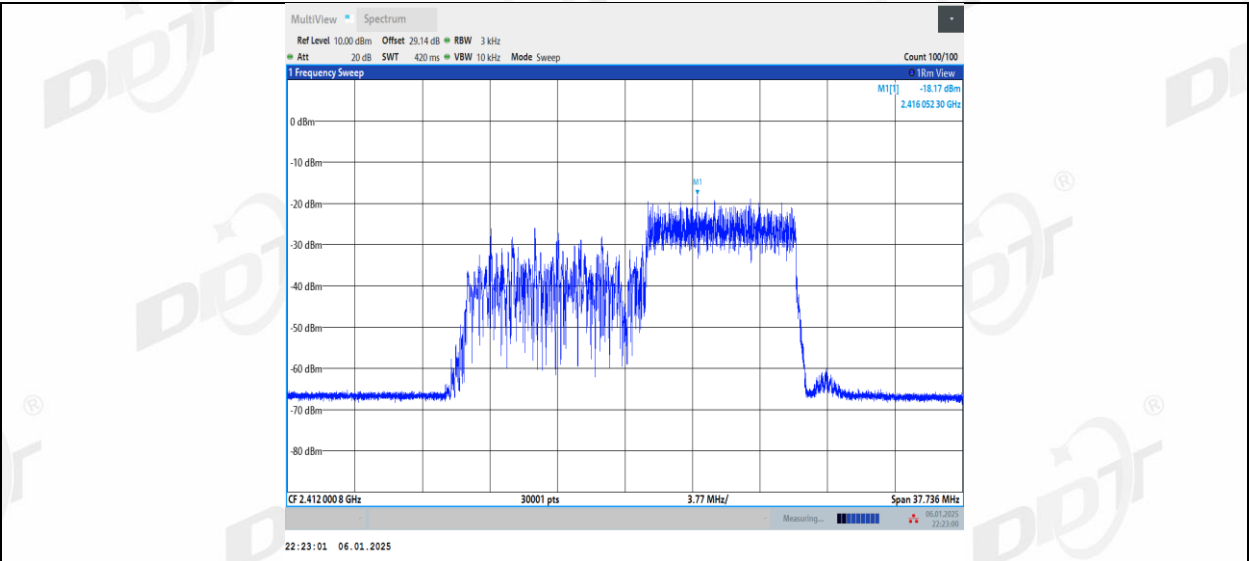


11AX20MIMO_Ant1_2437_26Tone_RU0

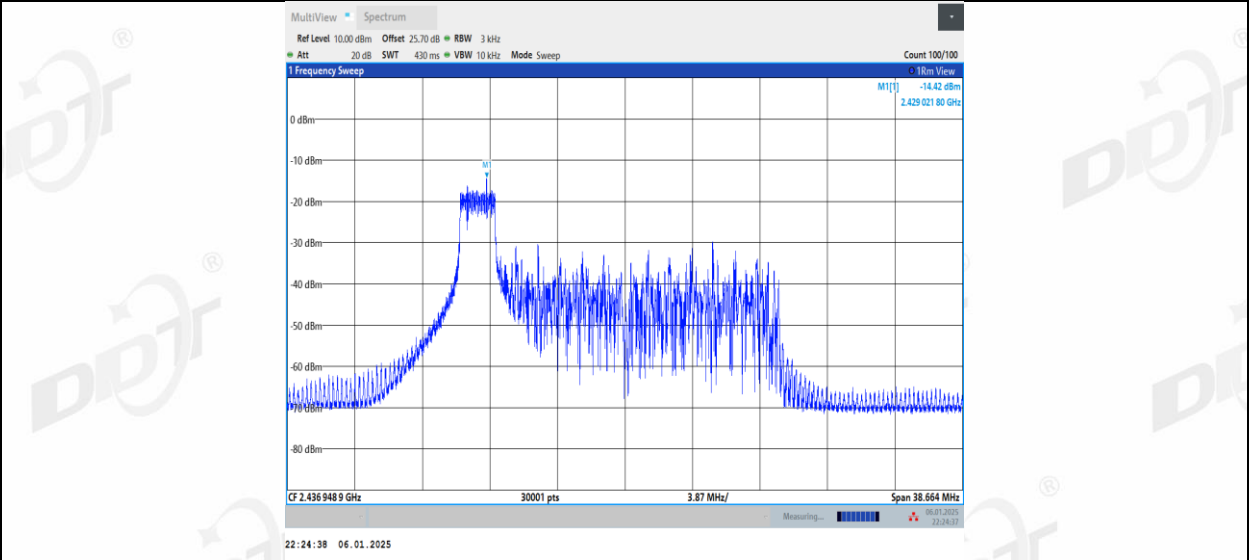


11AX20MIMO_Ant1_2437_26Tone_RU4

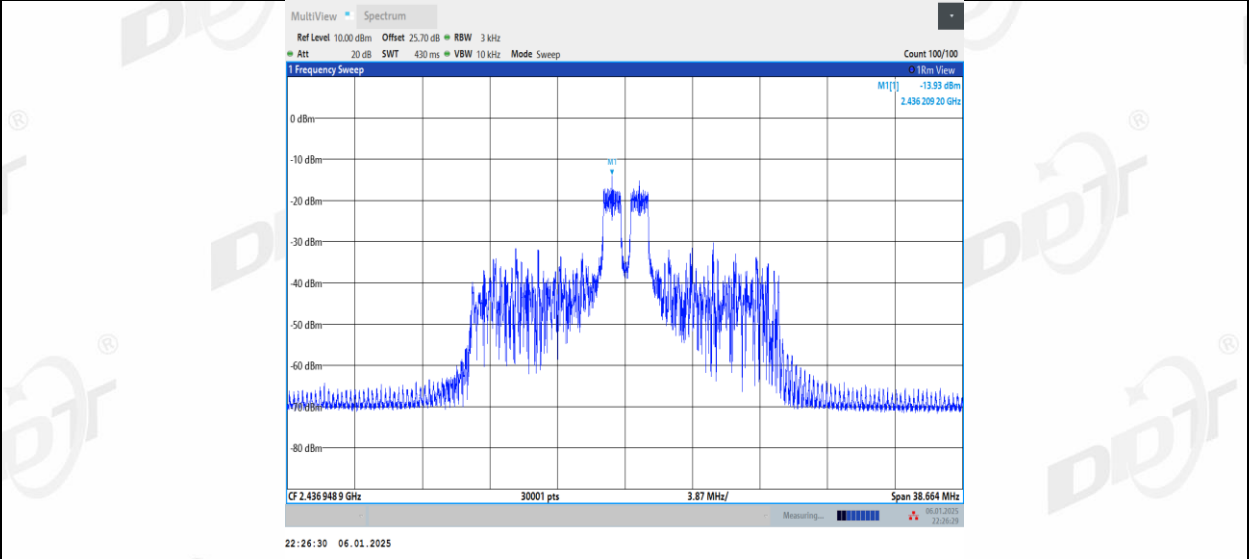


11AX20MIMO_Ant1_2437_26Tone_RU8

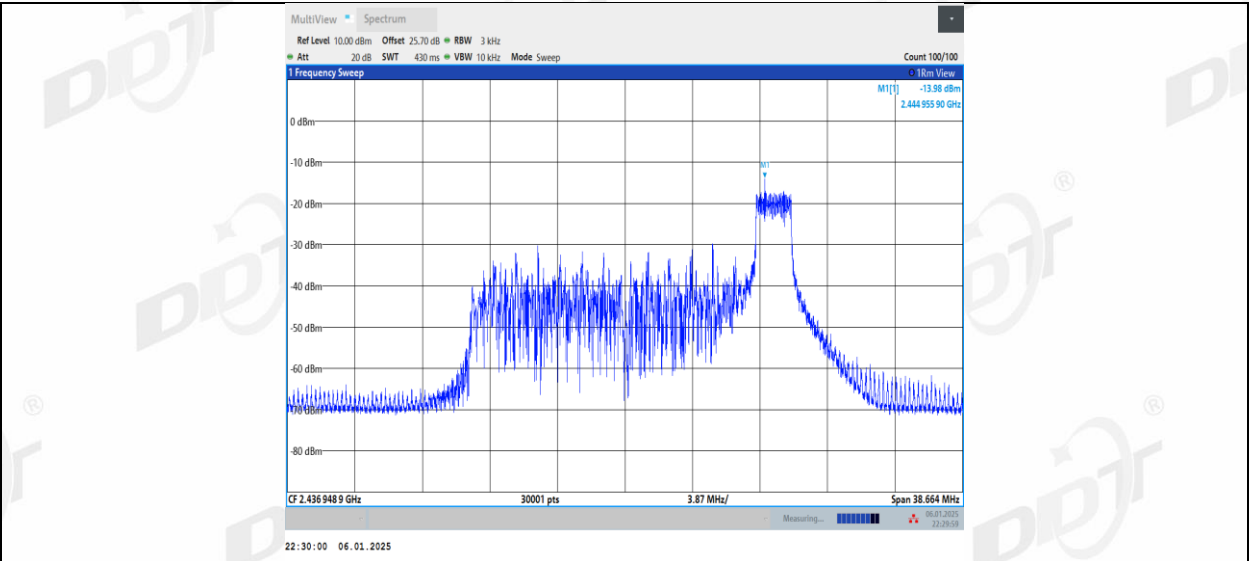


11AX20MIMO Ant1_2437_52Tone_RU37

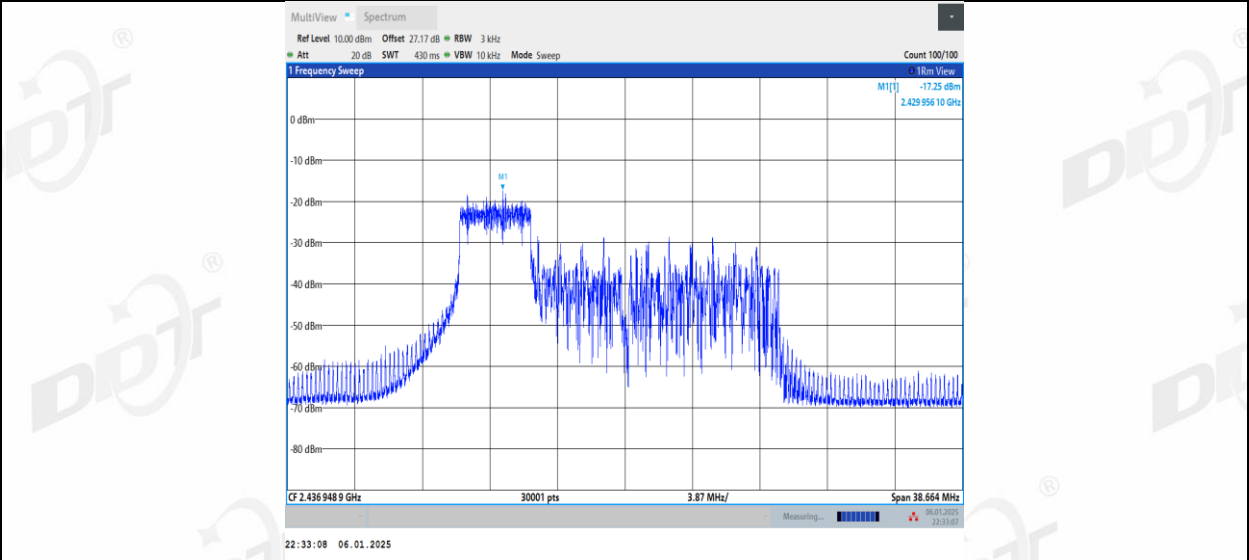


11AX20MIMO Ant1_2437_52Tone_RU39

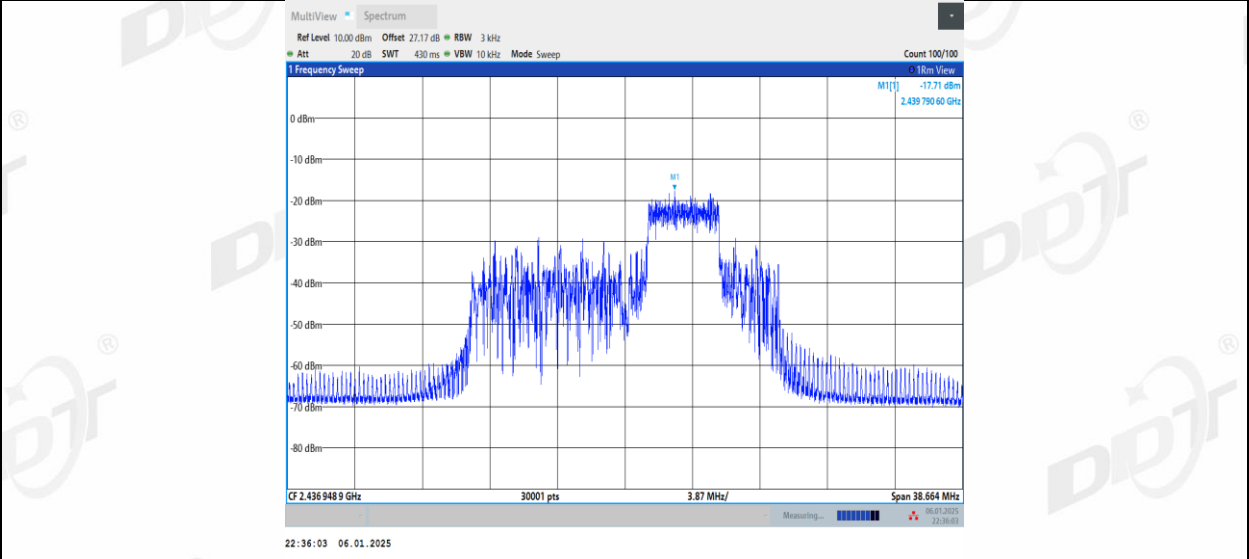


11AX20MIMO Ant1_2437_52Tone_RU40

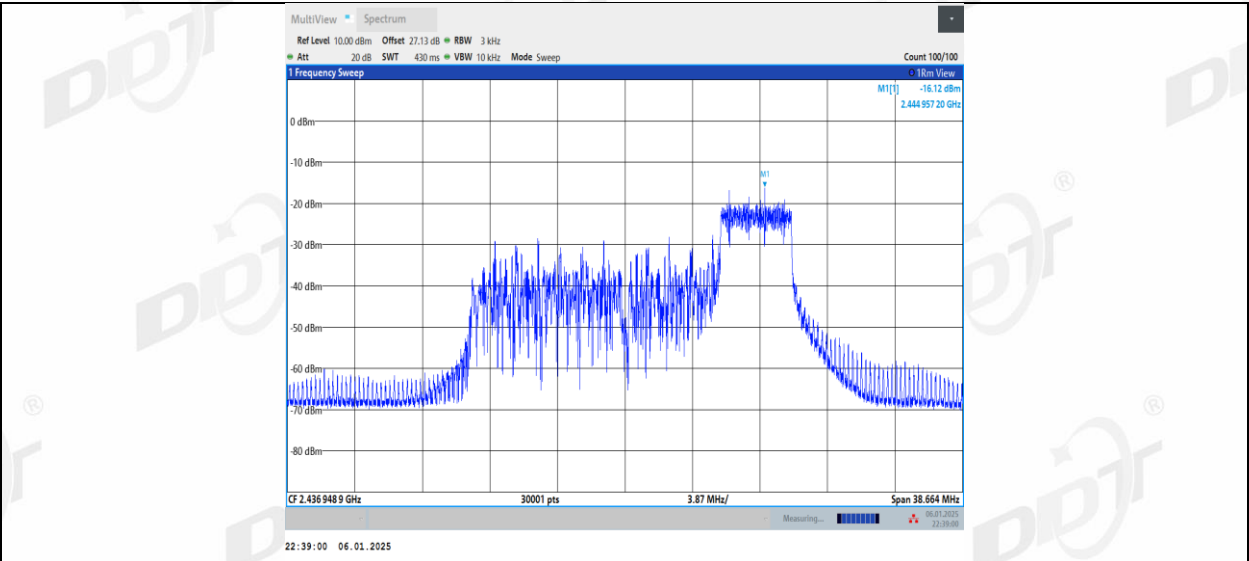


11AX20MIMO_Ant1_2437_106Tone_RU53

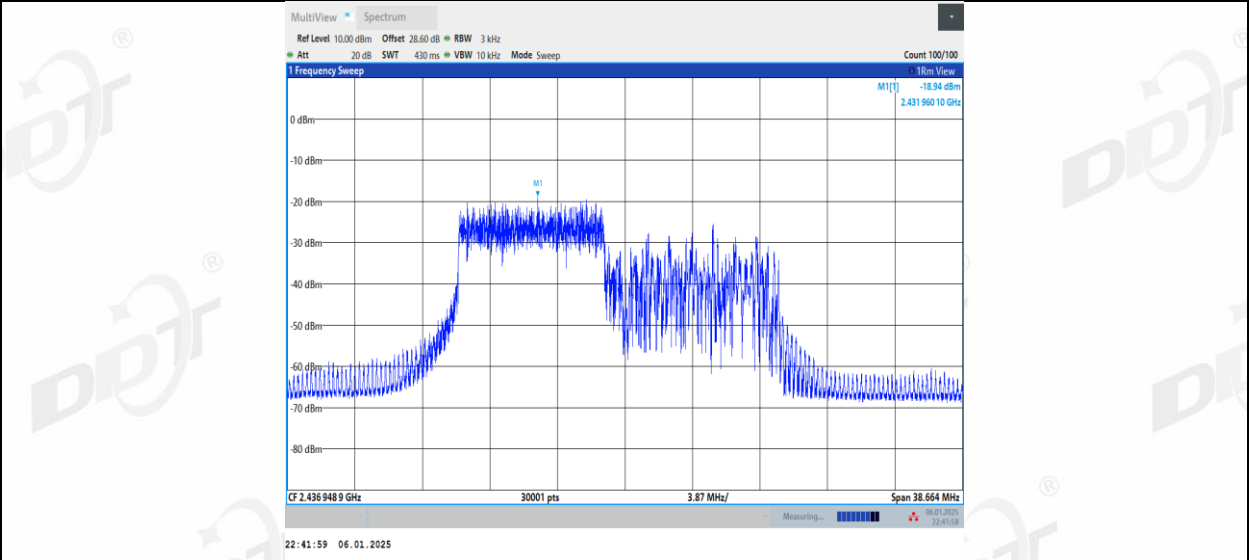


11AX20MIMO_Ant1_2437_106Tone_RU54

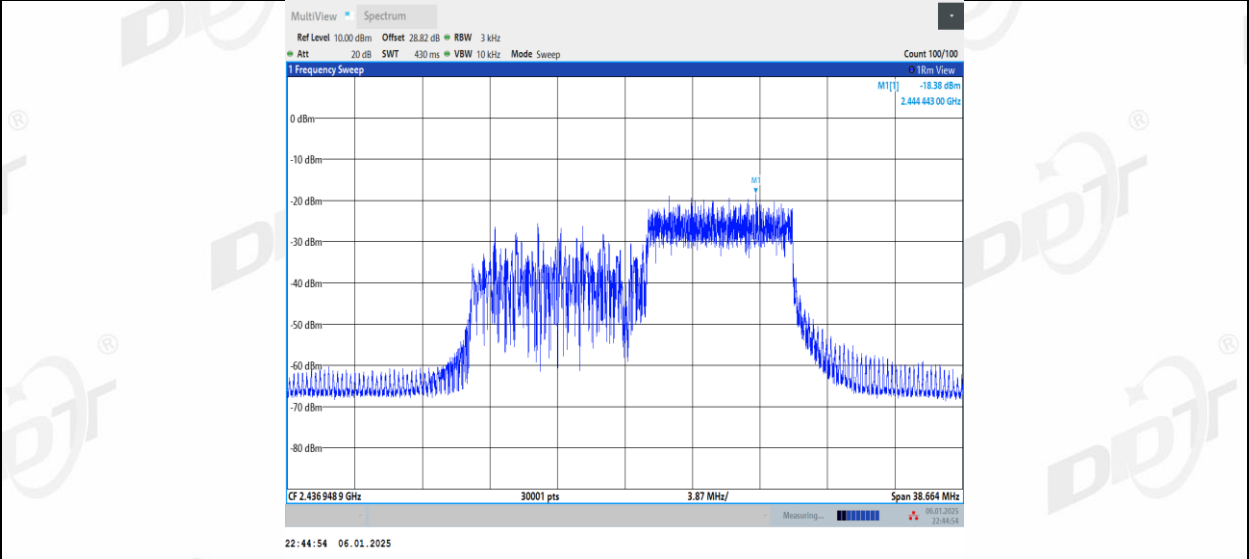


11AX20MIMO_Ant2_2437_26Tone_RU0

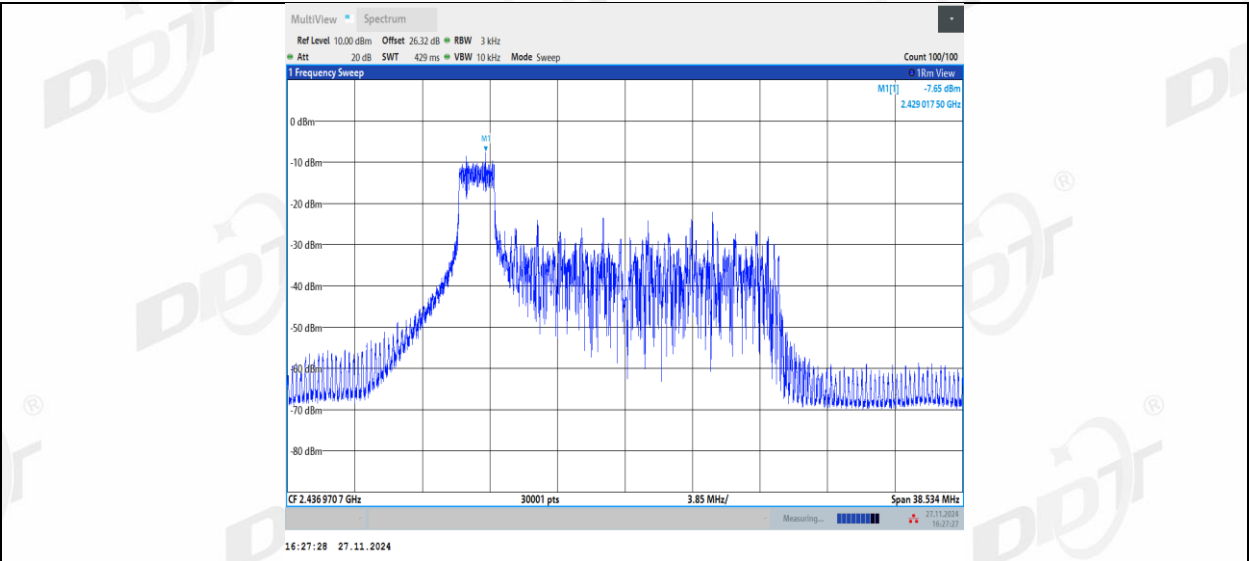


11AX20MIMO_Ant2_2437_26Tone_RU4

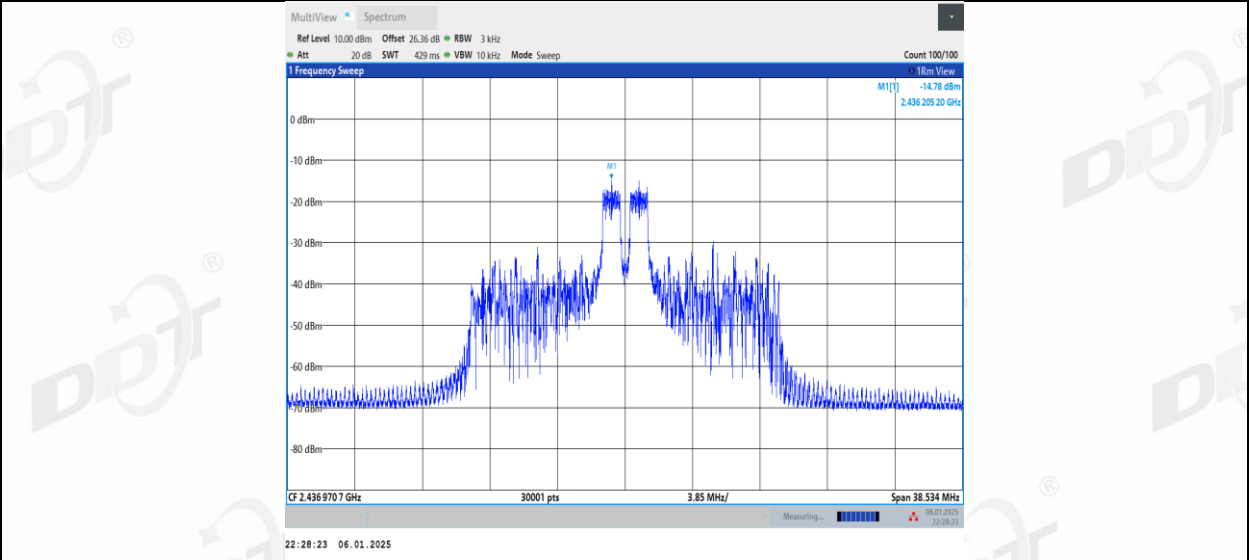


11AX20MIMO_Ant2_2437_26Tone_RU8

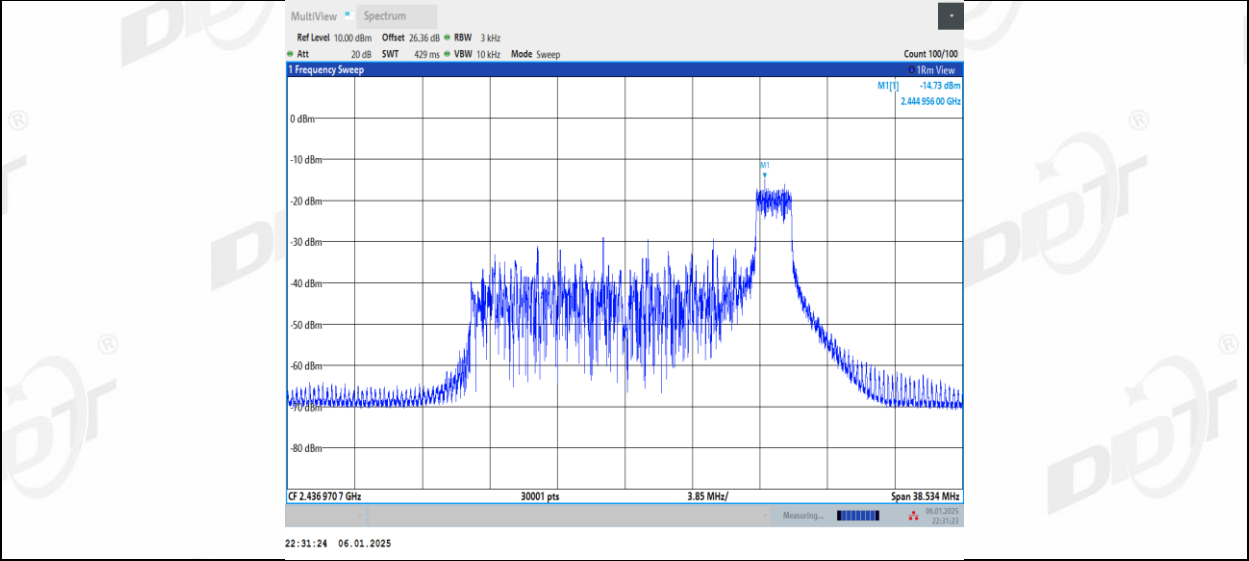


11AX20MIMO_Ant2_2437_52Tone_RU37

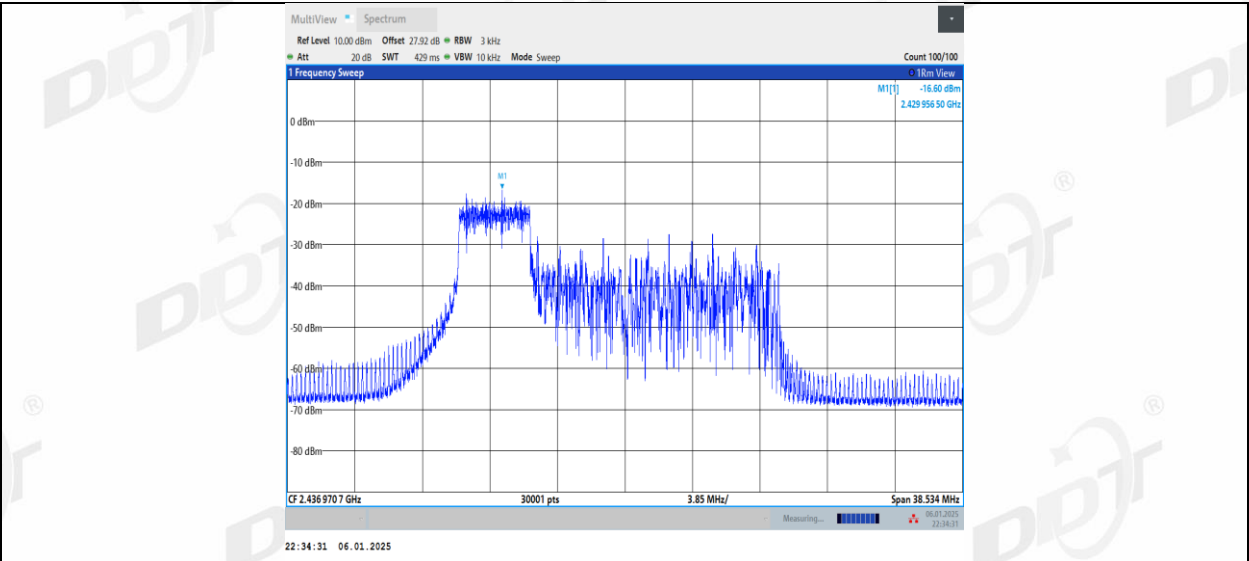

11AX20MIMO_Ant2_2437_52Tone_RU39

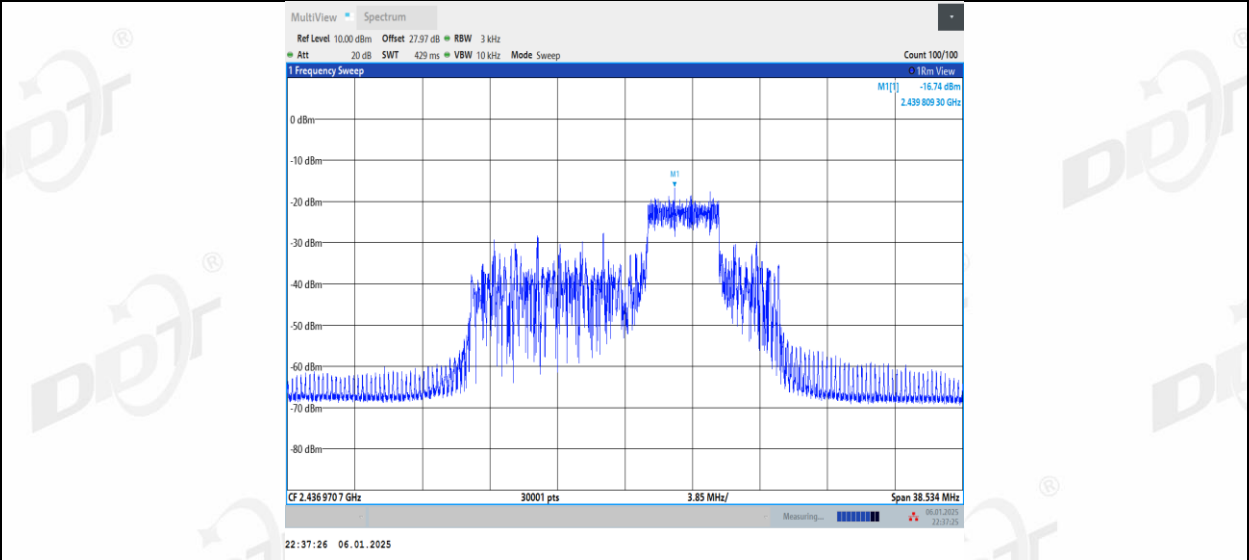

11AX20MIMO_Ant2_2437_52Tone_RU40

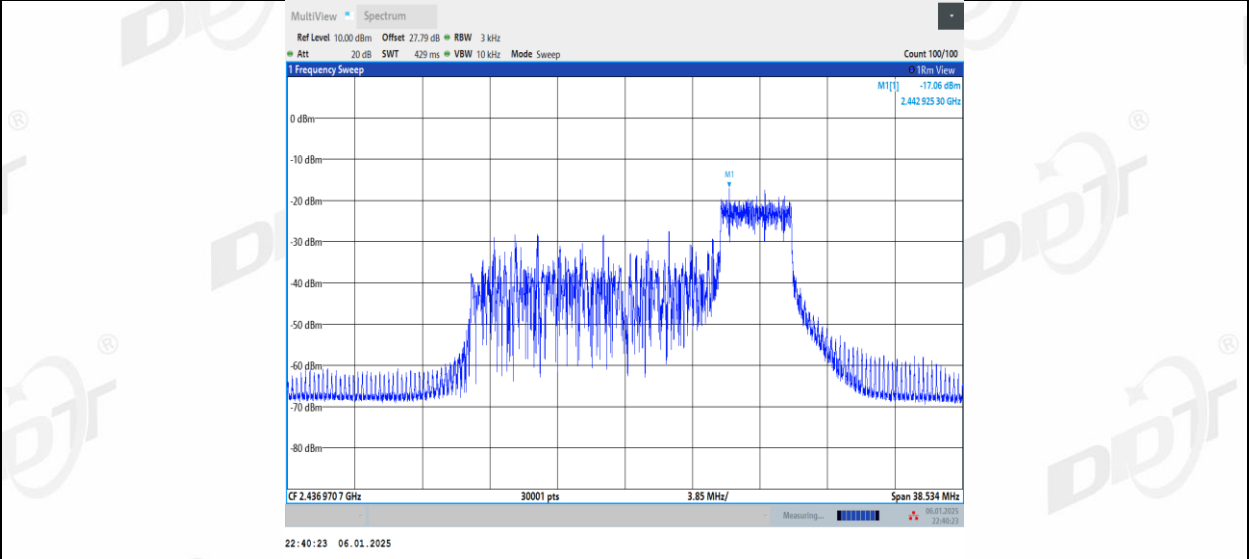

11AX20MIMO_Ant2_2437_106Tone_RU53