



Description: FPC 2.4G antenna

PART NUMBER: W3921XXXXX



Features:

- 2400-2500MHz FPC dipole
- Efficiency >50%
- Gain +1dBi
- 100mm cable length and U.FL compatible connector as standard setup, P/N W3921B0100
- Custom configurations upon request

Applications:

- Bluetooth, Zigbee, WiFi, BLE
- ISM 2.4GHz band radios
- Set top boxes,
- Security
- Transportation

All dimensions are in mm / inches

Issue: 2137

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998





Description: FPC 2.4G antenna

PART NUMBER: W3921XXXXX

This document covers all product variants of the following product family:

W3921B0039	39mm 1.13mm OD cable	U.FL compatible connector
W3921B0050	50mm 1.13mm OD cable	U.FL compatible connector
W3921B0100	100mm 1.13mm OD cable	U.FL compatible connector
W3921T0150	150mm 0.81mm OD cable	W.FL compatible connector
W3921B0150	150mm 1.13mm OD cable	U.FL compatible connector
W3921B0120	120mm 1.13mm OD cable	U.FL compatible connector
W3921B0200	200mm 1.13mm OD cable	U.FL compatible connector





Series: Internal Antenna

PART NUMBER: W3921XXXXX

ELECTRICAL SPECIFICATIONS

Frequency 2400-2500MHz

Nominal Impedance 50Ω

VSWR <2

Gain 1dBi +/- 1 dB

Efficiency 50%

Radiation Pattern Omni

Polarization Linear

Power withstanding 2 W

(*) All RF parameters measured on 2mm thick PC plate



TECHNICAL DATA SHEET

Description: FPC 2.4G antenna

PART NUMBER: W3921XXXXX

Series: Internal Antenna

MECHANICAL SPECIFICATIONS

PCB type Flexible

Radiator size 33[1.3] x 7.7[0.3] mm[inch]

Adhesive 3M467

Total thickness (Radiator + adhesive) 0.1[0.004] mm[inch]

Weight about 0.37 g

Cable type OD 1.13mm/0.81mm coax cable

Cable length Optional mm[inch]

Connector U.FL/W.FL compatible

ENVIRONMENTAL SPECIFICATIONS

Operating temperature -40/+85° C






Series: Internal Antenna

PART NUMBER: W3921XXXXX

MECHANICAL DRAWING

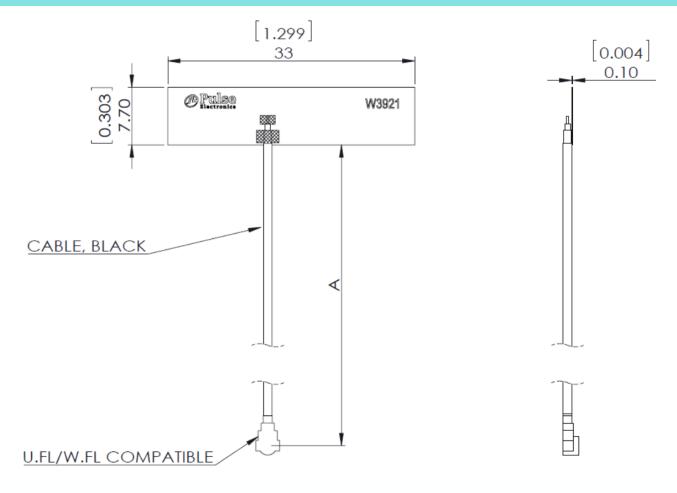

ITEM	PROJECT	A LENGTH	CABLE P/N	Cable DIAMETER	CONNECTOR
1	W3921B0050	50	055-2248.001	1.13MM	U.FL COMPATIBLE
2	W3921B0100	100	055-2248.002	1.13MM	U.FL COMPATIBLE
3	W3921T0150	150	055-2248.003	0.81MM	W.FL COMPATIBLE
4	W3921B0039	39	055-2248.004	1.13MM	U.FL COMPATIBLE
5	W3921B0150	150	055-2248.005	1.13MM	U.FL COMPATIBLE
6	W3921B0200	200	055-2248.006	1.13MM	U.FL COMPATIBLE
7	W3921B0120	120	055-2248.007	1.13MM	U.FL COMPATIBLE

Issue: 2137








Series: Internal Antenna

PART NUMBER: W3921XXXXX

CHARTS

(*) All RF parameters measured on 2mm thick PC plate

Return Loss

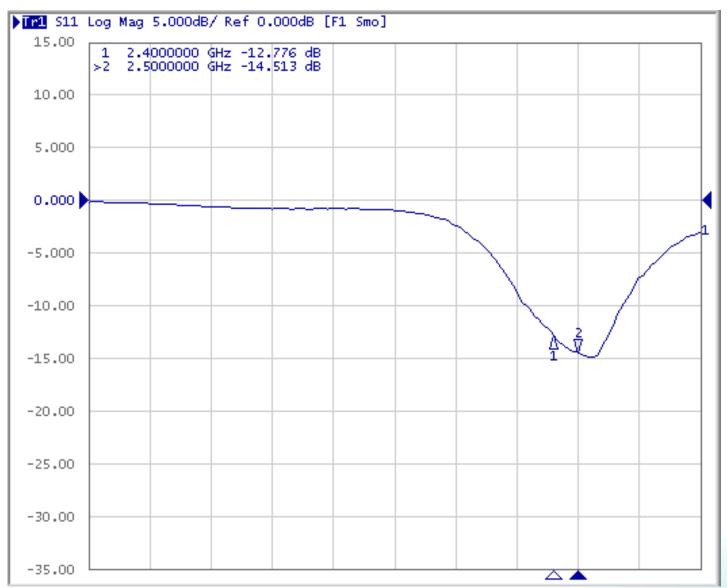






Description: FPC 2.4G antenna

PART NUMBER: W3921XXXXX

CHARTS

(*) All RF parameters measured on 2mm thick PC plate

VSWR

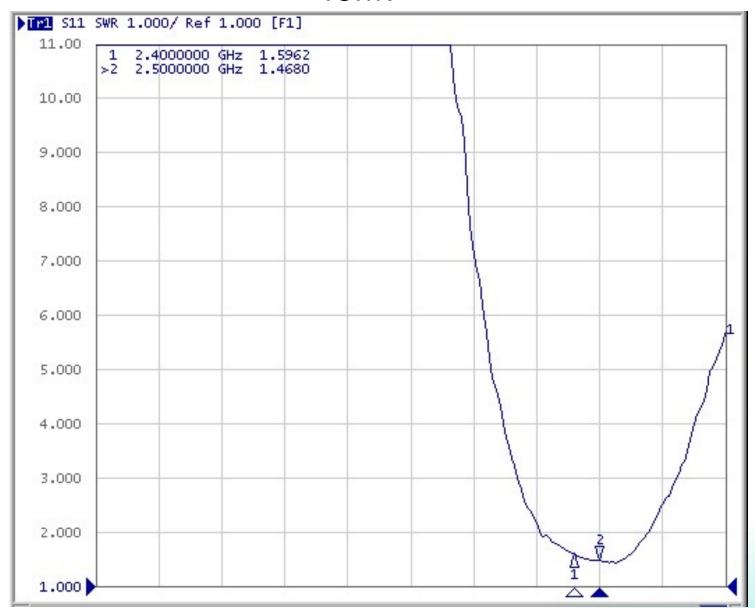






Series: Internal Antenna

PART NUMBER: W3921XXXXX

CHARTS

(*) All RF parameters measured on 2mm thick PC plate Efficiency(%) & Gain (dBi)

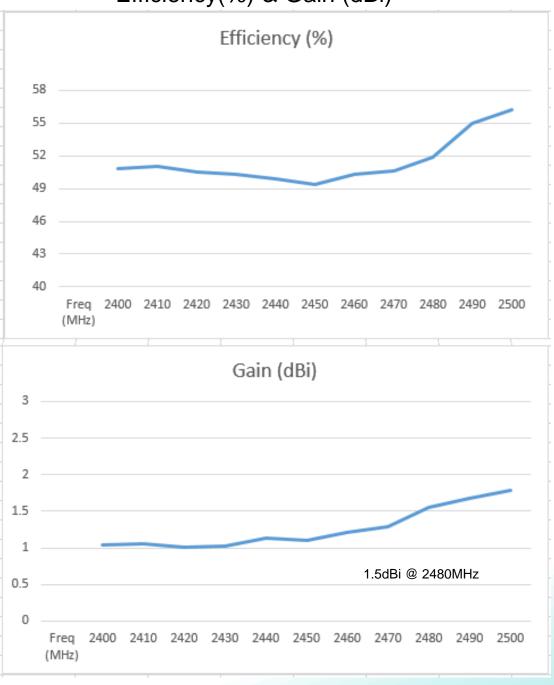

Issue: 2137

ROHS






Description: FPC 2.4G antenna


PART NUMBER: W3921XXXXX

CHARTS

Typical free space radiation pattern WIFI2.4GHz

(*) All RF parameters measured on 2mm thick PC plate



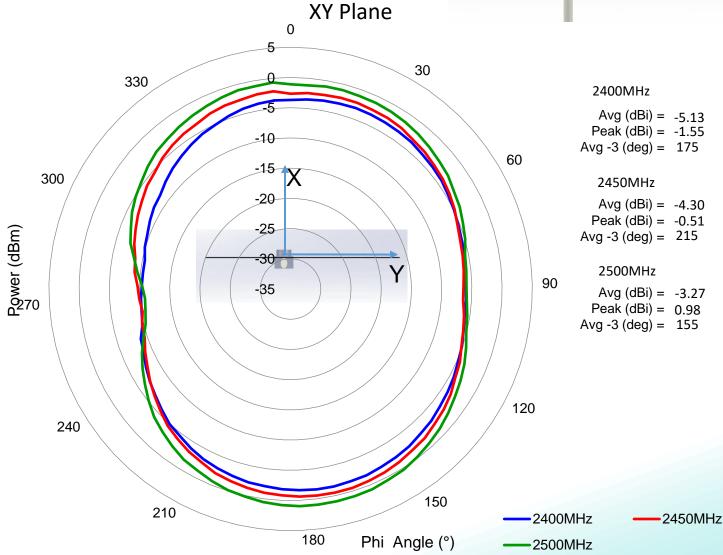

Issue: 2137

ROHS





Description: FPC 2.4G antenna

PART NUMBER: W3921XXXXX

CHARTS Typical free space radiation pattern WIFI2.4GHz (*) All RF parameters measured on 2mm thick PC plate **ZX Plane** 0 30 330 2400MHz Avg (dBi) = -2.49Peak (dBi) = 0.92Avg - 3 (deg) = 8560 -15 300 2450MHz -20 Avg (dBi) = -2.57Peak (dBi) = 1.05 Power (dBm) -25 Avg - 3 (deg) = 85-30 2500MHz 90 -35 Avg (dBi) = -1.77Peak (dBi) = 1.68 Avg - 3 (deg) = 77.120 240 150 210 2400MHz 2450MHz 180 Theta Angle (°) 2500MHz





Description: FPC 2.4G antenna

PART NUMBER: W3921XXXXX

CHARTS Ζ Typical free space radiation pattern WIFI2.4GHz (*) All RF parameters measured on 2mm thick PC plate YZ Plane 30 0 330 2400MHz 5 Avg (dBi) = -4.38Peak (dBi) = 1.0210 Avg - 3 (deg) = 7060 -15 300 2450MHz -20 Avg (dBi) = -4.30Peak (dBi) = 1.17 Rower (dBm) -25 Avg - 3 (deg) = 50-30 2500MHz Ζ 90 -35 Avg (dBi) = -4.08Peak (dBi) = 1.83Avg - 3 (deg) = 27.120 240 150 210 2400MHz 2450MHz 180 Theta Angle (°) 2500MHz





Description: FPC 2.4G antenna

PART NUMBER: W3921XXXXX

PACKAGING

10PCS/PE bag 10 PE bag/foam bag 50 foam bag/ carton box

Total 5000PCS/Carton box



