



思锐E30B 双色温LED柔光灯



使用手册


前言

双色温LED柔灯E30B是超薄设计的多用途摄的长亮摄影灯，采用侧发光的设计，使得光线输出更均匀柔和，轻便和双供电模式设计，方便室内和外排使用，适用于静物拍摄、人物拍摄、视频拍摄、直播等场景。

主要特点

- (1) 轻巧便携，方便手持，自由布光。
- (2) LED双色温模式和12种情景特效模式自由调节。
- (3) 侧发光布置和多重柔光设计，照度高的同时光线柔和和不刺眼。
- (4) 支持手机APP控制，可实现多灯联控。


包装清单



灯体* 1



适配器 * 1



便携袋*1




保修卡*1



多功能手柄* 1

产品介绍

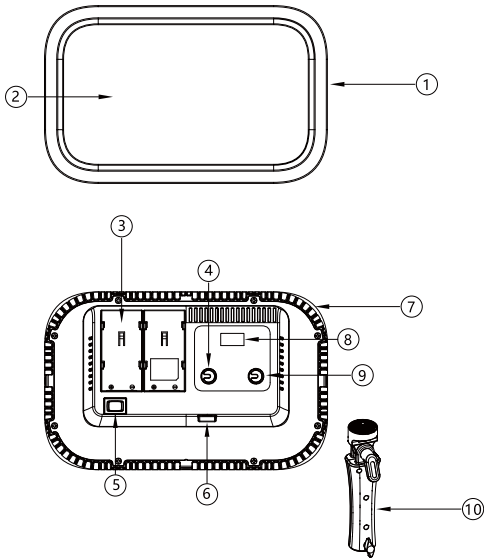


| | | | |
|---|-------|----|--------|
| 1 | 边框 | 6 | DC电源插座 |
| 2 | 发光面 | 7 | 散热口 |
| 3 | 电池安装座 | 8 | 屏幕 |
| 4 | SET旋钮 | 9 | DIM旋钮 |
| 5 | 电源开关 | 10 | 多功能手柄 |

电源管理


- 1、适配器供电
输入100-240V,50/60Hz，1.5A,输出：16.8V,3A
- 2、外置电池供电
安装座装2个NP-F970电池即可供电。（电池盒只供电池放电，不能充电，需两个电池同时使用）

操作说明

- 1、开关机
使用电池供电时，开关往“ I ”按下开机，往中间复位关机。
使用适配器供电时，开关往“ II ”按下开机，往中间复位关机。




- 2、模式选择：短按SET旋钮选择CCT模式/FX特效模式
2.1 CCT模式。



色温 亮度

- 2.1.1 色温调节：旋转SET旋钮调节色温，最小变量100K，调节范围2800-7000K。
- 2.1.2 亮度调节：旋转DIM旋钮，最小变量1%，调节范围0-100%。

2.2、情景特效模式



- 2.2.1 转动SET旋钮选择灯光特效，短按DIM选择A、B、C档位，转动DIM旋钮调整亮度。
- 2.2.2 亮度调节：旋转DIM旋钮，最小变量1%，调节范围0-100%。
- 2.2.3 情景特效模式有12类，用户可以根据需求选择：

| 序号 | 显示 | 场景 | 显示A | 显示B | 显示C |
|----|----|------|-----|-----|-----|
| 1 | | 闪电 | 间歇 | 频繁 | 持续 |
| 2 | | 闪光灯 | 闪光 | 发布会 | 狗仔队 |
| 3 | | 故障灯 | 间歇 | 频繁 | 持续 |
| 4 | | 电视荧幕 | 慢速 | 中速 | 快速 |
| 5 | | 蜡烛 | 间歇 | 频繁 | 持续 |
| 6 | | 火焰 | 柴火 | 篝火 | 火灾 |
| 7 | | 烟花 | 短暂 | 连续 | 演出 |
| 8 | | 爆炸 | 间歇 | 频繁 | 持续 |
| 9 | | 色温循环 | 慢速 | 中速 | 快速 |
| 10 | | 脉冲 | 慢速 | 中速 | 快速 |
| 11 | | 电焊 | 间歇 | 频繁 | 持续 |
| 12 | | SOS | 慢速 | 中速 | 快速 |

3、连接手机APP


- 3.1. 长按SET打开蓝牙（再次长按SET关闭蓝牙）
- 3.2. 扫描二维码下载“SIRUI Light”手机APP
- 3.3. 手机打开蓝牙，在“SIRUI Light”APP中连接对应的灯就可通过APP控制灯。



具体操作请参考手机APP使用说明。

4、安装和固定

- 4.1 通过底部或者侧面1/4螺丝孔可以固定在带1/4螺丝柱的灯架或者桌面支架上使用。

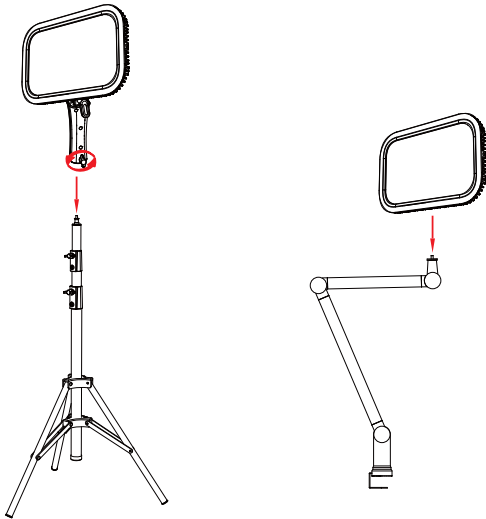

产品参数

| | |
|-----------|--------------|
| 型号 | E30B |
| 产品尺寸 | 264*164*36mm |
| 产品重量 | 约880g |
| LED功率 | 约25W |
| 色温范围 | 2800K~7000K |
| 特效模式 | 12类 |
| 裸灯100%光照度 | 1m距离 750lux |
| TLCI | 平均98 |
| CRI | 平均96 |
| 工作环境温度 | -10℃-45℃ |
| 控制方式 | 手机APP |
| 蓝牙无线控制距离 | 15m |

设计和规格如有变更，恕不另行通知。

注意事项


- 1、请勿将灯放在高温高湿的地方。
- 2、请勿湿手接触产品，不可把产品浸入水中或暴露在雨中。
- 3、请使用配套适配器，其他规格有可能导致硬件损坏。如使用其他电源适配器造成的产品故障，不予保修。

维护保养

- 1、灯体在工作时，如发现异常，应立即关掉电源，查明原因。
- 2、灯体稍有发热为正常现象。
- 3、维修由本厂维修部负责。
- 4、本产品保修一年，消耗品适配器、电源线等不在一年保修范围内。
- 5、经发现，擅自检修此灯的，将取消一年保修期，维修需要收取相关费用。
- 6、如果本品出现故障或者被水淋湿，在专业人员维修后方可继续使用。
- 7、设计和规格如有变更，恕不另行通知。



SIRUI E30B Bi-Color Soft LED Panel



User Manual


Foreword

This Bi-color LED Light E30B is a slim multi-purpose continuous light. The use of side-view SMD LEDs makes the lights given out more soft and even. Featuring a compact body and supporting both battery and adapter power supplies, this light is suitable for various shooting scenarios, e.g. live, portrait shooting, video recording, etc.

Features

1. Compact and lightweight, easy to be held in hand.
2. Freely switch between the LED bi-color mode and the light effect mode.
3. The use of side-view SMD LEDs makes sure the lights given out are bright without being too harsh.
4. Support group control and APP control.


What's in the Box



Light Body *1



Adapter *1



Pouch*1




Warranty Card*1



Handle*1

Names of Parts

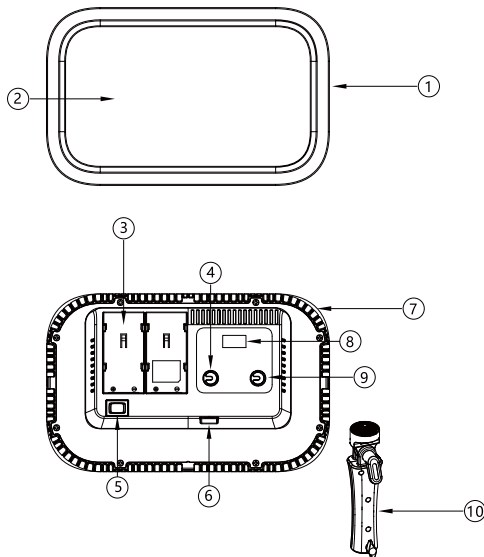

| | | | |
|---|---------------------|----|-----------------|
| 1 | Frame | 6 | DC Power Socket |
| 2 | Light Board | 7 | Thermovent |
| 3 | Battery Compartment | 8 | Display |
| 4 | SET Dial | 9 | DIM Dial |
| 5 | Power Switch | 10 | Handle |

Power Management

1. Adapter Power Supply

Input: 100-240V~50/60Hz, 1.5A, output: 16.8V 3A

2. External Battery Power Supply


Install two NP-F970 batteries into the battery compartment. (The battery case is unable to charge the batteries. When powered by the battery, make sure there are at least two batteries in the case.)

Operation

1. Power On/Off


When powered by the battery, hit "I" to turn on the light, press the button in the middle to turn off the light.

When powered by the adapter, hit "II" to turn on the light, press the button in the middle to turn off the light.



2. Mode Selection: Hit the SET dial to switch between the CCT mode and FX special effect mode.


2.1 CCT Mode



2.1.1 Color temperature adjustment: turn the SET dial to adjust the color temperature from 2800K to 7000K.

2.1.2 Brightness adjustment: turn the DIM dial to adjust the brightness from 0% to 100%.

2.2 Special Effects Mode



- 2.2.1 Turn the SET dial to select a special effect. Hit the DIM dial to adjust the speed (A, B, C). Turn the DIM dial to adjust the brightness.
- 2.2.2 Brightness adjustment: turn the DIM dial to adjust the brightness from 0% to 100%.
- 2.2.3 There are 12 situational special effects for your choice:

| No. | Display | Situation | DisplayA | DisplayB | DisplayC |
|-----|---------|-------------|---------------|------------------|-------------|
| 1 | | Lightning | Discontinuous | Frequent | Sustainable |
| 2 | | Flash | Flash | Press Conference | Paparazzi |
| 3 | | Broken Bulb | Discontinuous | Frequent | Sustainable |
| 4 | | TV | Slow | Medium | Quick |
| 5 | | Candle | Discontinuous | Frequent | Sustainable |
| 6 | | Fire | Firewood | Campfire | Fire Hazard |
| 7 | | Firework | Brief | Continuous | Show |
| 8 | | Blast | Discontinuous | Frequent | Sustainable |
| 9 | | RGB Cycle | Slow | Medium | Quick |
| 10 | | Impulse | Slow | Medium | Quick |
| 11 | | Welding | Discontinuous | Frequent | Sustainable |
| 12 | | SOS | Slow | Medium | Quick |

3. APP Control

- 3.1 Press and hold the SET dial to turn on Bluetooth. (Press and hold the SET dial again to turn off Bluetooth.)
- 3.2 Scan the QR code to download the "SIRUI Light" App.
- 3.3 Turn on Bluetooth, enter the "SIRUI Light" App. Select "E30B LED Light" from the device list.




Scan the QR code to download the App.

For detailed steps, please refer to the APP instruction manual.

4. Installation

- 4.1 Mount the LED light on a stand via the bottom/lateral 1/4" screw hole.

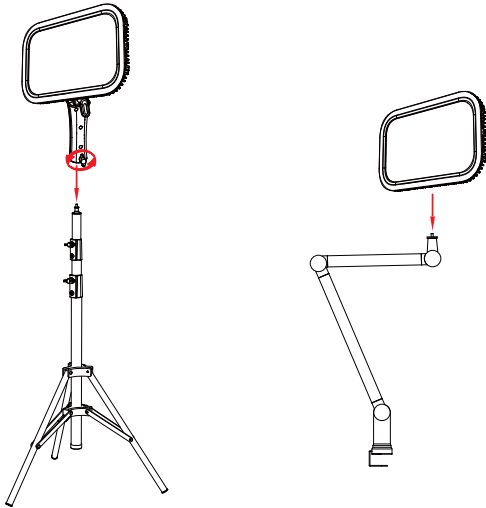

Specifications

| | |
|-------------------------------------|---------------|
| Model | E30B |
| Size | 264*164*36mm |
| Weight | about 880g |
| Power | about 25W |
| Color Temperature Range | 2800K~7000K |
| Special Effect | 12 |
| 100% Illuminance (LUX) | 750 lux at 1m |
| TLCI | 98 on average |
| CRI | 96 on average |
| Working Temperature | -10°C-45°C |
| Control Method | APP Control |
| Wireless Bluetooth Control Distance | 15m |

* Product design and specifications are subject to change without notice.

Warning

1. Always keep this product dry. Do not put it in high-temperature or in damp conditions.
2. Do not touch the product with wet hands. As this product doesn't have waterproof capability, please take measures of waterproof in rainy or damp environment.
3. Use of unauthorized power adapter may cause damage to the product and void the warranty.

Maintenance

1. If there is something wrong with the light when it is working, please turn it off first.
2. It is normal that the light gets a bit hot when it is working.
3. Maintenance must be performed by the authorized maintenance department which can provide original accessories.
4. This product, except for consumables, supports a one-year warranty.
5. Unauthorized service will void the warranty.
6. If the product had failures or was wetted, do not use it until it is repaired by professionals.
7. Changes made to the specifications or designs may not be reflected in this manual.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction