



1. Duty Cycle



1.1 Ant1



1.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	100.000	100.000	100.00	0.00	0.00
		2440	100.000	100.000	100.00	0.00	0.00
		2480	100.000	100.000	100.00	0.00	0.00
2M	SISO	2402	100.000	100.000	100.00	0.00	0.00
		2440	100.000	100.000	100.00	0.00	0.00
		2480	100.000	100.000	100.00	0.00	0.00

1.1.2 Test Graph

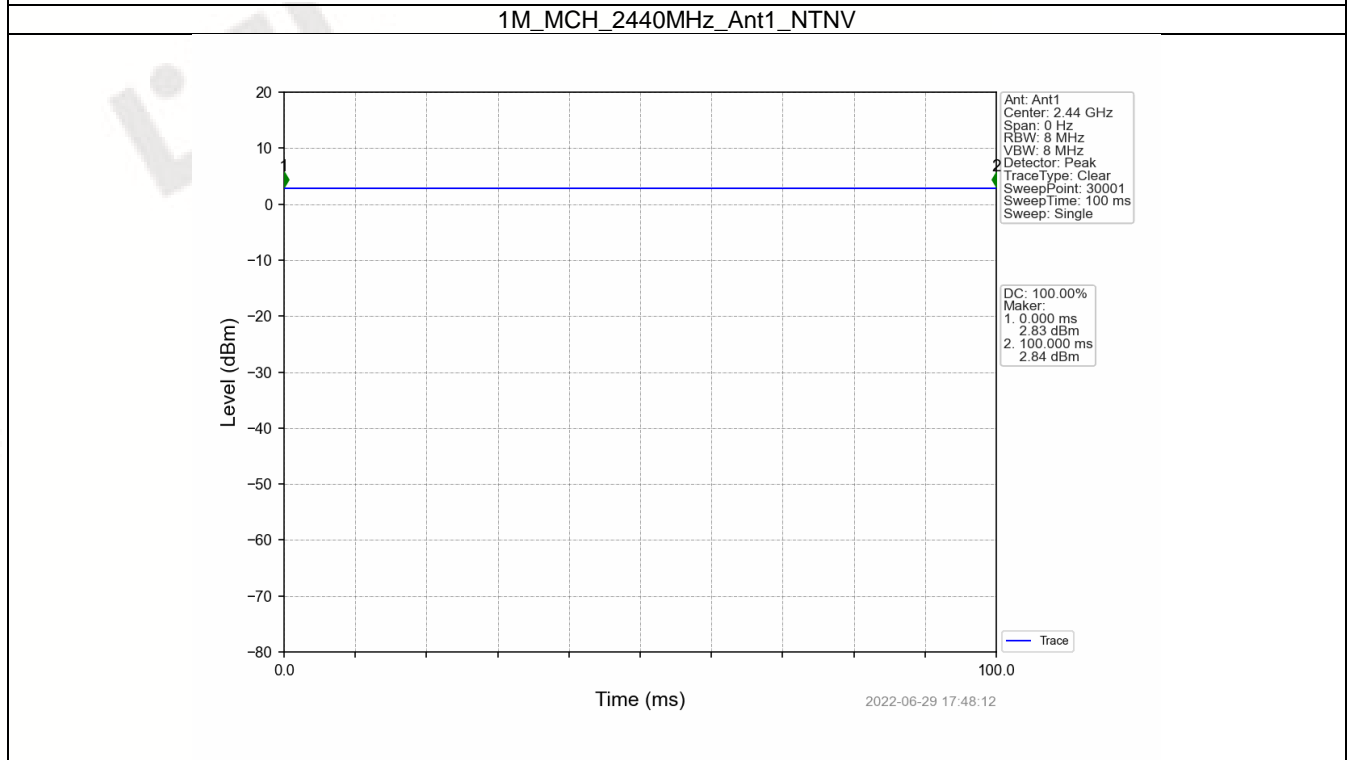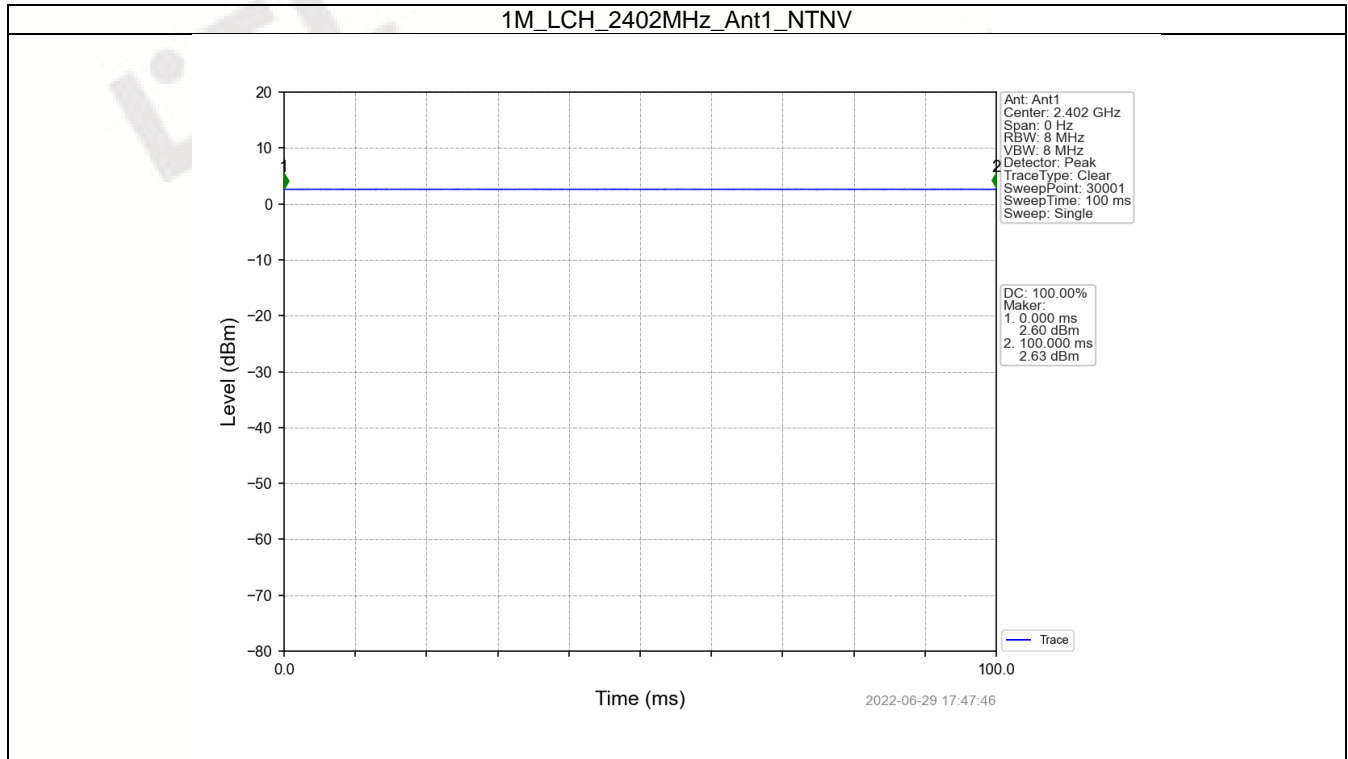

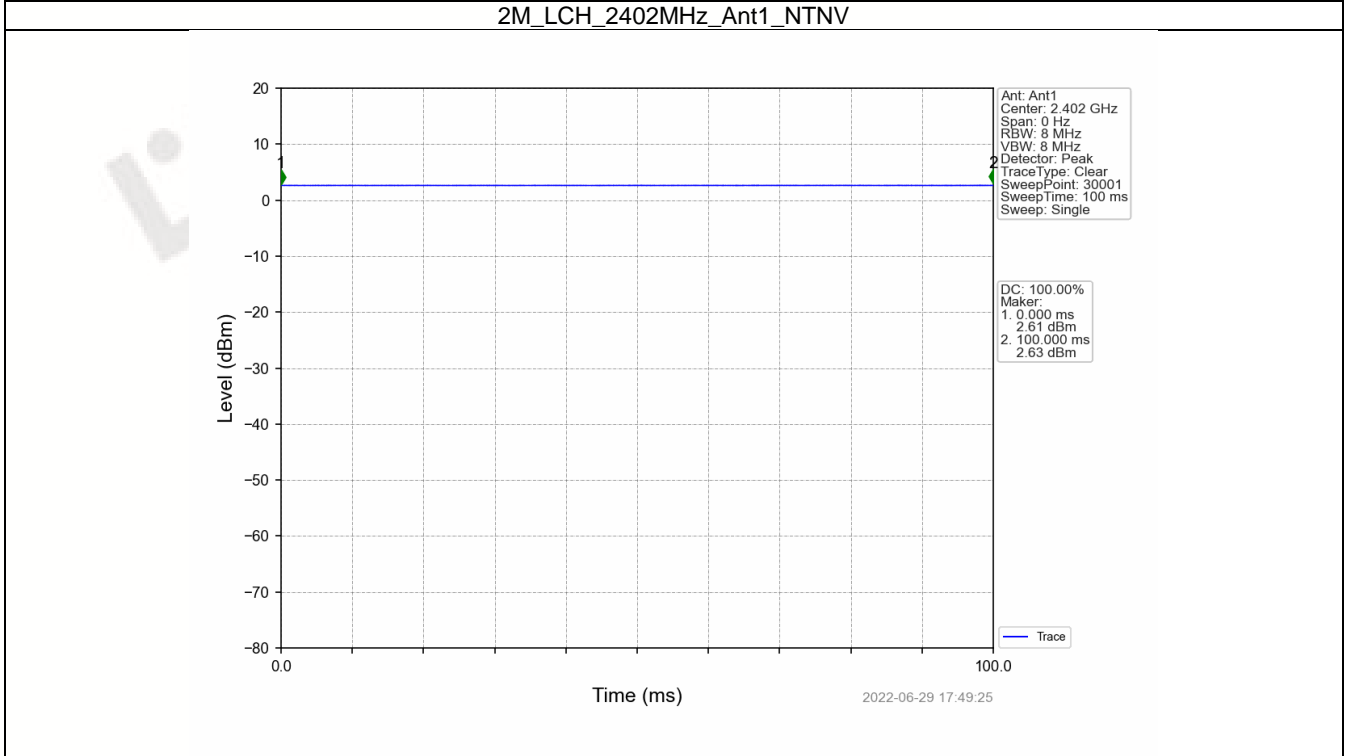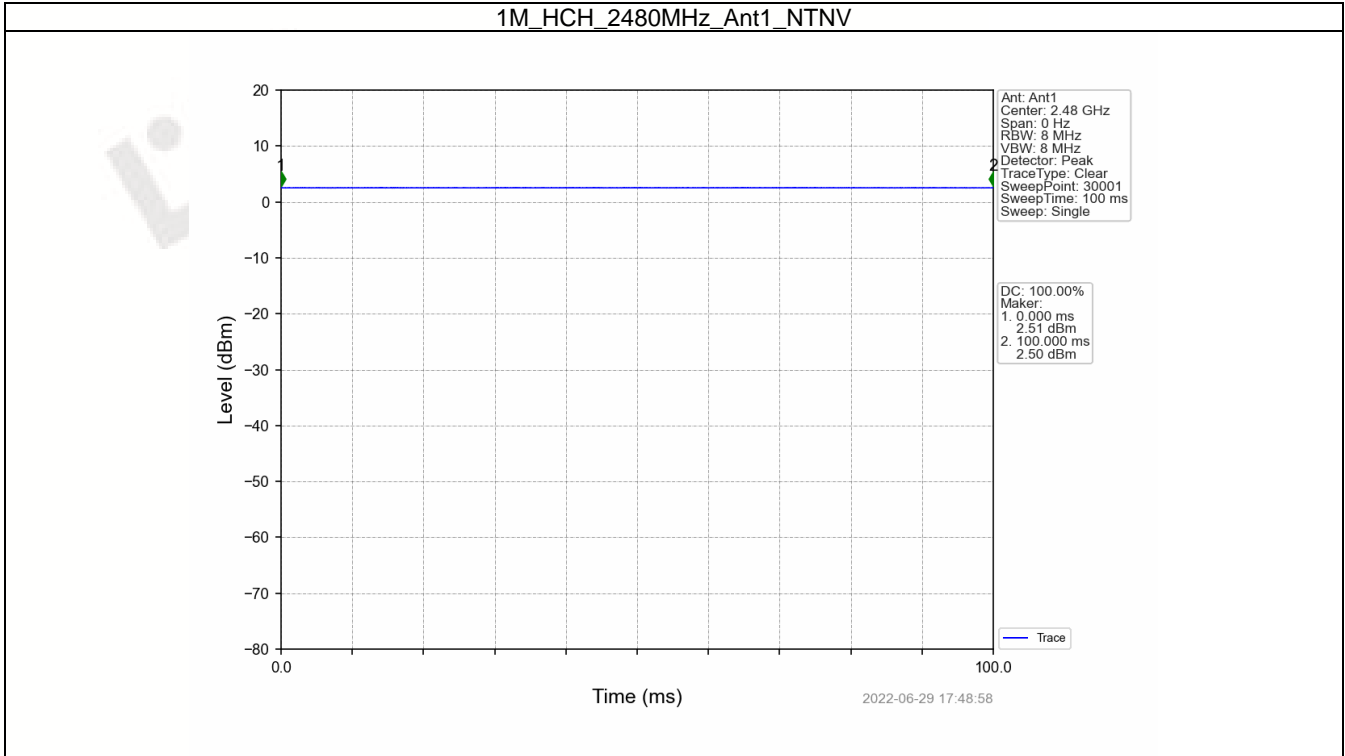

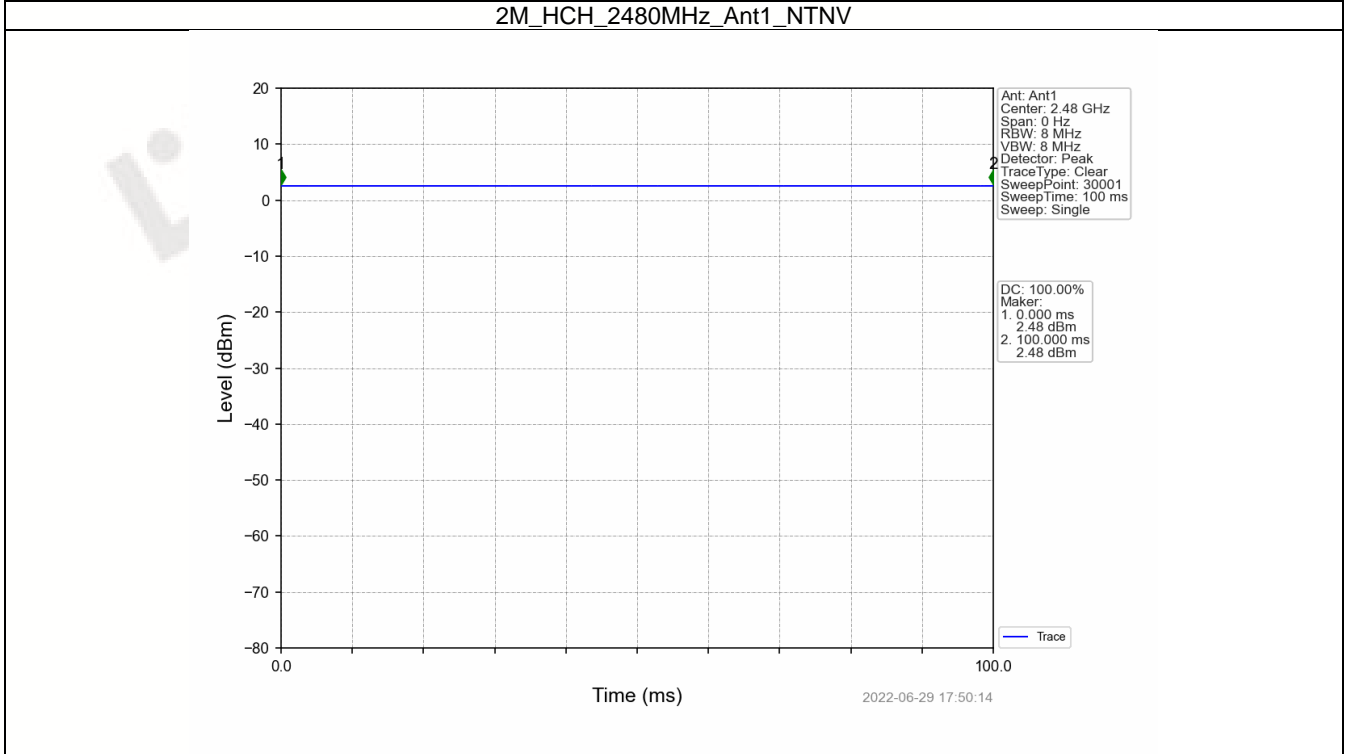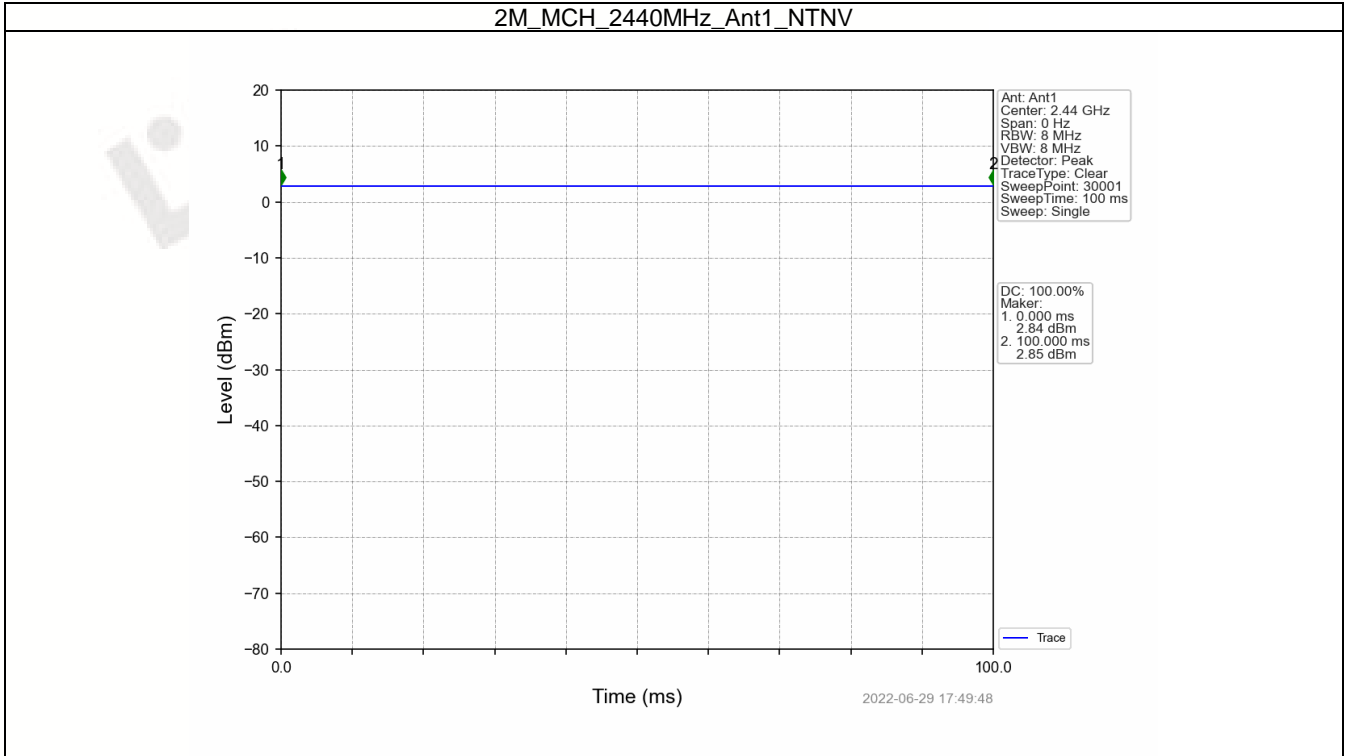



2. Bandwidth



2.1 OBW



2.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)	Verdict
				Result	
1M	SISO	2402	1	1.037	Pass
		2440	1	1.037	Pass
		2480	1	1.035	Pass
2M	SISO	2402	1	2.061	Pass
		2440	1	2.063	Pass
		2480	1	2.061	Pass

2.1.2 Test Graph

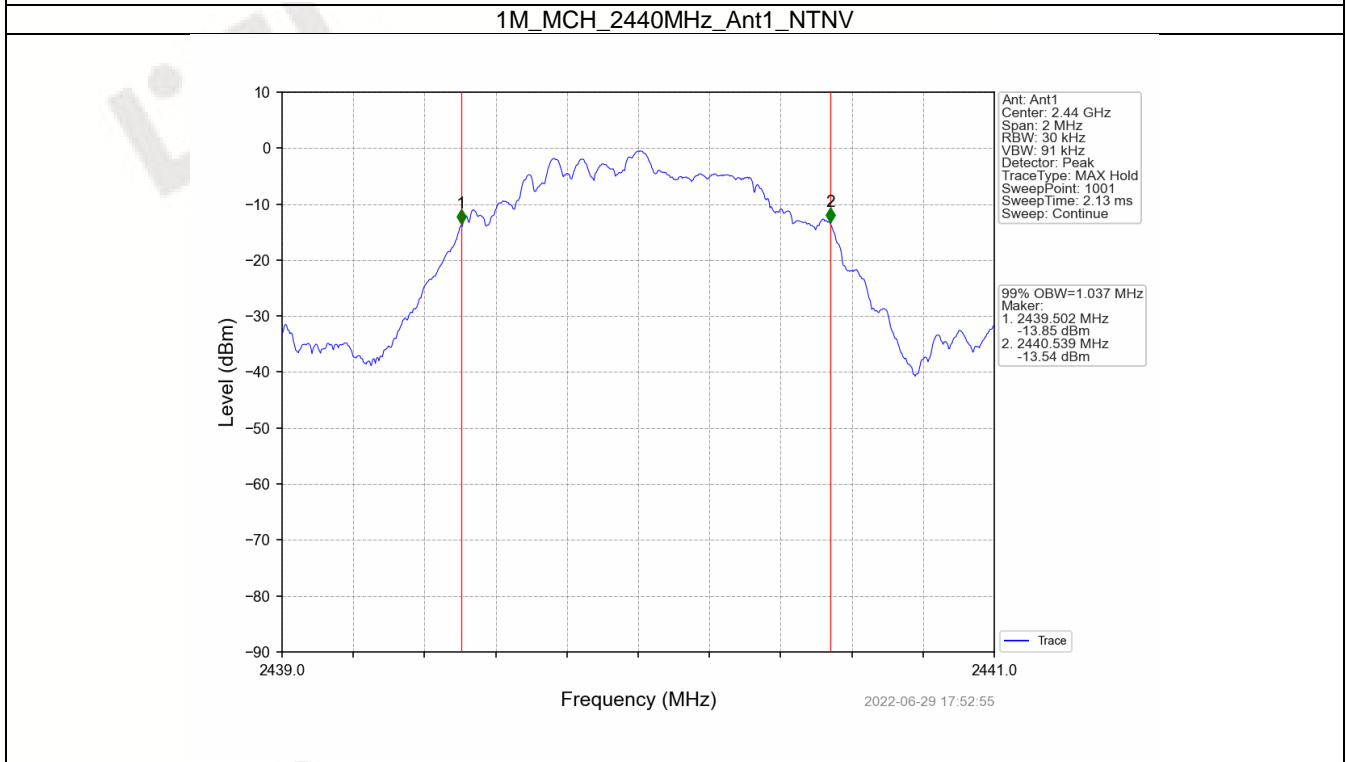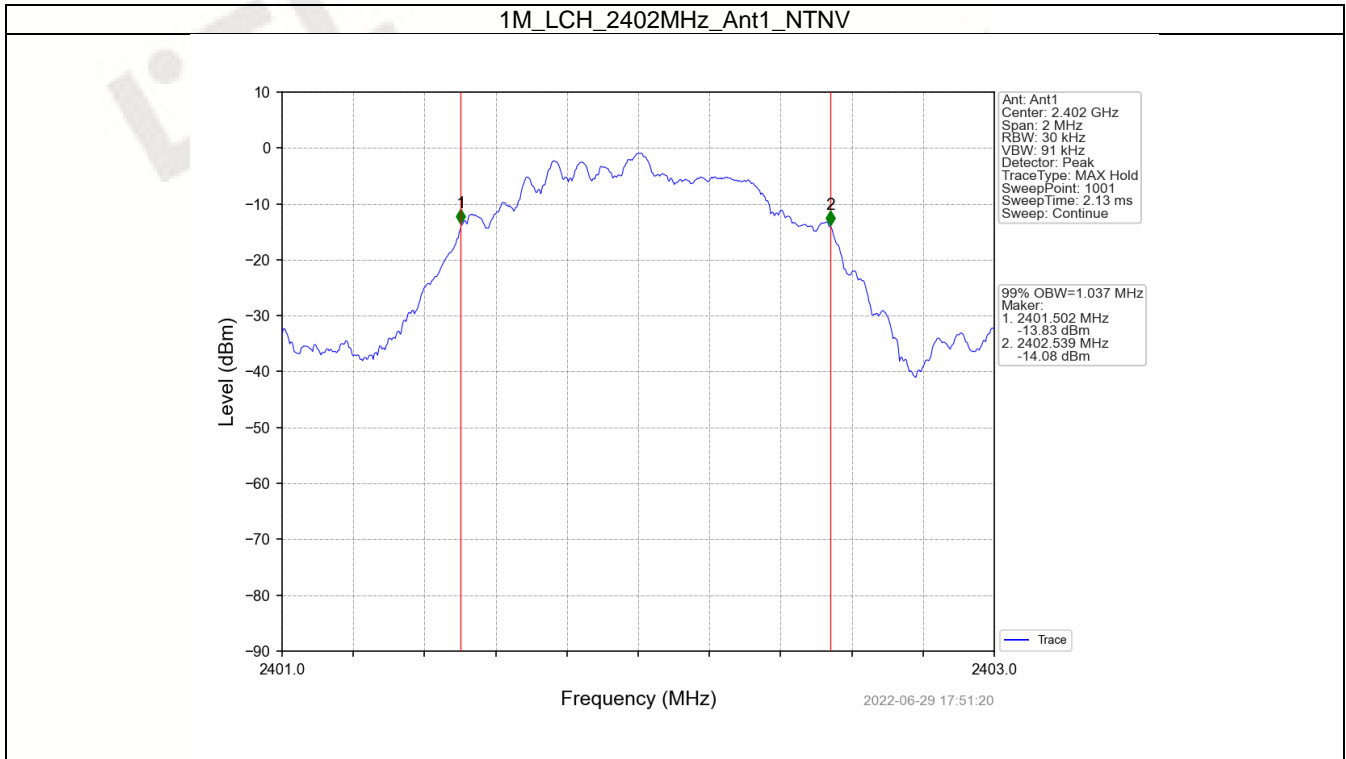

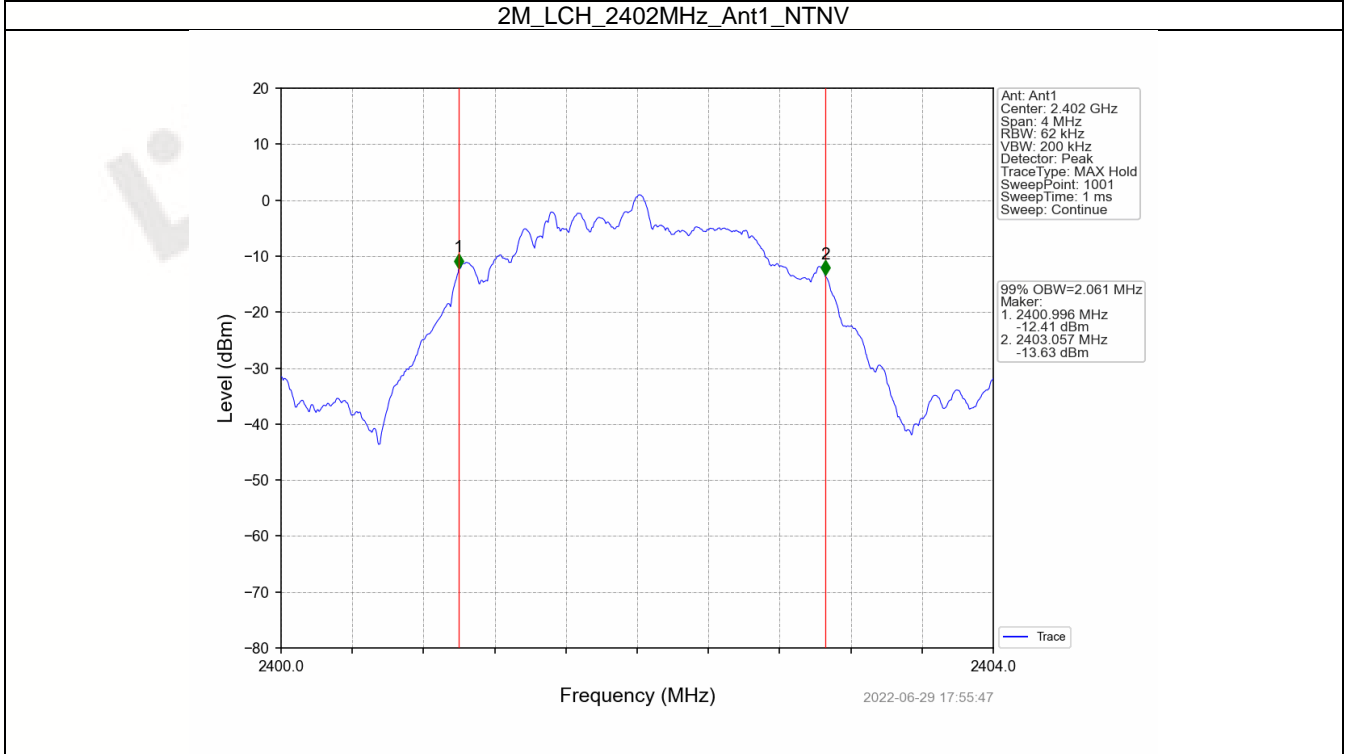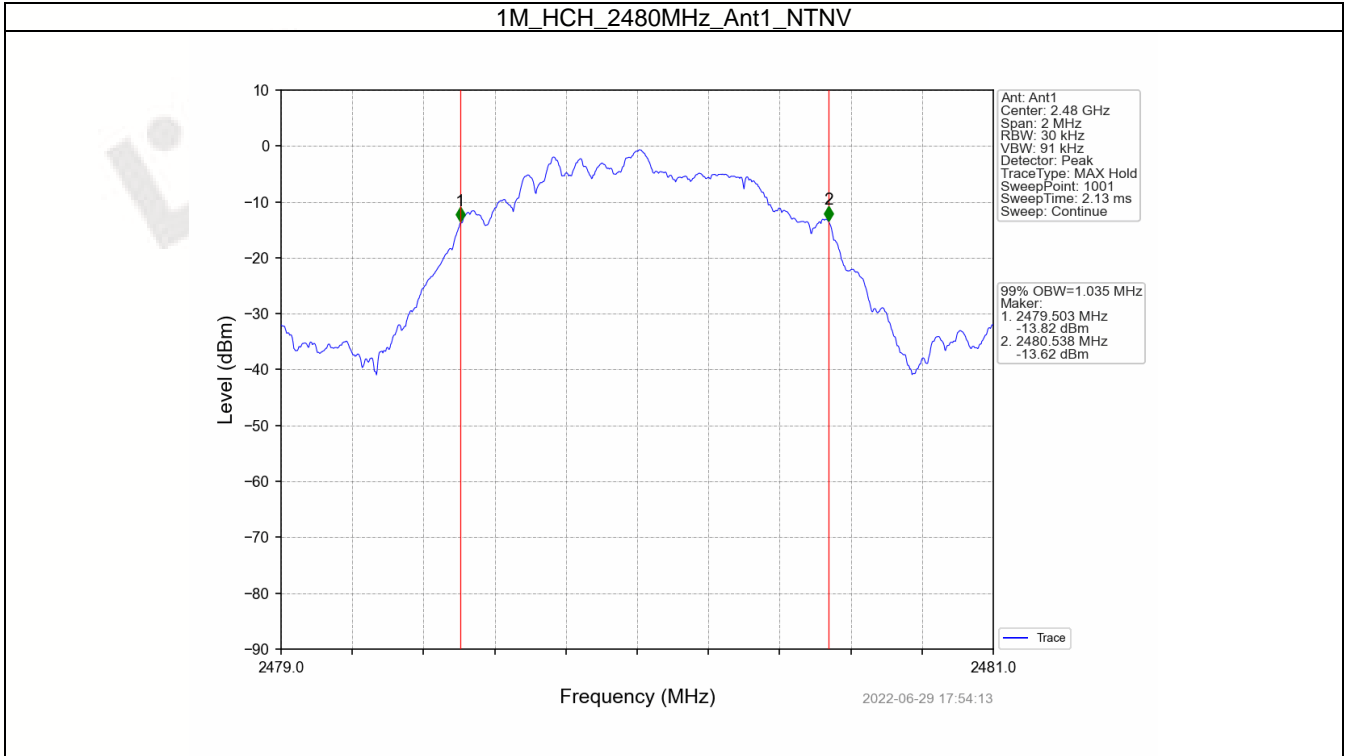

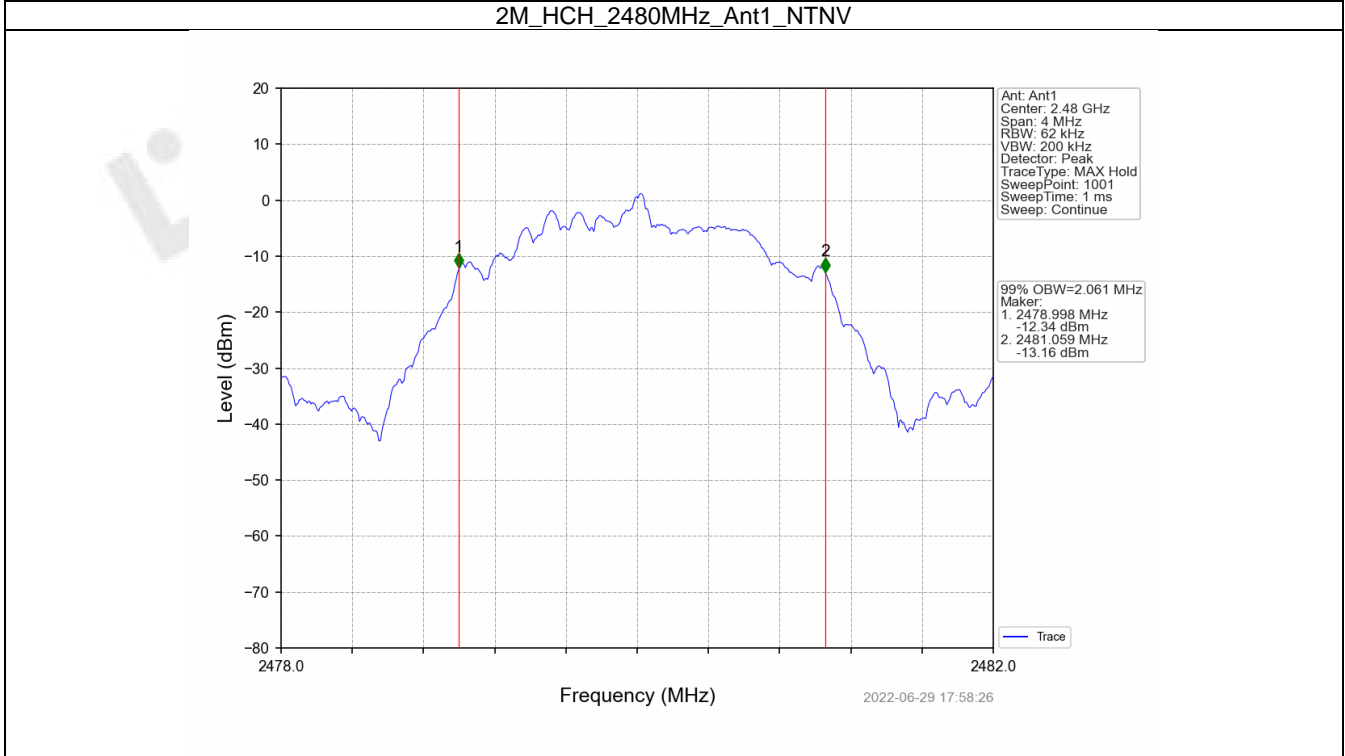
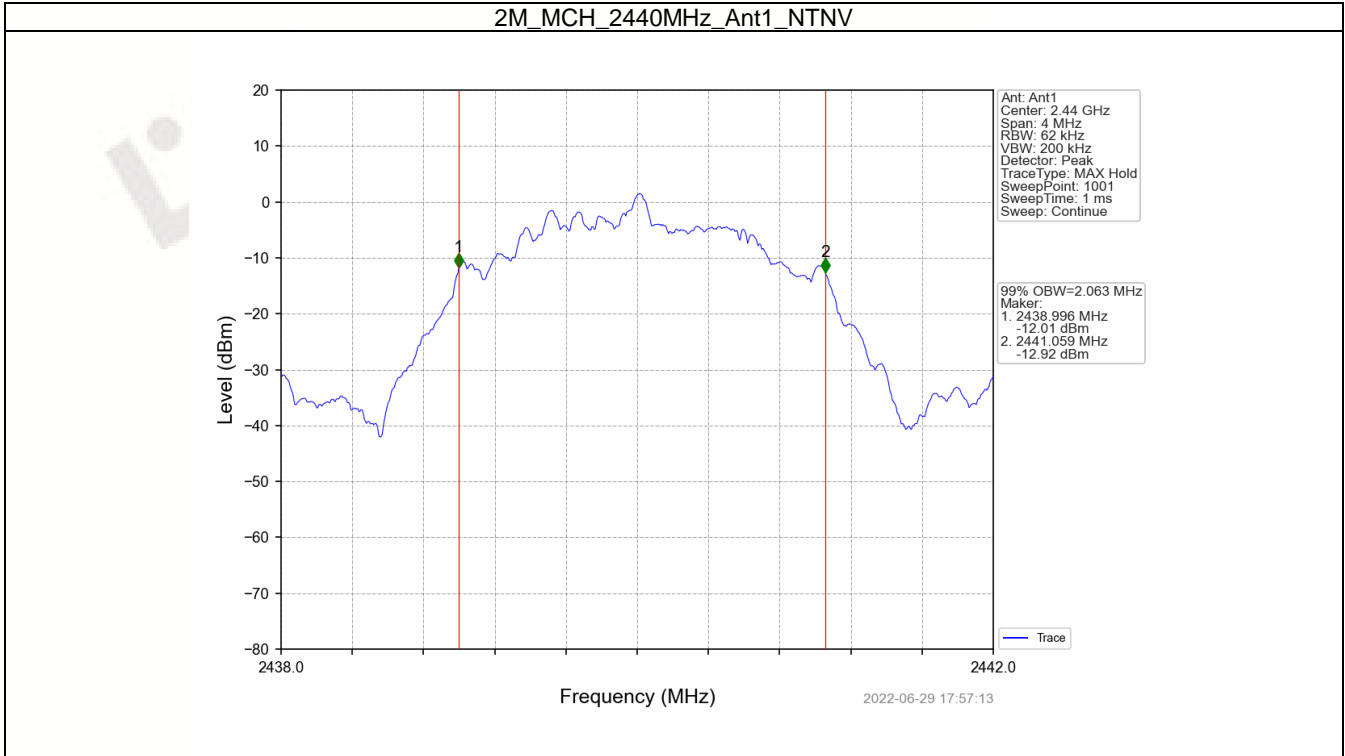




2.2 6dB BW



2.2.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.679	≥ 0.5	Pass
		2440	1	0.683	≥ 0.5	Pass
		2480	1	0.674	≥ 0.5	Pass
2M	SISO	2402	1	1.160	≥ 0.5	Pass
		2440	1	1.162	≥ 0.5	Pass
		2480	1	1.155	≥ 0.5	Pass

2.2.2 Test Graph

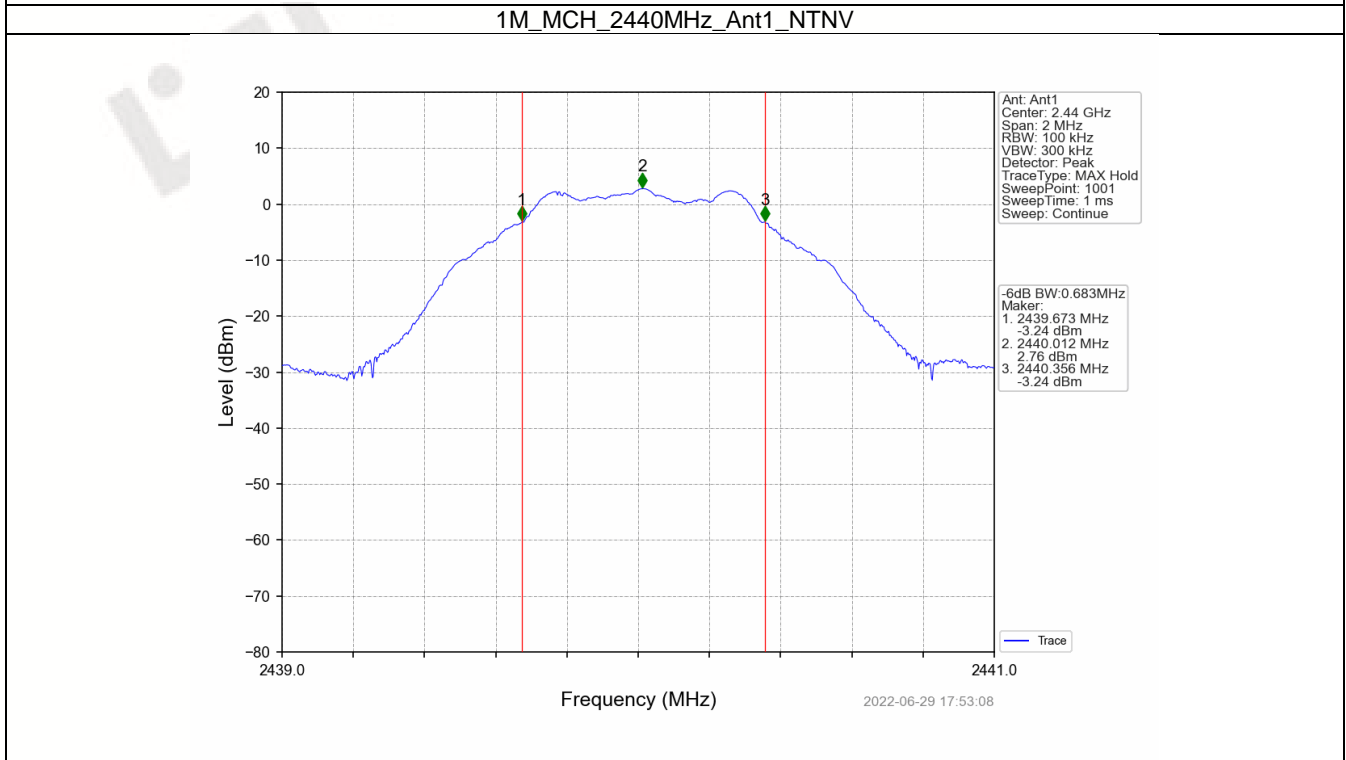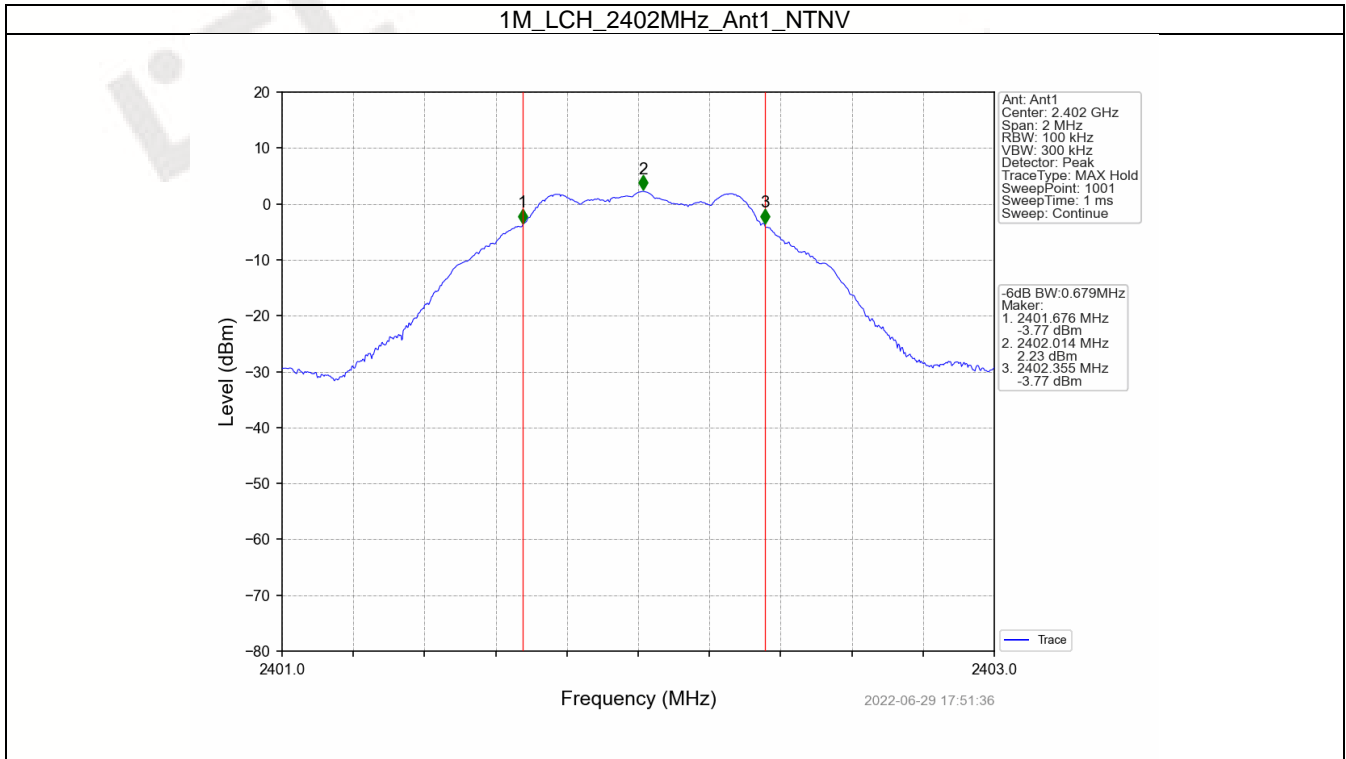

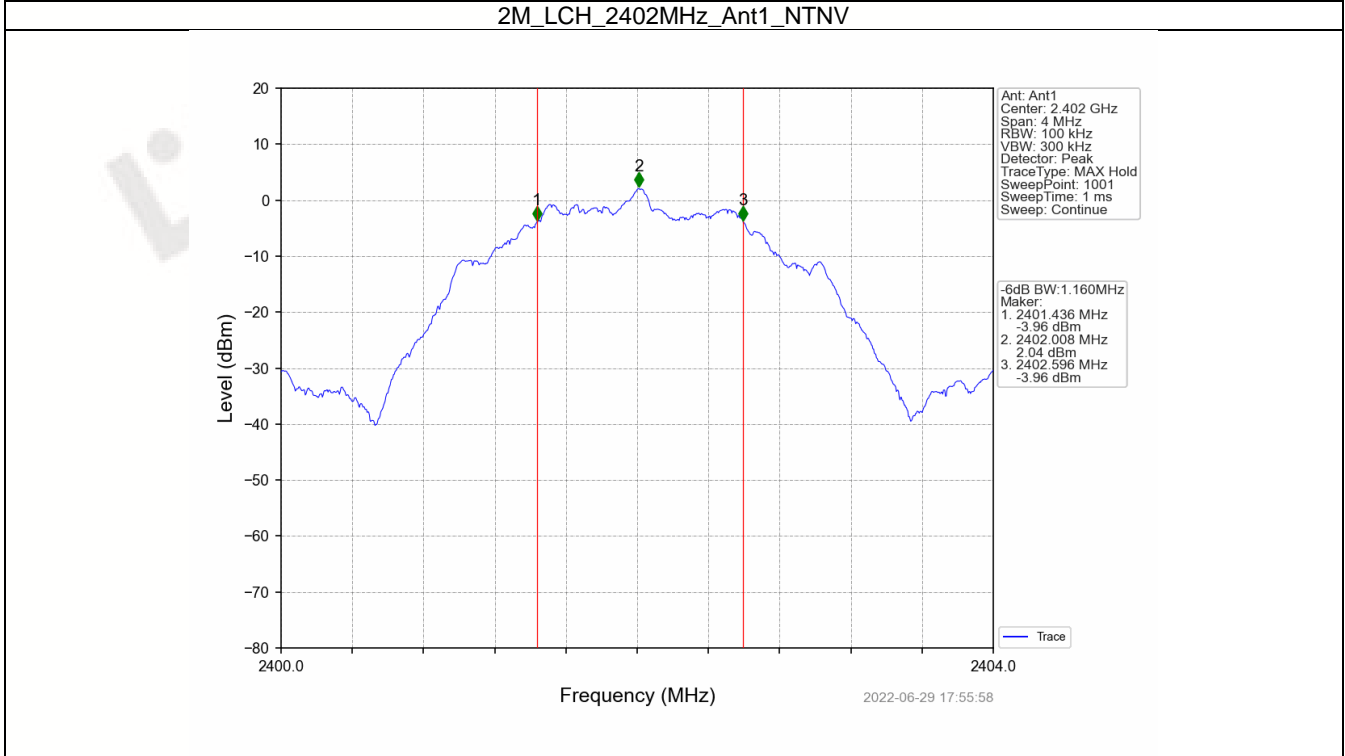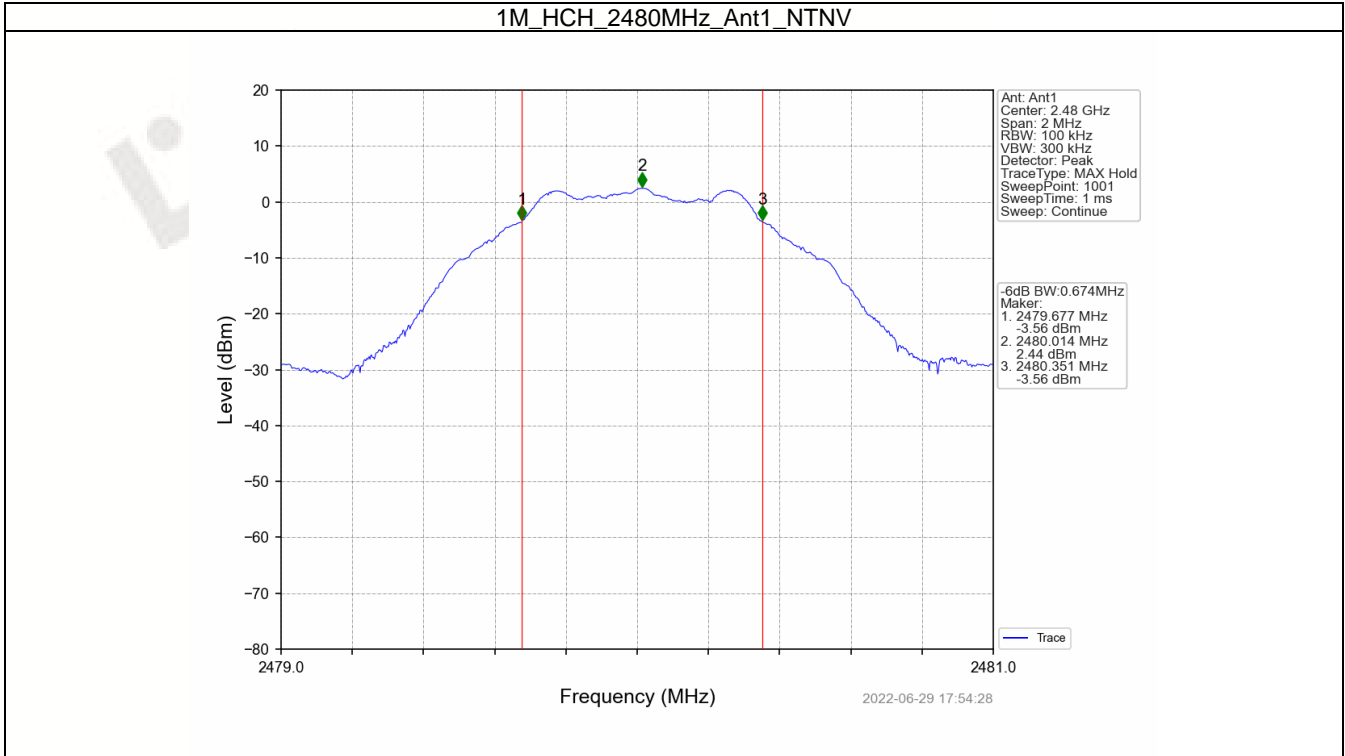

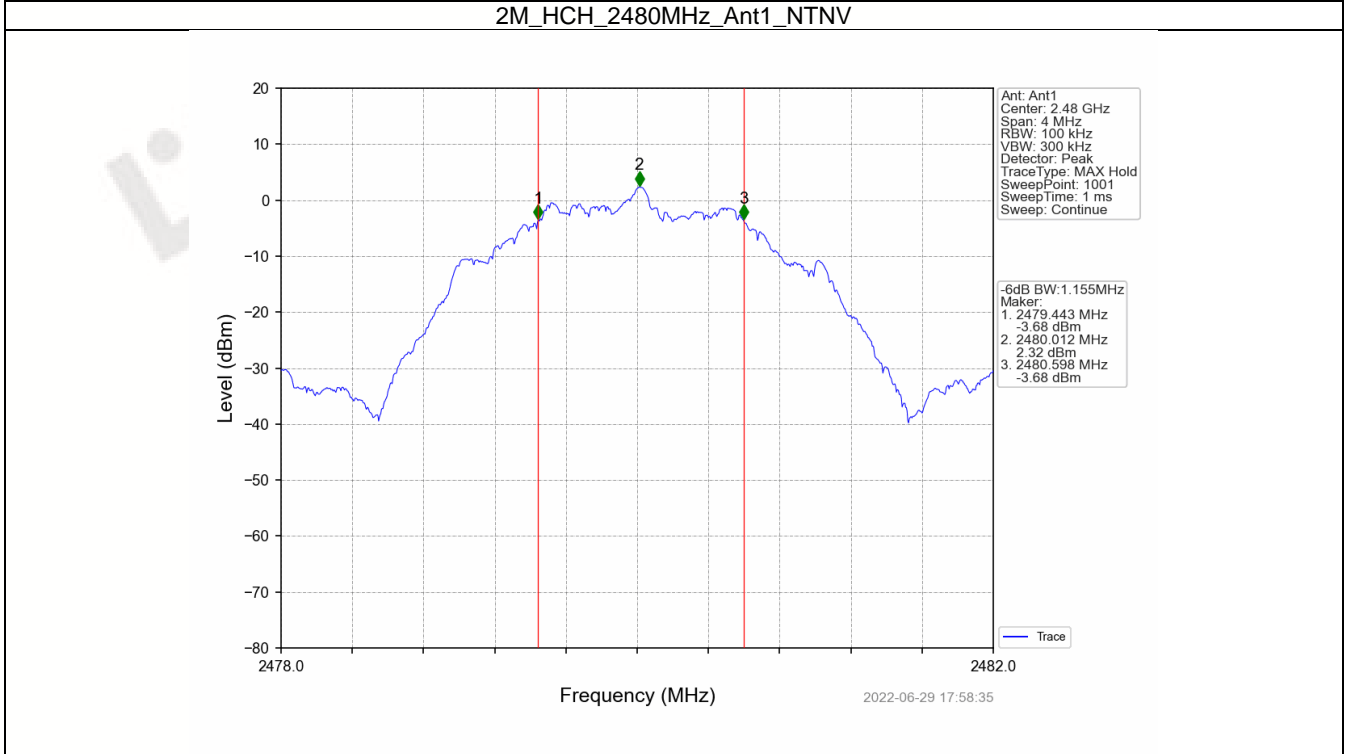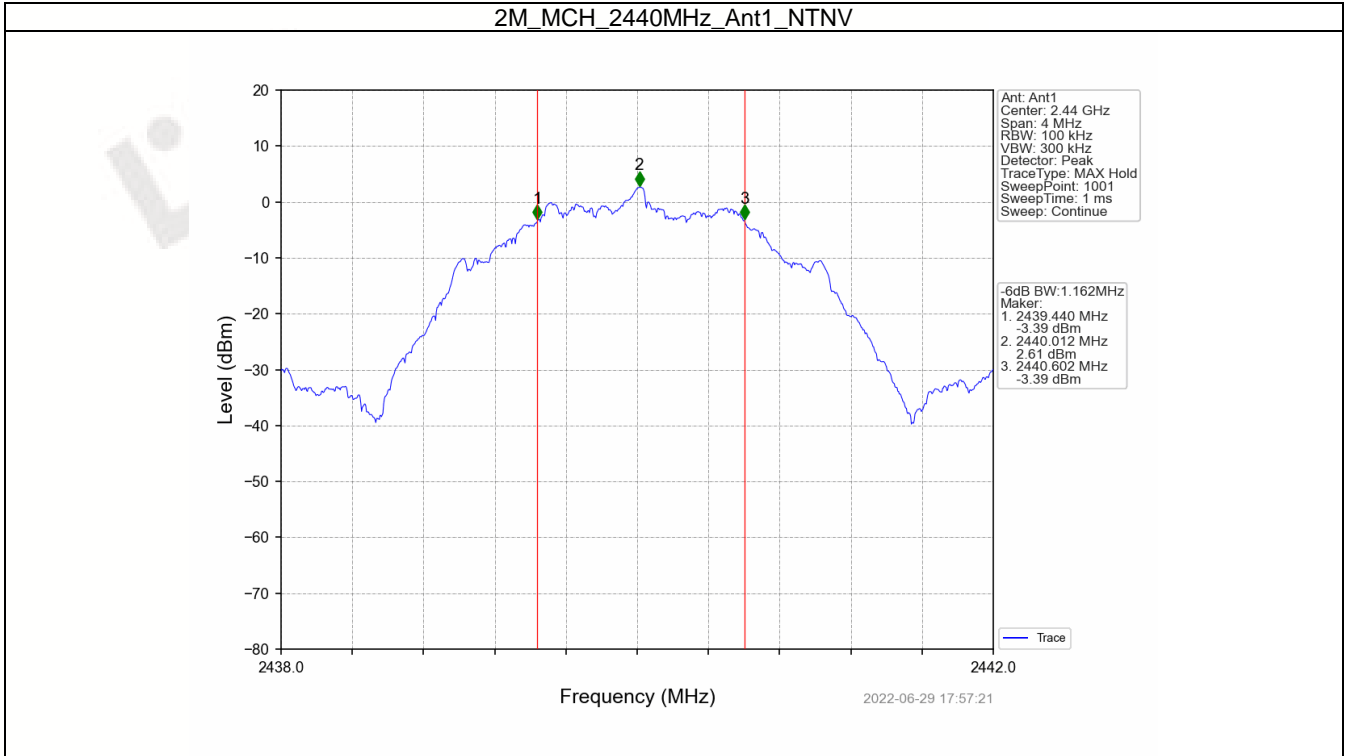

3. Maximum Conducted Output Power



3.1 Power



3.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	2.65	<=30	Pass
		2440	3.19	<=30	Pass
		2480	2.88	<=30	Pass
2M	SISO	2402	2.69	<=30	Pass
		2440	3.21	<=30	Pass
		2480	2.91	<=30	Pass


Note1: Antenna Gain: Ant1: 1.05dBi;

3.1.2 Test Graph

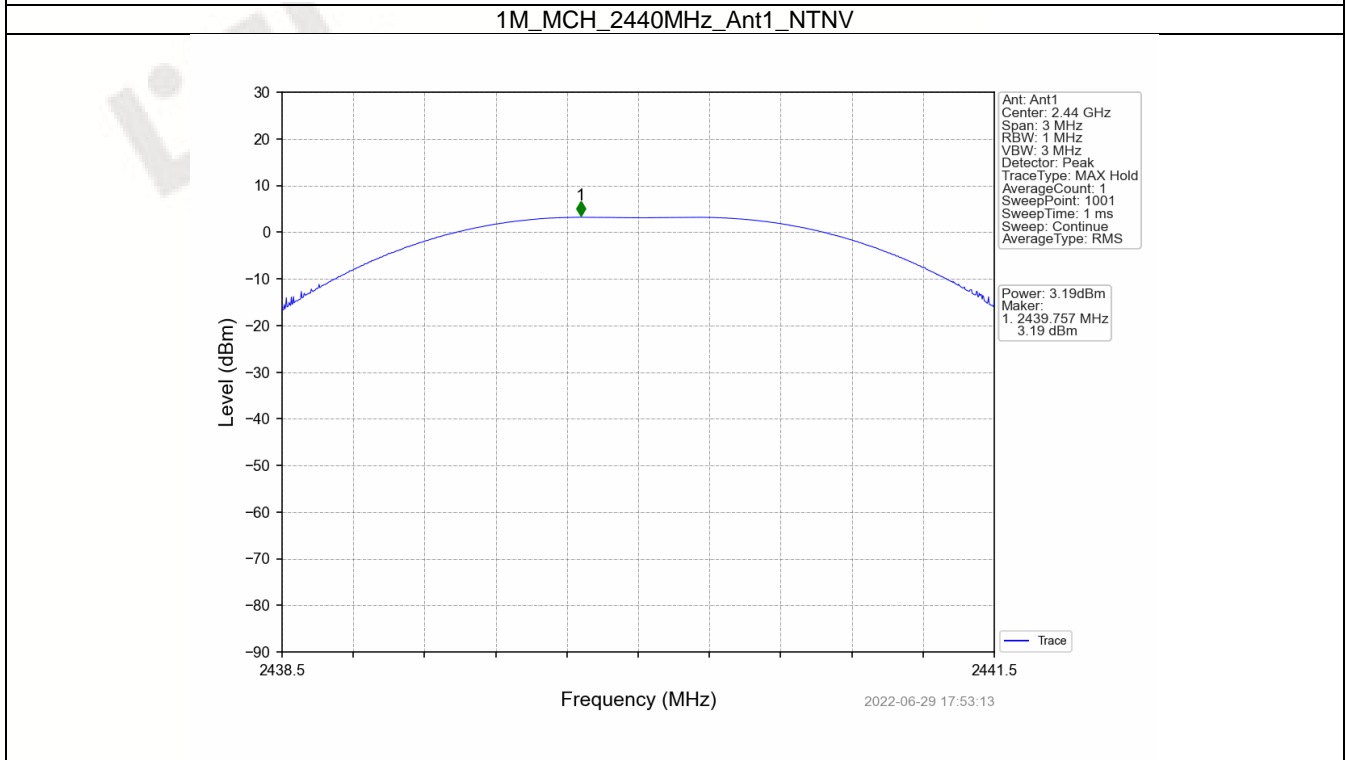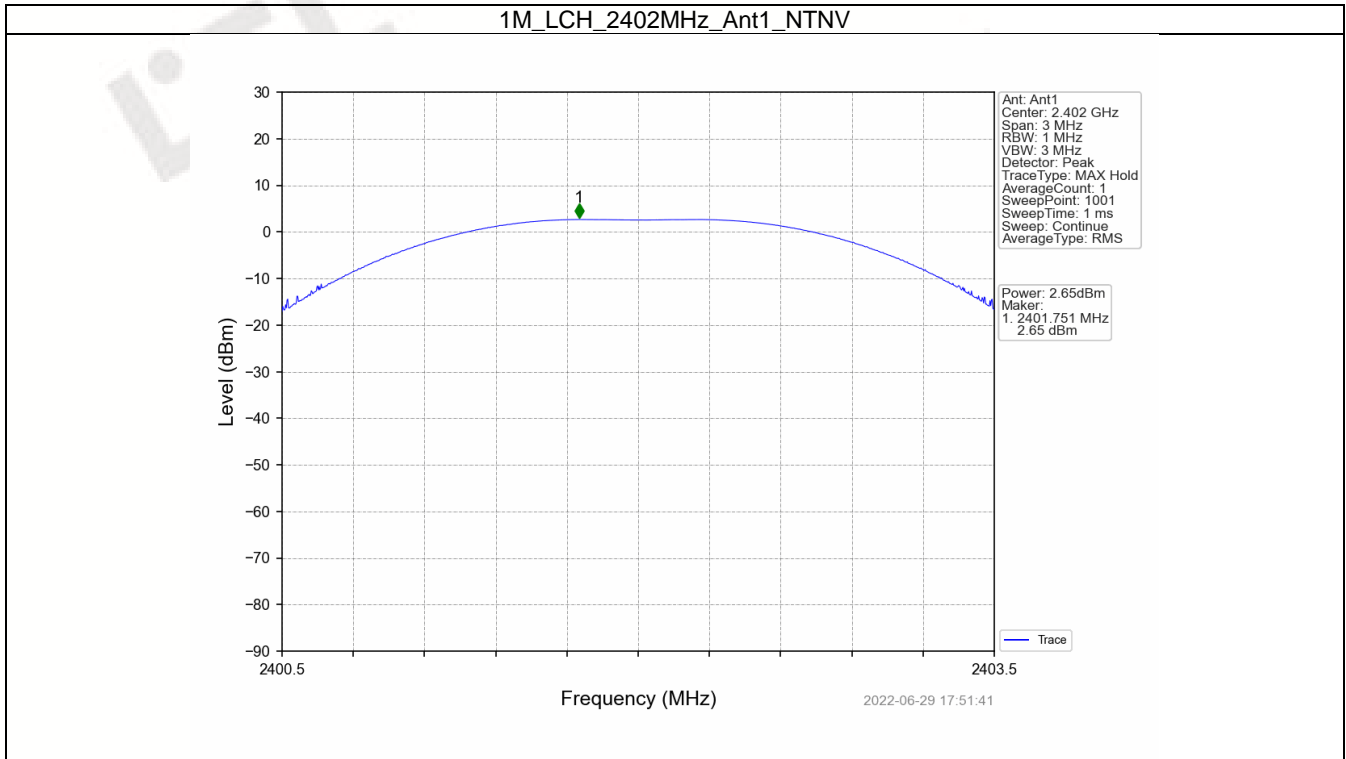


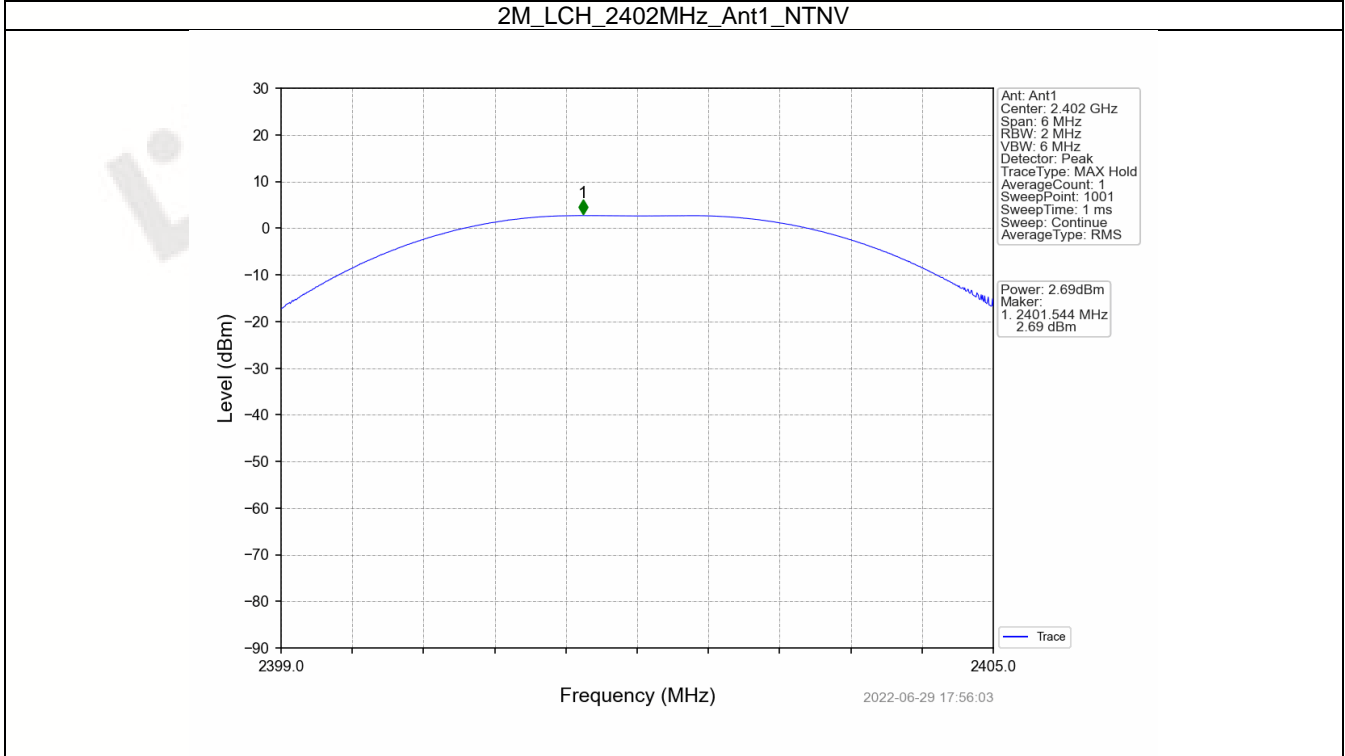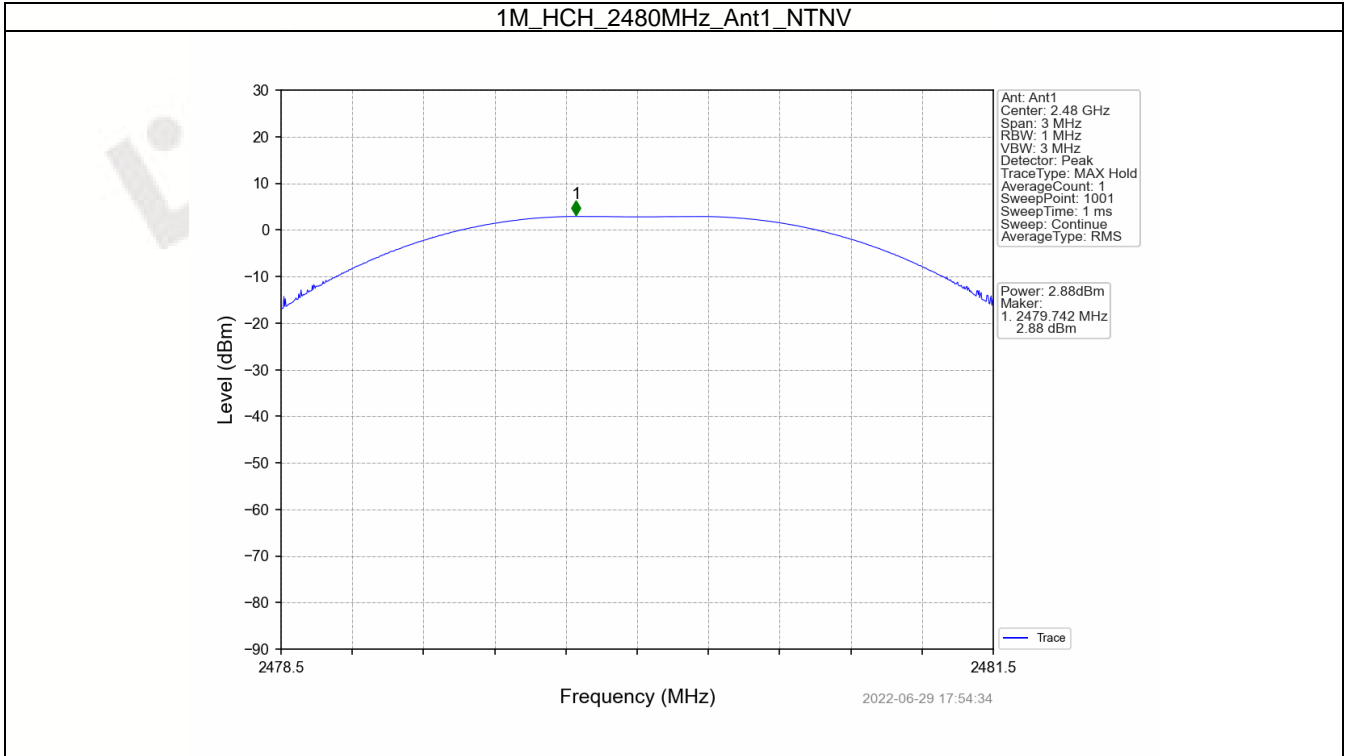

2M_MCH_2440MHz_Ant1_NTNV

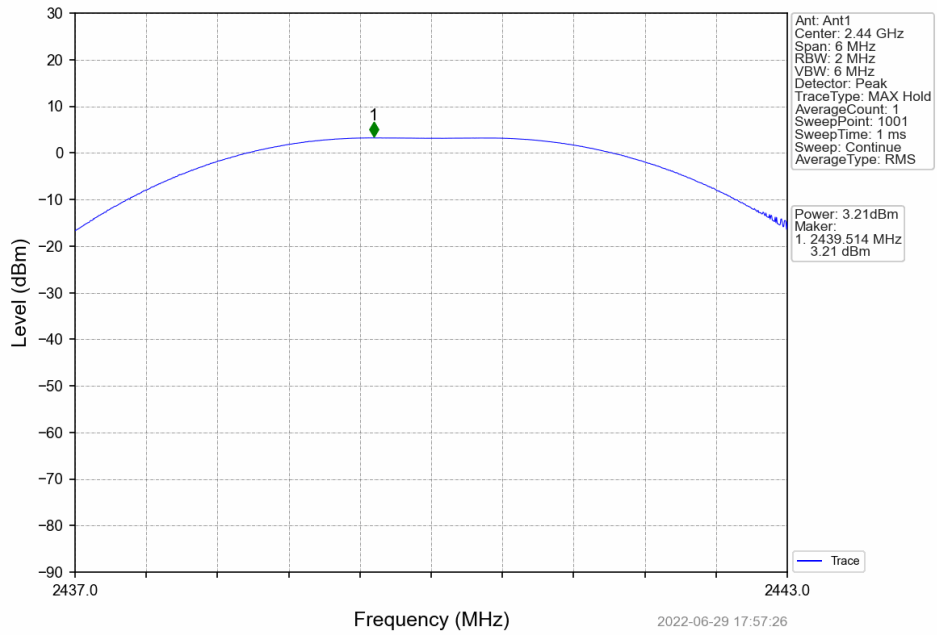

2M_HCH_2480MHz_Ant1_NTNV

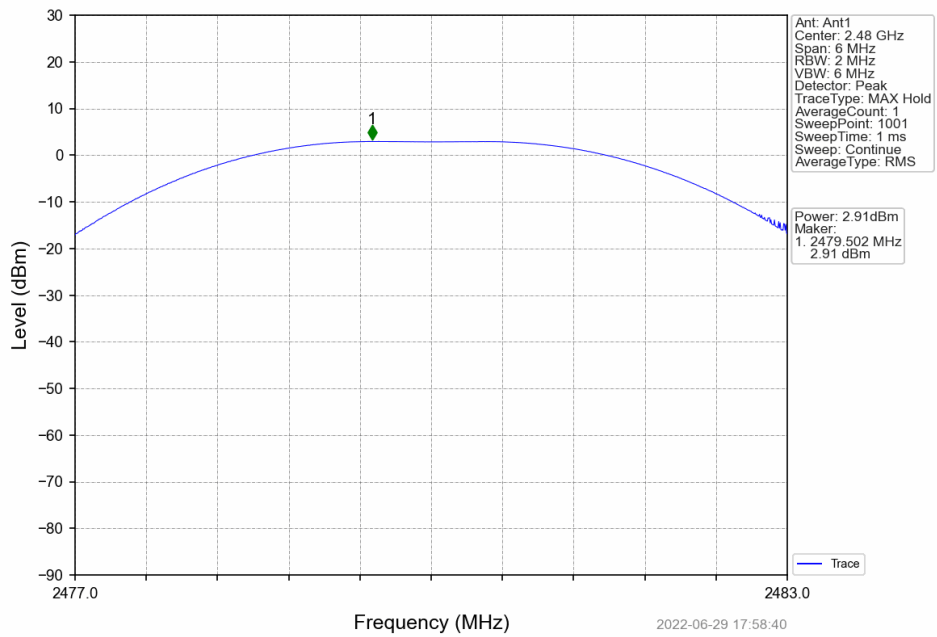

4. Maximum Power Spectral Density



4.1 PSD



4.1.1 Test Result



Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-11.66	<=8	Pass
		2440	-11.07	<=8	Pass
		2480	-11.35	<=8	Pass
2M	SISO	2402	-14.44	<=8	Pass
		2440	-13.87	<=8	Pass
		2480	-14.71	<=8	Pass

Note1: Antenna Gain: Ant1: 1.05dBi;

4.1.2 Test Graph

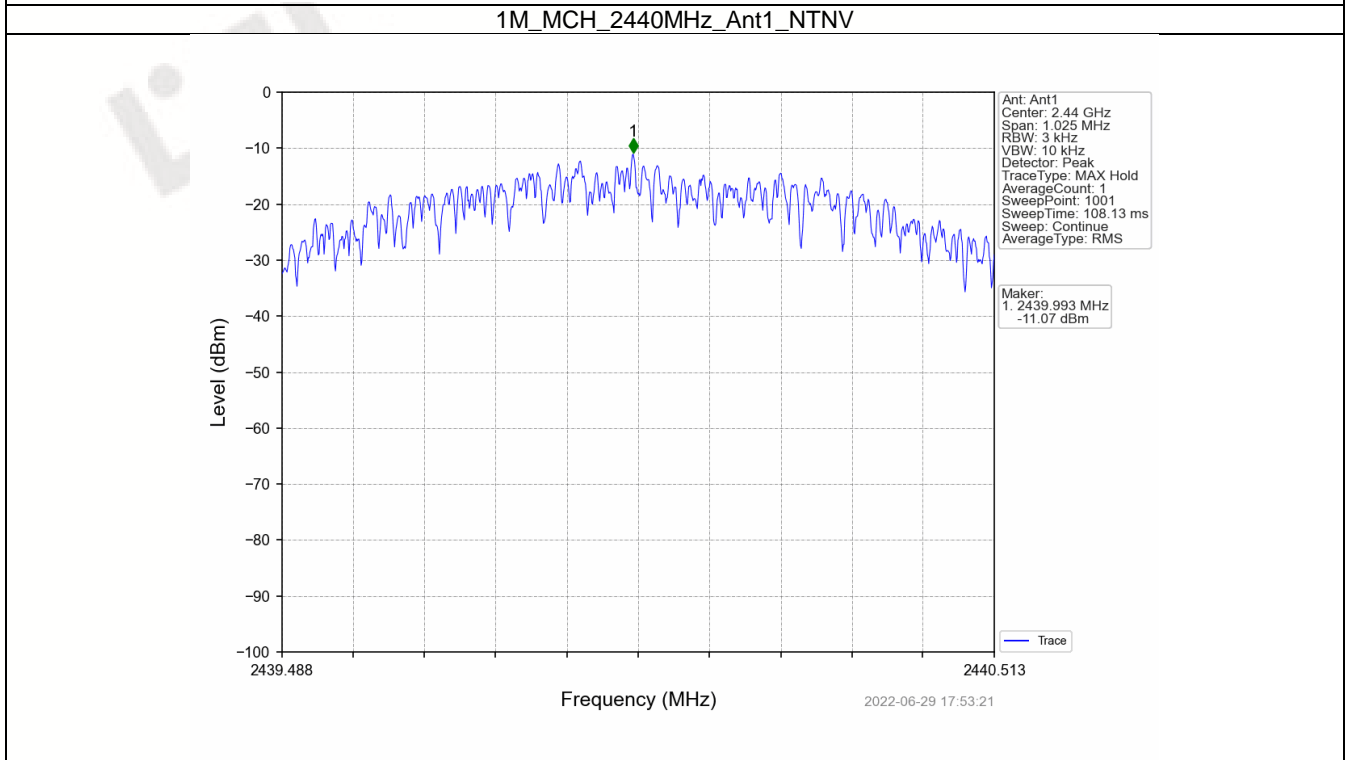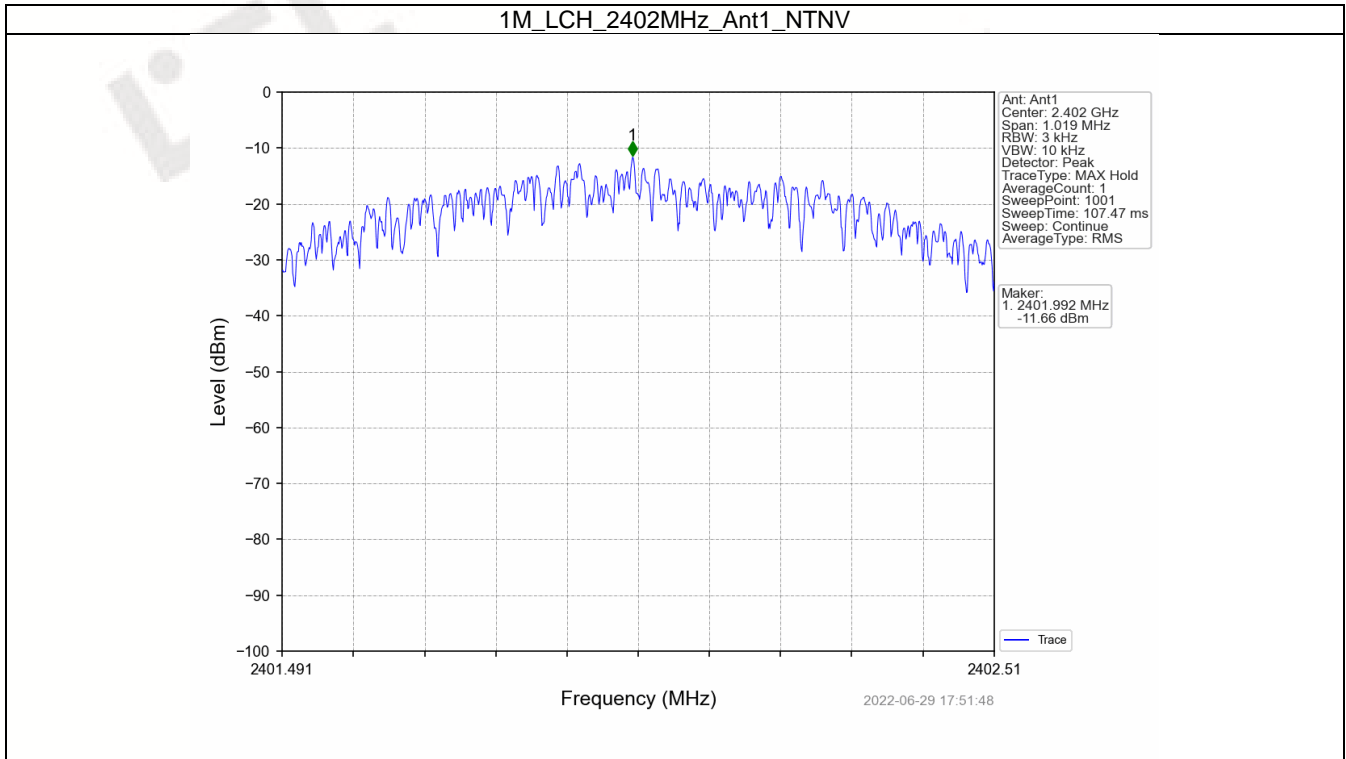

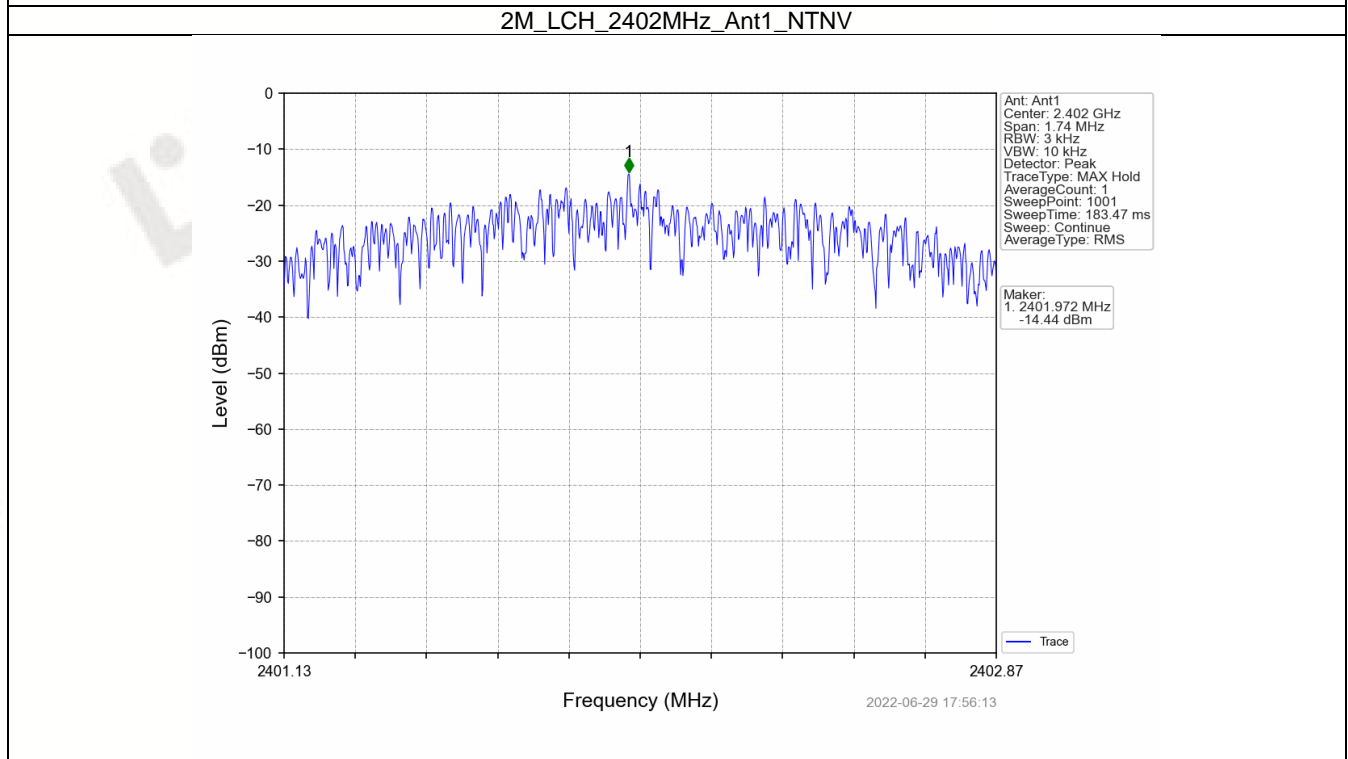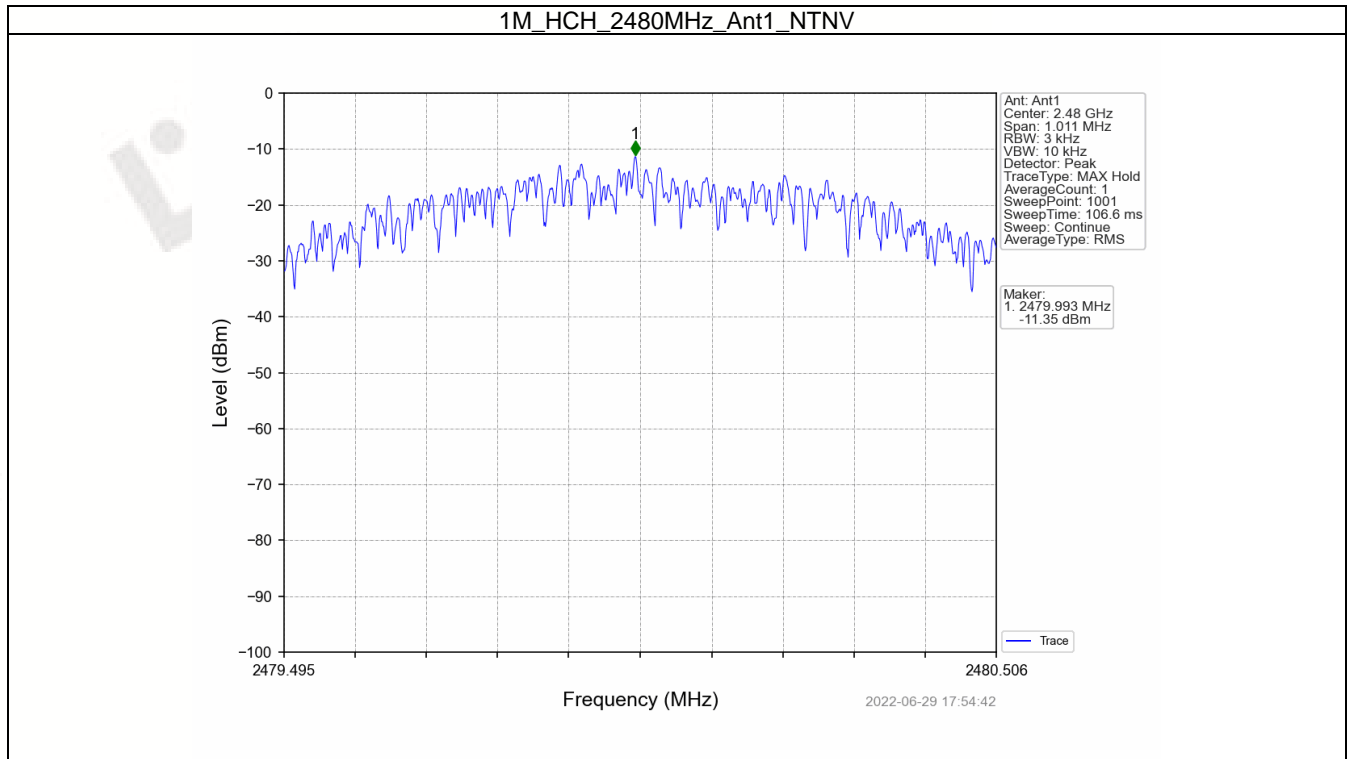

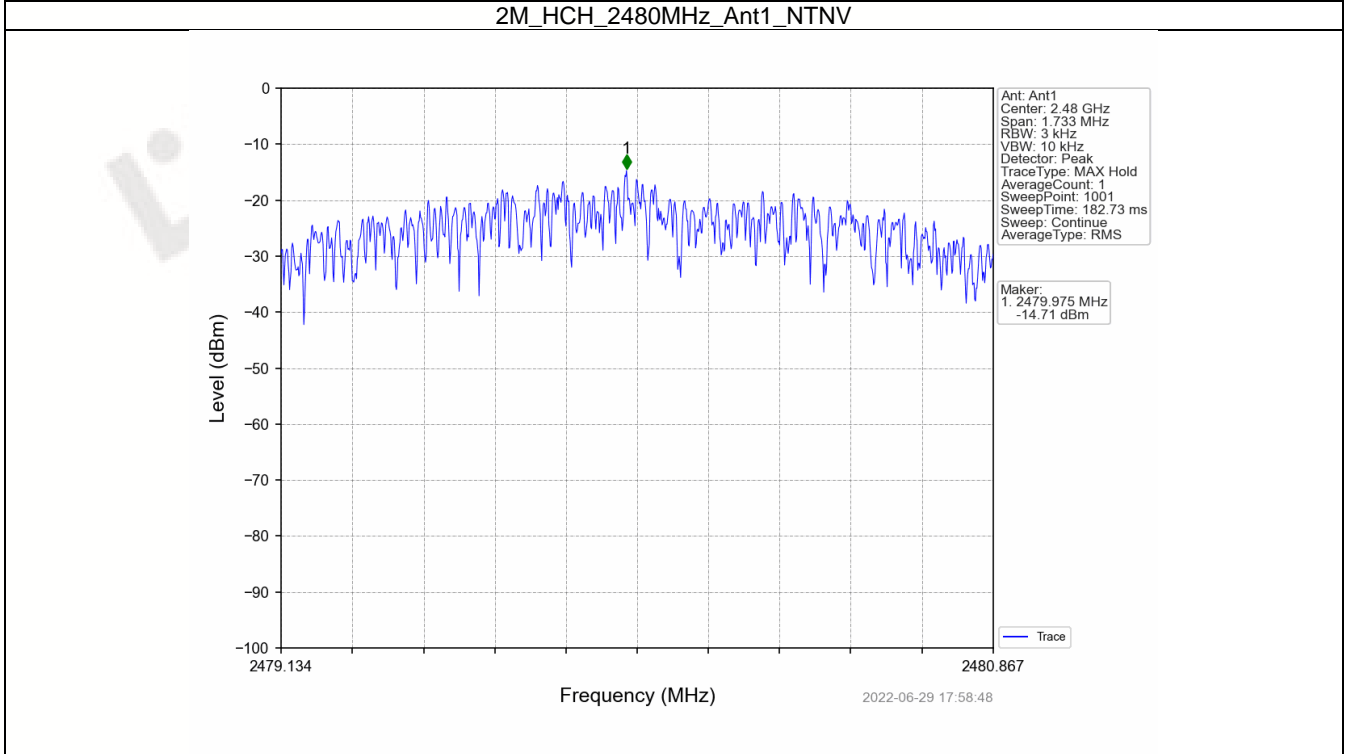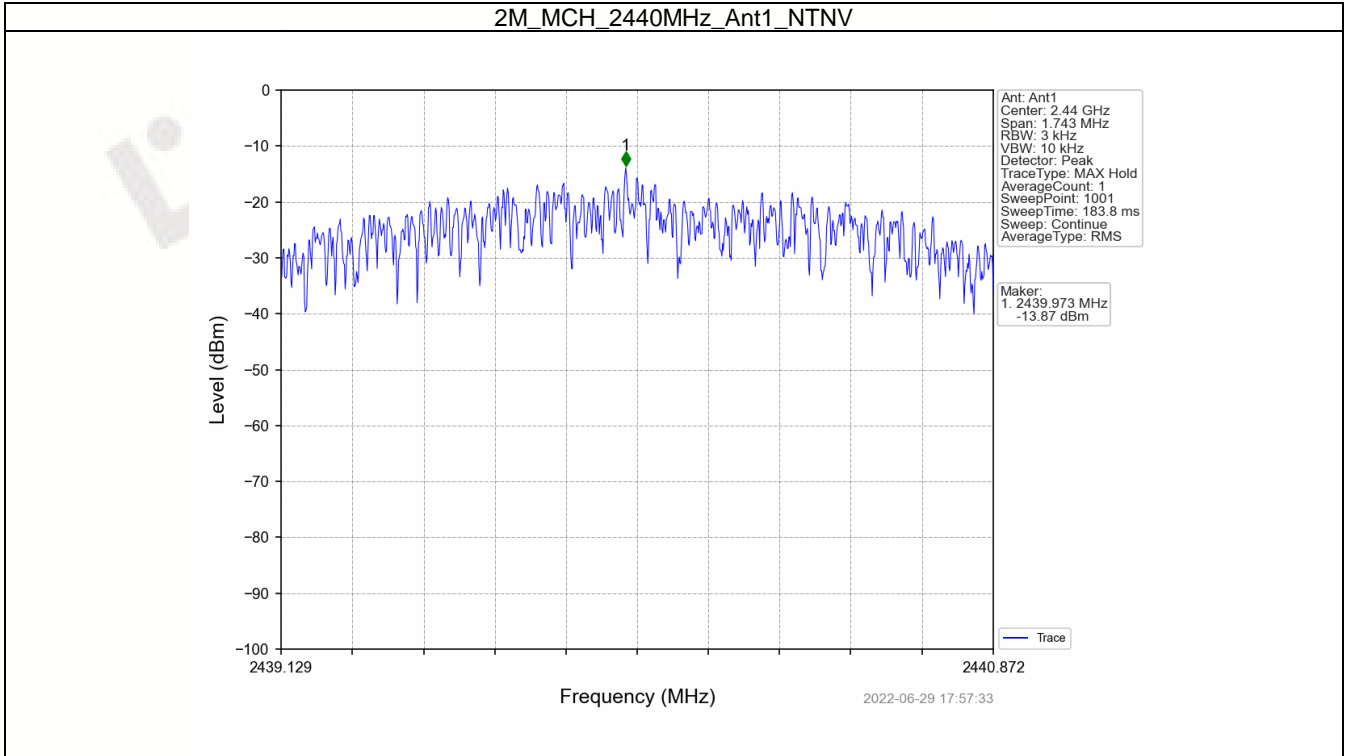

5. Unwanted Emissions InStandard Non-restricted Frequency Bands

5.1 Ref



5.1.1 Test Result



Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	2.21
		2440	1	2.74
		2480	1	2.44
2M	SISO	2402	1	2.12
		2440	1	2.62
		2480	1	2.33



Note1: Refer to RSS-247 Issue 2 section 5.5 and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

Note2: RBW = 1MHz was used during the pre-test. The final test will be performed at RBW=100kHz while the margin is less than 3dB.

5.1.2 Test Graph

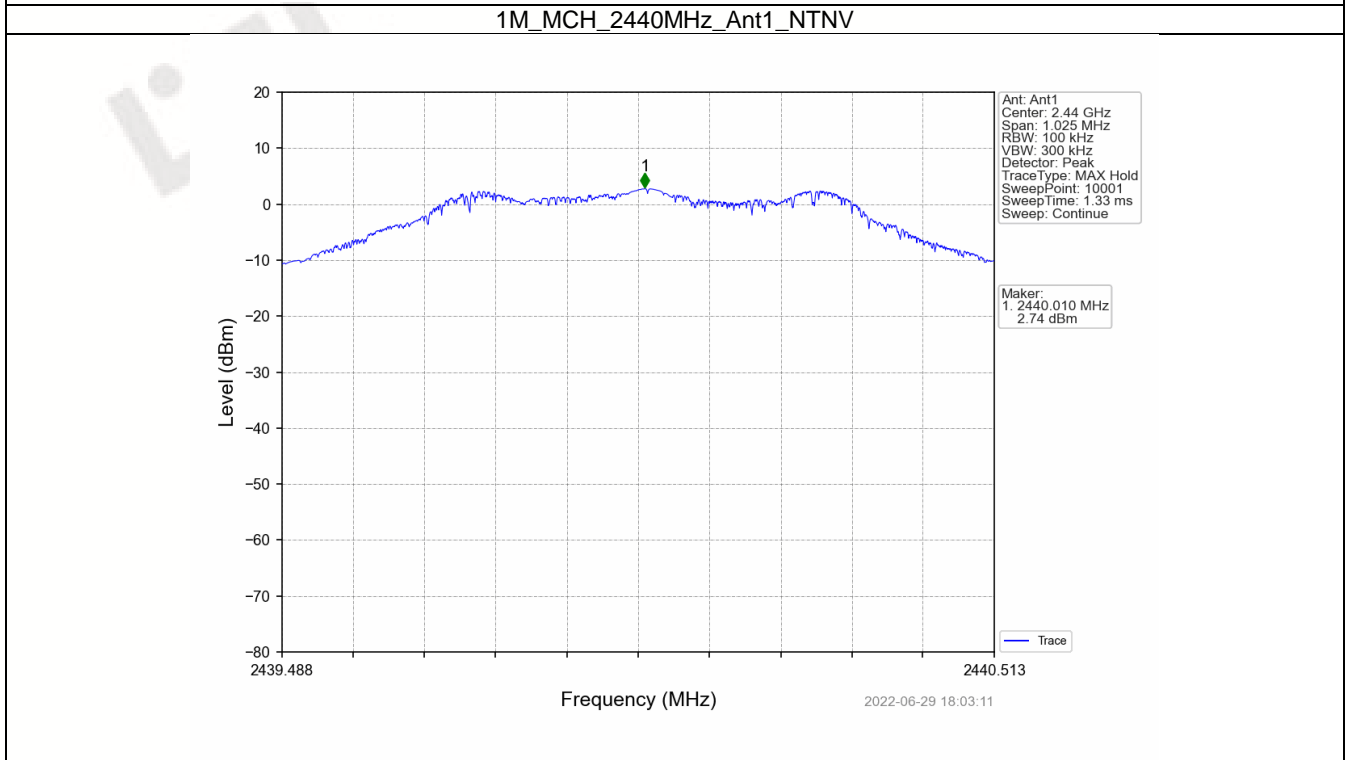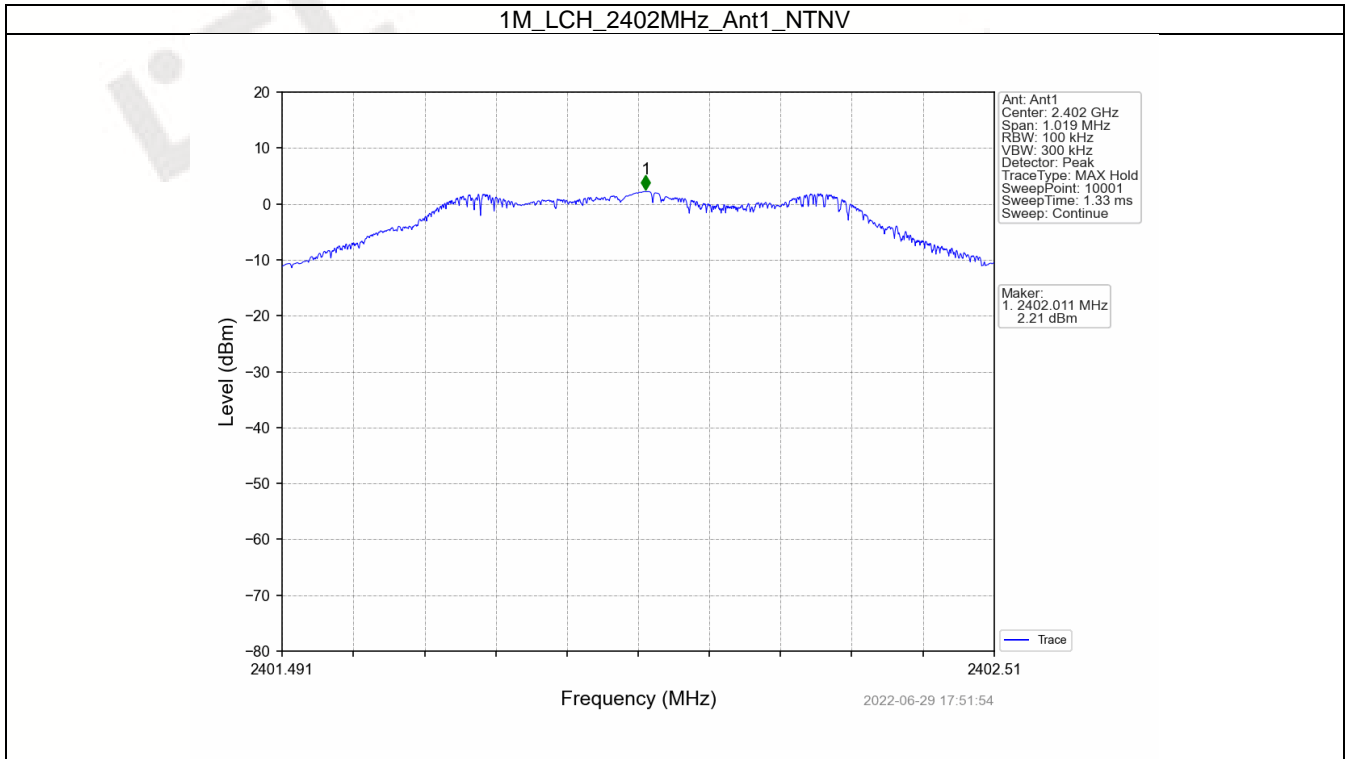

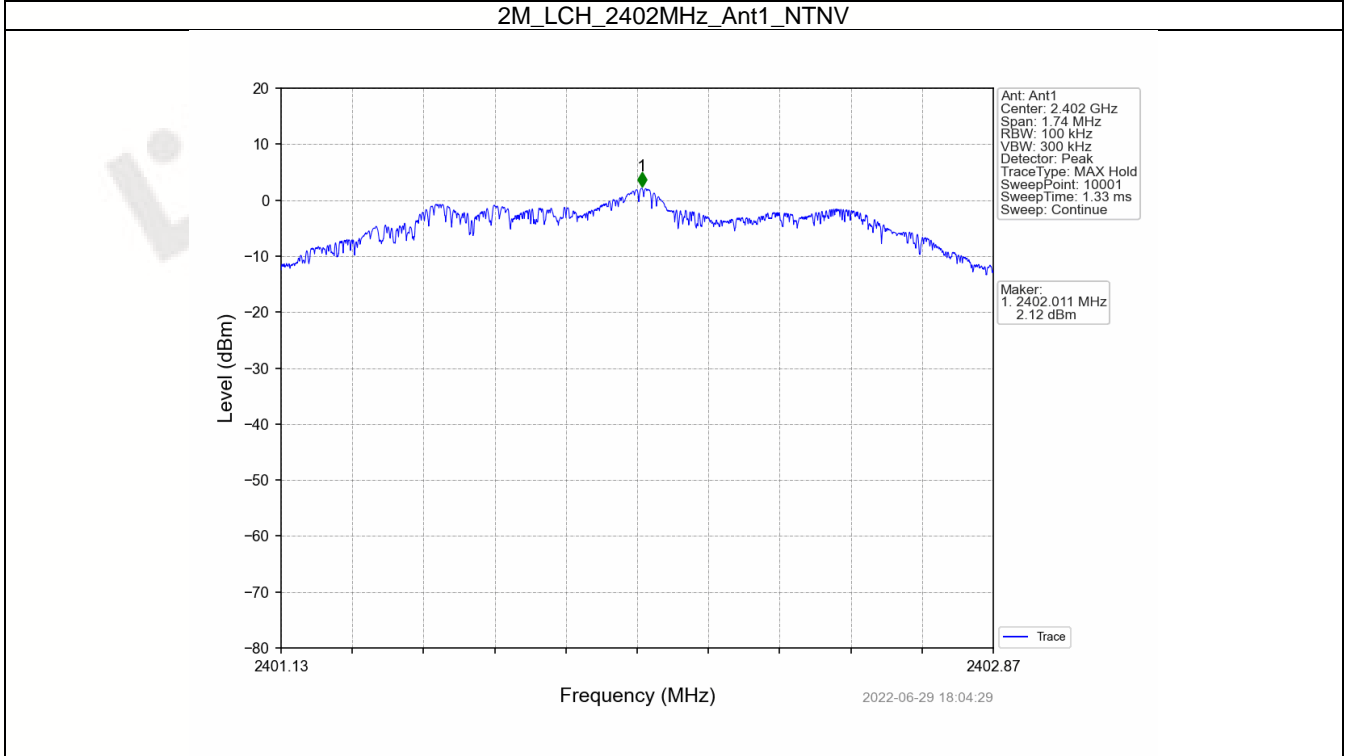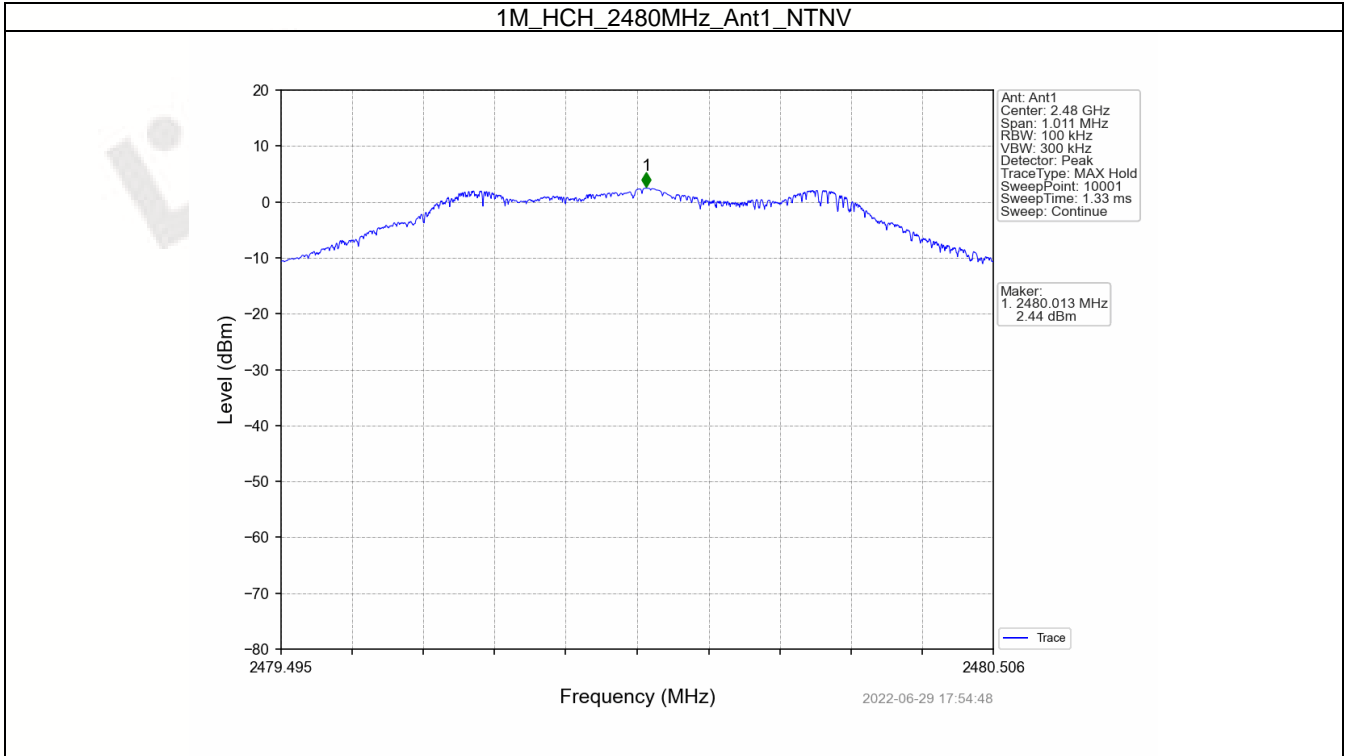

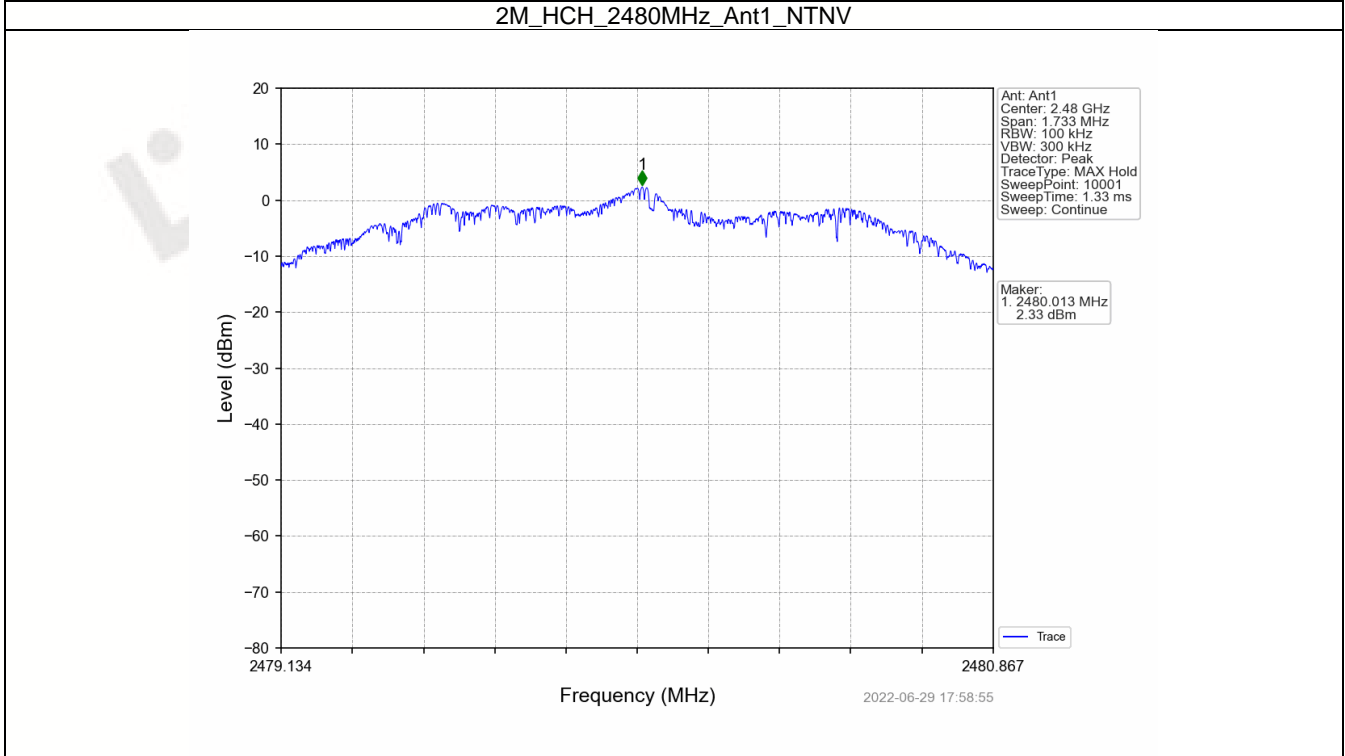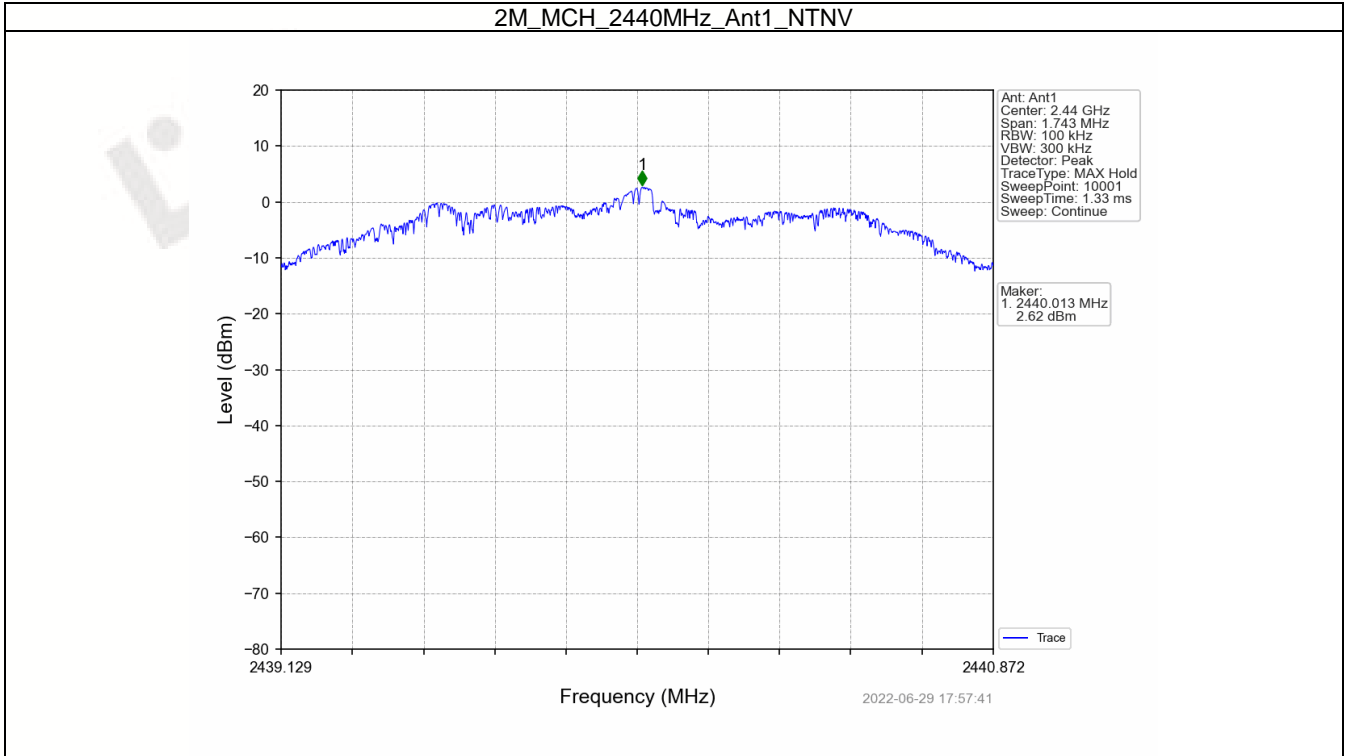



5.2 CSE



5.2.1 Test Result



Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	2.74	-17.26	Pass
		2440	1	2.74	-17.26	Pass
		2480	1	2.74	-17.26	Pass
2M	SISO	2402	1	2.62	-17.38	Pass
		2440	1	2.62	-17.38	Pass
		2480	1	2.62	-17.38	Pass

Note1: Refer to RSS-247 Issue 2 section 5.5 and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.
 Note2: RBW = 1MHz was used during the pre-test. The final test will be performed at RBW=100kHz while the margin is less than 3dB.


5.2.2 Test Graph

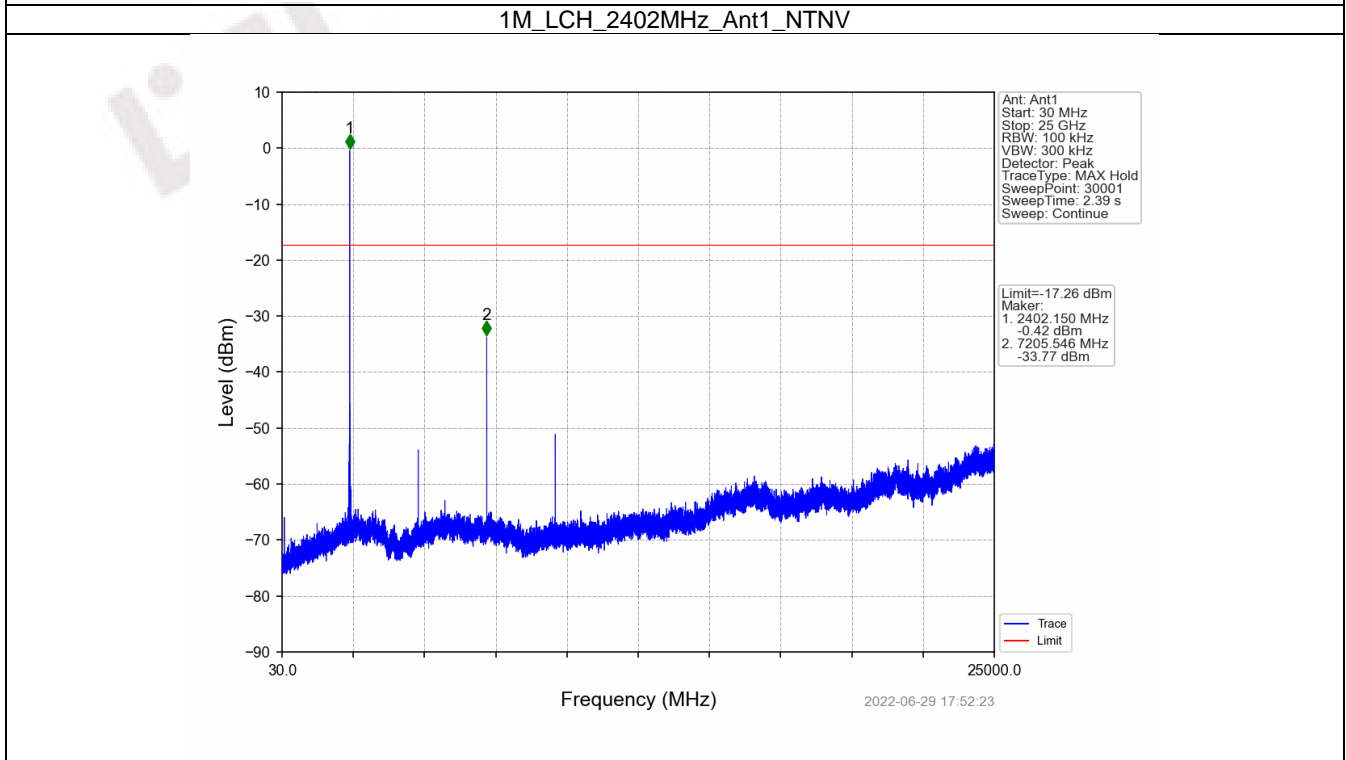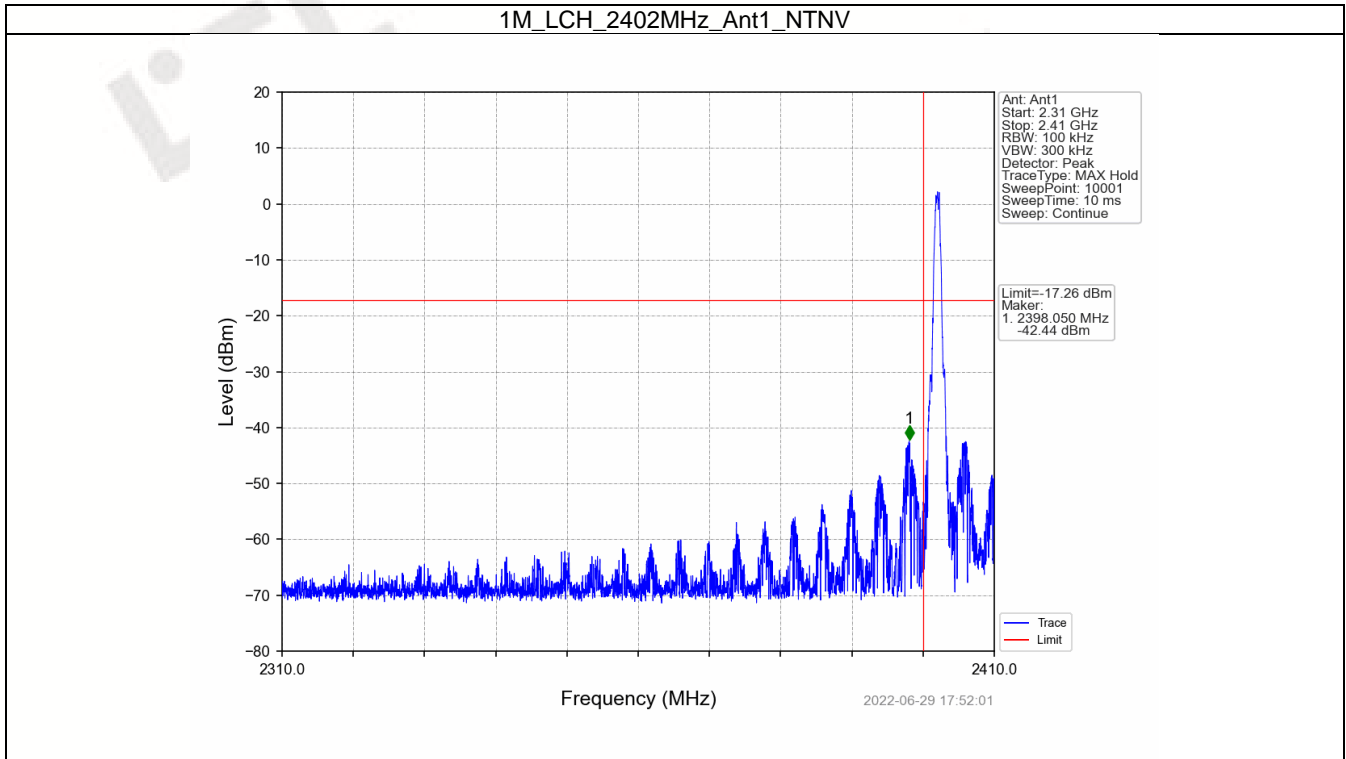

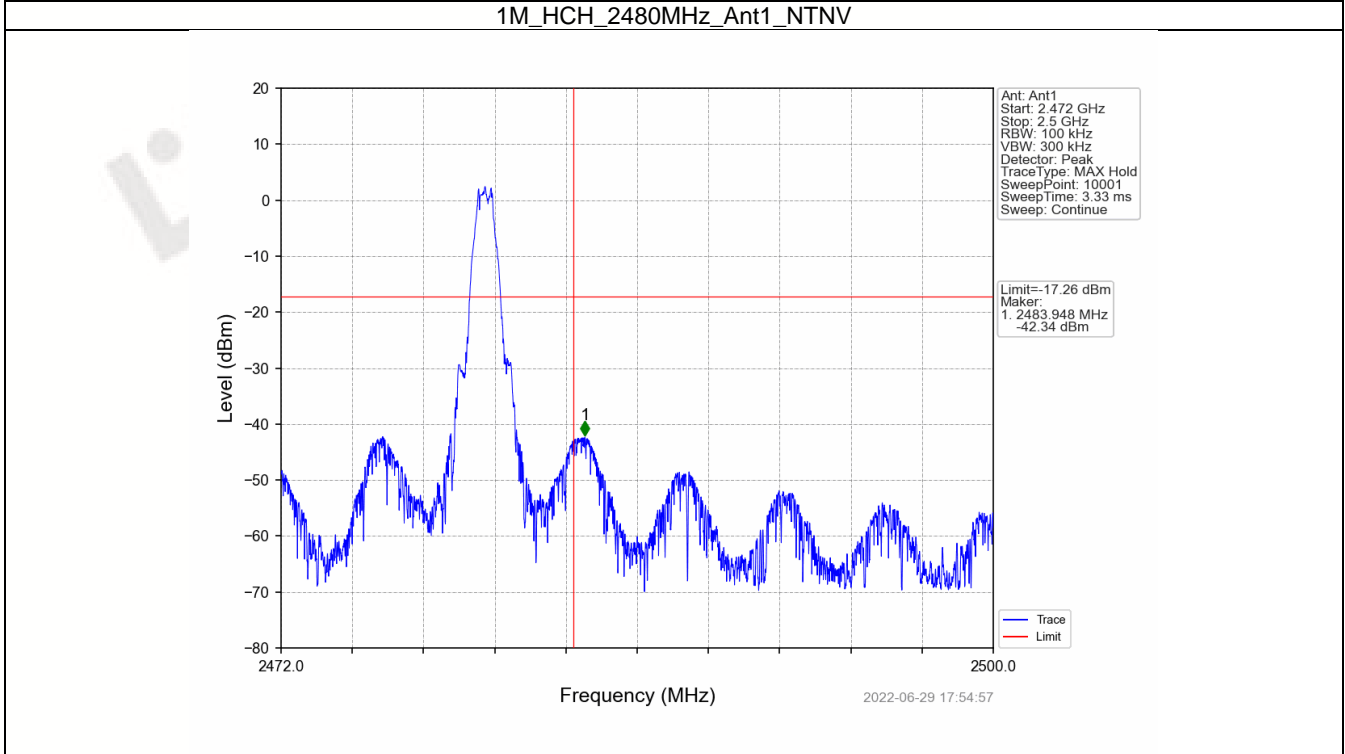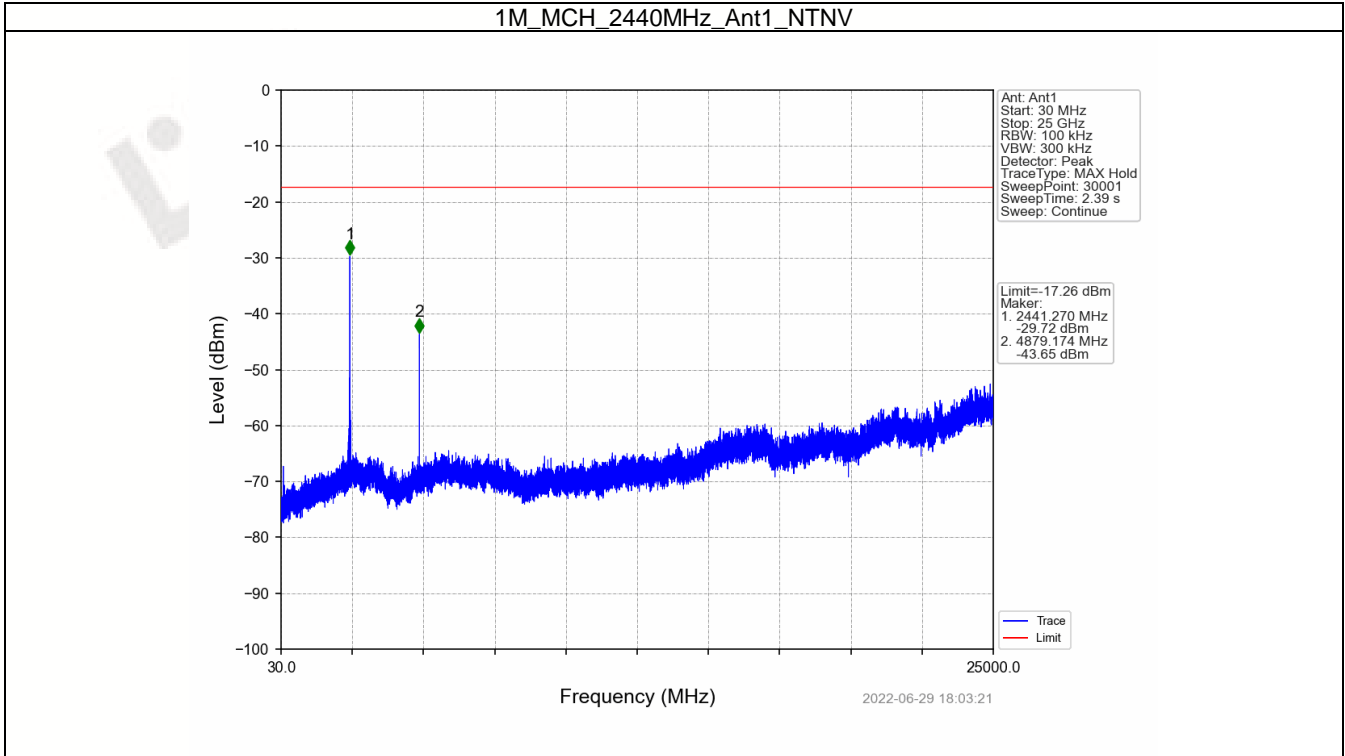

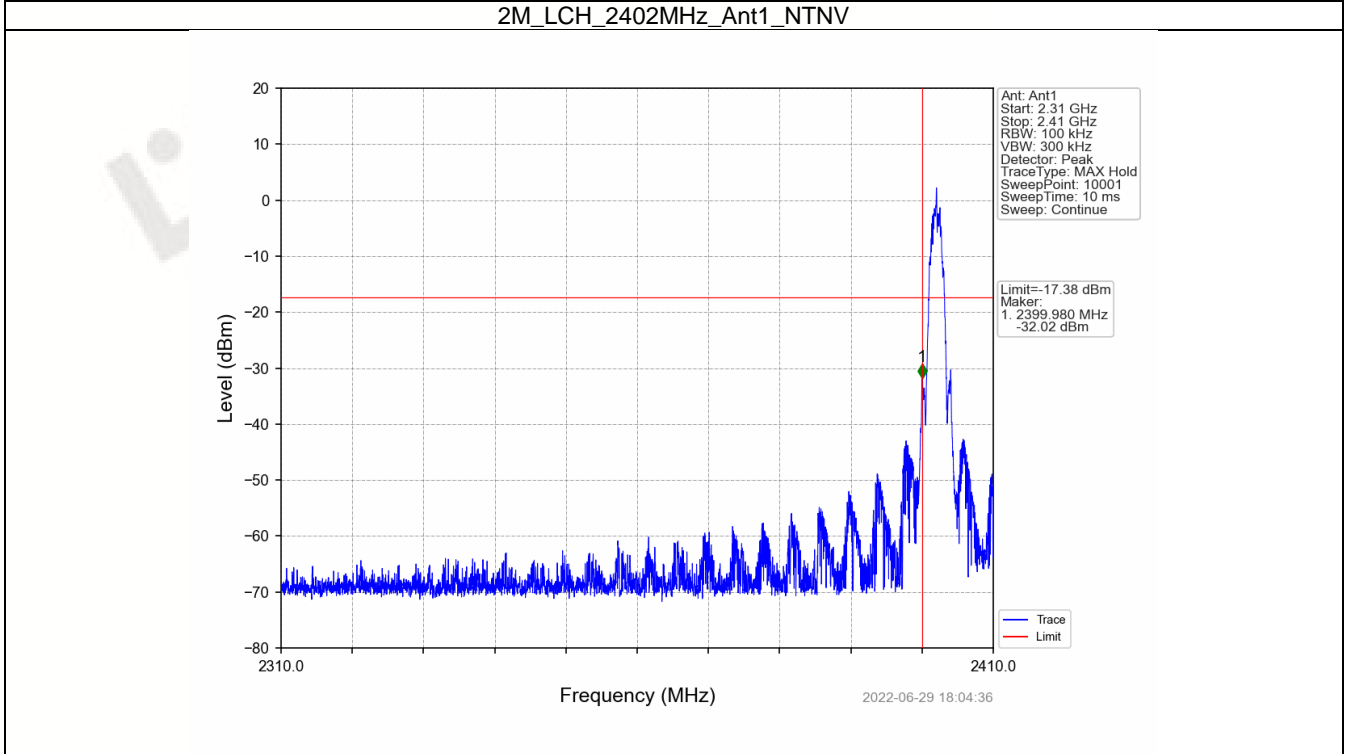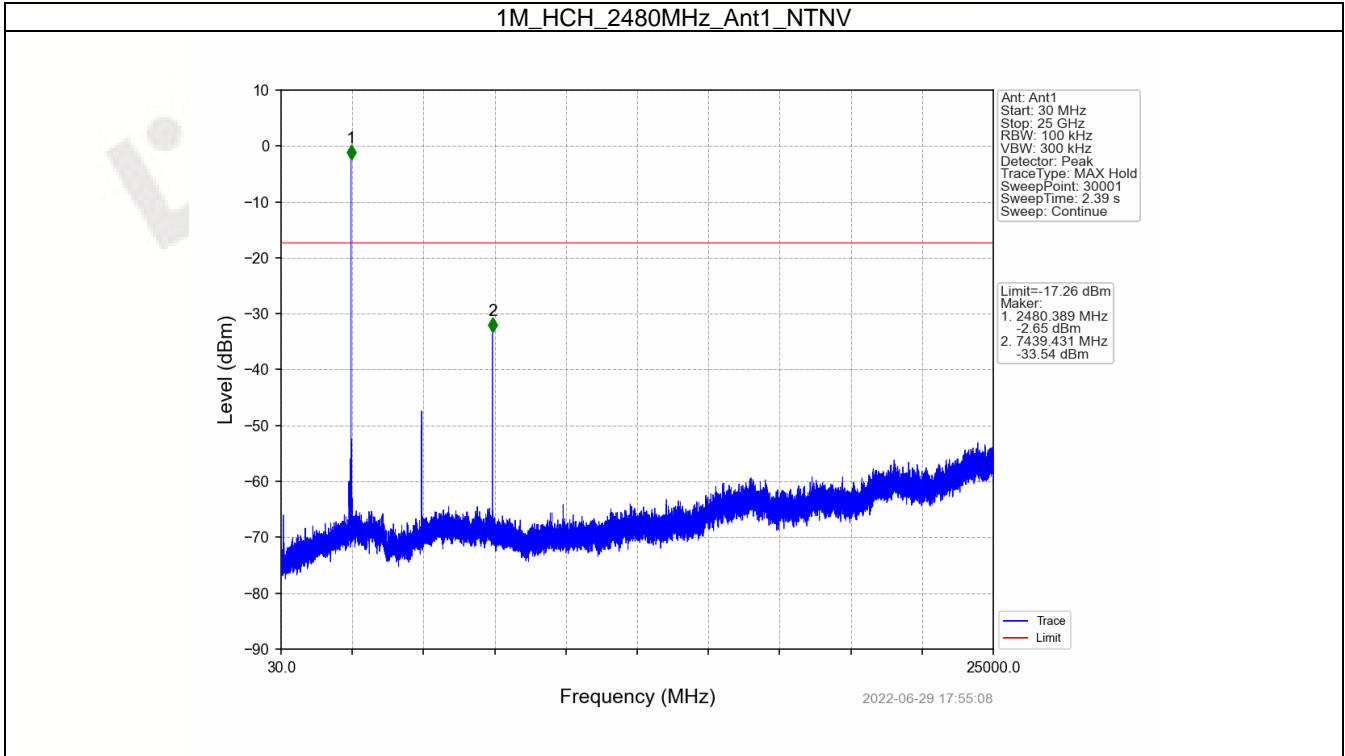

2M_LCH_2402MHz_Ant1_NTNV

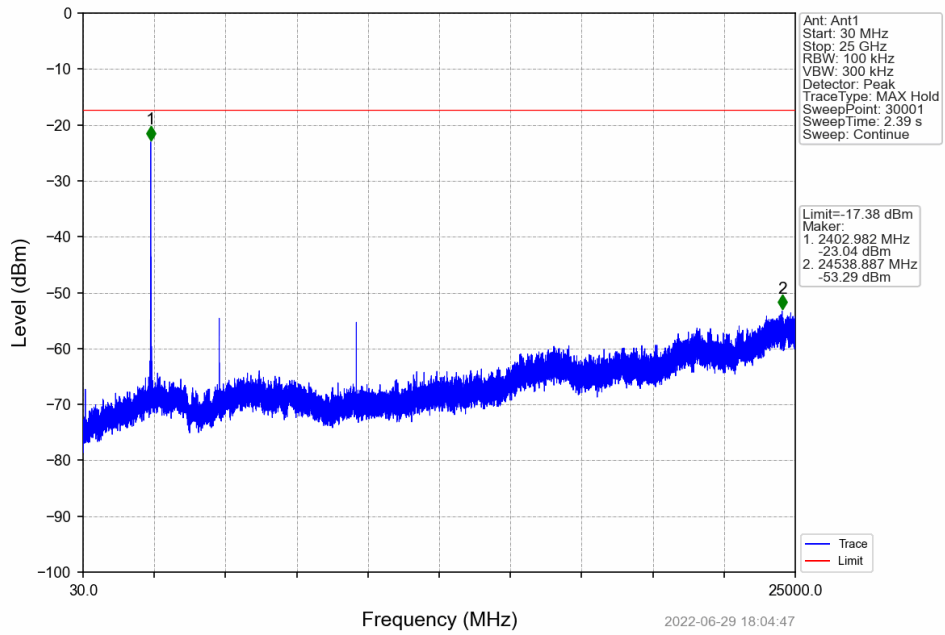

2M_MCH_2440MHz_Ant1_NTNV

