


年Y月M 日D	更正记事 ECN RECORD	版本REV
2024/11/19	首版发行	A
2024/12/03	修改文案	A1
2025/01/07	增加FCC警告语和ID号	A2

707070

90

90



Wireless USB-C to HDMI Transmitter and Receiver

User Manual | VWS-G47

Specifications

Model: ADO
Transmitter Interface: USB-C Male/PD Female
Receiver Interface: HDMI Female/USB-C Female
Electroplating Process: Nickel-Plated
Material: ABS
Resolution: 4K@30Hz
Transmitter Power Supply: 60W PD
Receiver Power Supply: 5V~2A
Wireless Frequency: 5GHz
Effective Range: 50 m(Max)

Product Overview

Transmitter-TX


- USB-C Input
- Indicator
- Function Button
- PD Power Port

Receiver-RX

- HDMI Output
- Indicator
- Function Button
- USB-C Power Port

Projection Instructions


Plug and Play




- Connect the USB-C (transmitter) to a video output device.
- Connect the PD power port (transmitter) to a charger, providing up to 60W power supply to the upstream device.
- Use the included HDMI-to-HDMI cable to connect the receiver to the display device like a monitor or TV.
- Connect the USB-C power port (receiver) to a charger or USB-A power port (5V~2A), and turn on the receiver.
- Set the display device's HDMI input to the correct port. Once the receiver's startup screen appears, the device is ready. Wait for the indicator light to flash quickly for a few seconds to complete projection.

Note: Please ensure the upstream device has sufficient power. If not, connect the transmitter's PD power port to a power adapter.

What's in the Box

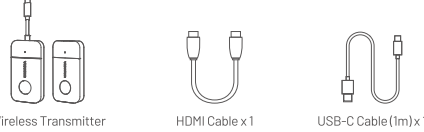


Wireless Transmitter and Receiver x 1
HDMI Cable x 1
USB-C Cable (1m) x 1



User Manual x 1

For more interesting information and events, please follow us on social media platforms:




Facebook LinkedIn Instagram

For warranty service or support, please contact Vention team:
Website: www.ventiontech.com Email: vention@ventiontech.com

Pairing Instructions

The two devices are pre-paired during manufacturing. If pairing fails due to improper handling or other issues, follow these steps to reset and re-pair them:

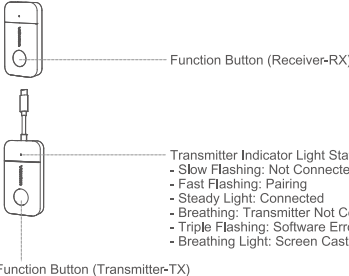

Function Button (Receiver-RX)

Transmitter Indicator Light Status:

- Slow Flashing: Not Connected
- Fast Flashing: Pairing
- Steady Light: Connected
- Breathing: Transmitter Not Connected
- Triple Flashing: Software Error
- Breathing Light: Screen Casting Paused

Function Button (Transmitter-TX)

- Press and hold the Receiver (RX) Function Button for 3s or more until "Connecting..." appears on the screen, indicating Pairing Mode.
- Press and hold the Transmitter (TX) Function Button for 5s or more. The indicator will flash quickly while pairing. When it stays on steadily, pairing is complete.

FAQs

Q1: How do I reset to default settings?
A1: If the product malfunctions, press and hold the Receiver (RX) Function Button for 10s. The screen will go black and restart, resetting to default settings.

Q2: How do I enter Privacy Mode?
A2: Simply press the Transmitter (TX) Function Button to disconnect or reconnect.

Q3: Can devices without a USB-C port be used?
A3: Yes, but please use a full-function USB-C adapter with the device.

FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


*RF warning for Portable device:
The device has been evaluated to meet general RF exposure requirement. This equipment should be installed and operated with a minimum distance of 20 cm between the radiator and your body.

FCC ID: 2A724-ADO

Front

Back

折叠尺寸：70x90mm 展开尺寸：210x90mm
材质：157g哑粉纸 3页风琴折 双面印刷
蓝色印刷：C100 M:0 Y:0 K:0 参考：Pantone Process Cyan C

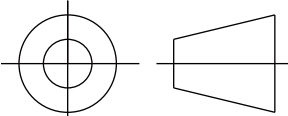宁波福茂通讯科技有限公司 NINGBO FULMAN COMMUNICATION TECHNOLOGY CO.,LTD					
品名 PART NAME	ADO系列无线Type-C转HDMI投屏收发器 黑色0.15米说明书			型号 PART MODEL	VWS-G47
设计 DESIGNER	Jacky	单位 UNIT	mm	客户代码 Client NO.	
校对 CHECK		版本 REV	A0	图号 DWG.NO.	
核准 APPR.		PAGE 页数	1/1	更新 UPDATE	2025/01/07