


Product : Bluetooth Headset
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps(2402MHz)
 Test Date : 2021/07/21

Horizontal

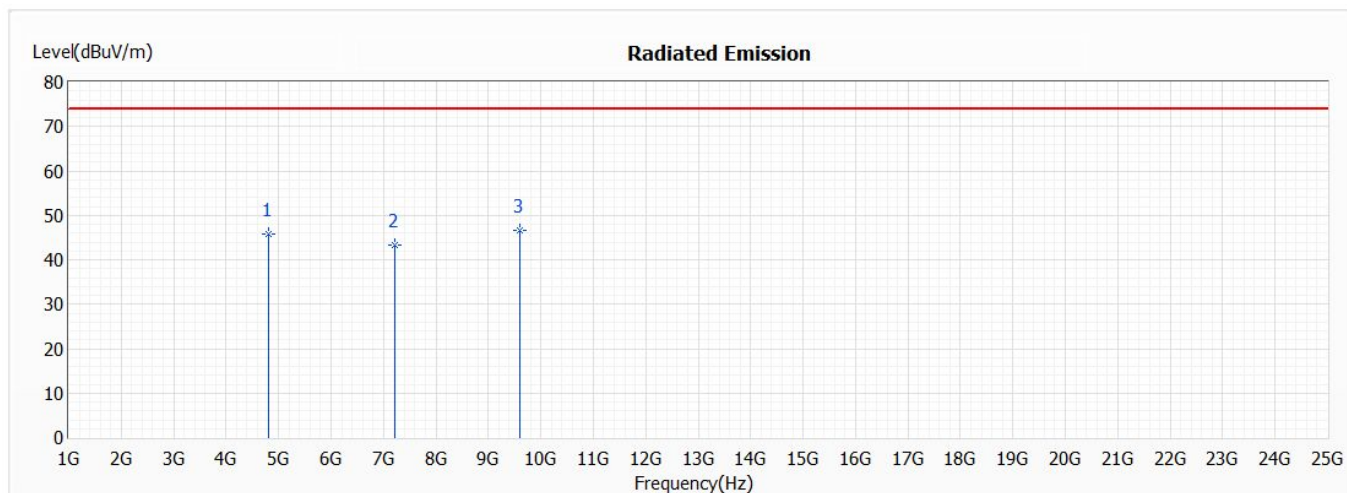


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4804.000	45.86	74.00	-28.14	47.43	-1.57	PK
2	7206.000	43.44	74.00	-30.56	40.52	2.92	PK
* 3	9608.000	46.52	74.00	-27.48	41.59	4.93	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Bluetooth Headset
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps(2402MHz)
 Test Date : 2021/07/21

Vertical

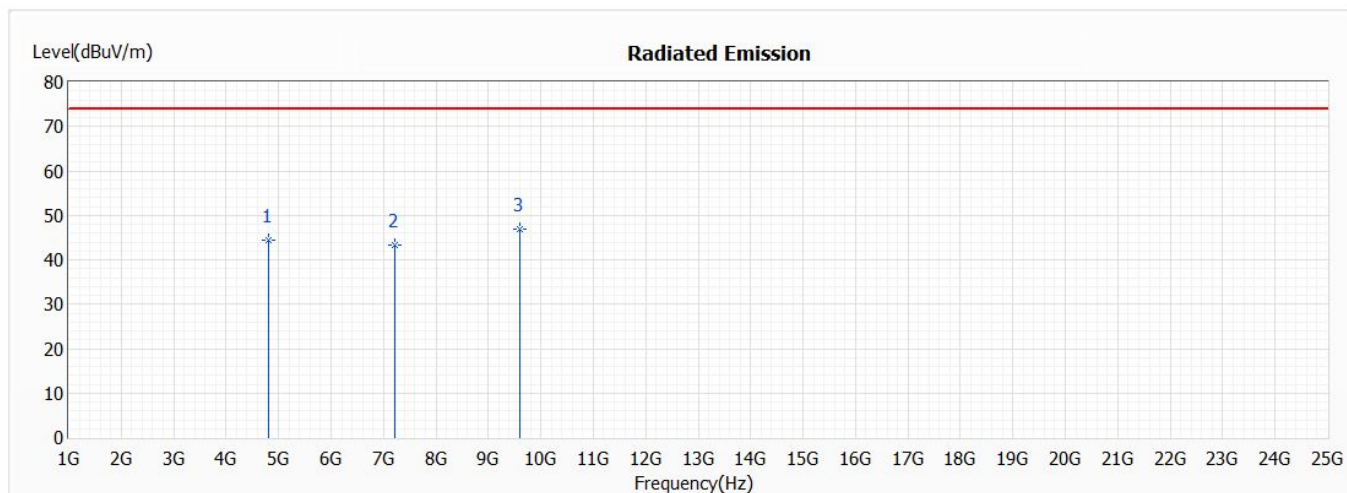


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4804.000	44.43	74.00	-29.57	46.00	-1.57	PK
2	7206.000	43.21	74.00	-30.79	40.29	2.92	PK
* 3	9608.000	46.98	74.00	-27.02	42.05	4.93	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Bluetooth Headset
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps (2441MHz)
 Test Date : 2021/07/21

Horizontal

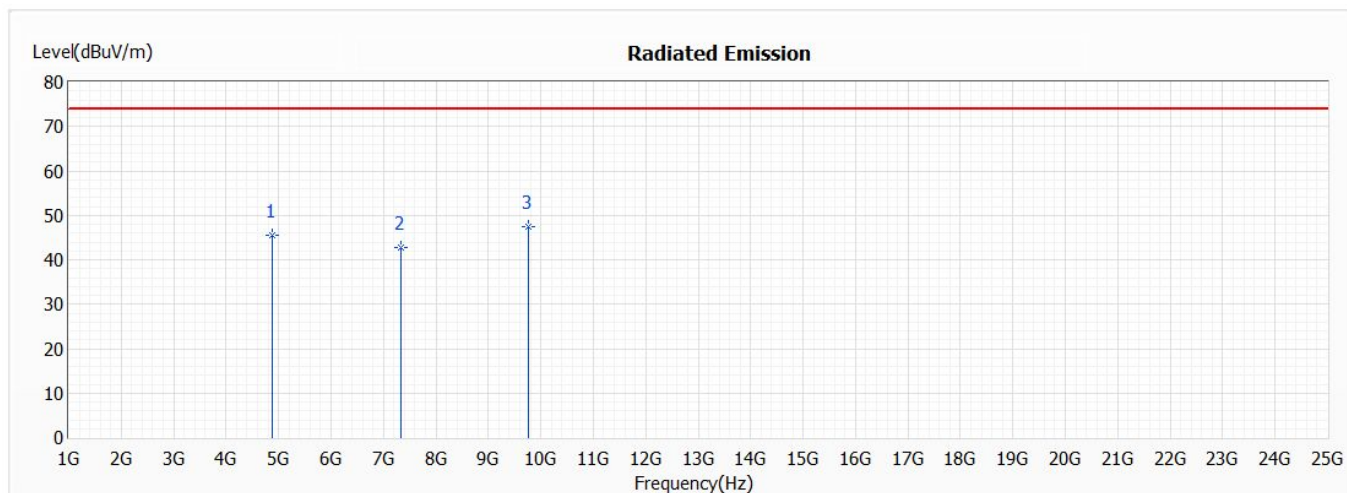


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4882.000	45.39	74.00	-28.61	46.89	-1.50	PK
2	7323.000	42.88	74.00	-31.12	39.95	2.93	PK
* 3	9764.000	47.52	74.00	-26.48	42.27	5.25	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Bluetooth Headset
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps (2441MHz)
 Test Date : 2021/07/21

Vertical

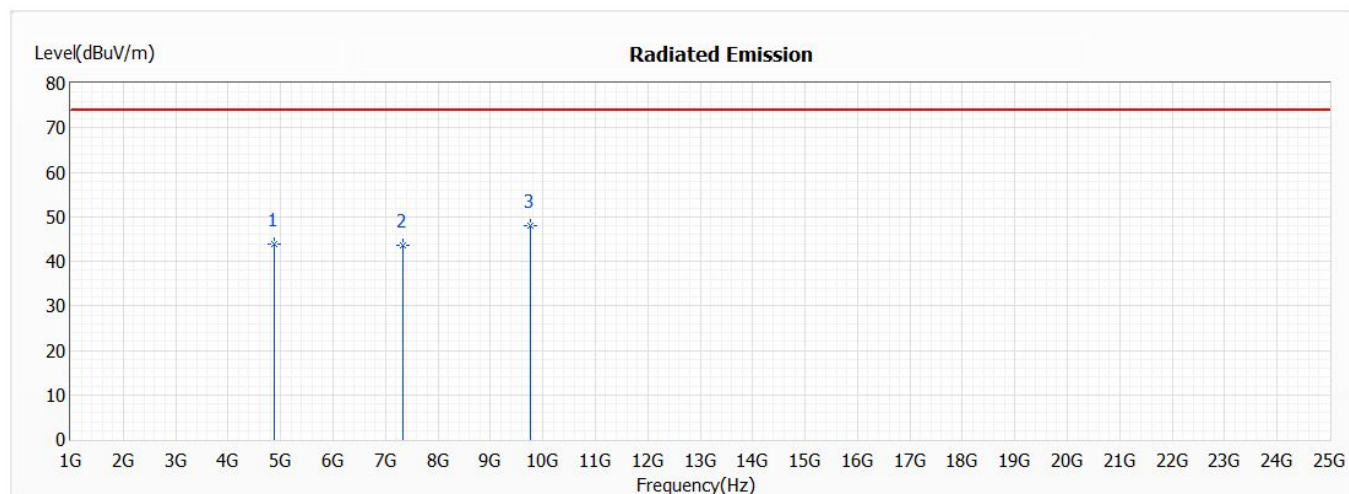


Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Bluetooth Headset
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps (2480MHz)
 Test Date : 2021/07/21

Horizontal

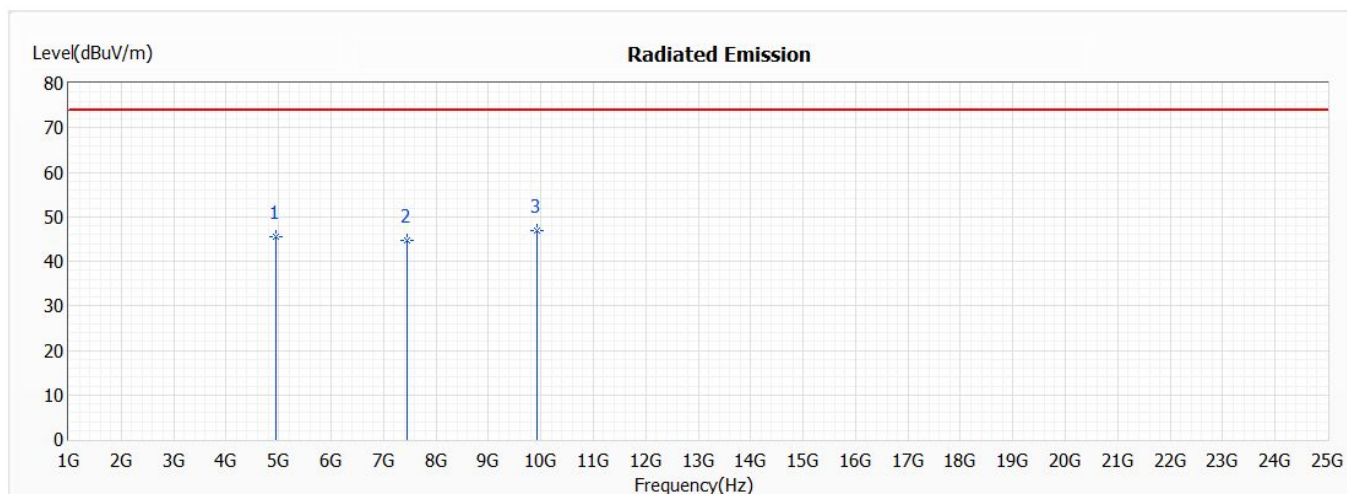


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4960.000	45.39	74.00	-28.61	46.54	-1.15	PK
2	7440.000	44.56	74.00	-29.44	41.49	3.07	PK
* 3	9920.000	47.02	74.00	-26.98	41.57	5.45	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Bluetooth Headset
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps (2480MHz)
 Test Date : 2021/07/21

Vertical

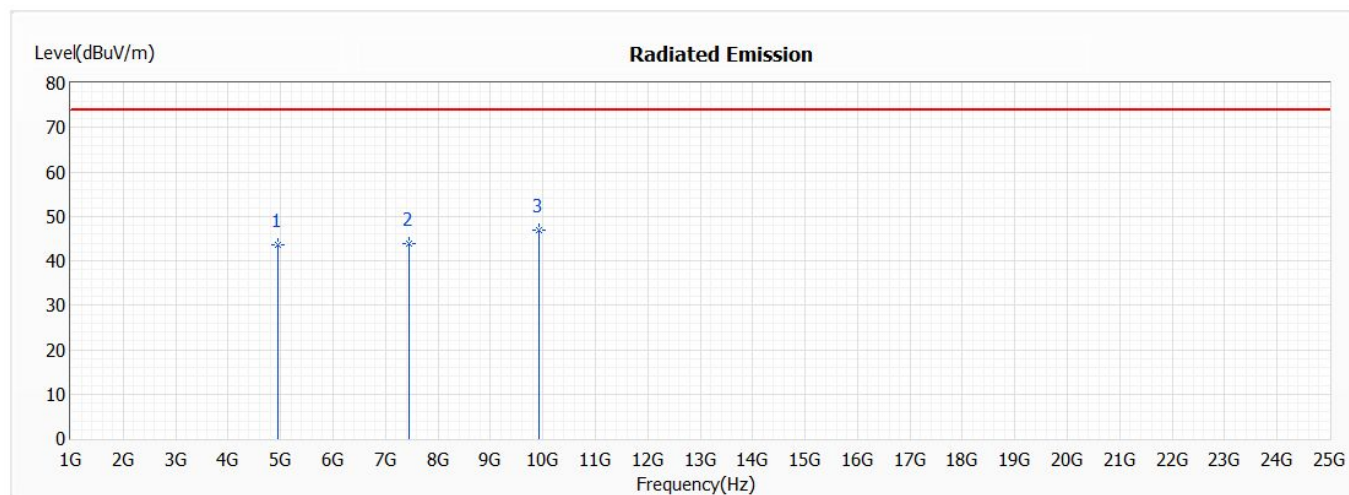


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4960.000	43.49	74.00	-30.51	44.64	-1.15	PK
2	7440.000	43.92	74.00	-30.08	40.85	3.07	PK
* 3	9920.000	46.80	74.00	-27.20	41.35	5.45	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Bluetooth Headset
 Test Item : General Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps (2441MHz)
 Test Date : 2021/07/22

Horizontal

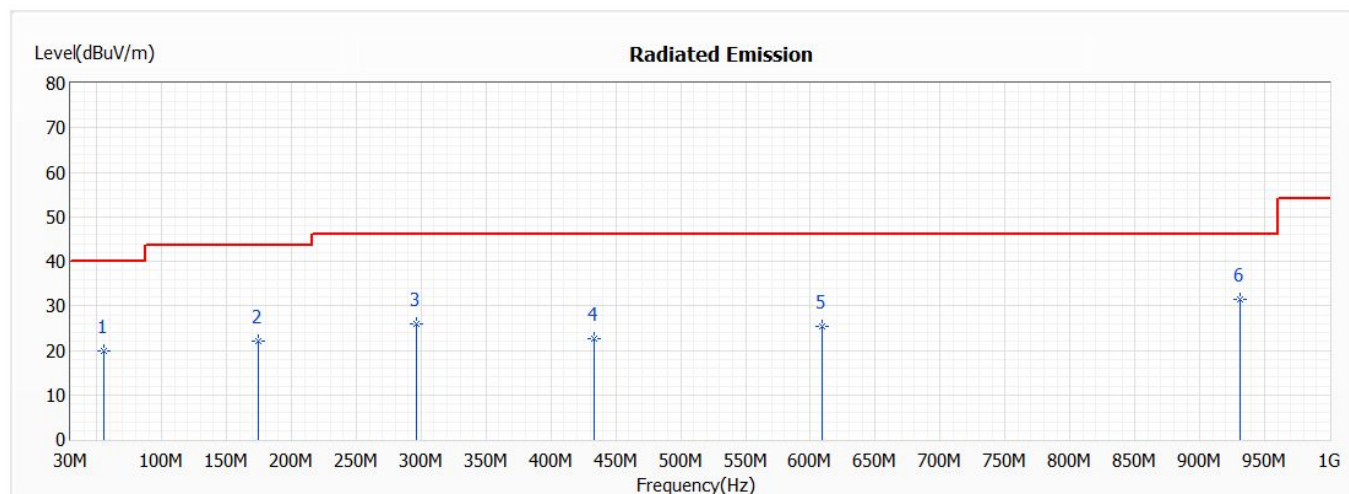


Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Bluetooth Headset
 Test Item : General Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps (2441MHz)
 Test Date : 2021/07/22

Vertical

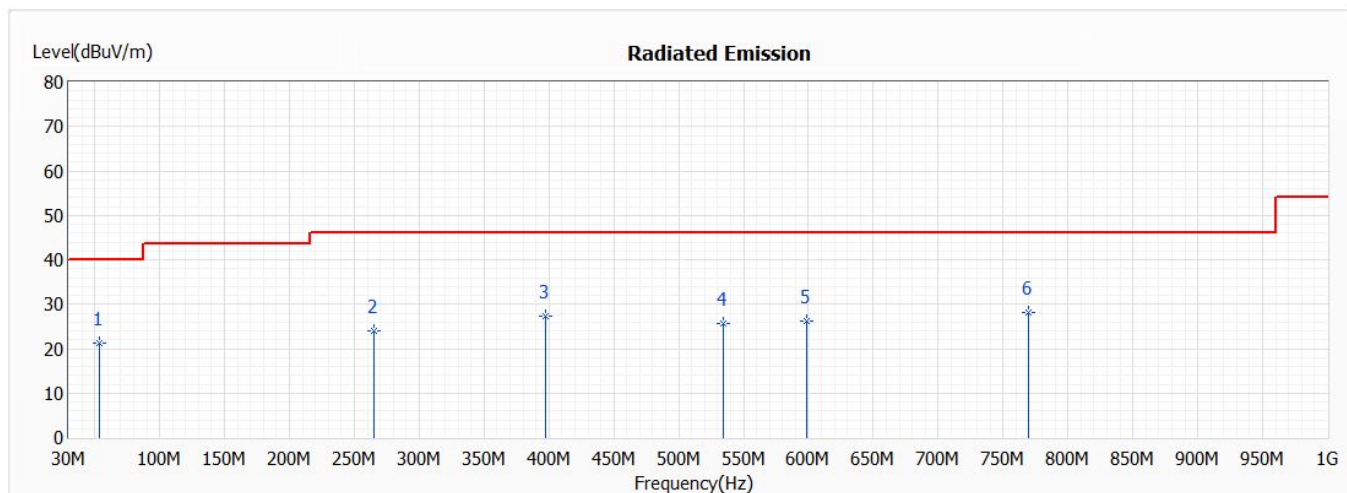


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	53.280	21.17	40.00	-18.83	40.12	-18.95	QP
2	264.740	23.92	46.00	-22.08	43.41	-19.49	QP
3	397.630	27.29	46.00	-18.71	43.06	-15.77	QP
4	534.400	25.68	46.00	-20.32	38.39	-12.71	QP
5	598.420	26.33	46.00	-19.67	37.60	-11.27	QP
* 6	769.140	28.25	46.00	-17.75	36.83	-8.58	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Bluetooth Headset
 Test Item : General Radiated Emission
 Test Mode : Mode 3: Charge Mode
 Test Date : 2021/07/22

Horizontal

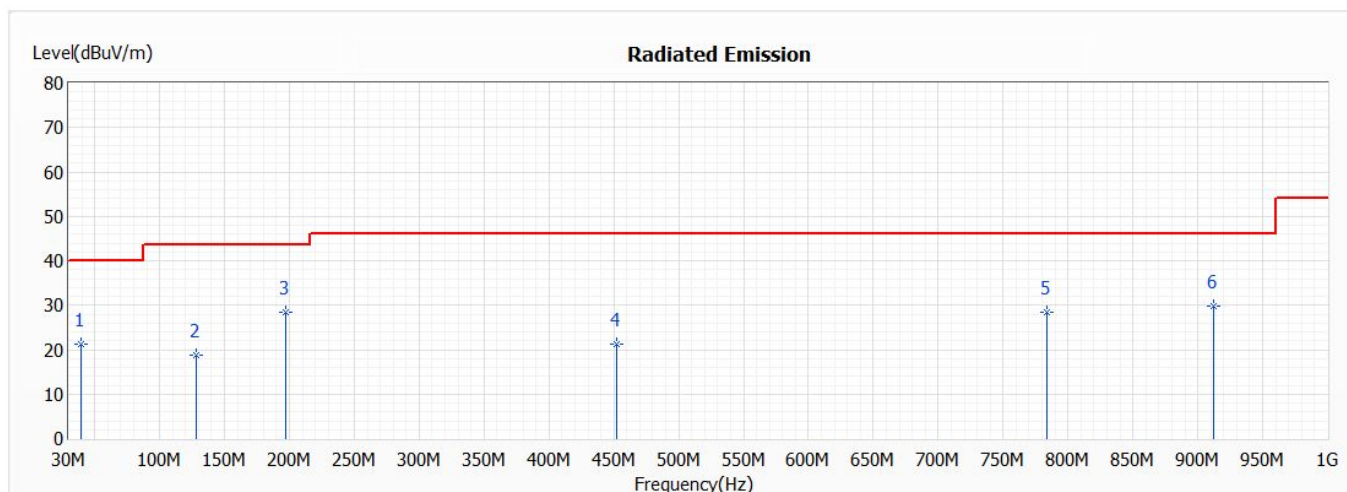


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	39.700	21.16	40.00	-18.84	40.35	-19.19	QP
2	127.970	18.89	43.50	-24.61	39.60	-20.71	QP
* 3	196.840	28.51	43.50	-14.99	50.49	-21.98	QP
4	451.950	21.16	46.00	-24.84	35.67	-14.51	QP
5	783.690	28.42	46.00	-17.58	36.77	-8.35	QP
6	911.730	29.79	46.00	-16.21	36.65	-6.86	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Bluetooth Headset
 Test Item : General Radiated Emission
 Test Mode : Mode 3: Charge Mode
 Test Date : 2021/07/22

Vertical

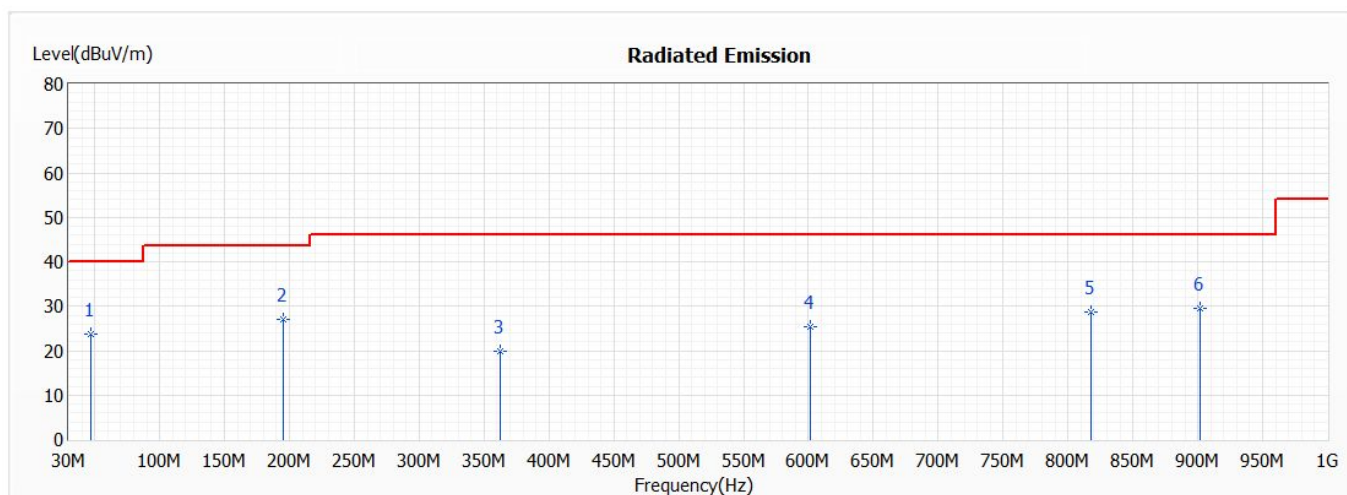


Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

5. RF Antenna Conducted Test

5.1. Test Setup

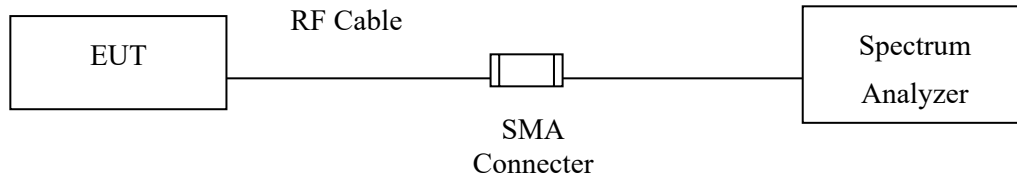

5.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.3. Test Procedure

Tested according to FHSS test procedure of KDB558074 section 9 b) for compliance to FCC 47CFR 15.247 requirements.

5.4. Test Result of RF Antenna Conducted Test

Product : Bluetooth Headset
Test Item : RF Antenna Conducted Test
Test Mode : Mode 1: Transmit - 1Mbps
Test Date : 2021/07/15

Figure Channel 00:

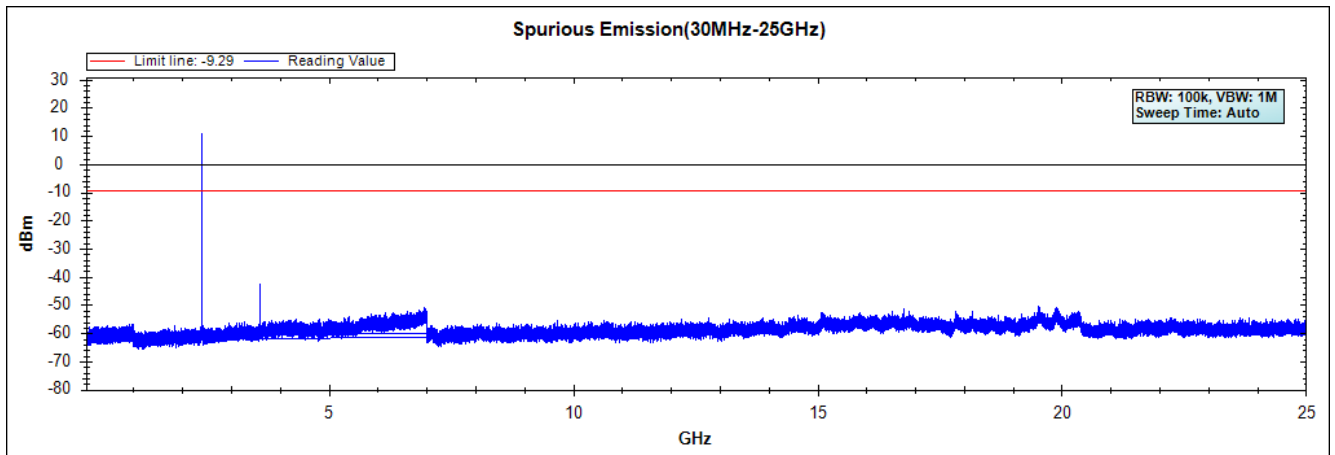


Figure Channel 39:





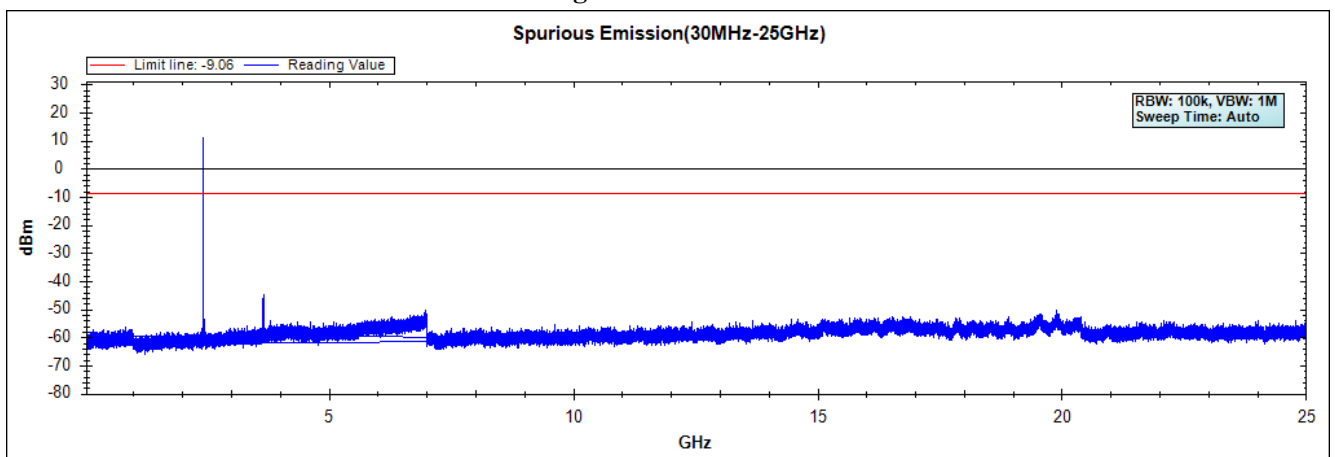


Figure Channel 78:

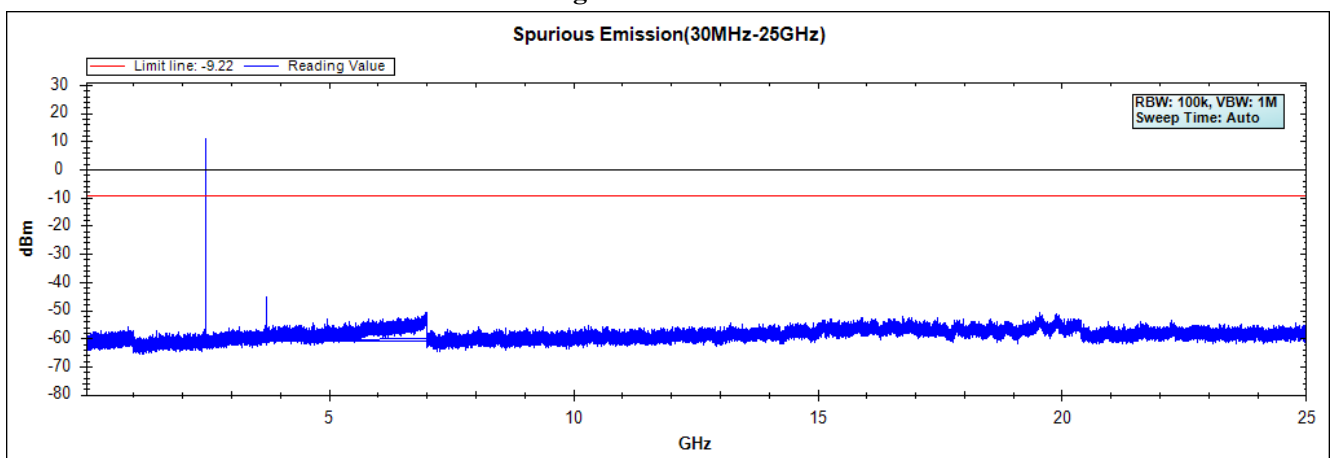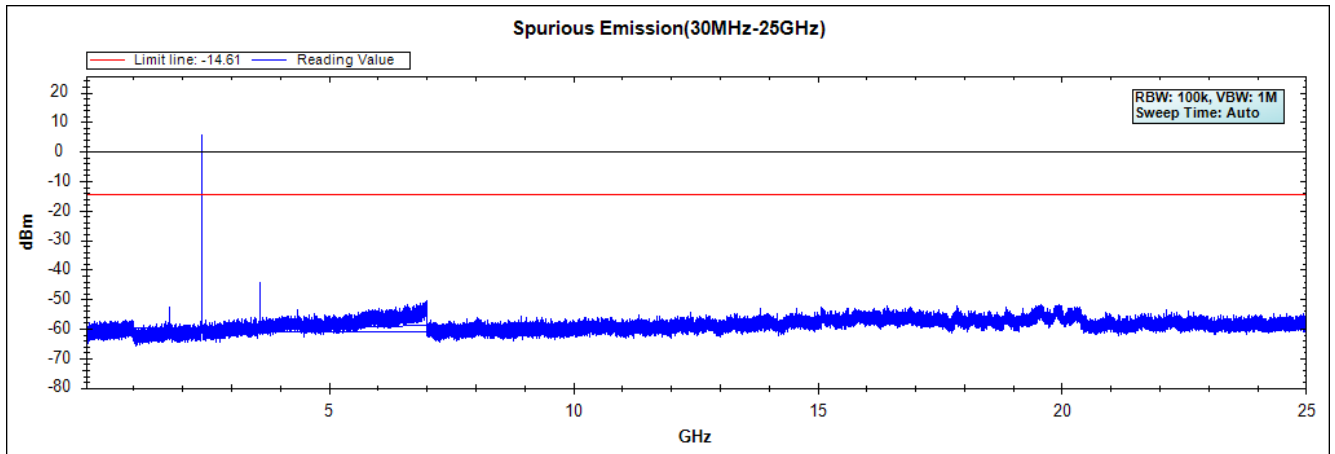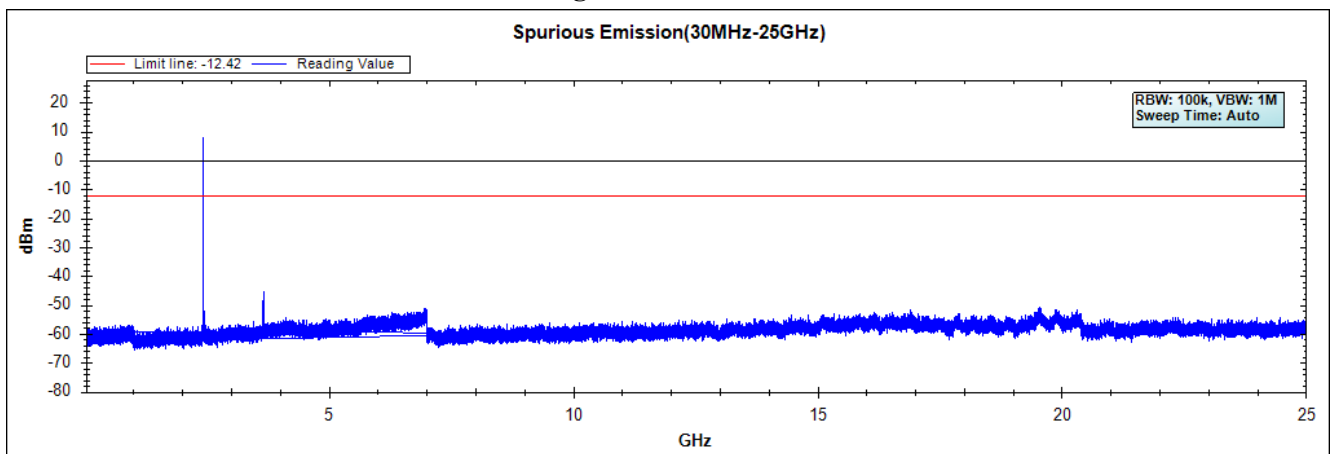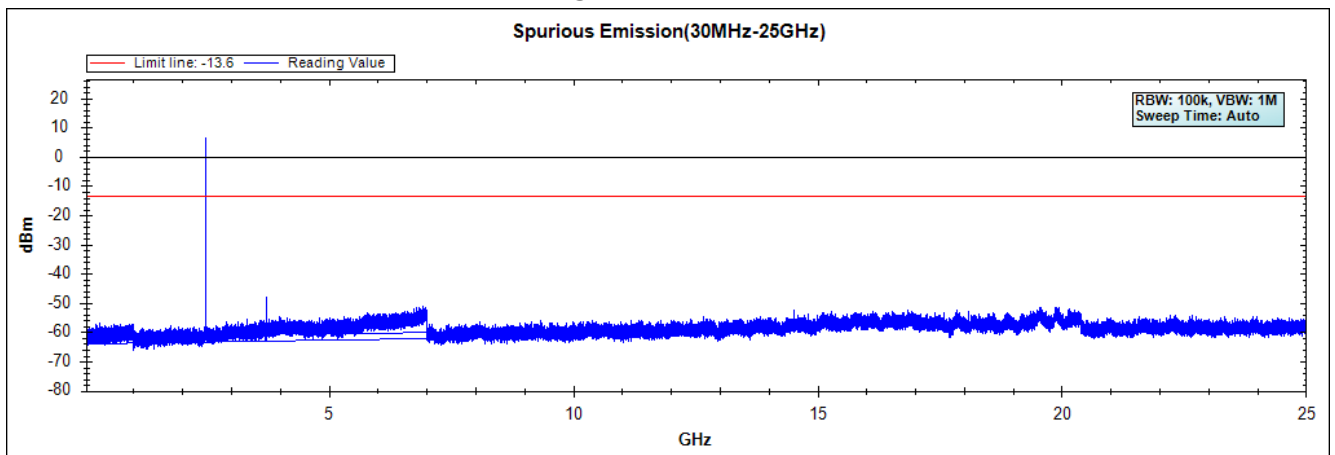

Note: The above test pattern is synthesized by multiple of the frequency range.

Product : Bluetooth Headset
Test Item : RF Antenna Conducted Test
Test Mode : Mode 2: Transmit - 3Mbps
Test Date : 2021/07/15


Figure Channel 00:**Figure Channel 39:****Figure Channel 78:**

Note: The above test pattern is synthesized by multiple of the frequency range.


6. Band Edge

6.1. Test Setup

RF Conducted Measurement

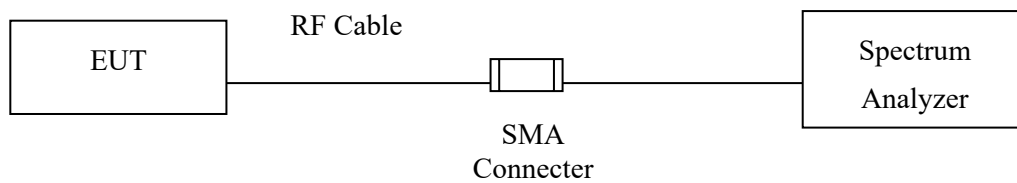

RF Radiated Measurement:

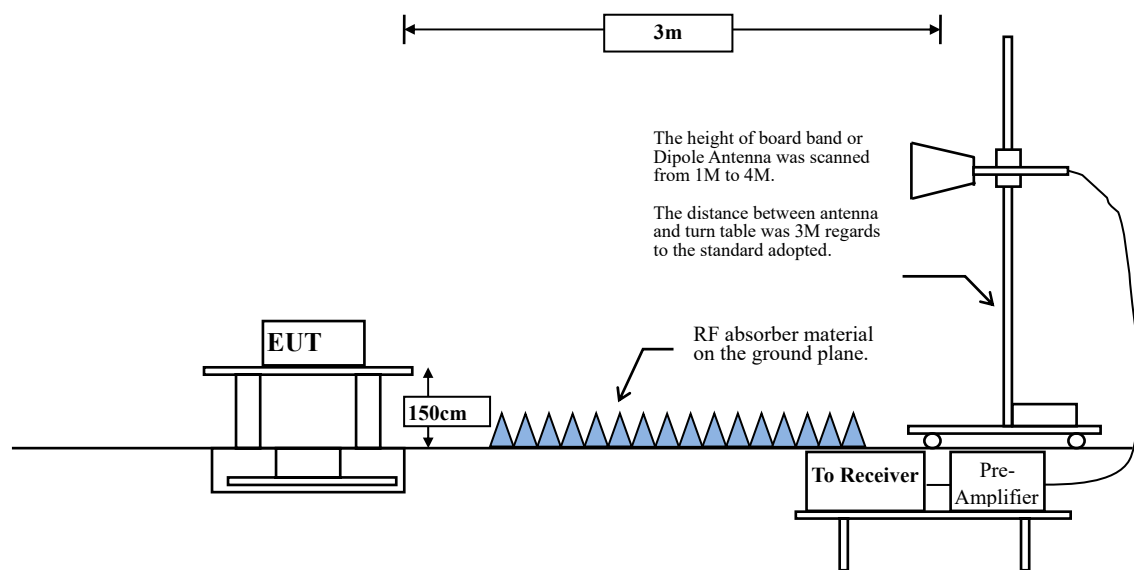

6.2. Limit

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.


Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth setting below 1GHz and above 1GHz on the field strength meter is 120 kHz and 1MHz, respectively.

6.4. Test Result of Band Edge

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2402MHz)
 Test Date : 2021/07/21

Horizontal

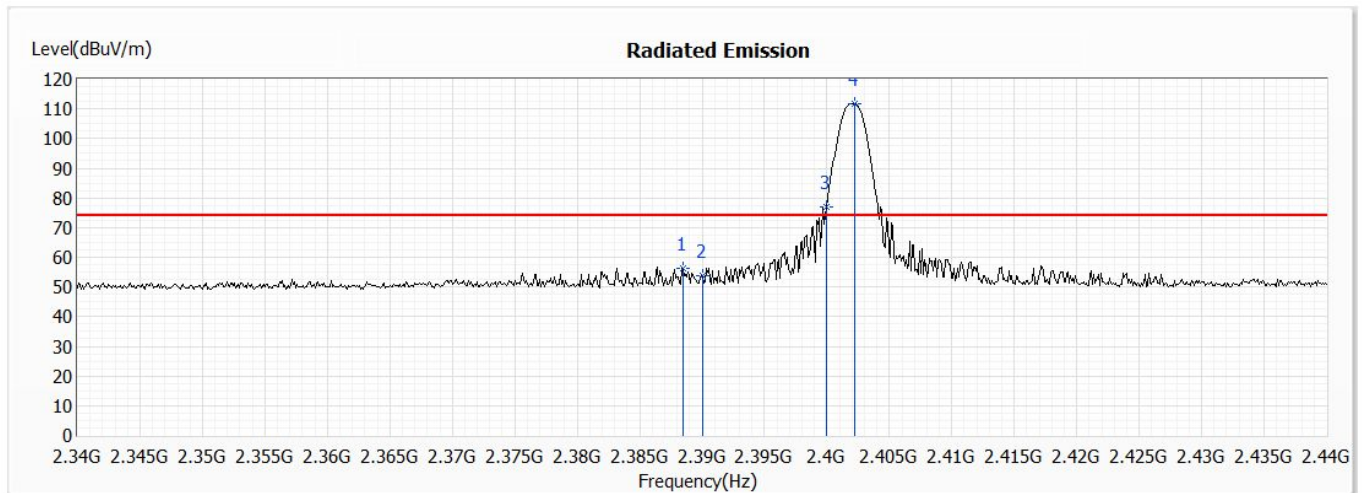

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2388.500	56.40	74.00	-17.60	44.03	12.37	PK
2	2390.000	53.69	74.00	-20.31	41.31	12.38	PK
3	2400.000	77.11	--	--	64.65	12.46	PK
4	2402.200	111.72	--	--	99.26	12.46	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Channel No.	Frequency (MHz)	Peak Measurement (dBm)	Duty Cycle Factor (dB)	Average Measurement (dBm)	Margin (dB)	Average Limit (dBm)	Result
00 (Average)	2388.5	56.4	-30.782	25.618	-28.382	54.000	Pass
00 (Average)	2390	53.69	-30.782	22.908	-31.092	54.000	Pass
00 (Average)	2400	77.11	-30.782	46.328	--	--	Pass
00 (Average)	2402.2	111.72	-30.782	80.938	--	--	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 15.

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2402MHz)
 Test Date : 2021/07/21

Vertical

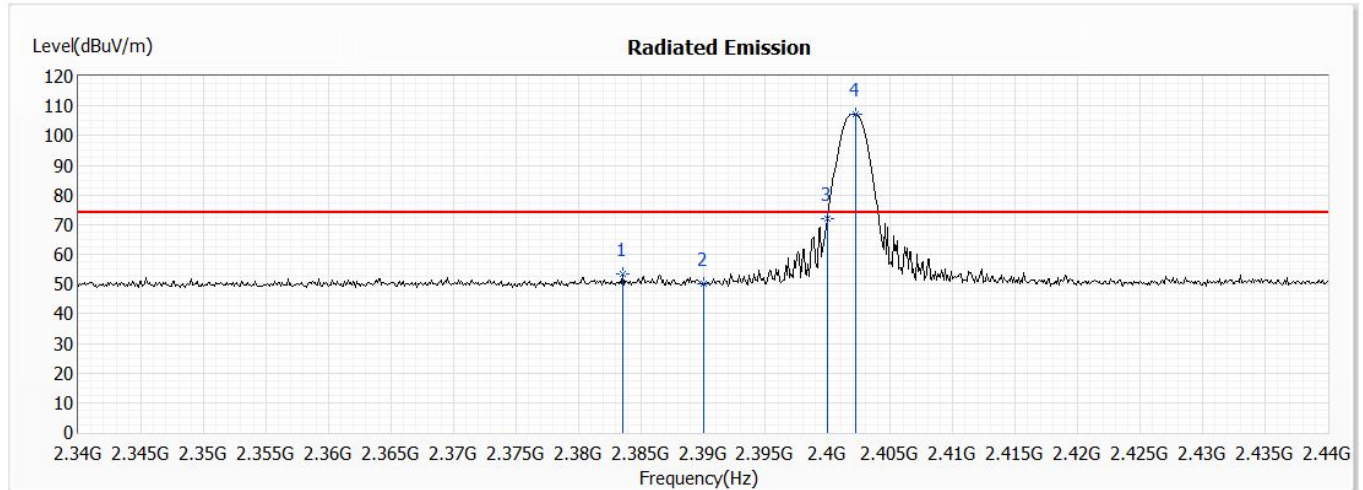

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2383.600	53.33	74.00	-20.67	41.00	12.33	PK
2	2390.000	50.27	74.00	-23.73	37.89	12.38	PK
3	2400.000	72.16	--	--	59.70	12.46	PK
4	2402.200	107.07	--	--	94.61	12.46	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Channel No.	Frequency (MHz)	Peak Measurement (dBm)	Duty Cycle Factor (dB)	Average Measurement (dBm)	Margin (dB)	Average Limit (dBm)	Result
00 (Average)	2383.6	52.19	-30.782	21.408	-32.592	54.000	Pass
00 (Average)	2390	50.27	-30.782	19.488	-34.512	54.000	Pass
00 (Average)	2400	72.16	-30.782	41.378	--	--	Pass
00 (Average)	2402.2	107.07	-30.782	76.288	--	--	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 15.

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2480MHz)
 Test Date : 2021/07/21

Horizontal

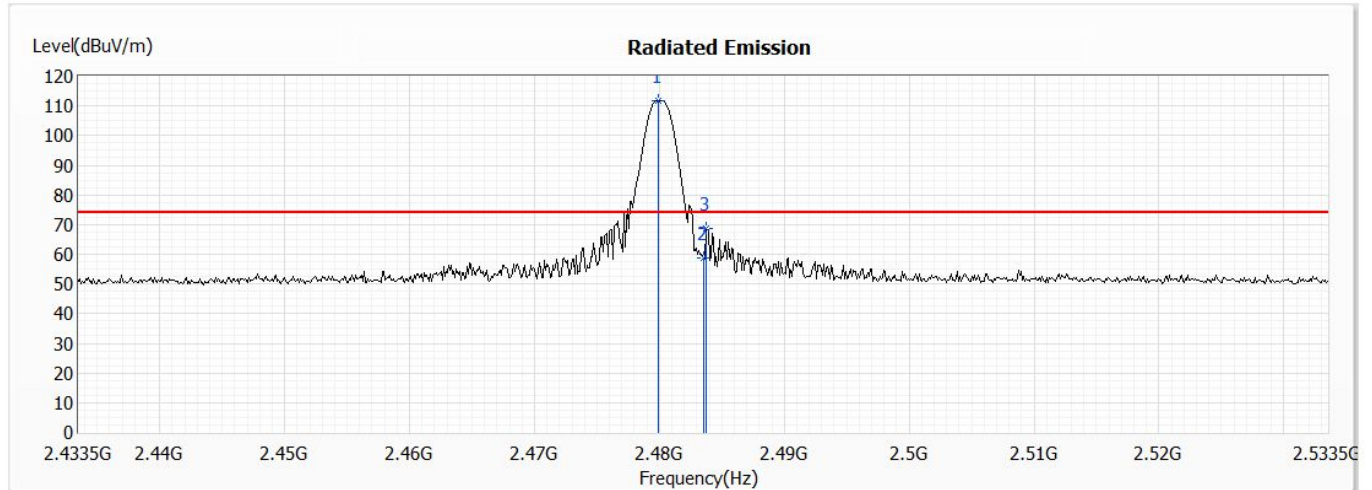

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2479.900	111.85	--	--	99.13	12.72	PK
2	2483.500	58.62	74.00	-15.38	45.89	12.73	PK
3	2483.700	68.50	74.00	-5.50	55.77	12.73	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Channel No.	Frequency (MHz)	Peak Measurement (dBm)	Duty Cycle Factor (dB)	Average Measurement (dBm)	Margin (dB)	Average Limit (dBm)	Result
78 (Average)	2479.9	111.85	-30.782	81.068	--	--	Pass
78 (Average)	2483.5	58.62	-30.782	27.838	-26.162	54.000	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 15.

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2480MHz)
 Test Date : 2021/07/21

Vertical

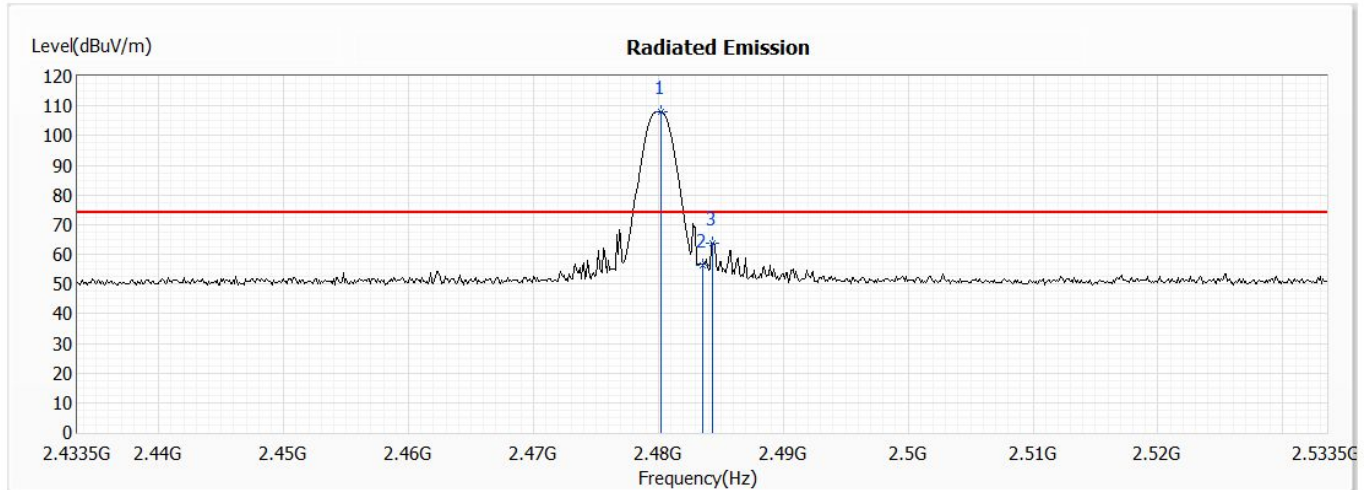

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2480.200	107.97	--	--	95.25	12.72	PK
2	2483.500	56.44	74.00	-17.56	43.71	12.73	PK
3	2484.300	63.72	74.00	-10.28	50.99	12.73	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Channel No.	Frequency (MHz)	Peak Measurement (dBm)	Duty Cycle Factor (dB)	Average Measurement (dBm)	Margin (dB)	Average Limit (dBm)	Result
78 (Average)	2480.2	107.97	-30.782	77.188	--	--	Pass
78 (Average)	283.5	56.44	-30.782	25.658	-28.342	54.000	Pass
78 (Average)	2484.3	63.72	-30.782	32.938	-21.062	54.000	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 15.

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps (2402MHz)
 Test Date : 2021/07/21

Horizontal

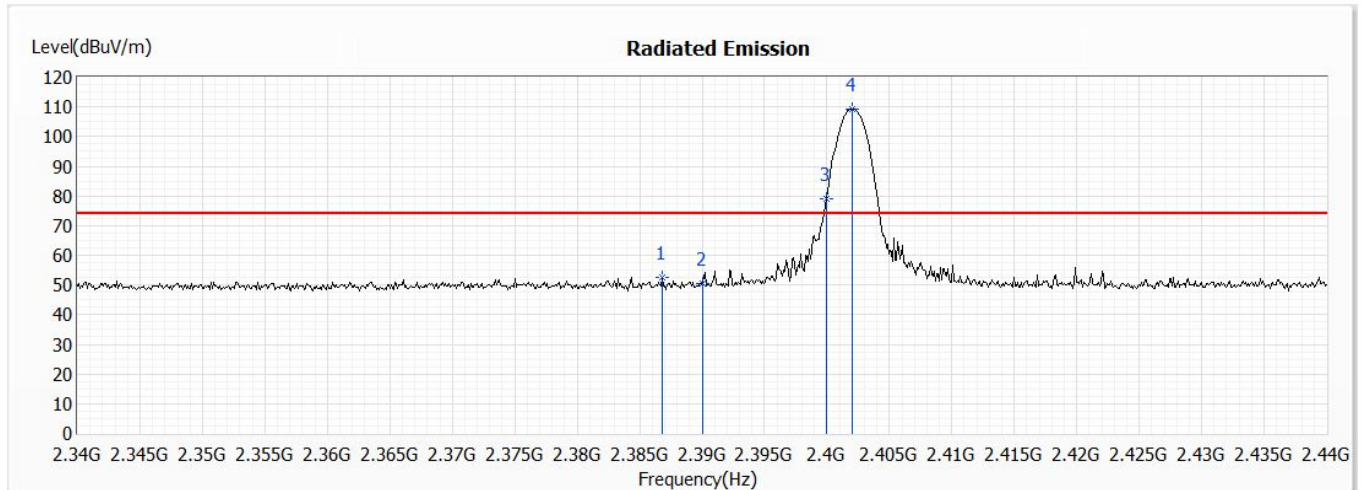

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2386.800	52.50	74.00	-21.50	40.14	12.36	PK
2	2390.000	50.57	74.00	-23.43	38.19	12.38	PK
3	2400.000	78.85	--	--	66.39	12.46	PK
4	2402.000	109.27	--	--	96.81	12.46	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Channel No.	Frequency (MHz)	Peak Measurement (dBm)	Duty Cycle Factor (dB)	Average Measurement (dBm)	Margin (dB)	Average Limit (dBm)	Result
00 (Average)	2386.8	52.5	-30.782	21.718	-32.282	54.000	Pass
00 (Average)	2390	50.57	-30.782	19.788	-34.212	54.000	Pass
00 (Average)	2400	78.85	-30.782	48.068	--	54.000	Pass
00 (Average)	2402	109.27	-30.782	78.488	--	--	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 15.

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps (2402MHz)
 Test Date : 2021/07/21

Vertical

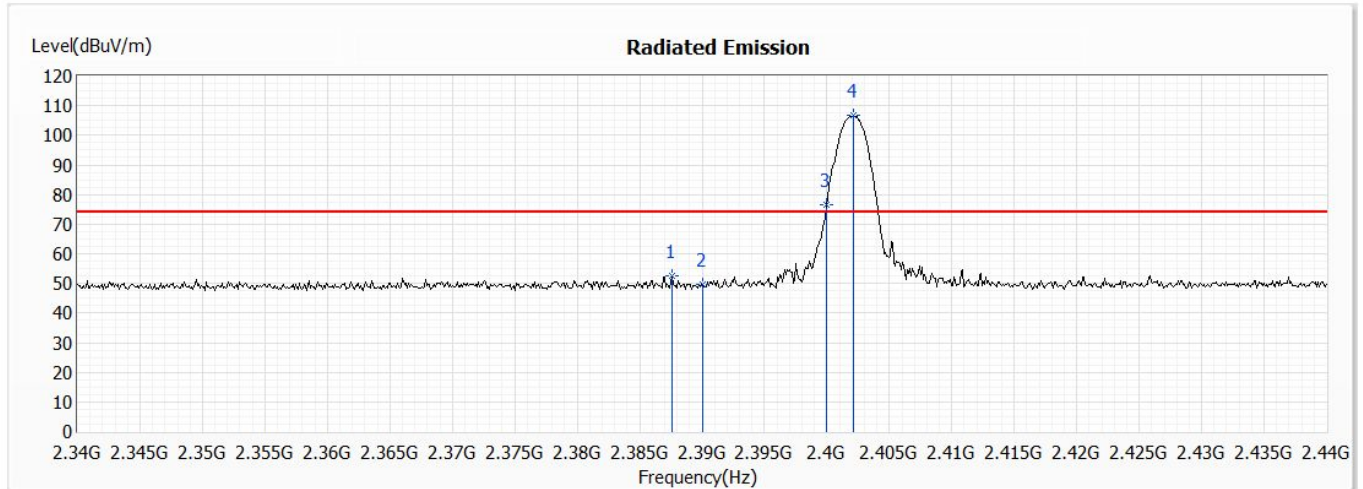

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2387.600	52.69	74.00	-21.31	40.32	12.37	PK
2	2390.000	49.51	74.00	-24.49	37.13	12.38	PK
3	2400.000	76.59	--	--	64.13	12.46	PK
4	2402.100	106.63	--	--	94.17	12.46	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Channel No.	Frequency (MHz)	Peak Measurement (dBm)	Duty Cycle Factor (dB)	Average Measurement (dBm)	Margin (dB)	Average Limit (dBm)	Result
00 (Average)	2387.6	52.69	-30.782	21.908	-32.092	54.000	Pass
00 (Average)	2390	49.51	-30.782	18.728	-35.272	54.000	Pass
00 (Average)	2400	76.59	-30.782	45.808	--	--	Pass
00 (Average)	2402.1	106.63	-30.782	75.848	--	--	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 15.

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps (2480MHz)
 Test Date : 2021/07/21

Horizontal

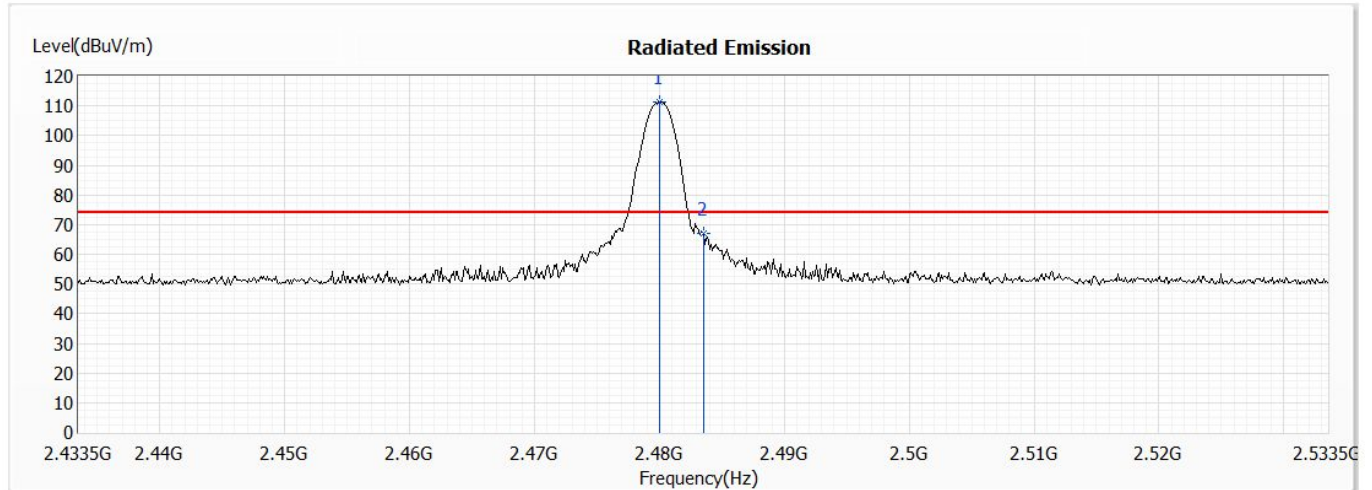

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2480.000	111.24	--	--	98.52	12.72	PK
2	2483.500	67.05	74.00	-6.95	54.32	12.73	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Channel No.	Frequency (MHz)	Peak Measurement (dBm)	Duty Cycle Factor (dB)	Average Measurement (dBm)	Margin (dB)	Average Limit (dBm)	Result
78 (Average)	2480	111.24	-30.782	80.458	--	--	Pass
78 (Average)	2483.5	67.05	-30.782	36.268	-17.732	54.000	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 15.

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps (2480MHz)
 Test Date : 2021/07/21

Vertical

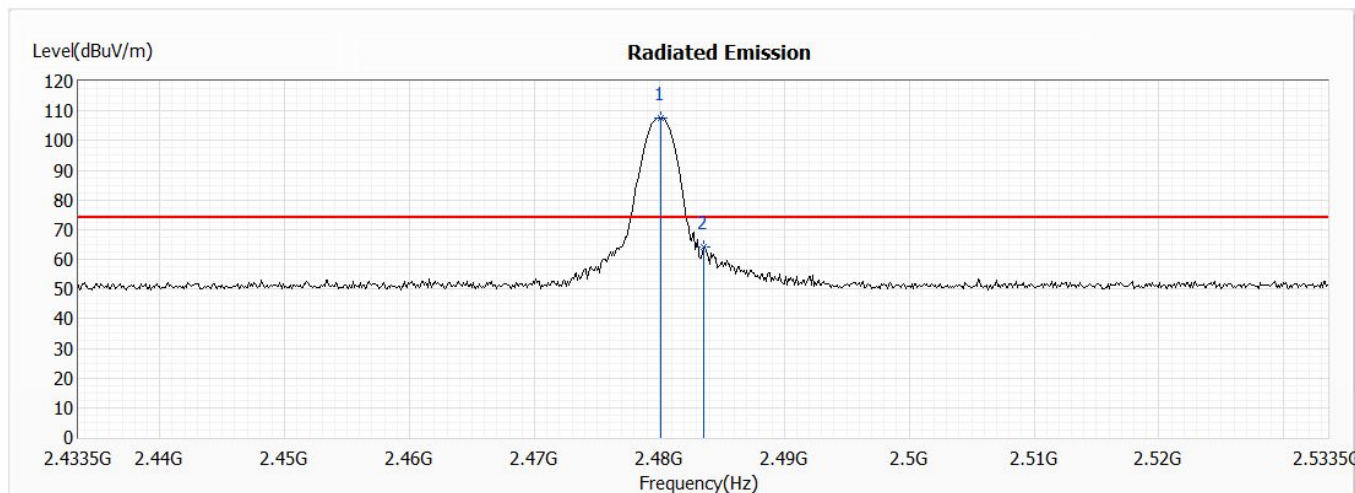

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2480.100	107.62	--	--	94.90	12.72	PK
2	2483.500	64.26	74.00	-9.74	51.53	12.73	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Channel No.	Frequency (MHz)	Peak Measurement (dBm)	Duty Cycle Factor (dB)	Average Measurement (dBm)	Margin (dB)	Average Limit (dBm)	Result
78 (Average)	2480.1	107.62	-30.782	76.838	--	--	Pass
78 (Average)	2483.5	64.26	-30.782	33.478	-20.522	54.000	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 15.

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps(Hopping off)
 Test Date : 2021/07/13

Measurement Level	Result
Δ (dB)	
> 20	PASS

Figure Channel 00:


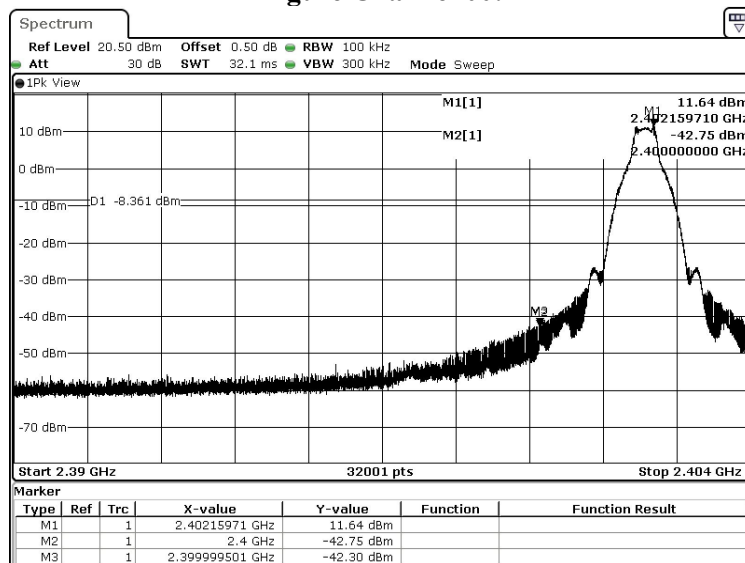



Figure Channel 78:

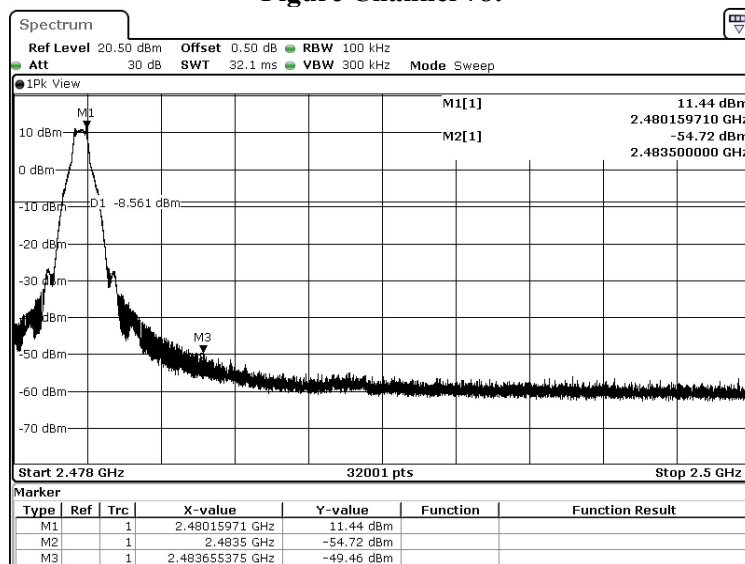

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps (Hopping off)
 Test Date : 2021/07/13


Measurement Level	Result
Δ (dB)	
> 20	PASS

Figure Channel 00:

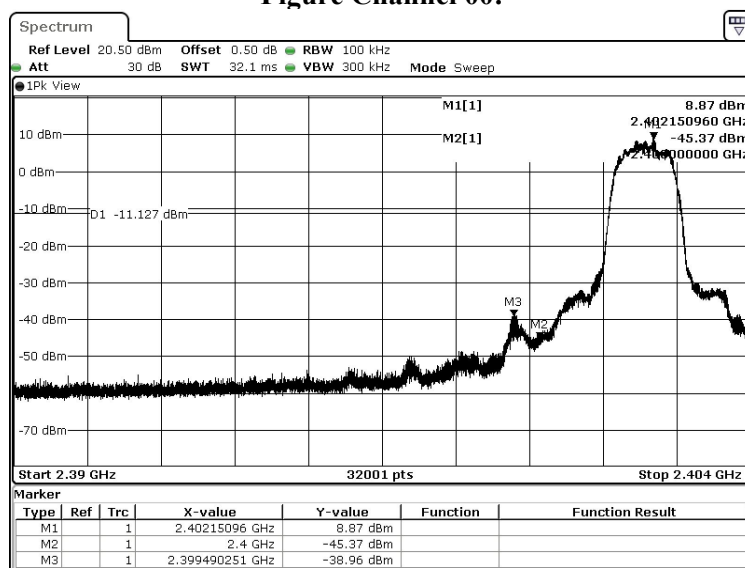

Date: 13 JUL 2021 05:04:43

Figure Channel 78:

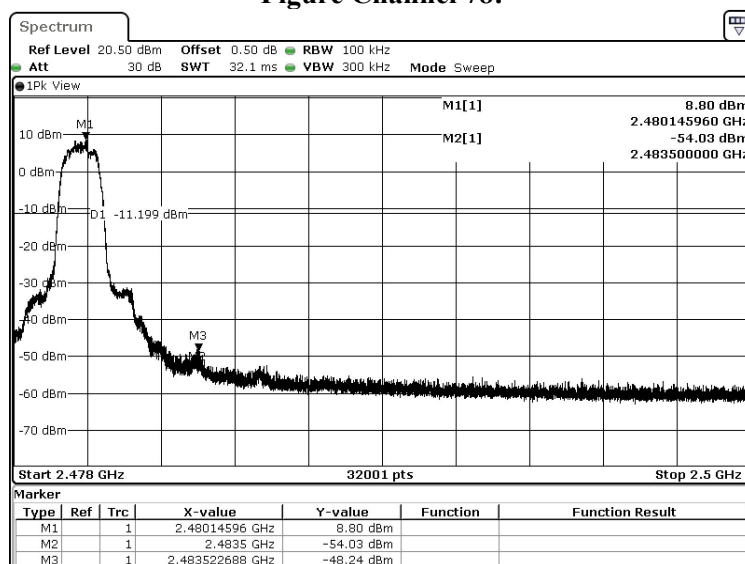


Date: 13 JUL 2021 05:22:47

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps(Hopping on)
 Test Date : 2021/07/13


Measurement Level	Result
Δ (dB)	
> 20	PASS

Figure Channel Hopping:

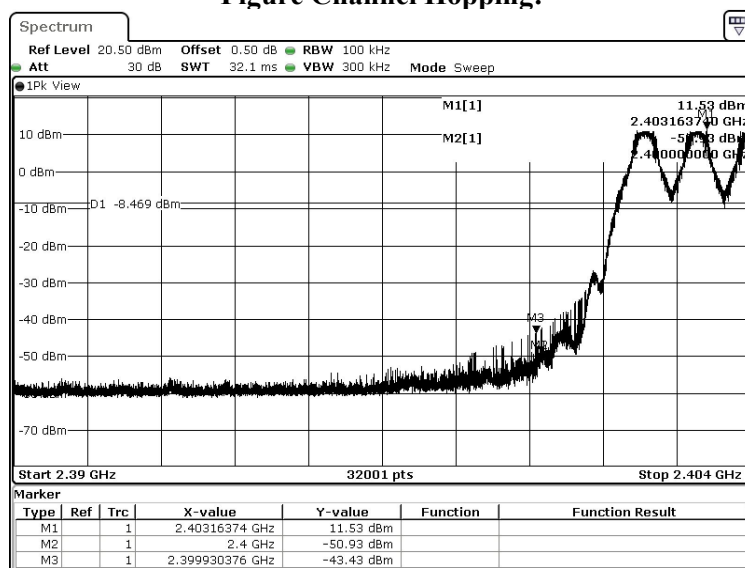

Date: 13 JUL 2021 03:54:24

Figure Channel Hopping:

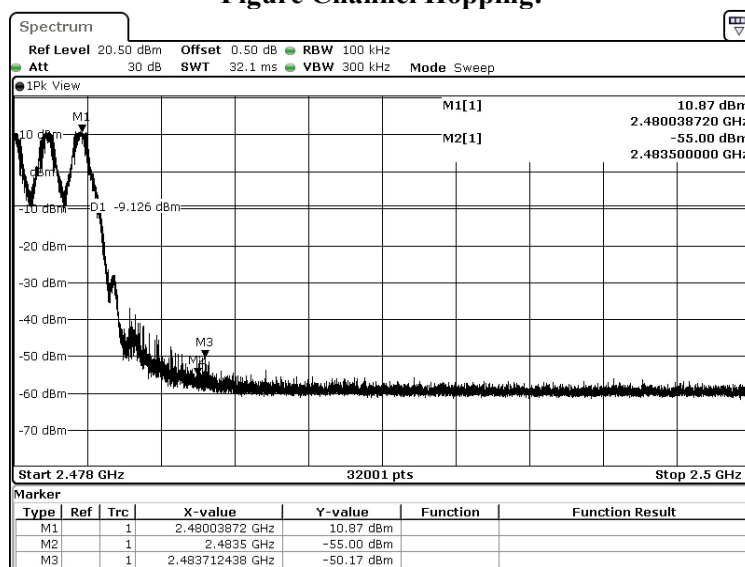


Date: 13 JUL 2021 04:12:43

Product : Bluetooth Headset
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps (Hopping on)
 Test Date : 2021/07/13


Measurement Level Δ (dB)	Result
> 20	PASS

Figure Channel Hopping:

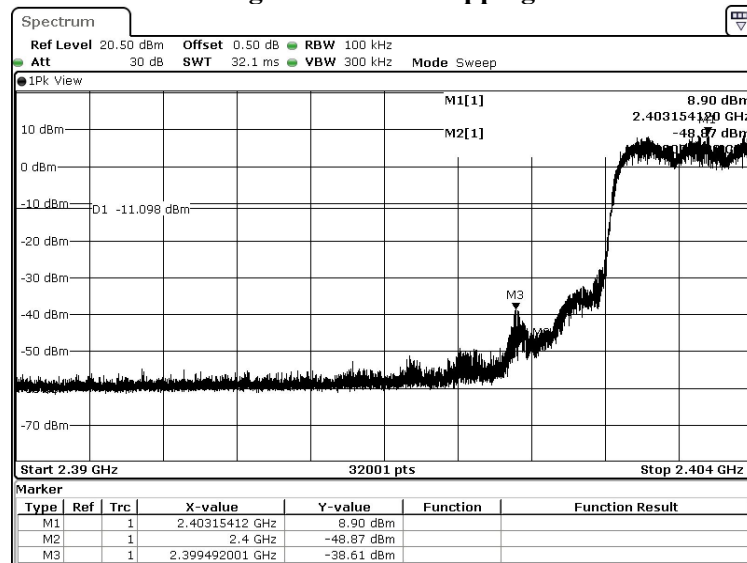

Date: 13 JUL 2021 05:08:59


Figure Channel Hopping:

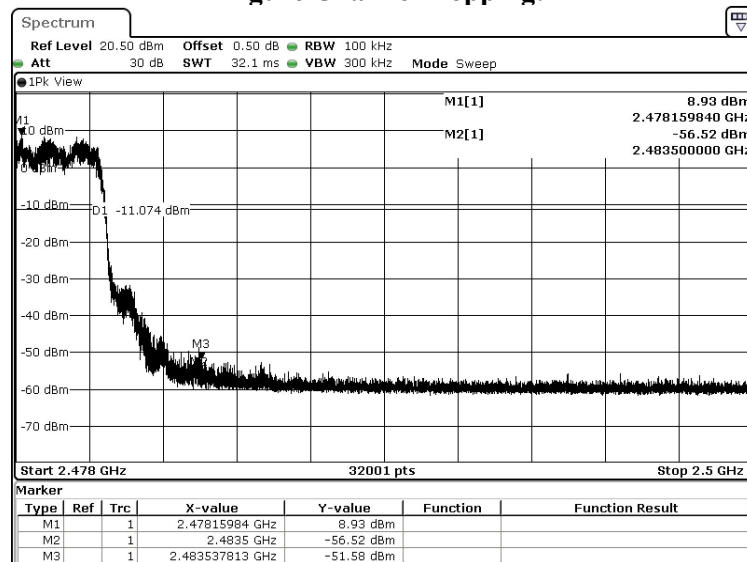

Date: 13 JUL 2021 05:25:37

7. Channel Number

7.1. Test Setup

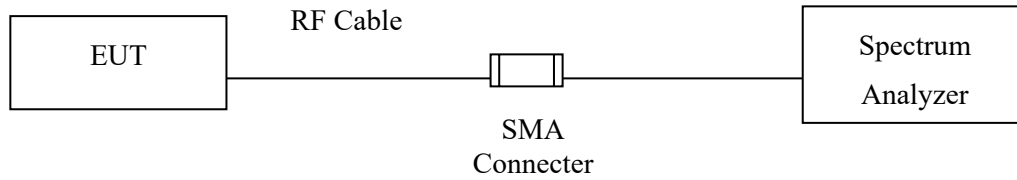

7.2. Limit

Frequency hopping systems operating in the 2400-2483.5 MHz bands shall use at least 75 hopping frequencies.

7.3. Test Procedure


Tested according to FHSS test procedure of KDB558074 section 9 (b for compliance to FCC 47CFR 15.247 requirements.

7.4. Test Result of Channel Number

Product : Bluetooth Headset
 Test Item : Channel Number
 Test Mode : Mode 1: Transmit - 1Mbps
 Test Date : 2021/07/13


Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass

2402-2421MHz

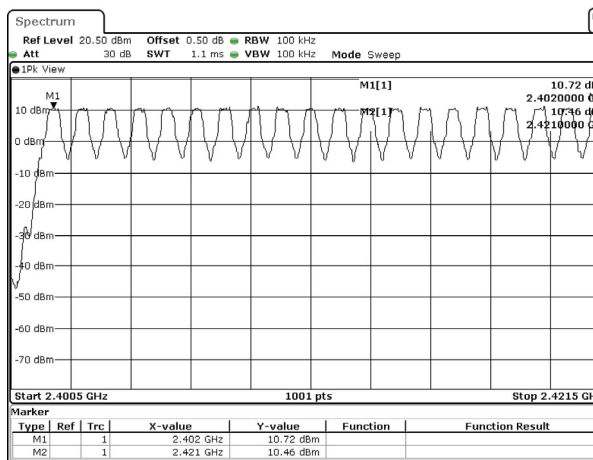


Date: 13.JUL.2021 04:14:25

2422-2441MHz

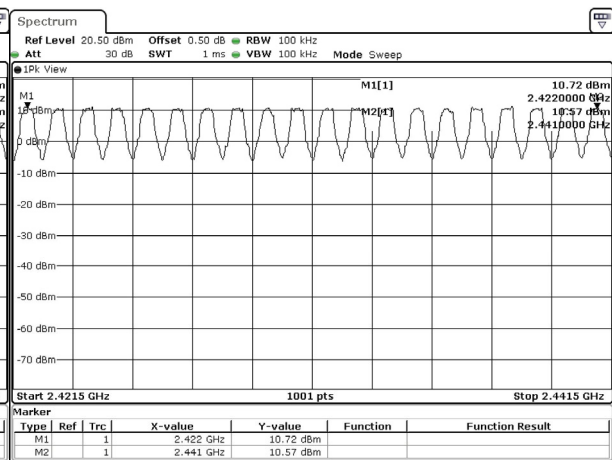


Date: 13.JUL.2021 04:15:52

2442-2461MHz

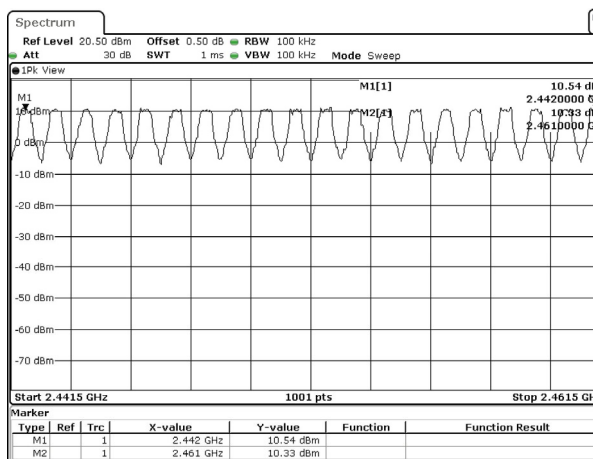

Date: 13.JUL.2021 04:16:54

2462-2480MHz

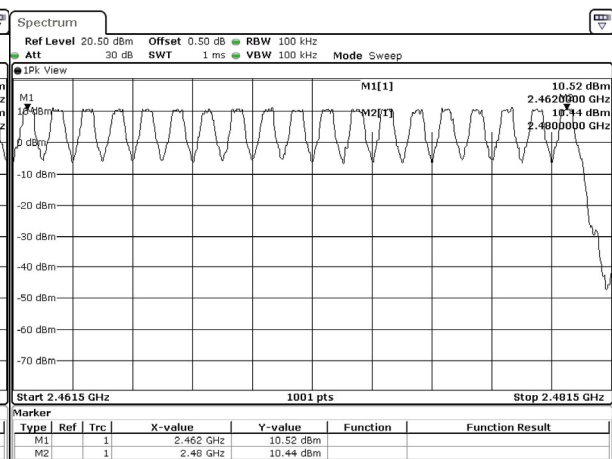


Date: 13.JUL.2021 04:18:05

Product : Bluetooth Headset
 Test Item : Channel Number
 Test Mode : Mode 2: Transmit - 3Mbps
 Test Date : 2021/07/13


Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass

2402-2421MHz

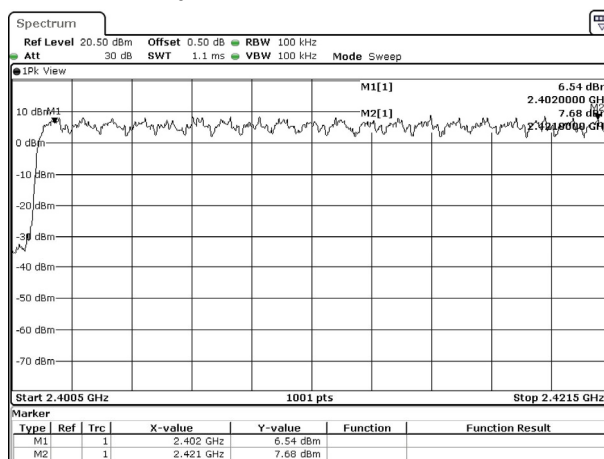


Date: 13.JUL.2021 05:27:34

2422-2441MHz

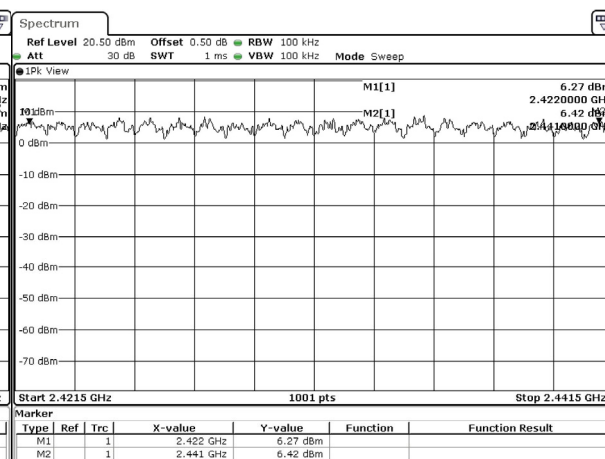


Date: 13.JUL.2021 05:28:50

2442-2461MHz

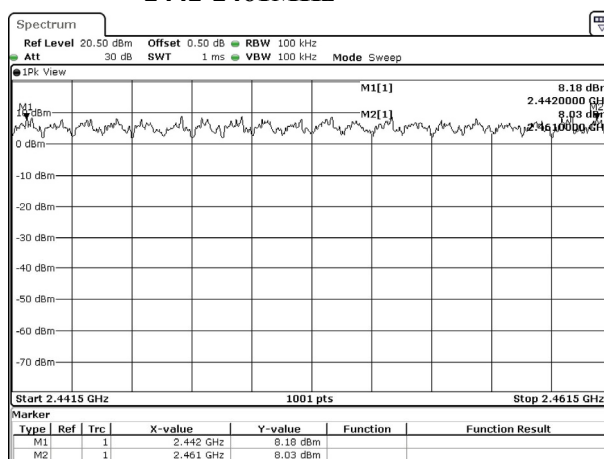

Date: 13.JUL.2021 05:30:20

2462-2480MHz

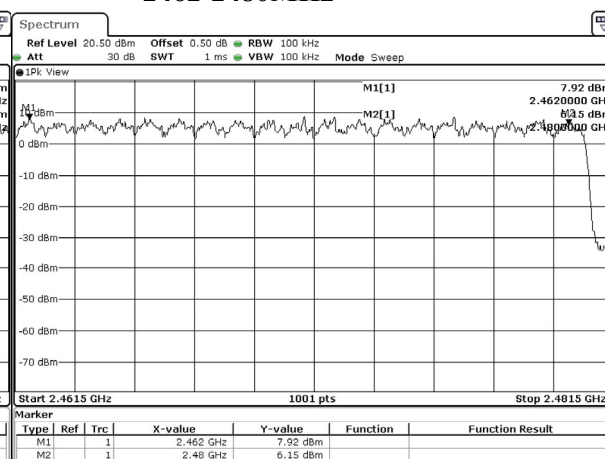

Date: 13.JUL.2021 05:32:06