

# User's Manual

INFIRAY OUTDOOR  
**RICO MK2 LRF**

**Rugged Infrared Compact Optic**



## WARNING! ITAR REQUIREMENTS

These products may be subject to export and foreign trade control laws of the United States and may not be exported without prior approval of the U.S. Department of State. Learn more at [irayusa.com/ITAR](http://irayusa.com/ITAR).

### CAUTION




Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

2601 State Hwy 121, Building 3, Suite 306, Lewisville, TX 75056  
800.769.7125 [info@irayusa.com](mailto:info@irayusa.com)

NOTICE: This product is a Class 3R laser product.

Explanatory Label

Mfr ID and Certification Label

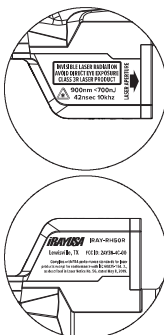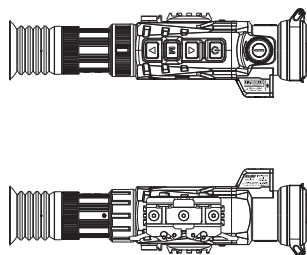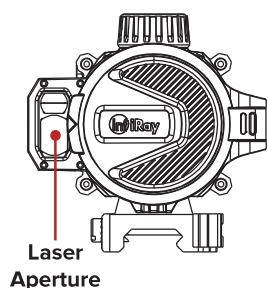

NOTE: There is no scheduled maintenance or service necessary to keep this product in compliance and no user service or maintenance is required.

This Laser Product is designated as Class 3R during all procedures of operation.

Wavelength: 900 nm  
Laser Power for Classification: <700nJ  
Emission Type: Pulsed, Invisible  
Emission Frequency 10 kHz  
Beam Diameter: 12 mm\*2 mm  
Divergence: 6 mRad\*1 mRad

**INVISIBLE LASER RADIATION  
AVOID DIRECT EYE EXPOSURE  
CLASS 3R LASER PRODUCT**

#### NOTES:

- There is no service required or allowed of this product by the end user.
- This product is to be serviced or repaired only by factory authorized technicians.
- This product is not to be opened or modified by the user.
- The user is not to modify the unit or remove protective covers or housing. Service is only to be handled by authorized factory trained technicians. This product has no user-serviceable parts.
- Do not point laser or allow laser light to be directed or reflected toward other people or reflective objects.
- Operators should be trained to not target the eyes of people, animals, and pets or aim at reflective objects, etc.
- There is a potential hazard of eye or skin exposure to laser radiation if the included instructions are not followed.
- This laser is never to be operated if the unit is defective or the cover or seal is damaged.
- Always operate the product with the aperture pointed downrange.

## TABLE OF CONTENTS

1. Overview .....	2
2. Features .....	2
3. Tech Specs .....	3
4. Accessories .....	4
5. Components and Controls .....	5
6. Description of Control Buttons & Shortcuts ...	6
7. Quick Start Guide .....	8
8. Charging the Battery Pack .....	10
9. Installing the Battery Pack .....	11
10. Removing the Battery Pack .....	12
11. Battery Safety Warnings .....	12
12. External Power Supply .....	13
13. Mounting the RICO Mk2 .....	13
14. Operating Instructions .....	15
15. Zeroing the RICO Mk2 .....	20
16. Non-Uniformity Correction .....	21
17. Photography and Video Recording .....	22
18. Accessing the Internal Memory .....	24
19. Using The InfiRay Outdoor App .....	25
20. Integrated Laser Rangefinder .....	26
21. Digital Zoom .....	27
22. Ultra-Clear Mode .....	27
23. Main Menu Options and Descriptions .....	28
24. Basic Inspection .....	47
25. Basic Maintenance .....	47
26. Warranty .....	48
27. FCC Statement .....	49
28. General Troubleshooting .....	49
29. Notes .....	52

### WARNING: CHOKING HAZARD

Children under 3 years old can choke or suffocate on small parts of this product. This product is not a toy; keep out of reach of children.

# 1. OVERVIEW

Built upon the RICO Mk1 series, the RICO Mk2 LRF was designed with an integrated 1,200-yard capable rangefinder, a 60hz refresh rate, and increased sensitivity to an impressive  $\leq 20$  mK. The RICO Mk2 features a high-performance 12  $\mu$ m Micro II core, a 1750-yard detection range, and an ultra-high-contrast 2560×2560 AMOLED HD display for an unparalleled viewing experience. The RICO Mk2 takes its image processing one step further with Advanced Image Correction and Automatic Image Optimization courtesy of its MATRIX III processor. An intuitive and easy-to-use interface combines with a picture-in-picture function, 5+ hour run-time, magnesium housing, 1000 G/s<sup>2</sup> shock resistance, and 32 GB of internal memory. The RICO Mk2 also unlocks advanced features such as a rotating zoom lever, magnetic charging port, and recoil activated video.

# 2. FEATURES

- 12  $\mu$ m high-performance thermal detector
- $\leq 20$  mK sensitivity
- 1200-yard integrated, high-precision laser rangefinder
- Stepped digital zoom from 1.0×–4.0×
- High image quality
- Magnesium alloy housing
- Quick-change rechargeable battery pack
- HD 2560×2560 AMOLED display
- High frame frequency: 60Hz
- Multiple reticle types and color options
- Supports multiple charging options, including a durable magnetic charging cable
- Recoil activated video
- Multiple zero profiles and ranges
- Built-in 32 GB storage to support image capture and video recording
- Built-in Wi-Fi module
- Mobile device App compatible
- Built-in gravity sensor
- Picture in Picture (PIP)
- User-friendly interface
- Pixel calibration functions

# 3. TECH SPECS

RICO MK2 LRF	RH50R	RL42R
SENSOR		
Resolution	640×512	384×288
Pixel Size	12 μm	
Frame Rate	60hz	
Sensor Sensitivity	≤20 mK	
Image Processing	MATRIX III	
Core	InfiRay Micro II 640	InfiRay Micro II 384
OPTICS		
Objective Lens	50 mm f/1.0	42 mm f/1.0
Magnification	3×	4×
Digital Zoom	4×, Stepped	
Field of View	8.8° × 6.6°	6.3° × 4.7°
Detection Range	2840 Yards	2400 Yards
Display Type	1.03-inch Large-format AMOLED	
Display Resolution	2560×2560	
Color Palettes	White Hot, Black Hot, Red Hot, Rainbow, Violet, Crimson, Viridian	
Reticle Types	8 (7 Static, 1 DIY)	
Reticle Colors	Black Red, Black Green, White Red, White Green, Black White, White Black, Crimson, Viridian	
Mounting System	Picatinny MIL-STD 1913 Rail	
P.I.P.	Yes	
Rangefinder	Integrated 1200 yd LRF	
Eye Relief	60 mm	
Diopter Range	-3 to +3	
ELECTRONICS		
Onboard Recording	Video, Recoil-Activated Video, and Image	
Onboard Storage	32 GB	
Wireless Connectivity	Image and Video via App.	
Data/Power Connector	USB-C	
Power Supply	USB-C External, IBP-5 Li-ion Battery Packs (5+ Hours Each)	
Start Up Time	<10 Seconds, Instant from Standby	
PHYSICAL		
Size	9.50" × 3.00" 3.75 ?"	
Weight	36.63 Oz	
ENVIRONMENTAL/WARRANTY		
Warranty	5 Years	
Housing Material	Magnesium Alloy	
Ingress Protection	IP67	
Operation Temperature	-4°F~122°F	
Max. Recoil	1000 g/s <sup>2</sup> (300 Win./7mm Mag)	

4. ACCESSORIES


The RICO Mk2 rifle scope ships with everything you need to get out and hunt.

- Objective Lens Cap
- Standard Rubber Eyeguard
- Dual Throw Mount for RICO Mk2
- M5 Screws
- 3mm Hex Key and Spanner Tool
- Magnetic Charging Cable
- USB-C Cable
- IBP-5 Battery 4400 mAh
- IBC-5 Battery Charger
- USB Power Adapter
- Soft Case
- Lens Cloth
- User Manual




Various replacement accessories, are available for purchase. Contact 800-769-7125 or [irayusa.com/support](http://irayusa.com/support).


5. COMPONENTS AND CONTROLS

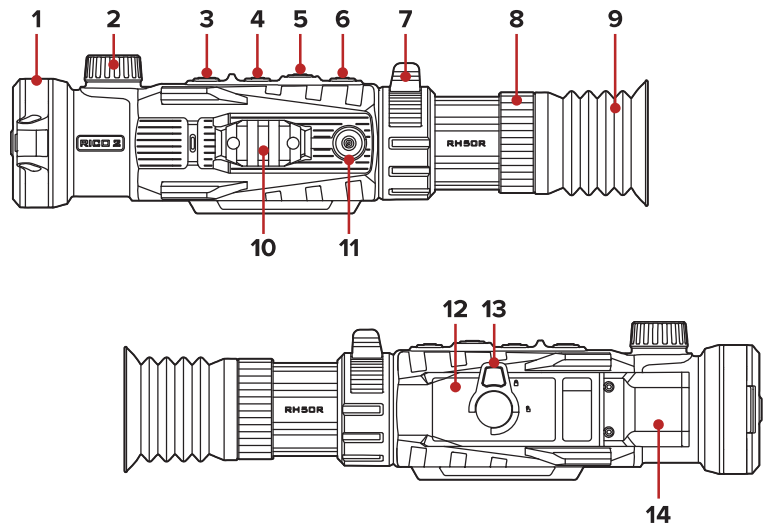



- 1 Objective Lens Cap
- 2 Objective Lens Focus Knob
- 3 Power Button
- 4 Up Button
- 5 Menu Button
- 6 Down Button
- 7 Zoom Lever
- 8 Eyepiece / Diopter Adjustment Ring
- 9 Eyeguard
- 10 Accessory Rail
- 11 Magnetic Charging Port / USB-C Port
- 12 IBP-5 Battery Pack
- 13 Battery Pack Pull-Ring
- 14 Laser Rangefinder


6. DESCRIPTION OF CONTROL  
BUTTONS AND SHORTCUTS


Power Button 		
Current Screen, Menu, or Device Status	Short Press	Long Press
Device off	—	Power on the device
Home screen	Perform a shuttered non-uniformity correction (NUC)	Power off the device
Main menu	Return to the previous menu without saving changes	—
Single or continuous rangefinding mode	Exit the rangefinding mode	Power off the device
Defect pixel correction & reticle zeroing interfaces	Exit the interface without saving	—

Up Button 		
Current Screen / Menu	Short Press	Long Press
Home screen	Enter single rangefinding mode	Enter continuous ranging mode
Single rangefinding mode	Take a rangefinding measurement	Switch from single to continuous rangefinding
Continuous rangefinding mode	—	Exit the rangefinding mode
Main menu / quick menu	Move the cursor up	—
Defect pixel correction & reticle zeroing interfaces	Move the cursor 1 pixel in the positive direction	Move the cursor 10 pixels in the positive direction



Power Button  + Up Button 		
Current Screen / Menu	Short Press	Long Press
Home screen	Enter the standby screen	—

Up Button  + Down Button 		
Current Screen / Menu	Short Press	Long Press
Home screen	Perform a shuttered non-uniformity correction (NUC)	—

Menu Button 		
Current Screen / Menu	Short Press	Long Press
Home screen	Enter the quick menu	Enter the main menu
Main menu	Change menu options; enter submenu; or confirm submenu changes and return	Save and return to home screen
Quick menu	Toggle through the menu options	Exit the quick menu
Defective pixel correction interface	Select / deselect axis of movement (X or Y)	Correct pixel(s) and return to previous
Reticle zeroing interface	Select / deselect the axis of movement (X or Y)	Save the new reticle position

Down Button 		
Current Screen / Menu	Short Press	Long Press
Home screen	Take a photo	Start / stop recording video
Main menu / quick menu	Move the cursor down	—
Defect pixel correction & reticle zeroing interfaces	Move the cursor 1 pixel in the negative direction	Move the cursor 10 pixels in the negative direction

Zoom Lever	
Current Screen / Menu	Rotate
Home screen	Adjust the digital zoom
In the screen brightness menu	Adjust the screen brightness


Menu Button  + Down Button 		
Current Screen / Menu	Short Press	Long Press
Home screen	—	Activate / deactivate reticle (Long press for 15 seconds)

# 7. QUICK START GUIDE

## Step 1: Prepare to Use the RICO Mk2


- 1. Compare the box contents to the accessories list and examine each for any shipping damage. See **Accessories** on page 4.
- 2. Check the lens to ensure there are no smudges or dirt present. Clean with the included lens cloth, if necessary.
- 3. Charge the battery pack (12). See **Charging the Battery Pack** on page 10.
- 4. Install the eyeguard (9).
- 5. Mount the RICO Mk2 to the weapon. See **Mounting the RICO Mk2** on page 13.

## Step 2: Turn On the RICO Mk2

- 1. Open the objective lens cap (1).
- 2. Long press the **Power**  **Button** for 3 seconds to power on the RICO Mk2.
- 3. Rotate the eyepiece diopter adjustment ring (8) until the interface icons are clear.


**WARNING:** Do not point the objective lens toward intense energy sources, such as the sun. This may render the electronic components inoperative. The warranty does not cover damage caused by improper operation.

## Step 3: Adjust Settings in the Quick Menu

Short press the **Menu**  **Button** to enter the quick menu to adjust the following settings (see **Using the Quick Menu** on page 18):



- 1. Set the color palette to white hot, black hot, red hot, rainbow, violet, crimson, or viridian.
- 2. Select an image brightness level, from 0–10.
- 3. Select an image contrast level, from 0–10.
- 4. Select an image sharpness level, from 0–10.
- 5. Select a zero distance.

## Step 4: Adjust Device Settings

- 1. Long press the **Menu**  **Button** to enter the main menu (see **Main Menu Options and Descriptions** on page 28 for detailed instructions) to:
  - a. Turn on Ultra-Clear mode.
  - b. Turn on the PIP window.

- c. Set the non-uniformity correction (NUC) mode to automatic (A) or manual (M).
  - d. Turn on the motion sensor.
  - e. Turn on recoil activated video.
  - f. Turn on the microphone.
  - g. Select a screen brightness level, from 0–100%.
  - h. Set the date and time.
  - i. Set the unit of measure to meters or yards.
- 2. From the home screen, rotate the zoom lever (7) to zoom in and out on the observed object.

## Step 5: Set Up the Reticle and Zero the RICO Mk2


- 1. The reticle may be inactive when the RICO Mk2 is powered on for the first time. To activate the reticle, press and hold the **Menu**  and **Down**  **Buttons** at the same time for 15 seconds from the home screen.
- 2. Adjust the reticle settings (see **Main Menu > Reticle** on page 29):
  - a. Set the zeroing profile to A, B, C, D, E, or F.
  - b. Set the reticle type to 1–7. A custom reticle is also available for purchase in the InfiRayOutdoor App.
  - c. Set the reticle color to black red, black green, white red, white green, black white, white black, crimson, or viridian.
- 3. Zero the rifle scope. See **Zeroing the RICO Mk2** on page 20.
  - a. Select, or customize, a zero distance that matches the target distance.
  - b. Zero the reticle.

## 8. CHARGING THE BATTERY PACK

The RICO Mk2 rifle scope comes with two long-lasting rechargeable lithium-ion IBP-5 battery packs, which allow for 5+ hours of operation each. The IBP-5 battery packs use a cam-locking mechanism to ensure quick and secure battery changes in the field. Fully charge the battery packs before using the RICO Mk2 for the first time.

### Charging with the Battery Charger

1. Insert a battery pack (12) into the battery charger (15). Align the slots (A) on the edge of the battery pack with the pins (B) on the inside of the charger.
2. Connect the USB-C cable (16) to the USB-C port (C) on the battery charger.
3. Connect the standard USB end of the data cable to:
  - a. The included 5V–2A USB power adapter; **OR**
  - b. Any standard USB 3.0 port on a laptop or computer.
4. During charging, the LED status indicator (D) on the battery charger will be solid red.

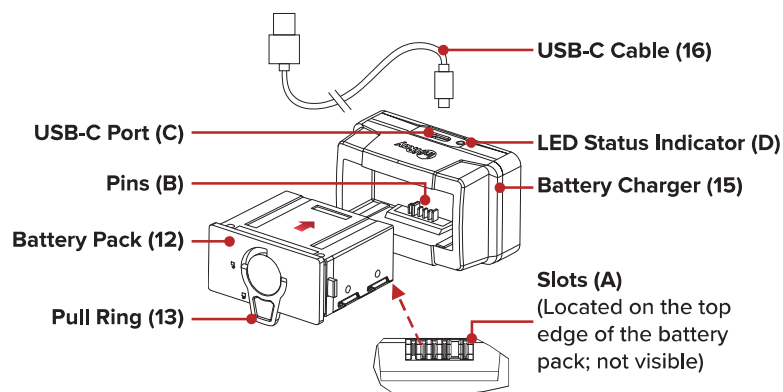

5. When fully charged, remove the battery pack from the battery charger.
  - a. The LED status indicator will turn solid green when the battery is fully charged. Do not overcharge.



**NOTE:** When the LED status indicator flashes red, the battery charger is connected to a power source but no battery pack is installed.

**WARNING:** Never use the battery charger with a USB power adapter that is greater than 5V–2A.


### Charging Via the Magnetic Charging Port

1. Place the magnetic charging cable on the magnetic port (11) on the side of the rifle scope.
2. Connect the USB end of the magnetic charging cable (17) to:
  - a. The included 5V–2A USB power adapter; **OR**
  - b. Any standard USB 3.0 port on a laptop or computer; **OR**
  - c. An external power supply, such as a USB power bank.

### Charging via the USB-C Port


1. Remove the magnetic charging port and connect the USB-C cable (16) to the USB-C port (11) behind it.
2. Connect the standard USB end of the data cable to:
  - a. The included 5V–2A USB power adapter; **OR**
  - b. Any standard USB 3.0 port on a laptop or computer; **OR**
  - c. An external power supply, such as a USB power bank.
3. During charging, the battery status  icon in the status bar changes to the battery charging  icon.
4. When fully charged, disconnect the charging cable.

#### NOTES:

- You may charge and operate the RICO Mk2 at the same time.
- The battery status icon turns red  when the battery is below 20%; charge right away to avoid over-discharge and a reduction in battery capacity or service life.

## 9. INSTALLING THE BATTERY PACK

1. Pull out the pull-ring (13) on the battery pack (13) and rotate it clockwise 90 degrees until it is horizontal to the battery pack.
2. Position the battery pack with the slots (A) facing up. Align the slots (A) on the edge of the battery pack with the pins (B) on the inside of the battery compartment.
3. Firmly press the battery in to install it.

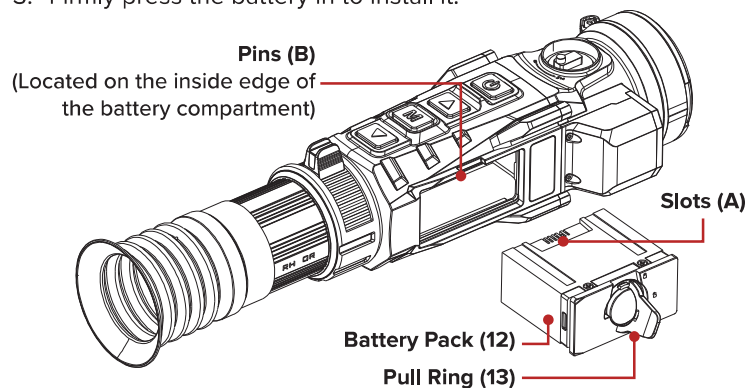

4. Rotate the pull-ring counterclockwise 90 degrees to the vertical position to lock the battery pack in place.

**WARNING:** The RICO Mk2 can only be powered by a factory-supplied IBP-5 battery pack. Using any other battery pack may cause irreparable damage to the rifle scope or cause a fire. Any damage from using an improper battery pack will not be covered by warranty.

## 10. REMOVING THE BATTERY PACK

To remove the battery pack from the RICO Mk2:

1. Pull out the pull-ring (13) on the battery pack (12) and rotate it clockwise 90 degrees until it is horizontal to the battery pack.
2. Pull the battery pack out.

## 11. BATTERY SAFETY WARNINGS

**WARNING:** Only use the battery charger supplied with the battery pack. The use of any other charger may irreparably damage the battery pack or the charger and may cause a fire. Any damage from using an improper battery charger will not be covered by warranty.

### WARNINGS:

- Do not use a battery charger, power adapter, or USB cable that has been modified or damaged.
- Do not expose the battery to high temperatures or open flame, and do not immerse it in water.
- Do not leave the battery unattended while charging.
- Do not leave the battery charging for long periods after full charge is reached. Charging time should not exceed 24 hours.
- Keep the battery pack out of the reach of children and pets.
- The battery is equipped with short-circuit protection. However, any situation that may cause short-circuiting should be avoided.
- Do not disassemble, modify, hit, or drop the battery pack.
- Do not connect the battery to any external device with an electrical current that exceeds permitted levels.
- Do not connect an external device with a current supply that exceeds the 3.0 USB port.



To maintain optimal battery capacity and service life:

- Avoid storing a fully charged or discharged battery for long periods. Partial charging of the battery is necessary if the battery will be stored for an extended period.
- Do not charge an extremely cold battery. Allow the battery to warm up for about 45 minutes before charging.

- Charge the battery at a temperature range from 32 °F to 113 °F; otherwise, the service life of the battery may be reduced.
- The recommended operating temperature range is -4 °F to 122 °F. Avoid using the battery above the maximum or below the minimum recommended temperature range as this may decrease the battery capacity or service life.

## 12. EXTERNAL POWER SUPPLY

The RICO Mk2 supports the use of a 5V external power supply, such as a mobile power bank. To connect to an external power supply:


1. Connect the USB-C cable (16) to the USB-C port (11).
2. Connect the other end of the USB-C cable to the external power supply.
3. The RICO Mk2 will switch to operation from the external power supply, and the internal battery pack will begin slowly charging.
4. In the status bar, the battery status  icon will change to the battery charging  icon.
5. If the external power supply is disconnected, the RICO Mk2 will automatically switch to the battery pack, if installed, without powering off.

**NOTE:** Do not connect the RICO Mk2 to an external device with a power supply that exceeds the 3.0 USB cable.

## 13. MOUNTING THE RICO MK2

### Installing the Dual Throw Mount

Before using the RICO Mk2, install the IRAY-AC109 dual throw mount (18) to the three mounting holes in the base of the rifle scope.

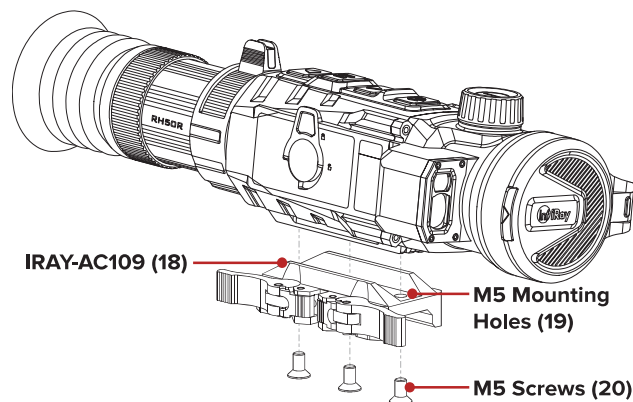


1. Install the dual throw mount (18) to the base of the RICO Mk2 using a 3mm hex key and the M5 screws (20) supplied in the package.

2. Install the RICO Mk2 to the rifle and adjust its position so that it produces a clear image and is comfortable for the shooter.
3. When the location is suitable, remove the M5 screws one at a time and apply a small amount of blue Locktite 242 to the threads.
4. Reinsert each screw and tighten to 20 in/lbs with a torque wrench. Allow the threadlocker to dry.

**NOTE:** Please note, torque is inch-pounds, NOT foot-pounds. If you do not have a torque wrench, apply until snug. Do not overtighten.

When the threadlocker is dry, install the mount and rifle scope to the Picatinny rail of your rifle.

1. Press the locking button (21) and pull the locking lever (22) to open each throw lever.
2. Install the mount to the Picatinny rail.
3. Press the levers closed to lock the mount in place. You will hear the lever and locking button click.

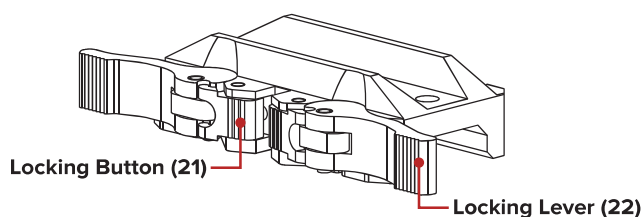


The RICO Mk2 is now ready to be zeroed. See **Zeroing the RICO Mk2** on page 20 for instructions.

## Adjusting the Throw Lever Tension

If you cannot slide the mount onto the Picatinny rail because the throw levers are in the open position but the locking plate is not, or if the mount is not tight to the rail after the throw levers are closed, you may loosen or tighten the tension of the throw levers by adjusting the nuts (23).

1. Open both throw levers. This will cause the adjustment nuts (23) to protrude on the opposite side of the mount.
2. Use the prong-side of the included spanner tool to turn the adjustment nut clockwise to tighten, or counterclockwise to loosen, to achieve the correct amount of tension. You should not feel any tension on the locking lever when closing until it reaches a 45-degree angle. Do not overtighten.

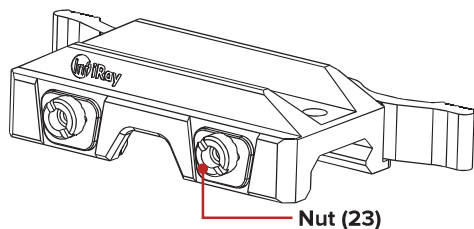

## 14. OPERATING INSTRUCTIONS



### WARNING!

Don't point the objective lens towards any intense energy sources, such as laser radiation or the sun. This may render the electronic components inoperative. The warranty does not cover damage caused by improper operation.

## Using the Control Buttons


The RICO Mk2 is operated via four control buttons. The control buttons can be used to perform shortcut operations from the home screen, as well as in the menu and full-screen interfaces. See **Description of Control Buttons and Shortcuts** on page 6 for shortcut button details.

## Powering On

1. Open the objective lens cap (1).
2. Long press the **Power**  **Button** for 3 seconds to turn on the rifle scope. The InfiRay Outdoor logo will appear.
3. To determine the current battery charge, check the battery status  icon and battery charge percentage in the top status bar.

## Powering Off and Entering Standby

To power off the RICO Mk2:


1. Long press the **Power**  **Button**. The shutdown screen will open, showing a 3-second countdown.
2. The RICO Mk2 will shut down automatically when the 3-second countdown completes.

**NOTE:** Press any button before the countdown completes to cancel the shutdown and return to the home screen.

**WARNING:** If using an external power supply, do not remove the power supply when saving data, as the data may not be saved.

## STANDBY MODE

### Manually Enter Standby Mode

1. To enter standby at any time from the home screen, long press the **Power**  and **Up Buttons** at the same time.
2. Short press any button to exit standby.

### Set the RICO Mk2 to Enter Standby Mode Automatically

The rifle scope may be set to automatically enter standby mode.

1. In the main menu, turn automatic standby on. When turned on, the RICO Mk2 will automatically enter standby after 5 seconds of inactivity. See **Main Menu > Standby** on page 39.
2. Press any button or move the rifle scope to exit standby.

**STANDBY NOTES:**

- When automatic standby is turned **on**:
  - The RICO Mk2 will enter standby mode automatically when it is tilted up or down at an angle of more than 70° or left or right at an angle of more than 30°.
  - The RICO Mk2 will not enter standby mode while it is in a level (horizontal) firing position.
- When **off** is selected, standby mode is turned off and the rifle will operate until the battery runs out.

**Adjusting the Focus**

**ADJUSTING THE DIOPTER/EYEPIECE**

1. Rotate the eyepiece diopter adjustment ring **(8)** at the rear of the rifle scope right or left until the user interface is clear.
2. Look closely to ensure all icons, the status bar, and the reticle appear sharp and in focus. No additional diopter adjustments are required unless the user wishes to make changes.

**NOTES:**

- After the initial adjustment, there is no need to rotate the eyepiece adjustment ring **(8)** for long distances or other conditions.
- If necessary during standard use, the objective lens focus knob **(2)** may be rotated to adjust fine focus on the target object being observed. See **Focusing the Objective Lens** below.

**FOCUSING THE OBJECTIVE LENS**

To adjust the focus on the target object:

1. Rotate the objective lens focus knob **(2)** left or right to adjust fine focus.

**NOTE:** Re-adjusting the focus will be necessary if the distance to the target changes.

**Activating / Deactivating the Reticle**

1. The reticle may be inactive when the RICO Mk2 is powered on for the first time. To activate the reticle, press and hold the **Menu [M]** and **Down [▼] Buttons** at the same time for 15 seconds from the home screen.

**Status Bar Overview**

The status bars at the top and bottom of the screen show information on the operating status of the RICO Mk2.



- 1 Photo:** The camera icon appears briefly when a photo is taken. A warning icon appears when insufficient memory storage is available.
- 2 Recoil Activated Video:** The recoil activated video (RAV) icon will appear when RAV is turned on.
- 3 Video Timer:** The video timer will appear during video recording.
- 4 Time:** Shows the current time in 24-hour format.
- 5 Battery Status:** Shows the battery status.
- 6 Battery Charge:** Shows the current battery charge level.
- 7 Zeroing Profile and Distance:** Shows the selected zero profile, A, B, C, D, E, or F, and the zero distance.
- 8 Magnification:** Shows the total magnification.
- 9 Ultra-Clear:** Shows the Ultra-Clear status, on or off.
- 10 Non-Uniformity Correction (NUC) Mode:** Shows the icon for the selected non-uniformity correction (NUC) mode, automatic or manual. When automatic mode is selected, a countdown timer icon will appear when 5 seconds remain until a NUC.
- 11 Wi-Fi:** Shows the Wi-Fi status, on, on but not connected, or off.
- 12 Standby Status:** Shows the standby icon and the status, on or off.
- 13 Microphone:** When on, the microphone icon appears.

Using the Quick Menu

In the quick menu, the color palette, image brightness, image contrast, image sharpness, and zero distance can be quickly adjusted.



- On the home screen, short press the **Menu [M] Button** to enter the quick menu.
- Short press the **Up [▲] or Down [▼] Button** to move between the menu options below. The selected menu item is highlighted in the background.
  - **(Color Palette):** Short press the **Menu [M] Button** to set the color palette to white hot, black hot, red hot, rainbow, violet, crimson, or viridian.
  - **(Image Brightness):** Short press the **Menu [M] Button** to set the image brightness level, from 1–10.
  - **(Image Contrast):** Short press the **Menu [M] Button** to set the image contrast level, from 1–10.
  - **(Image Sharpness):** Short press the **Menu [M] Button** to set the image sharpness level, from 1–10.
  - **(Zero Distance):** Short press the **Menu [M] Button** to select a zero distance within the selected zeroing profile. Only the zero distances in the selected profile will be available for selection. The selected zeroing profile and distance appear in the bottom status bar.
- Long press the **Menu [M] Button** to save any changes and return to the home screen.

**NOTE:** In the quick menu, after 5 seconds of inactivity, the system will automatically save any changes and return to the home screen.












Navigating the Main Menu



- From the home screen, long press the **Menu [M] Button** to enter the main menu.
- Short press the **Up [▲] or Down [▼] Button** to move up and down through the menu options.
- A blue arrow icon indicates the cursor position in the menu.
- Short press the **Menu [M] Button** to:
  - Change the parameters for the selected menu option; **OR**
  - Enter the submenu; **OR**
  - Confirm submenu changes and return to the previous menu.
- Long press the **Menu [M] Button** to confirm any changes and return to the home screen.
- Short press the **Power [⏻] Button** to return to the previous menu without saving.
- After 15 seconds of inactivity, the menu will automatically close and the interface will return to the home screen. Changes (except changes to toggle on / off menu items, such as Ultra-Clear and Wi-Fi) are not saved automatically.
- Upon exiting from the main menu the cursor location is stored for a single working session (until the RICO Mk2 is turned off). After restarting the RICO Mk2 and entering the menu, the cursor position will be at the first menu item.

# 15. ZEROING THE RICO MK2

RICO Mk2 features a “freeze” zeroing method. To zero the RICO Mk2:

1. Set a suitable target at the desired zero distance.
2. Confirm that the rifle is empty, safe, and pointed in a safe direction, with no ammunition near the weapon.
3. Adjust the image and device settings following the steps in the **Quick Start Guide** on page 8, if you have not done so already.
4. Set the zeroing profile to A, B, C, D, E, or F. See **Reticle Menu > Zeroing Profile** on page 29.
5. Based on the distance to the target you wish to zero, select or customize a zero distance to match. See **Zeroing Menu > Customize Zero Distance** on page 35.
6. Ensure a stable platform and natural shooting position is achieved behind the rifle.
7. Load ammunition, aim, and take one good shot at the target.
8. Make your rifle safe and observe the location of impact on the target.
9. If the point of impact does not match the point of aim (the center of the reticle), adjust the X/Y position of the reticle. See **Zeroing Menu > Reticle Zeroing** on page 32.
10. In the submenu for the selected zero distance, center the reticle on the aiming point and freeze the image view.
  - a. Short press the **Down**  **Button** to move to the image freeze  icon. The cursor position is indicated by a blue arrow  icon.
  - b. Short press the **Menu**  **Button** to freeze the image. The icon will turn from white to blue.
11. Select the axis (X or Y) along which to move the reticle.
  - a. Short press the **Up**  or **Down**  **Button** to move between **X** and **Y**. The cursor position is indicated by a blue arrow  icon.
  - b. Short press the **Menu**  **Button** to select X or Y. The selected axis will turn from white to blue.
12. Adjust the X/Y position of the reticle until the reticle matches the point of impact.
  - a. Use the **Up**  **Button** to move in the positive direction: X= Right and Y= Up.
  - b. Use the **Down**  **Button** to move in the negative direction: X= Left and Y= Down.
  - c. Upon moving the reticle, a red cursor appears on the screen, representing the original position of the reticle.
13. Long press the **Menu**  **Button** to save the reticle position.

14. Take a confirmation shot—the point of impact should now match the point of aim. If not, adjust the X/Y position of the reticle again.

For detailed Zeroing instructions, please see **Zeroing Menu > Reticle Zeroing** on page 32.

# 16. NON-UNIFORMITY CORRECTION

A non-uniformity correction (NUC) allows a thermal imager’s sensors to correct its pixels and eliminate any image defects caused by pixel drift. A NUC will be performed automatically each time the RICO Mk2 is powered on.

The RICO Mk2 has two non-uniformity correction (NUC) modes, automatic (**A**) and manual (**M**). In either mode, the user may choose to manually perform a NUC (shuttered or shutterless) at any time. See **Main Menu > Calibration Mode** on page 37 for instructions on setting the NUC mode.

## Automatic Mode

In automatic mode (**A**), the RICO Mk2 will perform a shuttered NUC automatically according to the internal software algorithm. There is no need to close the objective lens cap (**1**) as the RICO Mk2’s internal shutter covers the sensor.

When automatic mode is selected, a countdown timer icon will appear when 5 seconds remain until a NUC. The timer will appear only after the microbolometer temperature has stabilized—after approximately 10 minutes of continuous operation of the RICO Mk2.


**NOTE:** A manual NUC (see below) may be performed at any time while in Automatic (**A**) mode.

## Manual Mode

In manual mode (**M**), the user independently determines the need to perform a shuttered or shutterless NUC based on the quality of the observed image.

## Performing a Shuttered NUC

A shuttered NUC may be performed at any time while in manual or automatic mode. It is not necessary to close the objective lens cap (**1**) during a shuttered NUC, as the internal shutter covers the sensor.

1. From the home screen, short press the **Power**  **Button**.
2. The internal shutter will cover the sensor and a shuttered non-uniformity correction (NUC) will be performed instantly.

## Performing a Shutterless NUC

The user may perform a shutterless NUC based on the quality of the observed image. A shutterless NUC uses less power than a shuttered NUC because it does not use the imager shutter to cover the sensor; instead, the user must close the lens cap (1).

A shutterless NUC may be performed in manual or automatic mode:

1. Close the objective lens cap (1).
2. From the home screen, short press the Up ▲ and Down ▼ Buttons at the same time.
3. A prompt to close the lens cap (1) appears onscreen. The shutterless NUC starts after about 2 seconds.

**NOTE:** If the lens is not properly covered, a temporary “image burn” will remain in the image until the next non-uniformity correction. This “image burn” is temporary and is not a defect or sign of permanent damage.

## 17. PHOTOGRAPHY AND VIDEO RECORDING

The RICO Mk2 is equipped with video recording and image capture. All videos and photos are automatically saved to the built-in 32 GB memory storage.

**NOTE:** Photo and video files are named with the time and date; therefore, it is recommended to set the date and time before using the photo and video functions. See **Settings Menu > Date and Time** on page 43. Alternatively, the date and time may be synchronized in the InfiRay Outdoor App.

### Photography 📷

To take a photo:

1. From the home screen, short press the Down ▼ Button.
2. The camera 📷 icon will appear briefly in the upper-left corner of the screen to indicate a photo was taken.

**NOTE:** A red warning icon ⓘ appears next to the camera icon in the upper-left corner of the screen when insufficient memory storage is available. Transfer video and image files to other storage media to free up space on the memory card.



### Video Recording 📹

To record video:

1. Turn on the microphone in the main menu if desired. See **Main Menu > Microphone** on page 38.
2. From the home screen, long press the Down ▼ Button to start a video recording.
3. When the video recording starts, the recording timer, in HH:MM:SS (hour, minute, second) format, appears in the top status bar.
4. When recording, short press the Down ▼ Button to take a photo.
5. Long press the Down ▼ Button to stop and save the video recording.



### Recoil Activated Video Recording 📹

When recoil activated video is turned on in the main menu, a video is automatically recorded when a shot is taken. The RICO Mk2 will record 3 seconds before the shot and 2 minutes and 57 seconds after the shot. The recoil activated video 📹 icon appears in the top status bar when RAV is turned on. The video recording timer, in HH:MM:SS (hour, minute, second) format, will appear next to the RAV icon when video is recording. See **Main Menu > Recoil Activated Video** on page 38 for instructions.

#### NOTES:

- When multiple shots are taken within the same 30-second period, only one video will be taken.
- When recoil activated video recording is turned on, standard video recording is unavailable.



## Video and Photography Notes

- You may enter and navigate the menu during video recording. The user interface (the status bar, icons, and menu) is captured in recorded video or photo files.
- Recorded photos and videos are saved to the memory card.
  - Photos are saved as PIC\_HHMMSS.jpg.
  - Videos are saved as VID\_HHMMSS.mp4 or RAV\_HHMMSS.mp4.
  - HHMMSS is hour, minute, second.
- The maximum duration of a recorded video file is 5 minutes. After this time, video recording will begin a new file automatically.
- The number of recorded files is limited only by the capacity of the internal memory.
- Regularly check the available memory storage space and move video footage and images to other storage media to free up space on the memory card.

## 18. ACCESSING THE INTERNAL MEMORY

When the RICO Mk2 is turned on and connected to a computer via the included data cable, it is recognized by the computer as a flash memory (USB) drive. This allows the user to access the saved multimedia files and copy or delete any desired files.


To access the internal memory:

1. Turn on the RICO Mk2.
2. Connect the RICO Mk2 to your computer via the included magnetic charging cable (17) or the USB-C cable (16).
3. Double-click **My Computer** on your computer desktop.
4. Double-click to open the device named Inifiray.
5. Double-click to open the device named RH50R to access the built-in memory.
  - a. Recorded photos and videos are separated into folders by date, YYYYDDMM.
6. Select the desired files or folders to copy or delete.

## 19. USING THE INFIRAY OUTDOOR APP

The RICO Mk2 can be operated using the InfiRay Outdoor App when connected to a tablet or smartphone or via Wi-Fi.



1. Download the App for free and install it on your device:
  - a. Scan a QR code to download it from the App Store or Google Play; **OR**
  - b. Download the App from any app store.
2. Connect the RICO Mk2 to Wi-Fi:
  - a. Turn on the Wi-Fi. See **Main Menu > Wi-Fi** on page 36 for instructions.
  - b. Open the App and press the **ViewFinder**  icon on the home screen. Then, click the **Connect Device WiFi** button.
  - c. On the mobile device, go to **Settings > Wi-Fi**.
  - d. Select the RICO Mk2 from the list of Wi-Fi networks. It will appear in the list as "RH502 or RL42R\_YYYYY\_XXXXXXX," where XXXXXXXX is the eight-digit device serial number.
  - e. Enter the Wi-Fi password and tap the **Join** button. The default password is 12345678.
3. Operate the RICO Mk2 via the App:
  - a. Take real-time photos and videos, with or without audio.
  - b. View, share, download, and delete photos and videos taken via the App, which are saved to the mobile device.
  - c. Change the Wi-Fi password and SSID.
  - d. Synchronize the date and time from the mobile device.
  - e. Update the RICO Mk2 firmware.

**NOTE:** When a factory reset is performed, the Wi-Fi SSID and password are reset to the defaults, RH502 or RL42R\_YYYYY\_XXXXXXX and 12345678. See **Settings Menu > Factory Reset** on page 45.


20. INTEGRATED LASER RANGEFINDER

The RICO Mk2 is equipped with an integrated, precision laser rangefinder which allows the user to measure the distance to objects up to 1200 yards away, with ±1-yard accuracy. The laser rangefinder has two rangefinding modes: continuous and single-measurement capture. Continuous rangefinding allows the user to adjust quickly to changing distances for better shot placement.





**CAUTION:** Do not stare directly into the laser.





The rangefinder interface has the following features:

- 1 **Cursor:** The blue rangefinder cursor  appears in the center of the screen.
- 2 **Mode:** Shows the selected rangefinding mode, CONT (continuous) or SGL (single).
- 3 **Rangefinding Measurement:** Shows the target distance.

To use continuous rangefinder mode:

- 1. Short press the **Up**  **Button** to turn on the laser rangefinder and enter single rangefinding mode.
- 2. Locate the target.
- 3. The distance to the target indicated by the cursor will be refreshed automatically by the rangefinder every second.
- 4. Short press the **Power**  **Button** to exit the laser rangefinder.

To use single rangefinder mode:

- 1. Long press the **Up**  **Button** to turn on the laser rangefinder and enter single rangefinding mode.
- 2. Locate the target.
- 3. Short press the **Up**  **Button** to take a rangefinding measurement.
- 4. Long press the **Up**  **Button** to switch from single to continuous rangefinding.
- 5. Short press the **Power**  **Button** to exit the laser rangefinder.

**NOTE:** The rangefinder interface times out after 15 seconds in single-measurement mode.

ACCURACY NOTES:

- The measurement accuracy and maximum range depend on the reflection ratio on the target surface, the angle at which the laser beam falls on the target surface, and environmental conditions. Reflectivity depends on the surface texture, color, size, and shape of the object. Typically, a glossy, bright surface will have higher reflectivity than a darker surface.
- Ranging performance can degrade in bright conditions or when ranging towards the sun.
- The measurement accuracy can be affected by fog, smog, heavy rain, snow, and other weather conditions. It can also be affected by a low battery or a dirty or smudged objective lens.
- Measuring the range to a small target is more difficult than measuring the range to a large target.

21. DIGITAL ZOOM

The RICO Mk2 will quickly increase the base magnification by enlarging the image from 1 to 4 times digitally.

To use digital zoom:

- 1. From the home screen, rotate the zoom lever (7) clockwise to zoom in or counterclockwise to zoom out on the observed object.
- 2. The real-time amplification, 3×–12× in increments of 0.1×, appears in the bottom status bar.



22. ULTRA-CLEAR MODE

Ultra-Clear mode improves the image quality in inclement weather conditions, such as rain, fog, high humidity, or high temperatures as these conditions all result in lower thermal contrast. Ultra-Clear mode enhances the NETD value of the thermal sensor and improves the sensor’s response rate to these challenging environment conditions. See **Main Menu > Ultra-Clear** on the next page.

Ultra-Clear mode provides:

- Improved image quality and clarity; images are crisper and sharper.
- Increased image detail.
- Improved recognition of observed targets.

23.MAIN MENU OPTIONS AND DESCRIPTIONS

Menu and submenu options, from left to right are:

- **Main Menu:** Ultra-Clear, Reticle, Zeroing, Wi-Fi, PIP, Calibration, Recoil Activated Video, Microphone, Motion Sensor, Standby, Brightness, Pixel Defect Correction, Settings.
- **Reticle Menu:** Zeroing Profile, Reticle Type, Reticle Color.
- **Zeroing Menu:** Reticle Zeroing, Customize Zero Distance, Delete Distance.
- **Settings Menu:** Date, Time, Unit, Languages, Factory Reset, Info.

Menu option details, descriptions, and navigation instructions are listed in order on the following pages.

Ultra-Clear

Turn Ultra-Clear mode on / off

When Ultra-Clear mode is turned on, the image contrast is enhanced, which is suitable for rainy, foggy, or low-contrast conditions.

1. Long press the **Menu** **[M]** **Button** to enter the main menu.
2. Short press the **Up** **[▲]** or **Down** **[▼]** **Button** to select the Ultra-Clear **[👁️]** menu item.
3. Short press the **Menu** **[M]** **Button** to turn Ultra-Clear on / off.
4. The Ultra-Clear status, on **[👁️]** or off **[👁️❌]**, appears in the bottom status bar.
5. Long press the **Menu** **[M]** **Button** to return to the home screen.

**NOTE:** When Ultra-Clear mode is turned on and off, the RICO Mk2 will automatically perform a shuttered non-uniformity correction.



Reticle

Select the zeroing profile, reticle type, and reticle color


1. Long press the **Menu** **[M]** **Button** to enter the main menu.
2. Short press the **Up** **[▲]** or **Down** **[▼]** **Button** to select the reticle **[+]** menu item.
3. Short press the **Menu** **[M]** **Button** to enter the reticle submenu.
4. There are three submenu items: zeroing profile, reticle type, and reticle color.



RETICLE MENU > ZEROING PROFILE




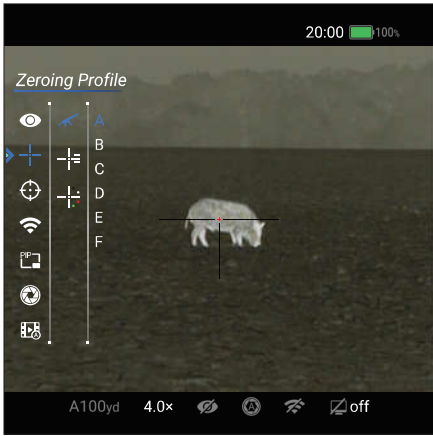



Select the zeroing profile


1. In the reticle submenu, the zeroing profile **[🔫]** menu item is selected by default.
2. Short press the **Menu** **[M]** **Button** to enter the zeroing profile submenu.
3. Short press the **Up** **[▲]** or **Down** **[▼]** **Button** to move through zeroing profile options, A, B, C, D, E, or F.
4. The selected zeroing profile appears in the bottom status bar.
5. Long press the **Menu** **[M]** **Button** to confirm the selection and return to the home screen.




RETICLE MENU > RETICLE TYPE 

Select the reticle type

1. In the reticle submenu, short press the **Up**  or **Down**  **Button** to select the reticle type  menu item.
2. Short press the **Menu**  **Button** to enter the reticle type submenu.
3. Short press the **Up**  or **Down**  **Button** to move through reticle type options, 1–7 (see below). The reticle changes as the cursor moves through the reticle types. A custom reticle is also available for purchase in the InfiRay Outdoor App.
4. Long press the **Menu**  **Button** to confirm the selection and return to the home screen.

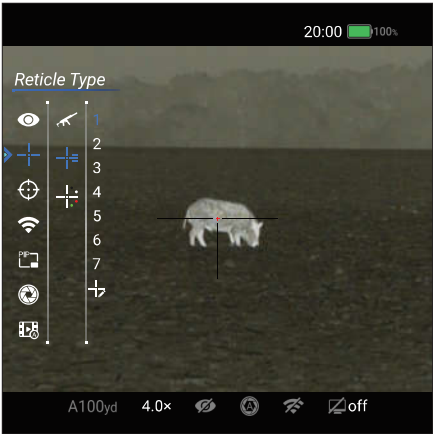





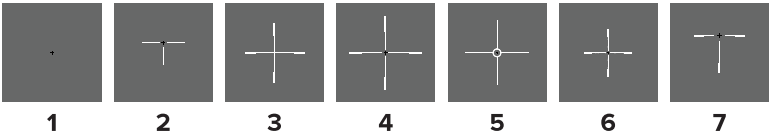


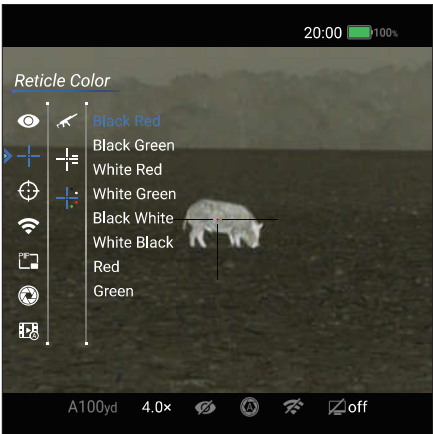
Reticle Types



RETICLE MENU > RETICLE COLOR 

Select the reticle color

1. In the reticle submenu, short press the **Up**  or **Down**  **Button** to select the reticle color  menu item.
2. Short press the **Menu**  **Button** to enter the reticle color submenu.
3. Short press the **Up**  or **Down**  **Button** to move through reticle color options, black red, black green, white red, white green, black white, white black, crimson, or viridian. The reticle color changes as the cursor moves through the color options.
4. Long press the **Menu**  **Button** to confirm the selection and return to the home screen.








Zeroing 

Select or customize a zero distance

In the zeroing menu, you can add a new zero distance or select a zero distance in the list to edit it, delete it, or adjust the reticle position. The RICO Mk2 supports up to 10 zero distances.







**NOTE:** Before selecting or adding a new zero distance, you must select a zeroing profile, A, B, C, D, E, or F. See **Reticle Menu > Zeroing Profile** on page 29.

1. Long press the **Menu**  **Button** to enter the main menu.
2. Short press the **Up**  or **Down**  **Button** to select the zeroing  menu item.
3. Short press the **Menu**  **Button** to enter the zeroing submenu.

ZEROING MENU > ZERO DISTANCE SUBMENU

Add or select a zero distance

To add a new zero distance:

1. In the zeroing menu, short press the **Up**  or **Down**  **Button** to move to the add  icon.
2. Short press the **Menu**  **Button** to add a new zero distance. A blue arrow will appear above and below the far-left digit to mark the cursor location.
3. Short press the **Up**  or **Down**  **Button** to increase or decrease the value of the selected digit from 0–9.



4. Short press the **Menu** **[M]** **Button** to switch between the three digits. The two blue arrows move to indicate the selected digit.
5. Short press the **Power** **[P]** **Button** to return to the previous menu without saving changes; **OR**
6. Long press the **Menu** **[M]** **Button** to save the new zero distance and return to the home screen.

To select a zero distance:

1. In the zeroing menu, short press the **Up** **[▲]** or **Down** **[▼]** **Button** to select a zero distance.
2. Short press the **Menu** **[M]** **Button** to enter the submenu for the selected zero distance.
3. In the submenu for the selected zero distance, you may:
  - a. Select the reticle zeroing **[⊕]** menu item to adjust the X/Y position of the reticle. See **Reticle Zeroing** below.
  - b. Select the zero distance to edit it. See **Zeroing Menu > Customize Zero Distance** on page 35.
  - c. Select the delete **[🗑️]** menu item to delete it. See **Zeroing Menu > Delete Distance** on page 36.



## ZEROING MENU > ZERO DISTANCE SUBMENU > RETICLE ZEROING **[⊕]**

### Adjust the reticle position of the selected zero distance

In the reticle zeroing interface, the X/Y position of the reticle may be adjusted to match the point of impact.

1. In the submenu for the selected zero distance, the reticle zeroing **[⊕]** menu item is selected by default. Short press the **Menu** **[M]** **Button** to select and enter the reticle zeroing interface.



2. The reticle zeroing interface has the following features:

- 1 **Y-Axis** **[↑↓]** **Icon:** Vertical point of impact change (in cm or inches).
- 2 **X-Axis** **[←→]** **Icon:** Horizontal point of impact change (in cm or inches).
- 3 **Zoom** **[⊕]** **Icon:** Select to change the zoom level.
- 4 **Freeze** **[❄️]** **Icon:** Select to freeze the image. When frozen, the icon turns from white to blue. Select a second time to unfreeze the image.
- 5 **Reticle:** Shows the new reticle position.
- 6 **Red Cursor:** Indicates the center of the original reticle position.



3. In the submenu for the selected zero distance, center the reticle on the aiming point and freeze the image view.

- a. Short press the **Down** **[▼]** **Button** to move to the image freeze **[❄️]** icon. The cursor position is indicated by a blue arrow **[▶]** icon.
- b. Short press the **Menu** **[M]** **Button** to freeze the image. The freeze icon will turn from white to blue.



4. Adjust the zoom level, as needed:

- a. Short press the **Up** **[▲]** or **Down** **[▼]** **Button** to move to the zoom **[⊕]** icon.
- b. Short press the **Menu** **[M]** **Button** to select it.
- c. Short press the **Up** **[▲]** or **Down** **[▼]** **Button** to zoom in or out. The selected real-time amplification appears in the bottom status bar, 3.0x, 6.0x, 9.0x, or 12.0x.