

# DESCRIPTIVE INFORMATION

## FCC FILING FOR SC3001X @ 800 MHz CDMA BTS

The Information in this exhibit is in accordance with the FCC Rules and Regulations, Vol. II, Part 2, Subpart J. Sections 2.1033 through 2.1055 are addressed.

Section 2.1033 (a)      **Name of Applicant and Manufacturer:** MOTOROLA

Section 2. 1033 (b)      **Identification of Equipment:** IHET6CB1

Section 2. 1033 (c)      **Quantity Production:** Quantity Production is Planned.

Section 2. 1033 (d)      **Technical Description**

This Transmitter is intended for use in the Public Cellular Radio Telecommunications Service and is designed in compliance with the FCC Rules and Regulations Title 47, Part 22. This transmitter is capable of spread spectrum (CDMA) operation, and allows up to 64 Walsh codes to support Pilot, Sync, Paging and Traffic channels.

(1)                      **Types of Emissions**

This equipment will be capable of operation using wide band spread spectrum techniques employing Direct Sequence Code Division Multiple Access (DS-CDMA) digital communication techniques.

For this transmitter, the emission designator is 1M30F9W (per FCC Part 2.201, subpart C).

(2)      **Frequency Range**      This transmitter operates within the 869.70 to 893.31 MHz Band (per FCC Part 22). This base station will support CDMA operations on channel numbers 777 through 1013 inclusive.

3)      **Range of Operating Power**

The rated maximum average power out of the SC3001X @ 800 MHz CDMA BTS is 10 W (40.0 dBm). However, in CDMA the actual power output is based on the number of traffic channels in operation. The minimum power occurs when only a pilot signal is present. The maximum power occurs when a pilot along with synchronization, paging, and traffic channels are present. For a typical system setup, the theoretical difference between minimum power and maximum power is 8dB. The output power is variable in 0.25 dB steps. The range is 12 dB.

(3) **Range of Operating Power (cont.)**

In addition, the dynamics of a CDMA system allow for what is called “cell breathing”. This allows an operator to vary the range of a cell by controlling the power of the pilot signal.

(4) **Maximum Power Limits**

The peak output power of a base station transmitter may not exceed 500 Watts as defined in Part 22.913 (a).

(5) **Applied voltages and currents into the final transistor elements of the transmitter output:**

In the CDMA system, the applied voltages and currents into the final transistor elements for 10 W output:

Drain	27.7 VDC
Drain Current	1.0 AMPS x 2
Gate Voltage	4 VDC

(6) **Function of Each Active Device**

Refer to the Operational Description Exhibit.

(7) **Complete Circuit Diagrams**

Refer to the Schematics Exhibit.

(8) **Instruction/Installation Manual**

Refer to the Installation Manual Exhibit.

(9) **Tune-Up/Optimization Procedure**

Refer to the Users Manual Exhibit.

(10) **Means for Frequency Stabilization**

Refer to Section F of the Test Report Exhibit.

The GPS/HSO Module provides clock and time signals for an SC3001X @ 800 MHz CDMA BTS. In addition, it provides the primary source, a 3 MHz clock, for the transmit synthesizer in the RFCC Transceiver. The module relies on a GPS receiver, remotely located in an integrated package with the GPS antenna as the primary time reference for the ovenized oscillator.

Redundancy is also provided a High Stability Oscillator (HSO) The HSO is provided in case of GPS system failure.

The GPS Module uses the received signals as a reference to provide the required clock for the site. The module distributes CDMA time, a 19.6608 MHz clock, and a two-second synchronization pulse every even second of universal time to the RFCC.

(11) **Means for Attenuation of Spurious Emissions**

Refer to Section C of the Test Report Exhibit.

Bandpass filters are employed in the transmit RF circuit to attenuate far out spurious emissions. The filter used here is of an air dielectric cavity resonator type. The baseband employs a discrete L-C 7-pole elliptic filter. This filter is used to attenuate sideband noise and close in spurious emissions.

In addition, suppression of spurious radiation is obtained by proper shielding techniques.

**Means for Limiting Modulation**


Refer to Sections B and F of the Test Report Exhibit.

In a CDMA system, the input signal (voice for example) is sampled and coded in a vocoder. This signal is then spread to 1.25 MHz by a pseudo-random spreading code. This spreading code sets the bandwidth of the spread-spectrum signal. If more than one signal is in operation (i.e. more than one voice channel), then the two signals are simply layered one atop the other within the 1.25 MHz band. So, to some extent, the bandwidth of the transmitted signal is limited by the chip rate of the PN spreading code.

Primary limiting of the CDMA signal bandwidth is accomplished by the use of a programmable digital limiter and Finite Impulse Response (FIR) filters in the RFCC. The

digital limiter prevents occasional large peaks and thus avoids wrap-around error that would occur. The FIR filtering conforms to the IS95A/B and IS2000 spectral shape is limited in conformance to the spectral mask shown below. Output I and Q data streams from the filters are guaranteed to 45 dBc below the carrier at 750 kHz offset. Further filtering of the analog wave is accomplished through the use of a 7-pole elliptic filter in the RFCC.

The baseband filters have a linear phase. In addition, they have a frequency response  $S(f)$  that satisfies the limits shown in the figure below. The normalized frequency response of the filter shall be contained within plus or minus error ( $e1$ ) in the passband and shall be less than or equal to error ( $e2$ ) in the stop band ( $f > f_s$ ). The numerical values for the parameters are  $e1=1.5\text{dB}$ ,  $e2=-40\text{dB}$ ,  $f_p=590\text{kHz}$ , and  $f_s=740\text{kHz}$ .

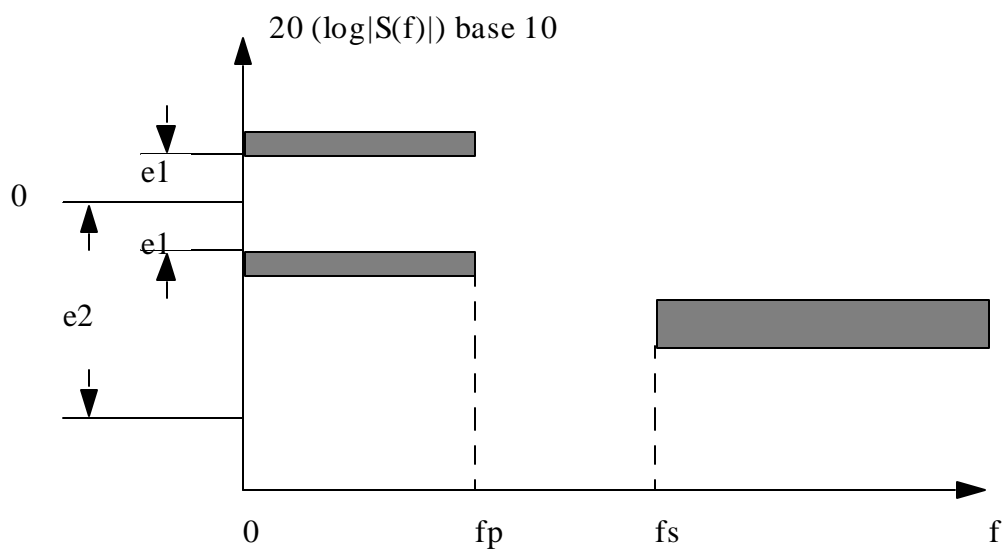

**BASEBAND FILTERS FREQUENCY RESPONSE LIMITS**

### **Means for Limiting Power**

The power output will be controlled by the Channel Element Module (CEM) and the RFCC. The RFCC has an automatic gain control around the transmitter lineup to maintain an output power that is within  $\pm 1$ dB of the input power plus required gain on the RFCC.

## **(12) Description of Digital Modulation Techniques**

Refer to Section B of the Test Report Exhibit.

The Code Division Multiple Access (CDMA) system supports and conforms to the modulation characteristics for voice and data as defined by IS95 A and B. It also supports and conforms to the modulation characteristics of IS2000 for spreading rate 1, rate sets 3 and 4 and user data rates up to 153.6 kbps. For clarity, the following breakdown shows all supported data rates and modulation characteristics supported by the system.. The exact data rate chosen is based on the voice activity factor.

RC1        1200, 2400, 4800 and 9600 bps data; R=1/2; BPSK modulation  
(Rate Set 1)

RC2        1800, 3600, 7200 and 14400 bps data; R=1/2; BPSK modulation  
(Rate Set 2)

RC3        1500, 2700, 4800, 9600, 19200, 38400, 76800 and 153600 bps data;  
R=1/4; QPSK modulation (Supported in 1X mode only)

## **Forward Radio Configurations**

Modulation of individual channels is performed digitally, at baseband and in conformance with the modulation characteristics defined by the standards. Once modulated, the amplitude of each channel is set and Walsh code spreading is applied. At this point, all channels assigned to a particular carrier are summed together with the pilot, sync and paging channels, limited to reduce the peak to average power, and then quadrature spread. The spread, baseband carrier is then digitally filtered and applied to an RF carrier. Each RF carrier is then amplified, combined with other carriers and then transmit out the base station antenna.

## **Section 2.1033 (b) Standard Test Conditions**

The following conditions and procedures were followed during testing of this transmitter:

Room Temperature	+ 25 °C
Room Humidity	50%
AC Supply Voltage	88-270 VAC (nominal), 47-63 Hz
DC Supply Voltage	+27 VDC (brownout protection battery only) (The DC supply is used in place of the AC supply if AC power is interrupted as necessary.)

Prior to testing, the unit was tuned up according to the Manufacturer's Alignment Procedure. All data presented represents the worst case parameter being measured. All test data required by sections 2.925 and 2.1047 through 2.1055 can be found in Section A through F of the Test Report Exhibit.

Section 2.925 (f) **Equipment Identification**

A drawing of the equipment identification nameplate appears in the ID Label/Location Info Exhibit.

Section 2.1033 (b) **Photographs**

The photographs showing external construction are in the External Photos Exhibit. The photographs showing internal construction are in the Internal Photos Exhibit

## Section 2.925      **Description of Various RF Enclosure Configurations**

The SC300 BTS is a microcell version Base Station with the power section integrated into the same enclosure with the RF circuitry. The enclosure may be backup powered by a 27 VDC battery or 120 VAC. Battery backup consists of optional batteries that are outside the enclosure. A single carrier is supported by each enclosure. (sector configurations are not available.)

The RF enclosure contains one RFCC (Radio Frequency Channel Card) , capable of supporting up to 1 CDMA carrier. The CEM (Channel Element Module) provides signal processing functions necessary to implement various channel functions specified in the CDMA Common Air Interface specification. Channel types include sync channels, paging channels, access channels, and traffic channels. The pilot Channel is implemented on the RFCC. The CEM converts between CDMA STRAU traffic and control format and CDMA baseband format. RX inputs from the BBX to the CEM consist of I and Q signals from the main & diversity receive antennas.

## Section 2.925      **Use with Various Power Supplies**

The RF enclosure can accommodate a DC input voltage of +27VDC supplied from a backup battery. Circuit breakers are provided for each feed in the RF Enclosure.

The enclosure may also be operated using AC power. A 88-270 VAC power source may be connected via an external connector. The AC to DC board converts the AC voltage to +27V DC. This voltage is then fed to a DC to DC converter board, which supplies the necessary voltages to all the boards. The breakers for both the DC and AC are located on the front panel.

Refer to Section B of the Test Report Exhibit.      Waveform Quality (??)

#### DEFINITION

Transmit waveform quality is the normalized correlated power between the actual waveform and the ideal waveform. The range of values for the transmit waveform quality is from 1.0, a perfect CDMA waveform, to 0.0, a non-CDMA signal. As an example, a base station with a -0.4 dB degradation in its transmit waveform would have a quality (?) of  $10^{(-0.4/10)} = 0.912$ .

#### MINIMUM STANDARD

The minimum waveform quality figure for a spread-spectrum CDMA signal is -0.4 dB or 0.912 as measured with a Rho meter.

#### METHOD OF MEASUREMENT

Set the pilot level to 20% of the CDMA Avg. power, and transmit the pilot signal only. Connect the Rho meter directly to the transmit port. On the CDMA Rho Meter, disable the RF generator and set the tuning mode to manual. Enter the base station's RF transmit frequency and set the input attenuation to hold. Set the input attenuation to 20 dB. Now, set the DSP Analyzer test mode to continuous and chose the Rho measurement as the measurement type. Set the channel to forward and choose amplitude middle as the trigger qualifier. Set the gain to 0 dB. Set the reference frequency to 19.6608 MHz. Select internal to lock-on to the CDMA time base reference. Read the measured value for Rho on the Rho meter.

Section 2.1049(c) Measurement Required: **Occupied Bandwidth**

Refer to Section E of the Test Report Exhibit.

DEFINITION

The measured spectral width of an emission. The measurement determines occupied bandwidth as the difference between upper and lower frequencies where 0.5% of the emission power is above the upper frequency and 0.5% of the emission power is below the lower frequency.

Data to show the bandwidth occupied by this transmitter and output power is presented in the form of Channel Power Measurement plots from a spectrum analyzer. The Channel Power Measurement divides the Channel Power Bandwidth into increments (defined by the Resolution Bandwidth Setting selected), then sums the energy contained in each of those increments to provide an integrated measurement of the power in the Channel Power Bandwidth.

METHOD OF MEASUREMENT

Connect a spectrum analyzer to the RF enclosure RF Transmit Port. Set the CDMA signal power to maximum. Setup the spectrum analyzer to make the following integrated Channel Power Measurements:

1. Channel Power Measurement of the CDMA Carrier Centered at 869.70 (Ch.1013).  
Channel Power Bandwidth: 1.25 MHz  
Resolution Bandwidth: 30 KHz
2. Channel Power Measurement of the CDMA Carrier Centered at 893.31 (Ch.777).  
Channel Power Bandwidth: 1.25 MHz  
Resolution Bandwidth: 30 KHz  
Record the Channel Power Measurements.

Section 2.991      Measurement Required:      **Spurious & Harmonic Emissions at the Antenna Terminals**

Refer to Section D of the Test Report Exhibit.

DEFINITION

Conducted spurious emissions are emissions at the antenna terminals on a frequency or frequencies that are outside the authorized bandwidth of the transmitter. Reduction in the level of these spurious emissions will not affect the quality of the information being transmitted.

MINIMUM STANDARD

Per CFR 47 Parts 22.901(d) (2) and 22.917(e), the minimum standards for Transmit Port Conducted Spurious Emissions are as follows::

Section 24.917 (d)      Emission Limits

On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43+10 \log (P)$  dB.

METHOD OF MEASUREMENT

Connect a spectrum analyzer to the RF enclosure RF Transmit Port. Measure the power level at the carrier frequency. Now, sweep the spectrum analyzer over a frequency range from 1MHz to tenth harmonic of the carrier frequency, recording all spurious emissions.

Section 2.993      Measurement Required:      **Field Strength of Spurious & Harmonic Radiation**

Refer to Section C of the Test Report Exhibit.

DEFINITION

Radiated spurious and harmonic emissions are emissions from the equipment when loaded into a non-radiating load on a frequency or frequencies that are outside an occupied band sufficient to assure transmission of information with required quality for the class of communications desired. The reduction in the level of these spurious emissions will not affect the quality of the information being transmitted.

MINIMUM STANDARD

The magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the alignment procedure, shall not be less than  $43 + 10 \cdot \log(\text{mean output power in Watts})$  dB below the mean power output.

Necessary measurements were made at Motorola Inc., located at 1475 W Shure Dr, Arlington Heights, IL 60004 or at the UL International Lab EMI test facility located at 333 Pfingsten Road., IL 600062-2096.

INSTALLATION OF EQUIPMENT

The equipment under test is placed on a turntable, connected to a dummy RF load, and placed in normal operation. A receiving antenna located 3 meters from the turntable picks up any signal radiated from the transmitter and its operating accessories. The antenna is adjustable in height from 1 to 4 meters and can be horizontally or vertically polarized.

METHOD OF MEASUREMENT

The equipment is adjusted to obtain peak readings of received signals wherever they occur in the spectrum by:

1. Rotating the transmitter under test.
2. Adjusting the antenna height.

The testing procedure is repeated for both horizontal and vertical polarization of the receiving antenna. Relative signal strength is indicated on meters built into the receiver.

To obtain an actual radiated signal strength, the meter reading is adjusted to correct for all affecting factors, such as antenna gain, RF gain, and cable loss. A table of correction factors vs. frequency is then used to convert a signal level measured at the receiver to the value that would be measured at the device (assuming an isotropic radiator).

Section 2.1055      Measurement Required:      **Frequency Stability**

Refer to Section F of the Test Report Exhibit.

DEFINITION

The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

MINIMUM STANDARD

The carrier frequency of each transmitter must be maintained within 1.5 ppm.(per CFR 47 Part 22.355 Table C-1)

METHOD OF MEASUREMENT

Frequency measurements shall be made at the extremes of the temperature range -30 to 50 degrees Celsius and at intervals of not more than 10 degrees throughout the range. A period of time sufficient to stabilize all of the components in the equipment shall be allowed prior to each frequency measurement.