




11AC80MIMO_Ant2_5290

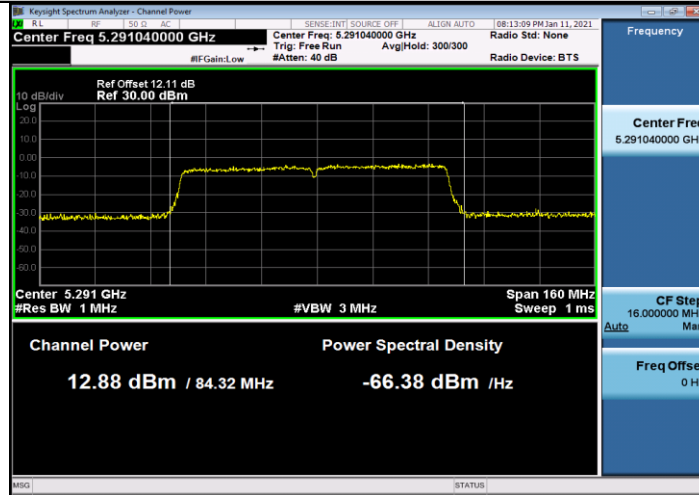


11AC80MIMO_Ant1_5530

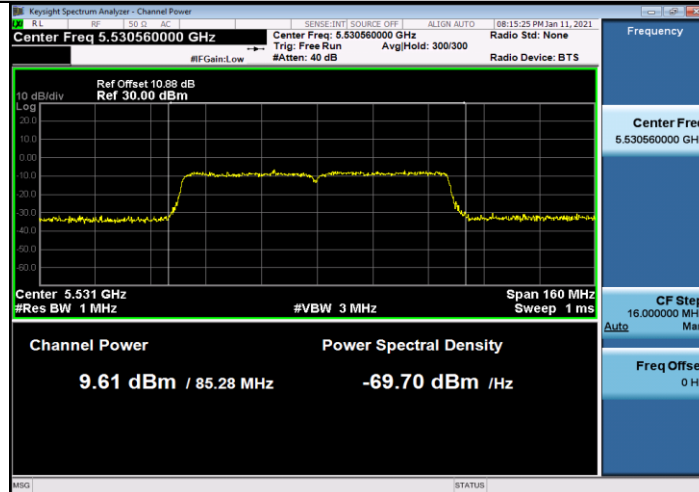


11AC80MIMO_Ant2_5530

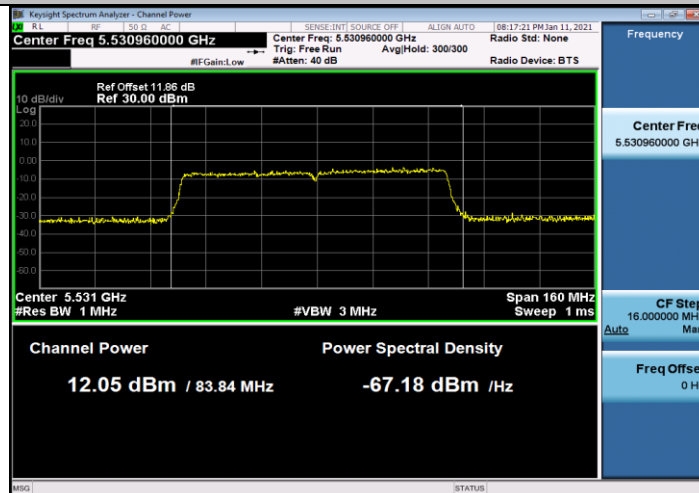


11AC80MIMO_Ant1_5610

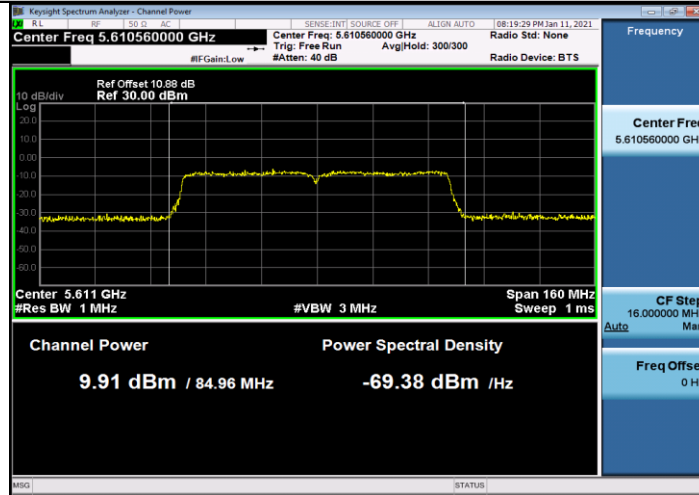


11AC80MIMO_Ant2_5610

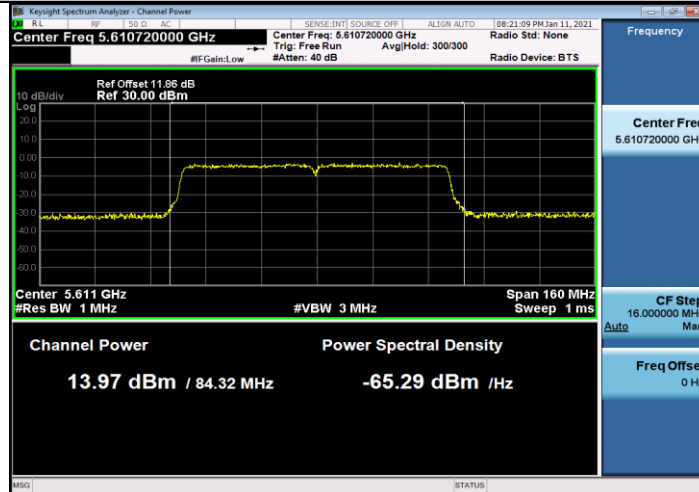

11AC80MIMO_Ant1_5775

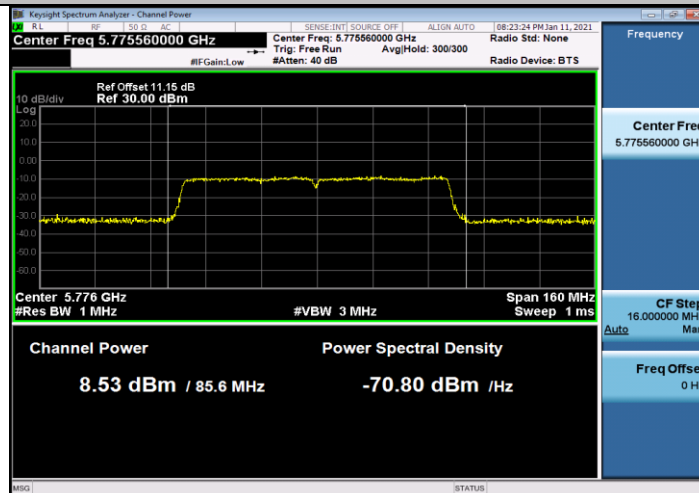

11AC80MIMO_Ant2_5775

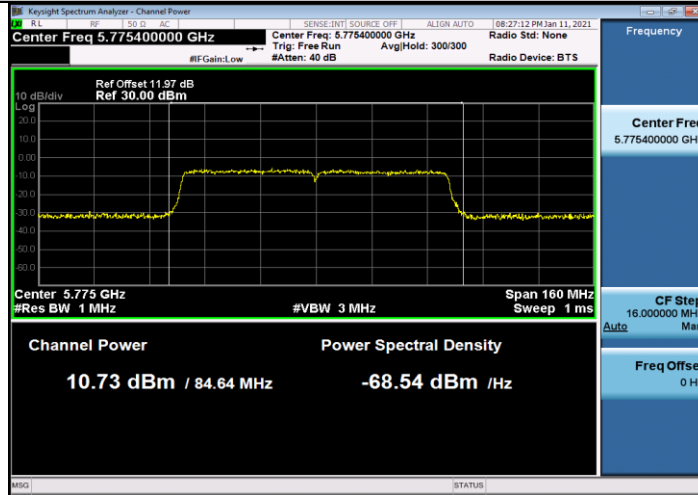


4.5 Peak Power spectrum density

4.5.1 Limit

Frequency band (MHz)	EUT Category		Limit
5150-5250		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	
	√	Client devices	11dBm/ MHz
5250-5350	√		11dBm/ MHz
5470-5725	√		11dBm/ MHz
5725-5850	√		30dBm/ 500kHz

4.5.2 Test Setup

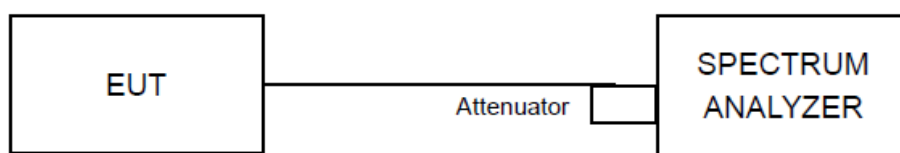

4.5.3 Test Procedures

Using method SA-2

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1 MHz, Set VBW ≥ 3 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to “free run”.
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).
- 7) Record the max value.

4.5.4 Deviation of Test Standard

No deviation.

4.5.5 Test Results

The test result refer to the report FVC-ESH-P20112379B-14.


Test Mode	Antenna	Channel	Level [dBm/MHz]	10log(1/x) Factor [dB]	PSD [dBm/MHz]	Limit [dBm/MHz]	Verdict
11A	Ant1	5180	3.13	0.08	3.13	<=11	PASS
	Ant2	5180	3.89	0.08	3.89	<=11	PASS
	Ant1	5220	2.83	0.08	2.83	<=11	PASS
	Ant2	5220	2.98	0.08	2.98	<=11	PASS
	Ant1	5240	3.67	0.08	3.67	<=11	PASS
	Ant2	5240	3.07	0.08	3.07	<=11	PASS
	Ant1	5260	4.64	0.08	4.64	<=11	PASS
	Ant2	5260	3.77	0.08	3.77	<=11	PASS
	Ant1	5280	4.04	0.08	4.04	<=11	PASS
	Ant2	5280	4.2	0.08	4.2	<=11	PASS
	Ant1	5320	3.98	0.08	3.98	<=11	PASS
	Ant2	5320	5.36	0.08	5.36	<=11	PASS
	Ant1	5500	2.96	0.08	2.96	<=11	PASS
	Ant2	5500	3.12	0.08	3.12	<=11	PASS
	Ant1	5600	3.52	0.08	3.52	<=11	PASS
	Ant2	5600	4.59	0.08	4.59	<=11	PASS
	Ant1	5700	2.37	0.08	2.37	<=11	PASS
	Ant2	5700	4.29	0.08	4.29	<=11	PASS
11N20MIMO	Ant1	5180	-0.01	0.09	-0.01	<=11	PASS
	Ant2	5180	3.14	0.09	3.14	<=11	PASS
	total	5180	4.85	--	4.85	<=11	PASS
	Ant1	5220	0.62	0.09	0.62	<=11	PASS
	Ant2	5220	2.13	0.09	2.13	<=11	PASS
	total	5220	4.45	--	4.45	<=11	PASS
	Ant1	5240	1	0.09	1	<=11	PASS
	Ant2	5240	2.41	0.09	2.41	<=11	PASS
	total	5240	4.77	--	4.77	<=11	PASS
	Ant1	5260	1.23	0.09	1.23	<=11	PASS
	Ant2	5260	3.41	0.09	3.41	<=11	PASS
	total	5260	5.47	--	5.47	<=11	PASS
	Ant1	5280	1.59	0.09	1.59	<=11	PASS
	Ant2	5280	4.21	0.09	4.21	<=11	PASS
	total	5280	6.10	--	6.10	<=11	PASS
	Ant1	5320	1	0.09	1	<=11	PASS
	Ant2	5320	4.21	0.09	4.21	<=11	PASS
	total	5320	6.11	--	6.11	<=11	PASS
	Ant1	5500	0.3	0.09	0.3	<=11	PASS
	Ant2	5500	2.92	0.09	2.92	<=11	PASS
	total	5500	4.81	--	4.81	<=11	PASS

	Ant1	5600	0.53	0.09	0.53	<=11	PASS
	Ant2	5600	4.08	0.09	4.08	<=11	PASS
	total	5600	5.67	--	5.67	<=11	PASS
	Ant1	5700	-0.61	0.09	-0.61	<=11	PASS
	Ant2	5700	4.65	0.09	4.65	<=11	PASS
	total	5700	5.78	--	5.78	<=11	PASS
11N40MIMO	Ant1	5190	-3.95	0.13	-3.95	<=11	PASS
	Ant2	5190	-2.28	0.13	-2.28	<=11	PASS
	total	5190	-0.02	--	-0.02	<=11	PASS
	Ant1	5230	-3.05	0.13	-3.05	<=11	PASS
	Ant2	5230	-1.36	0.13	-1.36	<=11	PASS
	total	5230	0.89	--	0.89	<=11	PASS
	Ant1	5270	-2.9	0.13	-2.9	<=11	PASS
	Ant2	5270	-0.55	0.13	-0.55	<=11	PASS
	total	5270	1.44	--	1.44	<=11	PASS
	Ant1	5310	-2.37	0.13	-2.37	<=11	PASS
	Ant2	5310	0.04	0.18	0.04	<=11	PASS
	total	5310	2.01	--	2.01	<=11	PASS
	Ant1	5510	-4.21	0.13	-4.21	<=11	PASS
	Ant2	5510	-1.64	0.13	-1.64	<=11	PASS
	total	5510	0.27	--	0.27	<=11	PASS
	Ant1	5590	-3.76	0.13	-3.76	<=11	PASS
	Ant2	5590	0.23	0.18	0.23	<=11	PASS
	total	5590	1.69	--	1.69	<=11	PASS
	Ant1	5670	-3.7	0.13	-3.7	<=11	PASS
	Ant2	5670	0.71	0.13	0.71	<=11	PASS
	total	5670	2.05	--	2.05	<=11	PASS
11AC20MIMO	Ant1	5180	-0.46	0.09	-0.46	<=11	PASS
	Ant2	5180	1.92	0.09	1.92	<=11	PASS
	total	5180	3.90	--	3.90	<=11	PASS
	Ant1	5220	-0.44	0.09	-0.44	<=11	PASS
	Ant2	5220	0.35	0.09	0.35	<=11	PASS
	total	5220	2.98	--	2.98	<=11	PASS
	Ant1	5240	0.22	0.09	0.22	<=11	PASS
	Ant2	5240	1.88	0.09	1.88	<=11	PASS
	total	5240	4.14	--	4.14	<=11	PASS
	Ant1	5260	0.07	0.09	0.07	<=11	PASS
	Ant2	5260	1.85	0.09	1.85	<=11	PASS
	total	5260	4.06	--	4.06	<=11	PASS
	Ant1	5280	0.17	0.09	0.17	<=11	PASS
	Ant2	5280	2.41	0.09	2.41	<=11	PASS
	total	5280	4.44	--	4.44	<=11	PASS
	Ant1	5320	0.41	0.09	0.41	<=11	PASS
	Ant2	5320	2.15	0.09	2.15	<=11	PASS
	total	5320	4.38	--	4.38	<=11	PASS


	Ant1	5500	-0.68	0.09	-0.68	<=11	PASS
	Ant2	5500	1.09	0.09	1.09	<=11	PASS
	total	5500	3.30	--	3.30	<=11	PASS
	Ant1	5600	-0.2	0.09	-0.2	<=11	PASS
	Ant2	5600	2.93	0.09	2.93	<=11	PASS
	total	5600	4.65	--	4.65	<=11	PASS
	Ant1	5700	-1.22	0.09	-1.22	<=11	PASS
	Ant2	5700	3.6	0.09	3.6	<=11	PASS
	total	5700	4.84	--	4.84	<=11	PASS
11AC40MIMO	Ant1	5190	-4.82	0.18	-4.82	<=11	PASS
	Ant2	5190	-3.06	0.18	-3.06	<=11	PASS
	total	5190	-0.84	--	-0.84	<=11	PASS
	Ant1	5230	-4.03	0.18	-4.03	<=11	PASS
	Ant2	5230	-2.9	0.18	-2.9	<=11	PASS
	total	5230	-0.42	--	-0.42	<=11	PASS
	Ant1	5270	-3.53	0.18	-3.53	<=11	PASS
	Ant2	5270	-2.57	0.18	-2.57	<=11	PASS
	total	5270	-0.01	--	-0.01	<=11	PASS
	Ant1	5310	-3.71	0.18	-3.71	<=11	PASS
	Ant2	5310	-1.36	0.18	-1.36	<=11	PASS
	total	5310	0.63	--	0.63	<=11	PASS
	Ant1	5510	-4.87	0.18	-4.87	<=11	PASS
	Ant2	5510	-3.05	0.18	-3.05	<=11	PASS
	total	5510	-0.86	--	-0.86	<=11	PASS
	Ant1	5590	-4.74	0.18	-4.74	<=11	PASS
	Ant2	5590	-1.08	0.18	-1.08	<=11	PASS
	total	5590	0.47	--	0.47	<=11	PASS
	Ant1	5670	-4.81	0.18	-4.81	<=11	PASS
	Ant2	5670	-0.57	0.18	-0.57	<=11	PASS
	total	5670	0.82	--	0.82	<=11	PASS
11AC80MIMO	Ant1	5210	-6.89	0.36	-6.89	<=11	PASS
	Ant2	5210	-4.72	0.36	-4.72	<=11	PASS
	total	5210	-2.66	--	-2.66	<=11	PASS
	Ant1	5290	-6	0.36	-6	<=11	PASS
	Ant2	5290	-3.48	0.36	-3.48	<=11	PASS
	total	5290	-1.55	--	-1.55	<=11	PASS
	Ant1	5530	-7.55	0.36	-7.55	<=11	PASS
	Ant2	5530	-4.75	0.36	-4.75	<=11	PASS
	total	5530	-2.92	--	-2.92	<=11	PASS
	Ant1	5610	-7.29	0.36	-7.29	<=11	PASS
	Ant2	5610	-3.01	0.36	-3.01	<=11	PASS
	total	5610	-1.63	--	-1.63	<=11	PASS

Test Mode	Antenna	Channel	Level [dBm/500kHz]	10log(1/x) Factor [dB]	10log(500k Hz/RBW) Factor [dB]	PSD [dBm/500kHz]	Limit [dBm/500kHz]	Verdict
11A	Ant1	5745	-0.58	0.08	2.22	1.72	<=30	PASS
	Ant2	5745	0.32	0.08	2.22	2.62	<=30	PASS
	Ant1	5785	-0.65	0.08	2.22	1.65	<=30	PASS
	Ant2	5785	-1.96	0.08	2.22	0.34	<=30	PASS
	Ant1	5825	-1.4	0.08	2.22	0.9	<=30	PASS
	Ant2	5825	-2.3	0.08	2.22	0	<=30	PASS
11N20 MIMO	Ant1	5745	-4.27	0.09	2.22	-1.96	<=30	PASS
	Ant2	5745	-1.48	0.09	2.22	0.83	<=30	PASS
	total	5745	--	--	--	2.67	<=30	PASS
	Ant1	5785	-4.81	0.13	2.22	-2.46	<=30	PASS
	Ant2	5785	-2.58	0.18	2.22	-0.18	<=30	PASS
	total	5785	--	--	--	1.84	<=30	PASS
	Ant1	5825	-4.6	0.13	2.22	-2.25	<=30	PASS
	Ant2	5825	-3.48	0.13	2.22	-1.13	<=30	PASS
11N40 MIMO	total	5825	--	--	--	1.36	<=30	PASS
	Ant1	5755	-8.46	0.13	2.22	-6.11	<=30	PASS
	Ant2	5755	-5.89	0.13	2.22	-3.54	<=30	PASS
	total	5755	--	--	--	-1.63	<=30	PASS
	Ant1	5795	-9.05	0.13	2.22	-6.70	<=30	PASS
	Ant2	5795	-6.66	0.13	2.22	-4.31	<=30	PASS
11AC2 OMIMO	total	5795	--	--	--	-2.33	<=30	PASS
	Ant1	5745	-5.33	0.09	2.22	-3.02	<=30	PASS
	Ant2	5745	-2.39	0.09	2.22	-0.08	<=30	PASS
	total	5745	--	--	--	1.70	<=30	PASS
	Ant1	5785	-6	0.09	2.22	-3.69	<=30	PASS
	Ant2	5785	-3.6	0.09	2.22	-1.29	<=30	PASS
	total	5785	--	--	--	0.68	<=30	PASS
	Ant1	5825	-6.38	0.09	2.22	-4.07	<=30	PASS
11AC4 OMIMO	Ant2	5825	-4.92	0.09	2.22	-2.61	<=30	PASS
	total	5825	--	--	--	-0.27	<=30	PASS
	Ant1	5755	-9.11	0.18	2.22	-6.71	<=30	PASS
	Ant2	5755	-7.26	0.18	2.22	-4.86	<=30	PASS
	total	5755	--	--	--	-2.68	<=30	PASS
	Ant1	5795	-9.08	0.18	2.22	-6.68	<=30	PASS
11AC8 OMIMO	Ant2	5795	-7.53	0.18	2.22	-5.13	<=30	PASS
	total	5795	--	--	--	-2.83	<=30	PASS
	Ant1	5775	-12.08	0.36	2.22	-9.50	<=30	PASS
11AC8 OMIMO	Ant2	5775	-9.51	0.36	2.22	-6.93	<=30	PASS
	total	5775	--	--	--	-5.02	<=30	PASS


11A_Ant1_5180

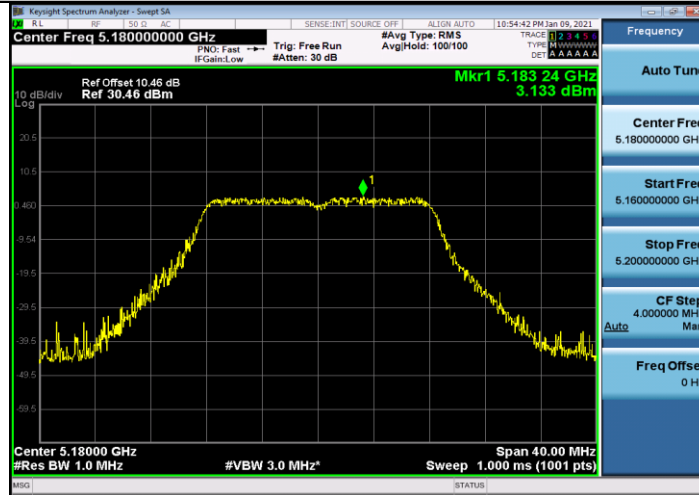


11A_Ant2_5180

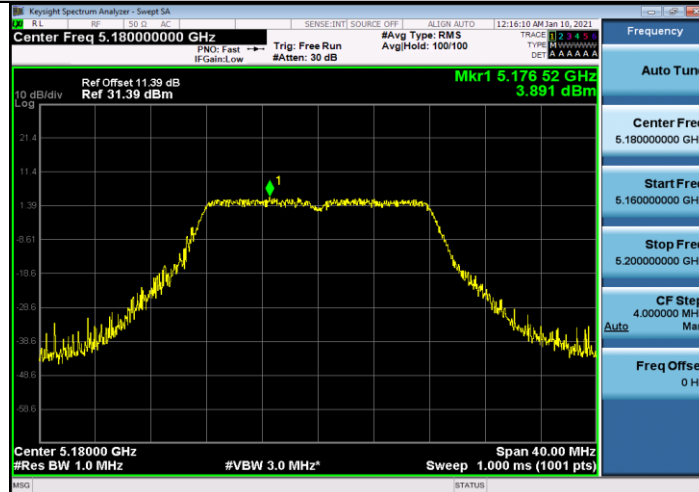


11A_Ant1_5220

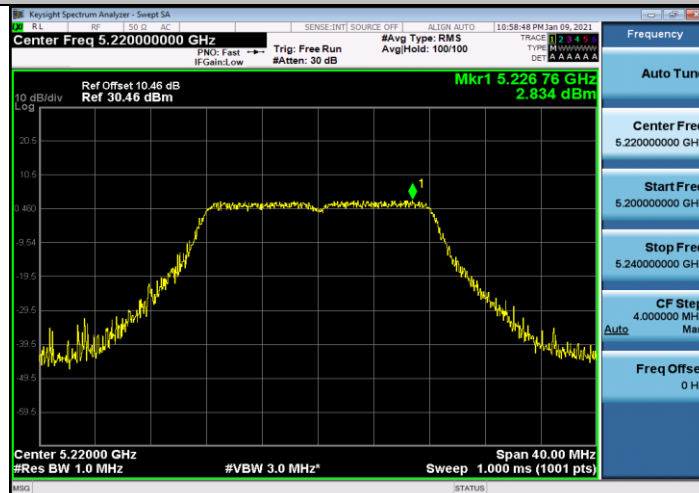


11A_Ant2_5220

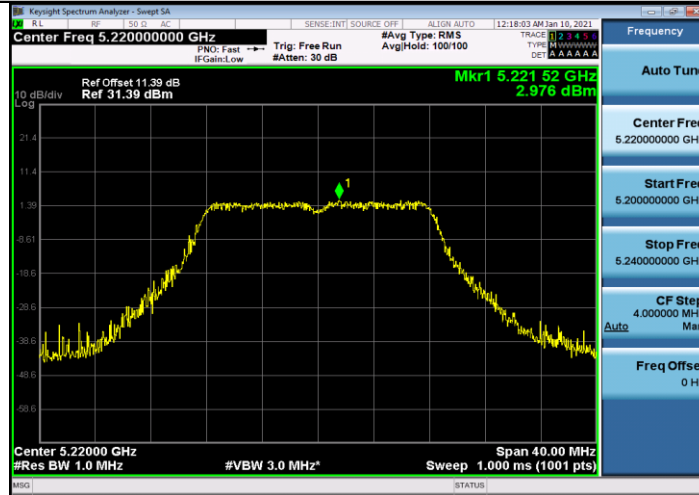


11A_Ant1_5240

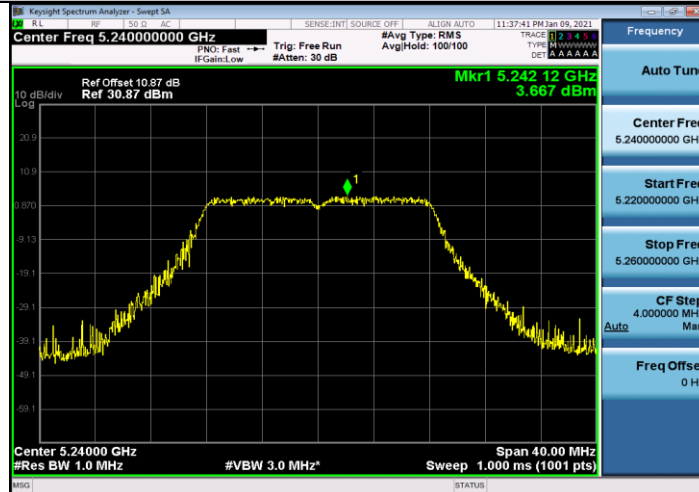


11A_Ant2_5240

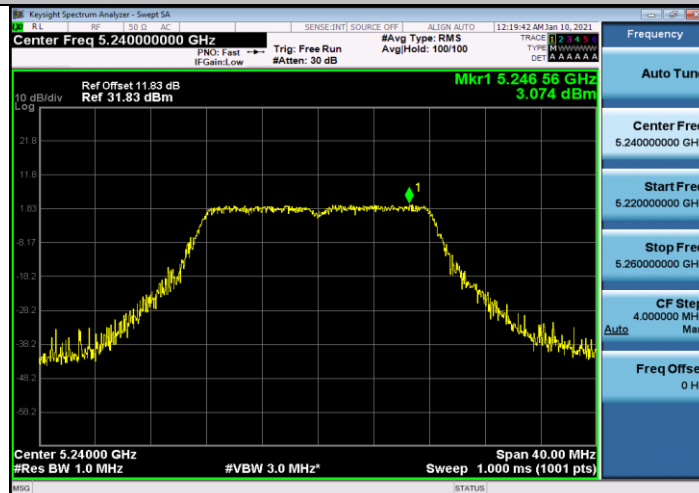


11A_Ant1_5260

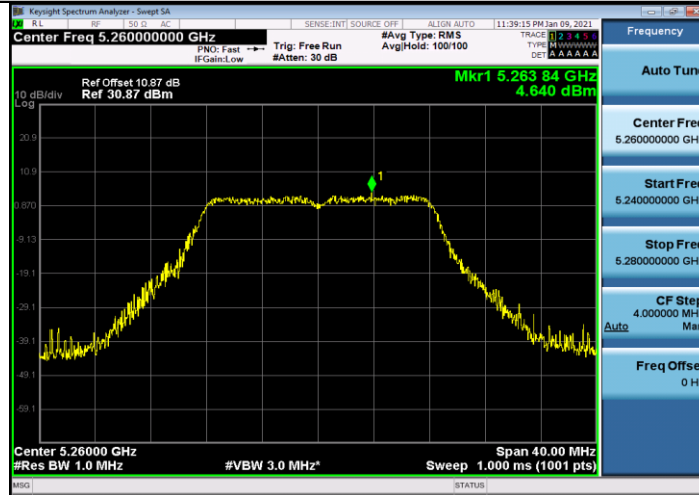


11A_Ant2_5260

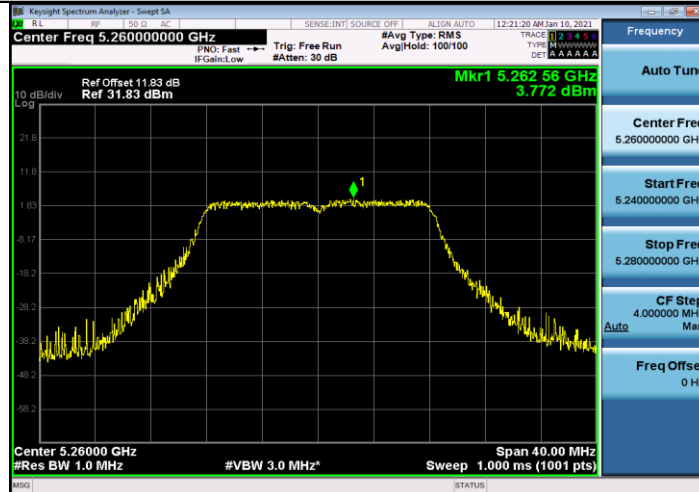


11A_Ant1_5280

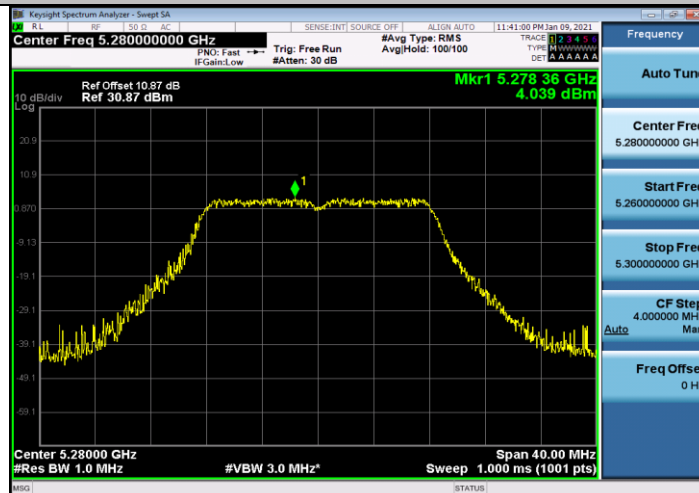


11A_Ant2_5280

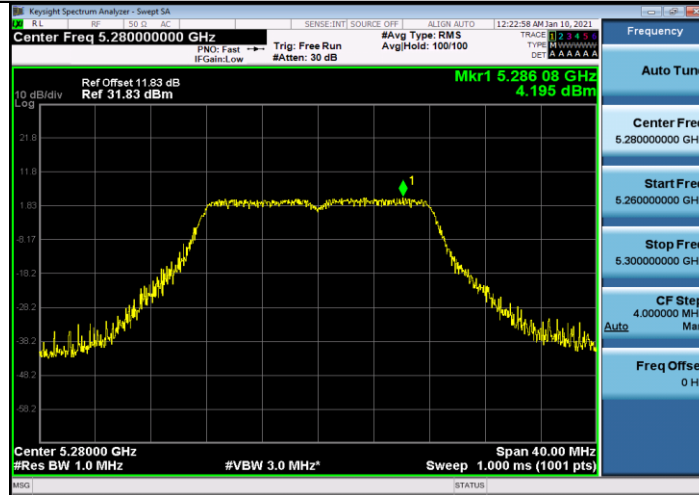


11A_Ant1_5320

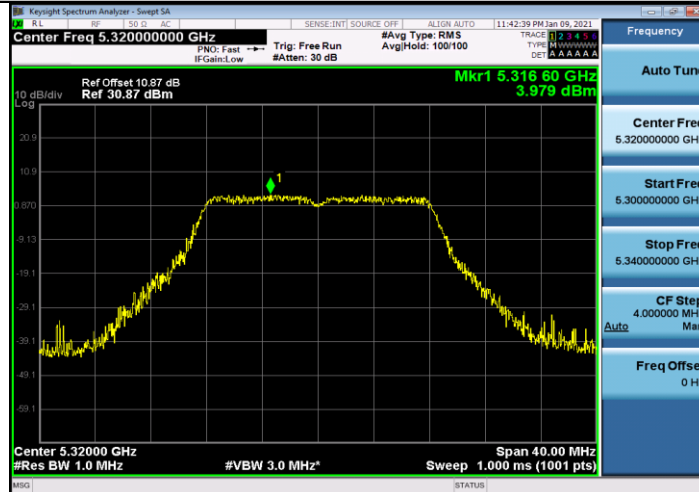


11A_Ant2_5320

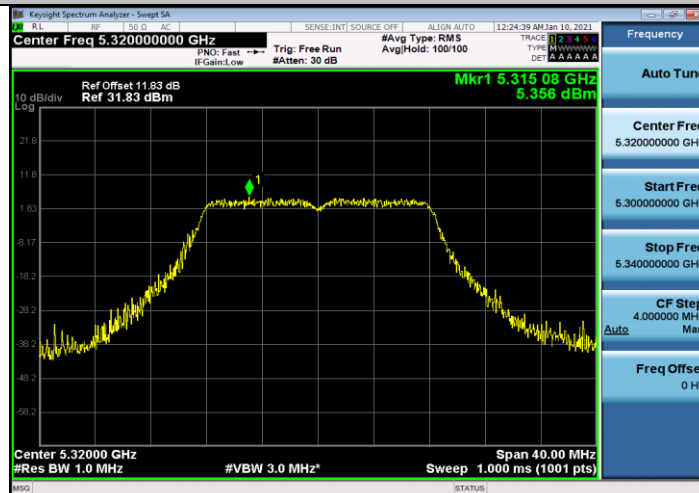


11A_Ant1_5500

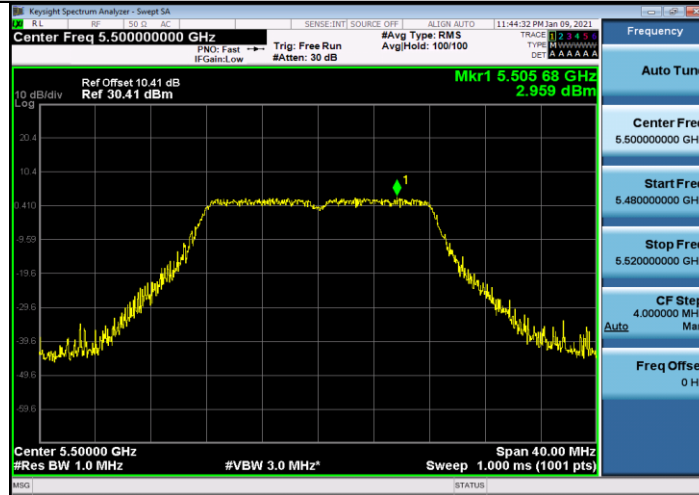


11A_Ant2_5500

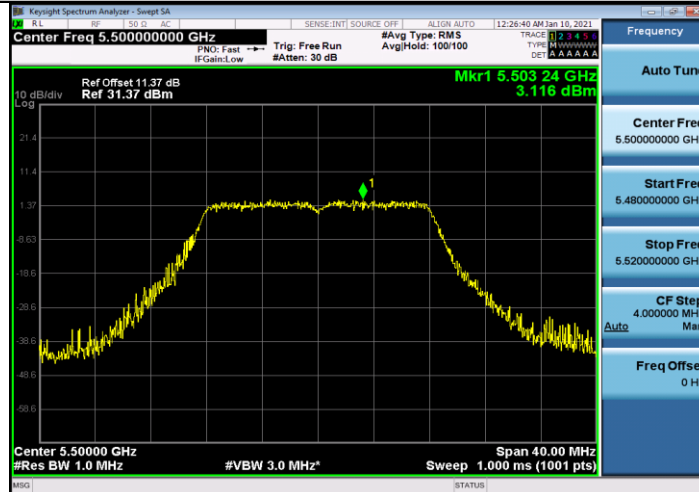


11A_Ant1_5600

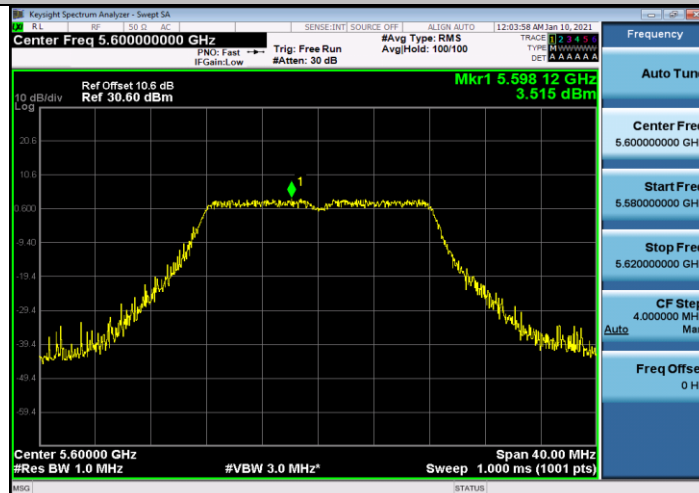


11A_Ant2_5600

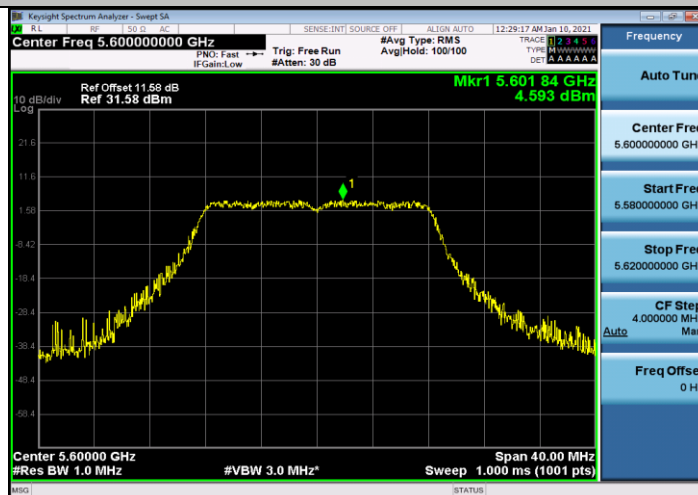


11A_Ant1_5700

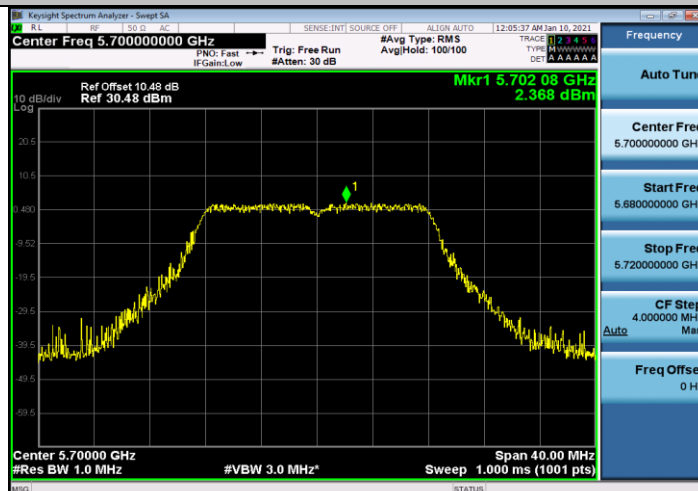

11A_Ant2_5700

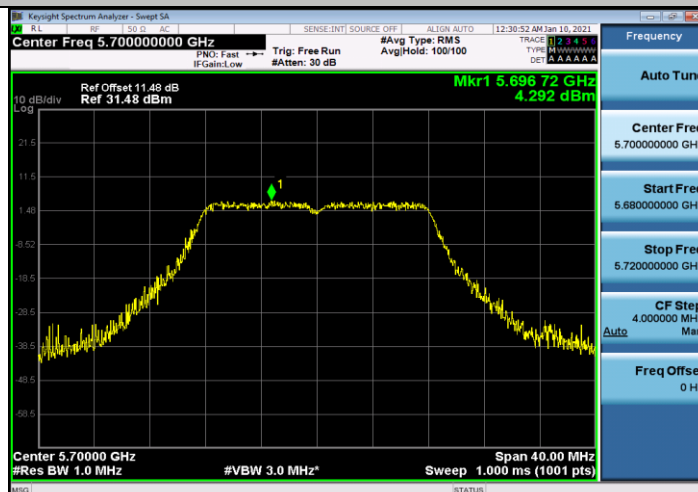

11A_Ant1_5745

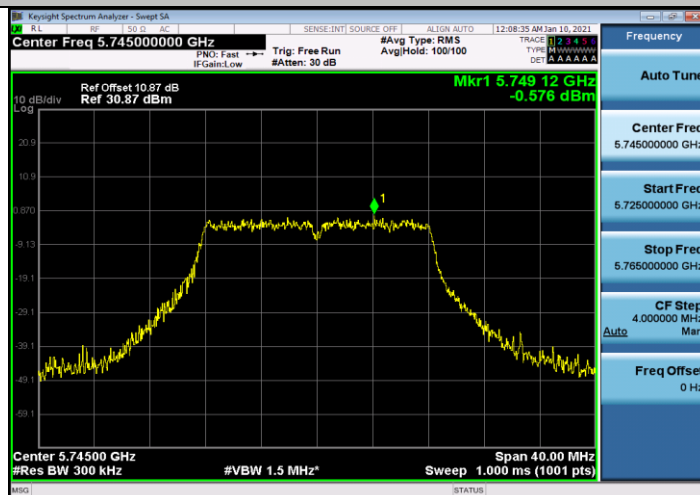

11A_Ant2_5745



11A_Ant1_5785

