


Gloable Powerbank WiFi P1

User Manual



Product Appearance and Interface Description

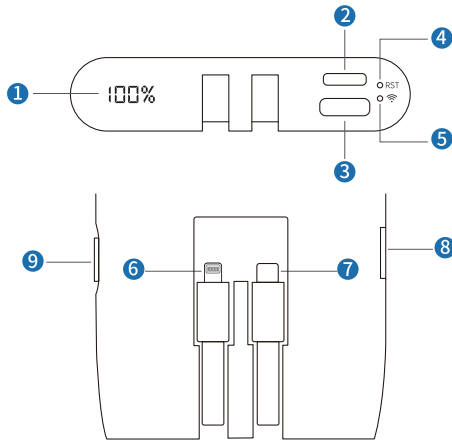

Item	Interface	Description
①	Nixie Tube	Display battery percent
②	Lightning	Charge the device
③	Type-C	Charging the device and Charge the phone in reverse
④	RST	Press 6 seconds to restore the router to its factory default settings
⑤	Network LED	OFF: Network not started Green: Connected the Internet Orange: Not connected the Internet
⑥	Lightning Cable	Charge the device
⑦	TypeC Cable	Charge the device
⑧	Nano-SIM	For holding the Nano SIM card
⑨	Power Button	Short press: Activate the Nixie tube Long press: Turn on/off WiFi

Product Specification

Colour	White
Dimensions	75mm x 158.5mm x 18.8mm
Battery Capacity	10000mAh
Rated Capacity	6800mAh
Power Input	USB TYPE-C DC 5V / 2A (AC 100V-240V)
Charging Time	~3.5h
Normal Working Hours	~15h
Network and Bands	Global 2G/3G/4G
	FDD-LTE: B1/B2/B3/B4/B5/B7/B8/B9/B12/B13/B17/B18/B19/B20/B25/B26/B28/B66
	TDD-LTE:B34/B38/B39/B40/B41
	3G WCDMA/HSPA:B1/B2/B4/B5/B8
Peak Rate	2G GPRS/EDGE:B2/B3/B5/B8
WiFi	CAT4, DL 150Mbps, UL 50Mbps
WiFi Users	802.11 b/g/n 2.4G
WiFi Users	Max 8 concurrent connected users

Notes:

- ① The charging environment temperature is between 0°C-45°C; After one year of normal use of charging and discharging, the battery capacity will be reduced by about 20%.
- ② Please do not over discharge or over charge the battery. When the device is not used for a long time, suggest you charge the device once 2 months.
- ③ Device heating are normal when working, it can be used normally. The device can be placed in a cool and ventilated place to do corresponding cooling treatment.

User Guide

Step 1: Scan and Bind

Use your smartphone's camera to scan the QR code on the back. This will open a webpage.Click"Confirm" activated device.

Step 2: Choose a Data Plan

Click "Store", select Destination or Multi-region based on your needs. There are three data plan types: Day Pack, Monthly Pack, Traffic Pack. Choose the appropriate plan.

Step 3: Purchase Plan

After selecting a plan, click "Purchase" to enter the order page. Confirm the Quantity and click "Process to Checkout." Choose Credit Card or Paypal, then click "Pay" to complete the payment.

Step 4: Power On

Press and hold the power button to turn on the device (If already on, please restart). Wait until the network LED turn green. Connect to the Wi-Fi network.

Setting up the Network

Wireless Setup

WiFi Setup

Physical SIM mode

SSID

12222XXXXXXX

Security Model

WPA2(AES)-PSK

Secret Code

Maximum number of accesses

8

Appliance

Setting up the network

If you need to change the Wi-Fi password or use other functions, please log in to the management address through your browser and enter the backend management page to experience it.

1. Please start the device.
2. Use a wireless device such as a cell phone or computer to connect to the Wi-Fi name of this device Enter the management address (192.168.100.1) in the browser, enter the default management account (admin), the default management password (admin), and then enter the On-the-go Wi-Fi management page.
3. After entering the management page, you can change the Wi-Fi password and other operations according to your needs through quick settings. For more information, please click "Help?" at the bottom of the page. at the bottom of the page for more information.

Quick Troubleshooting

1.WiFi device can' t be powered on / off

- ① Please check that a properly working charging cable and charging plug are used and charge for a period of time before trying to boot the device.
- ② Please check the charging port for any abnormalities such as looseness.
- ③ Please confirm whether the power button is loose or obvious damaged, if there are abnormalities, please return for testing and repairing.
- ④ After confirming the above is to use undamaged charging cable and charging plug, the device can' t be charged, the device may be in water or hardware abnormalities, please Please return for testing and repairing.

2.The WiFi terminal cannot access internet

Check the Network LED on the bottom of the device, If the Network LED is not connected, you need to confirm the validity of the order, or change the location and try again.

3.WiFi network detected but unable to connect to the network

Please check if the WiFi SSID, Password are set correctly.

4.Device' s WiFi cannot be detected

- ① Please turn off your phone's smart WiFi connection, or suggest you try searching with another phone.
- ② If WiFi signal still cannot be detected, please contact customer service.

5.Network is connected but cannot access the internet

Please contact with customer service.

Safety Precautions

1. Do not disassemble the device (including battery) by yourself.
2. Do not subject the equipment to violent shocks and vibrations.
3. Do not use strong chemicals, cleaning agents and strong detergents to clean equipment and accessories.
4. To clean the device, please turn off and disconnect the device from the charging cable first.
5. When the device is finished charging, disconnect the device from the charging cable and unplug the charging head from the power socket.
6. Do not place the device around heating equipment such as microwave ovens, ovens, etc.
7. When the charging cable is damaged, do not continue to use.
8. Do not throw the device into fire.
9. Do not replace the device parts (including the battery) by yourself.
10. Please comply with local laws regarding the disposal of electronic device, batteries and accessories, and support recycling initiatives.
11. Please do not dispose of this equipment, batteries and accessories as ordinary household waste.

Name and Element of the Toxic and Harmful Substances or Elements in the Products

Name of part	Harmful substances					
	Plumbum (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent chromium (Cr6 ⁺)	Polybrominated biphenyls (PBB)	Polybrominated Biphenyl Ether (PBDE)
Wireless data terminals	○	○	○	○	○	○
Accessories	○	○	○	○	○	○

This Table is formulated in line with the SJ/T 11364.

○ indicates that the content of this hazardous substance in all homogeneous materials of this component is below the limit prescribed in GB/T 26572.

✕ indicates that the content of this hazardous substance in a homogeneous material of this component at least exceeds the limit prescribed in GB/T 26572.

Disclaimer:

Please be aware that if you do not use the device in accordance with this User Guide, we assume no responsibility.

FCC Statement

This device has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- * Reorient or relocate the receiving antenna.
- * Increase the separation between the equipment and receiver.
- * Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- * Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Specific Absorption Rate (SAR) information:

This device meets the government's requirements for exposure to radio waves. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons regardless of age or health. FCC RF Exposure Information and Statement the SAR limit of USA (FCC) is 1.6 W/kg averaged over one gram of tissue. Device types: This device has also been tested against this SAR limit.
This device was tested for typical body-worn operations with the back of the This device kept 0mm from the body. To maintain compliance with FCC RF exposure requirements, use accessories that maintain an 0mm separation distance between the user's body and the back of the This device. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided.