
bittel

User Manual

bittel
ModaMedia-W(ZJ)

Followed description maybe different from the real device. Please keep the real device as the criterion. The telephone is subject to change without notice. In order to fully use this device please read this manual carefully.


***We bring good things to Hospitality.
Thank you for purchasing a Bittel product.***

The 5th Module: CORDLESS TELEPHONE MODULE

Main Features:


- 1. High performance speakerphone
- 2. Wireless charging
- 3. Customized faceplate
- 4. Four guest service keys
- 5. Ultrabright message waiting indicator
- 6. Supports up to 4 additional handsets

Base

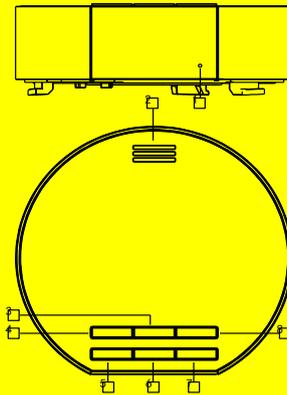

1.Mic	2.Speaker
3,4,8.Guest Service buttons	5. VOL
6.Message waiting indicator	7. Speaker Button

Cordless Handset:

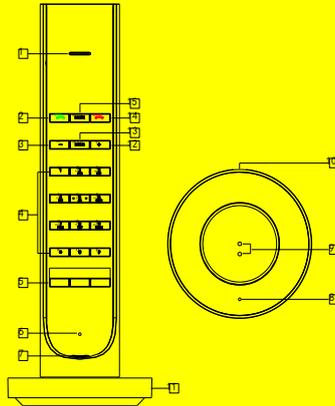

1. Receiver	2. On Button	3. Volume-
4. Number Button	5. Guest Service	6.Low Voltage & Ringing Indicator
7.Mic	8.Charging Indicator	9.Charging Connector Point
4. Power Port	5. Charging Base	6. Volume +
7. Hold Button	8. Off Button	9. Mute Button

Operation

1. Off-Hook

Press  button of the handset or SPKR of the base will enter off-hook status.

Press  for twice will make the handset enter speaker mode.

2. On-Hook

Press  button of the handset or the SPKR of the base will finish the call.

3. Make a Call

Press  button of the handset or SPKR of the base, then dial the telephone number.

4. Answer a call

Please press the handset's  button or the base's SPKR button or directly pick up the handset.

5. Hold

Press HOLD button will enter hold mode, press  button will release it.

6. Mute

Press Mute button will enter mute mode, press mute button again will release it.

7. The communication between the base and the handset

1) Press  button will make the handset enter or get out of speaker mode.

2) Press the SPKR button of the base and press the handset's  button will make the base enter speaker mode.

3) Press the handset's  button or directly pick up the handset will make the base enter on-hook status.

In order to make this feature work, please do the followed settings:
Press handset's HOLD +*+ HOLD+5.

Or need press base's speaker button.

8. The use of the guest service

Off-hook, directly press certain guest service will dial the programmed telephone number.

On-hook, press certain guest service button for 5s can also dial the programmed telephone number.

9. Program the guest service button

1) Program by cloner

Step 1: Please choose DSPG mode, then input the programmed telephone number.

Step 2: Keep the handset off-hook mode, press *#8#, then put the handset back to cradle or press .

Step 3: Press cloner's SEND/ STOP button for 3s.

The display will show Transmitting..., then Succeed.

For the 3 guest service buttons of the base:

Off-hook status, the 3 buttons are M1, M2 and M3 of the cloner; MWL is M0 of the cloner

On-hook status, press each button for 5s, it will be M8,M9 and M10 of the cloner. MWL is M11 of the cloner.

For the 3 guest service button of the handset:

They are the M4, M5 and M6 of the cloner. In order to make it work, please set as followed solution:

On-hook status, press the handset's HOLD+*+HOLD+ certain guest service button

2) Program the service button of the handset by hand:

Press HOLD+telephone number + HOLD+ service button.

To delete the programmed number: Press HOLD+HOLD+ service button.

10. Handset registration

On-hook status, press base's VOL button for 5s, the MWL will turn on, the MWL will turn off after 5s, then press handset's HOLD+*+HOLD+MUTE. It will be successful if the handset rings.

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.