Step 7: Connect the Wires to Smart Doorbell with Terminal Screws;

If your doorbell wires too short , use the Wire Extenders and Wire Nuts to extend the

Wall

Mounting Bracket

Install your Smart Doorbell 2

Step 1: If you don't want to drill holes in the wall, you can use 3M tape to

Step 2: Tear off one side of the 3M tape protective film and stick it on the

Wireless Installation

mount the doorbell

Mounting Screws-3pcs: Use two to mount the Bracket on the wall, and another for backup Wall Anchors-3pcs:(Optional)Push two anchors in the holes you drilled in the wall when installing on concretestucco, or brick you should, and another for backup.

xtension Wires and Wire Nuts: If the doorbell wirs are too short, use the Extender

Step 4: Uninstall your existing doorbell from the wall.Pull the

doorbell. Straighten the wire ends if necessary.

If you're installing on wood, ignore this step.

two wires out carefully when removing the exsting

If you're installing on a hard surface such as concrete stucco, or brick, use suitable

tools to drill two holes in your wall, and push the provided anchors into these holes.

Jumper for Original Chime: The jumper cable to connect both terminals in your existing doorbel's chime.

ring, your doorbell wires may be defective, you can consult an

Step 2:Shut off power at the breaker. Turn the lights on/off in your home to

make sure the electricity in your house is properly shut off.

Install your Smart Doorbell 1

Powering the doorbell with existing doorbell wires

electrician to fix the wires.

the same time. Find a location where you can get the desired field of view.

1. Check if you can reuse the existing holes and anchors on the wall or door

2. If you want to place the doorbell close to a side wall, make sure the wall

3. If you are drilling the mounting holes for the first time, the recommended

4. If you use the package detection function, the package is recommended to

doen't show up in the field of view. Otherwise IR light will be reflected and

Consider the below factors:

night vision will become blurry.

mounting height is 48"/1.2m form the ground.

be placed at a distance of 0.5 meters from the wall.

成品尺寸	80*100mm
展开图尺寸:	800x100mm
公差:	±1mm

单位:mm

extreme temperatures, high altitude...) during use, storage or transportation.

- For pluggable equipment , the socket-outlet shall be installed near the equipment and shall be easily accessible.


fire or the like.

- Never damage the appliance and its battery.

English Warning Statement:

- Never short circuit the battery.

Warning: Batteries shall not be exposed to excessive heat such as sunshine,

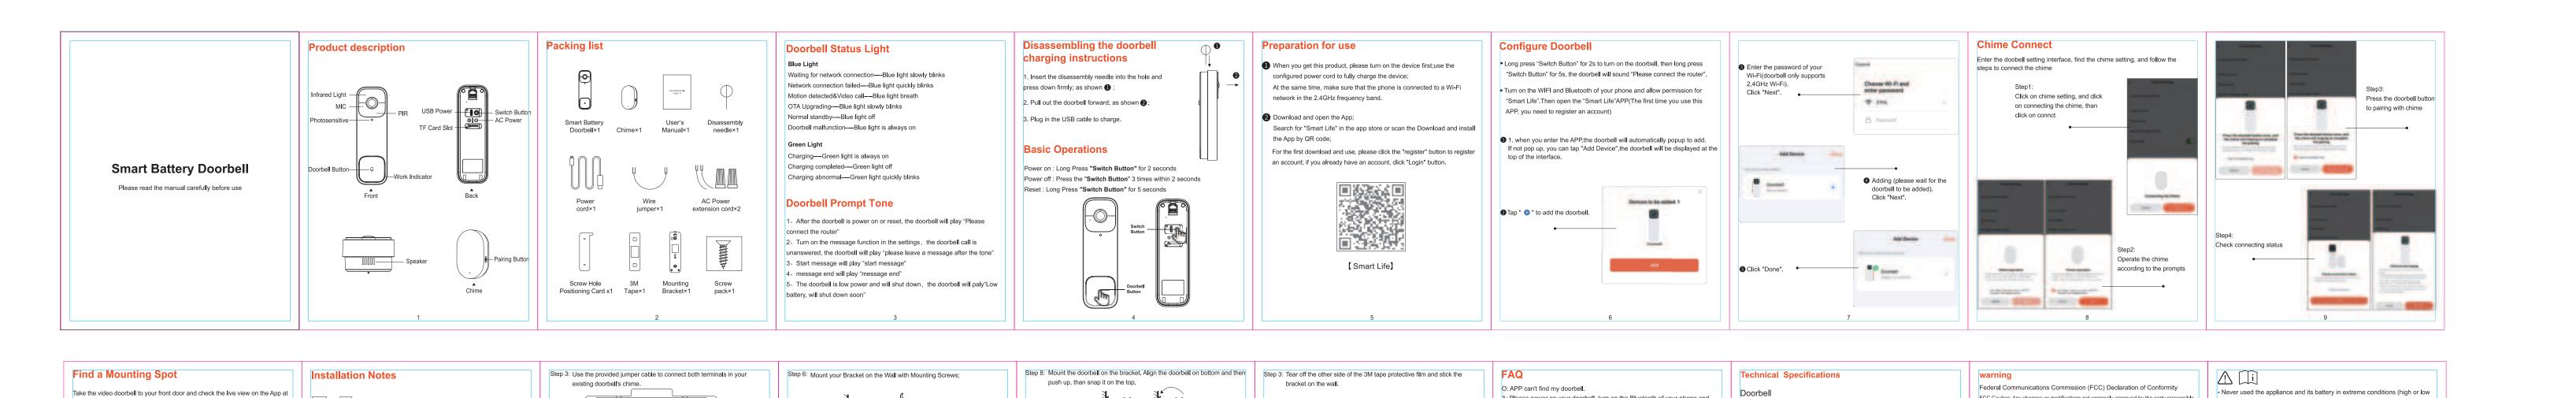

Step 4: Mount the doorbell on the bracket. Align the doorbell on bottom and

then push up, than snap it on the top.

版本	物料编号	变更者	变更时间	版本升级原因描述
1.0				原始版本

FCC Caution: Any changes or modifications not expressly approved by the party responsible

for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable

device, pursuant to part to or the PCC Rules, in less limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by

Radiation Exposure Statement
This equipment complies with FCC radiation exposure limits set forth for an uncontrolled rolled
environment. This equipment should be installed and operated with minimum distance 20cm
between the radiator and your body.

Hereby, Zhejiang Lingzhu Technology Co., Ltd. declares that this product is in compliance with essential requirements and other relevant provisions of Directive

This product must not be disposed of as normal household waste, in accordance with EU directive for waste electrical and electronic equipment

(WEEE- 2012/19/EU). Instead, it should be disposed of by returning it to the point of sale, or to a municipal recycling collection point.

The device could be used with a separation distance of 20cm to the human body 18

one or more of the following measures:

Repriet or relocate the receiving antenna.

Increase the separation between the equipment and receiver,

Connect the equipment into an outlet on a circuit different from that to which

the receiver is connected.

—Consult the dealer or an experienced radio/TV technician for help.

Declaration Of Conformity European Notice

材质	105g铜版纸	客户	产品名称	门铃	物料名称 SC162-WCD3-门铃-中性- 英文-说明书	设计	大川
印刷色	四色印刷					<u></u> + /	コレロなロな
加工工艺	风琴10折页	中性	型号	CC1C2 WCD2	物料编号	审核	张路路
接合方式			坐写	SC162-WCD3		时间	20250326

A: Please power on your doorbell, turn on the Bluetooth of your phone and

A: Please check whether the Wi-Fi signal is sufficient, the doorbell only

correct, and the password does not support special symbols.

Internet, please check the strength of wireless signal.

supports 2.4GHz Wi-Fi, not 5GHz, please make sure your Wi-Fi password is

A: Please make sure Wi-Fi connection is correct. If doorbell is connected to the

A: Please check if doorbell's motion detect is turned on and the alarm settings

A: Please remove your device in your APP, then you reset your doorbell. Reset

Q: What should I do if my mobile phone does not receive doorbell's push.

are correct. Then check APP's push permission on your mobile phone.

Q: I have reset my doorbell, I cannot connect my doorbell again.

allow permission for "Smart Life"APP.

Q: Doorbell could not connect Wi-Fi.

Q: Device list is prompted device is offline.

directly without unbinding the APP is invalid.

A: Doorbell supports up to 128G micro SD card.

Q: Memory card is invalid.

- Operating temperature -20°C $\sim\!50^\circ\text{C}\,,\,$ Operating humidity 10%~95%

Notice:
The maximum normal condition operating temperature is defined as +50°C except battery

charging conditon. The maximum battery charger temperature is defined as 44°C.

• Power: AC 8-24V ~ 50/60Hz 200mA and general 5V Direct Current

• Operating Temperature -10 °C to 45 °C; Operating Humidity <90% at

Power :100-240V~50/60Hz; Symbol ~ means alternating current

Indoor use, bathroom excluded; Symbol
 means for indoor use

Symbol means Class II product-Double Insulated -No earth

Frequency Range: 2.412~2.472GHz, RF 433.92MHz

1.5A, symbol means direct current

Communication : RF 433.92MHz