










尺寸：80x200 mm
材质：128g双铜纸双面印刷
颜色：单色
折叠方式：风琴折




01/Packing List

Upon opening the package, check for any damage to the main unit and ensure all accessories are present.

 Doorbell
  Chime
  Mounting Bracket


 15° Mounting Wedge (Optional)
  Screw-Hole Positioning Card
  Screw Pack

 Type-C Power Cable
  Electrical Wires and Wire Nuts (Optional)
  Doorbell Detaching Pin


 Phillips-Head Screwdriver
  Quick-Start Guide
  Warning stickers

Note: Due to ongoing updates and iterations of the product, there may be slight differences between the physical and schematic diagrams. Please refer to the actual products for the most accurate information.

02/Product appearance

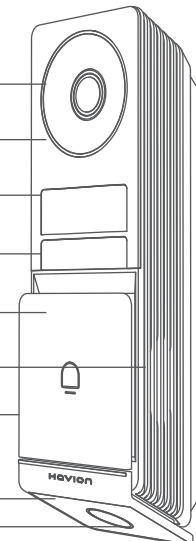


- Primary Camera Lens
- Infrared lamp
- LCD
- Motion Sensor (PIR + Radar)
- LED Ring/Doorbell Button
- Speaker
- Microphone
- White light
- Secondary Camera Lens

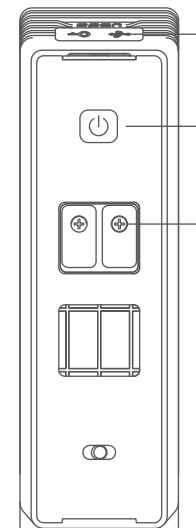

- Type-C USB Charging Port/Detaching Mechanism
- Power On/Reset Button
- Power Terminals for Existing Doorbell Wires (Optional)

03/How the System Works

The video doorbell system includes two parts. The video doorbell installed at your door and the Chime located inside your house. The video doorbell detects motion at your porch, allowing you to answer the door anytime and anywhere. When someone rings the doorbell, the Chime will ring indoors.

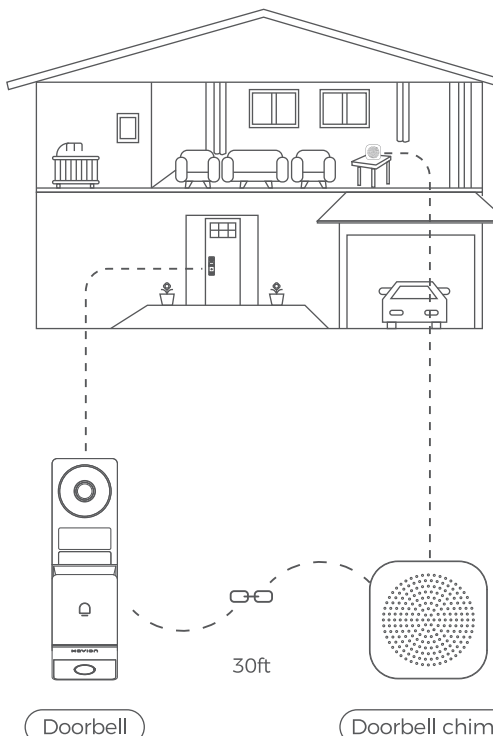





30ft

Doorbell


Doorbell chime

04/Download the App and Set up the System

Download the Haviion app from the App Store (iOS devices) or GooglePlay (Android devices).

Download the app to discover all D1/D2 functions. If you have any questions, please email Service@haviion.com or call us at +1 (888) 241-0666.




Guide to Connecting Devices to Wi-Fi

05/Install

Option 1-Battery Powered

- If you don't have existing doorbell wiring at the front door, use the built-in battery. You are free to determine the doorbell position and the mounting is easy and quick.
- When the doorbell battery level is low, you need to detach and charge it.

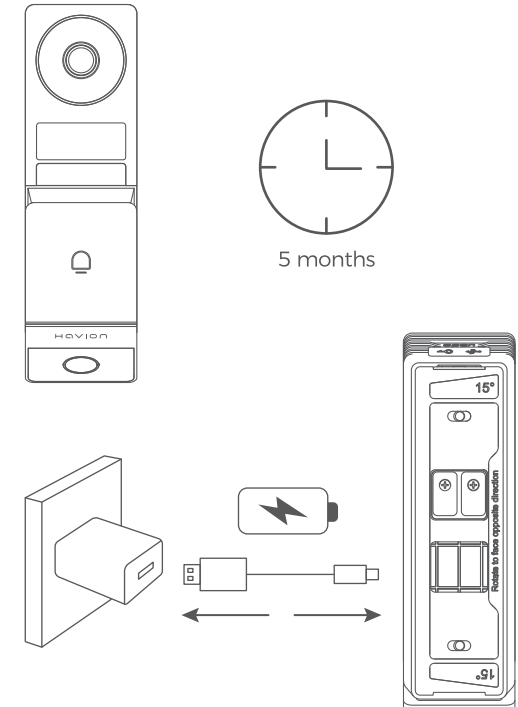


5 months

Note: The battery life varies depending on usage. In most common cases, a doorbell may have up to 10 events per day and each recording lasts 20 seconds on average. Under this scenario, the doorbell battery life can last up to 5 months.


Option 2 - Doorbell Wire Powered

- If you have existing and working doorbell wiring at the front door, the doorbell will be powered by the wires constantly. So you don't need to detach and charge it after installation.
- Since the doorbell is connected to the wires, the mounting position is limited.

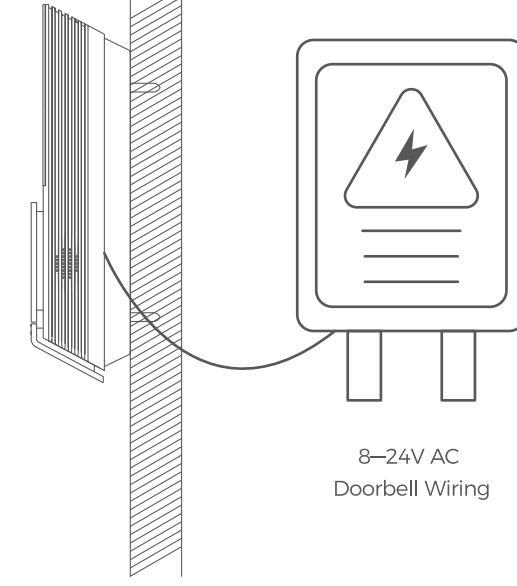

8-24V AC Doorbell Wiring

Go to <https://www.haviion.com> to watch the installation video. If any questions, please email to Service@haviion.com or call Us: +1 (888) 241-0666




Installation Video

06/Find a Mounting Spot

Take the video doorbell to your front door and check the live view on the app at the same time. Find a location where you can see the desired field of view.

Consider the following factors:

- Check if you can reuse the existing holes and anchors on the wall or door frame.
- If you want to place the doorbell close to a side wall, make sure the wall does not appear in the field of view. Otherwise, IR light will be reflected and night vision may become blurry.
- If you are drilling the mounting holes for the first time, the recommended mounting height is 48" (1.2m).
- To adjust the angle, use the 15° mounting wedge as a supplementary mounting bracket.

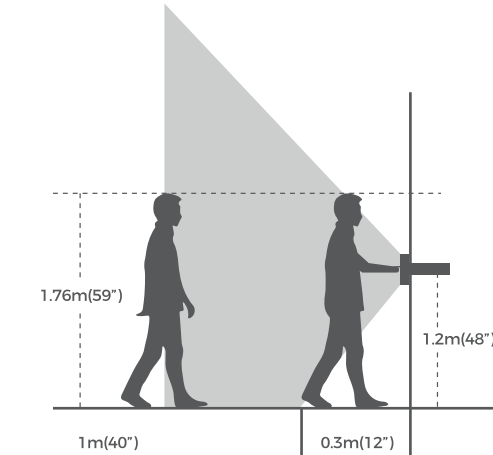

1.78m (5'9")

1.2m (4'0")

0.3m (1'2")

07/Power button


Operation	How-to
Power On the Doorbell	Press and hold the Power button for about 5 seconds
Power Off the Doorbell	Press and hold the Power button for about 5 seconds
Reset the Doorbell	Quickly press the Power button 5 times within 5 seconds
System Crash	Quickly press the Power button for about 15 seconds

08/Status LED

Operation	How-to
Boot-Up	Red Light Always On
Waiting for network setting	Red light fast blinking and a prompt will appear on the LCD to open the app
Network Connecting	Blue light fast blinking and the corresponding status will appear on the LCD
Network Connected	The blue light flashes slowly and 'Hello' appears on the LCD
Charging Status	Red and blue lights flash alternately and a charging prompt will appear on the LCD
Abnormal Status	Red light slow blinking

09/How the System Works

The video doorbell system includes two parts. The video doorbell installed at your door and the Chime located inside your house. The video doorbell detects motion at your porch, allowing you to answer the door anytime and anywhere. When someone rings the doorbell, the Chime will ring indoors.

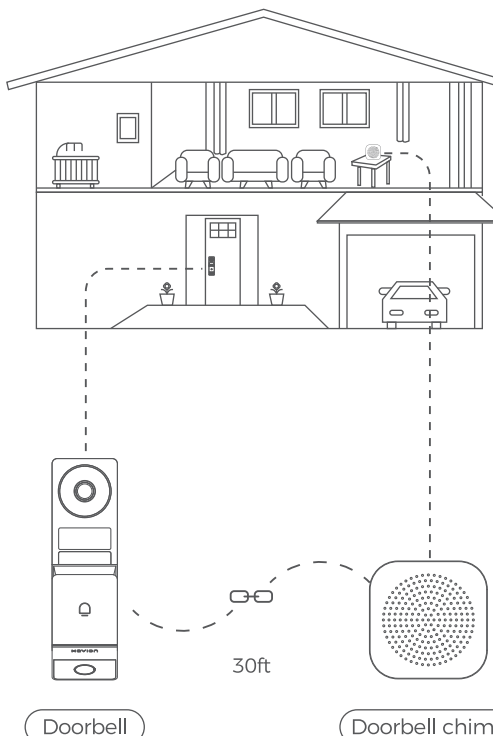





30ft

Doorbell


Doorbell chime

10/Download the App and Set up the System

Download the Haviion app from the App Store (iOS devices) or GooglePlay (Android devices).

Download the app to discover all D1/D2 functions. If you have any questions, please email Service@haviion.com or call us at +1 (888) 241-0666.




Guide to Connecting Devices to Wi-Fi

11/Install

Option 1-Battery Powered

- If you don't have existing doorbell wiring at the front door, use the built-in battery. You are free to determine the doorbell position and the mounting is easy and quick.
- When the doorbell battery level is low, you need to detach and charge it.

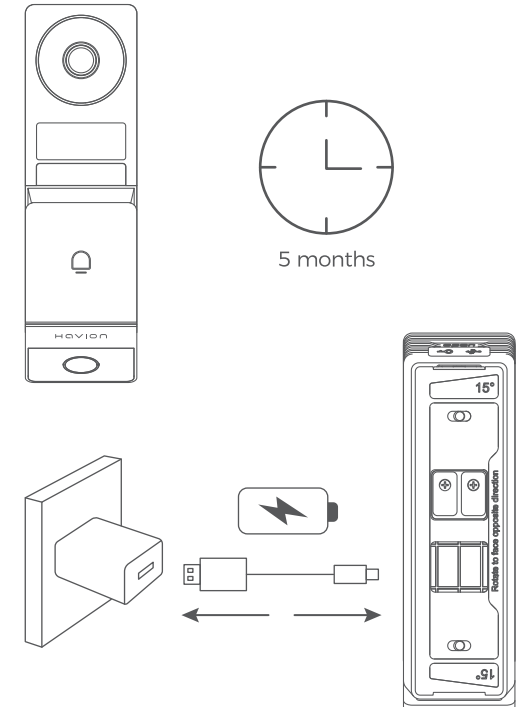


5 months

Note: The battery life varies depending on usage. In most common cases, a doorbell may have up to 10 events per day and each recording lasts 20 seconds on average. Under this scenario, the doorbell battery life can last up to 5 months.


Option 2 - Doorbell Wire Powered

- If you have existing and working doorbell wiring at the front door, the doorbell will be powered by the wires constantly. So you don't need to detach and charge it after installation.
- Since the doorbell is connected to the wires, the mounting position is limited.

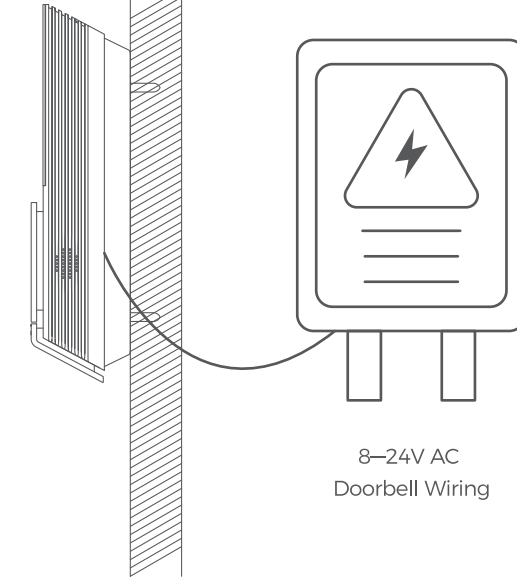

8-24V AC Doorbell Wiring

Go to <https://www.haviion.com> to watch the installation video. If any questions, please email to Service@haviion.com or call Us: +1 (888) 241-0666




Installation Video

12/Find a Mounting Spot

Take the video doorbell to your front door and check the live view on the app at the same time. Find a location where you can see the desired field of view.

Consider the following factors:

- Check if you can reuse the existing holes and anchors on the wall or door frame.
- If you want to place the doorbell close to a side wall, make sure the wall does not appear in the field of view. Otherwise, IR light will be reflected and night vision may become blurry.
- If you are drilling the mounting holes for the first time, the recommended mounting height is 48" (1.2m).
- To adjust the angle, use the 15° mounting wedge as a supplementary mounting bracket.

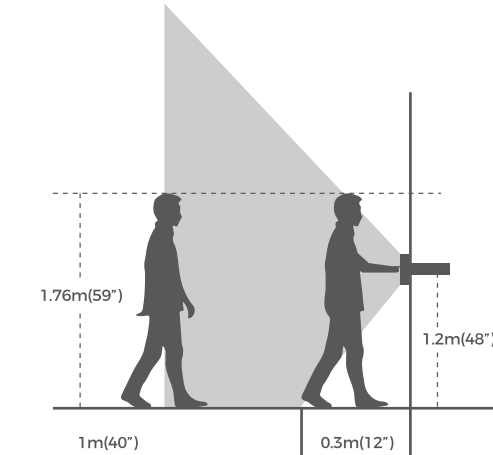

1.78m (5'9")

1.2m (4'0")


0.3m (1'2")

HAVION


Customer Service

Service Hotline:
US+1(888)241-0666
Operating Hours: 11:00 AM-8:00 PM EST
Official Support Email: Service@havion.com
Website: https://www.havion.com

07/Mounting The Bracket

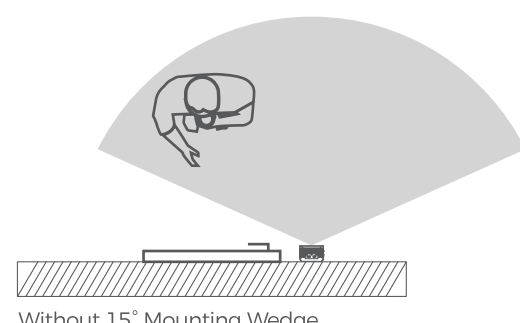


Without 15° Mounting Wedge

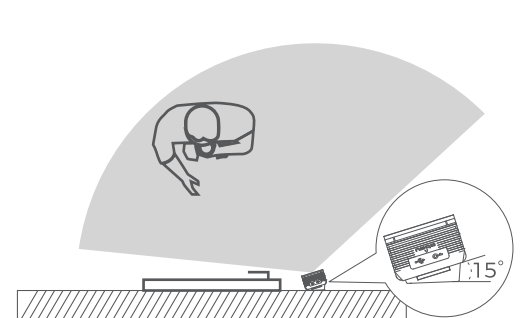

With 15° Mounting Wedge


Place the screw-hole positioning card against the wall to mark the position

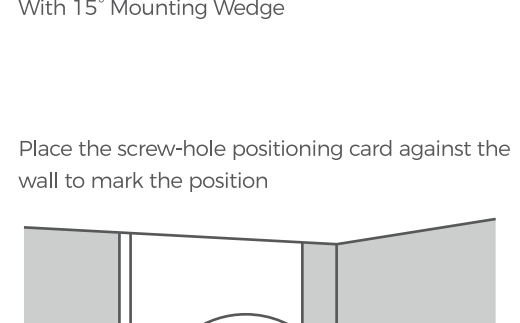

08/Mount the Doorbell

(Note: This section was merged into Section 07)

09/Connect the Doorbell Wires to the Doorbell



10/Video Guide

Scan the QR code to watch the video instruction on how to perform the operation.

Jiangsu Niu Electric Technology Co.,Ltd

No.387 Changting Road, West Taihu Science and Technology Industrial Park, changzhou city, Jiangsu, P.R. China

RF Exposure statement:
This equipment complies with FCC radiation exposure limits set forth for unlicensed radio frequency transmitters operating in the unlicensed radio frequency bands. The user must not hold the transmitter or antenna close to their body while transmitting. The maximum SAR value is less than 0.08 W/kg. The transmitter must not be used in conjunction with any other antenna or transmitter.