


Report No.: AGC00408210801FE02 Page 50 of 80




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the coefficient report is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter permitted without the writter permitted without the writter permitted in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

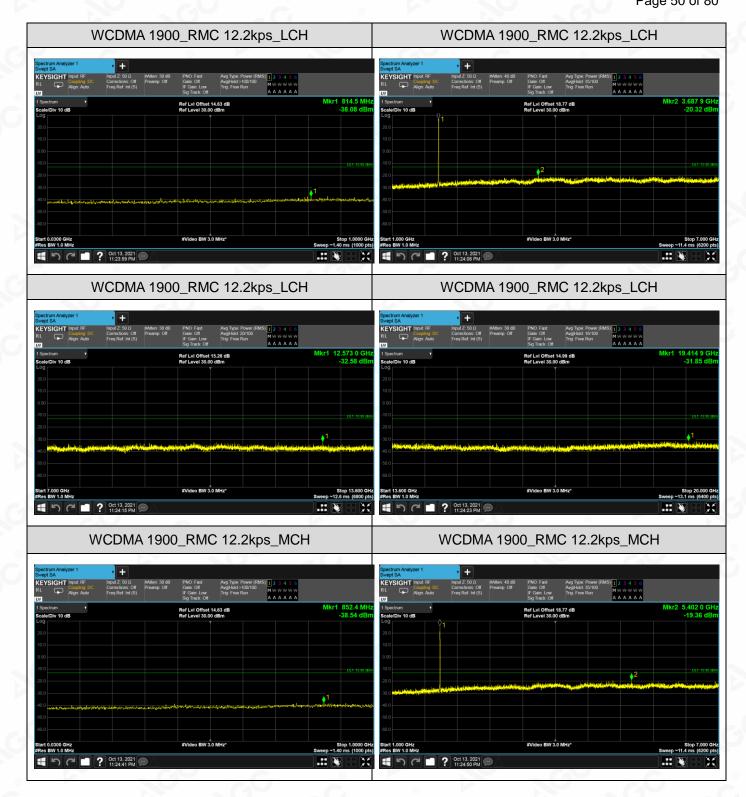


Report No.: AGC00408210801FE02 Page 51 of 80

WCDMA 1900_RMC 12.2kps_MCH WCDMA 1900_RMC 12.2kps_MCH WCDMA 1900_RMC 12.2kps_HCH WCDMA 1900_RMC 12.2kps_HCH WCDMA 1900_RMC 12.2kps_HCH WCDMA 1900_RMC 12.2kps_HCH


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stadied restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written appropriation of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.






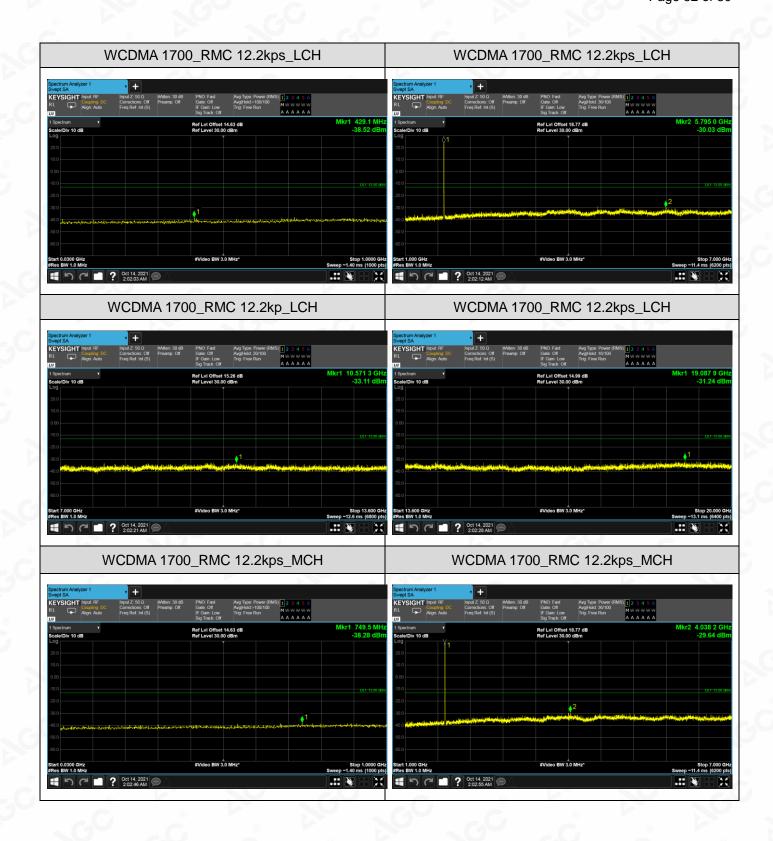

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Festiva/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





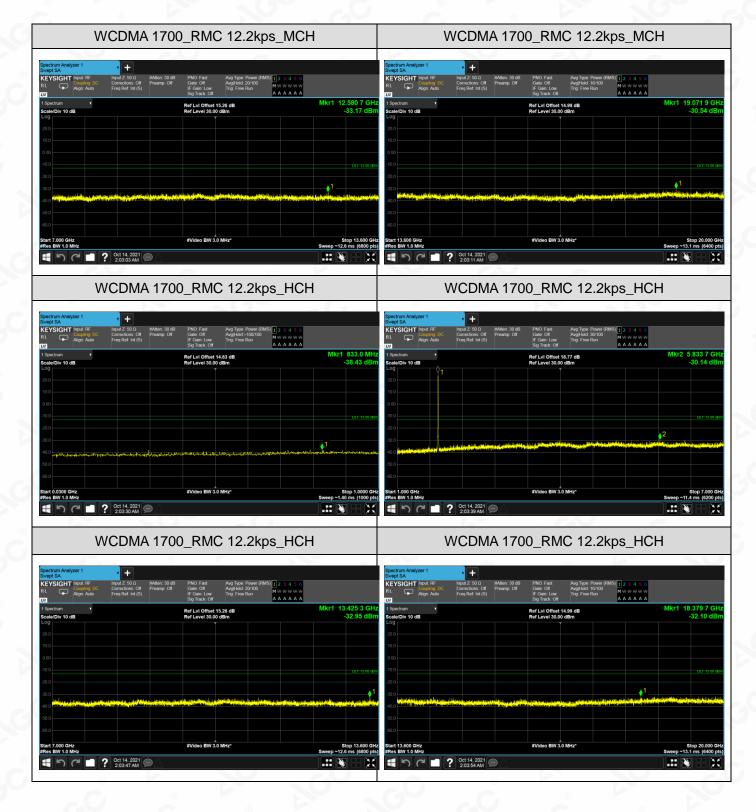

Note: 1. Below 30MHZ no Spurious found and Above is the worst mode data.

2. As no emission found in standby or receive mode, no recording in this report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pest no/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 54 of 80

13. RADIATED SPURIOUS EMISSION

13.1. PROVISIONS APPLICABLE

(A) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm.

At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

(B) For specific criteria, please refer to the description in section 9.2 of the report for corresponding evaluation.

13.2. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Any report having not been signed by authorized approver, or naving usern altered without additional authorization, or naving not been signed by authorization of AGC. The test results stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written perhorization of AGC. The test results accounted in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. The test results Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- 11. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT.

The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;

Result(dBm) = Pg(dBm) + Factor(dB)

Factor(dB) = Ant Gain(dB)-Cable Loss(dB) + Power Splitter(dB) (Above 1GHz)

Factor(dB) = Ant Gain(dB)-Cable Loss(dB) (Below 1GHz)


Where: Pgis the generator output power into the substitution antenna.

If the fundalmatal frequency is below 1GHz, RF output power has been converted to EIRP.


EIRP(dBm) = ERP(dBm) + 2.15

13.3. MEASUREMENT setup

Radiated Emissions 30MHz to 1GHz Test setup

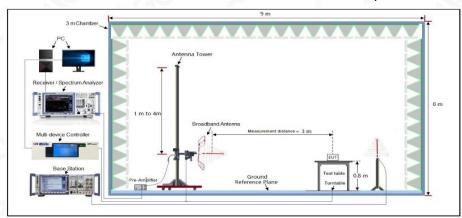

Radiated Emissions Above 1GHz Test setup

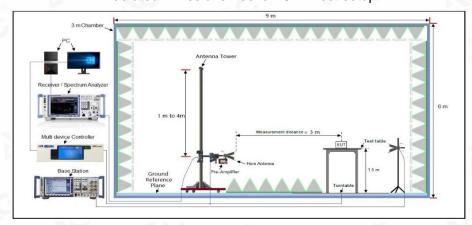

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the coefficient of stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Page 56 of 80

12.4 MEASUREMENT RESULT

The measurement Below 1GHz data as follows:

			GS	SM 850			
.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
No.	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
			GSM_ Lov	west Channe	l		
1	159.759	-63.29	15.52	-50.13	-13.00	-34.77 -30.41	Horizontal
2	240.144	-60.16	16.75	-45.21	-13.00		Horizonta
3	754.963	-59.02	19.35	-40.29	-13.00	-26.67	Horizontal
4	46.708	-62.67	10.44	-54.44	-13.00	-39.23	Vertical
5	433.340	-59.72	17.75	-43.49	-13.00	-28.97	Vertical
6	502.247	-59.33	18.66	-40.67	-13.00	-27.67	Vertical
			GSM_ Mi	ddle Channe			•
1	31.735	-61.12	9.78	-53.32	-13.00	-38.34	Horizontal
2	159.759	-61.51	13.75	-49.85	-13.00	-34.76	Horizontal
3	240.144	-61.72	16.75	-45.20	-13.00	-31.97	Horizontal
4	43.233	-63.24	10.23	-53.66	-13.00	-40.01	Vertical
。5	433.340	-60.79	17.75	-44.74	-13.00	-30.04	Vertical
6	498.730	-58.04	18.02	-41.43	-13.00	-27.02	Vertical
			GSM_ Hig	hest Channe	el		
1	159.759	-64.96	13.75	-50.10	-13.00	-38.21	Horizontal
2	240.144	-62.59	16.75	-45.32	-13.00	-32.84	Horizontal
3	679.435	-60.92	19.01	-40.63	-13.00	-28.91	Horizontal
4	43.233	-65.01	10.23	-53.30	-13.00	-41.78	Vertical
5	433.340	-61.84	17.75	-43.89	-13.00	-31.09	Vertical
6	498.730	-60.35	18.02	-41.74	-13.00	-29.33	Vertical


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pest Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issue of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com. g/Inspection he test results ne test report.





			PC	S 1900									
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.						
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	_						
			GSM_ Lov	west Channe	ĺ								
1 ®	159.759	-63.21	15.52	-50.00	-13.00	-34.69	Horizontal						
2	240.144	-60.39	16.75	-45.72	-13.00	-30.64	Horizontal						
3	754.963	-58.21	19.35	-39.99	-13.00	-25.86	Horizontal						
<u>4</u>	46.708	-64.36	10.44	-54.35	-13.00	-40.92	Vertical						
5	433.340	-61.68	17.75	-44.03	-13.00	-30.93	Vertical						
6	502.247	-57.08	18.66	-39.80	-13.00	-25.42	Vertical						
			GSM_ Mid	ddle Channel									
1	31.735	-62.29	9.78	-53.14	-13.00	-39.51	Horizontal						
2	159.759	-63.97	13.75	-50.37	-13.00	-37.22	Horizontal						
3	240.144	240.144	240.144	240.144	240.144	240.144	240.144	-59.61	16.75	-44.96	-13.00	-29.86	Horizontal
4	43.233	-61.95	10.23	-53.31	-13.00	-38.72	Vertical						
5	433.340	-60.53	17.75	-45.08	-13.00	-29.78	Vertical						
_© 6	498.730	-57.65	18.02	-40.77	-13.00	-26.63	Vertical						
			GSM_ Hig	hest Channe	l								
1	159.759	-62.16	13.75	-49.90	-13.00	-35.41	Horizontal						
2	240.144	-62.21	16.75	-46.00	-13.00	-32.46	Horizontal						
3	679.435	-58.52	19.01	-40.07	-13.00	-26.51	Horizontal						
4	43.233	-63.50	10.23	-53.57	-13.00	-40.27	Vertical						
5	433.340	-59.60	17.75	-44.08	-13.00	-28.85	Vertical						
6	498.730	-57.58	18.02	-40.87	-13.00	-26.56	Vertical						


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





			WCDN	/IA Band II				
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.	
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)		
			RMC 12.2kbps	_ Lowest Cha	annel			
1 ®	159.759	-66.63	15.52	-51.11	-13.00	-38.11	Horizontal	
2	240.144	-64.04	16.75	-47.29	-13.00	-34.29	Horizontal	
3	754.963	-60.53	19.35	-41.18	-13.00	-28.18	Horizontal	
4	46.708	-65.54	10.44	-55.10	-13.00	-42.10	Vertical	
5	433.340	-63.19	17.75	-45.44	-13.00	-32.44	Vertical	
6	502.247	-59.72	18.66	-41.06	-13.00	-28.06	Vertical	
			RMC 12.2kbps	_ Middle Cha	annel			
1	31.735	-61.56	9.78	-51.78	-13.00	-38.78	Horizontal	
2	159.759	-63.19	13.75	-49.44	-13.00	-36.44	Horizontal	
3	240.144	-58.94	16.75	-42.19	-13.00	-29.19	Horizontal	
4	43.233	-62.35	10.23	-52.12	-13.00	-39.12	Vertical	
5	433.340	-60.53	17.75	-42.78	-13.00	-29.78	Vertical	
6	498.730	-58.40	18.02	-40.38	-13.00	-27.38	Vertical	
			RMC 12.2kbps	_ Highest Ch	annel			
1	159.759	-63.69	13.75	-49.94	-13.00	-36.94	Horizontal	
2	240.144	-61.02	16.75	-44.27	-13.00	-31.27	Horizontal	
3	679.435	-57.05	19.01	-38.04	-13.00	-25.04	Horizontal	
4	43.233	-61.15	10.23	-50.92	-13.00	-37.92	Vertical	
5	433.340	-60.44	17.75	-42.69	-13.00	-29.69	Vertical	
6	498.730	-57.96	18.02	-39.94	-13.00	-26.94	Vertical	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





			WCDN	IA Band IV				
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.	
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)		
			RMC 12.2kbps	_ Lowest Ch	annel			
1 ®	159.759	-67.17	15.52	-51.65	-13.00	-38.65	Horizontal	
2	240.144	-63.60	16.75	-46.85	-13.00	-33.85	Horizontal	
3	754.963	-59.43	19.35	-40.08	-13.00	-27.08	Horizontal	
4	46.708	-65.50	10.44	-55.06	-13.00	-42.06	Vertical	
5	433.340	-61.72	17.75	-43.97	-13.00	-30.97	Vertical	
6	502.247	-60.48	18.66	-41.82	-13.00	-28.82	Vertical	
			RMC 12.2kbps	s_ Middle Cha	annel			
1	31.735	-64.49	9.78	-54.71	-13.00	-41.71	Horizontal	
2	159.759	-64.80	13.75	-51.05	-13.00	-38.05	Horizontal	
3	240.144	-61.76	16.75	-45.01	-13.00	-32.01	Horizontal	
4	43.233	-64.19	10.23	-53.96	-13.00	-40.96	Vertical	
5	433.340	-64.06	17.75	-46.31	-13.00	-33.31	Vertical	
_© 6	498.730	-59.65	18.02	-41.63	-13.00	-28.63	Vertical	
			RMC 12.2kbps	_ Highest Ch	annel			
1	159.759	-65.45	13.75	-51.70	-13.00	-38.7	Horizontal	
2	240.144	-63.71	16.75	-46.96	-13.00	-33.96	Horizontal	
3	679.435	-60.56	19.01	-41.55	-13.00	-28.55	Horizontal	
4	43.233	-64.38	10.23	-54.15	-13.00	-41.15	Vertical	
5	433.340	-62.11	17.75	-44.36	-13.00	-31.36	Vertical	
6	498.730	-60.53	18.02	-42.51	-13.00	-29.51	Vertical	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC00408210801FE02 Page 60 of 80

			WCDI	MA Band V			
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
			RMC 12.2kbps	s_ Lowest Ch	annel		·
1	159.76	-65.30	15.52	-49.78	-13.00	-36.78	Horizontal
2	240.14	-61.17	16.75	-44.42	-13.00	-31.42	Horizontal
3	754.96	-57.39	19.35	-38.04	-13.00	-25.04	Horizontal
4	46.71	-63.10	10.44	-52.66	-13.00	-39.66	Vertical
5	433.34	-60.18	17.75	-42.43	-13.00	-29.43	Vertical
6	502.25	-57.43	18.66	-38.77	-13.00	-25.77	Vertical
			RMC 12.2kbps	s_ Middle Cha	annel		
1	31.74	-61.75	9.78	-51.97	-13.00	-38.97	Horizontal
2	159.76	-63.64	13.75	-49.89	-13.00	-36.89	Horizontal
3	240.14	-60.82	16.75	-44.07	-13.00	-31.07	Horizontal
4	43.23	-63.61	10.23	-53.38	-13.00	-40.38	Vertical
5	433.34	-61.05	17.75	-43.30	-13.00	-30.3	Vertical
6	498.73	-58.90	18.02	-40.88	-13.00	-27.88	Vertical
			RMC 12.2kbps	_ Highest Ch	annel		·
1	159.76	-62.79	13.75	-49.04	-13.00	-36.04	Horizontal
2	240.14	-61.81	16.75	-45.06	-13.00	-32.06	Horizontal
3	679.44	-57.05	19.01	-38.04	-13.00	-25.04	Horizontal
4	43.23	-63.38	10.23	-53.15	-13.00	-40.15	Vertical
5	433.34	-60.17	17.75	-42.42	-13.00	-29.42	Vertical
6	498.73	-57.42	18.02	-39.40	-13.00	-26.4	Vertical

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Page 61 of 80

The measurement Above 1GHz data as follows:

			GS	SM 850			
	Frequency	SA	Correction	EIRP	Limit	Margin	
No.	Frequency	Reading	factor	Result	Lillin	Wargin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
			GSM_ Lov	west Channe	I		
1 🏻	1648.400	-87.73	23.50	-64.23	-13.00	-51.23	Horizontal
2	2472.600	-87.80	29.47	-58.33	-13.00	-45.33	Horizontal
3	1648.400	-89.31	23.72	-65.59	-13.00	-52.59	Vertical
_ 4	2472.600	-89.25	29.47	-59.78	-13.00	-46.78	Vertical
			GSM_ Mi	ddle Channel			
1	1673.200	-88.92	23.50	-65.42	-13.00	-52.42	Horizontal
2	2509.800	-90.97	29.47	-61.50	-13.00	-48.5	Horizontal
3	1673.200	-90.73	23.72	-67.01	-13.00	-54.01	Vertical
4	2509.800	-93.81	29.47	-64.34	-13.00	-51.34	Vertical
			GSM_ Hig	hest Channe	ı		
_ (1)	1697.600	-90.81	23.50	-67.31	-13.00	-54.31	Horizontal
2	2546.400	-92.33	29.47	-62.86	-13.00	-49.86	Horizontal
_® 3	1697.600	-91.44	23.72	-67.72	-13.00	-54.72	Vertical
4	2546.400	-93.05	29.47	-63.58	-13.00	-50.58	Vertical

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





			PC	S 1900			
	Frequency	SA	Correction	EIRP	Limit	Margin	
No.		Reading	factor	Result			Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
			GSM_ Lov	west Channe			•
1 ®	3700.400	-88.20	32.11	-56.09	-13.00	-43.09	Horizontal
2	5550.600	-87.70	33.21	-54.49	-13.00	-41.49	Horizontal
3	3700.400	-89.42	32.09	-57.33	-13.00	-44.33	Vertical
4	5550.600	-87.26	34.03	-53.23	-13.00	-40.23	Vertical
			GSM_ Mid	ddle Channel			
1	3760.000	-83.65	32.11	-51.54	-13.00	-38.54	Horizontal
2	5640.000	-86.68	33.21	-53.47	-13.00	-40.47	Horizontal
3	3760.000	-91.20	32.09	-59.11	-13.00	-46.11	Vertical
4	5640.000	-87.27	34.03	-53.24	-13.00	-40.24	Vertical
			GSM_ Hig	hest Channe			
1	3819.600	-88.21	32.11	-56.10	-13.00	-43.1	Horizontal
2	5729.400	-87.72	33.21	-54.51	-13.00	-41.51	Horizontal
3	3819.600	3819.600 -89.94	32.09	-57.85	-13.00	-44.85	Vertical
4	5729.400	-88.24	34.03	-54.21	-13.00	-41.21	Vertical


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written application of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



Page 63 of 80

			WCDI	/IA Band II			
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	_
			RMC 12.2kbps	_ Lowest Ch	annel		
1 ®	3704.800	3704.80	-83.13	31.09	-52.04	-13.00	Horizontal
2	5557.200	557.200 5557.20 -89.70 34.14 -5				-13.00	Horizontal
3	3704.800	3704.80	-81.20	33.13	-48.07	-13.00	Vertical
4	5557.200	5557.20	-86.09	32.66	-53.43	-13.00	Vertical
			RMC 12.2kbps	s_ Middle Cha	annel		
1	3760.000	3760.00	-79.77	31.09	-48.68	-13.00	Horizontal
2	5640.000	5640.00	-88.50	34.14	-54.36	-13.00	Horizontal
3	3760.000	3760.00	-80.08	33.13	-46.95	-13.00	Vertical
4	5640.000	5640.00	-84.73	32.66	-52.07	-13.00	Vertical
			RMC 12.2kbps	_ Highest Ch	annel		
1	3815.200	3815.20	-83.14	31.09	-52.05	-13.00	Horizontal
2	5722.800	5722.80	-86.02	34.14	-51.88	-13.00	Horizontal
3	3815.200	3815.20	-82.58	33.13	-49.45	-13.00	Vertical
4	5722.800	5722.80	-83.74	32.66	-51.08	-13.00	Vertical

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pesture Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com. g/Inspection he test results ne test report.





			WCDM	A Band IV			
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
			RMC 12.2kbps	_ Lowest Cha	annel		·
1 🌑	3700.40	-90.39	32.11	-58.28	-13.00	-45.28	Horizontal
2	5550.60	-88.08	33.21	-54.87	-13.00	-41.87	Horizontal
3	3700.40	-90.69	32.09	-58.60	-13.00	-45.6	Vertical
4	5550.60	-87.64	34.03	-53.61	-13.00	-40.61	Vertical
			RMC 12.2kbps	_ Middle Cha	annel		
1	3760.00	-89.03	32.11	-56.92	-13.00	-43.92	Horizontal
2	5640.00	-86.93	33.21	-53.72	-13.00	-40.72	Horizontal
3	3760.00	-90.35	32.09	-58.26	-13.00	-45.26	Vertical
4	5640.00	-87.26	34.03	-53.23	-13.00	-40.23	Vertical
			RMC 12.2kbps	_ Highest Ch	annel		
1	3819.60	-89.79	32.11	-57.68	-13.00	-44.68	Horizontal
2	5729.40	-86.71	33.21	-53.50	-13.00	-40.5	Horizontal
3	3819.60		32.09	-57.44	-13.00	-44.44	Vertical
4	5729.40	-86.05	34.03	-52.02	-13.00	-39.02	Vertical

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written application of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



Report No.:

AGC00400	o∠ 100	UIF	.En	2
	Page	65	٥f	മറ

/Inspection he test results

			WCDI	MA Band V										
	Frequency	SA	Correction	EIRP	Limit	Margin								
No.	Trequency	Reading	factor	Result	Lillit	Wargin	Ant. Pol.							
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)								
	RMC 12.2kbps_ Lowest Channel													
1	1652.800	-83.27	23.12	-60.15	-13	-47.15	Horizontal							
2	2479.200	-86.28	28.47	-57.81	-13	-44.81	Horizontal							
3	1652.800	-83.31	23.12	-60.19	-13	-47.19	Vertical							
4	2479.200	-83.65	28.47	-55.18	-13	-42.18	Vertical							
			RMC 12.2kbp	s_ Middle Cha	annel									
1	1672.800	-81.73	23.12	-58.61	-13	-45.61	Horizontal							
2	2509.200	-83.2	28.47	-54.73	-13	-41.73	Horizontal							
3	1672.800	-83.4	23.12	-60.28	-13	-47.28	Vertical							
4	2509.200	-82.14	28.47	-53.67	-13	-40.67	Vertical							
			RMC 12.2kbps	Highest Ch	annel									
1	1693.200	-80.55	23.12	-57.43	-13	-44.43	Horizontal							
2	2539.800	-81.73	28.47	-53.26	-13	-40.26	Horizontal							
3	1693.200	-81.11	23.12	-57.99	-13	-44.99	Vertical							
9 4	2539.800	-81.13	28.47	-52.66	-13	-39.66	Vertical							

Note:

- 1.Correct Factor = Antenna Factor + Cable Loss Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
- 2.Result = Reading + Correct Factor.
- 3.Margin = Result Limit
- 4.he device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test. Subsequently, only the worst case emissions are reported.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 66 of 80

14. FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

14.1 PROVISIONS APPLICABLE

14.1.1 For Hand carried battery powered equipment

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

14.1.2 For equipment powered by primary supply voltage


- 1 The carrier frequency of the transmitter is measured at room temperature (20°C to provide a
- 2 reference).
- 3 The equipment is turned on in a "standby" condition for fifteen minutes before applying power to
- 4 the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 5 Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at
- 6 least one half-hour is provided to allow stabilization of the equipment at each temperature level.

14.2 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

- 7 Measure the carrier frequency at room temperature.
- 8 Subject the EUT to overnight soak at -30°C. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on channel 20175 for LTE band 4 measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 9 Repeat the above measurements at 10° C increments from -30° C to $+50^{\circ}$ C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 10 Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Festiva/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.






minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.

- 11 Subject the EUT to overnight soak at +50°C.
- 12 With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 13 Repeat the above measurements at 10°C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 14 At all temperature levels hold the temperature to +/- 0.5℃ during the measurement procedure.

14.3 MEASUREMENT SETUP

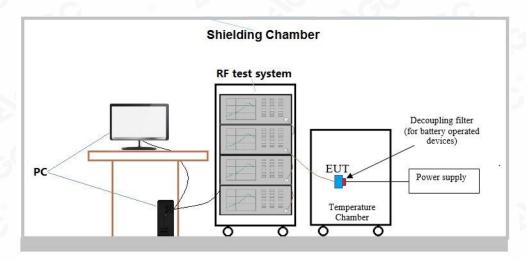

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Residual Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE, he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC00408210801FE02 Page 68 of 80

13.4 MEASUREMENT RESULT

Frequency Error vs. Voltage:

rioquonoy		i voitago.								
Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict		
Band	Mode	Channel	Temp.	Volt.(V)	(Hz)	(ppm)	(ppm)	verdict		
- GO			TN	VL	4.33	0.005254	±2.5	PASS		
		LCH	TN	VN	4.97	0.006030	±2.5	PASS		
			TN	VH	1.55	0.001881	±2.5	PASS		
		· ·	TN	VL	2.20	0.002630	±2.5	PASS		
GSM850	GSM	MCH	TN	VN	-0.26	-0.000311	±2.5	PASS		
					TN	VH	2.58	0.003084	±2.5	PASS
		®	TN	VL	7.23	0.008518	±2.5	PASS		
	- (HCH	TN	VN	8.85	0.010426	±2.5	PASS		
8			TN	VH	5.81	0.006845	±2.5	PASS		
(8)			TN	VH	5.81	0.006845	±2.5	PAS		

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	No. P. C
Band	Mode	Channel	Temp.	Volt.(V)	(Hz)	(ppm)	(ppm)	Verdict
a.C	8	0	TN	VL	9.98	0.012109	±2.5	PASS
	90	LCH	TN	VN	10.30	0.012497	±2.5	PASS
·			TN	VH	13.59	0.016489	±2.5	PASS
C ,	8	®	TN	VL	13.75	0.016436	±2.5	PASS
GSM850	EDGE	MCH	TN	VN	14.37	0.017177	±2.5	PASS
			TN	VH	14.88	0.017786	±2.5	PASS
	(6)		TN	VL	13.82	0.016282	±2.5	PASS
	a.C	HCH	TN	VN	12.85	0.015139	±2.5	PASS
			TN	VH	15.34	0.018073	±2.5	PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC00408210801FE02 Page 69 of 80

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Verdict
Band	Mode	Channel	Temp.	Volt. (V)	(Hz)	(ppm)	
8			TN	VL	-0.65	-0.000351	PASS
	(8)	LCH	TN	VN	-0.65	-0.000351	PASS
	GU	-C	TN	VH	1.94	0.001049	PASS
			TN	VL	1.49	0.000793	PASS
PCS1900	GSM	MCH	TN	VN	-0.32	-0.000170	PASS
		a.C	TN	VH	0.71	0.000378	PASS
			TN	VL	0.19	0.000099	PASS
		HCH	TN	VN	-0.45	-0.000236	PASS
		0	TN	VH	-0.84	-0.000440	PASS

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Verdict
Band	Mode	Channel	Temp.	Volt. (V)	(Hz)	(ppm)	
(8)			TN	VL	10.49	0.005670	PASS
a.C	8	LCH	TN	VN	9.30	0.005026	PASS
	30	_6	TN	VH	8.94	0.004832	PASS
©			TN	VL	4.88	0.002596	PASS
PCS1900	EDGE	MCH	TN	VN	7.17	0.003814	PASS
		C	□ TN	VH	2.84	0.001511	PASS
			TN	VL	6.72	0.003519	PASS
	0	HCH	TN	VN	7.65	0.004006	PASS
	-C	8	TN	VH	8.62	0.004514	PASS

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restrou/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.




Report No.: AGC00408210801FE02 Page 70 of 80

Frequency Error vs. Temperature:

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Volt.	Temp	(Hz)	(ppm)	(ppm	
		1)	
a.C	(3)		VN	-30	-0.26	-0.000315	±2.5	PASS
	GU	C	VN	-20	3.16	0.003834	±2.5	PASS
			VN	-10	2.84	0.003446	±2.5	PASS
	®	8	VN	0	0.00	0.000000	±2.5	PASS
GSM850	GSM	LCH	VN	10	0.06	0.000073	±2.5	PASS
			VN	20	3.29	0.003992	±2.5	PASS
		®	VN	30	2.20	0.002669	±2.5	PASS
	. 0	C	VN	40	4.84	0.005872	±2.5	PASS
			VN	50	2.39	0.002900	±2.5	PASS
-G	8		VN	-30	5.94	0.007100	±2.5	PASS
	GO		VN	-20	5.62	0.006718	±2.5	PASS
			VN	-10	3.23	0.003861	±2.5	PASS
	<u>®</u>		VN	0	0.97	0.001159	±2.5	PASS
GSM850	GSM	MCH	VN	10	6.78	0.008104	±2.5	PASS
		O .	VN	20	5.10	0.006096	±2.5	PASS
		©	VN	30	4.00	0.004781	±2.5	PASS
		C	VN	40	3.23	0.003861	±2.5	PASS
			VN	50	2.00	0.002391	±2.5	PASS
8	8		VN	-30	5.42	0.006385	±2.5	PASS
	A.C		VN	-20	4.33	0.005101	±2.5	PASS
		10°	VN	-10	8.39	0.009885	±2.5	PASS
	8		VN	0	8.72	0.010273	±2.5	PASS
GSM850	GSM	HCH	VN	10	0.32	0.000377	±2.5	PASS
		G	VN	20	8.14	0.009590	±2.5	PASS
			VN	30	5.17	0.006091	±2.5	PASS
	1	8	VN	40	6.52	0.007681	±2.5	PASS
	~ 6		VN	50	4.97	0.005855	±2.5	PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





	8			_ (1		®		
Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Volt.	Temp	(Hz)	(ppm)	(ppm	
		Ι		•)	
C ₁ C	0		VN	-30	13.56	0.016452	±2.5	PASS
	G	a.C	VN	-20	15.88	0.019267	±2.5	PASS
8			VN	-10	13.66	0.016574	±2.5	PASS
,C	0	8	VN	0	11.53	0.013989	±2.5	PASS
GSM850	EDGE	LCH	VN	10	13.04	0.015821	±2.5	PASS
			VN	20	10.69	0.012970	±2.5	PASS
1 - 6		®	VN	30	12.46	0.015118	±2.5	PASS
	. 6	C	VN	40	12.53	0.015203	±2.5	PASS
		5.0	VN	50	10.36	0.012570	±2.5	PASS
a.C	8		VN	-30	11.17	0.013352	±2.5	PASS
	GO		VN	-20	12.59	0.015049	±2.5	PASS
(a)			VN	-10	12.43	0.014858	±2.5	PASS
C	©		VN	0	14.59	0.017440	±2.5	PASS
GSM850	EDGE	MCH	VN ®	10	13.43	0.016053	±2.5	PASS
		0	VN	20	13.14	0.015706	±2.5	PASS
		8	VN	30	11.07	0.013232	±2.5	PASS
10°		C	VN	40	13.53	0.016173	±2.5	PASS
		×0	VN	50	10.69	0.012778	±2.5	PASS
8	8		VN	-30	14.01	0.016506	±2.5	PASS
G	-C		VN	-20	12.37	0.014574	±2.5	PASS
		~GC	VN	-10	11.24	0.013242	±2.5	PASS
8	8		VN	0	11.33	0.013348	±2.5	PASS
GSM850	EDGE	HCH	VN	10	10.85	0.012783	±2.5	PASS
		G	VN	20	13.98	0.016470	±2.5	PASS
			VN	30	13.11	0.015445	±2.5	PASS
C C		8	VN	40	16.30	0.019204	±2.5	PASS
	~ C	O	VN	50	11.20	0.013195	±2.5	PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC00408210801FE02 Page 72 of 80

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe I	Volt.	Temp	(Hz)	(ppm)	(ppm	
8			VN	-30	1.36	0.000735	±2.5	PASS
c.C			VN	-20	0.39	0.000211	±2.5	PASS
		-C	VN	-10	-0.06	-0.000032	±2.5	PASS
CCM400			VN	0	0.26	0.000141	±2.5	PASS
GSM190	GSM	LCH	VN	10	0.77	0.000416	±2.5	PASS
0		c.C	VN	20	-1.03	-0.000557	±2.5	PASS
			VN	30	2.20	0.001189	±2.5	PASS
-0		®	VN	40	1.29	0.000697	±2.5	PASS
		C	VN	50	1.16	0.000627	±2.5	PASS
(8)			VN	-30	1.49	0.000793	±2.5	PASS
-C			VN	-20	0.06	0.000032	±2.5	PASS
			VN	-10	0.97	0.000516	±2.5	PASS
CCM400			VN	0	3.23	0.001718	±2.5	PASS
GSM190	GSM	MCH	VN	10	-0.52	-0.000277	±2.5	PASS
0			VN	20	-0.26	-0.000138	±2.5	PASS
			VN	30	2.58	0.001372	±2.5	PASS
		· ·	VN	40	3.55	0.001888	±2.5	PASS
100		C	VN	50	0.58	0.000309	±2.5	PASS
		~ (0	VN	-30	2.58	0.001351	±2.5	PASS
			VN	-20	0.13	0.000068	±2.5	PASS
G			VN	-10	0.06	0.000031	±2.5	PASS
CSM100		6	VN	0	1.42	0.000744	±2.5	PASS
GSM190 0	GSM	HCH	VN	10	1.03	0.000539	±2.5	PASS
U		8	VN	20	-1.16	-0.000607	±2.5	PASS
	G	VN	30	0.58	0.000304	±2.5	PASS	
			VN	40	2.13	0.001115	±2.5	PASS
CC		8	VN	50	1.94	0.001016	±2.5	PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC00408210801FE02 Page 73 of 80

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Volt.	Temp	(Hz)	(ppm)	(ppm	
		I)	
8			VN	-30	10.65	0.005756	±2.5	PASS
GO I	8		VN	-20	9.23	0.004989	±2.5	PASS
		-C	VN	-10	10.85	0.005864	±2.5	PASS
GSM190			VN	0	10.65	0.005756	±2.5	PASS
0	EDGE	LCH	VN	10	8.04	0.004345	±2.5	PASS
		C.C	VN	20	10.59	0.005724	±2.5	PASS
			VN	30	9.23	0.004989	±2.5	PASS
		8	VN	40	9.49	0.005129	±2.5	PASS
	- 01	G	VN	50	8.43	0.004556	±2.5	PASS
0			VN	-30	7.85	0.004176	±2.5	PASS
a.C	8		VN	-20	8.04	0.004277	±2.5	PASS
	GO	- 6	VN	-10	7.68	0.004085	±2.5	PASS
CCM400			VN	0	9.40	0.005000	±2.5	PASS
GSM190	EDGE	MCH	VN	10	8.43	0.004484	±2.5	PASS
0		-C	VN	20	6.49	0.003452	±2.5	PASS
		O .	VN	30	10.88	0.005787	±2.5	PASS
		®	VN	40	7.97	0.004239	±2.5	PASS
6		C	VN	50	8.36	0.004447	±2.5	PASS
		× C	VN	-30	4.49	0.002351	±2.5	PASS
8	8		VN	-20	8.10	0.004241	±2.5	PASS
G	-C		VN	-10	5.07	0.002655	±2.5	PASS
0014400		10°	VN	0	8.81	0.004613	±2.5	PASS
GSM190	EDGE	НСН	VN	10	4.88	0.002555	±2.5	PASS
0	C	8	VN	20	6.52	0.003414	±2.5	PASS
	30	G	VN	30	8.10	0.004241	±2.5	PASS
			VN	40	3.10	0.001623	±2.5	PASS
	1	@	VN	50	3.65	0.001911	±2.5	PASS

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restrou/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 74 of 80

Frequency Error vs. Voltage:

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	\
Band	Mode	Channel	Temp.	Volt.(V)	(Hz)	(ppm)	(ppm)	Verdict
®		100	TN	VL	0.93	0.001125	±2.5	PASS
- CO	8	LCH	TN	VN	-0.96	-0.001162	±2.5	PASS
	G	a.C	TN	VH	0.66	0.000799	±2.5	PASS
0			TN	VL	1.05	0.001255	±2.5	PASS
WCDMA850	UMTS	MCH	TN	VN	1.97	0.002355	±2.5	PASS
		c.C	TN	VH	5.40	0.006456	±2.5	PASS
0			TN	VL	3.80	0.004489	±2.5	PASS
9 .6		HCH	TN	VN	1.45	0.001713	±2.5	PASS
		0	TN	VH	1.24	0.001465	±2.5	PASS

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Vardiet
Band	Mode	Channel	Temp.	Volt.(V)	(Hz)	(ppm)	Verdict
8		0	TN	VL	-0.27	-0.000158	PASS
C	8	LCH	TN	VN	-0.06	-0.000035	PASS
0	1	C	TN	VH	2.43	0.001419	PASS
· ·	N.C		TN	VL	-7.11	-0.004104	PASS
WCDMA1700	UMTS	MCH	TN	VN	-7.46	-0.004306	PASS
-GO	C		TN	VH	-6.84	-0.003948	PASS
		~G ^O	TN	VL	-7.32	-0.004177	PASS
8	©	HCH	TN	VN	-7.00	-0.003994	PASS
GO	C	0	TN	VH	-4.07	-0.002322	PASS

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written, he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15d 🖟 Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC00408210801FE02 Page 75 of 80

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Verdict
Band	Mode	Channel	Temp.	Volt.(V)	(Hz)	(ppm)	verdict
	GU	C	TN	○ VL	0.17	0.000092	PASS
®		LCH	TN	VN	0.05	0.000027	PASS
- C3C	8	8	TN	VH	-1.37	-0.000740	PASS
	3	z.C	TN	VL	-3.20	-0.001702	PASS
WCDMA1900	UMTS	MCH	TN	VN	-2.44	-0.001298	PASS
GC C	0	©	TN	VH	2.46	0.001309	PASS
		G	TN	VL	-3.78	-0.001982	PASS
8		HCH	TN	VN	-1.65	-0.000865	PASS
	@		TN	VH	-2.09	-0.001096	PASS

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC00408210801FE02 Page 76 of 80

Frequency Error vs. Temperature:

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Volt.	Temp	(Hz)	(ppm)		verdict
Danu	Wiode	I	voit.	Temp	(112)	(ррііі)	(ppm	
	©		VN	-30	-4.88	-0.005905	±2.5	PASS
	a.C)				(8)	
		10°	VN	-20	1.07	0.001295	±2.5	PASS
	· (©		VN	-10	-1.95	-0.002360	±2.5	PASS
WCDMA	LINATO	1.011	VN	0	-0.75	-0.000908	±2.5	PASS
850	UMTS	LCH	VN	10	3.36	0.004066	±2.5	PASS
			VN	20	-0.47	-0.000569	±2.5	PASS
	1	©	VN	30	-0.64	-0.000774	±2.5	PASS
	< C	9	VN	40	1.97	0.002384	±2.5	PASS
			VN	50	1.31	0.001585	±2.5	PASS
	8		VN	-30	4.38	0.005300	±2.5	PASS
	GU	0	VN	-20	3.23	0.003909	±2.5	PASS
			VN	-10	1.63	0.001949	±2.5	PASS
WCDMA	©	МСН	VN	0	2.64	0.003156	±2.5	PASS
850	UMTS		VN	10	4.46	0.005332	±2.5	PASS
030			VN	20	4.85	0.005799	±2.5	PASS
		©	VN	30	4.07	0.004866	±2.5	PASS
		C	VN	40	1.79	0.002140	±2.5	PASS
		~ (VN	50	2.12	0.002535	±2.5	PASS
(8)	(8)		VN	-30	1.88	0.002248	±2.5	PASS
	-C		VN	-20	4.06	0.004796	±2.5	PASS
		< G ^C	VN	-10	1.80	0.002126	±2.5	PASS
MODILL	8		VN	0	-0.79	-0.000933	±2.5	PASS
WCDMA	UMTS	НСН	VN	10	1.82	0.002150	±2.5	PASS
850 OW13		GU	VN	20	5.43	0.006414	±2.5	PASS
			VN	30	0.56	0.000661	±2.5	PASS
	1	8	VN	40	3.30	0.003898	±2.5	PASS
		C	VN	50	-1.01	-0.001193	±2.5	PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC00408210801FE02 Page 77 of 80

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe I	Volt.	Temp	(Hz)	(ppm)	(ppm	
			VN	-30	0.09	0.000053	±2.5	PASS
	(8)		VN	-20	2.53	0.001477	±2.5	PASS
	G	_c C	VN	-10	2.70	0.001577	±2.5	PASS
MCDMA			VN	0	0.41	0.000239	±2.5	PASS
WCDMA	UMTS	LCH	VN	10	1.56	0.000911	±2.5	PASS
1700		a.C	VN	20	-1.17	-0.000683	±2.5	PASS
			VN	30	2.53	0.001477	±2.5	PASS
		®	VN	40	1.95	0.001139	±2.5	PASS
	. (4	C	VN	50	0.27	0.000158	±2.5	PASS
(a)			VN	-30	-6.07	-0.003504	±2.5	PASS
	0		VN	-20	-6.56	-0.003786	±2.5	PASS
	GO	- 6	VN	-10	-6.74	-0.003890	±2.5	PASS
MODMA			VN	0	-10.15	-0.005859	±2.5	PASS
WCDMA	UMTS	MCH	VN	10	-4.26	-0.002459	±2.5	PASS
1700		-C	VN	20	-7.32	-0.004225	±2.5	PASS
		0	VN	30	-4.07	-0.002349	±2.5	PASS
		(0)	VN	40	-5.62	-0.003244	±2.5	PASS
		C	VN	50	-8.09	-0.004670	±2.5	PASS
			VN	-30	-5.31	-0.003030	±2.5	PASS
	8		VN	-20	-6.07	-0.003464	±2.5	PASS
	-C		VN	-10	-6.00	-0.003424	±2.5	PASS
14/OD144		10°	VN	0	-6.91	-0.003943	±2.5	PASS
WCDMA UI	UMTS	HCH	VN	10	-6.32	-0.003606	±2.5	PASS
1700	C	8	VN	20	-6.93	-0.003954	±2.5	PASS
		GU	VN	30	-4.78	-0.002728	±2.5	PASS
			VN	40	-5.23	-0.002984	±2.5	PASS
	20	8	VN	50	-8.33	-0.004753	±2.5	PASS

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restrou/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Report No.: AGC00408210801FE02 Page 78 of 80

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Volt.	Temp	(Hz)	(ppm)	(ppm	
		1)	
WCDMA 1900	UMTS	LCH	VN	-30	0.96	0.000518	±2.5	PASS
			VN	-20	5.05	0.002726	±2.5	PASS
			VN	-10	1.01	0.000545	±2.5	PASS
			VN	0	3.42	0.001846	±2.5	PASS
			VN	10	1.04	0.000561	±2.5	PASS
			VN	20	-2.88	-0.001555	±2.5	PASS
			VN	30	3.49	0.001884	±2.5	PASS
			VN	40	1.45	0.000783	±2.5	PASS
			VN	50	5.66	0.003055	±2.5	PASS
WCDMA 1900	UMTS	МСН	VN	-30	-1.13	-0.000610	±2.5	PASS
			VN	-20	0.64	0.000345	±2.5	PASS
			VN	-10	1.01	0.000537	±2.5	PASS
			VN	0	0.14	0.000074	±2.5	PASS
			VN	10	1.71	0.000910	±2.5	PASS
			VN	20	1.69	0.000899	±2.5	PASS
			VN	30	-0.09	-0.000048	±2.5	PASS
			VN	40	-0.46	-0.000245	±2.5	PASS
			VN	50	-4.71	-0.002505	±2.5	PASS
WCDMA 1900	UMTS	НСН	VN	-30	-5.81	-0.003090	±2.5	PASS
			VN	-20	-5.63	-0.002995	±2.5	PASS
			VN	-10	-1.39	-0.000729	±2.5	PASS
			VN	0	-5.11	-0.002679	±2.5	PASS
			VN	10	-0.98	-0.000514	±2.5	PASS
			VN	20	-1.92	-0.001007	±2.5	PASS
		G _C	VN	30	-6.45	-0.003381	±2.5	PASS
		· ·	VN	40	-0.96	-0.000503	±2.5	PASS
			VN	50	-0.17	-0.000089	±2.5	PASS
			•					

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restrou/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.