


802.11ax-HE80 26dB Bandwidth & 99% Bandwidth

Channel 42 (5210MHz)




Channel 58 (5290MHz)

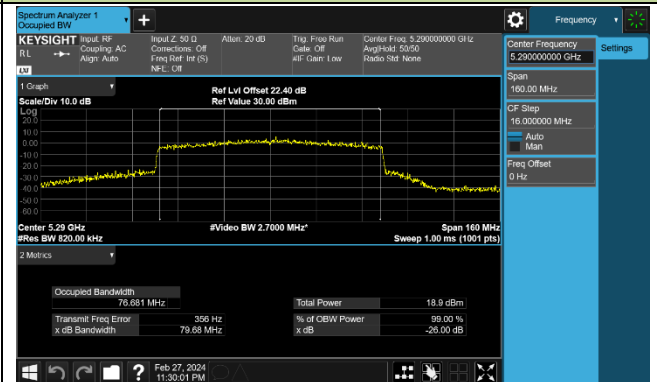


Channel 106 (5530MHz)




Channel 122 (5610MHz)

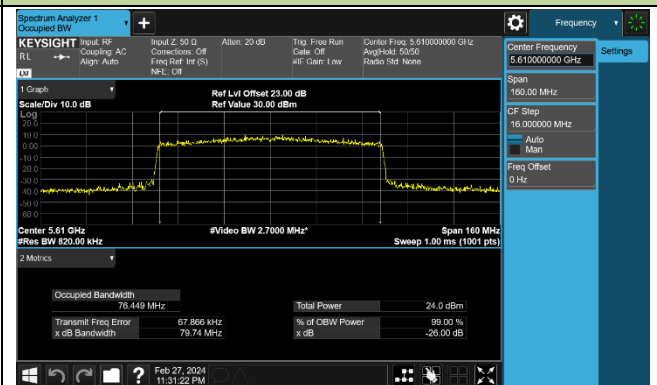

Channel 138 (5690MHz)

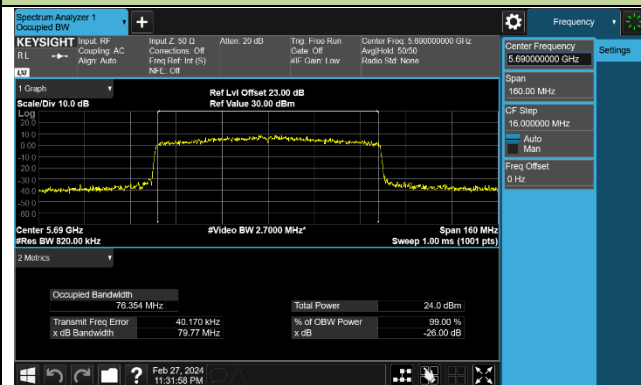


Channel 155 (5775MHz)

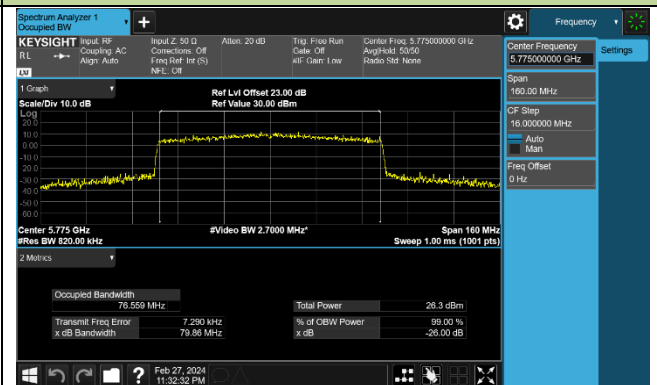


802.11ax-HE160 26dB Bandwidth & 99% Bandwidth

Channel 50 (5250MHz)

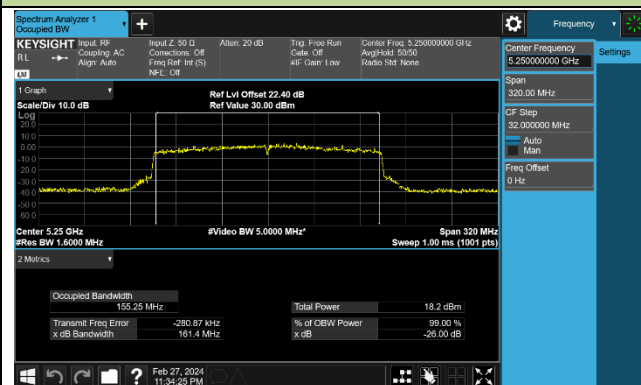

Channel 114 (5570MHz)

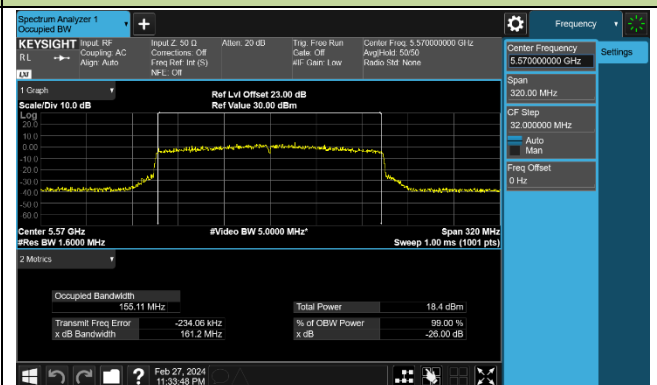

7.3. 6dB Bandwidth Measurement

7.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.3.2. Test Procedure used

KDB 789033 D02v02r01- Section II) C.2

7.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW $3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3.4. Test Setup

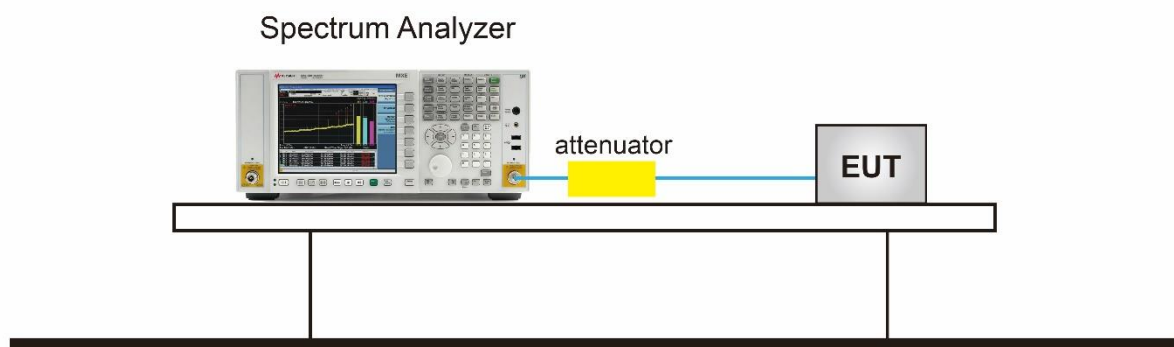

7.3.5.TestResult

Product	AX3000 Ceiling Mount Wi-Fi 6 Access Point	Test Engineer	Xuan Yu
Test Site	SR6	Test Date	2024/2/27


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Ant 1						
802.11a	6Mbps	149	5745	15.050	≥ 0.5	Pass
802.11a	6Mbps	157	5785	15.280	≥ 0.5	Pass
802.11a	6Mbps	165	5825	14.450	≥ 0.5	Pass
802.11ac-VHT20	MCS0	149	5745	17.230	≥ 0.5	Pass
802.11ac-VHT20	MCS0	157	5785	17.560	≥ 0.5	Pass
802.11ac-VHT20	MCS0	165	5825	17.540	≥ 0.5	Pass
802.11ac-VHT40	MCS0	151	5755	31.410	≥ 0.5	Pass
802.11ac-VHT40	MCS0	159	5795	30.110	≥ 0.5	Pass
802.11ac-VHT80	MCS0	155	5775	73.820	≥ 0.5	Pass
802.11ax-HE20	MCS0	149	5745	16.980	≥ 0.5	Pass
802.11ax-HE20	MCS0	157	5785	15.160	≥ 0.5	Pass
802.11ax-HE20	MCS0	165	5825	15.240	≥ 0.5	Pass
802.11ax-HE40	MCS0	151	5755	31.320	≥ 0.5	Pass
802.11ax-HE40	MCS0	159	5795	32.520	≥ 0.5	Pass
802.11ax-HE80	MCS0	155	5775	75.580	≥ 0.5	Pass

802.11a 6dB Bandwidth


Channel 149 (5745MHz)



Channel 157 (5785MHz)

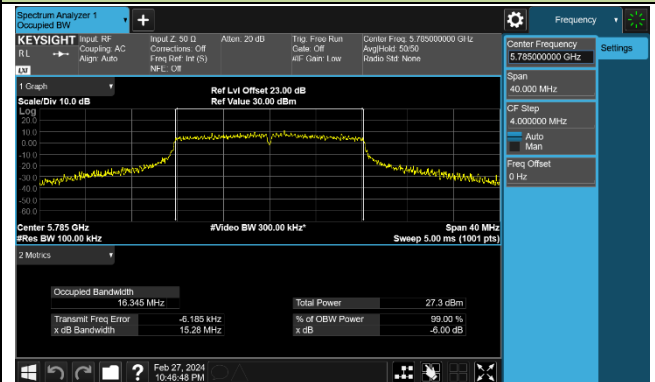

Channel 165 (5825MHz)

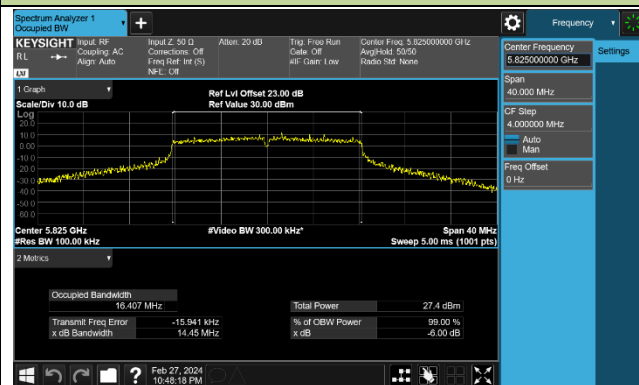


802.11ac-VHT20 6dB Bandwidth


Channel 149 (5745MHz)



Channel 157 (5785MHz)

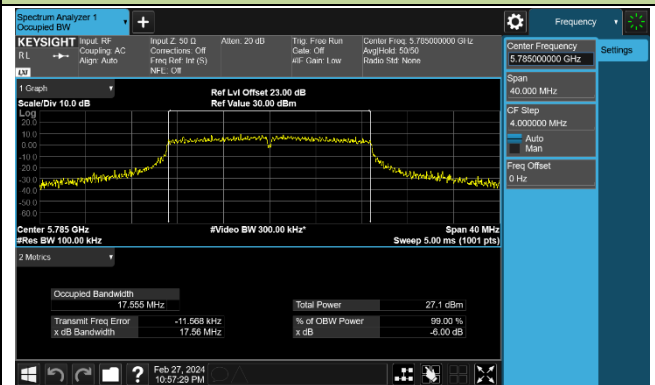


Channel 165 (5825MHz)

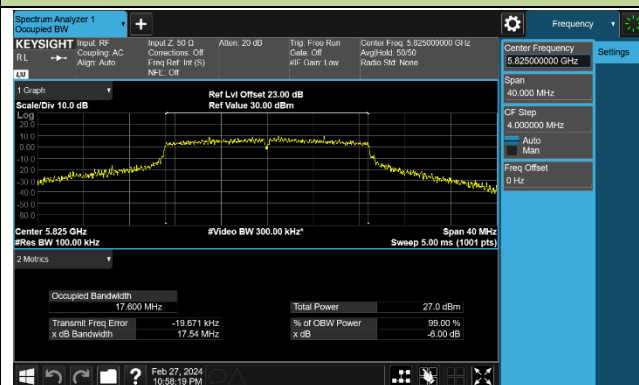


802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

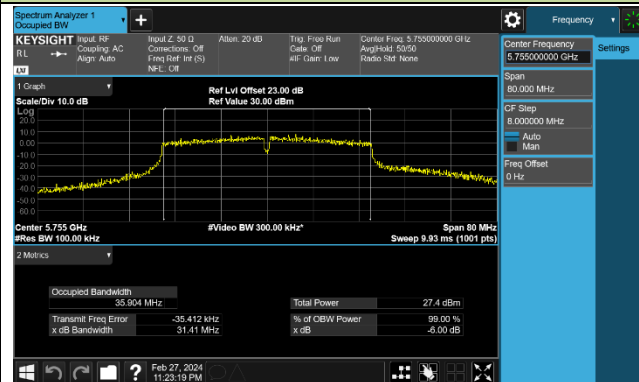


Channel 159 (5795MHz)

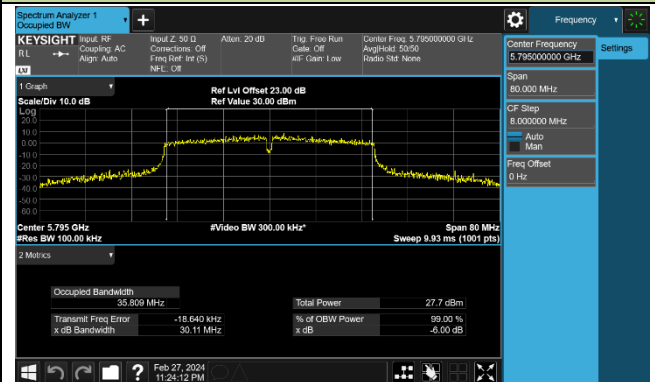


802.11ac-VHT80 6dB Bandwidth

Channel 155 (5775MHz)

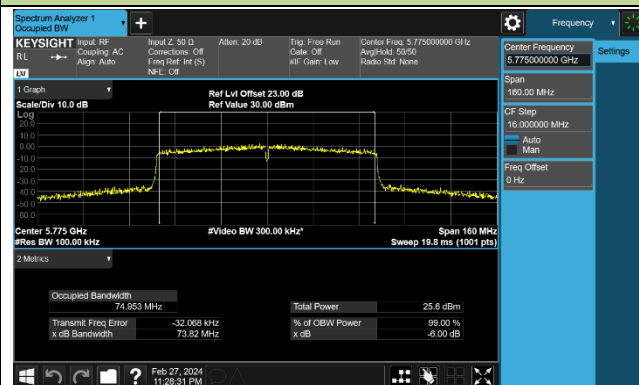


802.11ax-HE20 6dB Bandwidth


Channel 149 (5745MHz)

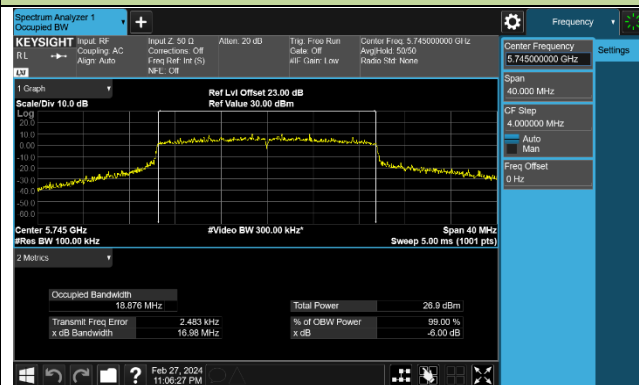

Channel 157 (5785MHz)

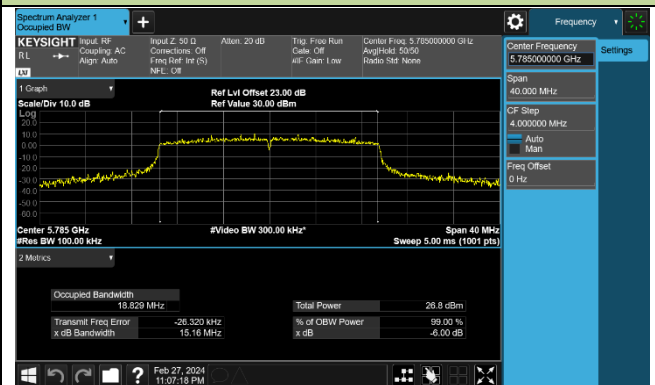


Channel 165 (5825MHz)

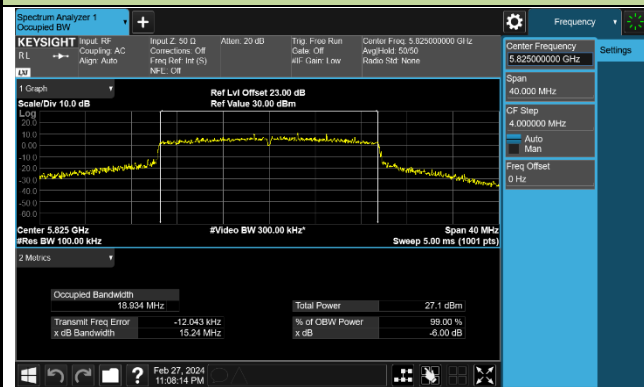


802.11ax-HE40 6dB Bandwidth

Channel 151 (5755MHz)

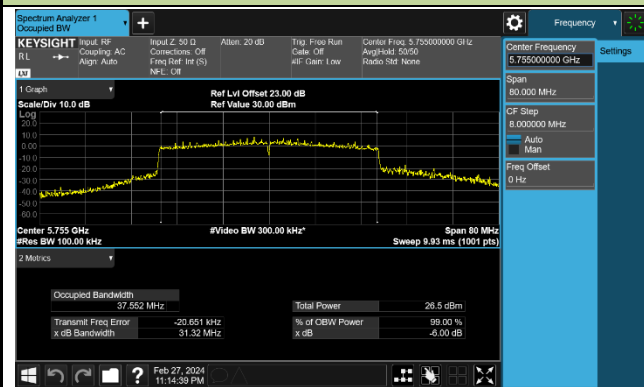


Channel 159 (5795MHz)

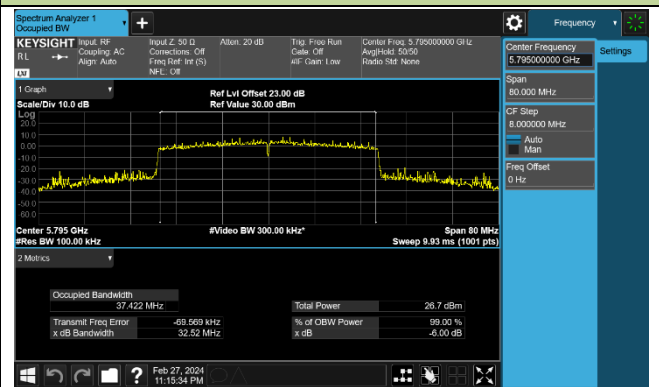

802.11ax-HE80 6dB Bandwidth

Channel 155 (5775MHz)

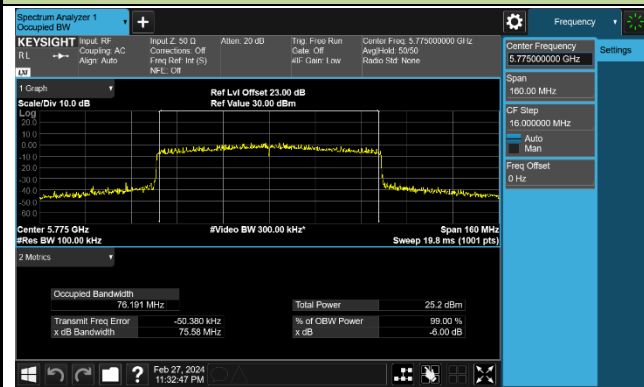

7.4. Output Power Measurement

7.4.1. Test Limit

For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm).

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


7.4.2. Test Procedure Used

KDB 789033D02v02r01- Section II)E)3)b) Method PM-G

7.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

7.4.4. Test Setup

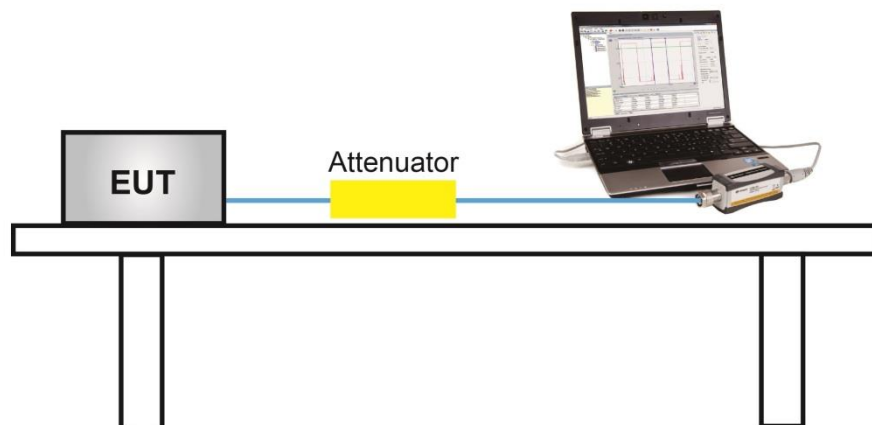

7.4.5. Test Result

Product	AX3000 Ceiling Mount Wi-Fi 6 Access Point	Test Engineer	Xuan Yu
Test Site	SR6	Test Date	2024/2/27
Test Mode	CDD Mode		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Total Average Power (dBm)	Power Limit (dBm)	Result
11a	6Mbps	36	5180	21.39	21.93	22.22	26.63	≤ 30.00	Pass
11a	6Mbps	44	5220	22.33	22.48	22.73	27.29	≤ 30.00	Pass
11a	6Mbps	48	5240	22.28	22.31	22.38	27.09	≤ 30.00	Pass
11a	6Mbps	52	5260	16.21	16.67	16.84	21.35	≤ 23.98	Pass
11a	6Mbps	60	5300	16.07	15.89	16.19	20.82	≤ 23.98	Pass
11a	6Mbps	64	5320	16.27	16.52	16.28	21.13	≤ 23.98	Pass
11a	6Mbps	100	5500	17.49	17.03	16.89	21.92	≤ 23.98	Pass
11a	6Mbps	116	5580	16.05	16.91	16.74	21.35	≤ 23.98	Pass
11a	6Mbps	140	5700	16.58	16.67	16.45	21.34	≤ 23.98	Pass
11a	6Mbps	144	5720	16.37	17.37	17.05	21.72	≤ 22.71	Pass
11a	6Mbps	149	5745	22.58	22.48	22.33	27.24	≤ 30.00	Pass
11a	6Mbps	157	5785	22.75	22.77	22.53	27.46	≤ 30.00	Pass
11a	6Mbps	165	5825	23.01	22.40	22.55	27.43	≤ 30.00	Pass
11ac-VHT20	MCS0	36	5180	22.57	22.58	22.68	27.38	≤ 30.00	Pass
11ac-VHT20	MCS0	40	5220	22.72	22.77	22.79	27.53	≤ 30.00	Pass
11ac-VHT20	MCS0	48	5240	23.20	22.84	23.21	27.86	≤ 30.00	Pass
11ac-VHT20	MCS0	52	5260	17.73	17.70	17.81	22.52	≤ 23.98	Pass
11ac-VHT20	MCS0	60	5300	17.41	17.48	17.34	22.18	≤ 23.98	Pass
11ac-VHT20	MCS0	64	5320	17.11	17.01	16.82	21.75	≤ 23.98	Pass
11ac-VHT20	MCS0	100	5500	17.84	17.61	17.75	22.51	≤ 23.98	Pass
11ac-VHT20	MCS0	116	5580	16.52	17.37	17.22	21.82	≤ 23.98	Pass
11ac-VHT20	MCS0	140	5700	16.93	17.47	17.32	22.02	≤ 23.98	Pass
11ac-VHT20	MCS0	144	5720	16.67	17.66	17.65	22.12	≤ 22.91	Pass
11ac-VHT20	MCS0	149	5745	22.15	22.24	22.09	26.93	≤ 30.00	Pass
11ac-VHT20	MCS0	157	5785	22.55	22.60	22.12	27.20	≤ 30.00	Pass
11ac-VHT20	MCS0	165	5825	22.65	22.04	22.21	27.08	≤ 30.00	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Total Average Power (dBm)	Power Limit (dBm)	Result
11ac-VHT40	MCS0	38	5190	19.56	19.74	19.76	24.46	≤ 30.00	Pass
11ac-VHT40	MCS0	46	5230	22.56	22.44	22.11	27.15	≤ 30.00	Pass
11ac-VHT40	MCS0	54	5270	19.09	19.13	18.79	23.78	≤ 23.98	Pass
11ac-VHT40	MCS0	62	5310	18.90	18.89	18.73	23.61	≤ 23.98	Pass
11ac-VHT40	MCS0	102	5510	19.11	18.80	19.03	23.75	≤ 23.98	Pass
11ac-VHT40	MCS0	110	5550	19.03	18.40	18.54	23.44	≤ 23.98	Pass
11ac-VHT40	MCS0	134	5670	18.87	18.90	18.62	23.57	≤ 23.98	Pass
11ac-VHT40	MCS0	142	5710	18.25	18.28	17.62	22.83	≤ 23.98	Pass
11ac-VHT40	MCS0	151	5755	22.80	22.90	22.39	27.47	≤ 30.00	Pass
11ac-VHT40	MCS0	159	5795	23.04	22.97	22.38	27.58	≤ 30.00	Pass
11ac-VHT80	MCS0	42	5210	14.27	14.58	14.24	19.14	≤ 30.00	Pass
11ac-VHT80	MCS0	58	5290	14.34	14.23	14.17	19.02	≤ 23.98	Pass
11ac-VHT80	MCS0	106	5530	16.45	16.93	17.22	21.65	≤ 23.98	Pass
11ac-VHT80	MCS0	122	5610	18.83	18.96	18.92	23.67	≤ 23.98	Pass
11ac-VHT80	MCS0	138	5690	18.54	18.52	18.55	23.31	≤ 23.98	Pass
11ac-VHT80	MCS0	155	5775	21.62	21.66	21.16	26.26	≤ 30.00	Pass
11ac-VHT160	MCS0	50	5250	14.32	14.56	14.61	19.27	≤ 23.98	Pass
11ac-VHT160	MCS0	114	5570	14.20	14.13	13.90	18.85	≤ 23.98	Pass
11ax-HE20	MCS0	36	5180	22.46	22.34	22.62	27.25	≤ 30.00	Pass
11ax-HE20	MCS0	40	5220	24.22	23.76	23.61	28.64	≤ 30.00	Pass
11ax-HE20	MCS0	48	5240	23.83	23.32	23.75	28.41	≤ 30.00	Pass
11ax-HE20	MCS0	52	5260	16.92	16.96	16.93	21.71	≤ 23.98	Pass
11ax-HE20	MCS0	60	5300	16.98	17.15	17.05	21.83	≤ 23.98	Pass
11ax-HE20	MCS0	64	5320	17.05	16.94	16.79	21.70	≤ 23.98	Pass
11ax-HE20	MCS0	100	5500	16.77	16.68	16.71	21.49	≤ 23.98	Pass
11ax-HE20	MCS0	116	5580	16.68	16.96	17.19	21.72	≤ 23.98	Pass
11ax-HE20	MCS0	140	5700	16.69	17.11	16.83	21.65	≤ 23.98	Pass
11ax-HE20	MCS0	144	5720	17.28	17.44	16.88	21.98	≤ 22.94	Pass
11ax-HE20	MCS0	149	5745	22.63	22.66	22.22	27.28	≤ 30.00	Pass
11ax-HE20	MCS0	157	5785	22.38	22.32	22.19	27.07	≤ 30.00	Pass
11ax-HE20	MCS0	165	5825	22.98	22.49	22.38	27.40	≤ 30.00	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Total Average Power (dBm)	Power Limit (dBm)	Result
11ax-HE40	MCS0	38	5190	19.26	19.34	19.70	24.21	≤ 30.00	Pass
11ax-HE40	MCS0	46	5230	22.59	22.34	22.49	27.25	≤ 30.00	Pass
11ax-HE40	MCS0	54	5270	18.78	18.79	18.73	23.54	≤ 23.98	Pass
11ax-HE40	MCS0	62	5310	18.66	18.59	18.45	23.34	≤ 23.98	Pass
11ax-HE40	MCS0	102	5510	19.02	18.67	18.30	23.44	≤ 23.98	Pass
11ax-HE40	MCS0	110	5550	19.16	18.91	18.77	23.72	≤ 23.98	Pass
11ax-HE40	MCS0	134	5670	18.33	18.63	18.75	23.34	≤ 23.98	Pass
11ax-HE40	MCS0	142	5710	18.66	19.00	18.24	23.42	≤ 23.98	Pass
11ax-HE40	MCS0	151	5755	22.30	22.21	22.26	27.03	≤ 30.00	Pass
11ax-HE40	MCS0	159	5795	22.44	22.39	22.41	27.18	≤ 30.00	Pass
11ax-HE80	MCS0	42	5210	14.39	14.65	14.60	19.32	≤ 30.00	Pass
11ax-HE80	MCS0	58	5290	13.99	14.11	14.39	18.94	≤ 23.98	Pass
11ax-HE80	MCS0	106	5530	16.52	16.46	16.52	21.27	≤ 23.98	Pass
11ax-HE80	MCS0	122	5610	18.52	18.92	18.55	23.44	≤ 23.98	Pass
11ax-HE80	MCS0	138	5690	18.77	18.70	18.73	23.50	≤ 23.98	Pass
11ax-HE80	MCS0	155	5775	21.94	21.96	21.41	26.55	≤ 30.00	Pass
11ax-HE160	MCS0	50	5250	14.14	14.33	14.32	19.04	≤ 23.98	Pass
11ax-HE160	MCS0	114	5570	14.29	14.42	13.95	19.00	≤ 23.98	Pass

Note 1:

The Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)}\}$.

Note 2:

For 5250- 5350MHz and 5470 - 5725MHz Band: Average Power Limit (dBm) = 23.98 dBm.

For 5150 - 5250MHz and 5725 - 5850MHz Bands: Average Power Limit (dBm) = 30 dBm.

For Channel 144 (5720MHz), Average Power Limit (dBm) = $11 + 10 \cdot \log(5\text{MHz} + \text{BW}_{26\text{dBc}}/2)$

Product	AX3000 Ceiling Mount Wi-Fi 6 Access Point	Test Engineer	Xuan Yu
Test Site	SR6	Test Date	2024/2/27
Test Mode	Beamforming Mode		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Total Average Power (dBm)	Power Limit (dBm)	Result
11ac-VHT20	MCS0	36	5180	22.57	22.58	22.68	27.38	≤ 27.48	Pass
11ac-VHT20	MCS0	40	5220	22.72	22.77	22.79	27.53	≤ 27.48	Pass
11ac-VHT20	MCS0	48	5240	23.20	22.84	23.21	27.86	≤ 27.48	Pass
11ac-VHT20	MCS0	52	5260	17.73	17.70	17.81	22.52	≤ 21.46	Pass
11ac-VHT20	MCS0	60	5300	17.41	17.48	17.34	22.18	≤ 21.46	Pass
11ac-VHT20	MCS0	64	5320	17.11	17.01	16.82	21.75	≤ 21.46	Pass
11ac-VHT20	MCS0	100	5500	17.84	17.61	17.75	22.51	≤ 21.46	Pass
11ac-VHT20	MCS0	116	5580	16.52	17.37	17.22	21.82	≤ 21.46	Pass
11ac-VHT20	MCS0	140	5700	16.93	17.47	17.32	22.02	≤ 21.46	Pass
11ac-VHT20	MCS0	144	5720	16.82	16.65	17.02	21.60	≤ 20.89	Pass
11ac-VHT20	MCS0	149	5745	22.15	22.24	22.09	26.93	≤ 27.48	Pass
11ac-VHT20	MCS0	157	5785	22.55	22.60	22.12	27.20	≤ 27.48	Pass
11ac-VHT20	MCS0	165	5825	22.65	22.04	22.21	27.08	≤ 27.48	Pass
11ac-VHT40	MCS0	38	5190	19.56	19.74	19.76	24.46	≤ 27.48	Pass
11ac-VHT40	MCS0	46	5230	22.56	22.44	22.11	27.15	≤ 27.48	Pass
11ac-VHT40	MCS0	54	5270	18.10	18.14	18.01	22.85	≤ 21.46	Pass
11ac-VHT40	MCS0	62	5310	18.27	18.55	18.34	23.16	≤ 21.46	Pass
11ac-VHT40	MCS0	102	5510	18.44	17.72	17.85	22.79	≤ 21.46	Pass
11ac-VHT40	MCS0	110	5550	18.31	18.22	18.33	23.06	≤ 21.46	Pass
11ac-VHT40	MCS0	134	5670	18.25	18.35	18.04	22.99	≤ 21.46	Pass
11ac-VHT40	MCS0	142	5710	18.25	18.28	17.62	22.83	≤ 21.46	Pass
11ac-VHT40	MCS0	151	5755	22.80	22.90	22.39	27.47	≤ 27.48	Pass
11ac-VHT40	MCS0	159	5795	23.04	22.97	22.38	27.58	≤ 27.48	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Total Average Power (dBm)	Power Limit (dBm)	Result
11ac-VHT80	MCS0	42	5210	14.27	14.58	14.24	19.14	≤ 27.48	Pass
11ac-VHT80	MCS0	58	5290	14.34	14.23	14.17	19.02	≤ 21.46	Pass
11ac-VHT80	MCS0	106	5530	16.45	16.93	17.22	21.65	≤ 21.46	Pass
11ac-VHT80	MCS0	122	5610	18.10	18.33	18.37	23.04	≤ 21.46	Pass
11ac-VHT80	MCS0	138	5690	18.52	18.25	18.18	23.09	≤ 21.46	Pass
11ac-VHT80	MCS0	155	5775	21.62	21.66	21.16	26.26	≤ 27.48	Pass
11ac-VHT160	MCS0	50	5250	14.32	14.56	14.61	19.27	≤ 21.46	Pass
11ac-VHT160	MCS0	114	5570	14.20	14.13	13.90	18.85	≤ 21.46	Pass
11ax-HE20	MCS0	36	5180	22.46	22.34	22.62	27.25	≤ 27.48	Pass
11ax-HE20	MCS0	40	5220	24.22	23.76	23.61	28.64	≤ 27.48	Pass
11ax-HE20	MCS0	48	5240	23.83	23.32	23.75	28.41	≤ 27.48	Pass
11ax-HE20	MCS0	52	5260	16.92	16.96	16.93	21.71	≤ 21.46	Pass
11ax-HE20	MCS0	60	5300	16.98	17.15	17.05	21.83	≤ 21.46	Pass
11ax-HE20	MCS0	64	5320	17.05	16.94	16.79	21.70	≤ 21.46	Pass
11ax-HE20	MCS0	100	5500	16.77	16.68	16.71	21.49	≤ 21.46	Pass
11ax-HE20	MCS0	116	5580	16.68	16.96	17.19	21.72	≤ 21.46	Pass
11ax-HE20	MCS0	140	5700	16.69	17.11	16.83	21.65	≤ 21.46	Pass
11ax-HE20	MCS0	144	5720	17.28	17.44	16.88	21.98	≤ 20.92	Pass
11ax-HE20	MCS0	149	5745	22.63	22.66	22.22	27.28	≤ 27.48	Pass
11ax-HE20	MCS0	157	5785	22.38	22.32	22.19	27.07	≤ 27.48	Pass
11ax-HE20	MCS0	165	5825	22.98	22.49	22.38	27.40	≤ 27.48	Pass
11ax-HE40	MCS0	38	5190	19.26	19.34	19.70	24.21	≤ 27.48	Pass
11ax-HE40	MCS0	46	5230	22.59	22.34	22.49	27.25	≤ 27.48	Pass
11ax-HE40	MCS0	54	5270	18.24	18.05	17.79	22.80	≤ 21.46	Pass
11ax-HE40	MCS0	62	5310	18.10	17.82	17.88	22.71	≤ 21.46	Pass
11ax-HE40	MCS0	102	5510	18.30	17.96	17.81	22.80	≤ 21.46	Pass
11ax-HE40	MCS0	110	5550	18.23	17.93	17.88	22.79	≤ 21.46	Pass
11ax-HE40	MCS0	134	5670	17.81	17.81	18.29	22.75	≤ 21.46	Pass
11ax-HE40	MCS0	142	5710	18.29	18.07	17.75	22.81	≤ 21.46	Pass
11ax-HE40	MCS0	151	5755	22.30	22.21	22.26	27.03	≤ 27.48	Pass
11ax-HE40	MCS0	159	5795	22.44	22.39	22.41	27.18	≤ 27.48	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Total Average Power (dBm)	Power Limit (dBm)	Result
11ax-HE80	MCS0	42	5210	14.39	14.65	14.60	19.32	≤ 27.50	Pass
11ax-HE80	MCS0	58	5290	13.99	14.11	14.39	18.94	≤ 21.46	Pass
11ax-HE80	MCS0	106	5530	16.52	16.46	16.52	21.27	≤ 21.46	Pass
11ax-HE80	MCS0	122	5610	18.22	18.63	18.04	23.07	≤ 21.46	Pass
11ax-HE80	MCS0	138	5690	17.85	18.14	18.41	22.91	≤ 21.46	Pass
11ax-HE80	MCS0	155	5775	21.94	21.96	21.41	26.55	≤ 27.48	Pass
11ax-HE160	MCS0	50	5250	14.14	14.33	14.32	19.04	≤ 21.46	Pass
11ax-HE160	MCS0	114	5570	14.29	14.42	13.95	19.00	≤ 21.46	Pass

Note 1:

The Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)}\}$.

Note 2:

For 5125 - 5250MHz Band: Average Power Limit (dBm) = 30 - (8.52- 6) = 27.48dBm

For 5250 - 5350MHz and 5470 - 5725MHz Band: Average Power Limit (dBm) = 23.98 - (8.52- 6) = 21.46dBm.

For 5725 - 5850MHz Band: Average Power Limit (dBm) = 30- (8.5- 6) = 27.50dBm.

For Channel 144 (5720MHz), Average Power Limit (dBm) = $11 + 10 \cdot \log(5\text{MHz} + BW_{26\text{dBc}}/2) - (8.52- 6)$

7.5. Transmit Power Control

7.5.1. Test Limit

The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm.


7.5.2. Test Procedure Used

KDB 789033 D02v02r01- Section II)E)3)b) Method PM-G

7.5.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.5.4. Test Setup

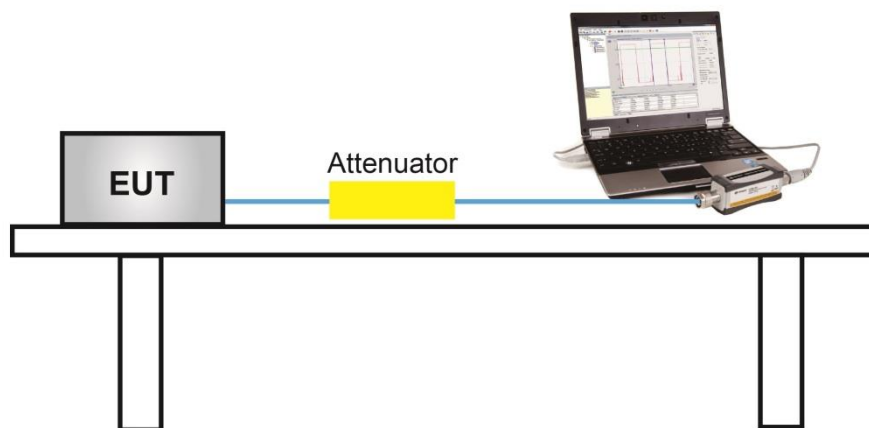

7.5.5. Test Result

Device supports TPC mechanism, details refer to the operational description.

7.6. Power Spectral Density Measurement

7.6.1. Test Limit

For the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


7.6.2. Test Procedure Used

KDB 789033 D02v02r01-Section II)F

7.6.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz, if measurement bandwidth of Maximum PSD is specified in 500 kHz,
RBW = 510 kHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
10. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

7.6.4. Test Setup

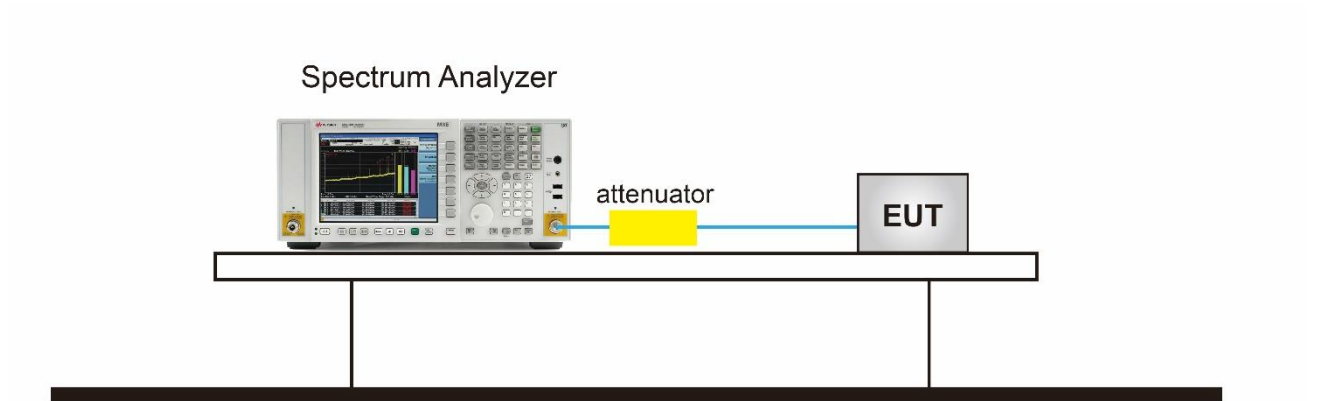

7.6.5.Test Result

Product	AX3000 Ceiling Mount Wi-Fi 6 Access Point	Test Engineer	Xuan Yu
Test Site	SR6	Test Date	2024/2/15~2024/2/26
Mode	Power Spectral Density (U-NII- 1/-2a / -2c) CDD Mode		

Test Mode	Data Rate /MCS	Ch. No.	Freq. (MHz)	Ant 0 PSD (dBm/MHz)	Ant 1 PSD (dBm/MHz)	Ant 2 PSD (dBm/MHz)	Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)	Result
11a	6Mbps	36	5180	11.091	10.800	10.196	95.88%	15.665	≤ 16.23	Pass
11a	6Mbps	44	5220	11.462	10.950	10.474	95.88%	15.935	≤ 16.23	Pass
11a	6Mbps	48	5240	10.909	10.698	10.729	95.88%	15.734	≤ 16.23	Pass
11a	6Mbps	52	5260	4.878	4.887	4.921	95.88%	9.849	≤ 10.23	Pass
11a	6Mbps	60	5300	4.660	4.672	5.296	95.88%	9.840	≤ 10.23	Pass
11a	6Mbps	64	5320	4.997	4.990	4.541	95.88%	9.802	≤ 10.23	Pass
11a	6Mbps	100	5500	4.787	4.819	5.281	95.88%	9.922	≤ 10.23	Pass
11a	6Mbps	116	5580	4.504	4.937	4.833	95.88%	9.716	≤ 10.23	Pass
11a	6Mbps	140	5700	4.882	4.780	4.331	95.88%	9.625	≤ 10.23	Pass
11a	6Mbps	144	5720	5.316	5.058	4.795	95.88%	10.015	≤ 10.23	Pass
11ac-VHT20	MCS0	36	5180	10.887	11.012	10.467	96.22%	15.733	≤ 16.23	Pass
11ac-VHT20	MCS0	40	5220	10.935	11.112	10.795	96.22%	15.888	≤ 16.23	Pass
11ac-VHT20	MCS0	48	5240	11.229	10.865	10.348	96.22%	15.768	≤ 16.23	Pass
11ac-VHT20	MCS0	52	5260	4.565	4.894	5.358	96.22%	9.890	≤ 10.23	Pass
11ac-VHT20	MCS0	60	5300	4.319	5.724	5.176	96.22%	10.050	≤ 10.23	Pass
11ac-VHT20	MCS0	64	5320	5.047	4.552	4.574	96.22%	9.669	≤ 10.23	Pass
11ac-VHT20	MCS0	100	5500	5.188	5.171	5.106	96.22%	10.094	≤ 10.23	Pass
11ac-VHT20	MCS0	116	5580	4.513	5.552	4.708	96.22%	9.887	≤ 10.23	Pass
11ac-VHT20	MCS0	140	5700	5.020	4.854	4.808	96.22%	9.834	≤ 10.23	Pass
11ac-VHT20	MCS0	144	5720	5.119	5.504	4.970	96.22%	10.142	≤ 10.23	Pass
11ac-VHT40	MCS0	38	5190	4.925	4.233	4.425	92.13%	9.665	≤ 16.23	Pass
11ac-VHT40	MCS0	46	5230	7.632	6.892	7.878	92.13%	12.614	≤ 16.23	Pass
11ac-VHT40	MCS0	54	5270	4.711	5.153	5.063	92.13%	10.107	≤ 10.23	Pass
11ac-VHT40	MCS0	62	5310	4.948	4.819	4.622	92.13%	9.926	≤ 10.23	Pass
11ac-VHT40	MCS0	102	5510	4.526	4.529	4.703	92.13%	9.714	≤ 10.23	Pass
11ac-VHT40	MCS0	110	5550	4.870	4.510	5.061	92.13%	9.947	≤ 10.23	Pass
11ac-VHT40	MCS0	134	5670	4.793	4.908	4.883	92.13%	9.989	≤ 10.23	Pass
11ac-VHT40	MCS0	142	5710	4.250	4.761	4.303	92.13%	9.571	≤ 10.23	Pass

Test Mode	Data Rate /MCS	Ch. No.	Freq. (MHz)	Ant 0 PSD (dBm/MHz)	Ant 1 PSD (dBm/MHz)	Ant 2 PSD (dBm/MHz)	Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)	Result
11ac-VHT80	MCS0	42	5210	-3.365	-3.084	-3.172	85.31%	2.256	≤ 16.23	Pass
11ac-VHT80	MCS0	58	5290	-2.808	-2.878	-2.334	85.31%	2.795	≤ 10.23	Pass
11ac-VHT80	MCS0	106	5530	-0.442	-0.325	0.231	85.31%	5.293	≤ 10.23	Pass
11ac-VHT80	MCS0	122	5610	2.330	2.021	2.341	85.31%	7.694	≤ 10.23	Pass
11ac-VHT80	MCS0	138	5690	1.456	1.626	2.115	85.31%	7.203	≤ 10.23	Pass
11ac-VHT160	MCS0	50	5250	-5.965	-5.886	-5.890	85.32%	-0.453	≤ 10.23	Pass
11ac-VHT160	MCS0	114	5570	-5.871	-6.111	-6.062	85.32%	-0.553	≤ 10.23	Pass
11ax-HE20	MCS0	36	5180	11.035	10.511	10.553	94.49%	15.724	≤ 16.23	Pass
11ax-HE20	MCS0	44	5220	11.518	11.186	10.742	94.49%	16.178	≤ 16.23	Pass
11ax-HE20	MCS0	48	5240	11.032	10.981	10.739	94.49%	15.937	≤ 16.23	Pass
11ax-HE20	MCS0	52	5260	4.677	5.085	4.534	94.49%	9.789	≤ 10.23	Pass
11ax-HE20	MCS0	60	5300	5.171	4.876	4.752	94.49%	9.954	≤ 10.23	Pass
11ax-HE20	MCS0	64	5320	5.104	5.071	5.016	94.49%	10.081	≤ 10.23	Pass
11ax-HE20	MCS0	100	5500	4.749	4.428	4.520	94.49%	9.585	≤ 10.23	Pass
11ax-HE20	MCS0	116	5580	4.432	5.281	4.715	94.49%	9.841	≤ 10.23	Pass
11ax-HE20	MCS0	140	5700	4.387	4.912	4.703	94.49%	9.690	≤ 10.23	Pass
11ax-HE20	MCS0	144	5720	5.095	5.313	4.709	94.49%	10.063	≤ 10.23	Pass
11ax-HE40	MCS0	38	5190	4.384	4.913	5.123	91.06%	9.996	≤ 16.23	Pass
11ax-HE40	MCS0	46	5230	8.362	7.882	8.701	91.06%	13.506	≤ 16.23	Pass
11ax-HE40	MCS0	54	5270	4.917	4.699	4.284	91.06%	9.819	≤ 10.23	Pass
11ax-HE40	MCS0	62	5310	4.996	4.700	5.128	91.06%	10.123	≤ 10.23	Pass
11ax-HE40	MCS0	102	5510	5.523	4.401	4.371	91.06%	9.977	≤ 10.23	Pass
11ax-HE40	MCS0	110	5550	5.003	4.770	4.694	91.06%	10.002	≤ 10.23	Pass
11ax-HE40	MCS0	134	5670	4.766	4.282	4.771	91.06%	9.790	≤ 10.23	Pass
11ax-HE40	MCS0	142	5710	4.735	4.667	4.546	91.06%	9.828	≤ 10.23	Pass
11ax-HE80	MCS0	42	5210	-3.473	-2.998	-3.371	84.24%	2.240	≤ 16.23	Pass
11ax-HE80	MCS0	58	5290	-3.135	-3.052	-2.829	84.24%	2.513	≤ 10.23	Pass
11ax-HE80	MCS0	106	5530	-0.664	-0.993	-1.113	84.24%	4.597	≤ 10.23	Pass
11ax-HE80	MCS0	122	5610	2.232	1.923	1.985	84.24%	7.565	≤ 10.23	Pass
11ax-HE80	MCS0	122	5690	2.371	1.786	1.995	84.24%	7.573	≤ 10.23	Pass
11ax-HE160	MCS0	50	5250	-6.402	-5.752	-6.549	84.36%	-0.710	≤ 10.23	Pass
11ax-HE160	MCS0	114	5570	-6.016	-6.231	-6.446	84.36%	-0.718	≤ 10.23	Pass

Note 1: When EUT duty cycle ≥ 98%,

the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)}\}$ (dBm/MHz).

When EUT duty cycle < 98%,

the total PSD (dBm/MHz) = $10 \cdot \log \{ 10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)} \} + 10 \cdot \log (1/\text{Duty Cycle})$ (dBm/MHz).

Note 2:

For 5150 - 5250MHz Band: PSD Limit (dBm/MHz) = 17 - (6.77 - 6) = 16.23dBm/MHz.

For 5250 - 5350MHz and 5470 - 5725MHz Band: PSD Limit (dBm/MHz) = 11 - (6.77 - 6) = 10.23dBm/MHz.

Product	AX3000 Ceiling Mount Wi-Fi 6 Access Point	Test Engineer	Xuan Yu
Test Site	SR6	Test Date	2024/2/15/~2024/2/26
Test Item	Power Spectral Density (U-NII-3) CDD Mode		

Test Mode	Data Rate/ MCS	Ch. No.	Freq. (MHz)	Ant 0 PSD (dBm/510 KHz)	Ant 1 PSD (dBm/510 KHz)	Ant 2 PSD (dBm/510 KHz)	Duty Cycle (%)	Total PSD (dBm/510 kHz)	Limit (dBm/500 kHz)	Result
11a	6Mbps	149	5745	8.892	8.427	8.655	95.88%	13.616	≤ 29.23	Pass
11a	6Mbps	157	5785	9.195	8.678	9.609	95.88%	14.131	≤ 29.23	Pass
11a	6Mbps	165	5825	9.707	8.706	8.974	95.88%	14.104	≤ 29.23	Pass
11ac-VHT20	MCS0	149	5745	7.827	7.582	8.376	96.22%	12.880	≤ 29.23	Pass
11ac-VHT20	MCS0	157	5785	8.569	7.665	8.128	96.22%	13.075	≤ 29.23	Pass
11ac-VHT20	MCS0	165	5825	8.369	7.708	8.344	96.22%	13.089	≤ 29.23	Pass
11ac-VHT40	MCS0	151	5755	6.285	5.755	5.705	92.13%	11.050	≤ 29.23	Pass
11ac-VHT40	MCS0	159	5795	6.537	6.008	6.386	92.13%	11.443	≤ 29.23	Pass
11ac-VHT80	MCS0	155	5775	1.632	0.640	1.608	85.31%	6.778	≤ 29.23	Pass
11ax-HE20	MCS0	149	5745	8.275	7.968	7.858	94.49%	13.055	≤ 29.23	Pass
11ax-HE20	MCS0	157	5785	8.089	7.647	8.169	94.49%	12.992	≤ 29.23	Pass
11ax-HE20	MCS0	165	5825	9.051	8.207	8.302	94.49%	13.554	≤ 29.23	Pass
11ax-HE40	MCS0	151	5755	5.600	5.083	5.632	91.06%	10.623	≤ 29.23	Pass
11ax-HE40	MCS0	159	5795	6.169	5.641	5.979	91.06%	11.113	≤ 29.23	Pass
11ax-HE80	MCS0	155	5775	1.053	1.000	0.886	84.24%	6.496	≤ 29.23	Pass

Note 1: When EUT duty cycle ≥ 98%,


the total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)}\}$ (dBm/510kHz).

When EUT duty cycle < 98%, the total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)}\}$ (dBm/510kHz) + $10 \cdot \log (1/\text{Duty Cycle})$.


Note 2: PSD Limit (dBm/500kHz) = 30 - (6.77 - 6) = 29.23 (dBm/500kHz).

802.11a Power Spectral Density - Ant 0


Channel 36 (5180MHz)

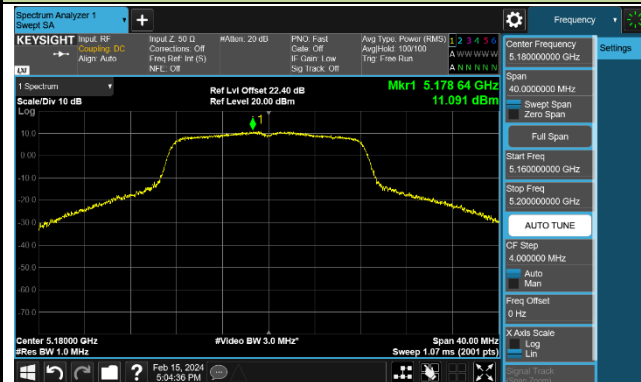


Channel 44 (5220MHz)

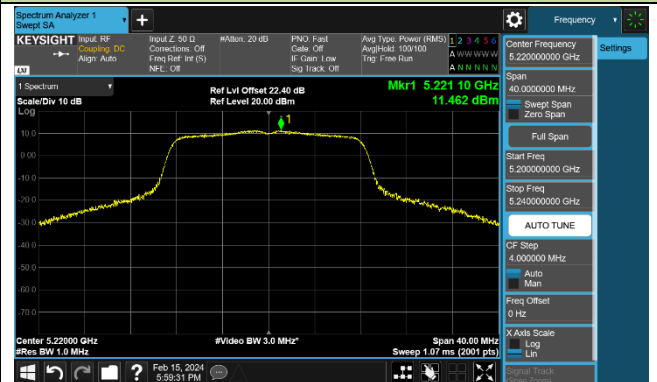


Channel 48 (5240MHz)

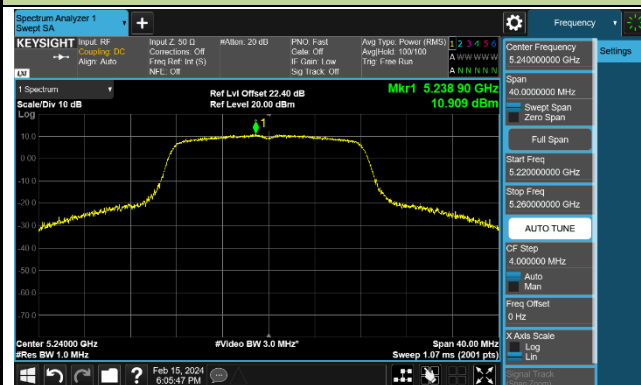


Channel 52 (5260MHz)

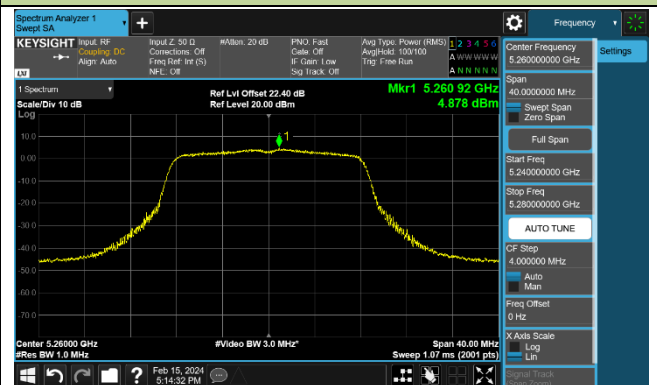

Channel 60 (5300MHz)

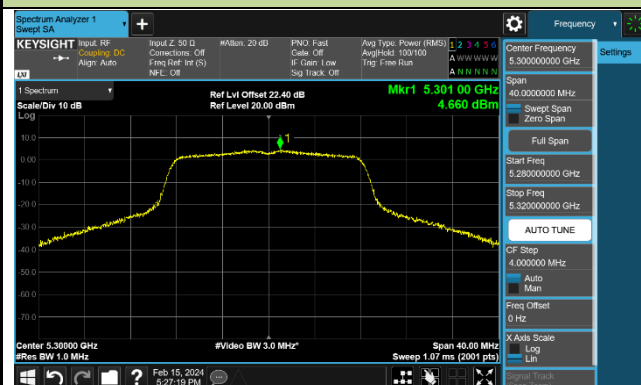


Channel 64 (5320MHz)

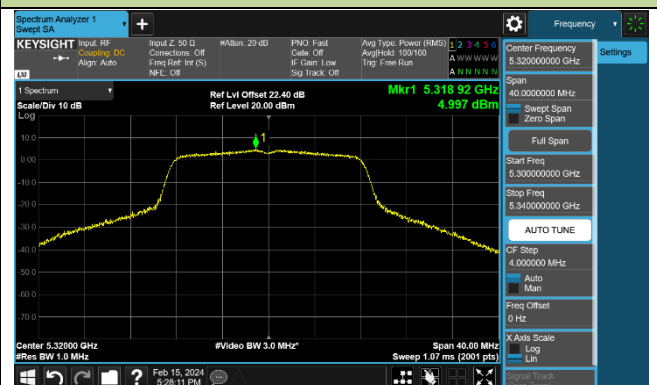


Channel 100 (5500MHz)




Channel 116 (5580MHz)

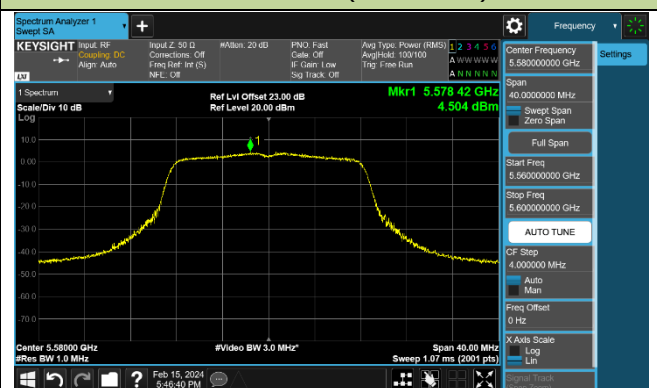

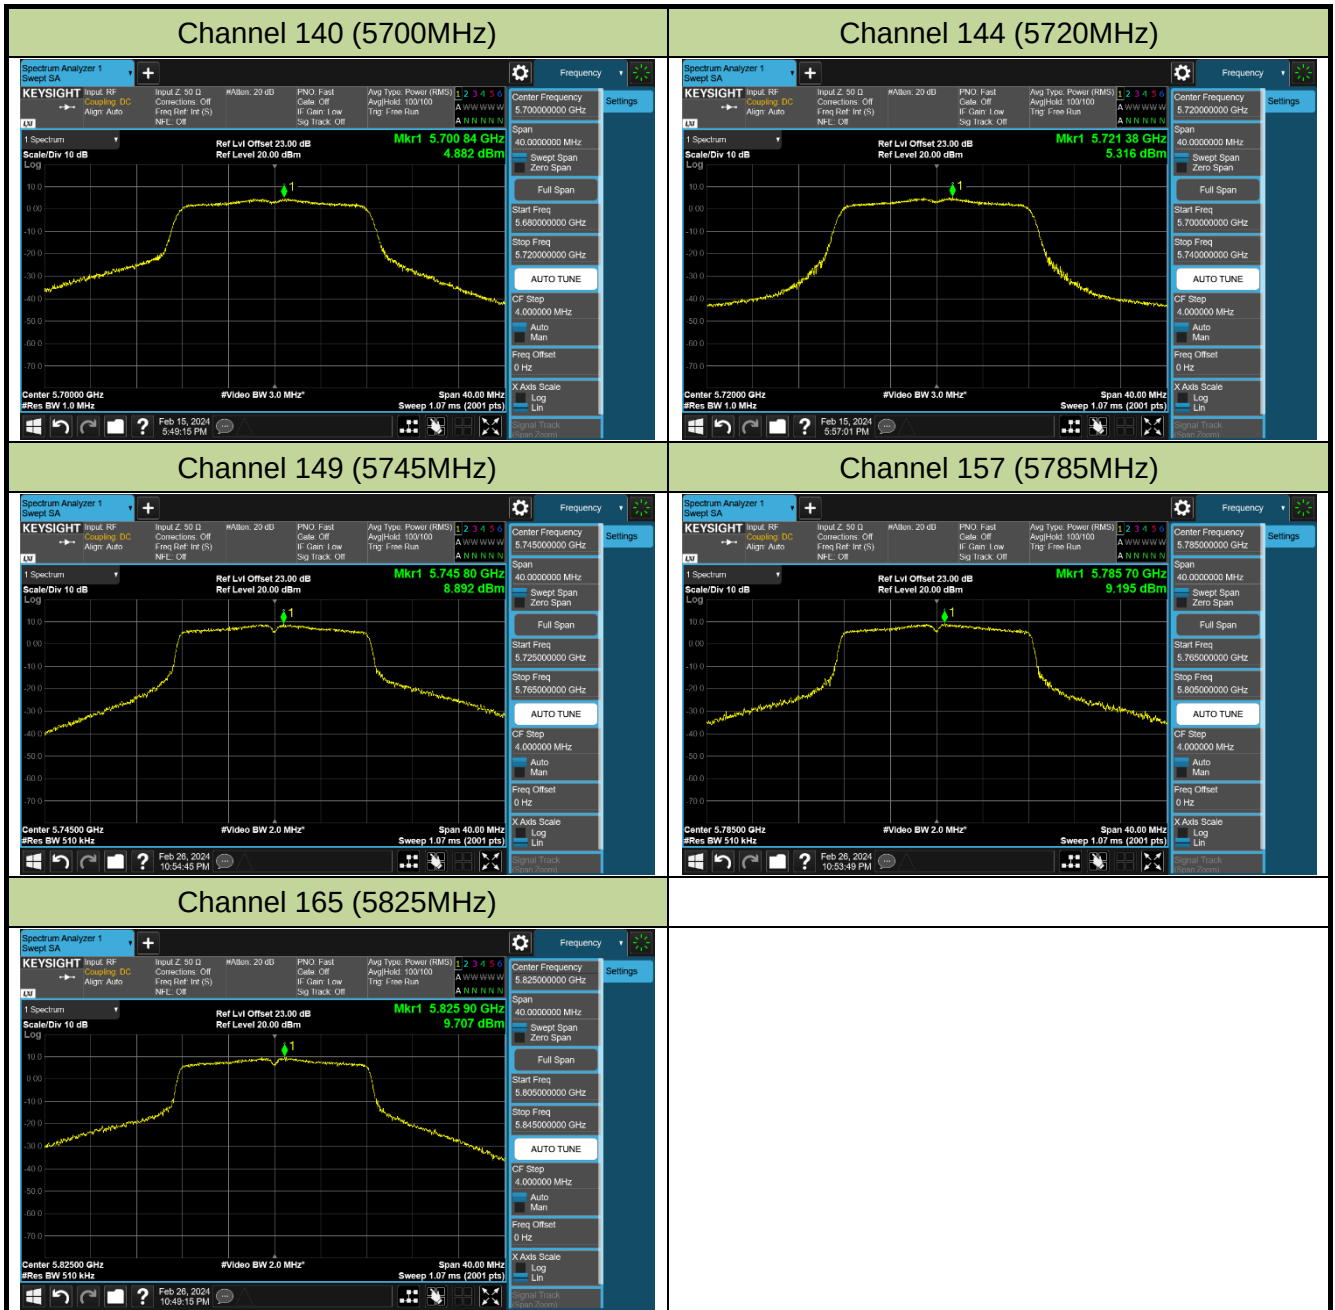


802.11ac-VHT20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)

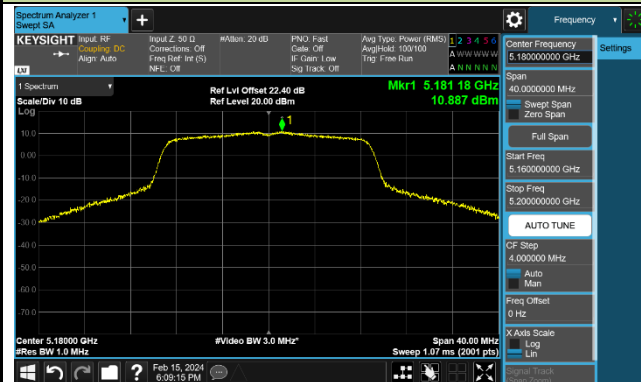


Channel 44 (5220MHz)

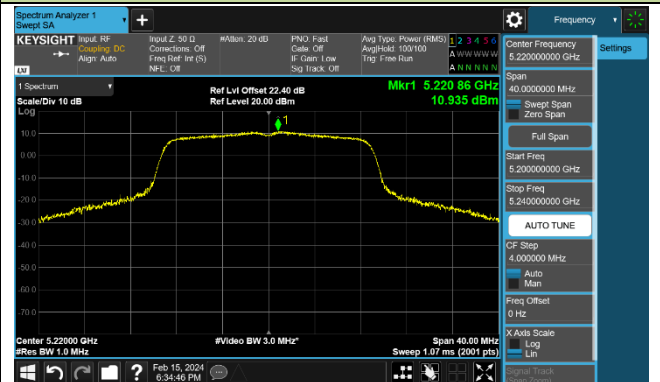


Channel 48 (5240MHz)

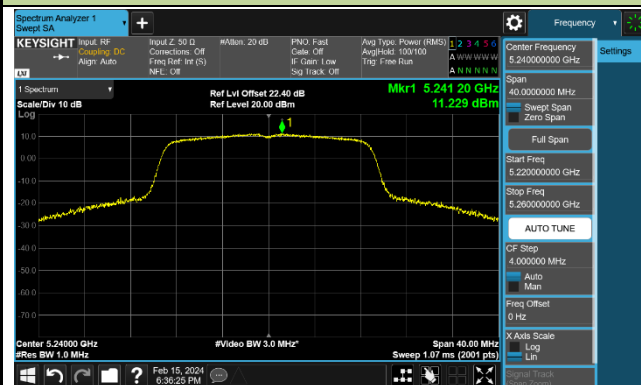


Channel 52 (5260MHz)

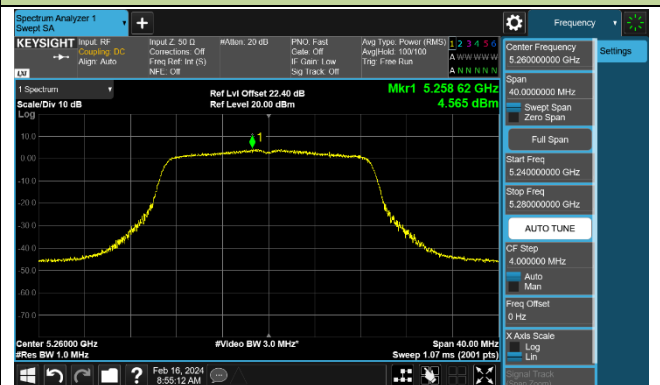

Channel 60 (5300MHz)

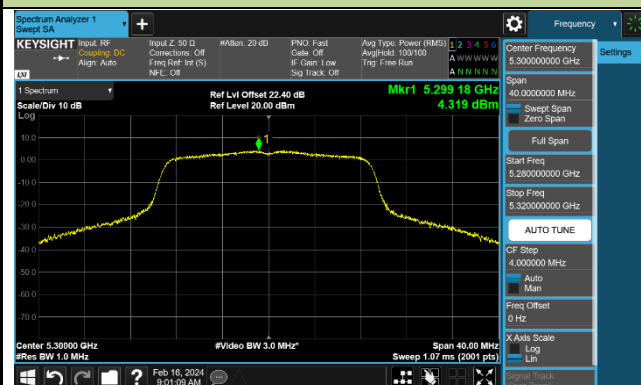


Channel 64 (5320MHz)

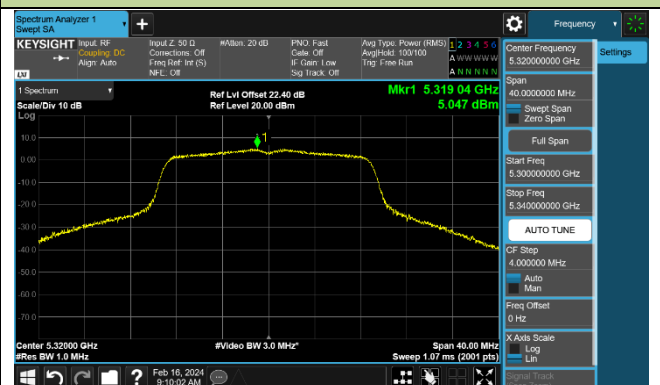


Channel 100 (5500MHz)




Channel 116 (5580MHz)

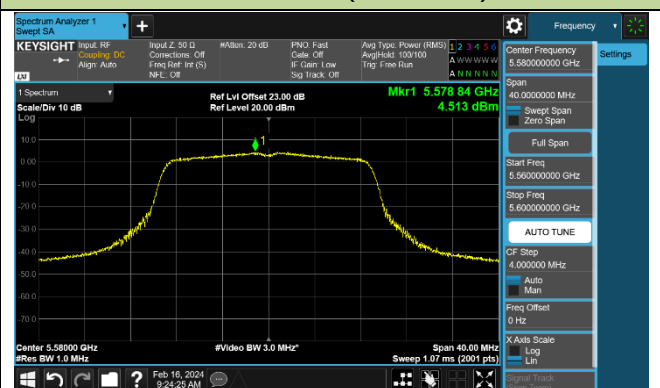

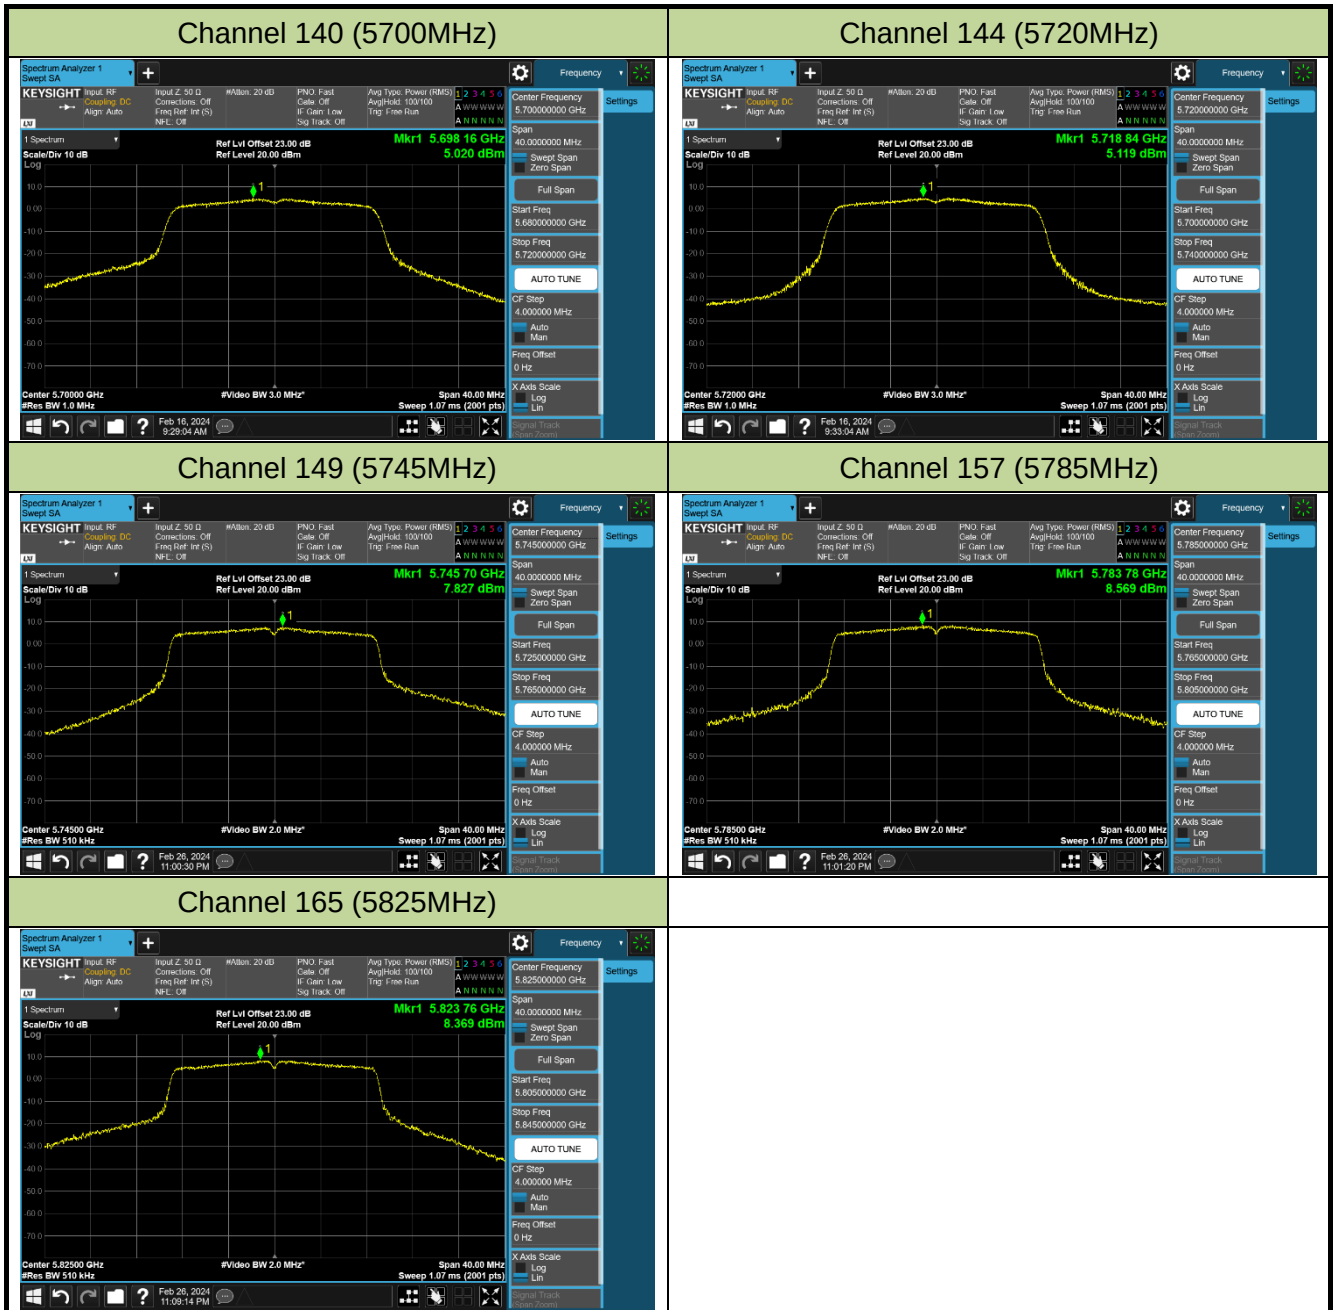


802.11ac-VHT40 Power Spectral Density - Ant 0


Channel 38 (5190MHz)

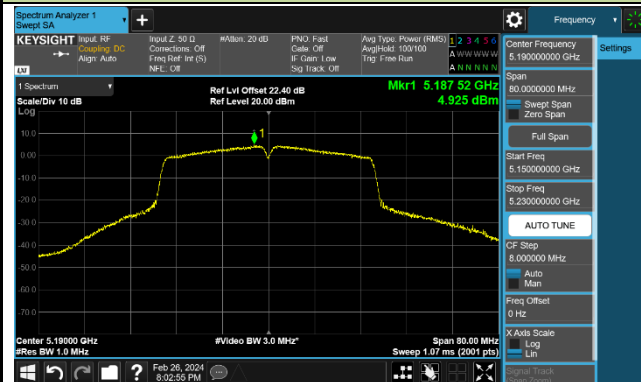


Channel 46 (5230MHz)

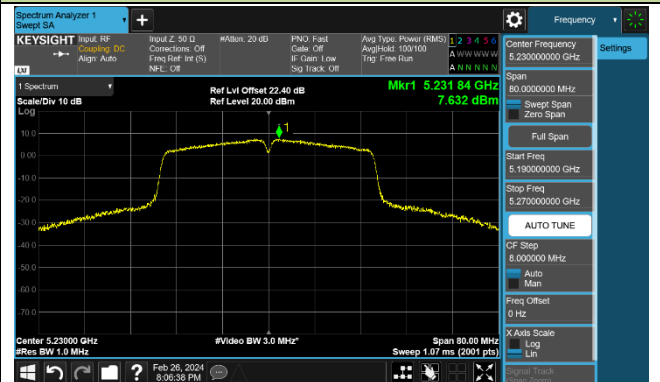


Channel 54 (5270MHz)

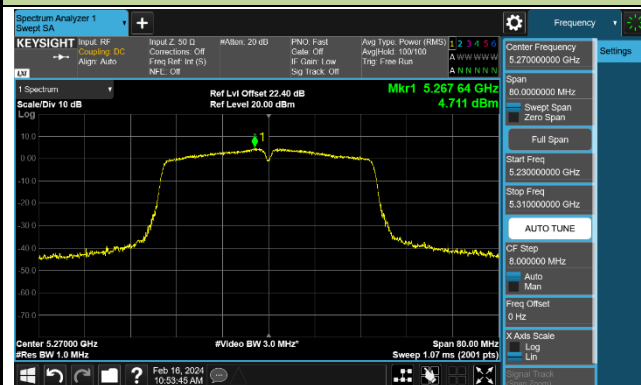


Channel 62 (5310MHz)

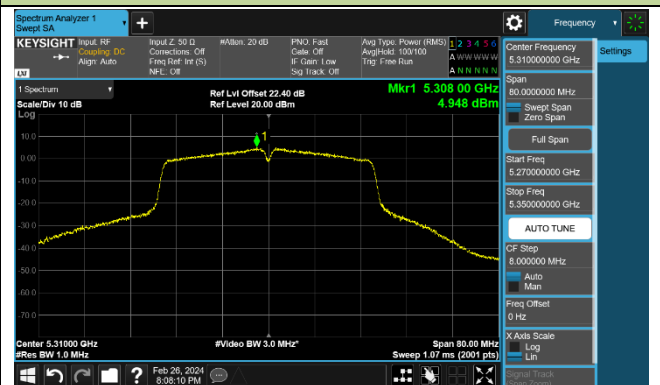


Channel 102 (5510MHz)

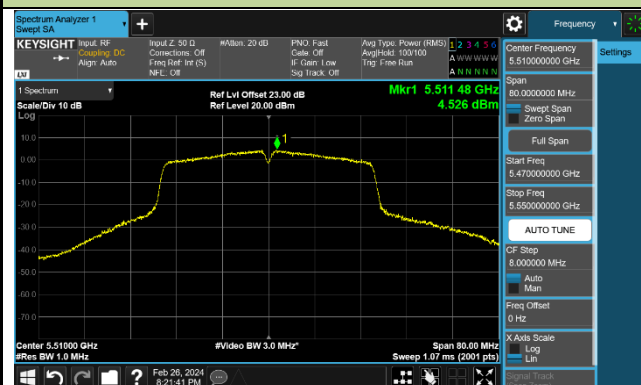


Channel 110 (5550MHz)

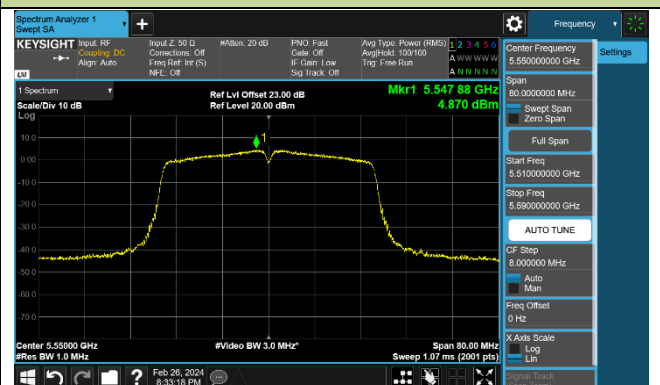


Channel 134 (5670MHz)

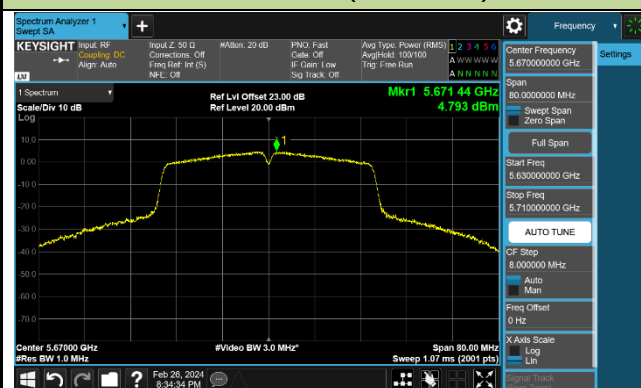

Channel 142 (5710MHz)

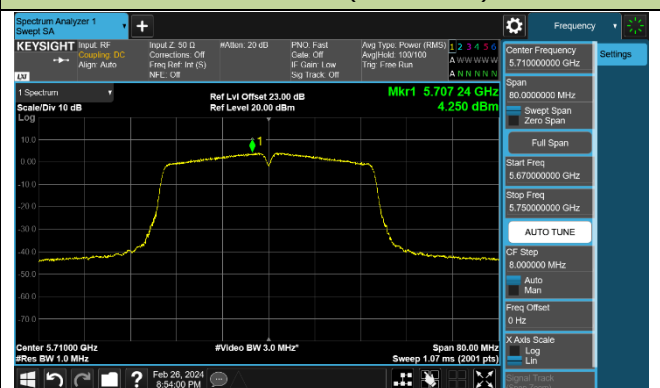

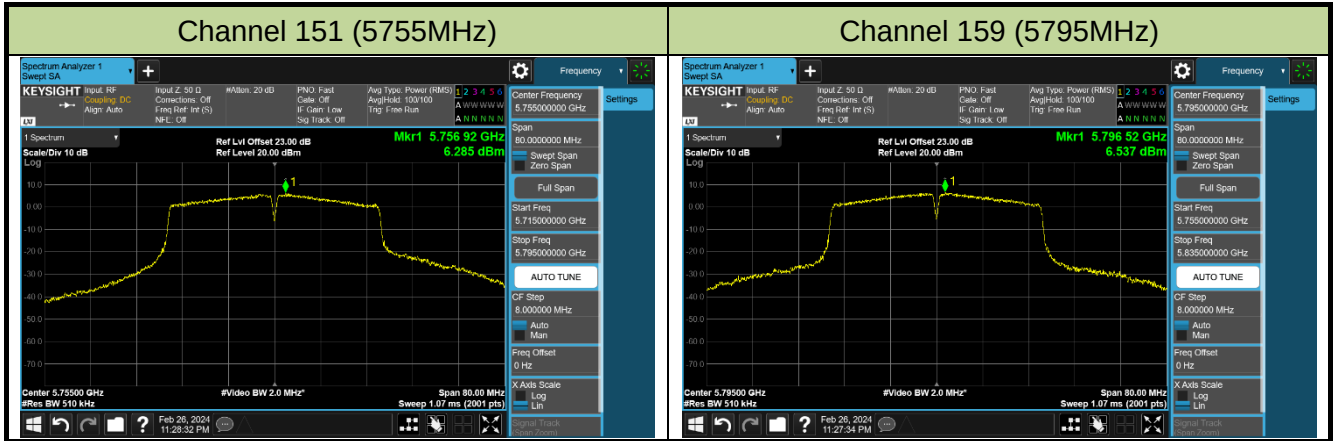


802.11ac-VHT80 Power Spectral Density - Ant 0


Channel 42 (5210MHz)




Channel 58 (5290MHz)

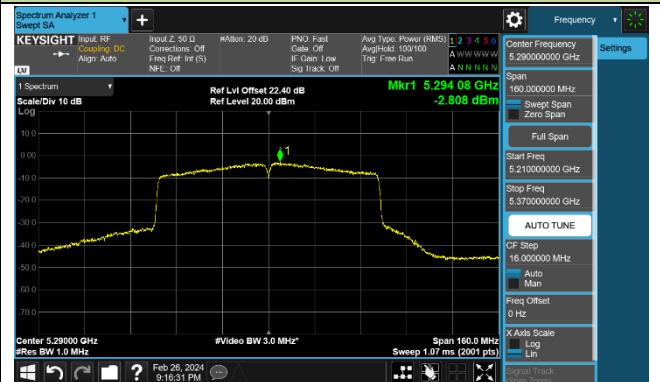


Channel 106 (5530MHz)

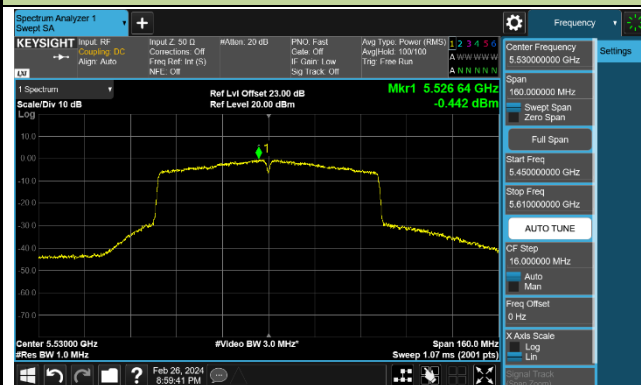

Channel 122 (5610MHz)

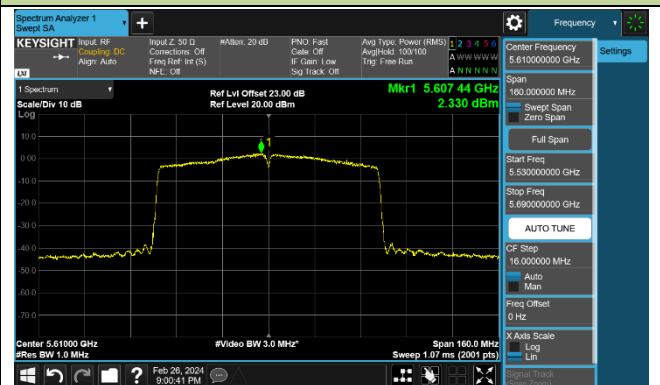

Channel 138 (5690MHz)

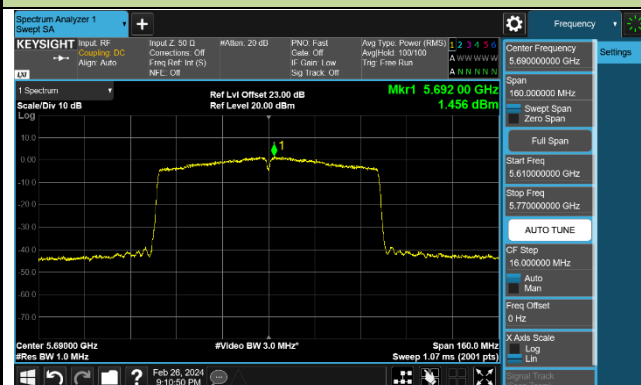


Channel 155 (5775MHz)




802.11ac-VHT160 Power Spectral Density - Ant 0

Channel 50 (5250MHz)

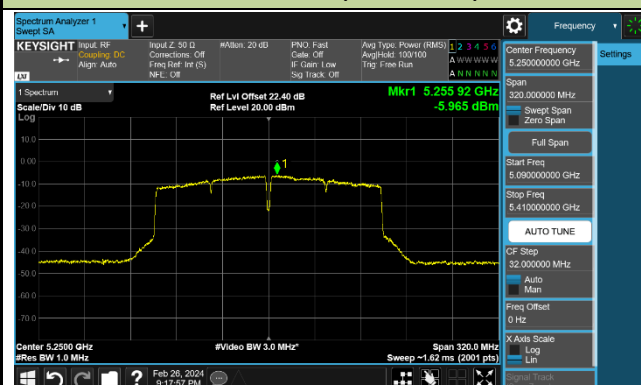

Channel 114 (5570MHz)

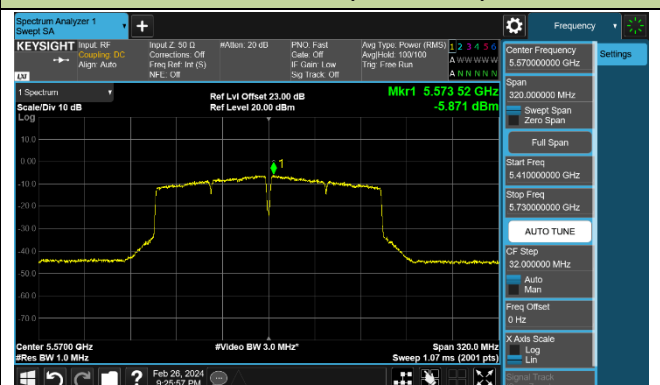


802.11ax-HE20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)




Channel 44 (5220MHz)

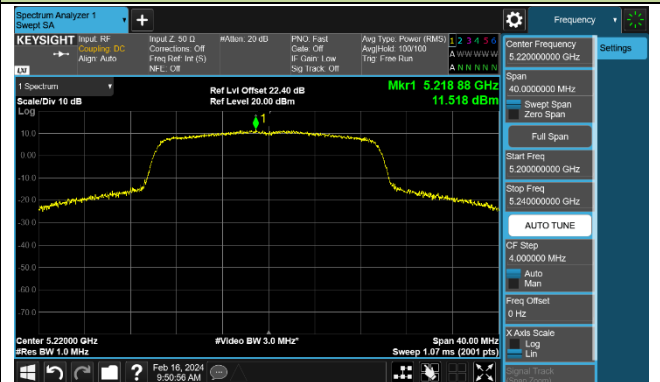


Channel 48 (5240MHz)

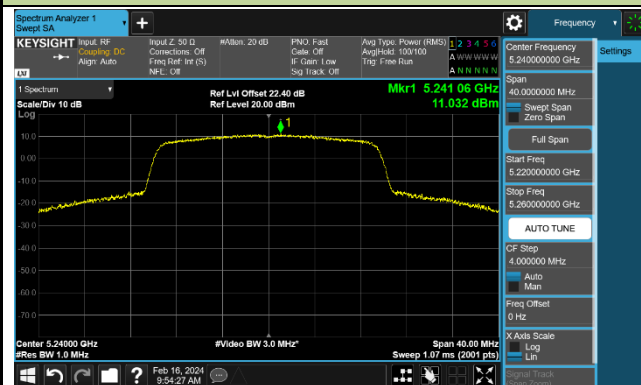


Channel 52 (5260MHz)

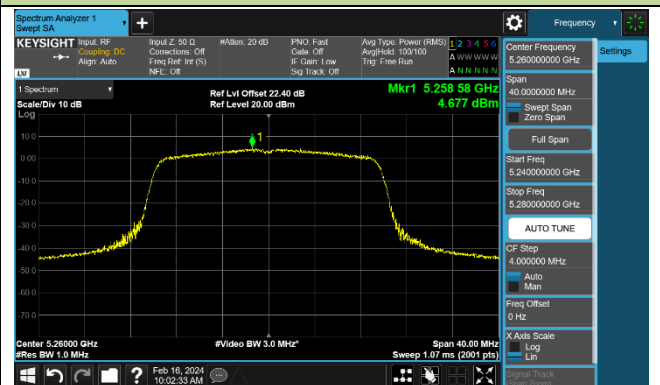


Channel 60 (5300MHz)

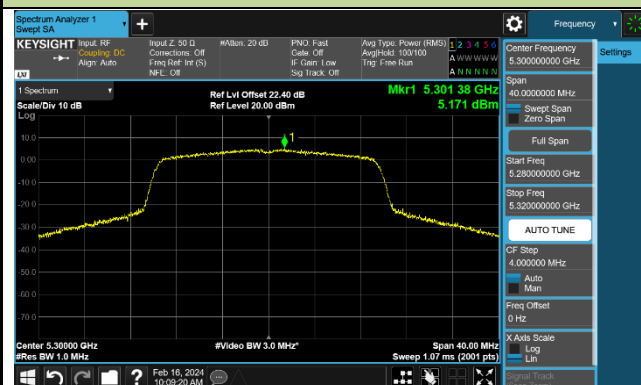

Channel 64 (5320MHz)

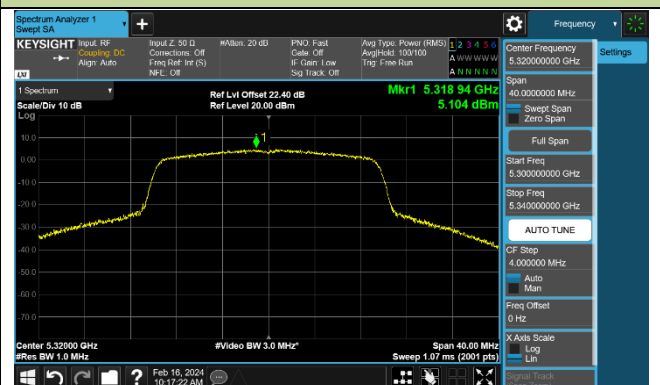

Channel 100 (5500MHz)

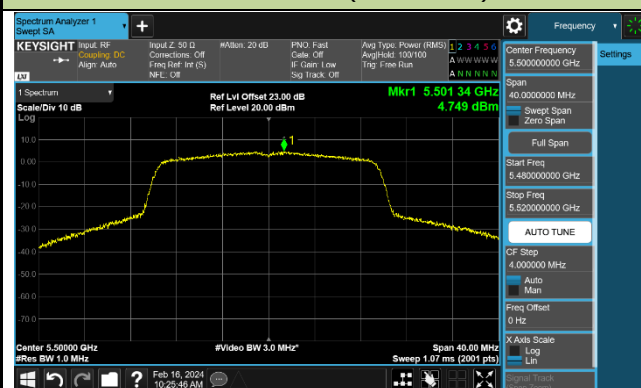

Channel 116 (5580MHz)

