



TEST REPORT

No. I19Z61198-WMD04

for

Samsung Electronics Co., Ltd.

Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN

Model Name: SM-A207F/DS

FCC ID: ZCASMA207F

with

Hardware Version: MP1.0

Software Version: A207FXXU0ASG2

Issued Date: 2019-08-09



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government..

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I19Z61198-WMD04	Rev.0	1st edition	2019-08-09



CONTENTS

1. TEST LABORATORY	4
1.1. INTRODUCTION & ACCREDITATION.....	4
1.2. TESTING LOCATION	4
1.3. TESTING ENVIRONMENT	4
1.4. PROJECT DATA	4
1.5. SIGNATURE	5
2. CLIENT INFORMATION	6
2.1. APPLICANT INFORMATION	6
2.2. MANUFACTURER INFORMATION	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	7
3.4. NORMAL ACCESSORY SETTING	8
3.5. GENERAL DESCRIPTION	8
4. REFERENCE DOCUMENTS	9
4.1. REFERENCE DOCUMENTS FOR TESTING	9
5. LABORATORY ENVIRONMENT	10
6. SUMMARY OF TEST RESULTS	11
7. TEST EQUIPMENTS UTILIZED	12
ANNEX A: MEASUREMENT RESULTS.....	13
A.1 OUTPUT POWER	13
A.2 FREQUENCY STABILITY	15
A.3 OCCUPIED BANDWIDTH	18
A.4 EMISSION BANDWIDTH.....	20
A.5 BAND EDGE COMPLIANCE	22
A.6 CONDUCTED SPURIOUS EMISSION.....	23
ANNEX B: ACCREDITATION CERTIFICATE.....	30



1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0 and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Location 1: CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

1.3. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-80%

1.4. Project data

Testing Start Date: 2019-07-02
Testing End Date: 2019-08-06

1.5. Signature



Dong Yuan
(Prepared this test report)



Zhang Yufeng
(Reviewed this test report)



Zhao Hui Lin
Deputy Director of the laboratory
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Samsung Electronics Co., Ltd.
Address /Post: 19 Chapin Rd., Building D Pine Brook, NJ 07058
Contact Person: Jenni Chun
Contact Email: N/A
Telephone: N/A
Fax: N/A

2.2. Manufacturer Information

Company Name: Jiaxing Yongrui Electron Technology Co., Ltd.
Address /Post: NO.777 Yazhong Road, Daqiao Town, Nanhu District, Jiaxing
City ,Zhejiang
Contact Person: N/A
Contact Email: N/A
Telephone: N/A
Fax: N/A



3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN
Model	SM-A207F/DS
FCC ID	ZCASMA207F
Frequency	CDMA800MHz (BC0)
Antenna	Embedded
Extreme vol. Limits	3.6VDC to 4.2VDC (nominal: 3.8VDC)
Extreme temp. Tolerance	-10°C to +55°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version	Date of receipt
UT25a	358244100023466/	MP1.0	A207FXXU0ASG2	2019-07-02
	358245100023463			

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE1	
Model	SWD-WT-N6
Manufacturer	Sunwoda
Capacitance	4000mAh

*AE ID: is used to identify the test sample in the lab internally.

3.4. Normal Accessory setting

Fully charged battery was used during the test.

3.5. General Description

The Equipment Under Test (EUT) is a model of Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN with embedded antenna. It consists of Hand Telephone Set and normal options: lithium battery, charger.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the Client.



4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 22	PUBLIC MOBILE SERVICES	V10-1-18 Edition
FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS	V10-1-18 Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
KDB 971168 D01	Measurement Guidance for Certification of Licensed Digital Transmitters	v03r01



5. LABORATORY ENVIRONMENT

Shielding chamber did not exceed following limits along the RF testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =20 %, Max. = 80 %



6. SUMMARY OF TEST RESULTS

Items	List	Clause in FCC rules	Verdict
1	Output Power	22.913(a)	Pass
2	Frequency Stability	2.1055/22.355	Pass
3	Occupied Bandwidth	2.1049(h)(i)	Pass
4	Emission Bandwidth	22.917(b)	Pass
5	Band Edge Compliance	22.917(b)	Pass
6	Conducted Spurious Emission	2.1057/22.917	Pass



7. Test Equipments Utilized

NO.	NAME	TYPE	SERIES NUMBER	PRODUCER	CALIBRATION INTERVAL	CAL. DUE DATE
1	Spectrum Analyzer	FSV30	101576	R&S	1 Year	2020-05-03
2	Wireless Communications Test Set	8960(E5515C)	MY48360950	Agilent	2 Year	2020-08-29
3	Climatic chamber	SH-641	92009050	ESPEC	2 Year	2019-12-21

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

A.1.1 Summary

During the process of testing, the EUT was controlled via Agilent Wireless Communications Test Set (8960(E5515C)) to ensure max power transmission and proper modulation.

This result is max output power conducted measurements for the EUT.

In all cases, output power is within the specified limits.

A.1.2 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

The power was measured with Rhode & Schwarz Spectrum Analyzer FSV30 (average).

These measurements were done at 3 frequencies, 824.7MHz, 836.52MHz and 848.31MHz for CDMA 800 band (bottom, middle and top of operational frequency range) for 1x RTT and 1x EVDO.

The measurement method is from KDB 971168 D01:

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Set number of points in sweep $\geq 2 \times$ span / RBW.
- e) Sweep time = auto-couple.
- f) Detector = RMS (power averaging).
- g) If the EUT can be configured to transmit continuously (i.e., burst duty cycle $\geq 98\%$), then set the trigger to free run.
- h) If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle $< 98\%$), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
- i) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.



A1.3 Measurement results

CDMA 800

Measurement result

Channel	Frequency (MHz)	Channel power(dBm)		
		1x RTT	1xEVDO	
			Rel 0	Rev A
1013	824.70	24.01	24.36	24.27
384	836.52	23.92	24.29	24.32
777	848.31	23.94	24.25	24.37

A.2 FREQUENCY STABILITY

A.2.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of Agilent 8960(E5515C) Wireless Communications Test Set.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -10°C.
3. With the EUT, powered via nominal voltage, connected to the 8960(E5515C) and in a simulated call on channel 384 for CDMA 800. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the 8960(E5515C) and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10°C decrements from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.2.2 Measurement Limit

A.2.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6VDC and 4.2VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.

For CDMA800, according to section. 22.355, frequency tolerance can be maintained within 2.5ppm.

A.2.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent



of the nominal value for other than hand carried battery equipment.

For CDMA800, according to section. 22.355, frequency tolerance can be maintained within 2.5ppm.



A.2.3 Measurement results

CDMA 800

Frequency Error vs Voltage

Voltage(V)	Frequency error (Hz)	Frequency error(ppm)
3.6	-2.53	0.0030
3.8	-6.86	0.0082
4.2	-4.22	0.0050

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)	Frequency error(ppm)
-10	-4.95	0.0059
0	-5.02	0.0060
10	-4.80	0.0057
20	-3.03	0.0036
30	-2.64	0.0032
40	4.32	0.0052
50	2.91	0.0035

A.3 OCCUPIED BANDWIDTH

A.3.1 Occupied Bandwidth Results

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the CDMA frequency band. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

CDMA 800 (99% BW)

Channel	Occupied Bandwidth (99% BW) (MHz)
1013	1.267
384	1.273
777	1.267

ANALYZER SETTINGS: RBW=20 kHz, VBW=100 kHz

CDMA 800

Channel 1013-Occupied Bandwidth (99% BW)




Date: 16.JUL.2019 11:19:05

Channel 384-Occupied Bandwidth (99% BW)



Date: 16.JUL.2019 11:20:41

Channel 777-Occupied Bandwidth (99% BW)

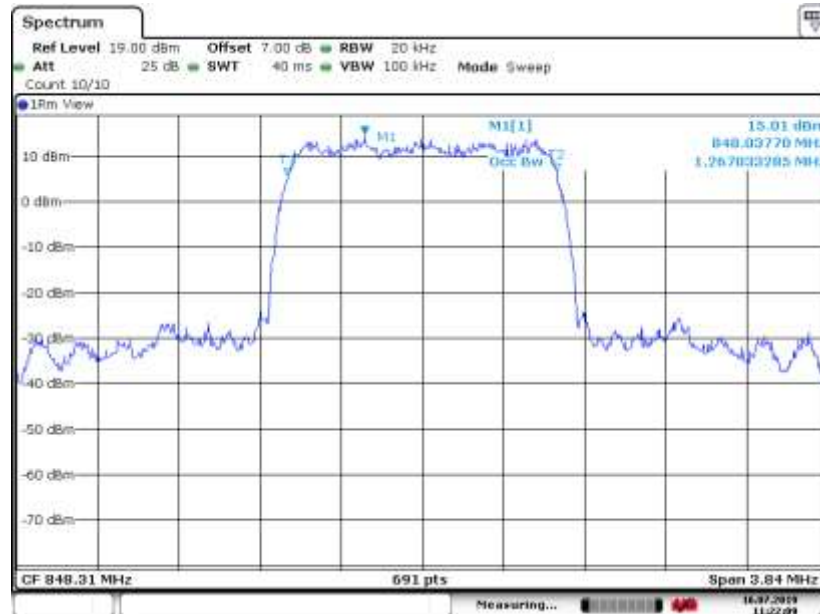

Date: 16.JUL.2019 11:22:09

A.4 EMISSION BANDWIDTH

A.4.1 Emission Bandwidth Results

Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the CDMA 800. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.


CDMA 800 (-26dBc BW)

Channel	Emission Bandwidth (-26dBc BW) (MHz)
1013	1.412
384	1.417
777	1.417

ANALYZER SETTINGS: RBW=20 kHz, VBW=100 kHz


CDMA 800

Channel 1013-Emission Bandwidth (-26dBc BW)

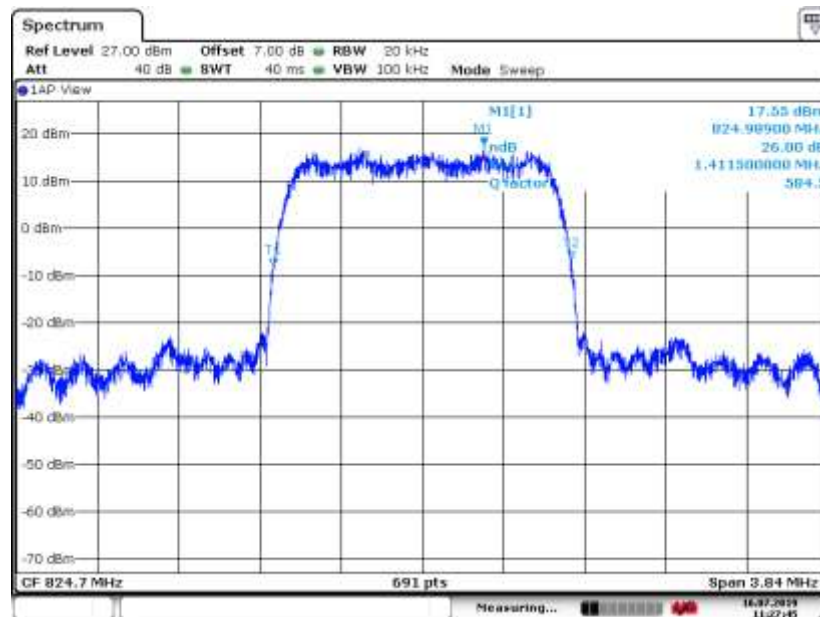


Date: 16.JUL.2019 11:27:45

Channel 384-Emission Bandwidth (-26dBc BW)

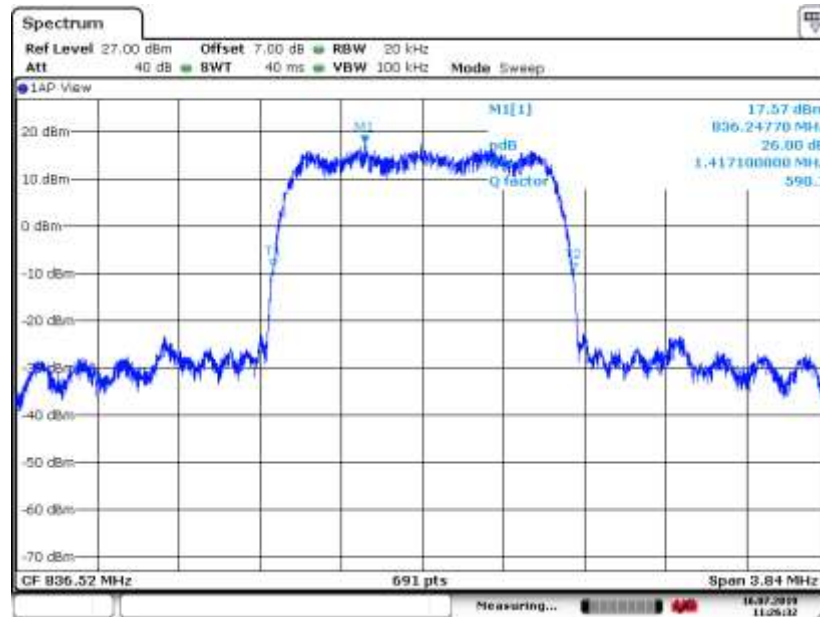

Date: 16.JUL.2019 11:26:32

Channel 777-Emission Bandwidth (-26dBc BW)

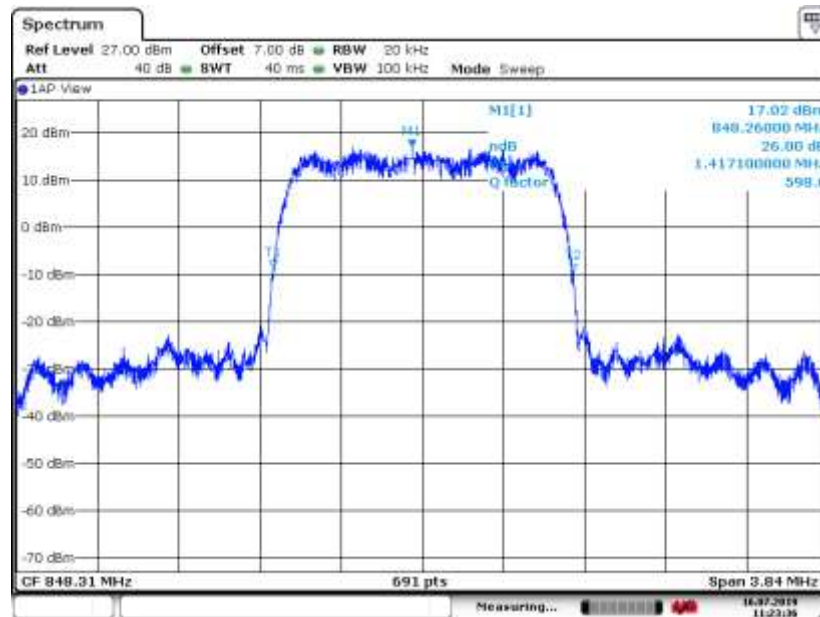


Date: 16.JUL.2019 11:23:37

A.5 BAND EDGE COMPLIANCE

CDMA 800

BAND EDGE BLOCK-Channel 1013

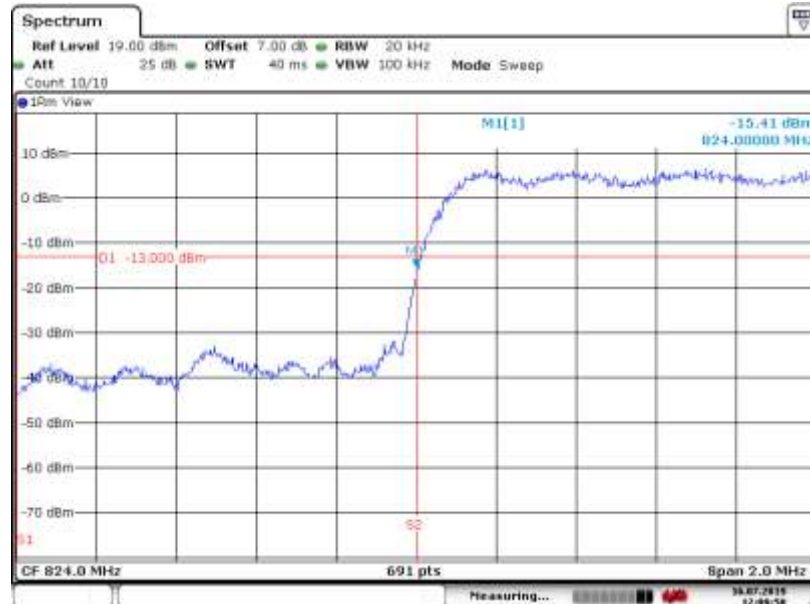

Date: 16.JUL.2019 12:09:49

BAND EDGE BLOCK-Channel 777



Date: 16.JUL.2019 12:07:37



A.6 CONDUCTED SPURIOUS EMISSION

A.6.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.
2. Determine EUT transmit frequencies below outlines the band edge frequencies pertinent to conducted emissions testing.

CDMA 800 Transmitter

Channel	Frequency (MHz)
1013	824.70
384	836.52
777	848.31

A. 6.2 Measurement Limit

On any frequency outside frequency band of the US PCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.


A. 6.3 Measurement result

CDMA 800

A. 6.3.1 Channel 1013: 30MHz –1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

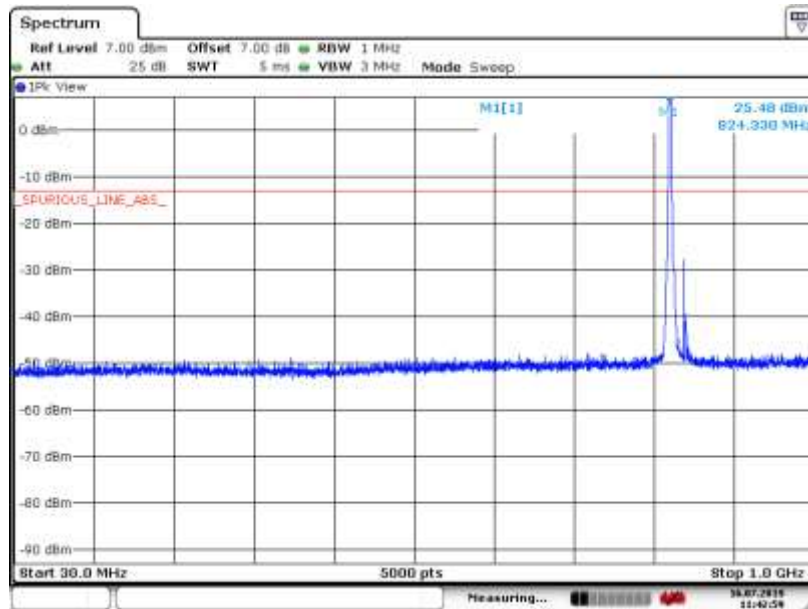

Date: 16.JUL.2019 11:42:59

A. 6.3.2 Channel 1013: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

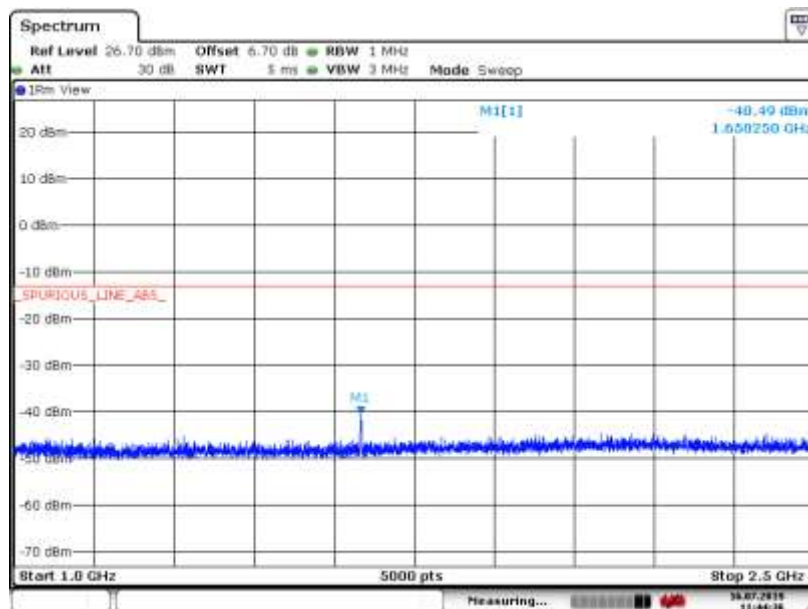

Date: 16.JUL.2019 11:44:37

A. 6.3.3 Channel 1013: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

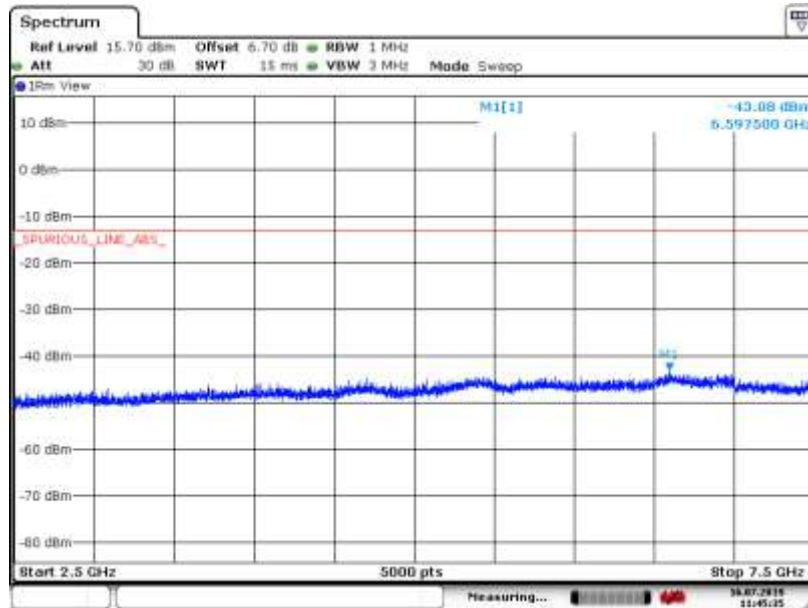

Date: 16.JUL.2019 11:45:36

A. 6.3.4 Channel 1013: 7.5GHz – 10GHz

Spurious emission limit –13dBm.

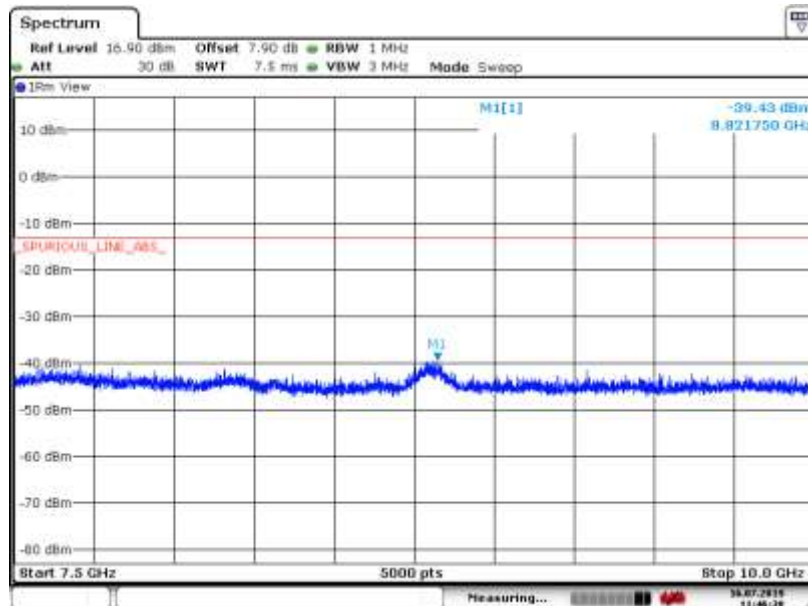


Date: 16.JUL.2019 11:46:39

A. 6.3.5 Channel 384: 30MHz –1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

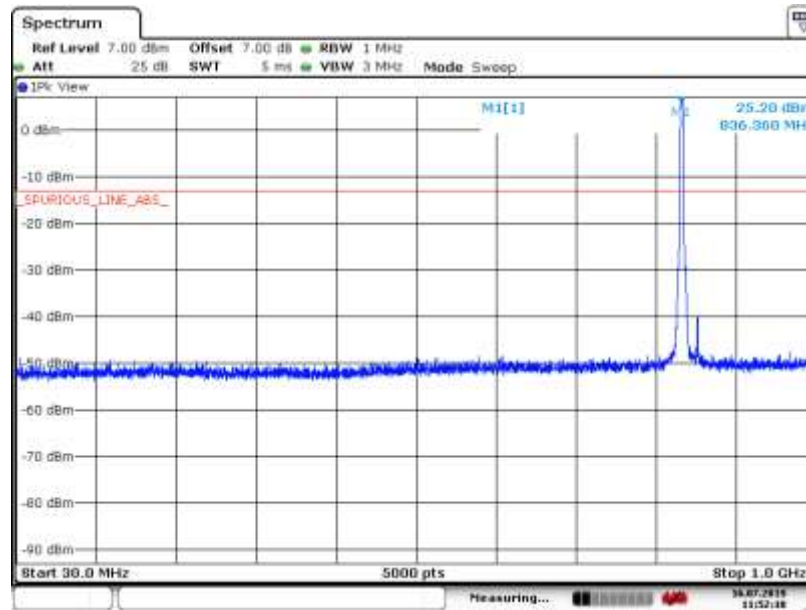

Date: 16.JUL.2019 11:52:10

A.6.3.6 Channel 384: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

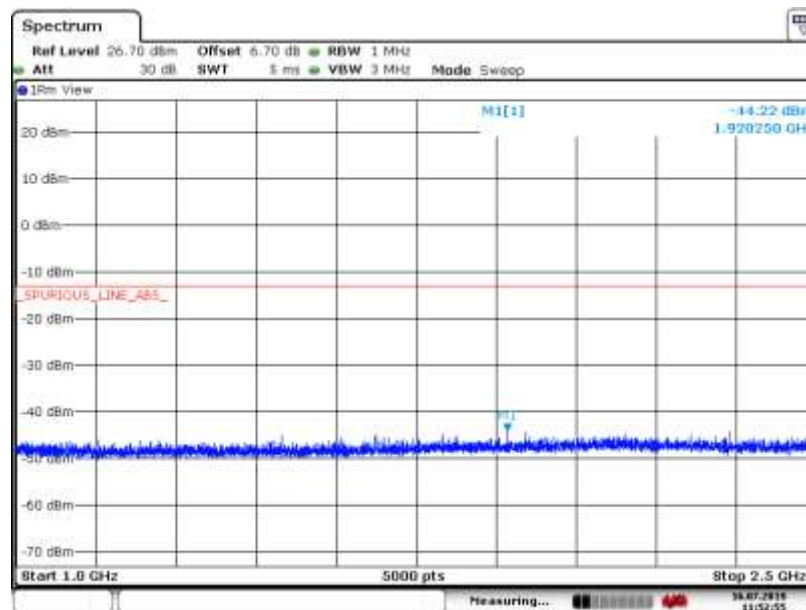

Date: 16.JUL.2019 11:52:55


A. 6.3.7 Channel 384: 2.5GHz –7.5GHz

Spurious emission limit –13dBm.

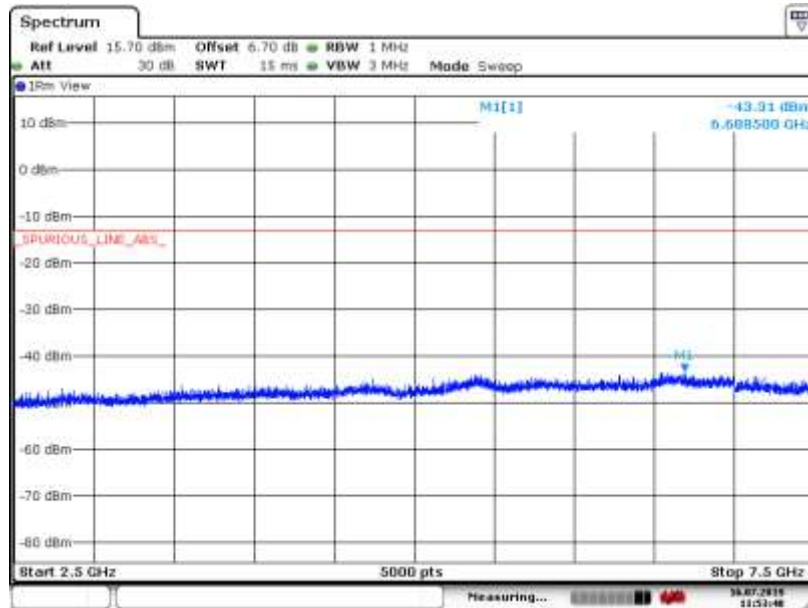

A. 6.3.8 Channel 384: 7.5GHz – 10GHz


Spurious emission limit –13dBm.

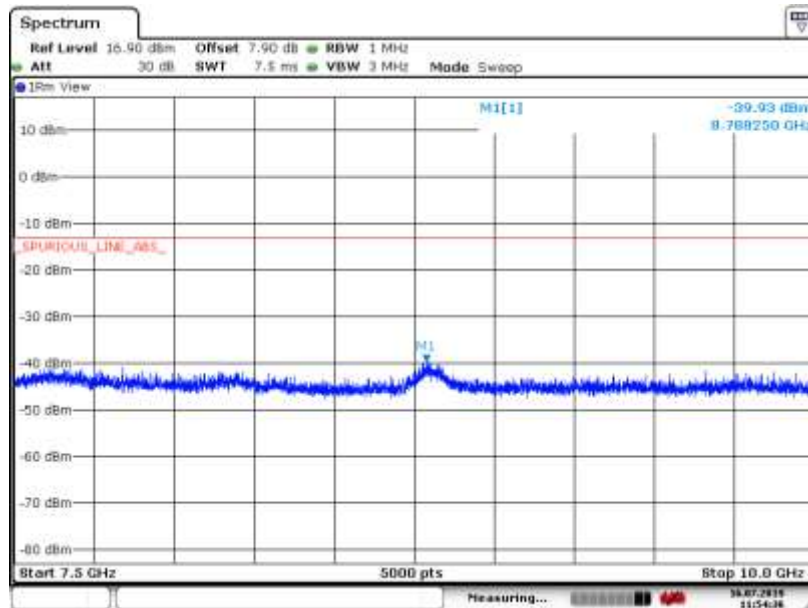

A. 6.3.9 Channel 777: 30MHz –1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

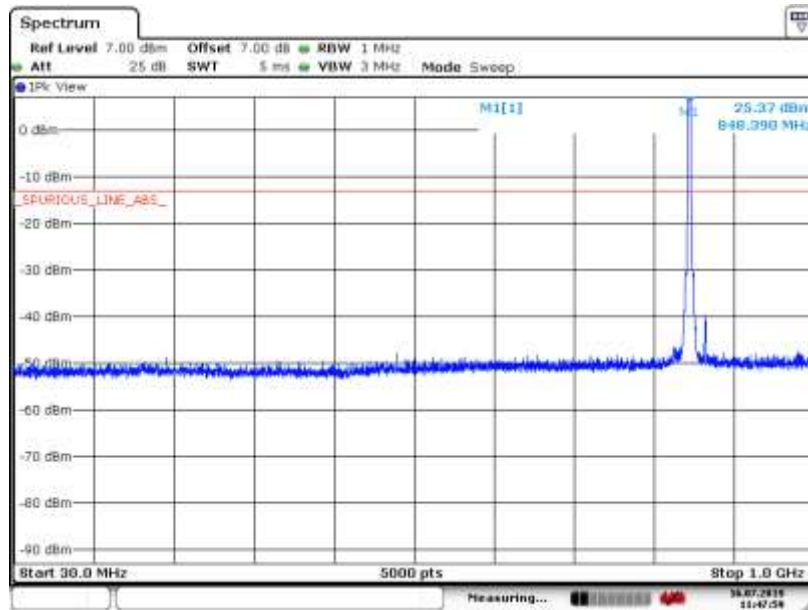

Date: 16.JUL.2019 11:47:59

A. 6.3.10 Channel 777: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

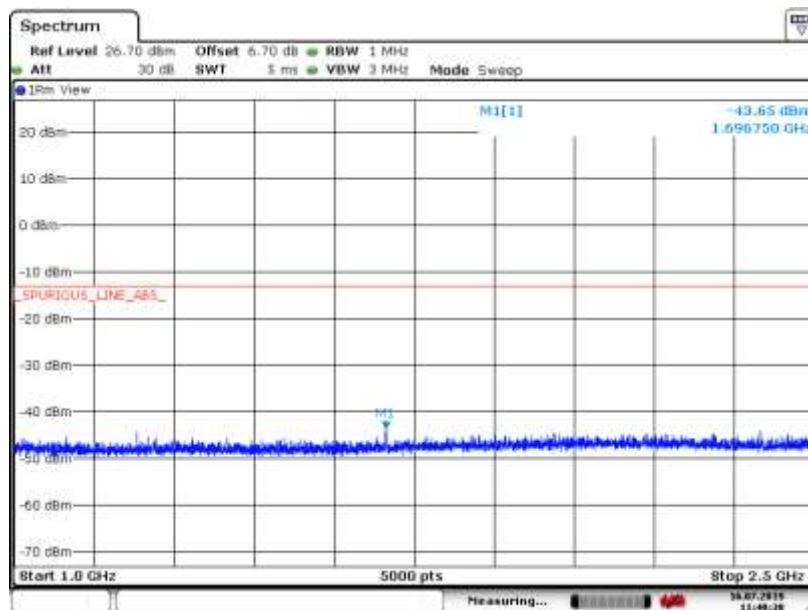

Date: 16.JUL.2019 11:49:30

A. 6.3.11 Channel 777: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

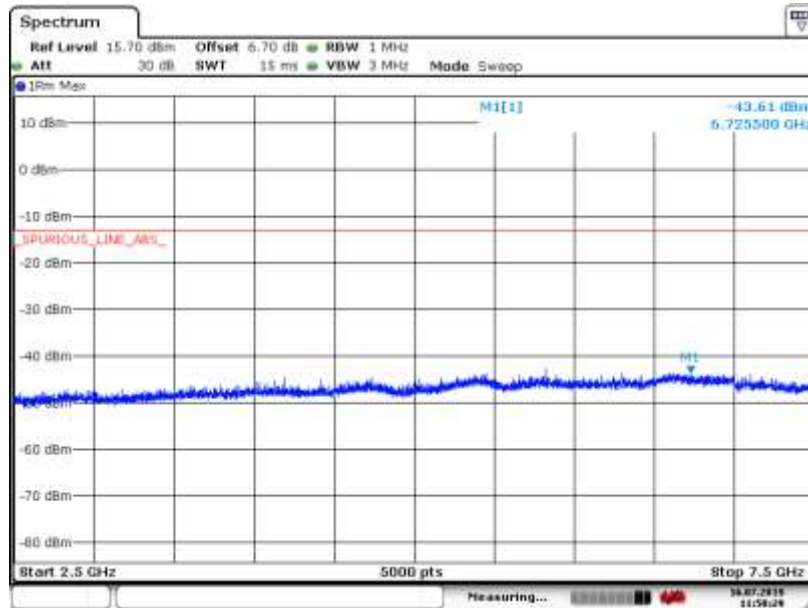

Date: 16.JUL.2019 11:50:29

A. 6.3.12 Channel 777: 7.5GHz – 10GHz

Spurious emission limit –13dBm.

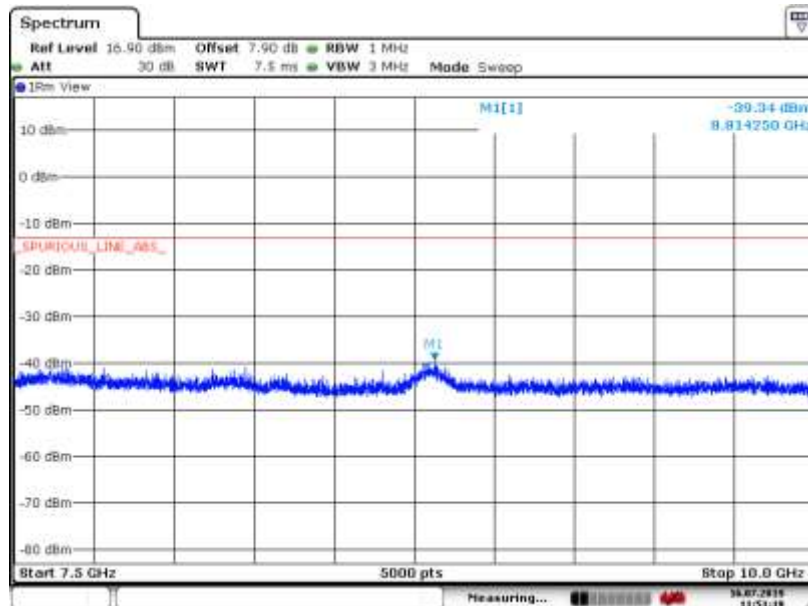

Date: 16.JUL.2019 11:51:20

ANNEX B: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p>  <hr/>	
<p>Certificate of Accreditation to ISO/IEC 17025:2005</p> <hr/>	
<p>NVLAP LAB CODE: 600118-0</p>	
<p>Telecommunication Technology Labs, CAICT Beijing China</p>	
<p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p>	
<p>Electromagnetic Compatibility & Telecommunications</p>	
<p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009).</i></p>	
<hr/> <p>2018-09-28 through 2019-09-30 <i>Effective Dates</i></p>	 <div style="display: flex; align-items: center; justify-content: center;"><div style="margin-left: 10px;"><hr/><p><i>For the National Voluntary Laboratory Accreditation Program</i></p></div></div>

END OF REPORT