

English

Product Highlights::

The X series LED video light has stable light source, high CRI/TLCI and powerful lens. It is suitable for video shooting, studio shooting, still life shooting, and interviewing etc. It comes with 2.4G remote controller which supports group control, brightness control and EFFECT functions adjustment.

Product Highlights::

- | | |
|--|--|
| <p>high brightness and stable LED bead l up to 96. R9 up to 90. TLCl (Qa) up to 95. mes with 6 groups, 2.4G wireless remote controller which supports less brightness adjustment of each light 15V input. Optional battery plate to support NP battery, such as -F970/NP-F750/NP-F550 -F970/NP-F750/NP-F550 ge LCD screen accurately shows the status of the light. Parameters are omatically saved. specially designed lamp bead protection cover to avoid damage caused by touch or ision ult-in high-efficiency thermal module with temperature control protection for extended at life ndardized Bowens mount design offers you a variety of lighting control requirements, ily operated and highly versatile. port multi-light and multi-remote control mode, any light or controller adjustment can ynchronized to all the lights in the same channel and same group ight effects, inspire creativity</p> | <p>04 —</p> <p>05 —</p> <p>X60 L</p> <p>01 —</p> |
|--|--|



ARNING

- | | |
|---|----------------|
| do not face the light directly when the light is on. | 07. Location |
| do not place any object on the light or flow liquid into its interior. | 08. Power |
| do not block the vents during use to avoid affecting heat dissipation or further damage to the light. | 09. Cleaning |
| the surface temperature of the lamp is high after the lamp is lit for a long time, please be careful! | 10. Transport |
| this light has a temperature protection function. When the temperature of the light is higher than 65°C, the Temperature Icon flashes. When the temperature of the light is higher than 70°C, the brightness of the light will be limited to a maximum of 20% brightness. | 11. Effect |
| do not touch the light with wet hands, nor immerse the light in water or expose it to rain. | 12. Components |
| do not disassemble or modify the product. If the product is damaged due to falling or other accidents, please send the product to a factory-authorized repair center for inspection and repair. | 13. Breakdown |
| | 14. Product |

- is mount

- tion cover
- handle
- ight
- e
- handle
- creen
- input port (DC15V)
- P button
- r/LOCK button
- CT button
- utton
- ness wheel / SET butt
- switch




01. LCD

- 02. Power switch
- 03. CCT button
- 04. EFFECT button
- 05. CH/GP button
- 06. Trigger/LOCK button
- 07. SET button
- V) 08. + button
- 09. - button

-
- 01
- 02

Connect the light to the adapter which is connected to the AC power supply.
Press the ON/OFF button to start the light and the LCD screen displays the light's current information.







- 
- Press CCT button to enter CCT Mode




- CCT
- 
- Press CCT button
to enter CCT Mode

Press EFFECT button to enter EFFECT Mode, LCD screen displays EFFECT Mode. EFFECT Mode brightness adjustable range: 10% to 100%. Short press Trigger/LOCK button in EFFECT Mode to trigger or pause effect functions, Short press SET button in EFFECT mode to switch brightness and frequency.



- In CCT mode, press Trigger / LOCK button for 3 seconds to lock all buttons, the screen displays the lock icon. It can prevent mishandling. Press Trigger/Lock button for another 3 seconds to unlock all buttons.
- 
- In CCT mode, press Trigger / LOCK button for 3 seconds to lock all buttons
- 
- In EFFECT mode, press Trigger/LOCK button, the Freq icon  displays, the effect of the light pause; press Trigger/LOCK button again to restart.
- 
- Press Trigger / LOCK button for 3 seconds, LCD screen displays LOCK icon, all buttons will be locked. Press Trigger / LOCK button for 3 seconds again, all buttons will be unlocked.


This product has 2.4G wireless control function. It can control 6 groups and 12 channels of lights at the same time. Before use, please align the group / channel of the light and the remote controller.

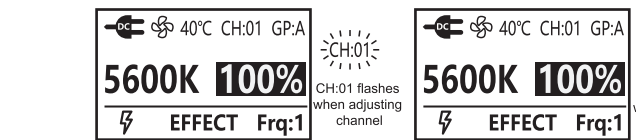

Press CCT button to make sure the light is in CCT Mode.


Press CH/GP button, when the GP icon flashes, change the group by pressing "+" / "-" button.

Press CH/GP button 2 times, when the CH icon flashes, change the channel by pressing "+" / "-" button.



- The brightness of the light can be adjusted by pressing "+" / "-" button when the light is in CCT Mode. The "+" / "-" button can be used to adjustment other functions.

| | |
|------------------------------|---|
| LED Video Light | FLASHOOT X60 |
| AC power supply | DC15V, 6A adapter (AC100-240V 50/60Hz) |
| Channel | 12 |
| Group | Group 6 (A, B, C, D, E, F) |
| Power | 60W |
| Color temperature | 5600K±200K |
| CRI | > 96 |
| R9 | 90 |
| TLCI(Qa) | > 95 |
| Dimming range | adjustment brightness mode 1%-100% effect mode 10%-100% |
| Operating temperature | -10 to 50 degrees |
| LED beads safety temperature | ≤70°C |
| Size | 173.7 x 122.5 x 201.0mm (without) |
| Remote controller size | 56.0 x 135.0 x 15.0mm |
| Net weight | approx. 1.61kg |

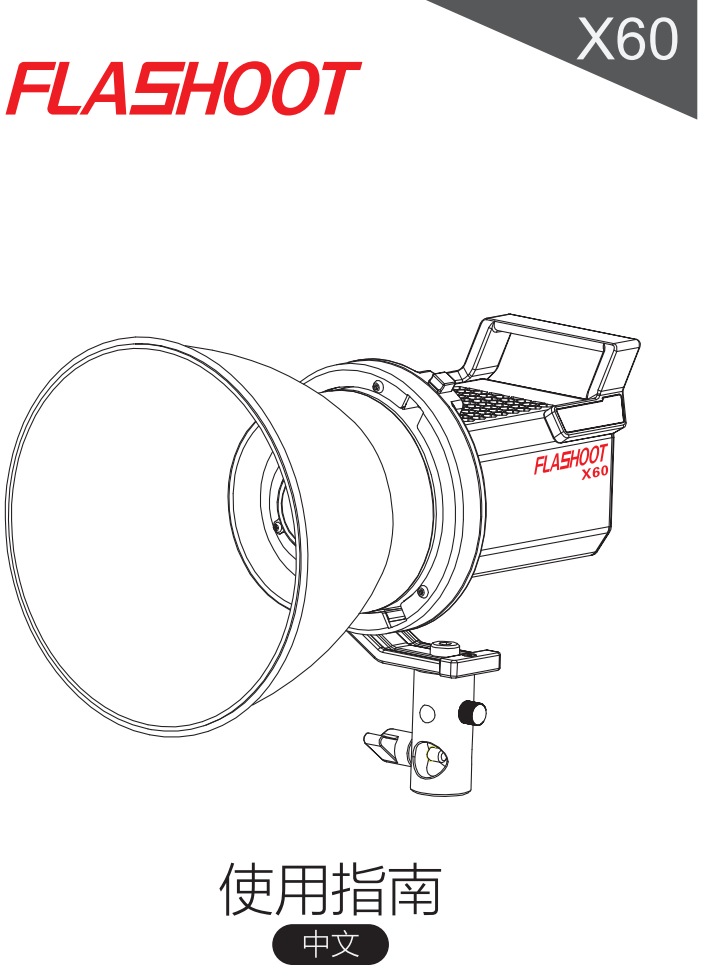

X60

前言

感谢您购买 FLASHSHOOT 产品！

X 系列摄影灯光源稳定，显色性好，功能强大，非常适用于视频拍摄、影棚拍摄、静物拍摄、以及采访布光等。配备专用 2.4G 遥控器，可无线分组调光，无线调节亮度，功能丰富，操作便捷。

产品具有以下亮点：



- 60W 大功率 LED 灯珠亮度高，光源稳定
- 显色指数高达 96 以上，R9 高达 90 以上，TLCI(Qa)>95，真实还原物体色彩
- 标配 2.4G 无线遥控器，无线调节各组亮度
- DC15V 输入。选配电池供电盒，可支持 NP 电池供电
- 大液晶屏精准显示，参数自动保存
- 专门设计灯珠保护罩，避免灯珠因触摸、碰撞引起损坏
- 内置高效散热模组，具有温度控制保护，延长灯珠使用寿命
- 通用保荣卡口设计 兼容性强 可以拓展外接更多可控光效附件 轻松实现各种创意
- 支持多灯多遥控器互联互通的控制模式，同一频道同一组的灯跟遥控器，调整任意一台设备即可同步控制所以同频道同组别的所有设备
- 预设 5 种光效 激发创意灵感



注意事项


- △ 当摄影灯点亮时、请勿直视。
- △ 切勿将任何物体置于灯具上或使液体流入其内部。
- △ 在使用过程中，通风孔切勿有遮挡物，以免影响散热，导致设备损坏，长时间使用灯具时，灯具表面温度较高，请注意防烫。
- △ 此机有温度保护功能，当温度过高 (>65°C 时、温度图标闪烁，>70°C 时，进入保护状态，限定最高亮度 20%)，当温度降低后恢复正常。
- △ 请勿用湿手接触产品，亦不可将产品浸入水中或暴露于雨中。
- △ 请勿拆卸或改造产品。若本产品因为摔落或其他意外事故造成破损，请将产品送至厂家授权的维修中心进行检查维修。

部件

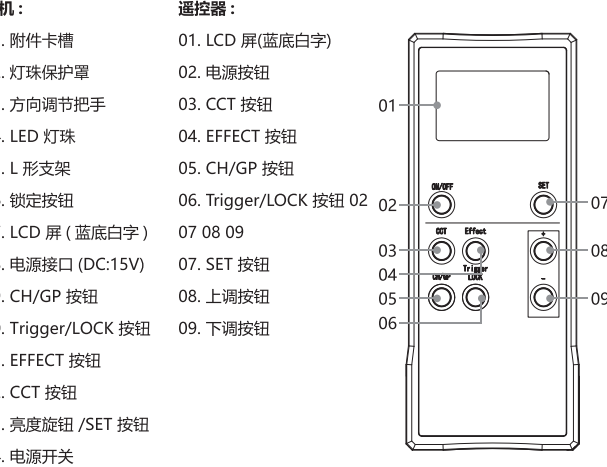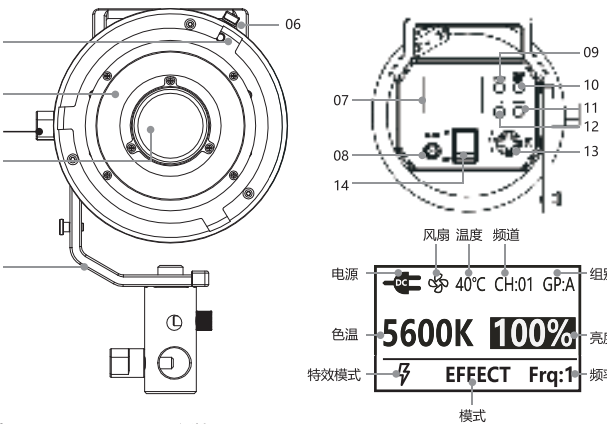


1、开始使用摄影灯

将灯具与适配器连接，适配器连接 AC 电源。按 ON/OFF 按钮，摄影灯开始发光 LCD 显示主机当前信息

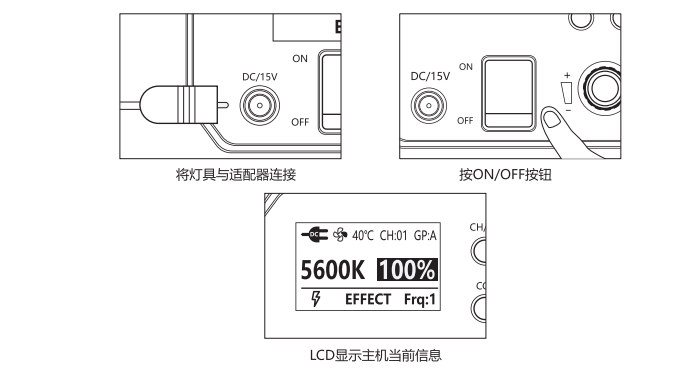


2、CCT 模式调节

按 CCT 进入 CCT 模式，LCD 屏显示 CCT 模式。旋转主机上的调节旋钮可对亮度进行调整。亮度可调节范围：1%~100%

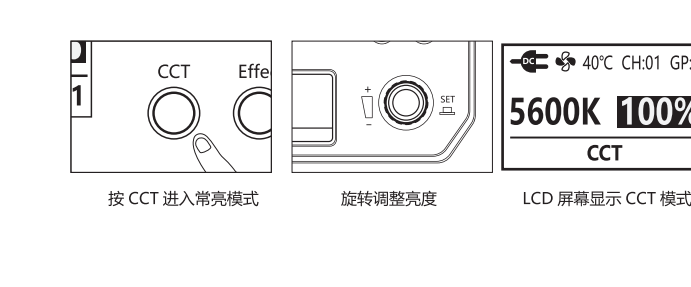


3、Effect 特效模式

按 EFFECT 进入特效模式，LCD 屏显示 EFFECT 模式。亮度可调节范围：10%~100%。在 Effect 模式下短按 Trigger / LOCK 暂停或触发特效灯光。在 Effect 模式下短按 SET 键切换亮度跟 频率参数调整。

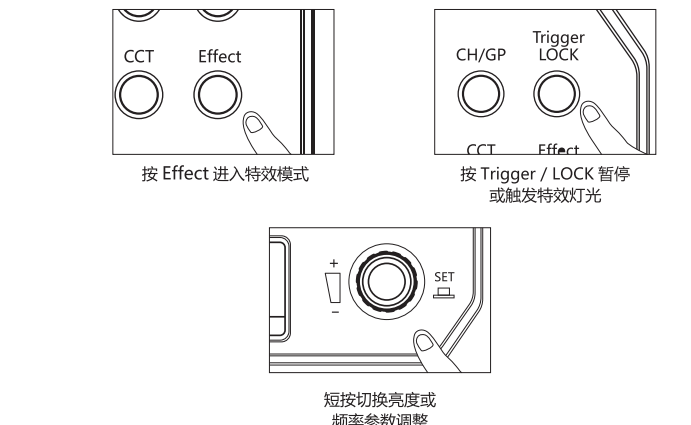


4、按键锁定设置

长按 Trigger / LOCK 键 3 秒锁定所有按键，屏幕显示锁定图标、防止误操 再长按 3 秒或重新开机解锁。

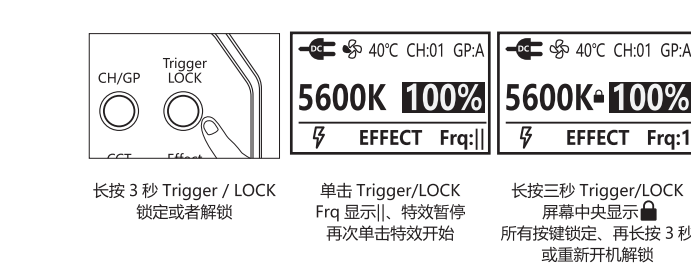


5、频道 / 组别匹配

本产品具备无线遥控功能，使用 2.4G 无线技术，无视角限制，距离远，可同时分别控制 6 组摄影灯。12 组传输频道，抗干扰能力强。使用前请把摄影灯主机和遥控器的频道与组别调至一致。

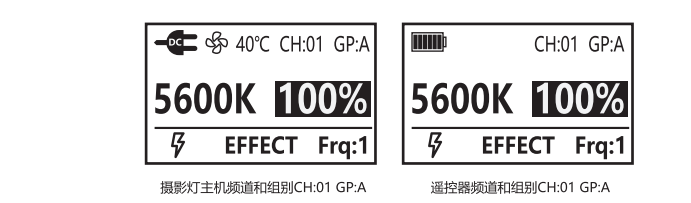


6、X60 主机频道 / 组别调整

在 CCT 模式时，按 CH/GP 按钮，此时组别闪烁，旋转调节旋钮可选择组别 (A~F) 在常态时，按 CH/GP 按钮 2 次，此时频道闪烁，旋转调节旋钮可选择频道 (1~12)T

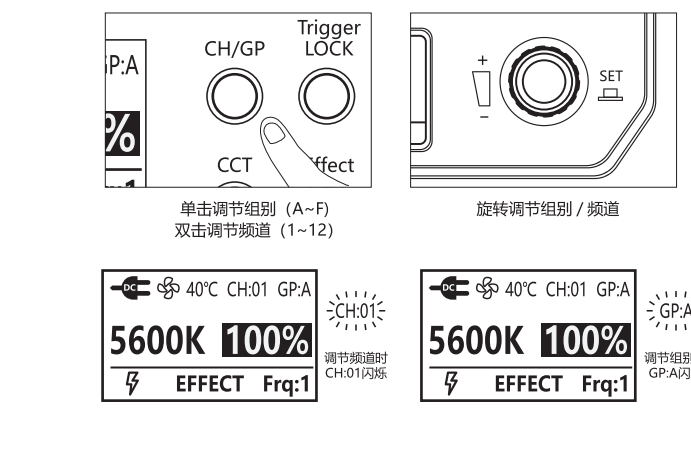


7、遥控器频道 / 组别调整

在 CCT 模式时，按 CH/GP 按钮，此时组别闪烁，按加减按钮可选择组别 (A~F)；在常态时，按 CH/GP 按钮 2 次，此时频道闪烁，按加减按钮可选择频道 (1~12)；

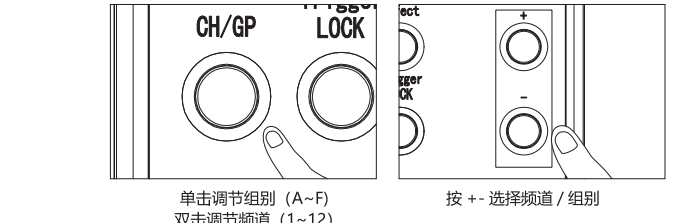

8、遥控器操作

在 CCT 模式时，按 "-" "+" 按钮可对亮度调整。在 CCT 模式时、其他按键功能与主机相同。

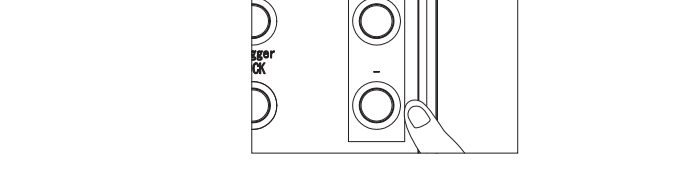

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that

interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

The device has been evaluated to meet general RF exposure requirement, the device can be used in portable exposure condition without restriction