

Powercore Technology Co., Ltd.

RF TEST REPORT

Report Type:

FCC Part 15.225 & ISSED RSS-210 RF report

Model:

AC003PT119, AC003PNA7, AC003PNA9,
AC003PNA11, AC003PNA19

REPORT NUMBER:

240200758SHA-001

ISSUE DATE:

May 13, 2024

DOCUMENT CONTROL NUMBER:

TTRF15.225_V1 © 2018 Intertek



Applicant: Powercore Technology Co., Ltd.
4th Floor, Jiangsu Science and Technology Finance Building, No.21 Andemen
Street, Yuhuatai District, Nanjing City, Jiangsu Province, P.R. China

Manufacturer: Powercore Technology Co., Ltd.
4th Floor, Jiangsu Science and Technology Finance Building, No.21 Andemen
Street, Yuhuatai District, Nanjing City, Jiangsu Province, P.R. China

Factory: Powercore Technology Co., Ltd.
Zone A, No.1 Yuansi Road, Jiangbei New District, Nanjing City, Jiangsu Province,
P.R. China

FCC ID: 2A98K-AC003P

IC: 30675-AC003P

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2023): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2020): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

RSS-210 Issue 10 (December 2019): Licence-Exempt Radio Apparatus: Category I Equipment

RSS-Gen Issue 5, Amendment 1 (March 2019): General Requirements for Compliance of Radio Apparatus

PREPARED BY:

REVIEWED BY:




Project Engineer
Sky Yang

Reviewer
Eric Li

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY.....	4
MEASUREMENT RESULT SUMMARY	5
1 GENERAL INFORMATION	6
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	6
1.2 TECHNICAL SPECIFICATION.....	6
1.3 DESCRIPTION OF TEST FACILITY.....	7
2 TEST SPECIFICATIONS.....	8
2.1 STANDARDS OR SPECIFICATION	8
2.2 MODE OF OPERATION DURING THE TEST	8
2.3 TEST SOFTWARE LIST	8
2.4 TEST PERIPHERALS LIST.....	8
2.5 TEST ENVIRONMENT CONDITION:.....	8
2.6 INSTRUMENT LIST	9
2.7 MEASUREMENT UNCERTAINTY.....	10
3 FUNDAMENTAL EMISSION	11
3.1 LIMIT	11
3.2 MEASUREMENT PROCEDURE	11
3.3 TEST CONFIGURATION	12
3.4 TEST RESULTS OF FUNDAMENTAL EMISSIONS	13
4 SPURIOUS EMISSION	14
4.1 LIMIT	14
4.2 MEASUREMENT PROCEDURE	14
4.3 TEST RESULTS OF RADIATED EMISSIONS	16
5 CONDUCTED EMISSIONS	19
5.1 LIMIT	19
5.2 TEST CONFIGURATION	19
5.3 MEASUREMENT PROCEDURE	20
5.4 TEST RESULTS OF CONDUCTED EMISSIONS.....	21
6 ANTENNA REQUIREMENT.....	23

Revision History

Report No.	Version	Description	Issued Date
240200758SHA-001	Rev. 01	Initial issue of report	May 13, 2024

Measurement result summary

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
Fundamental emission	15.225(a) (b) (c)	RSS 210 B.6	Pass
Spurious emission	15.225(d)	RSS 210 B.6	Pass
Frequency stability	15.225(e)	RSS 210 B.6	NT
Conducted emissions	15.207	RSS-Gen Issue 5 Clause 8.8	Pass
99% and 20dB Bandwidth	15.215(c)	RSS-Gen Issue 5 Clause 6.6	NT
Antenna requirement	15.203	RSS-GEN 6.8	Pass

Notes: 1: NA =Not Applicable

2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

TEST REPORT

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	AC Electric Vehicle Charging Station
Type/Model:	AC003PT119, AC003PNA7, AC003PNA9, AC003PNA11, AC003PNA19
Description of EUT:	The EUT is an electric vehicle AC charger. It contains two certified modules. The LTE module FCC ID is XMR201903EG25G, the LTE module IC is 10224A-201903EG25G. The WIFI/Bluetooth module FCC ID is 2AC7Z-ESPWROOM32UE, the WIFI/Bluetooth module IC is 21098-ESPWROOMUE. AC003PNA7, AC003PNA9, AC003PNA11 and AC003PNA19 are electrically identical except the rated power. The difference between AC003PT119 and AC003PNA19 is the charging gun. We test the new model AC003PNA19 as representative and list the result in this report.
Rating:	AC003PNA7: 208/240VAC, 50/60Hz, 32A Max AC003PNA9: 208/240VAC, 50/60Hz, 40A Max AC003PNA11: 208/240VAC, 50/60Hz, 48A Max AC003PT119, AC003PNA19: 208/240VAC, 50/60Hz, 80A Max
Category of EUT:	Class A
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Software Version:	-
Hardware Version:	-
Serial numbers:	A240303-03
Sample received date:	March 4, 2024
Date of test:	March 18, 2024

1.2 Technical Specification

Frequency Range:	13.56 MHz ~ 13.56 MHz
Modulation:	ASK
Antenna:	PCB antenna

TEST REPORT**1.3 Description of Test Facility**

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Member No.: 3598 (Registration No.: R-14243, G-10845, C-14723, T-12252)
	A2LA Accreditation Lab Certificate Number: 3309.02

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2023)

ANSI C63.10 (2020)

RSS-210 Issue 10 (December 2019)

RSS-Gen Issue 5, Amendment 1 (March 2019)

2.2 Mode of operation during the test

While testing, the internal modulation and continuously transmission was applied.

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	SKET Auto EMC Test Software	Keleto	V3.0
Radiated emission	SKET Auto EMC Test Software	Keleto	V3.0

2.4 Test peripherals list

Item No	Description	Band and Model	S/No

2.5 Test environment condition:

Test items	Temperature	Humidity
Radiated emission	26°C	53% RH
Power line conducted emission	27°C	53% RH

TEST REPORT

2.6 Instrument list

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESR7	EC 6194	2025-02-07
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2024-11-19
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2025-01-10
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2024-08-24
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112B	EC 6411	2024-09-12
<input type="checkbox"/>	Active loop antenna	Schwarzbeck	FMZB1519	EC 5345	2024-07-16
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2024-07-08
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input type="checkbox"/>	Spectrum Analyzer	Keysight	N9030B	EC 6078	2024-06-15
<input type="checkbox"/>	Vector Signal Generator	Agilent	N5182B	EC 5175	2025-03-04
<input type="checkbox"/>	Universal Radio Communication Tester	R&S	CMW500	EC5944	2025-03-04
<input type="checkbox"/>	MXG Analog Signal Generator	Agilent	N5181A	EC 5338-2	2025-03-04
<input type="checkbox"/>	Climate chamber	GWS	MT3065	EC 6021	2025-03-04
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Thermo-Hygrograph	Testo	175h1	EC 6640	2024-08-28
<input checked="" type="checkbox"/>	Thermo-Hygrograph	Testo	175h1	EC6642	2024-08-28

TEST REPORT

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Frequency	Expanded Uncertainty (k=2)
Conducted emission at mains ports	9kHz ~ 150kHz	3.52 dB
	150kHz ~ 30MHz	3.19 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	3.06 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.02 dB
	6GHz ~ 18GHz	5.28 dB

TEST REPORT

3 Fundamental Emission

Test result: Pass

3.1 Limit


Frequencies (MHz)	Limit at 30m (dBuV/m)	Limit at 3m (dBuV/m)
13.110 – 13.410	40.50	80.50
13.410 – 13.553	50.50	90.50
13.553 – 13.567	84.00	124.00
13.567 – 13.710	50.50	90.50
13.710 – 14.010	40.50	80.50

3.2 Measurement Procedure

- The EUT was placed on a 0.8m plank above the ground at a 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to PK Detect Function and Specified Bandwidth with Maximum Hold Mode.


NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

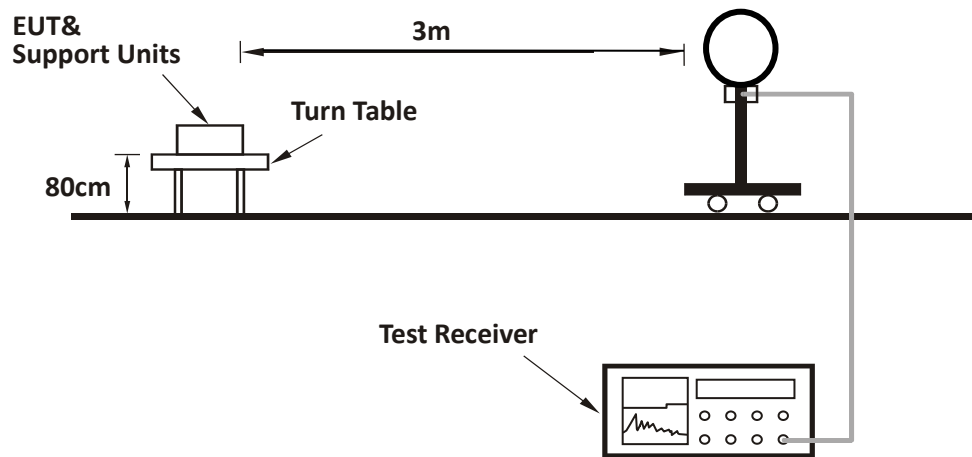TEST REPORT**3.3 Test Configuration**

TEST REPORT

3.4 Test Results of Fundamental Emissions

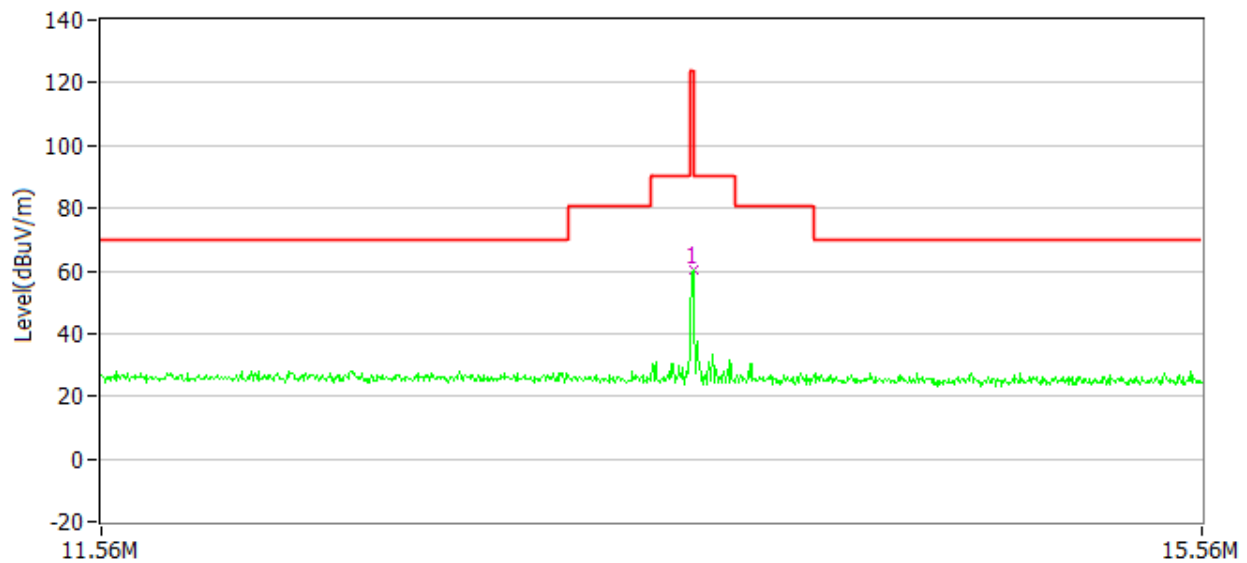

Antenna Polarization	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin	Detector
X	13.56	60.1	20.4	124.00	63.9	PK
Y	13.56	59.0	20.4	124.00	65.0	PK

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.

2. Corrected Reading = Original Receiver Reading + Correct Factor

3. Margin = Limit - Corrected Reading

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB, Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV, Limit = 40.00dBuV/m.

Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20\text{dB/m}$;

Corrected Reading = $10\text{dBuV} + 0.20\text{dB/m} = 10.20\text{dBuV/m}$;

Margin = $40.00\text{dBuV/m} - 10.20\text{dBuV/m} = 29.80\text{dB}$.

4 Spurious Emission

Test result: Pass

4.1 Limit

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

4.2 Measurement Procedure

For Radiated emission below 30MHz:

- The EUT was placed on a 0.8m plank above the ground at a 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz:

- The EUT was placed on a 0.8m plank above the ground at a 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

TEST REPORT

- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:



- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- 3. All modes of operation were evaluated and the worst-case emissions were reported

TEST REPORT

4.3 Test Results of Radiated Emissions

The EUT has been tested in all two orthogonal planes.

Below 30MHz:

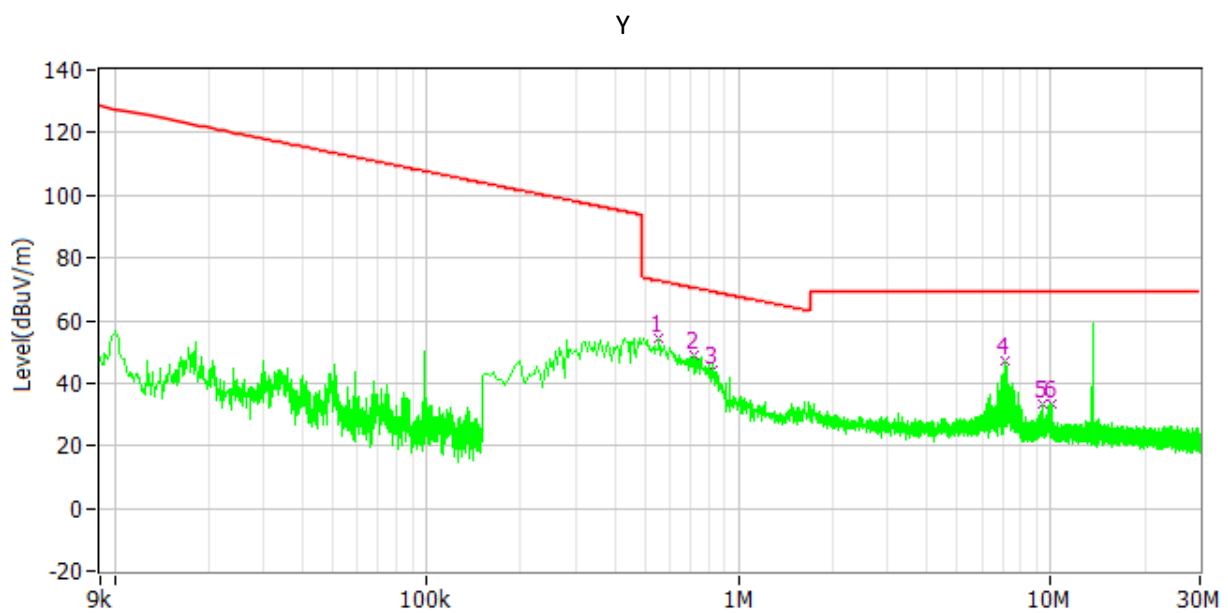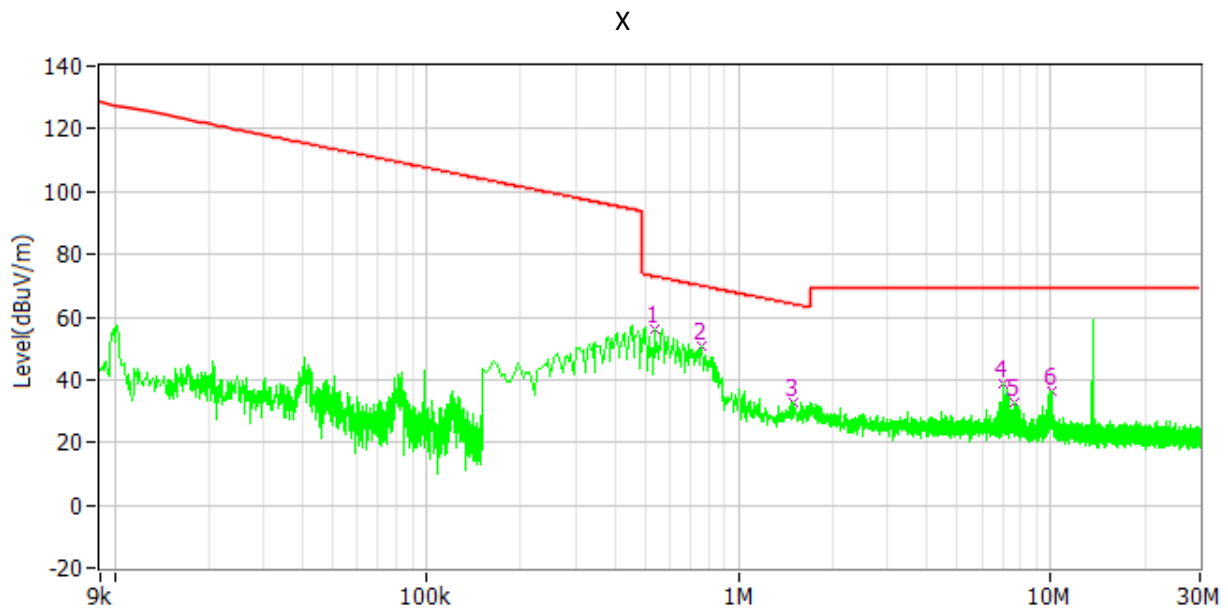


TEST REPORT

Test data below 30MHz:


Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta	Detector	Polarity
541.500kHz	72.9	55.9	-17.0	PK	X
757.500kHz	70.0	50.9	-19.1	PK	X
1.491MHz	64.2	32.9	-31.3	PK	X
7.058MHz	69.5	38.7	-30.8	PK	X
7.647MHz	69.5	32.5	-37.0	PK	X
10.001MHz	69.5	36.5	-33.0	PK	Y
555.000kHz	72.7	54.1	-18.6	PK	Y
721.500kHz	70.4	48.7	-21.7	PK	Y
829.500kHz	69.2	44.0	-25.2	PK	Y
7.161MHz	69.5	47.2	-22.3	PK	Y
9.339MHz	69.5	33.3	-36.2	PK	Y
10.001MHz	69.5	33.4	-36.1	PK	Y

Above 30MHz:

H

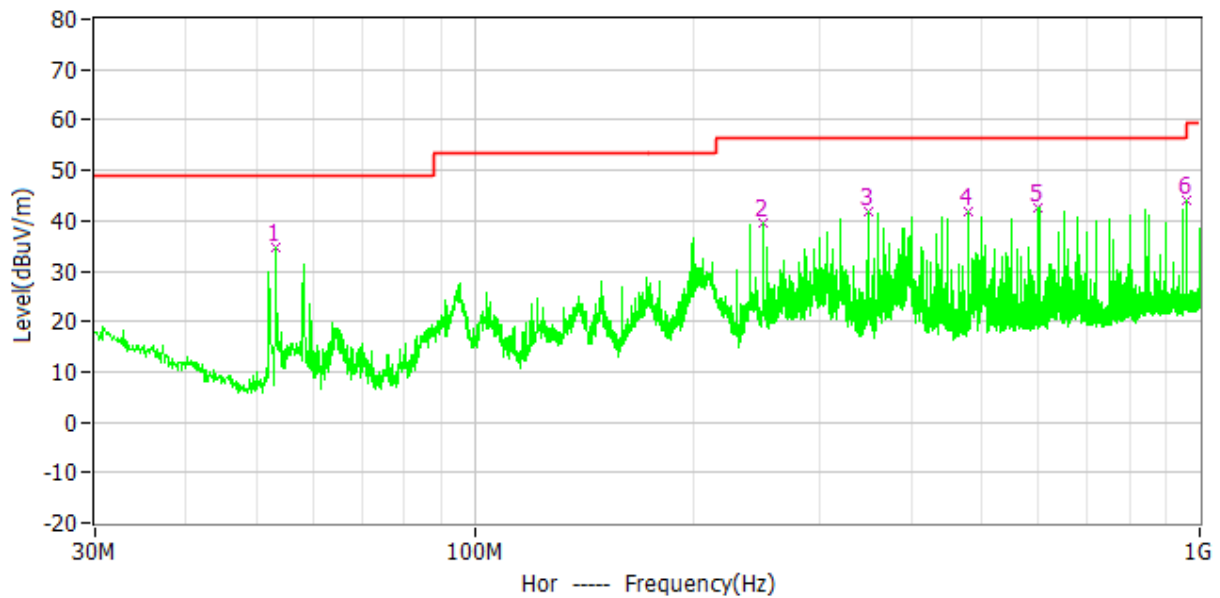

TEST REPORT

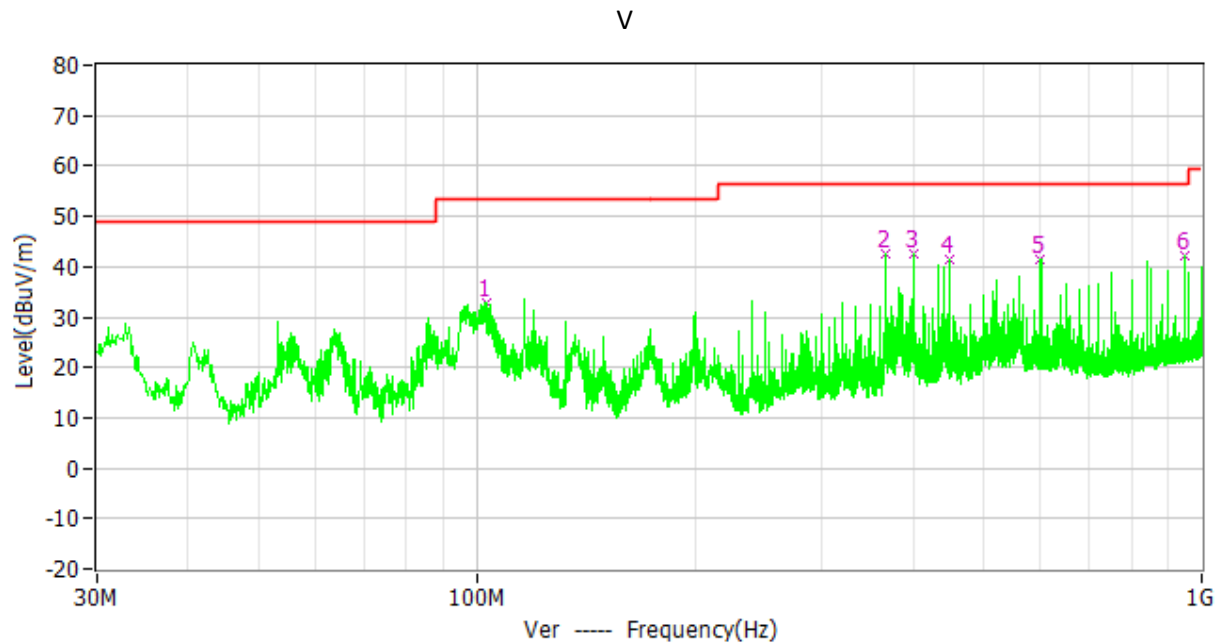

Test data from 30MHz to 1000MHz:

Antenna Polarization	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta	Detector
H	53.280MHz	49.0	34.8	-14.2	PK
H	249.996MHz	56.5	39.6	-16.9	PK
H	350.003MHz	56.5	41.8	-14.7	PK
H	479.983MHz	56.5	41.9	-14.6	PK
H	599.972MHz	56.5	42.6	-13.9	PK
H	960.036MHz	59.5	44.0	-15.5	PK
V	103.332MHz	53.5	32.8	-20.7	PK
V	366.008MHz	56.5	42.7	-13.8	PK
V	399.958MHz	56.5	42.4	-14.1	PK
V	450.010MHz	56.5	41.3	-15.2	PK
V	599.972MHz	56.5	41.6	-14.9	PK
V	950.045MHz	56.5	42.0	-14.5	PK

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.

2. Level = Original Receiver Reading + Correct Factor

3. Delta = Level - Limit

4. If the PK Level is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
Limit = 40.00dBuV/m.
Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;
Level = 10dBuV + 0.20dB/m = 10.20dBuV/m;
Delta = 10.20dBuV/m - 40.00dBuV/m = -29.80dB.

5 Conducted emissions


Test result: Pass

5.1 Limit

Frequency range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0.15 ~ 0.5	79	66
0.5 ~ 30	73	60

Note: If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.

5.2 Test Configuration

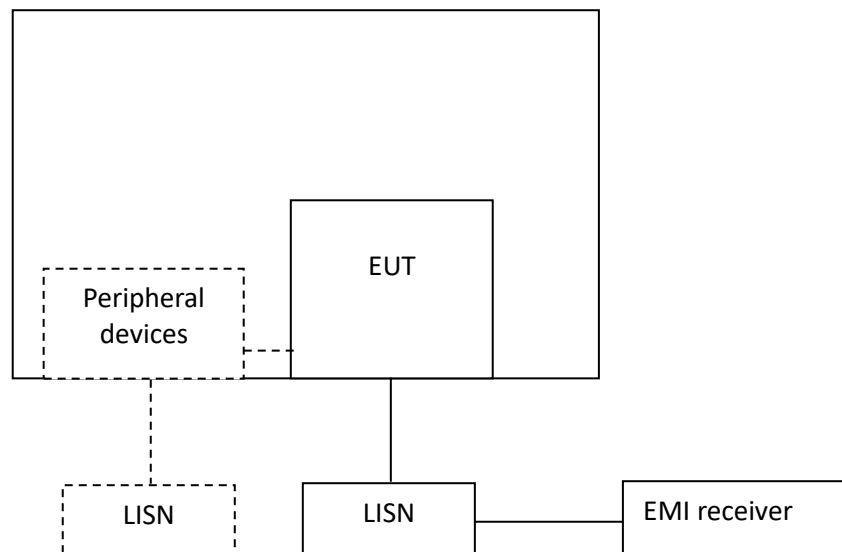

TEST REPORT**5.3 Measurement Procedure**

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.


The bandwidth of the test receiver is set at 9 kHz.

TEST REPORT


5.4 Test Results of Conducted Emissions

Test Voltage: 240VAC/60Hz

L1 Line

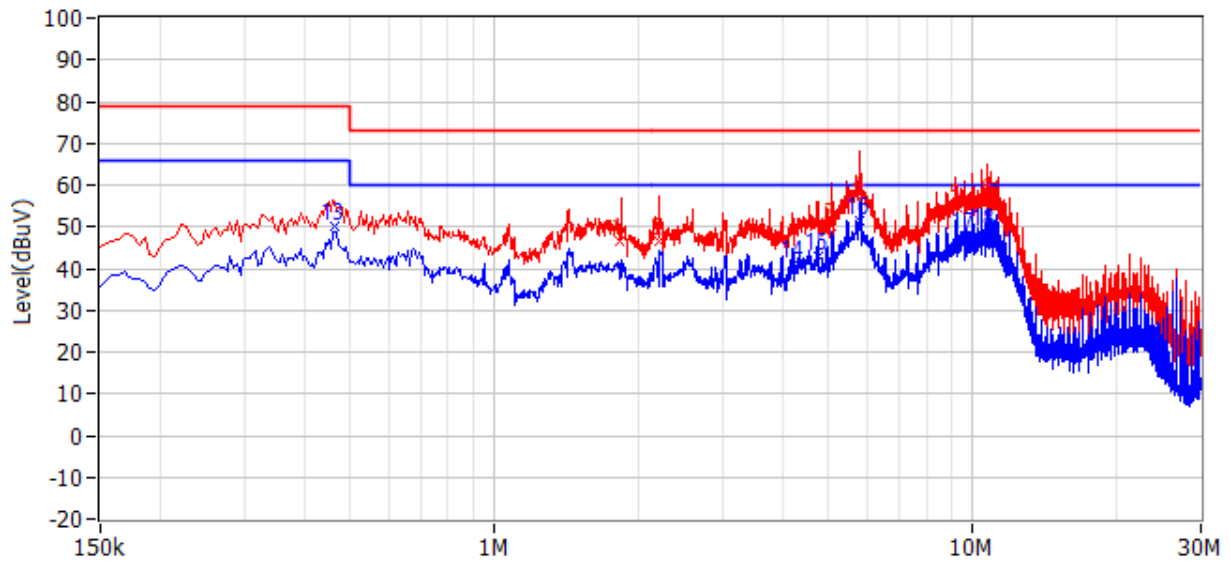

L2 Line

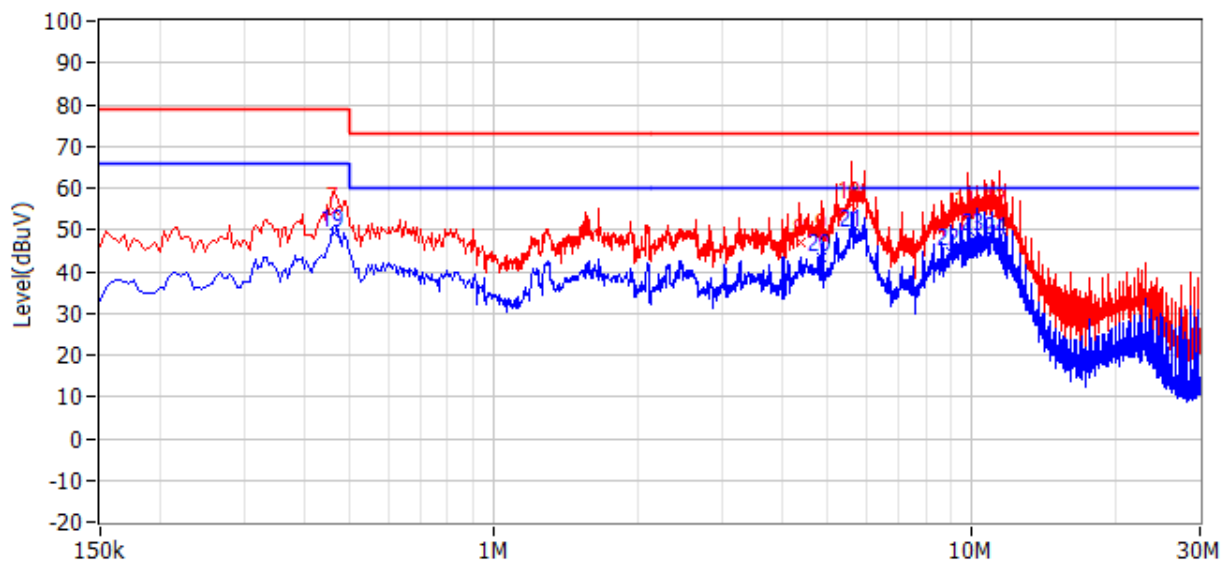

TEST REPORT

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Detector	Phase
1	1.829MHz	73.0	46.7	-26.3	QP	L1
2	2.211MHz	73.0	46.7	-26.3	QP	L1
3	5.073MHz	73.0	50.1	-22.9	QP	L1
4	5.856MHz	73.0	57.4	-15.6	QP	L1
5	9.258MHz	73.0	54.8	-18.2	QP	L1
6	10.865MHz	73.0	56.0	-17.0	QP	L1
7	465.000kHz	79.0	54.6	-24.4	QP	L2
8	4.371MHz	73.0	46.9	-26.1	QP	L2
9	4.898MHz	73.0	48.3	-24.7	QP	L2
10	5.586MHz	73.0	55.9	-17.1	QP	L2
11	9.834MHz	73.0	53.9	-19.1	QP	L2
12	11.310MHz	73.0	54.3	-18.7	QP	L2
13	465.000kHz	66.0	50.0	-16.0	CAV	L1
14	4.241MHz	60.0	41.1	-18.9	CAV	L1
15	4.749MHz	60.0	43.0	-17.0	CAV	L1
16	5.802MHz	60.0	51.3	-8.7	CAV	L1
17	9.650MHz	60.0	47.7	-12.3	CAV	L1
18	10.671MHz	60.0	48.6	-11.4	CAV	L1
19	465.000kHz	66.0	49.3	-16.7	CAV	L2
20	4.866MHz	60.0	43.2	-16.8	CAV	L2
21	5.663MHz	60.0	49.0	-11.0	CAV	L2
22	9.033MHz	60.0	44.5	-15.5	CAV	L2
23	10.176MHz	60.0	48.5	-11.5	CAV	L2
24	11.351MHz	60.0	47.4	-12.6	CAV	L2

- Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.*
- 2. Level = Original Receiver Reading + Correct Factor*
- 3. Delta = Level - Limit*
- 4. If the PK Level is lower than AV limit, the AV test can be elided.*

6 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

***** END *****