B066
全尺寸折叠蓝牙键盘
说明书

注意：正确操作本产品，请仔细阅读用户手册。



支持系统

Win/iOS/Android

系统切换

Fn+Q　切换iOS系统　Fn+W　切换Android系统

Fn+E　切换Win系统

● iOS系统连接使用说明：



1.请打开键盘电源开关，蓝色灯亮起，选择通道，按Fn+C对码键灯闪烁进入对码模式。

2.打开“蓝牙”进入搜索模式。

3.直到发现“Bluetooth 5.1 Keyboard”，然后点击配对名连接。

4.提示连接配对成功，您就可以舒适地使用您的键盘了。

● Win 10 系统连接使用说明：



1.请打开键盘电源开关，蓝色灯亮起，选择通道，按Fn+C对码键灯闪烁进入对码模式。

2.打开设置，打开蓝牙，点击添加蓝牙或其他设备。

3.在添加设备里选择“蓝牙”，进行搜索。

4.直到发现“Bluetooth 5.1 keyboard”，然后点击配对名连接。

5.提示连接成功，你就可以舒适地使用你的键盘了。

● Android系统连接使用说明：



1.请打开键盘电源开关，蓝色灯亮起，选择通道，按Fn+C对码键灯闪烁进入对码模式。

2.在开始页面打开“设置”，然后打开蓝牙，进行搜索模式。

3.直到发现“Bluetooth 5.1 Keyboard”，然后点击配对名连接。

4.提示连接配对成功，您就可以舒适地使用您的键盘了。

注：配对成功以后下次使用只需要打开蓝牙键盘电源及使用设备的蓝牙，蓝牙键盘将会自动搜索连接上次使用过的设备，不需要再进行配对操作。

产品功能

IOS/Android		Windows		Windows	
直接按	对应功能	Fn+	对应功能	直接按	对应功能
Esc	返回桌面	Esc	主页	Esc	Esc
F1	搜索	F1	搜索	F1	F1
F2	全选	F2	全选	F2	F2
F3	复制	F3	复制	F3	F3
F4	粘贴	F4	粘贴	F4	F4
F5	剪切	F5	剪切	F5	F5
F6	上一曲	F6	上一曲	F6	F6
F7	暂停/播放	F7	暂停/播放	F7	F7
F8	下一曲	F8	下一曲	F8	F8
F9	静音	F9	静音	F9	F9
F10	音量减小	F10	音量减小	F10	F10
F11	音量增大	F11	音量增大	F11	F11
F12	锁屏	F12	锁屏	F12	F12

三系统切换语言：

Windows：　Alt+Shift　切换语言　　iOS：　Ctrl+空格键　切换语言

Android：　Shift+空格键　切换语言

技术规格

键盘尺寸：342.35x114.7x10.9 mm(打开)
182.25x114.7x19.5 mm(折叠)

触摸板尺寸：56.1 x 45.1 mm

键盘重量：222 g

使用触摸板工作电流：<11 mA

待机电流：<1 mA

使用按键工作电流：<4 mA

休眠电流：17μA

工作距离：10 m

休眠时间：10 分钟

锂电池容量：140 mAh

唤醒方式：按键唤醒

工作电压：3.7 V

触控板功能说明(Windows10), 须切换到Windows系统

触控板功能说明(iOS 13.4.1以上)，须切换到iOS系统



自定义的方法：

设置-辅助功能-触控-辅助触控-设备-点击键盘配对名，然后对单指点/双指点/三指点进行功能自定义。

触控板功能说明(Android),须切换到Android系统

状态显示LED

- 对码：打开电源开关，蓝牙指示灯蓝灯亮起，按下对码键，蓝灯闪烁
- 充电：指示灯红色，充满灯灭
- 低电压指示：当电压低于3.3V，红色 指示灯闪烁

多通道连接

- 连接第一个设备时，先按Fn+✱1 ，再按Fn+C对码，开始连接.
- 连接第2个设备前，先按一次Fn+✱2 ，再按Fn+C对码，开始连接.
- 连接第3个设备前，先按一次Fn+✱3 ，再按Fn+C对码，开始连接.
- 在多个设备同时使用，按Fn+✱1 /✱2 /✱3 切换，即可自由切换到已连接的设备.

故障分析

请与售后服务人员联系

知识产权信息

未经本司的许可，禁止复制本用户手册的内容。

安全提醒

请不要打开或修理该设备，请不要在潮湿环境内使用设备，请用干布擦拭该设备。

质保条款

本设备自购买之日起，提供1年保修服务。

键盘保养

1、请勿将设备暴露在液体和潮湿的环境中或使其淋雨，请勿在浴缸、水槽、桑拿房、游泳池或蒸汽房附近使用。

2、请勿将设备暴露于过高或过低的温度下。

3、请勿长时间放置在阳光直射的地方。

4、请勿靠近明火，如烹饪用炉、蜡烛或者壁炉。

5、避免使用锋利器物刮擦产品，及时给产品进行充电以保证正常使用。

常见问题解答

1、平板无法连接蓝牙键盘？

1）请先检查蓝牙键盘是否有进入配对状态。然后再打开平板电脑蓝牙搜索设备进行连接。

2）检查蓝牙键盘电量是否充足，电量不足也会导致无法连接，请将蓝牙键盘充电后再使用。

2、键盘指示灯在使用途中一直闪烁？

键盘指示灯在使用途中一直闪烁，表示电池即将没电，请尽快将键盘充电。

3、设备显示蓝牙键盘断开连接？

蓝牙键盘在一段时间内不使用，设备为了省电将自动关闭蓝牙功能，按键盘任意键唤醒，蓝牙连接自动恢复。

保修卡

用户填写资料

公司或个人全称 _____

通讯地址 _____

电话 _____　　邮编 _____

所购产品名称及型号 _____

购买日期 _____

本有限质保不涵盖由于以下原因导致的问题或损坏：
（1）意外事件、疏忽、操作不当或任何非授权的修修、改装或者拆解；
（2）操作或维护不当，使用过程中或客户产品的或或插座不匹配的电源；
（3）或者使用非本公司授权的耗材品（如备用电池），但因耗材本身或此类原有的情况除外。

合格证
检验员：
生产日期：

B066
Bluetooth keyboard
User’s Manual

Note: Please read the user manual caref ullybefore you start using this product



Compatible System

Win /iOS /Android

System switching

Fn+Q　iOS　　Fn+W　Android　　Fn+E　Win

● iOS Connection Instructions:



1.Please open the power switch, blue lights up, Select channel, press the Fn+C connect buttlm, blue light twinkles.

2.Open the tablet PC setting “Bluetooth” into searching and pairing status

3.You will find the “Bluetooth 5.1 Keyboard”and click to next step

4.There is a tip for connecting successfully ,you can use your keyboard comfortably

● Win10 Connection Instructions:



1.Please open the power switch, blue lights up, Select channel, press the Fn+C connect buttlm, blue light twinkles.

2. Open settings;turn on Bluetooth, click Add Bluetooth or other devices

3.Select “Bluetooth” in the Add Device to search

4. You will find the “Bluetooth 5.1keyboard ” and click the pairing name to connect.

5.There is a tip for connecting successfully ,you can use your keyboard comfortably .

● Android Connection Instructions:



1.Please open the power switch, blue lights up, Select channel, press the Fn+C connect button, blue light twinkles.

2.Open the set up button at the starting interface and select “Bluetooth” then searching.

3. You will find the “Bluetooth 5.1keyboard ” and click the pairing name to connect.

4.There is a tip for connecting successfully , you can use your keyboard comfortably .

Remarks: After connecting successfully the next time you don’t need match code, just open the Bluetooth keyboard power switch and the tablet PC “Bluetooth.” The BT keyboard will search the device and automatic connects.

Product features

IOS/Android		Windows		Windows	
Press directly	Corresponding f unction	Fn+	Corresponding f unction	Press directly	Corresponding function
Esc	Return to Desk	Esc	Home Page	Esc	Esc
F1	Search	F1	Search	F1	F1
F2	Select	F2	Select	F2	F2
F3	Copy	F3	Copy	F3	F3
F4	Stick	F4	Stick	F4	F4
F5	Cut	F5	Cut	F5	F5
F6	Pre Track	F6	Pre Track	F6	F6
F7	Play/Pause	F7	Play/Pause	F7	F7
F8	Next	F8	Next	F8	F8
F9	Mute	F9	Mute	F9	F9
F10	Volume-	F10	Volume-	F10	F10
F11	Volume+	F11	Volume+	F11	F11
F12	Lock	F12	Lock	F12	F12

Three system switching languages

Windows：　Alt+Shift　　switch language

iOS：　Ctrl+Space key　switch language

Android：　Shift+Space key　swi tchlanguage

DECLARATION OF CONFORMITY

I hereby declare that the product:
Product: Bluetooth Keyboard
Model No.: B066
Trade Mark: N/A
Hardware Version: V1.0
Software Version: V1.0

Accessories:

Battery information:
Model: PW 302030
Specification: Nominal voltage: 3.7V Capacity: 140mAh
Manufacturer: SHENZHEN TAIWOOD BATTERY CO.,LTD

Name of product type in model, serial or batch number:

satisfies all the technical regulations applicable to the product within the scope of Council Directives 2014/53/EU, 2014/35/EU and 2014/30/EU and declares that the same application has not been lodged with any other notified body.

EN 62479:2010
EN 60950:2017
EN 62368-1:2014+A11:2017
ETSI EN 301 489-17 V3.2.0 (2020-09)
ETSI EN 301 489-1 V2.2.3 (2019-11)
ETSI EN 300 328 V2.2.2 (2019-07)

These or equivalent standards and

All essential radio test suites have been carried out

NOTIFIED BODY: MICOM Labs Inc

Address:
375 Alvarado Court,
Pleasanton, California 94566
USA
Identification Number: 0361

MANUFACTURER or AUTHORISED REPRESENTATIVE

Address:
Shenzhen DZH Industrial Co., Ltd.

5th Floor, YiTuo Mike Industrial A building, Bu Yong Industrial D zone, Shajing, Shenzhen, China

This declaration is issued under the sole responsibility of the manufacturer and, if applicable, his authorised representative.

Point of contact:
Anne Li, 86(755)-28810376/86(755)-28810379
Name, telephone and fax number

China　2021-02-23
Place, date of issue

Annie Li
Signature

Anne Li, Manager
Name and title in block letters

Technical Specifications

Keyboard size: 342.35 x 114.7 x 10.9mm (open)
182.25 x 114.7 x 19.5mm (folding)

Touchpad size: 56.1X45.1mm

Working distance：10 m

Weight：222 g

Lithium battery capacity：140mAh

Key working current：<4mA

Working voltage：3.7V

Standby current：<1mA

Use touchpad the working current：<11mA

Sleep current：17μA

Sleep time：Ten minutes

Awaken way：Press key

Touchpad function description (Windows10), must be switched to Windows system

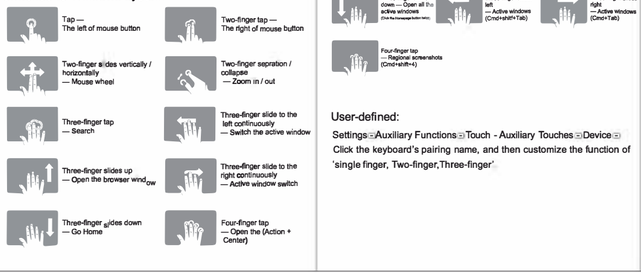

Touch pad function description (iOS 13.4.1 and above), must be switched to iOS system



User-defined:

Settings→Auxiliary Functions→Touch - Auxiliary Touches→Device→ Click the keyboard’s pairing name, and then customize the function of ‘single finger, Two-finger,Three-finger’.

Touch pad function description (Android), must be switched to Android system



Status Display LED

- Connect : Open the power switch, blue lights up, press the connect button,blue light twinkles.
- Charging : Indicator light will be on red, after fully charging,the light crush out.
- Low Voltage Indication : When the voltage is below 3.3 V, red light twinkles.

Multi-channel connection

- When connecting the first device, first press Fn+✱1 and then press Fn+C to start the connection.
- Before connecting the second device, press Fn+✱2 once, then press Fn+C to start the connection.
- Before connecting the third device, press Fn+✱3 once, then press Fn+C to start the connection.
- To use multiple devices at the same time, press Fn + ✱1 / ✱2 / ✱3 to switch to freely switch to connected devices.

Troubleshooting

Please contact the after-sales service.

Copyright

It is forbidden to reproduce any part of this manual without the permission of seller.

Safety instructions

Do not open or repair this device, Do not use the device in a damp environment. Clean the device with a dry cloth.

Warranty

The device is provided with one-year limited hardware warranty from the purchase day.

Keyboard Maintenance

1.Please keep the keyboard away from liquid or humid environment, saunas, swimming pool, steam room and don't let the keyboard get wet in the rain.

2.Please don't expose the keyboard at too high or too low temperature condition.

3.Please don't put keyboard under sun for a long time.

4.Please don't put keyboard close to the flame, such as cooking stoves, candles or fireplace.

5. Avoid sharp objects scratching products, timely to recharge products to ensure the normal use.

FAQ

1.The tablet PC can't connect the BT keyboard?

1) At first check the BT keyboard is into match code state, then open the table PC Bluetooth searching.

2) Checking the BT keyboard Battery is enough, the battery low is also lead to can't connect, you need charge.

2.The keyboard indication light always flashing when use?

Keyboard indication always flashing when use, is means the keyboard will be no power ,please charge the power as soon as possible.

3.The table PC display BT keyboard is disconnect?

The Bluetooth keyboard is not used for a period of time, the device will automatically enter the sleep state in order to save power. Press any key on the keyboard to wake up, and the Bluetooth connection will be automatically restored.

Warranty Card

User information

Company or personage full name

_____

Contact address _____

TEL _____　　Zip _____

The purchased product name and mode NO.

_____

Purchased date _____

This reason due to the product broken and damage is not include on the warranty.
(1) accidents, misuse, improper operation, or any unauthorized maintenance, alteration, or disassembly;
(2) improper operation or maintenance, violation of product instructions or improper connection of power during use;
(3) Or are consumables (such as spare batteries) that are not provided by the company but applicable laws. Except where such restrictions are prohibited.

Certification
Inspection：
Production date：

CE Statement

Herby, Shenzhen DZH Industrial Co., Ltd that this Bluetooth Keyboard, B066 is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU.
In accordance with Article 10(2) and Article 10(10), this product allowed to be used in all EU member states.
Use the Bluetooth Keyboard in the environment with the temperature between 0℃ and 35℃.
Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to the instructions.
The product shall only be connected to a USB interface of version USB2.0

Operation Frequency:2402MHz~2480MHz
Max output Power: 0.0005W

Manufacturer: Shenzhen DZH Industrial Co., Ltd
Address: 3th Floor, YiTuo Mike Industrial A building, Bu Yong Industrial D zone, Shajing, Shenzhen, China
E-mail: lgh@dzhgy.com

FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment.
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-- Reorient or relocate the receiving antenna.
-- Increase the separation between the equipment and receiver.
-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-- Consult the dealer or an experienced radio/TV technician for help
This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1)this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
The device has been evaluated to meet general RF exposure statement.
The device can be used in portable exposure condition without restriction