



Appendix D

RF Test Data for 5.3GWIFI (Conducted Measurement)

Product Name: Pro Vision 4K

Test Model: Pro Vision 4K

Environmental Conditions

Temperature:	24.3°C
Relative Humidity:	52.6%
ATM Pressure:	100.0 kPa
Test Engineer:	Can Kun
Supervised by:	Nick Peng



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



D.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5260	Ant1	24.91	---	Pass
NVNT	a	5300	Ant1	28.555	---	Pass
NVNT	a	5320	Ant1	25.086	---	Pass
NVNT	n20	5260	Ant1	29.275	---	Pass
NVNT	n20	5300	Ant1	28.329	---	Pass
NVNT	n20	5320	Ant1	28.856	---	Pass
NVNT	n40	5270	Ant1	41.906	---	Pass
NVNT	n40	5310	Ant1	39.797	---	Pass
NVNT	ac20	5260	Ant1	27.818	---	Pass
NVNT	ac20	5300	Ant1	29.127	---	Pass
NVNT	ac20	5320	Ant1	28.228	---	Pass
NVNT	ac40	5270	Ant1	43.281	---	Pass
NVNT	ac40	5310	Ant1	43.253	---	Pass
NVNT	ac80	5290	Ant1	78.188	---	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

-26dB Bandwidth NVNT a 5260MHz Ant1

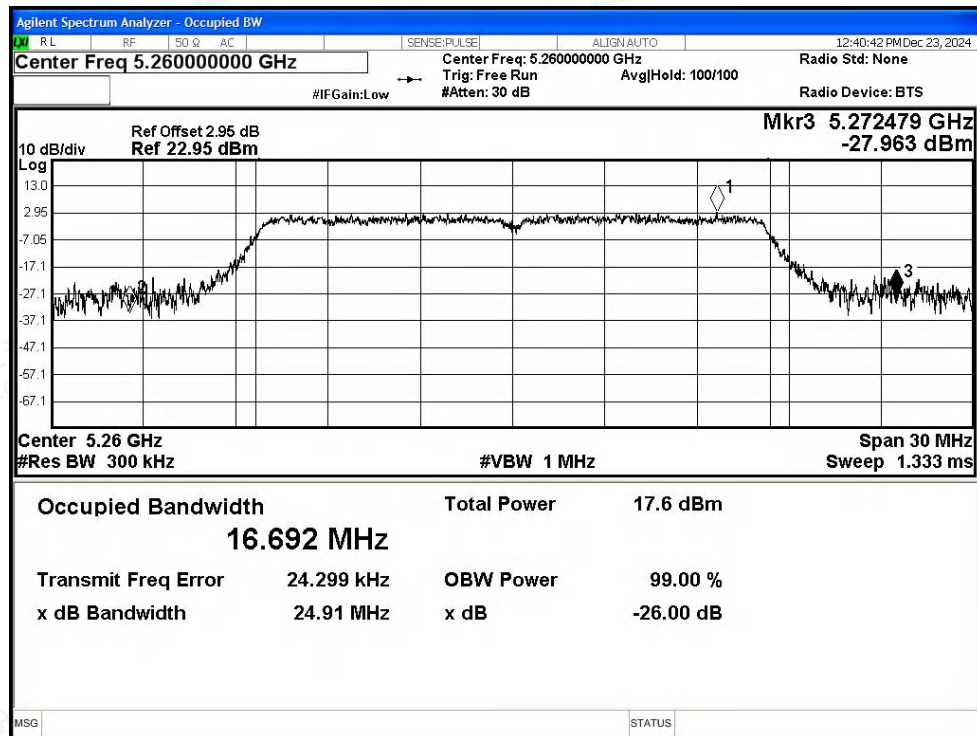

-26dB Bandwidth NVNT a 5300MHz Ant1

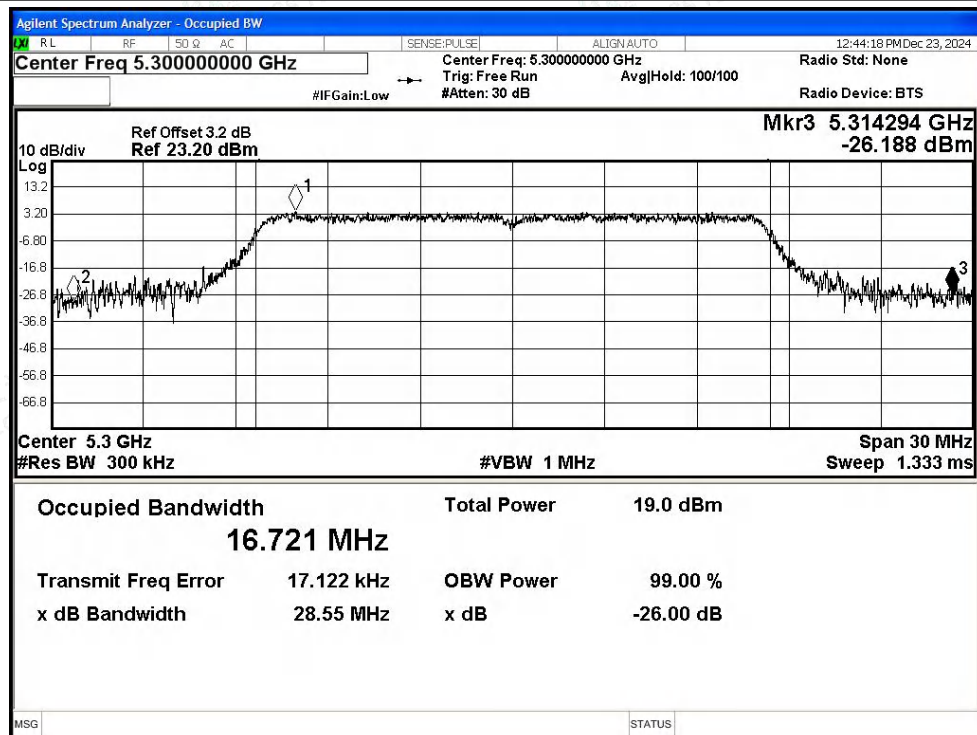

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT a 5320MHz Ant1

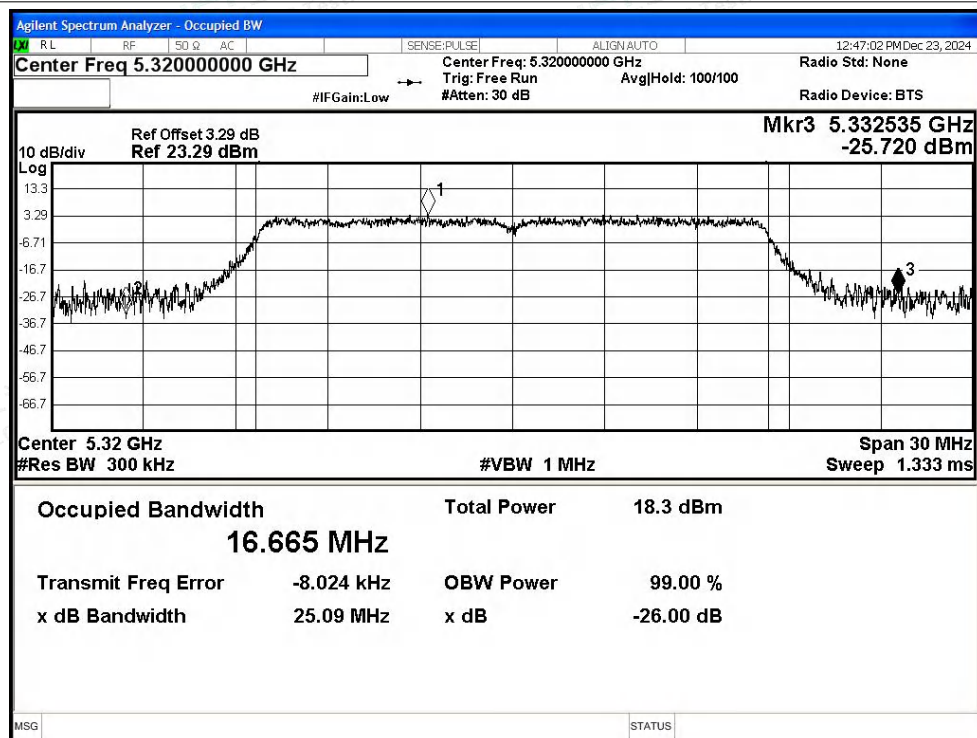

-26dB Bandwidth NVNT n20 5260MHz Ant1

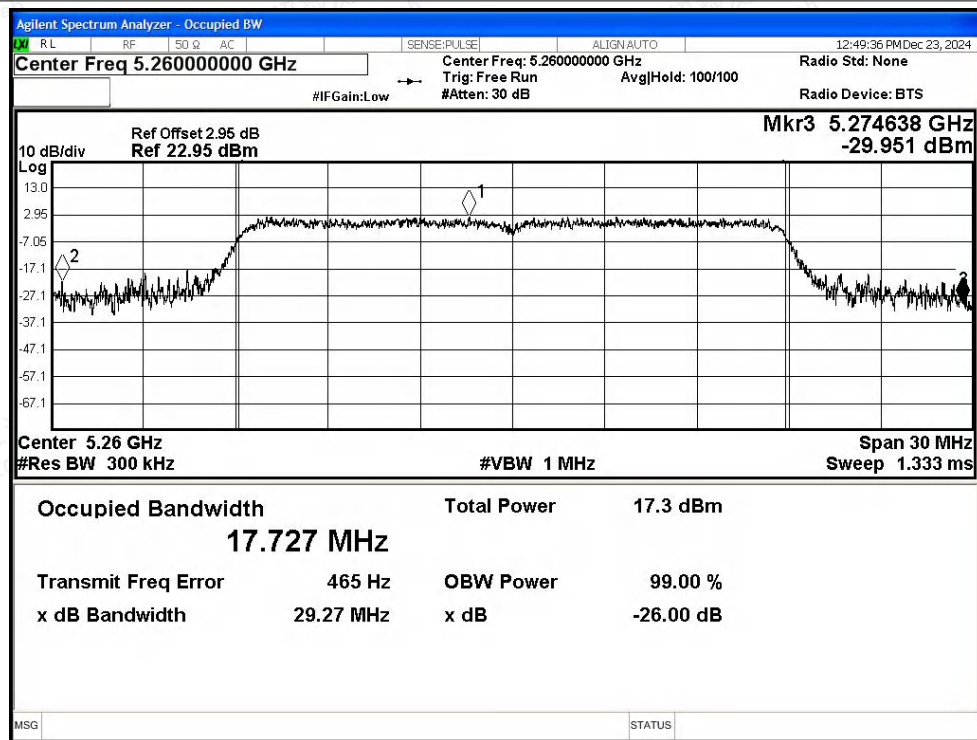

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT n20 5300MHz Ant1

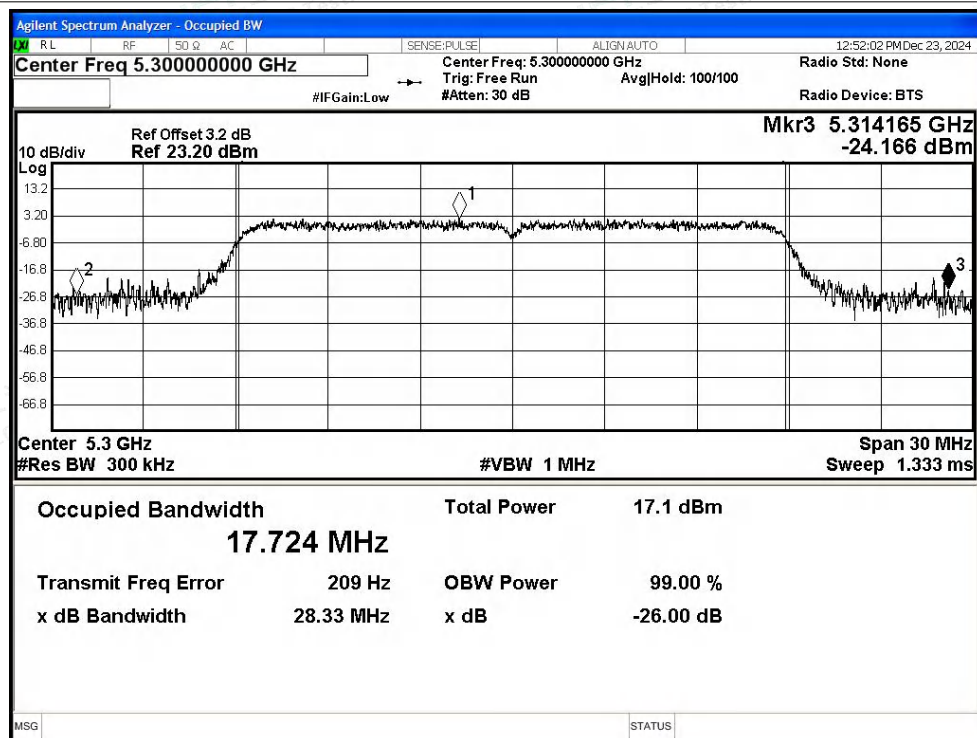

-26dB Bandwidth NVNT n20 5320MHz Ant1

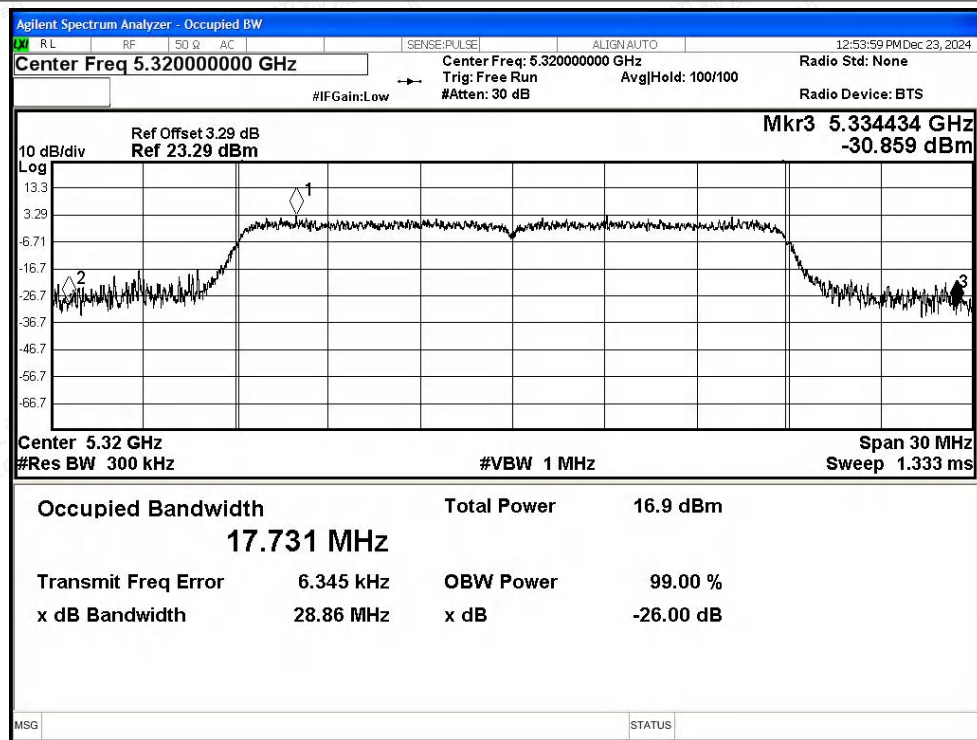

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT n40 5270MHz Ant1

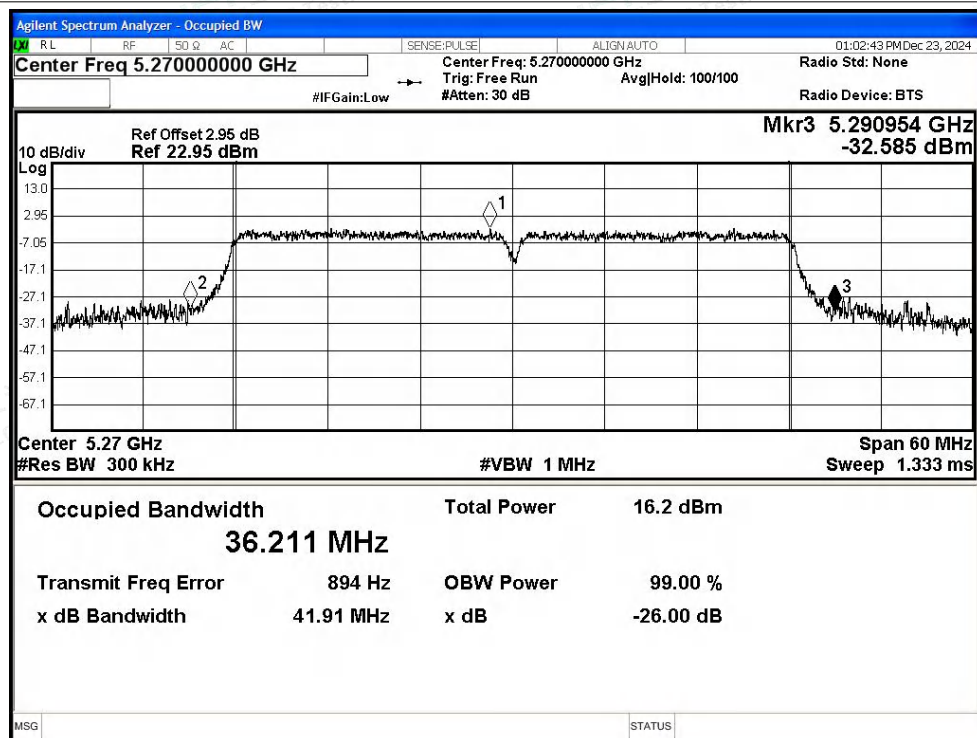

-26dB Bandwidth NVNT n40 5310MHz Ant1

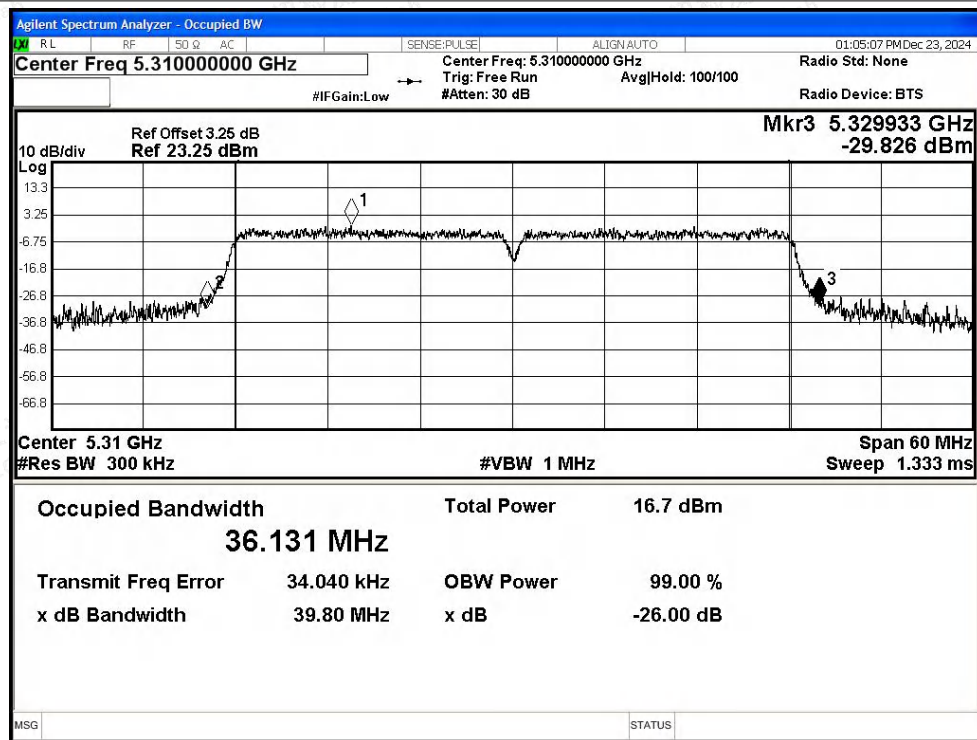

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT ac20 5260MHz Ant1

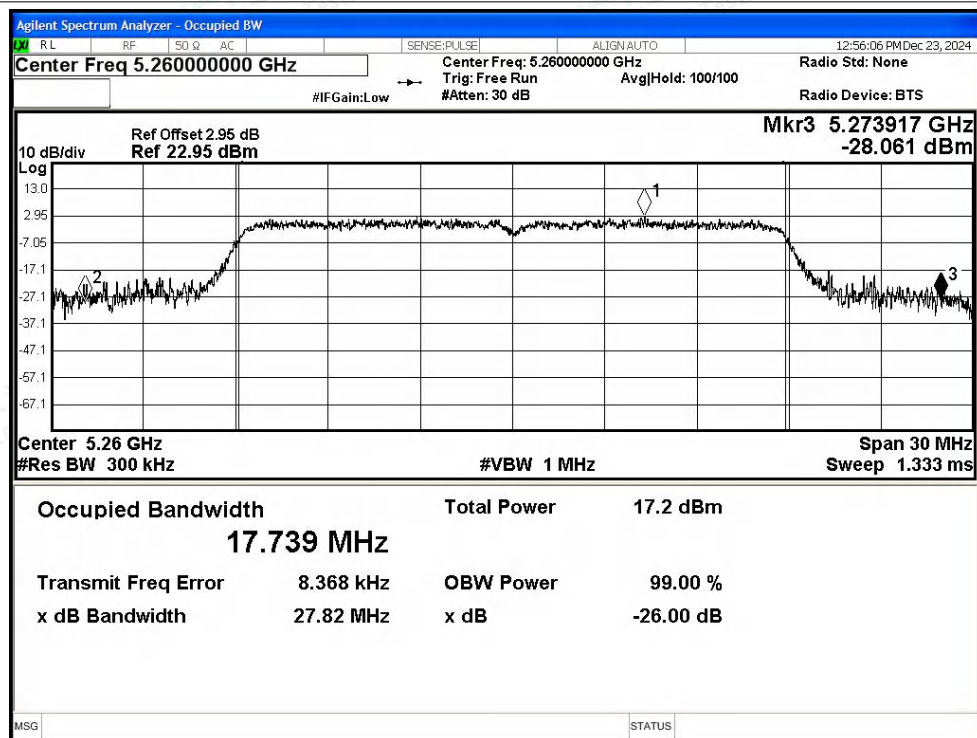

-26dB Bandwidth NVNT ac20 5300MHz Ant1

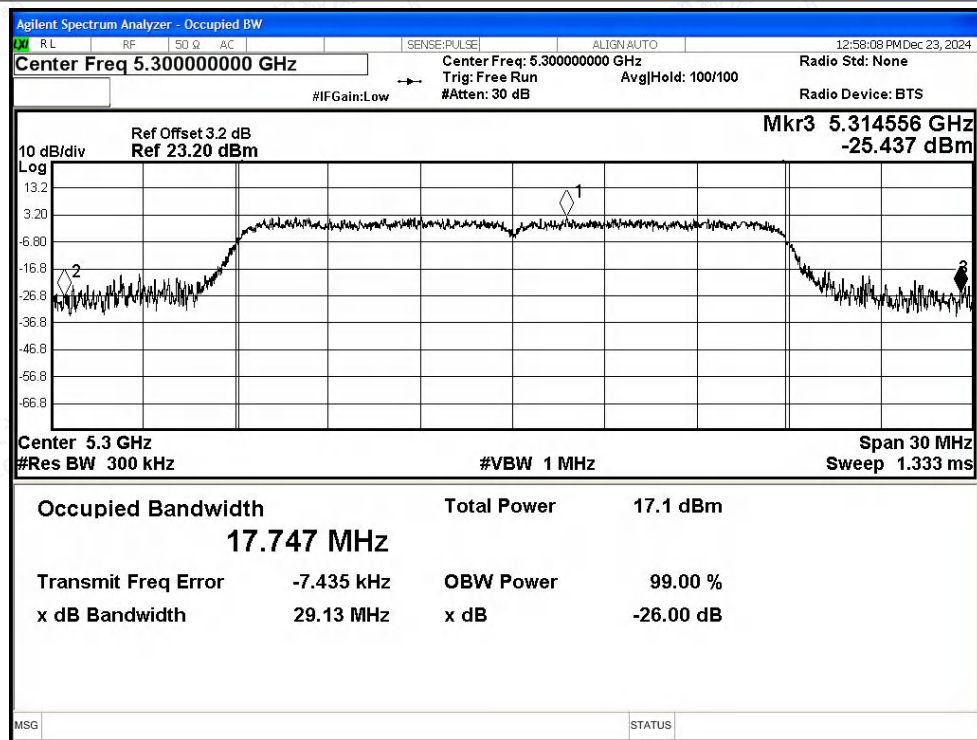

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT ac20 5320MHz Ant1

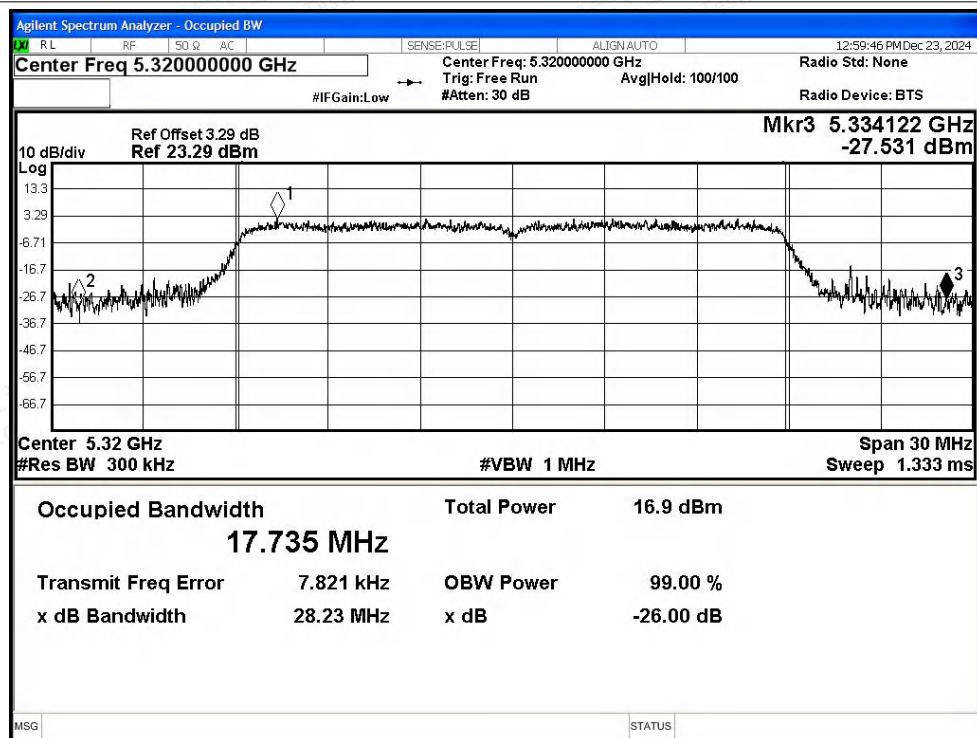

-26dB Bandwidth NVNT ac40 5270MHz Ant1

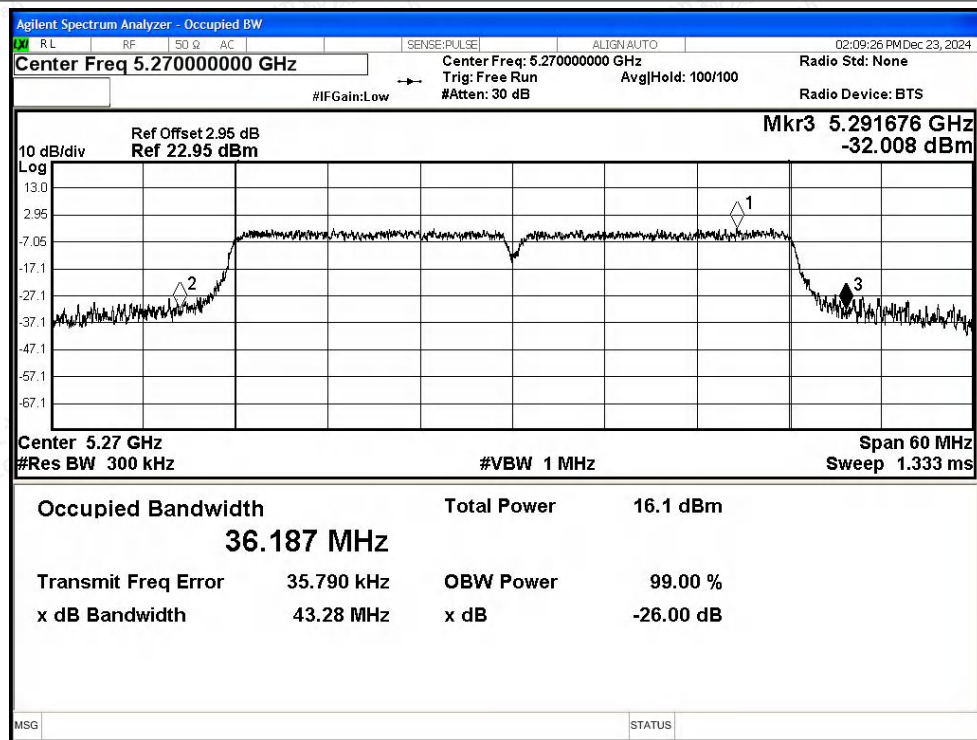

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT ac40 5310MHz Ant1

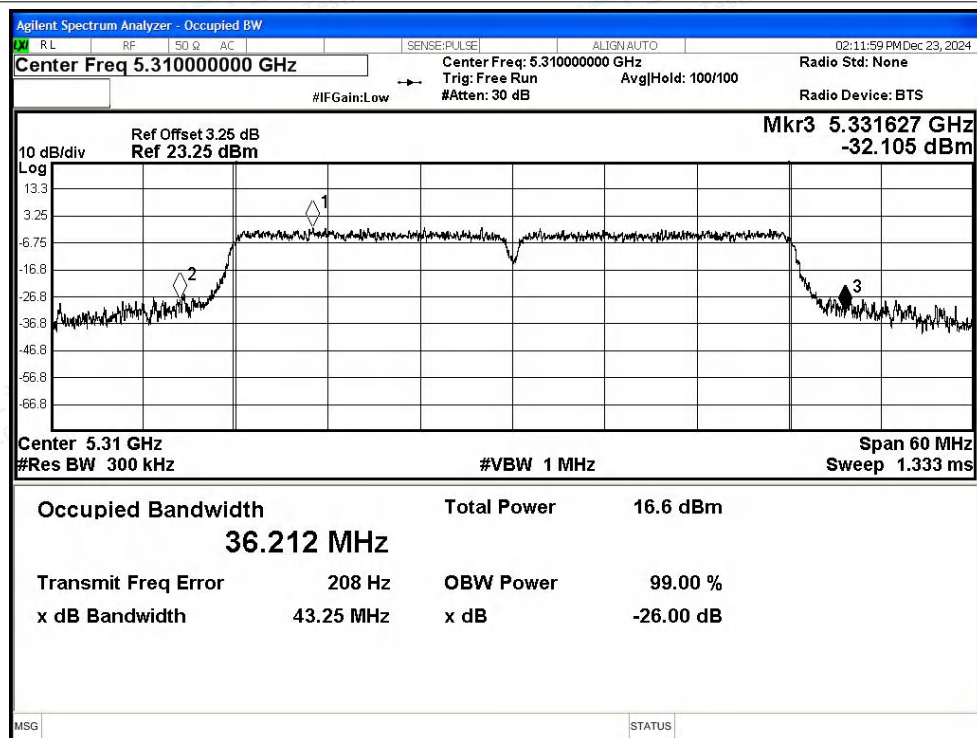

-26dB Bandwidth NVNT ac80 5290MHz Ant1

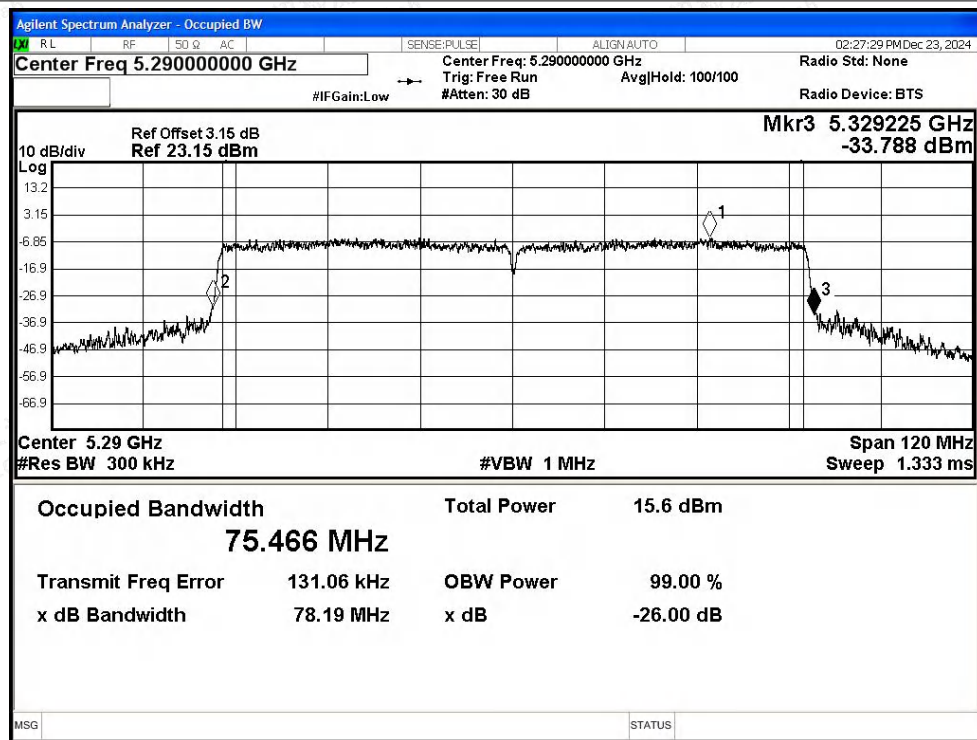

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5260	Ant2	23.167	---	Pass
NVNT	a	5300	Ant2	27.884	---	Pass
NVNT	a	5320	Ant2	26.07	---	Pass
NVNT	n20	5260	Ant2	27.2	---	Pass
NVNT	n20	5300	Ant2	27.835	---	Pass
NVNT	n20	5320	Ant2	28.697	---	Pass
NVNT	n40	5270	Ant2	43.89	---	Pass
NVNT	n40	5310	Ant2	43.378	---	Pass
NVNT	ac20	5260	Ant2	27.731	---	Pass
NVNT	ac20	5300	Ant2	27.535	---	Pass
NVNT	ac20	5320	Ant2	29.002	---	Pass
NVNT	ac40	5270	Ant2	42.058	---	Pass
NVNT	ac40	5310	Ant2	45.307	---	Pass
NVNT	ac80	5290	Ant2	79.26	---	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

-26dB Bandwidth NVNT a 5260MHz Ant2

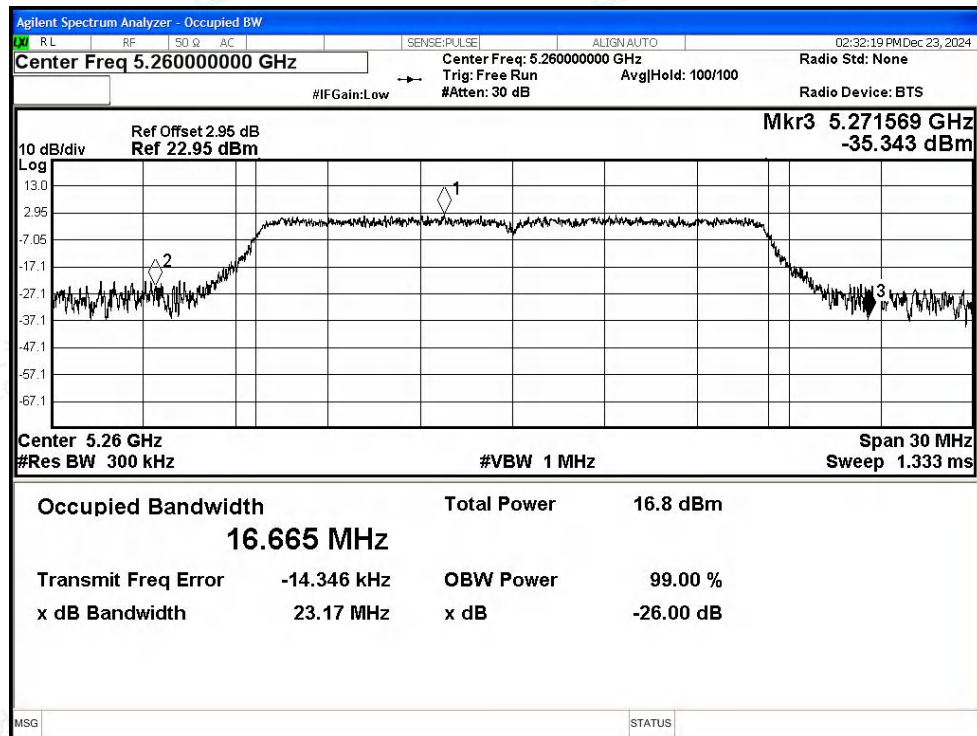

-26dB Bandwidth NVNT a 5300MHz Ant2

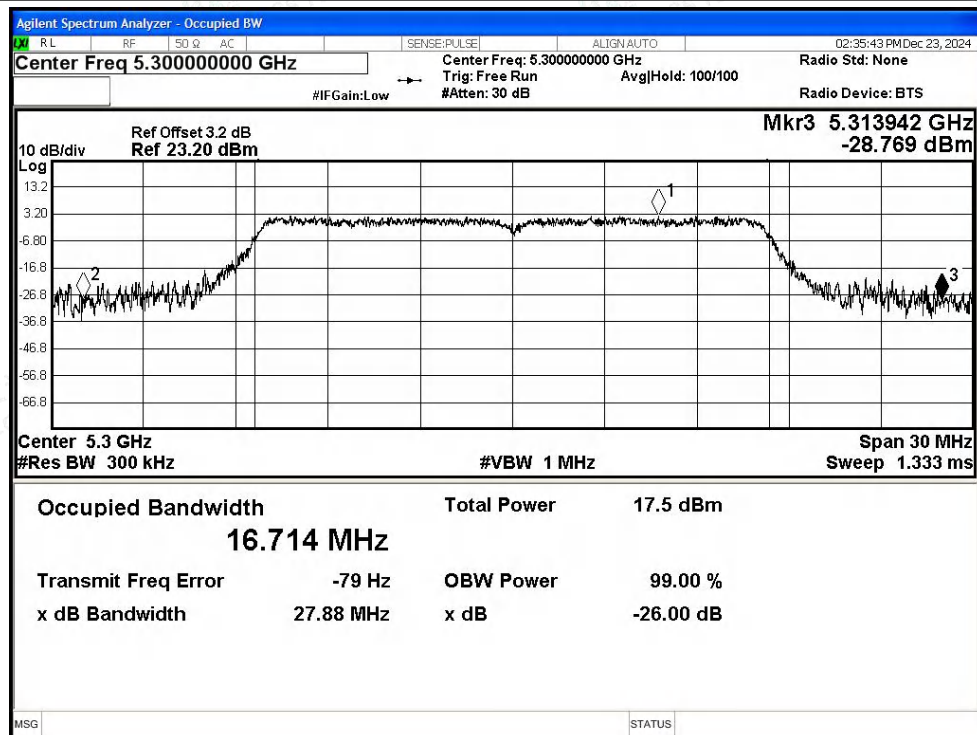

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT a 5320MHz Ant2

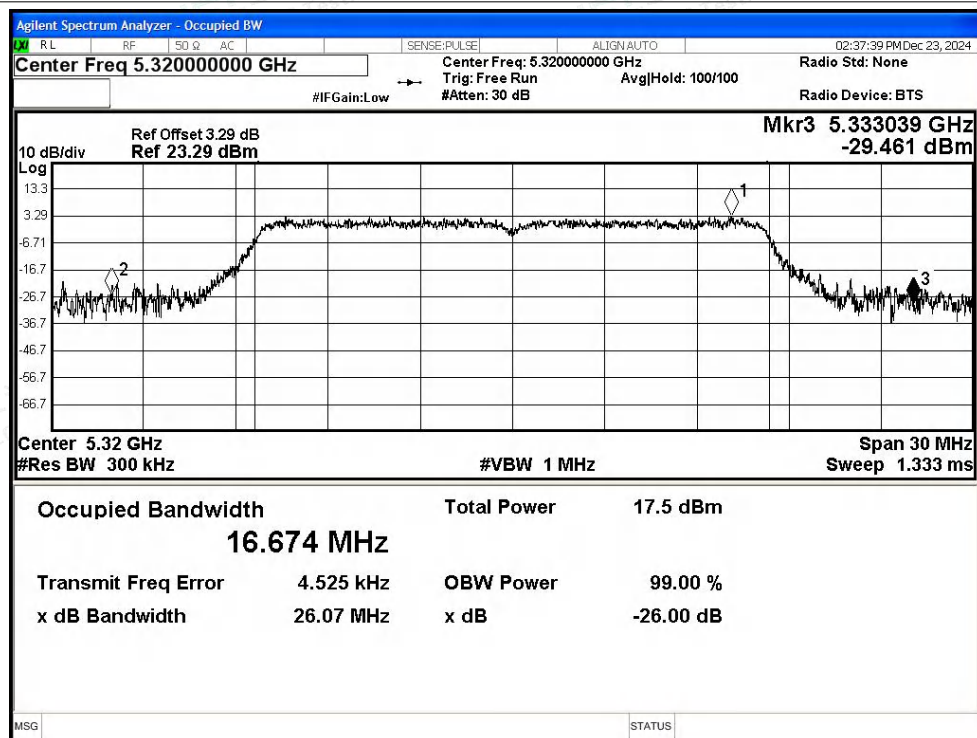

-26dB Bandwidth NVNT n20 5260MHz Ant2

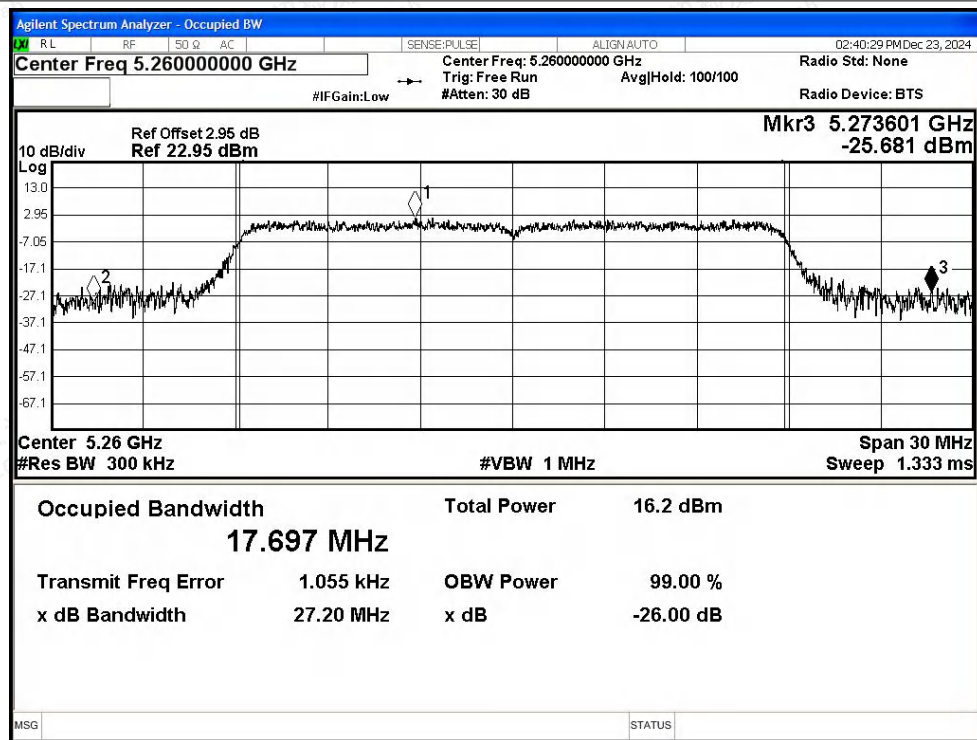

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT n20 5300MHz Ant2

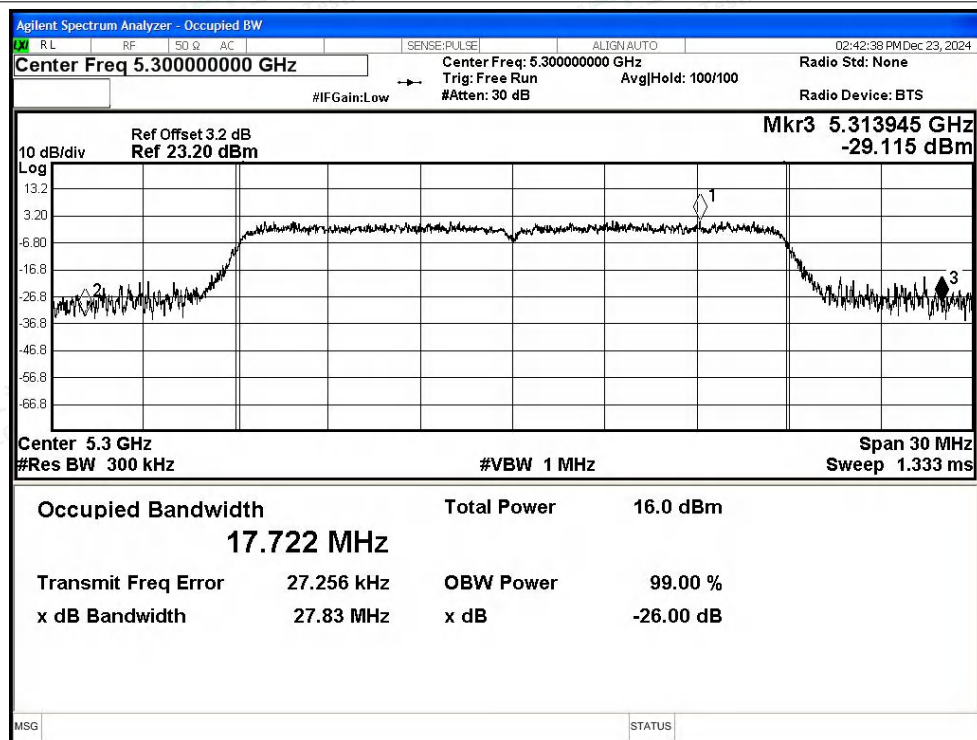

-26dB Bandwidth NVNT n20 5320MHz Ant2

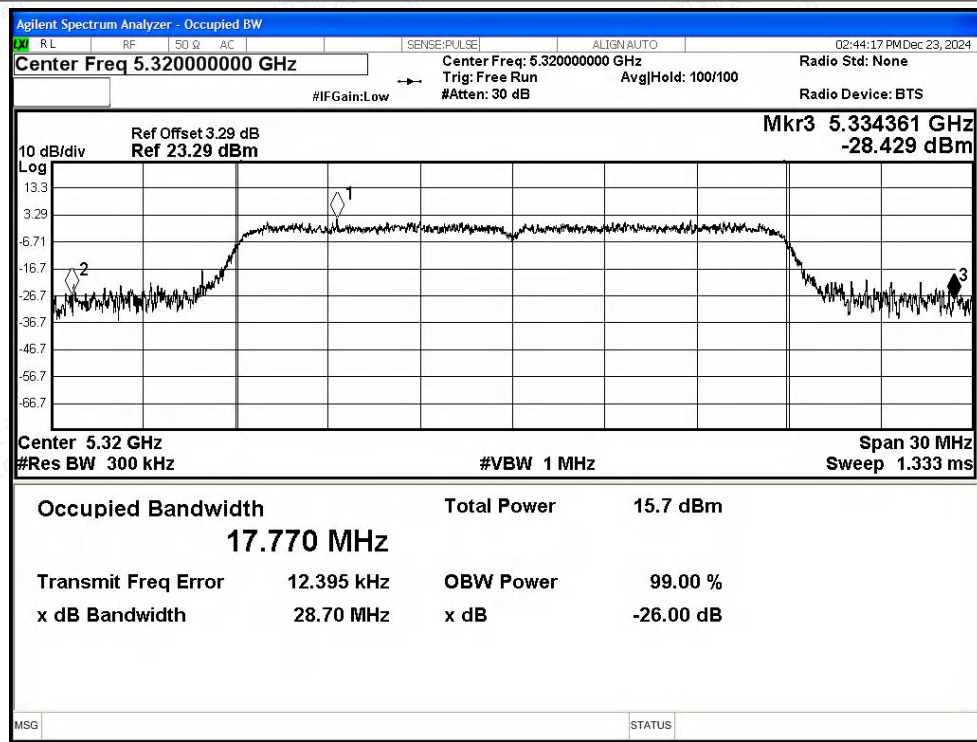

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT n40 5270MHz Ant2

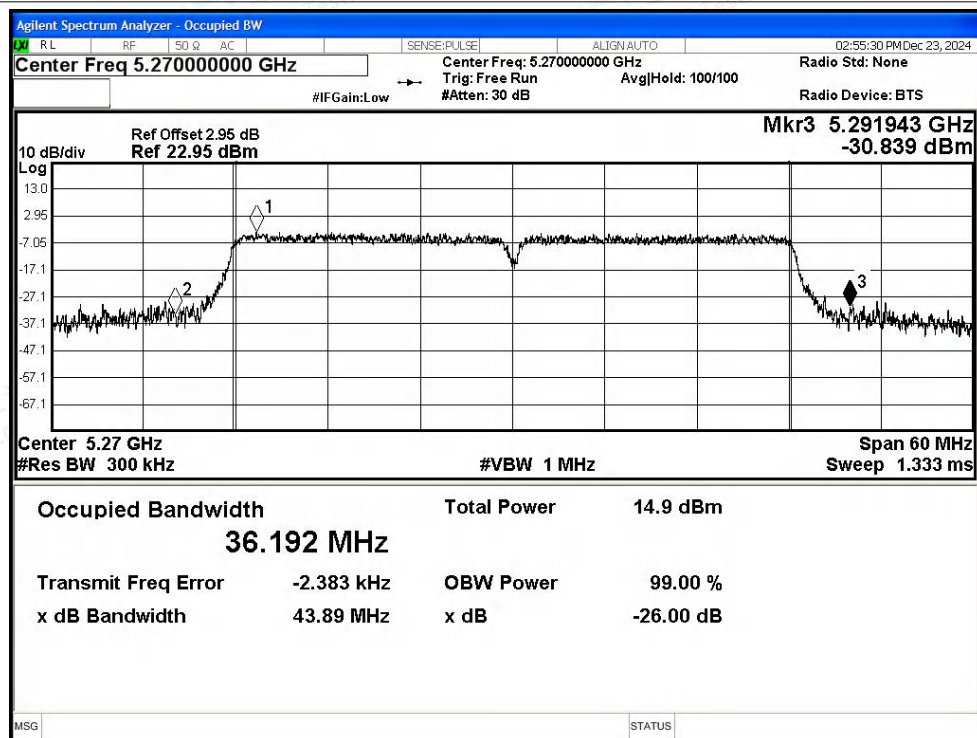

-26dB Bandwidth NVNT n40 5310MHz Ant2

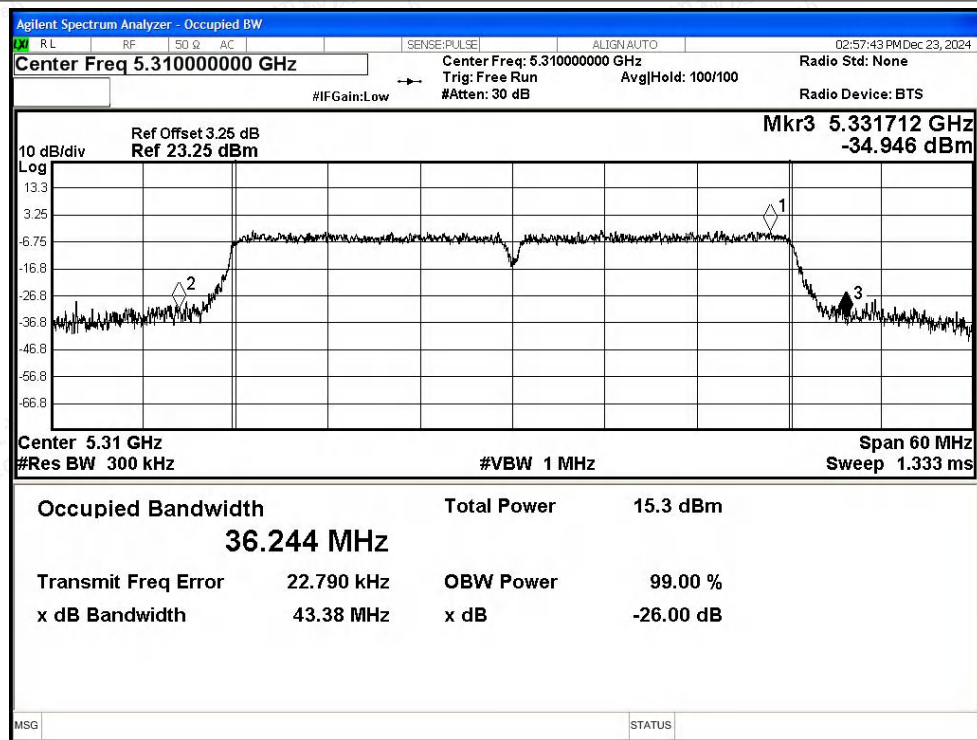

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT ac20 5260MHz Ant2



-26dB Bandwidth NVNT ac20 5300MHz Ant2

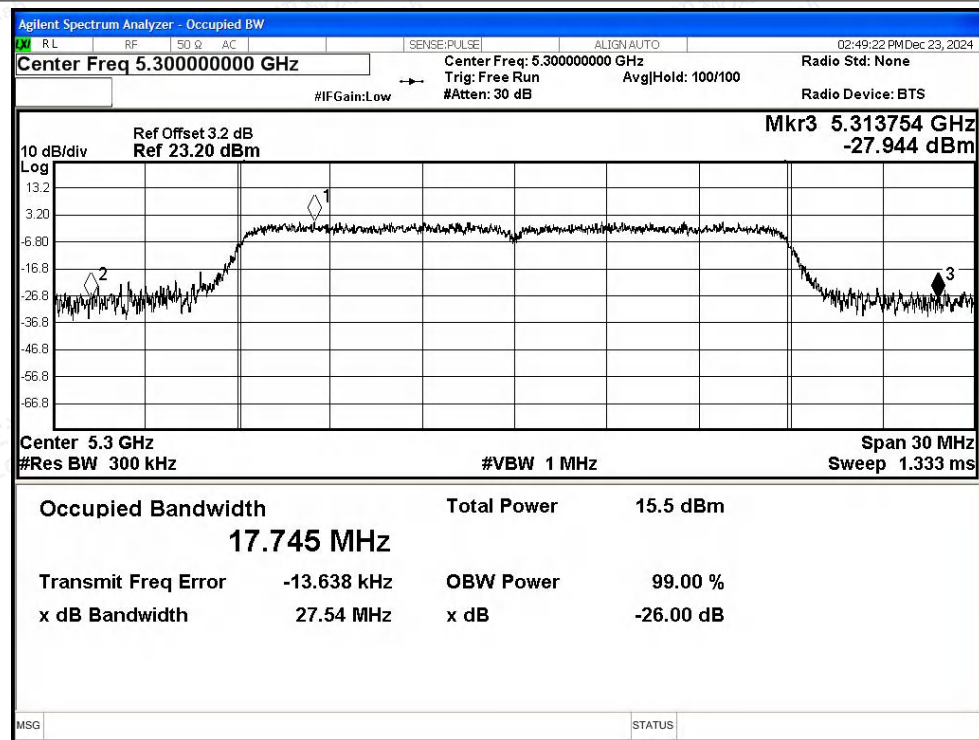

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT ac20 5320MHz Ant2

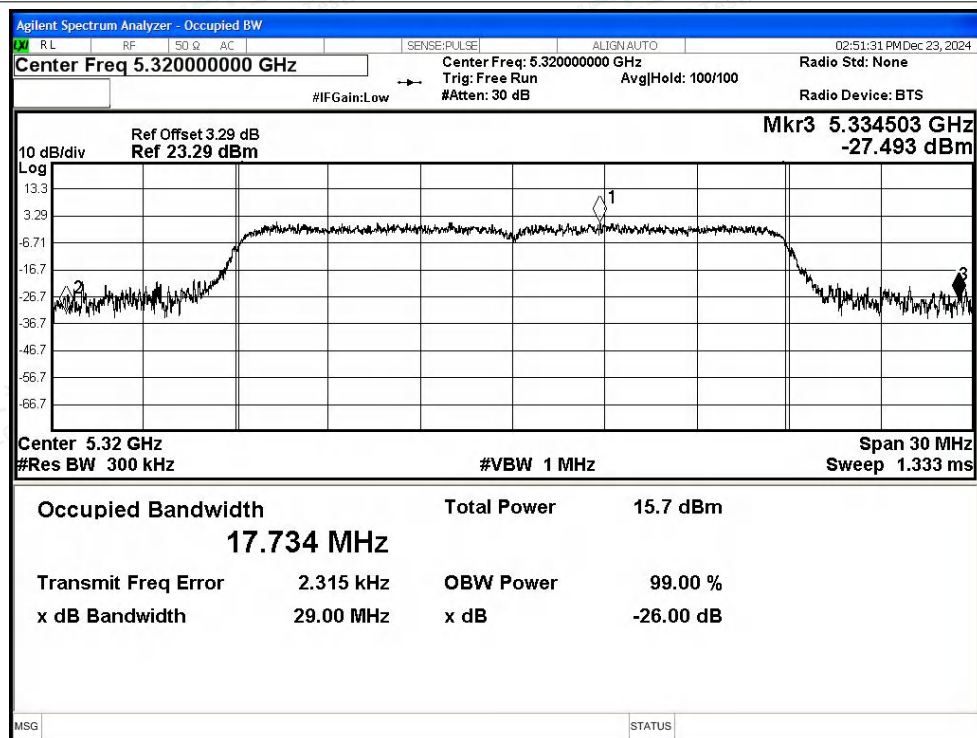

-26dB Bandwidth NVNT ac40 5270MHz Ant2

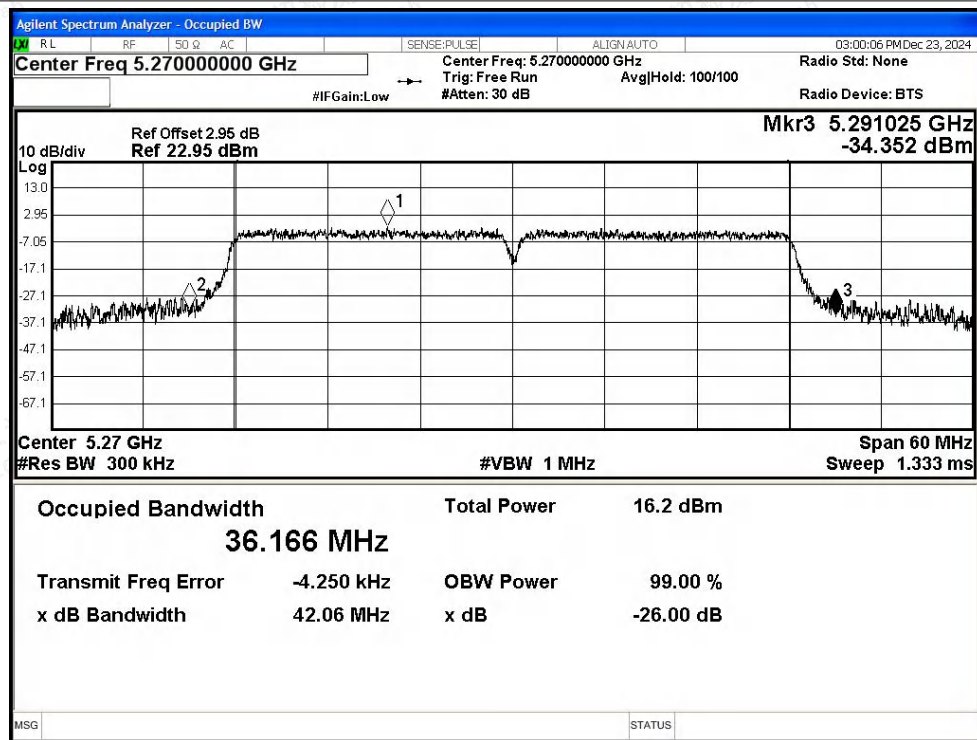

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT ac40 5310MHz Ant2

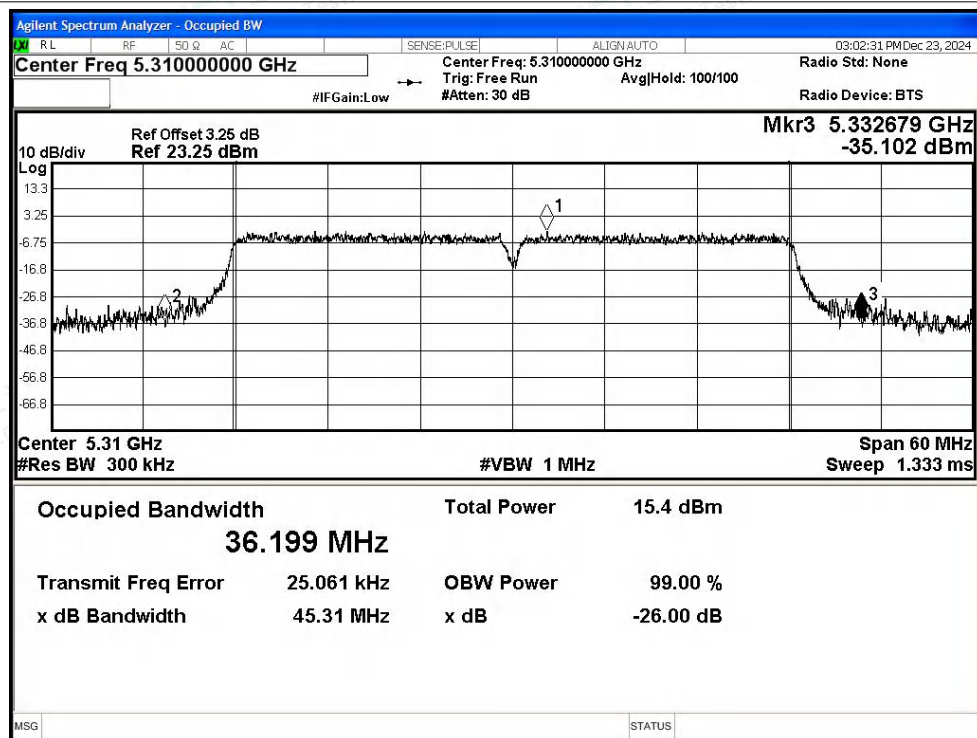

-26dB Bandwidth NVNT ac80 5290MHz Ant2

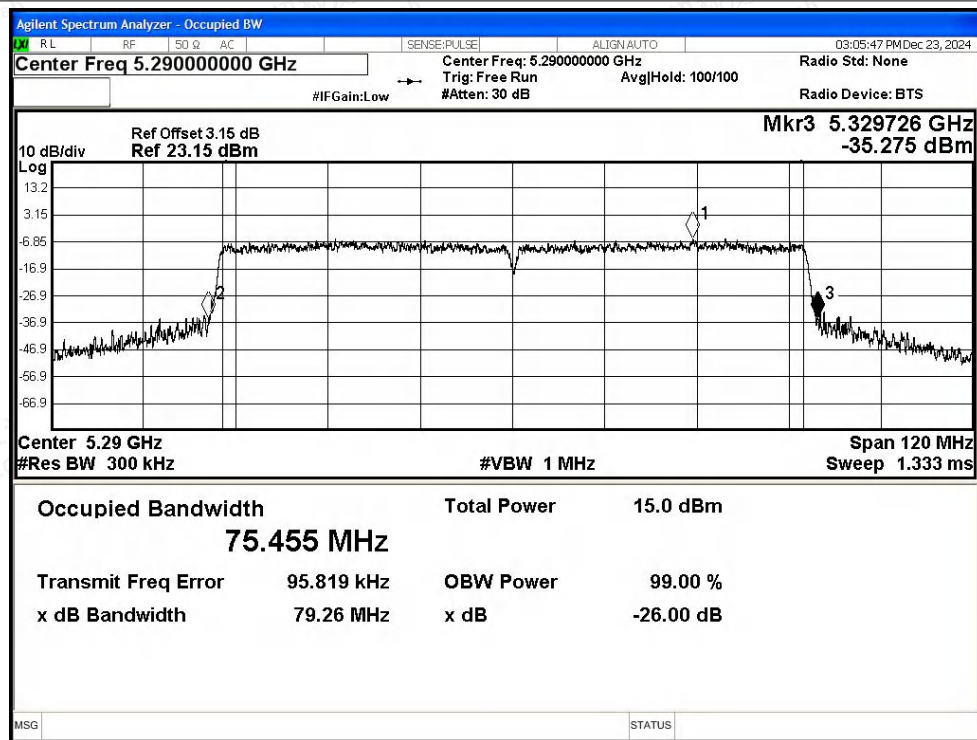

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



D.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant1	11.96	0.24	12.2	24	Pass
NVNT	a	5300	Ant1	12.65	0.24	12.89	24	Pass
NVNT	a	5320	Ant1	12.55	0.24	12.79	24	Pass
NVNT	n20	5260	Ant1	11.81	0.12	11.93	24	Pass
NVNT	n20	5300	Ant1	11.14	0.12	11.26	24	Pass
NVNT	n20	5320	Ant1	10.97	0.12	11.09	24	Pass
NVNT	n40	5270	Ant1	10.41	0.24	10.65	24	Pass
NVNT	n40	5310	Ant1	10.67	0.23	10.9	24	Pass
NVNT	ac20	5260	Ant1	11.72	0.12	11.84	24	Pass
NVNT	ac20	5300	Ant1	11.49	0.12	11.61	24	Pass
NVNT	ac20	5320	Ant1	11.34	0.12	11.46	24	Pass
NVNT	ac40	5270	Ant1	10.13	0.24	10.37	24	Pass
NVNT	ac40	5310	Ant1	10.46	0.24	10.7	24	Pass
NVNT	ac80	5290	Ant1	9.61	0.25	9.86	24	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant2	11.18	0.24	11.42	24	Pass
NVNT	a	5300	Ant2	11.78	0.24	12.02	24	Pass
NVNT	a	5320	Ant2	11.86	0.24	12.1	24	Pass
NVNT	n20	5260	Ant2	10.67	0.12	10.79	24	Pass
NVNT	n20	5300	Ant2	10.4	0.12	10.52	24	Pass
NVNT	n20	5320	Ant2	10.28	0.12	10.4	24	Pass
NVNT	n40	5270	Ant2	9.13	0.23	9.36	24	Pass
NVNT	n40	5310	Ant2	9.67	0.24	9.91	24	Pass
NVNT	ac20	5260	Ant2	10.54	0.12	10.66	24	Pass
NVNT	ac20	5300	Ant2	9.97	0.12	10.09	24	Pass
NVNT	ac20	5320	Ant2	10.16	0.12	10.28	24	Pass
NVNT	ac40	5270	Ant2	10.34	0.24	10.58	24	Pass
NVNT	ac40	5310	Ant2	9.4	0.23	9.63	24	Pass
NVNT	ac80	5290	Ant2	8.32	0.25	8.57	24	Pass





MIMO

Condition	Mode	Frequency (MHz)	Total Power (dBm)			Limit (dBm)	Verdict
			Ant1	Ant2	Ant1+Ant2		
NVNT	n20	5260	11.93	10.79	14.41	24	Pass
NVNT	n20	5300	11.26	10.52	13.92	24	Pass
NVNT	n20	5320	11.09	10.4	13.77	24	Pass
NVNT	n40	5270	10.65	9.36	13.06	24	Pass
NVNT	n40	5310	10.9	9.91	13.44	24	Pass
NVNT	ac20	5260	11.84	10.66	14.30	24	Pass
NVNT	ac20	5300	11.61	10.09	13.93	24	Pass
NVNT	ac20	5320	11.46	10.28	13.92	24	Pass
NVNT	ac40	5270	10.37	10.58	13.49	24	Pass
NVNT	ac40	5310	10.7	9.63	13.21	24	Pass
NVNT	ac80	5290	9.86	8.57	12.27	24	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



D.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5260	Ant1	1.54	0.24	1.78	11	Pass
NVNT	a	5300	Ant1	2.46	0.24	2.7	11	Pass
NVNT	a	5320	Ant1	2.03	0.24	2.27	11	Pass
NVNT	n20	5260	Ant1	1.04	0.12	1.16	11	Pass
NVNT	n20	5300	Ant1	0.64	0.12	0.76	11	Pass
NVNT	n20	5320	Ant1	0.99	0.12	1.11	11	Pass
NVNT	n40	5270	Ant1	-3.06	0.24	-2.82	11	Pass
NVNT	n40	5310	Ant1	-2.82	0.23	-2.59	11	Pass
NVNT	ac20	5260	Ant1	1.05	0.12	1.17	11	Pass
NVNT	ac20	5300	Ant1	0.92	0.12	1.04	11	Pass
NVNT	ac20	5320	Ant1	0.51	0.12	0.63	11	Pass
NVNT	ac40	5270	Ant1	-3.69	0.24	-3.45	11	Pass
NVNT	ac40	5310	Ant1	-2.97	0.24	-2.73	11	Pass
NVNT	ac80	5290	Ant1	-7.03	0.25	-6.78	11	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5260	Ant2	0.57	0.24	0.81	11	Pass
NVNT	a	5300	Ant2	1.06	0.24	1.3	11	Pass
NVNT	a	5320	Ant2	1.28	0.24	1.52	11	Pass
NVNT	n20	5260	Ant2	-0.11	0.12	0.01	11	Pass
NVNT	n20	5300	Ant2	-0.33	0.12	-0.21	11	Pass
NVNT	n20	5320	Ant2	-0.69	0.12	-0.57	11	Pass
NVNT	n40	5270	Ant2	-4.39	0.23	-4.16	11	Pass
NVNT	n40	5310	Ant2	-4.1	0.24	-3.86	11	Pass
NVNT	ac20	5260	Ant2	-0.01	0.12	0.11	11	Pass
NVNT	ac20	5300	Ant2	-0.78	0.12	-0.66	11	Pass
NVNT	ac20	5320	Ant2	-0.6	0.12	-0.48	11	Pass
NVNT	ac40	5270	Ant2	-3.33	0.24	-3.09	11	Pass
NVNT	ac40	5310	Ant2	-4.35	0.23	-4.12	11	Pass
NVNT	ac80	5290	Ant2	-7.88	0.25	-7.63	11	Pass





MIMO


Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/MHz)		Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
			Duty Factor (dB)				
			Ant1	Ant2			
NVNT	n20	5260	1.16	0.01	3.63	10.21	Pass
NVNT	n20	5300	0.76	-0.21	3.31	10.21	Pass
NVNT	n20	5320	1.11	-0.57	3.36	10.21	Pass
NVNT	n40	5270	-2.82	-4.16	-0.43	10.21	Pass
NVNT	n40	5310	-2.59	-3.86	-0.17	10.21	Pass
NVNT	ac20	5260	1.17	0.11	3.68	10.21	Pass
NVNT	ac20	5300	1.04	-0.66	3.28	10.21	Pass
NVNT	ac20	5320	0.63	-0.48	3.12	10.21	Pass
NVNT	ac40	5270	-3.45	-3.09	-0.26	10.21	Pass
NVNT	ac40	5310	-2.73	-4.12	-0.36	10.21	Pass
NVNT	ac80	5290	-6.78	-7.63	-4.17	10.21	Pass






Test Graphs

PSD NVNT a 5260MHz Ant1

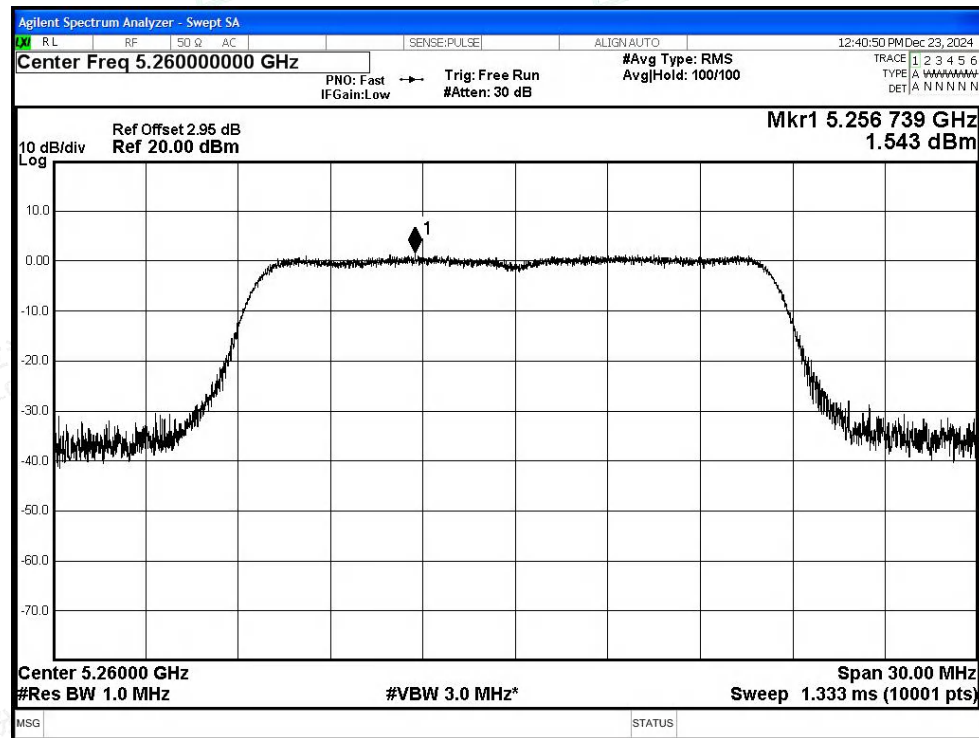


PSD NVNT a 5300MHz Ant1

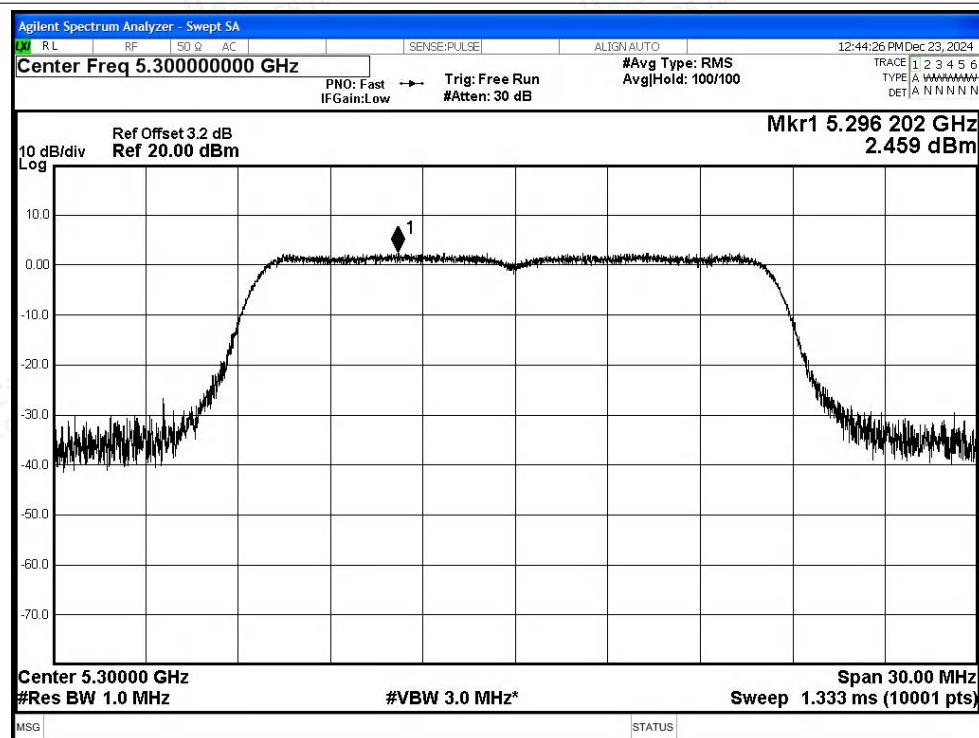








PSD NVNT a 5320MHz Ant1


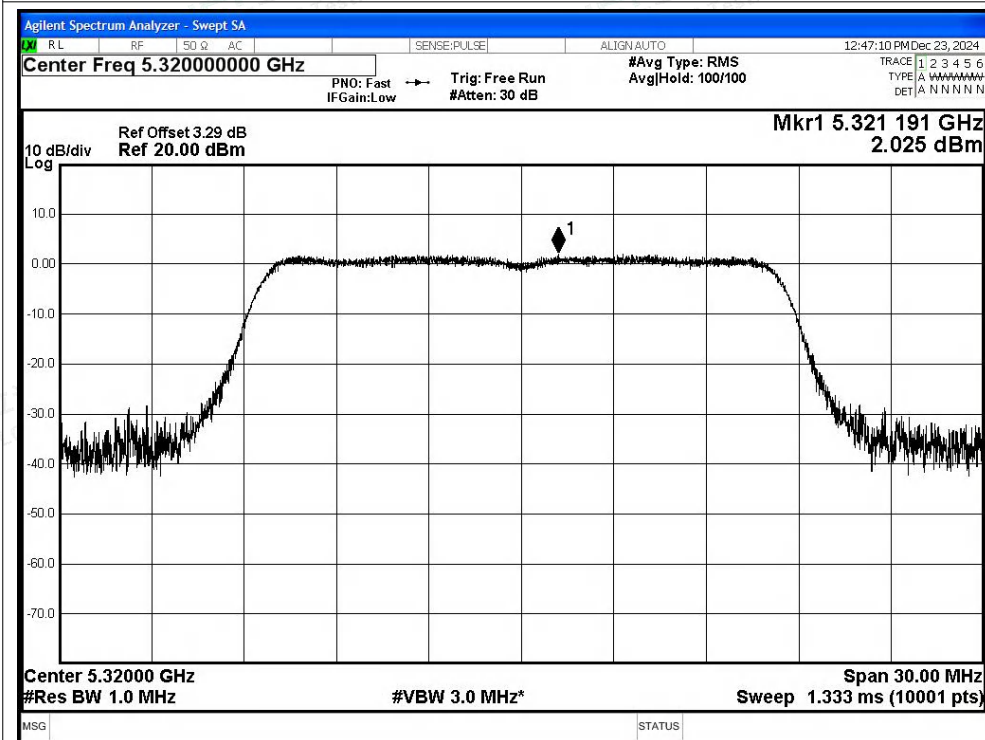


PSD NVNT n20 5260MHz Ant1

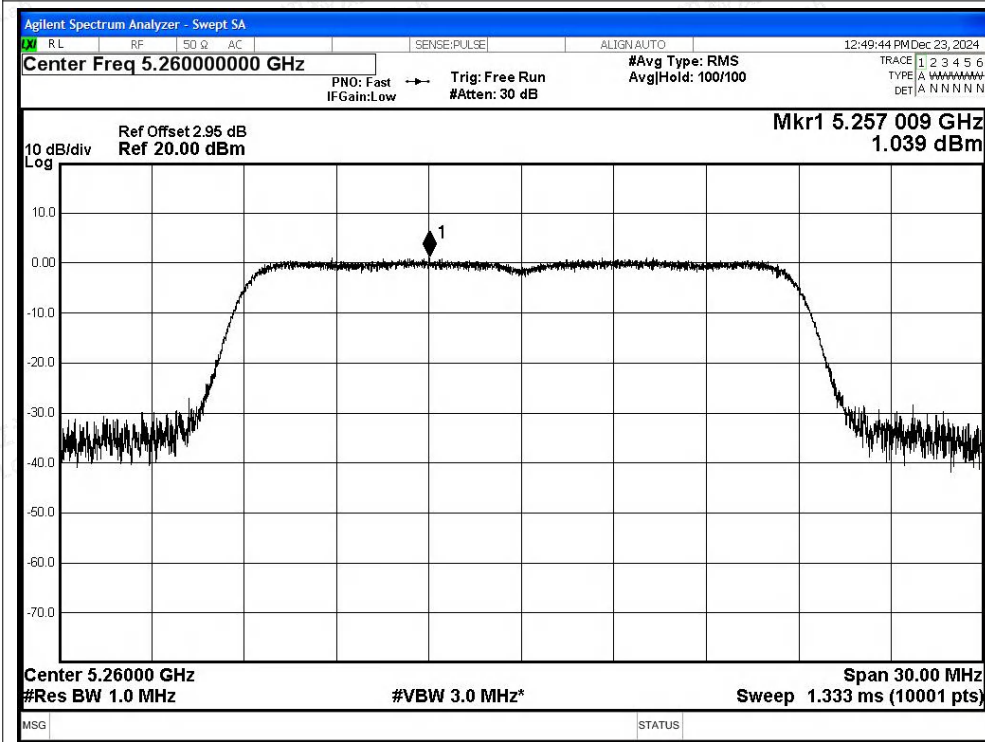

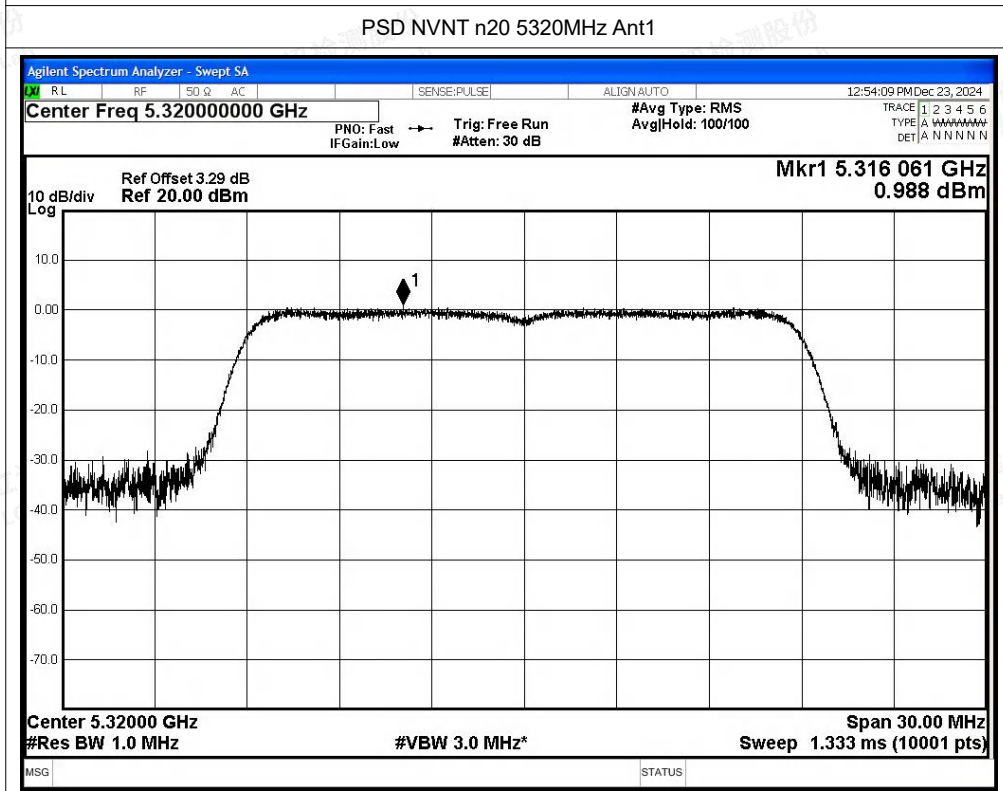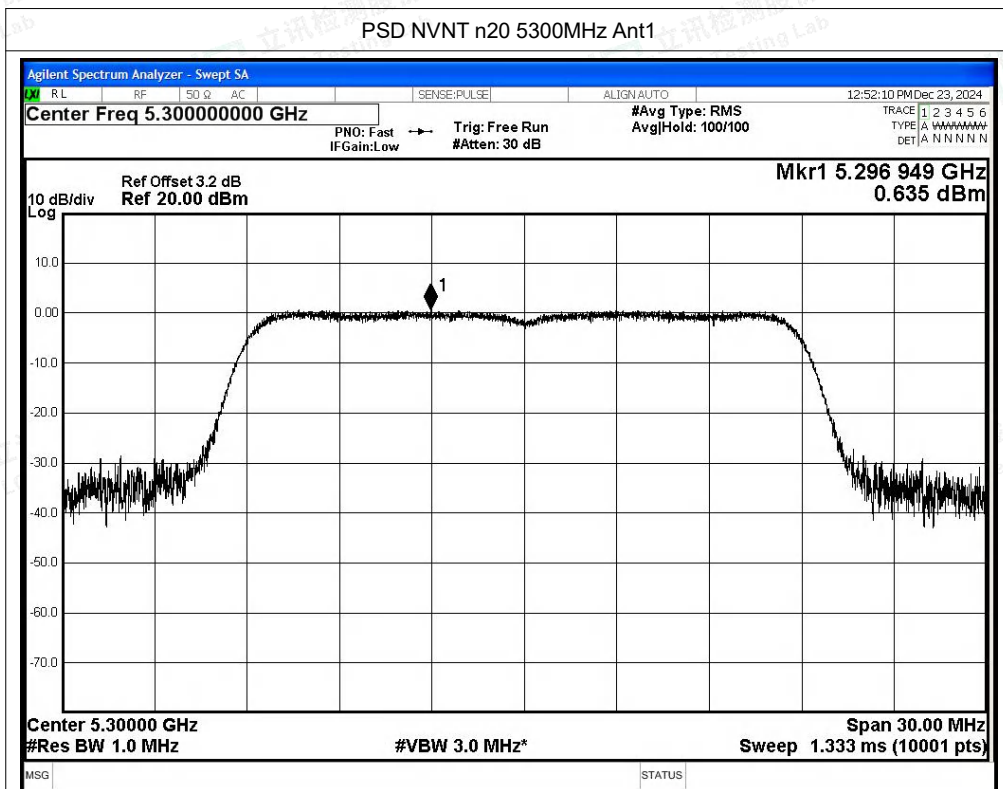


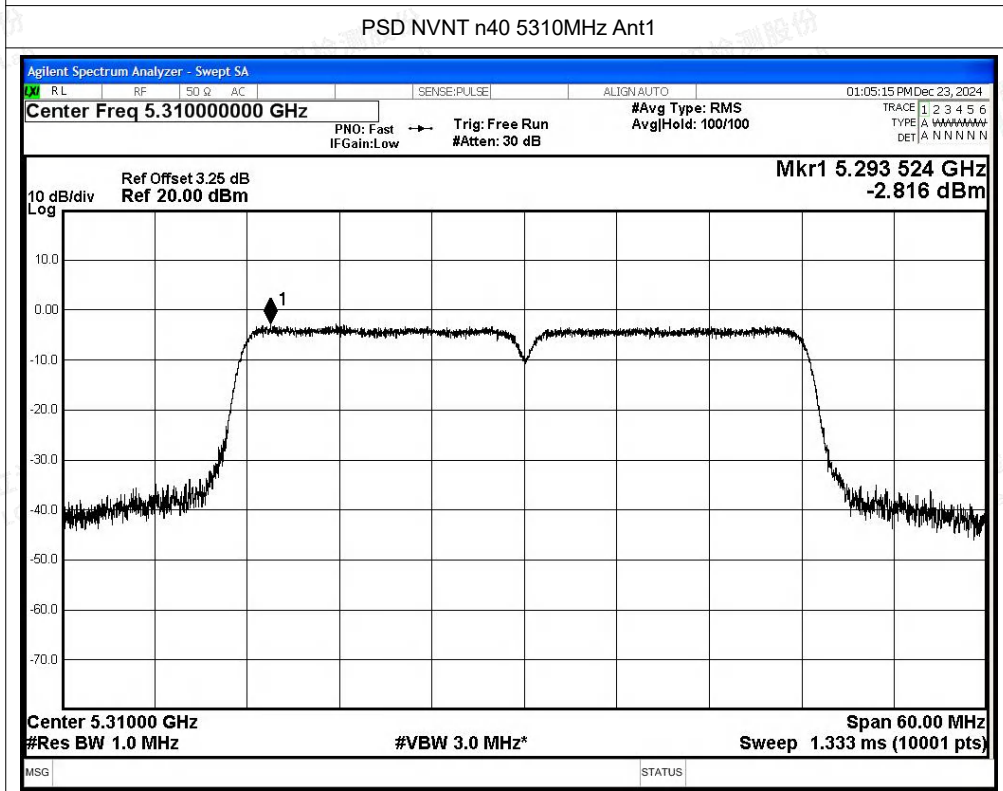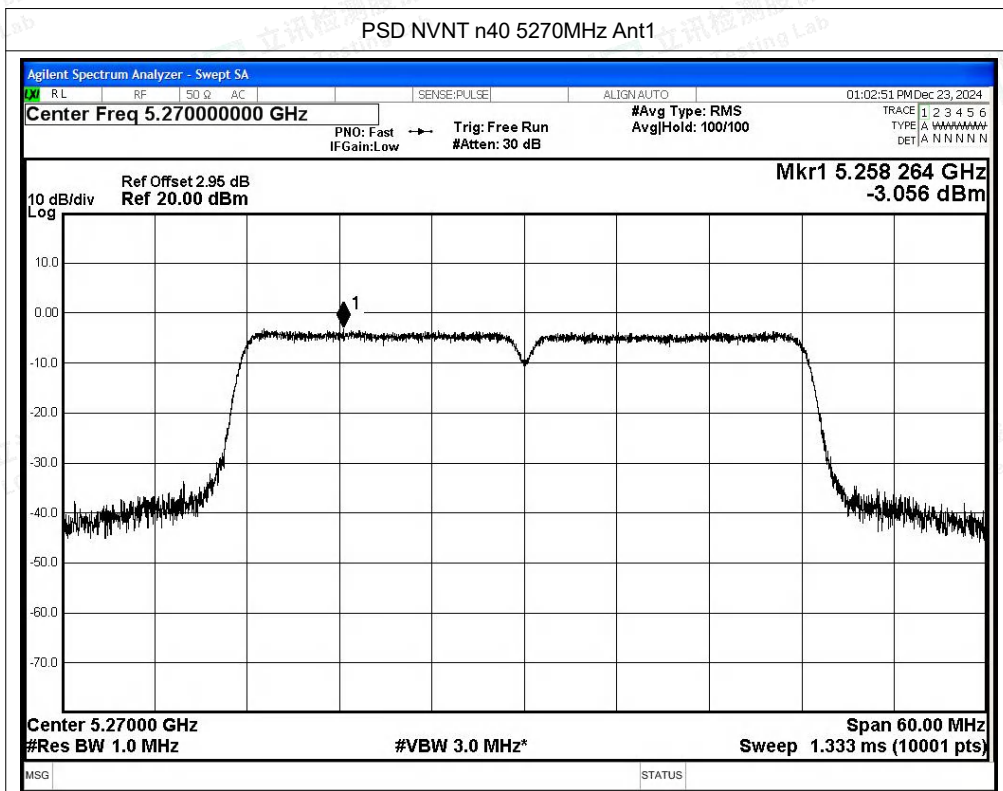

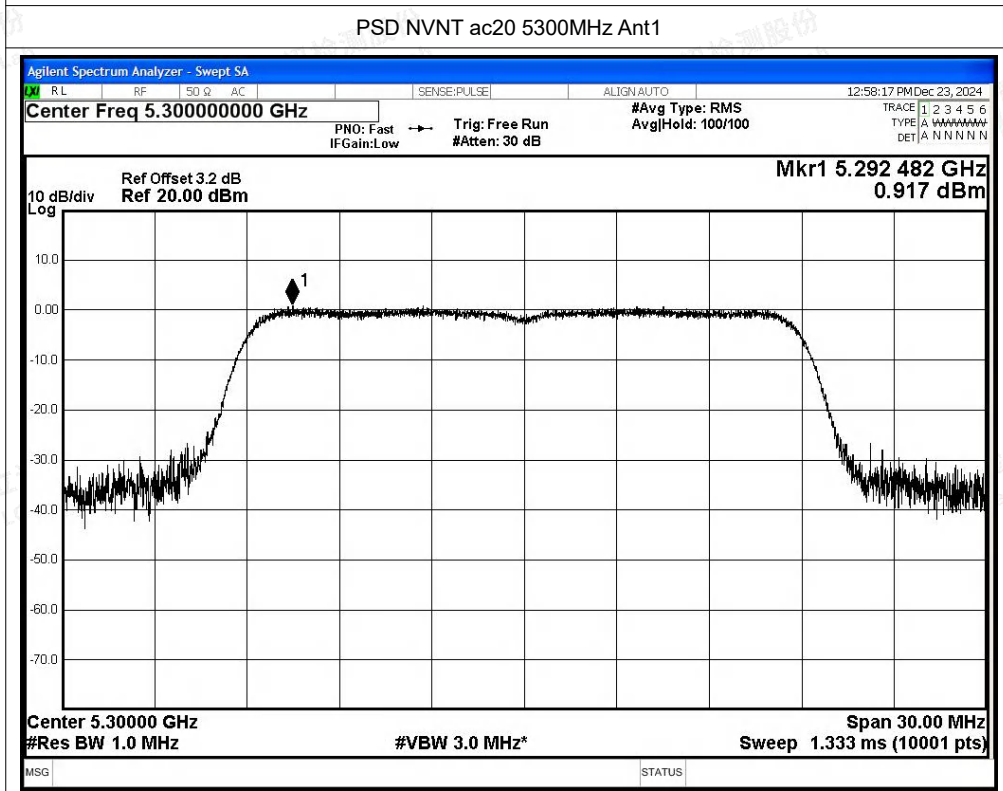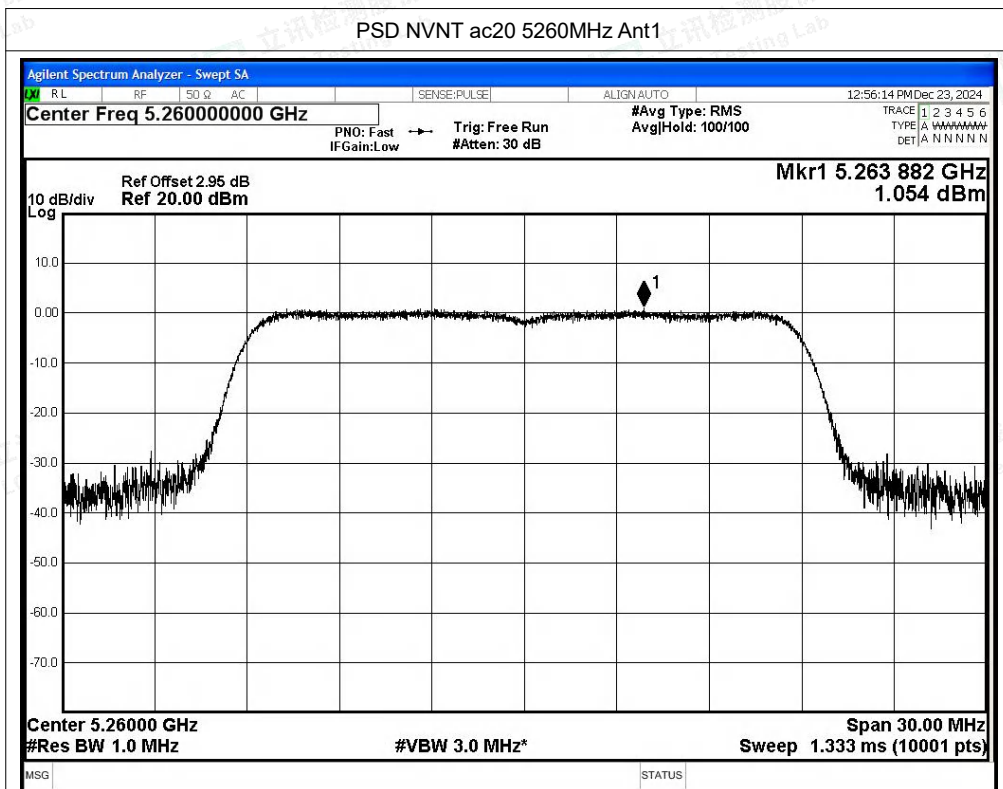




PSD NVNT ac20 5320MHz Ant1

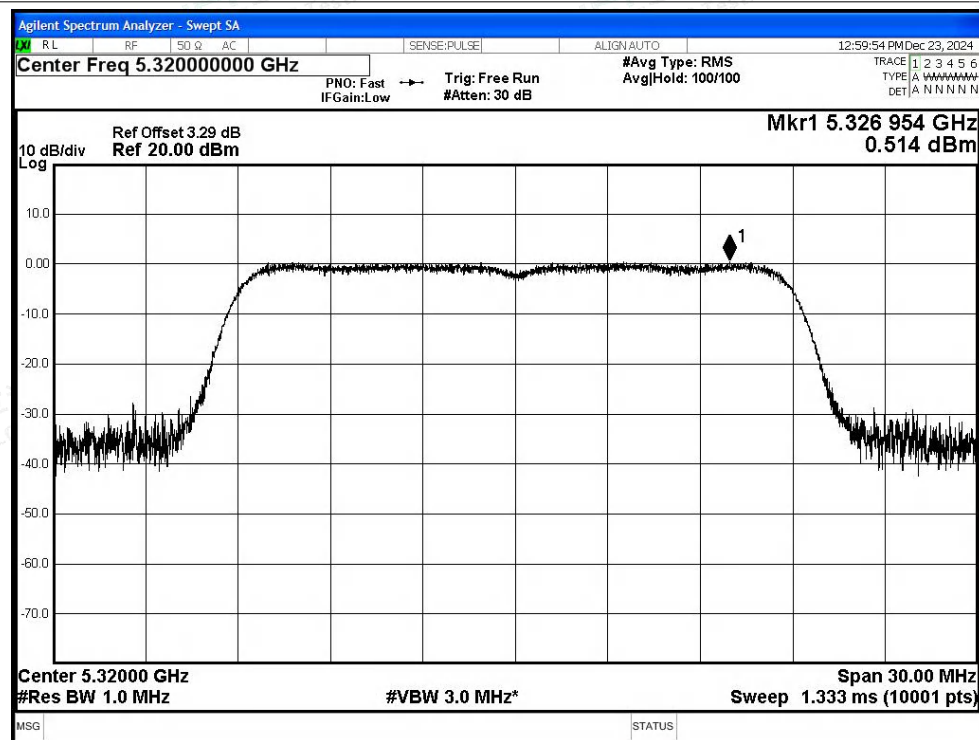


PSD NVNT ac40 5270MHz Ant1

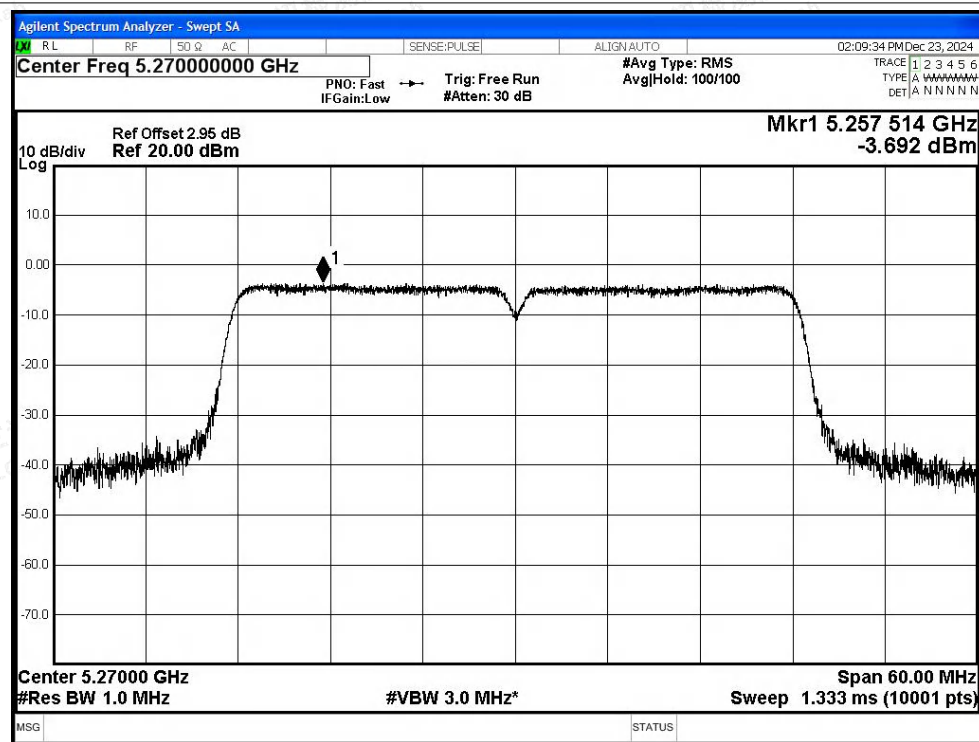




PSD NVNT ac40 5310MHz Ant1

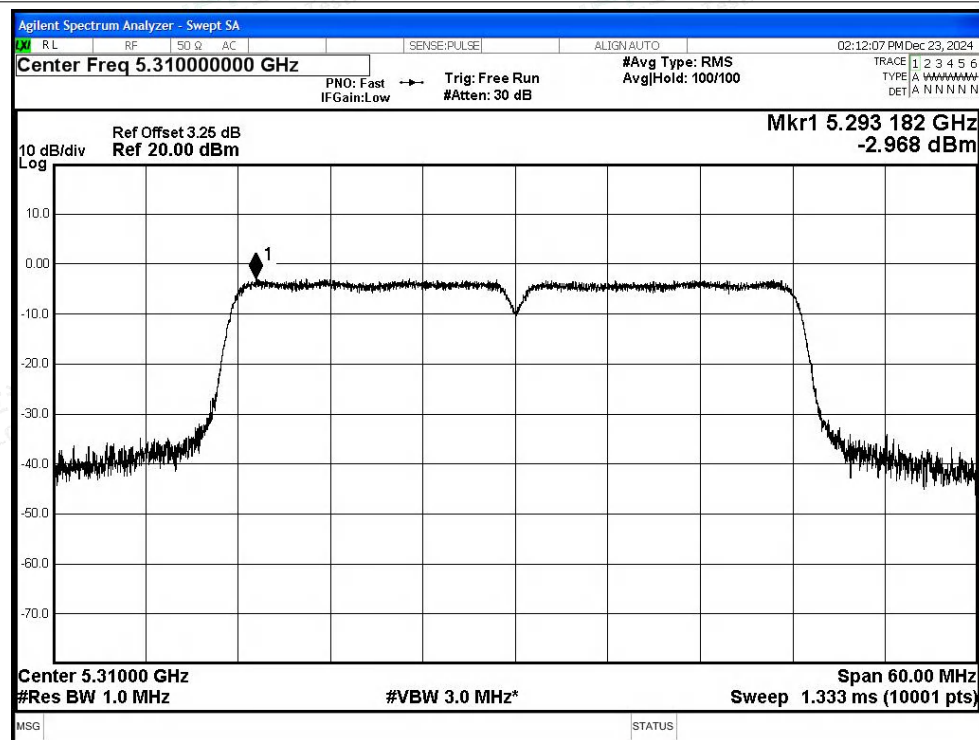


PSD NVNT ac80 5290MHz Ant1

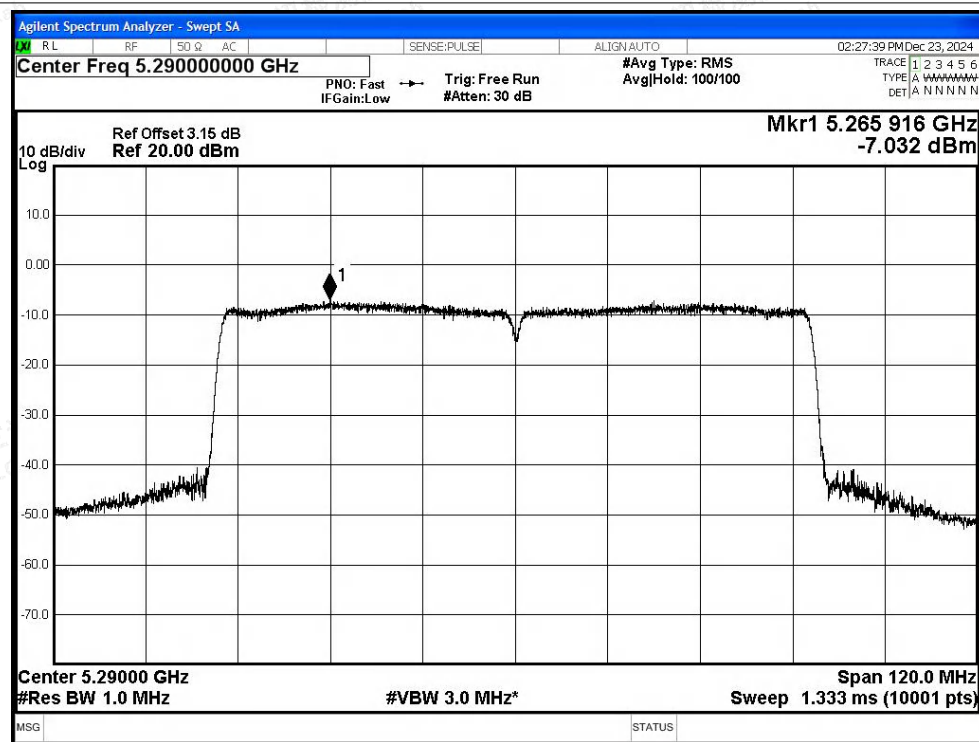




Test Graphs

PSD NVNT a 5260MHz Ant2

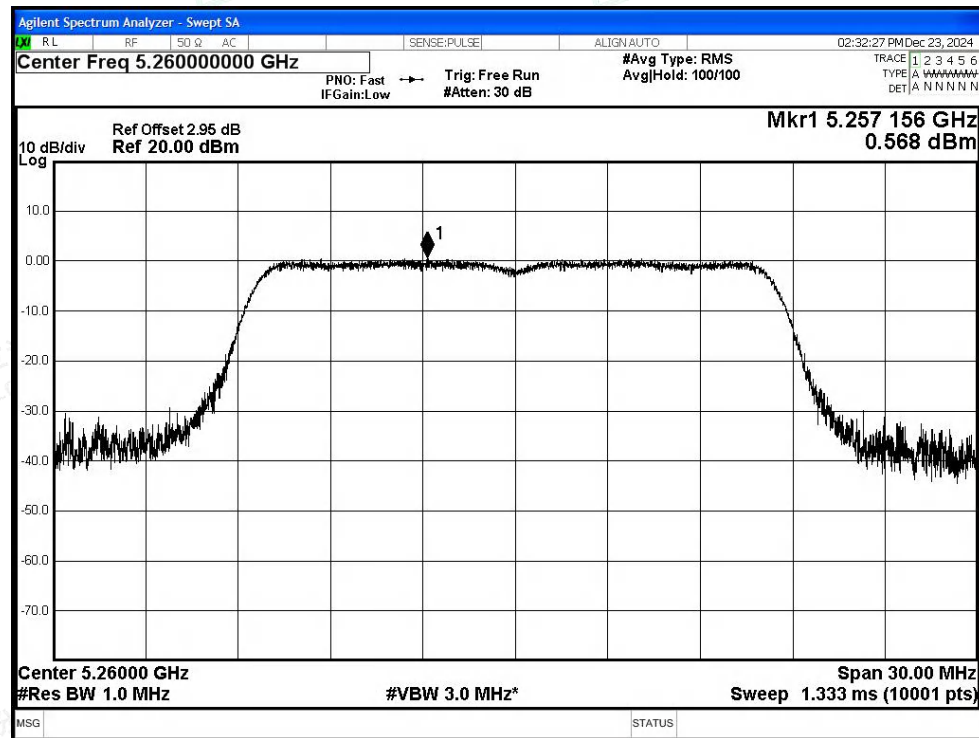


PSD NVNT a 5300MHz Ant2

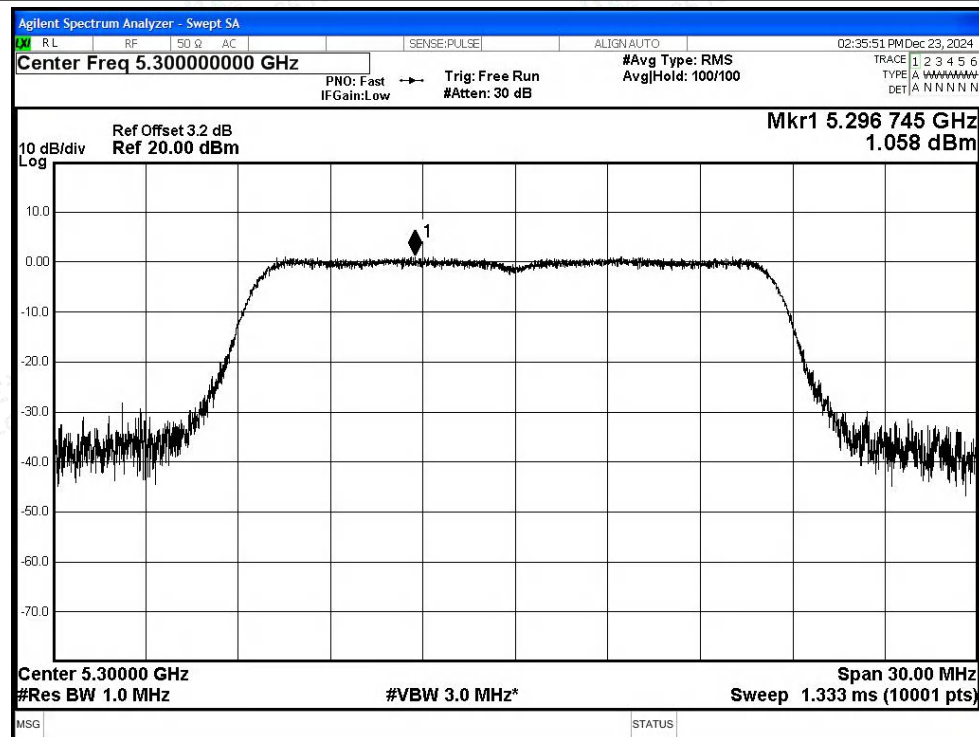




PSD NVNT a 5320MHz Ant2

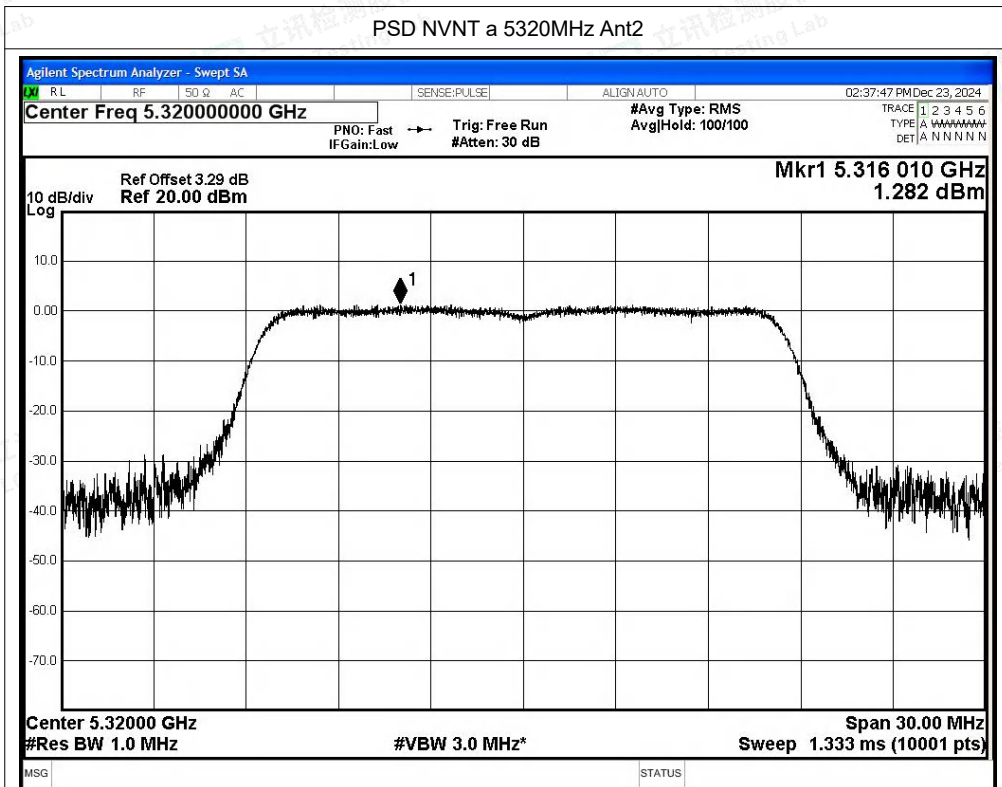


PSD NVNT n20 5260MHz Ant2

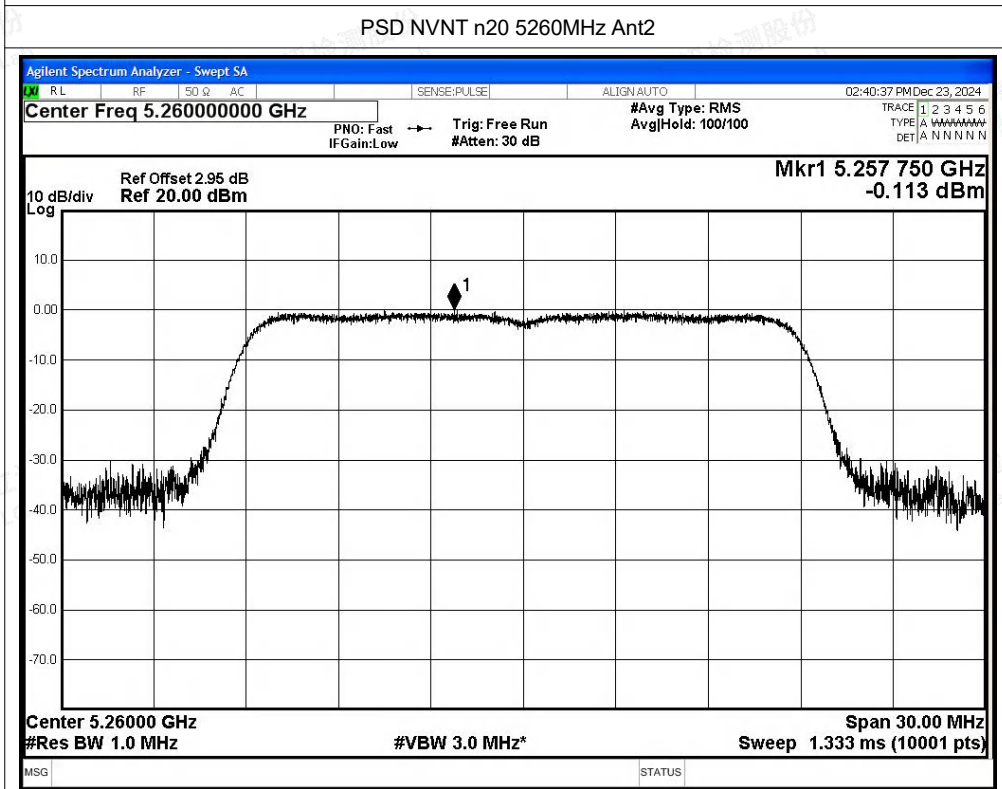




PSD NVNT n20 5300MHz Ant2

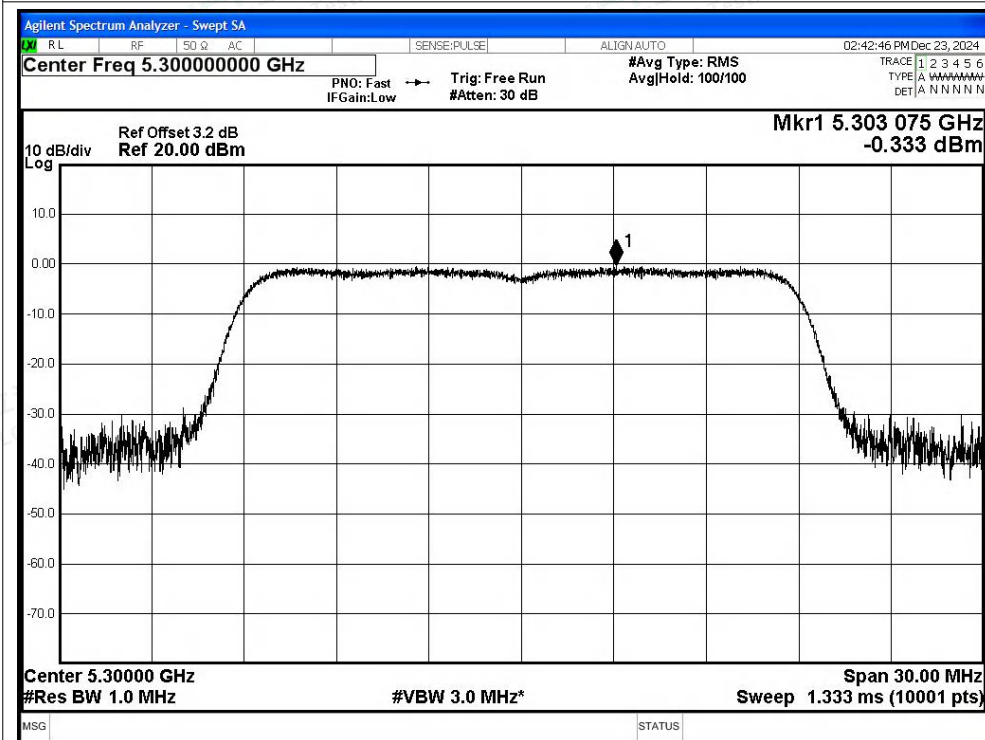


PSD NVNT n20 5320MHz Ant2

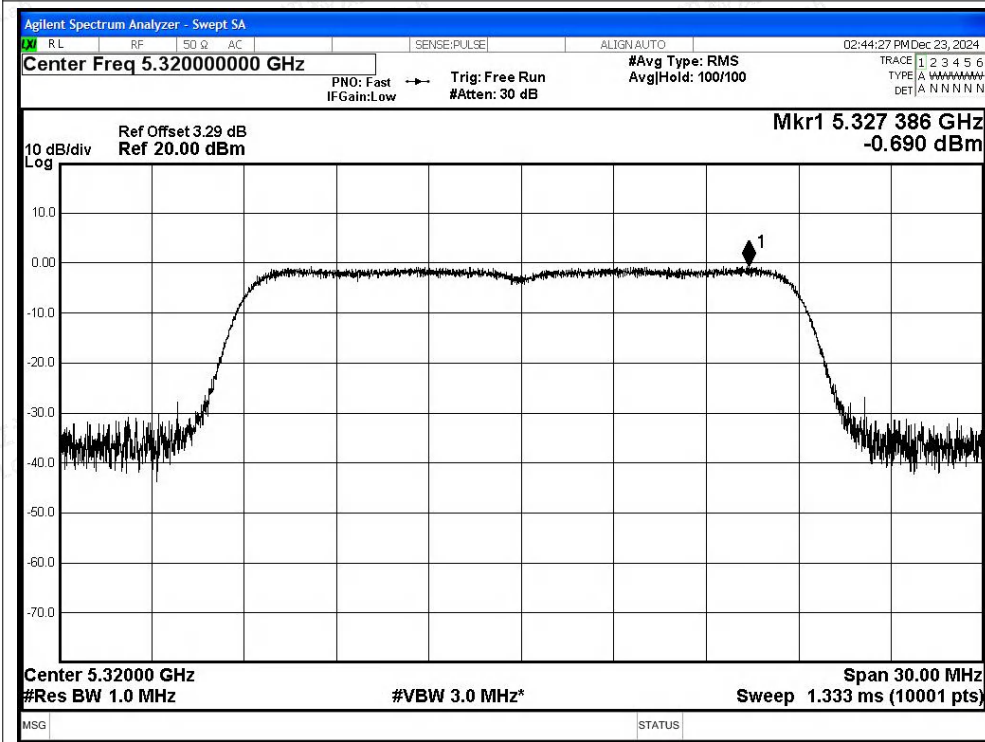




PSD NVNT n40 5270MHz Ant2

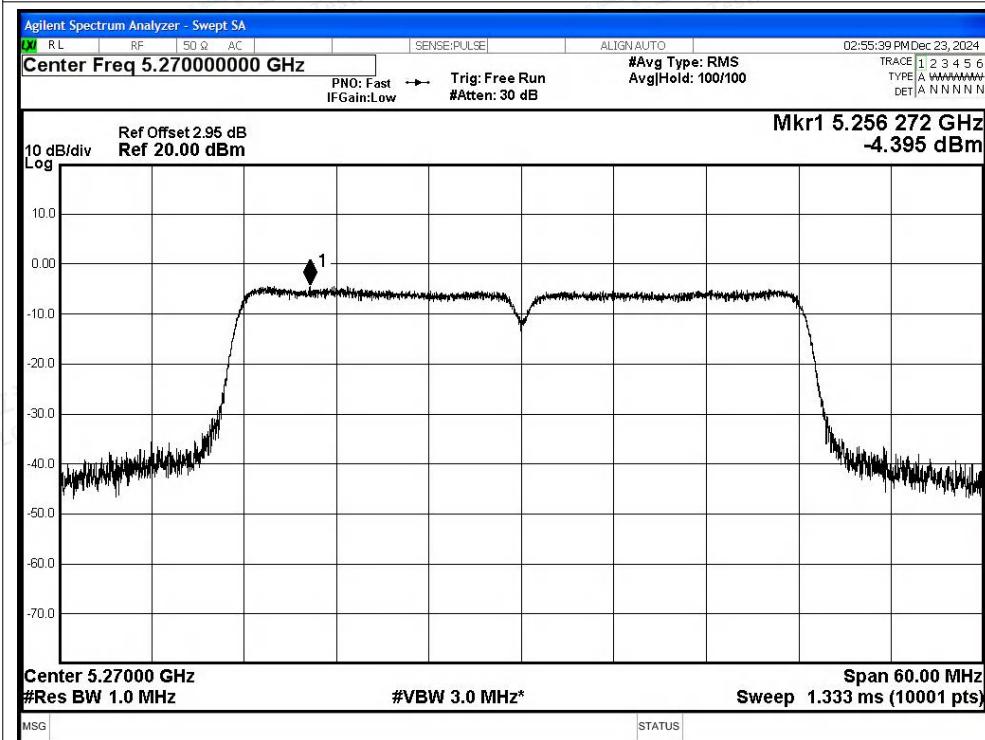


PSD NVNT n40 5310MHz Ant2

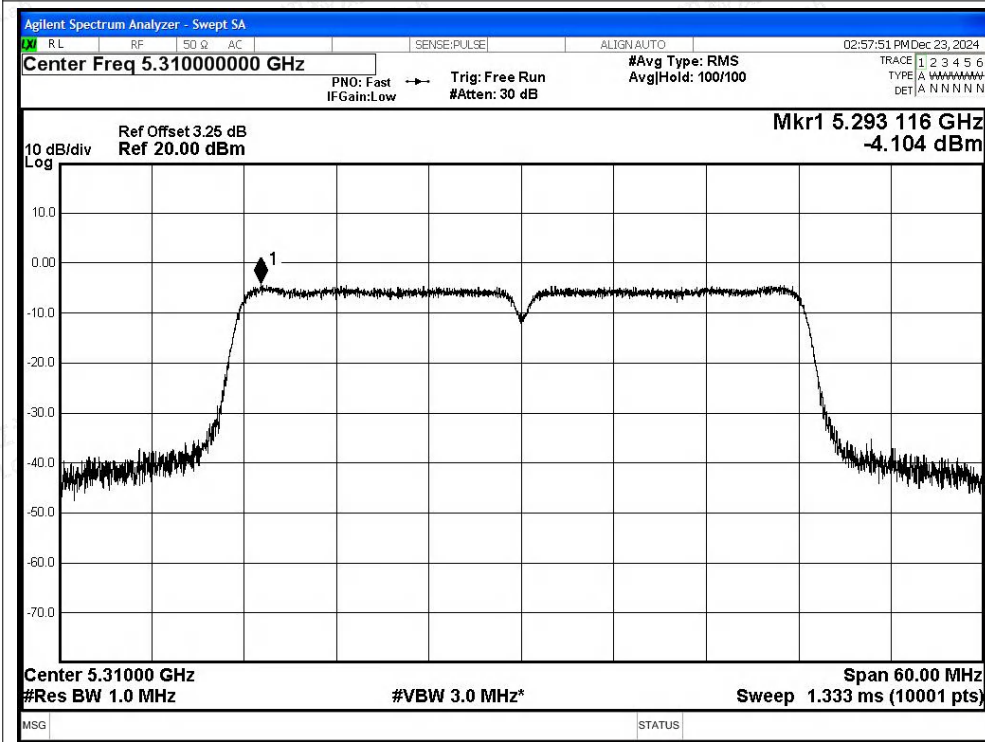




PSD NVNT ac20 5260MHz Ant2

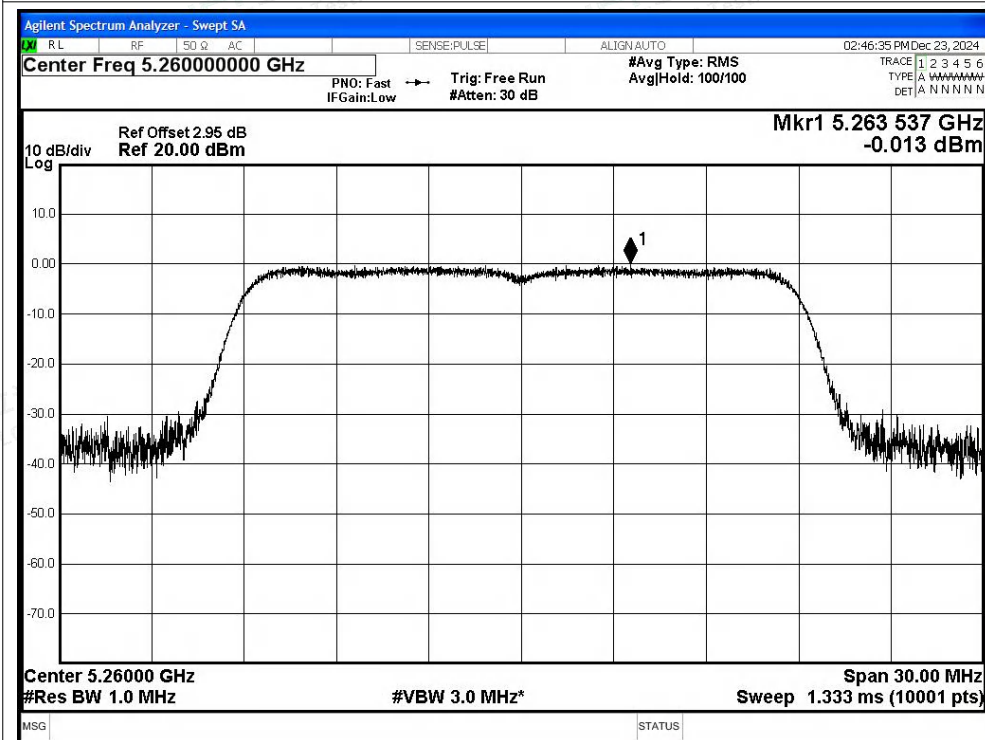


PSD NVNT ac20 5300MHz Ant2

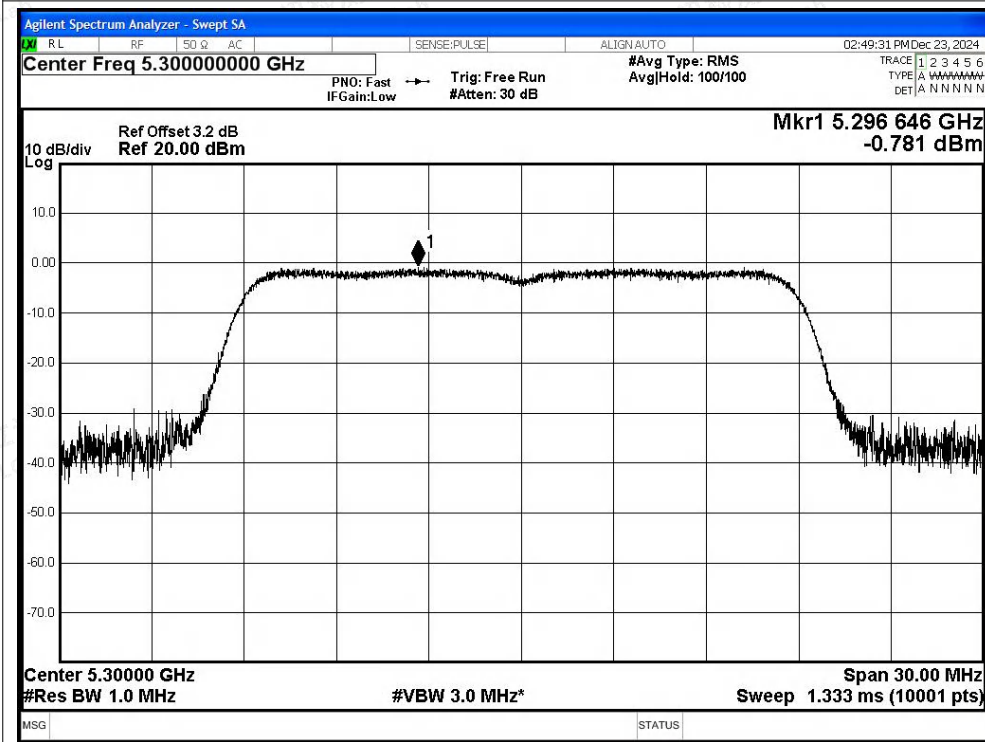






PSD NVNT ac20 5320MHz Ant2

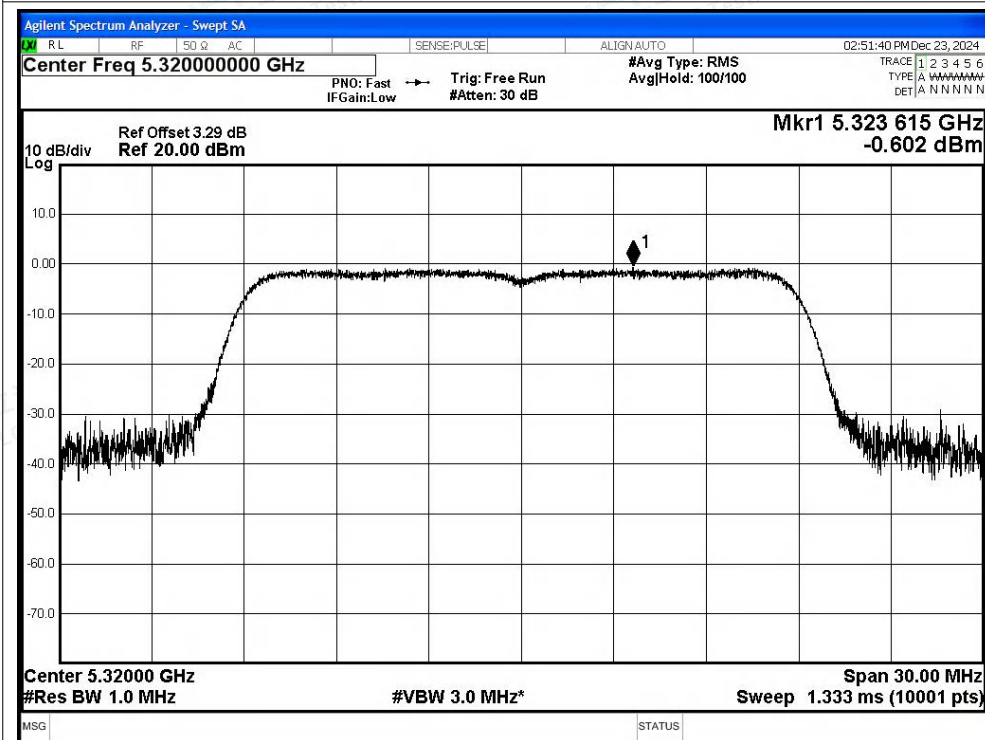

PSD NVNT ac40 5270MHz Ant2

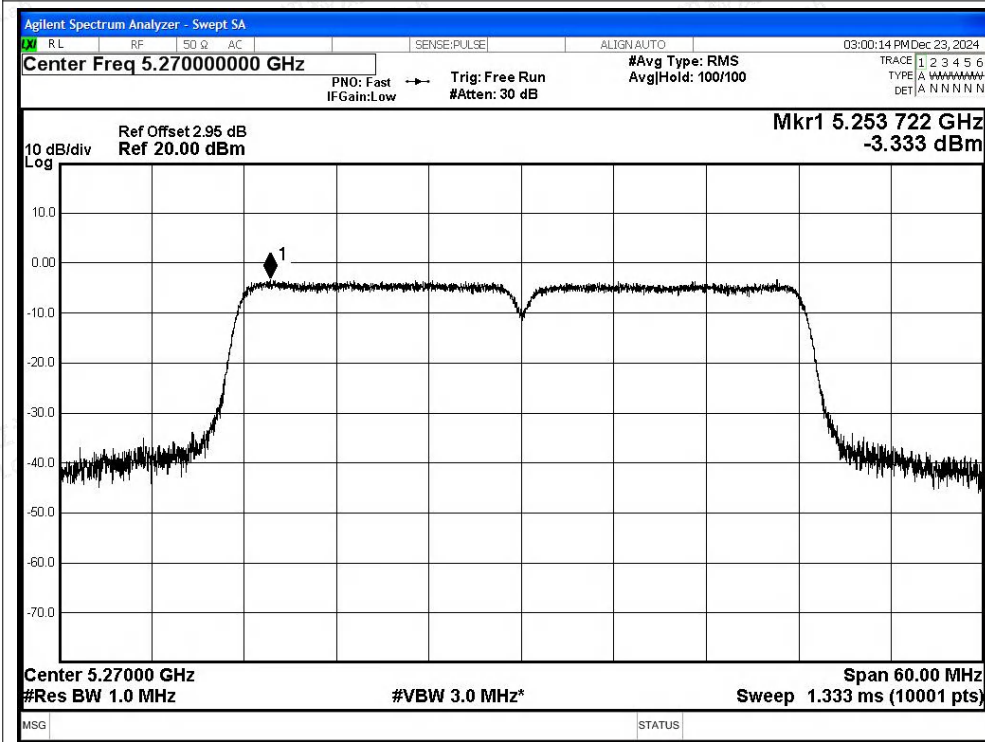

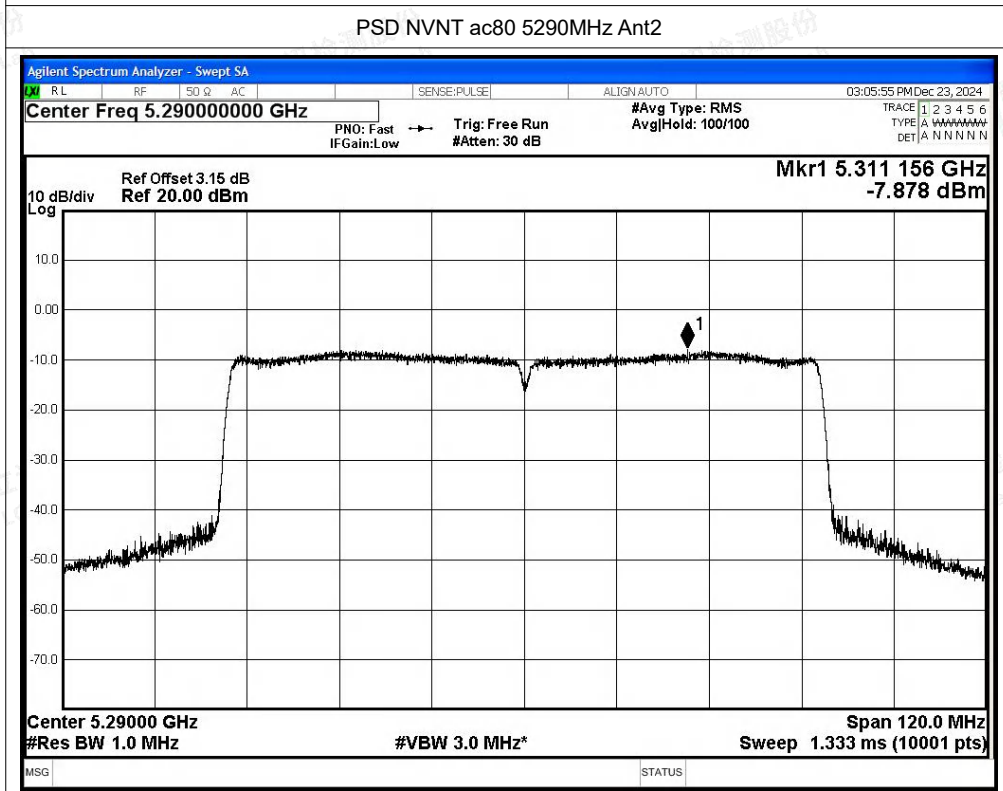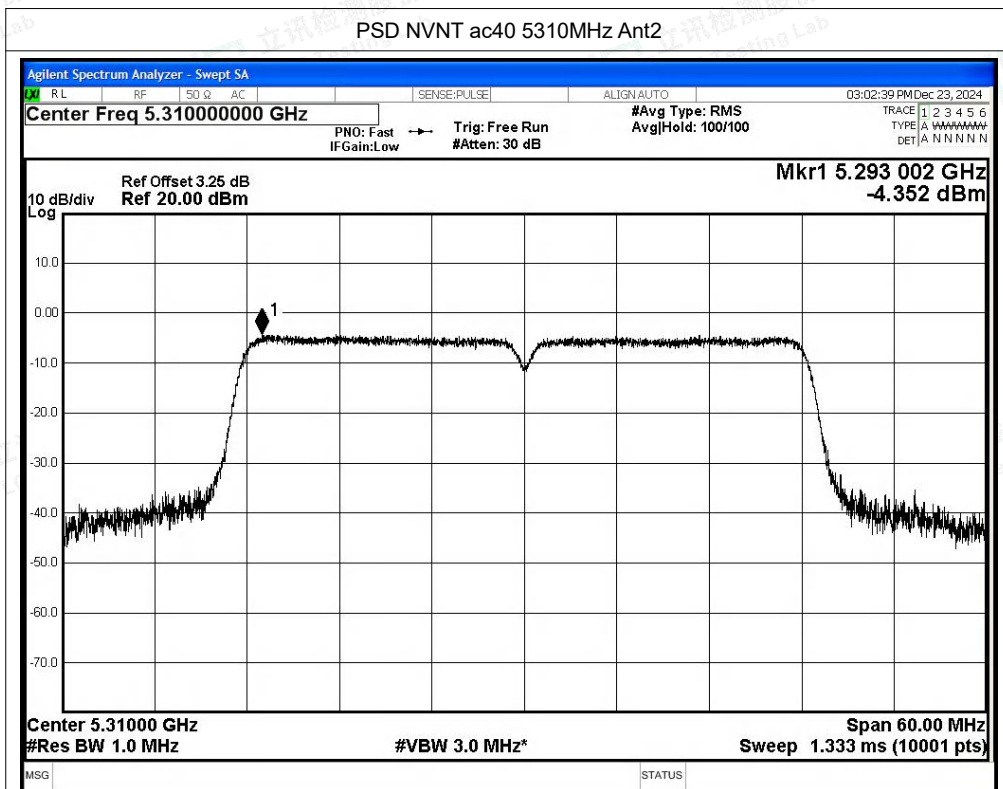



D.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5260	Ant1	4500	-50.88	3.94	-	48.29	Peak	68.2	Pass
NVNT	a	5260	Ant1	4500	-59.43	3.94	0.24	39.98	Average	54	Pass
NVNT	a	5260	Ant1	5088.12	-46.51	3.94	-	52.66	Peak	68.2	Pass
NVNT	a	5260	Ant1	5042.1	-56.6	3.94	0.24	42.81	Average	54	Pass
NVNT	a	5260	Ant1	5150	-49.69	3.94	-	49.48	Peak	68.2	Pass
NVNT	a	5260	Ant1	5150	-57.76	3.94	0.24	41.65	Average	54	Pass
NVNT	a	5320	Ant1	5350	-41.22	3.94	-	57.95	Peak	68.2	Pass
NVNT	a	5320	Ant1	5350	-56.81	3.94	0.24	42.60	Average	54	Pass
NVNT	a	5320	Ant1	5350.6	-40.74	3.94	-	58.43	Peak	68.2	Pass
NVNT	a	5320	Ant1	5351.2	-55.99	3.94	0.24	43.42	Average	54	Pass
NVNT	a	5320	Ant1	5460	-50.96	3.94	-	48.21	Peak	68.2	Pass
NVNT	a	5320	Ant1	5460	-57.37	3.94	0.24	42.04	Average	54	Pass
NVNT	n20	5260	Ant1	4500	-49.06	3.94	-	50.11	Peak	68.2	Pass
NVNT	n20	5260	Ant1	4500	-59.19	3.94	0.12	40.10	Average	54	Pass
NVNT	n20	5260	Ant1	5036.64	-46.39	3.94	-	52.78	Peak	68.2	Pass
NVNT	n20	5260	Ant1	5095.92	-56.81	3.94	0.12	42.48	Average	54	Pass
NVNT	n20	5260	Ant1	5150	-50.2	3.94	-	48.97	Peak	68.2	Pass
NVNT	n20	5260	Ant1	5150	-57.3	3.94	0.12	41.99	Average	54	Pass
NVNT	n20	5320	Ant1	5350	-44.07	3.94	-	55.10	Peak	68.2	Pass
NVNT	n20	5320	Ant1	5350	-55.55	3.94	0.12	43.74	Average	54	Pass
NVNT	n20	5320	Ant1	5350.6	-40.8	3.94	-	58.37	Peak	68.2	Pass
NVNT	n20	5320	Ant1	5350.4	-55.28	3.94	0.12	44.01	Average	54	Pass
NVNT	n20	5320	Ant1	5460	-49.96	3.94	-	49.21	Peak	68.2	Pass
NVNT	n20	5320	Ant1	5460	-57.49	3.94	0.12	41.80	Average	54	Pass
NVNT	n40	5270	Ant1	4500	-49.19	3.94	-	49.98	Peak	68.2	Pass
NVNT	n40	5270	Ant1	4500	-59.43	3.94	0.24	39.98	Average	54	Pass
NVNT	n40	5270	Ant1	4907.43	-46.46	3.94	-	52.71	Peak	68.2	Pass
NVNT	n40	5270	Ant1	4804.56	-56.78	3.94	0.24	42.63	Average	54	Pass
NVNT	n40	5270	Ant1	5150	-49.42	3.94	-	49.75	Peak	68.2	Pass
NVNT	n40	5270	Ant1	5150	-57.71	3.94	0.24	41.70	Average	54	Pass
NVNT	n40	5310	Ant1	5350	-42.54	3.94	-	56.63	Peak	68.2	Pass
NVNT	n40	5310	Ant1	5350	-55.94	3.94	0.23	43.46	Average	54	Pass
NVNT	n40	5310	Ant1	5352.6	-40.77	3.94	-	58.40	Peak	68.2	Pass
NVNT	n40	5310	Ant1	5350.8	-54.97	3.94	0.23	44.43	Average	54	Pass
NVNT	n40	5310	Ant1	5460	-50.86	3.94	-	48.31	Peak	68.2	Pass






NVNT	n40	5310	Ant1	5460	-57.85	3.94	0.23	41.55	Average	54	Pass
NVNT	ac20	5260	Ant1	4500	-50.75	3.94	-	48.42	Peak	68.2	Pass
NVNT	ac20	5260	Ant1	4500	-58.88	3.94	0.12	40.41	Average	54	Pass
NVNT	ac20	5260	Ant1	5088.12	-47	3.94	-	52.17	Peak	68.2	Pass
NVNT	ac20	5260	Ant1	5053.8	-56.67	3.94	0.12	42.62	Average	54	Pass
NVNT	ac20	5260	Ant1	5150	-50.17	3.94	-	49.00	Peak	68.2	Pass
NVNT	ac20	5260	Ant1	5150	-57.35	3.94	0.12	41.94	Average	54	Pass
NVNT	ac20	5320	Ant1	5350	-42.94	3.94	-	56.23	Peak	68.2	Pass
NVNT	ac20	5320	Ant1	5350	-55.7	3.94	0.12	43.59	Average	54	Pass
NVNT	ac20	5320	Ant1	5350.2	-41.86	3.94	-	57.31	Peak	68.2	Pass
NVNT	ac20	5320	Ant1	5352.2	-55.66	3.94	0.12	43.63	Average	54	Pass
NVNT	ac20	5320	Ant1	5460	-50.98	3.94	-	48.19	Peak	68.2	Pass
NVNT	ac20	5320	Ant1	5460	-57.57	3.94	0.12	41.72	Average	54	Pass
NVNT	ac40	5270	Ant1	4500	-51.51	3.94	-	47.66	Peak	68.2	Pass
NVNT	ac40	5270	Ant1	4500	-58.98	3.94	0.24	40.43	Average	54	Pass
NVNT	ac40	5270	Ant1	5079.96	-47.01	3.94	-	52.16	Peak	68.2	Pass
NVNT	ac40	5270	Ant1	4806.18	-56.61	3.94	0.24	42.80	Average	54	Pass
NVNT	ac40	5270	Ant1	5150	-49.86	3.94	-	49.31	Peak	68.2	Pass
NVNT	ac40	5270	Ant1	5150	-58.04	3.94	0.24	41.37	Average	54	Pass
NVNT	ac40	5310	Ant1	5350	-47.25	3.94	-	51.92	Peak	68.2	Pass
NVNT	ac40	5310	Ant1	5350	-55.33	3.94	0.24	44.08	Average	54	Pass
NVNT	ac40	5310	Ant1	5350.4	-43.67	3.94	-	55.50	Peak	68.2	Pass
NVNT	ac40	5310	Ant1	5350.6	-55.07	3.94	0.24	44.34	Average	54	Pass
NVNT	ac40	5310	Ant1	5460	-49.61	3.94	-	49.56	Peak	68.2	Pass
NVNT	ac40	5310	Ant1	5460	-58.04	3.94	0.24	41.37	Average	54	Pass
NVNT	ac80	5290	Ant1	4500	-50.39	3.94	-	48.78	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	4500	-58.46	3.94	0.25	40.96	Average	54	Pass
NVNT	ac80	5290	Ant1	5117.7	-46.21	3.94	-	52.96	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5092.47	-56.41	3.94	0.25	43.01	Average	54	Pass
NVNT	ac80	5290	Ant1	5150	-48.24	3.94	-	50.93	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5150	-56.63	3.94	0.25	42.79	Average	54	Pass
NVNT	ac80	5290	Ant1	5350	-42.82	3.94	-	56.35	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5350	-55.66	3.94	0.25	43.76	Average	54	Pass
NVNT	ac80	5290	Ant1	5350.25	-41.46	3.94	-	57.71	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5350.25	-55.3	3.94	0.25	44.12	Average	54	Pass
NVNT	ac80	5290	Ant1	5460	-50.21	3.94	-	48.96	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5460	-57.82	3.94	0.25	41.60	Average	54	Pass






Test Graphs

Restrict Band NVNT a 5260MHz Ant1 Peak

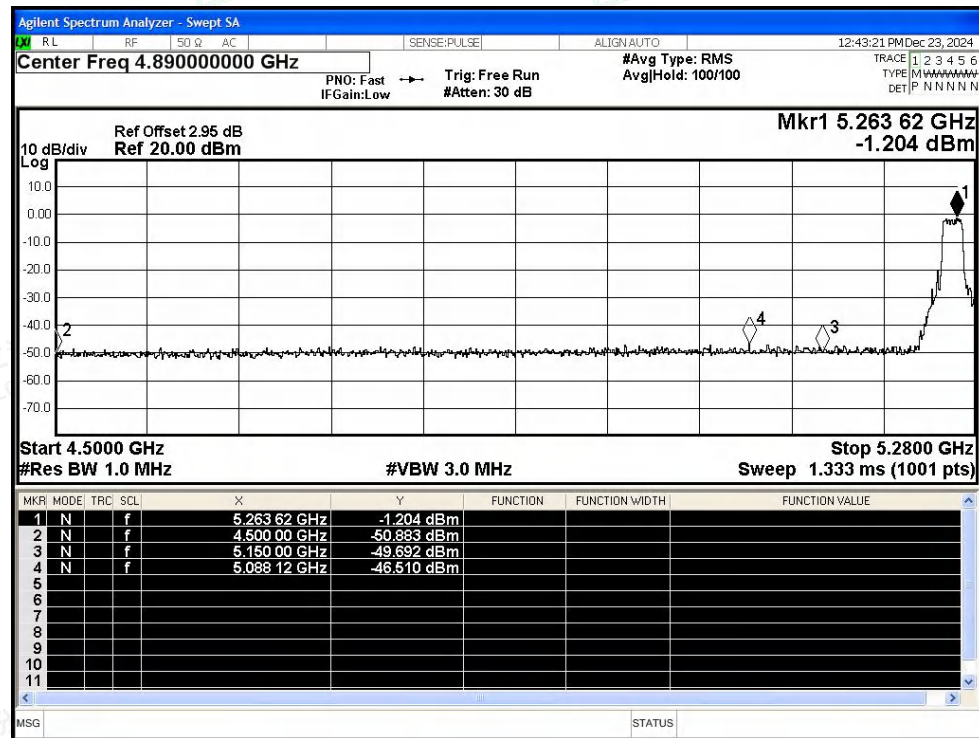

Restrict Band NVNT a 5260MHz Ant1 Average

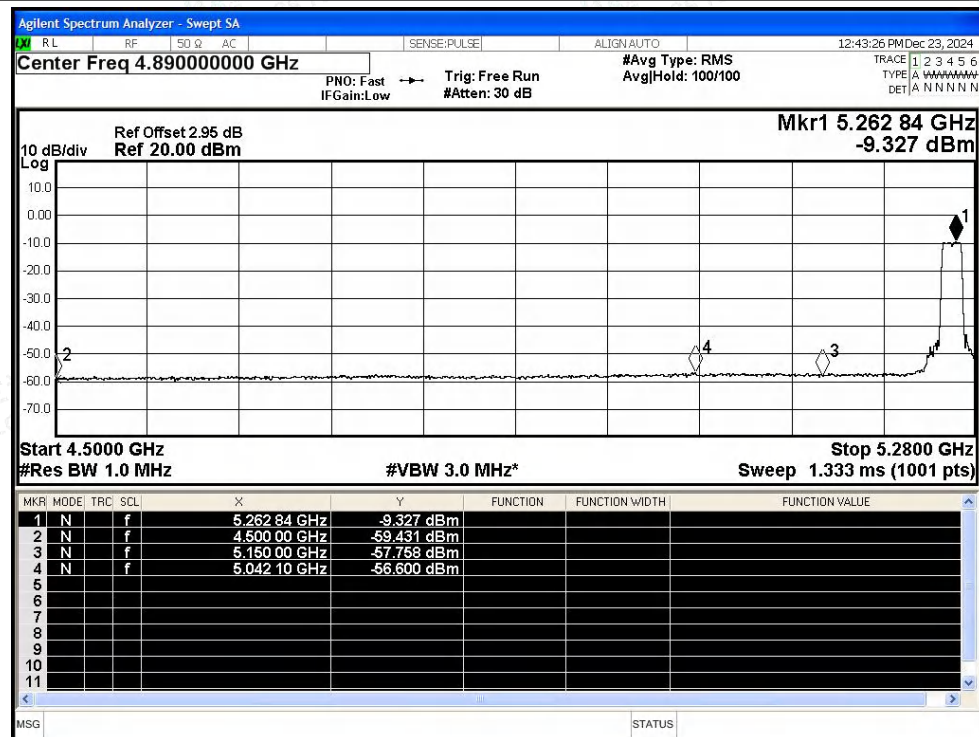

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT a 5320MHz Ant1 Peak

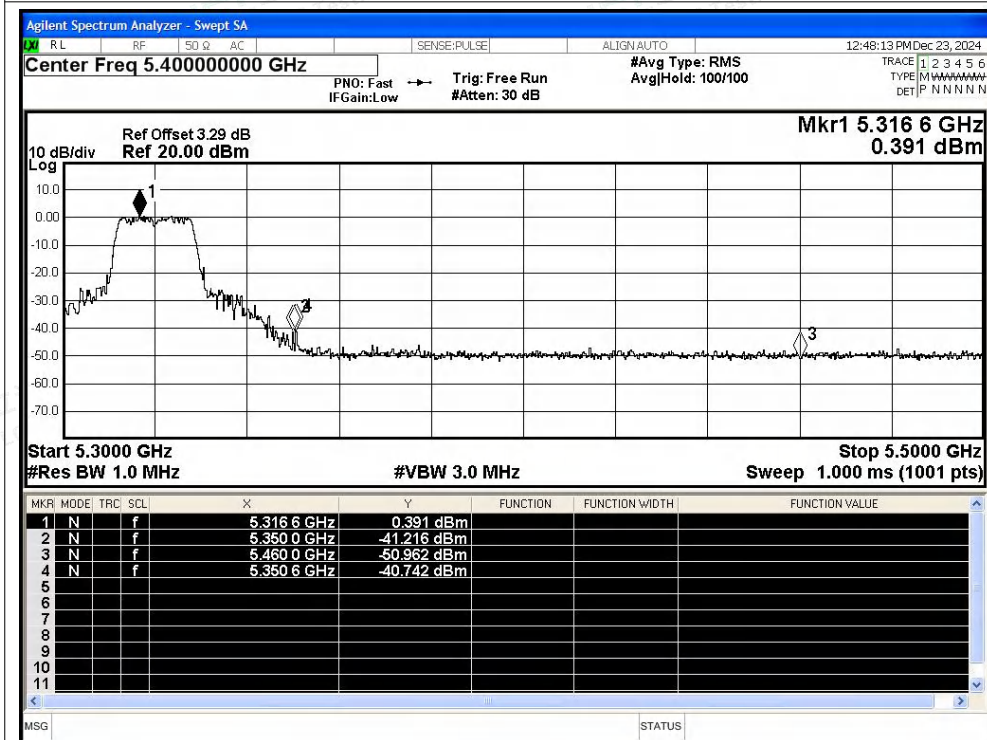

Restrict Band NVNT a 5320MHz Ant1 Average

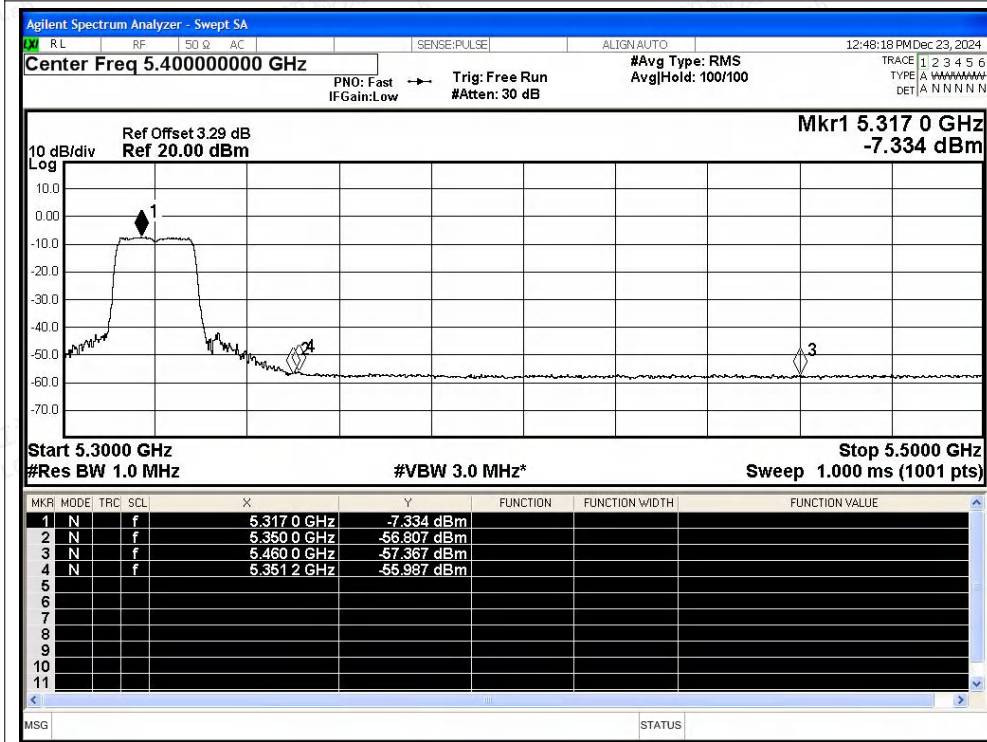

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity