

# FCC SAR Test Report


Report No. : SA180829W002  
Applicant : Sonim Technologies, Inc.  
Address : 1875 S. Grant St. Suite 750. San Mateo, CA, 94402  
Product : Mobile Phone  
FCC ID : WYPPC2223  
Brand : Sonim  
Model No. : XP3800  
Standards : FCC 47 CFR Part 2 (2.1093) / IEEE C95.1:1992 / IEEE 1528:2013  
KDB 865664 D01 v01r04 / KDB 865664 D02 v01r02  
KDB 248227 D01 v02r02 / KDB 447498 D01 v06  
/ KDB 648474 D04 v01r03 / KDB 941225 D01 v03r01  
/ KDB 941225 D05 v02r05 / KDB 941225 D06 v02r01  
Sample Received Date : Sep. 25, 2018  
Date of Testing : Sep. 26, 2018 ~ Dec. 21, 2018

**CERTIFICATION:** The above equipment have been tested by **BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD.**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's SAR characteristics under the conditions specified in this report. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by A2LA or any government agencies.

Prepared By :

  
Xianxiong Qin / Engineer

Approved By :

  
Luke Lu / Manager

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

|                                                                                             |    |
|---------------------------------------------------------------------------------------------|----|
| Release Control Record .....                                                                | 3  |
| 1. Summary of Maximum SAR Value .....                                                       | 4  |
| 2. Description of Equipment Under Test .....                                                | 5  |
| 3. SAR Measurement System .....                                                             | 6  |
| 3.1 Definition of Specific Absorption Rate (SAR) .....                                      | 6  |
| 3.2 SPEAG DASY System .....                                                                 | 6  |
| 3.2.1 Robot.....                                                                            | 7  |
| 3.2.2 Probes.....                                                                           | 8  |
| 3.2.3 Data Acquisition Electronics (DAE) .....                                              | 8  |
| 3.2.4 Phantoms .....                                                                        | 9  |
| 3.2.5 Device Holder.....                                                                    | 10 |
| 3.2.6 System Validation Dipoles.....                                                        | 10 |
| 3.2.7 Tissue Simulating Liquids.....                                                        | 11 |
| 3.3 SAR System Verification .....                                                           | 14 |
| 3.4 SAR Measurement Procedure .....                                                         | 15 |
| 3.4.1 Area & Zoom Scan Procedure .....                                                      | 15 |
| 3.4.2 Volume Scan Procedure.....                                                            | 15 |
| 3.4.3 Power Drift Monitoring.....                                                           | 16 |
| 3.4.4 Spatial Peak SAR Evaluation .....                                                     | 16 |
| 3.4.5 SAR Averaged Methods .....                                                            | 16 |
| 4. SAR Measurement Evaluation .....                                                         | 17 |
| 4.1 EUT Configuration and Setting.....                                                      | 17 |
| 4.2 EUT Testing Position .....                                                              | 24 |
| 4.2.1 Head Exposure Conditions.....                                                         | 24 |
| 4.2.2 Body-worn Accessory Exposure Conditions.....                                          | 26 |
| 4.2.3 Hotspot Mode Exposure Conditions .....                                                | 27 |
| 4.2.4 SAR Test Exclusion Evaluations .....                                                  | 28 |
| 4.2.5 Simultaneous Transmission Possibilities.....                                          | 29 |
| 4.3 Tissue Verification .....                                                               | 30 |
| 4.4 System Validation.....                                                                  | 31 |
| 4.5 System Verification.....                                                                | 32 |
| 4.6 Maximum Output Power.....                                                               | 33 |
| 4.6.1 Maximum Conducted Power .....                                                         | 33 |
| 4.6.2 Measured Conducted Power Result.....                                                  | 35 |
| 4.7 SAR Testing Results .....                                                               | 57 |
| 4.7.1 SAR Test Reduction Considerations .....                                               | 57 |
| 4.7.2 SAR Results for Head Exposure Condition .....                                         | 59 |
| 4.7.3 SAR Results for Body-worn Exposure Condition (Separation Distance is 1.5 cm Gap)..... | 63 |
| 4.7.4 SAR Results for Hotspot Exposure Condition (Separation Distance is 1.0 cm Gap).....   | 65 |
| 4.7.5 SAR Measurement Variability.....                                                      | 70 |
| 4.7.6 Simultaneous Multi-band Transmission Evaluation .....                                 | 71 |
| 5. Calibration of Test Equipment.....                                                       | 91 |
| 6. Measurement Uncertainty.....                                                             | 92 |
| 7. Information on the Testing Laboratories.....                                             | 94 |
| Appendix A. SAR Plots of System Verification                                                |    |
| Appendix B. SAR Plots of SAR Measurement                                                    |    |
| Appendix C. Calibration Certificate for Probe and Dipole                                    |    |
| Appendix D. Photographs of EUT and Setup                                                    |    |

## Release Control Record

| Report No.   | Reason for Change | Date Issued   |
|--------------|-------------------|---------------|
| SA180829W002 | Initial release   | Dec. 24, 2018 |
|              |                   |               |
|              |                   |               |
|              |                   |               |
|              |                   |               |
|              |                   |               |
|              |                   |               |
|              |                   |               |
|              |                   |               |
|              |                   |               |
|              |                   |               |
|              |                   |               |
|              |                   |               |
|              |                   |               |
|              |                   |               |
|              |                   |               |

# FCC SAR Test Report

## 1. Summary of Maximum SAR Value

| Equipment Class                       | Mode      | Highest Reported Head SAR <sub>1g</sub> (W/kg) | Highest Reported Body-worn SAR <sub>1g</sub> (1.5 cm Gap) (W/kg) | Highest Reported Hotspot SAR <sub>1g</sub> (1.0 cm Gap) (W/kg) |
|---------------------------------------|-----------|------------------------------------------------|------------------------------------------------------------------|----------------------------------------------------------------|
| PCE                                   | GSM850    | 0.64                                           | 0.49                                                             | 0.88                                                           |
|                                       | GSM1900   | 0.38                                           | 0.67                                                             | 1.30                                                           |
|                                       | WCDMA II  | 0.33                                           | 0.51                                                             | 0.99                                                           |
|                                       | WCDMA IV  | 0.38                                           | 0.61                                                             | 1.15                                                           |
|                                       | WCDMA V   | 1.00                                           | 0.92                                                             | 1.21                                                           |
|                                       | CDMA BC0  | 0.91                                           | 0.90                                                             | 0.70                                                           |
|                                       | CDMA BC1  | 0.31                                           | 0.84                                                             | 0.75                                                           |
|                                       | CDMA BC10 | 0.98                                           | 0.97                                                             | 0.71                                                           |
|                                       | LTE 2     | 0.20                                           | 0.61                                                             | 1.18                                                           |
|                                       | LTE 4     | 0.47                                           | 0.62                                                             | 0.71                                                           |
|                                       | LTE 5     | 0.98                                           | 0.76                                                             | 1.08                                                           |
|                                       | LTE 12    | 0.61                                           | 0.55                                                             | 0.78                                                           |
|                                       | LTE 13    | 0.62                                           | 0.86                                                             | 1.20                                                           |
|                                       | LTE 14    | 0.70                                           | 0.82                                                             | 1.12                                                           |
|                                       | LTE 25    | 0.21                                           | 0.65                                                             | 1.22                                                           |
|                                       | LTE 26    | 1.06                                           | 0.82                                                             | 1.11                                                           |
|                                       | LTE 38    | 0.55                                           | 0.28                                                             | 1.02                                                           |
|                                       | LTE 41    | 1.18                                           | 0.34                                                             | 1.10                                                           |
|                                       | LTE 66    | 0.42                                           | 0.55                                                             | 1.29                                                           |
| DTS                                   | 2.4G WLAN | 0.02                                           | 0.01                                                             | 0.03                                                           |
| NII                                   | 5.2G WLAN | 0.15                                           | 0.09                                                             | 0.15                                                           |
|                                       | 5.3G WLAN | N/A                                            | N/A                                                              | N/A                                                            |
|                                       | 5.6G WLAN | 0.26                                           | 0.25                                                             | N/A                                                            |
|                                       | 5.8G WLAN | 0.16                                           | 0.18                                                             | 0.22                                                           |
| DSS                                   | Bluetooth | N/A                                            | N/A                                                              | N/A                                                            |
| Highest Simultaneous Transmission SAR |           | Head (W/kg)                                    | Body-worn (W/kg)                                                 | Hotspot (W/kg)                                                 |
| PCE + DTS                             |           | 1.20                                           | 0.98                                                             | 1.33                                                           |
| PCE + NII                             |           | 1.31                                           | 1.22                                                             | 1.52                                                           |
| PCE + DSS                             |           | N/A                                            | 1.22                                                             | N/A                                                            |

### Note:

- The SAR limit (**Head & Body: SAR<sub>1g</sub> 1.6 W/kg**) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992.

# FCC SAR Test Report

## 2. Description of Equipment Under Test

|                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>EUT Type</b>                                        | Mobile Phone                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>FCC ID</b>                                          | WYPPC2223                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Brand Name</b>                                      | Sonim                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Model Name</b>                                      | XP3800                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>IMEI Code</b>                                       | 001080002501170                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>HW Version</b>                                      | DVT2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>SW Version</b>                                      | 3A.0.0-00-8.1.0-29.09.04                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Tx Frequency Bands<br/>(Unit: MHz)</b>              | GSM850 : 824.2 ~ 848.8<br>GSM1900 : 1850.2 ~ 1909.8<br>WCDMA Band II : 1852.4 ~ 1907.6<br>WCDMA Band IV : 1712.4 ~ 1752.6<br>WCDMA Band V : 826.4 ~ 846.6<br>CDMA BC0 : 824.7 ~ 848.31<br>CDMA BC1 : 1851.25 ~ 1908.75<br>CDMA BC10 : 817.9 ~ 823.1<br>LTE Band 2 : 1850.7 ~ 1909.3 (1.4M), 1851.5 ~ 1908.5 (3M), 1852.5 ~ 1907.5 (5M), 1855 ~ 1905 (10M), 1857.5 ~ 1902.5 (15M), 1860 ~ 1900 (20M)<br>LTE Band 4 : 1710.7 ~ 1754.3 (1.4M), 1711.5 ~ 1753.5 (3M), 1712.5 ~ 1752.5 (5M), 1715 ~ 1750 (10M), 1717.5 ~ 1747.5 (15M), 1720 ~ 1745 (20M)<br>LTE Band 5 : 824.7 ~ 848.3 (1.4M), 825.5 ~ 847.5 (3M), 826.5 ~ 846.5 (5M), 829 ~ 844 (10M)<br>LTE Band 12 : 699.7 ~ 715.3 (1.4M), 700.5 ~ 714.5 (3M), 701.5 ~ 713.5 (5M), 704 ~ 711 (10M)<br>LTE Band 13 : 779.5 ~ 784.5 (5M), 782 (10M)<br>LTE Band 14 : 790.5 ~ 795.5 (5M), 793 (10M)<br>LTE Band 25 : 1850.7 ~ 1914.3 (1.4M), 1851.5 ~ 1913.5 (3M), 1852.5 ~ 1912.5 (5M), 1855 ~ 1910 (10M), 1857.5 ~ 1907.5 (15M), 1860 ~ 1905 (20M)<br>LTE Band 26 : 814.7 ~ 848.3 (1.4M), 815.5 ~ 847.5 (3M), 816.5 ~ 846.5 (5M), 819 ~ 844 (10M), 821.5 ~ 841.5 (15M)<br>LTE Band 38 : 2572.5 ~ 2617.5 (5M), 2575 ~ 2615 (10M), 2577.5 ~ 2612.5 (15M), 2580 ~ 2610 (20M)<br>LTE Band 41 : 2498.5 ~ 2687.5 (5M), 2501 ~ 2685 (10M), 2503.5 ~ 2682.5 (15M), 2506 ~ 2680 (20M)<br>LTE Band 66 : 1710.7 ~ 1779.3 (1.4M), 1711.5 ~ 1778.5 (3M), 1712.5 ~ 1777.5 (5M), 1715 ~ 1775 (10M), 1717.5 ~ 1772.5 (15M), 1720 ~ 1770 (20M)<br>WLAN : 2412 ~ 2462, 5180 ~ 5240, 5260 ~ 5320, 5500 ~ 5700, 5745 ~ 5825<br>Bluetooth : 2402 ~ 2480 |
| <b>Uplink Modulations</b>                              | GSM & GPRS : GMSK<br>EDGE : 8PSK<br>WCDMA : QPSK<br>CDMA : QPSK<br>LTE : QPSK, 16QAM, 64QAM<br>802.11b : DSSS<br>802.11a/g/n : OFDM<br>Bluetooth : GFSK, $\pi/4$ -DQPSK, 8-DPSK, LE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Maximum Tune-up Conducted Power<br/>(Unit: dBm)</b> | Please refer to section 4.6.1 of this report.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Antenna Type</b>                                    | WLAN: PIFA Antenna<br>WWAN: Fixed Internal Antenna                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>EUT Stage</b>                                       | Production Unit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

### Note:

- The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.

### List of Accessory:

|                |                     |                 |
|----------------|---------------------|-----------------|
| <b>Battery</b> | <b>Brand Name</b>   | Sonim           |
|                | <b>Model Name</b>   | BAT-01500-01S   |
|                | <b>Power Rating</b> | 3.7Vdc, 1500mAh |
|                | <b>Type</b>         | Li-ion          |

### **3. SAR Measurement System**

#### **3.1 Definition of Specific Absorption Rate (SAR)**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)


SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

#### **3.2 SPEAG DASY System**

DASY system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY5 software defined. The DASY software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.

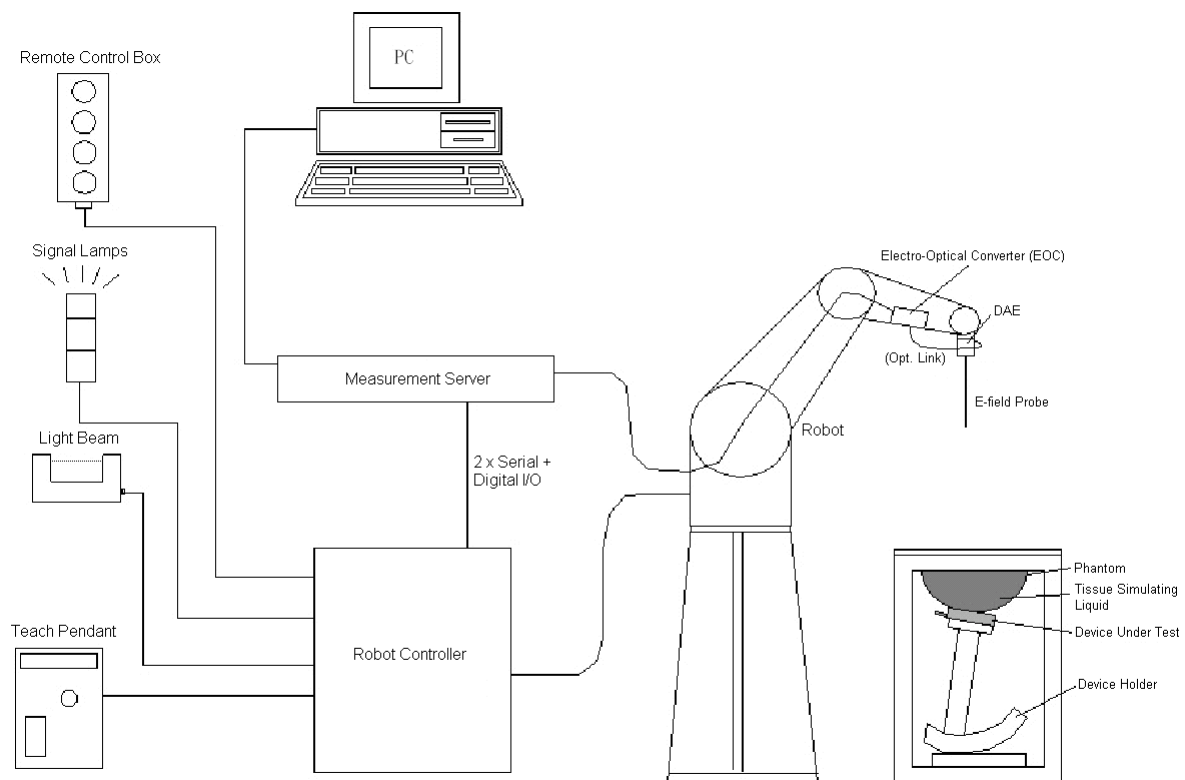

**Fig-3.1 DASY System Setup**

## 3.2.1 Robot

The DASY system uses the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability  $\pm 0.035$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



**Fig-3.2 DASY5**

## FCC SAR Test Report

### 3.2.2 Probes

The SAR measurement is conducted with the dosimetric probe. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.

|                      |                                                                                                                                                          |                                                                                     |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>         | EX3DV4                                                                                                                                                   |  |
| <b>Construction</b>  | Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE). |                                                                                     |
| <b>Frequency</b>     | 10 MHz to 6 GHz<br>Linearity: $\pm 0.2$ dB                                                                                                               |                                                                                     |
| <b>Directivity</b>   | $\pm 0.3$ dB in HSL (rotation around probe axis)<br>$\pm 0.5$ dB in tissue material (rotation normal to probe axis)                                      |                                                                                     |
| <b>Dynamic Range</b> | 10 $\mu$ W/g to 100 mW/g<br>Linearity: $\pm 0.2$ dB (noise: typically $< 1$ $\mu$ W/g)                                                                   |                                                                                     |
| <b>Dimensions</b>    | Overall length: 337 mm (Tip: 20 mm)<br>Tip diameter: 2.5 mm (Body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm                     |                                                                                     |

|                      |                                                                                                                                                                               |                                                                                      |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Model</b>         | ES3DV3                                                                                                                                                                        |  |
| <b>Construction</b>  | Symmetrical design with triangular core. Interleaved sensors. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE). |                                                                                      |
| <b>Frequency</b>     | 10 MHz to 4 GHz<br>Linearity: $\pm 0.2$ dB                                                                                                                                    |                                                                                      |
| <b>Directivity</b>   | $\pm 0.2$ dB in HSL (rotation around probe axis)<br>$\pm 0.3$ dB in tissue material (rotation normal to probe axis)                                                           |                                                                                      |
| <b>Dynamic Range</b> | 5 $\mu$ W/g to 100 mW/g<br>Linearity: $\pm 0.2$ dB                                                                                                                            |                                                                                      |
| <b>Dimensions</b>    | Overall length: 337 mm (Tip: 20 mm)<br>Tip diameter: 3.9 mm (Body: 12 mm)<br>Distance from probe tip to dipole centers: 2.0 mm                                                |                                                                                      |

### 3.2.3 Data Acquisition Electronics (DAE)

|                             |                                                                                                                                                                                                                                                     |                                                                                       |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Model</b>                | DAE3, DAE4                                                                                                                                                                                                                                          |  |
| <b>Construction</b>         | Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop. |                                                                                       |
| <b>Measurement Range</b>    | -100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)                                                                                                                                                                              |                                                                                       |
| <b>Input Offset Voltage</b> | $< 5$ $\mu$ V (with auto zero)                                                                                                                                                                                                                      |                                                                                       |
| <b>Input Bias Current</b>   | $< 50$ fA                                                                                                                                                                                                                                           |                                                                                       |
| <b>Dimensions</b>           | 60 x 60 x 68 mm                                                                                                                                                                                                                                     |                                                                                       |



## FCC SAR Test Report

### 3.2.4 Phantoms


|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                     |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>           | Twin SAM                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |  |
| <b>Construction</b>    | The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot. |                                                                                     |
| <b>Material</b>        | Vinylester, glass fiber reinforced (VE-GF)                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                     |
| <b>Shell Thickness</b> | $2 \pm 0.2$ mm ( $6 \pm 0.2$ mm at ear point)                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                     |
| <b>Dimensions</b>      | Length: 1000 mm<br>Width: 500 mm<br>Height: adjustable feet                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                     |
| <b>Filling Volume</b>  | approx. 25 liters                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                     |

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                      |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Model</b>           | ELI                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  |
| <b>Construction</b>    | Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles. |                                                                                      |
| <b>Material</b>        | Vinylester, glass fiber reinforced (VE-GF)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                      |
| <b>Shell Thickness</b> | $2.0 \pm 0.2$ mm (bottom plate)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                      |
| <b>Dimensions</b>      | Major axis: 600 mm<br>Minor axis: 400 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                      |
| <b>Filling Volume</b>  | approx. 30 liters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                      |

## FCC SAR Test Report

### 3.2.5 Device Holder

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                     |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>        | Mounting Device                                                                                                                                                                                                                                                                                                                                                                                                               |  |
| <b>Construction</b> | In combination with the Twin SAM Phantom or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). |                                                                                     |
| <b>Material</b>     | POM                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                     |


|                     |                                                                                                                                                                                                                                                                                         |                                                                                     |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>        | Laptop Extensions Kit                                                                                                                                                                                                                                                                   |  |
| <b>Construction</b> | Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. |                                                                                     |
| <b>Material</b>     | POM, Acrylic glass, Foam                                                                                                                                                                                                                                                                |                                                                                     |

### 3.2.6 System Validation Dipoles

|                         |                                                                                                                                                                      |                                                                                       |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Model</b>            | D-Serial                                                                                                                                                             |  |
| <b>Construction</b>     | Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions. |                                                                                       |
| <b>Frequency</b>        | 750 MHz to 5800 MHz                                                                                                                                                  |                                                                                       |
| <b>Return Loss</b>      | > 20 dB                                                                                                                                                              |                                                                                       |
| <b>Power Capability</b> | > 100 W ( $f < 1\text{GHz}$ ), > 40 W ( $f > 1\text{GHz}$ )                                                                                                          |                                                                                       |

## 3.2.7 Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in Table-3.1.

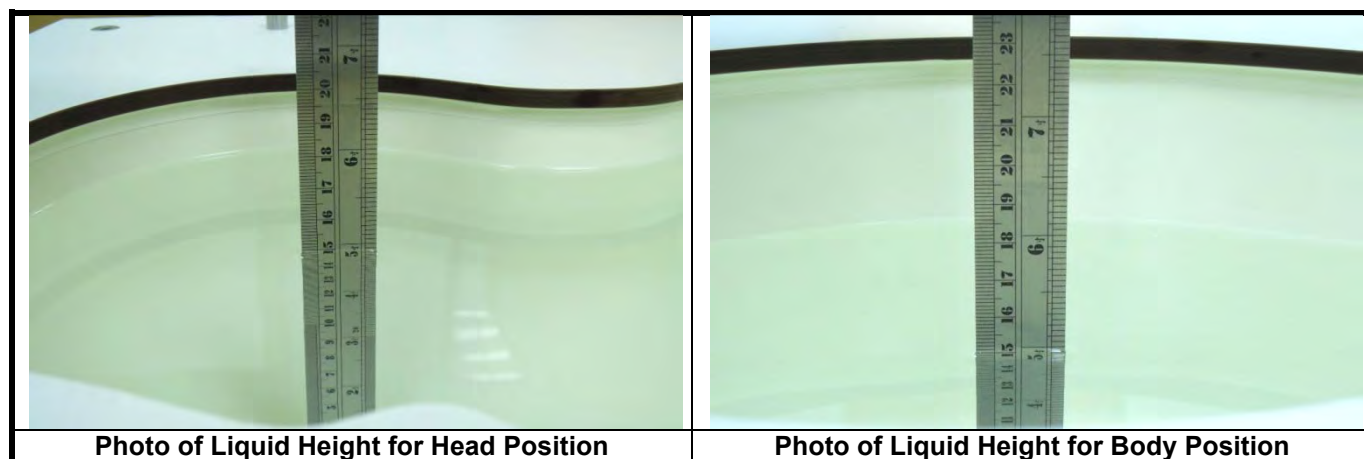

The dielectric properties of the head tissue simulating liquids are defined in IEEE 1528, and KDB 865664 D01 Appendix A. For the body tissue simulating liquids, the dielectric properties are defined in KDB 865664 D01 Appendix A. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using a dielectric assessment kit and a network analyzer.

# FCC SAR Test Report

**Table-3.1 Targets of Tissue Simulating Liquid**

| Frequency (MHz) | Target Permittivity | Range of $\pm 5\%$ | Target Conductivity | Range of $\pm 5\%$ |
|-----------------|---------------------|--------------------|---------------------|--------------------|
| <b>For Head</b> |                     |                    |                     |                    |
| 750             | 41.9                | 39.8 ~ 44.0        | 0.89                | 0.85 ~ 0.93        |
| 835             | 41.5                | 39.4 ~ 43.6        | 0.90                | 0.86 ~ 0.95        |
| 900             | 41.5                | 39.4 ~ 43.6        | 0.97                | 0.92 ~ 1.02        |
| 1450            | 40.5                | 38.5 ~ 42.5        | 1.20                | 1.14 ~ 1.26        |
| 1640            | 40.3                | 38.3 ~ 42.3        | 1.29                | 1.23 ~ 1.35        |
| 1750            | 40.1                | 38.1 ~ 42.1        | 1.37                | 1.30 ~ 1.44        |
| 1800            | 40.0                | 38.0 ~ 42.0        | 1.40                | 1.33 ~ 1.47        |
| 1900            | 40.0                | 38.0 ~ 42.0        | 1.40                | 1.33 ~ 1.47        |
| 2000            | 40.0                | 38.0 ~ 42.0        | 1.40                | 1.33 ~ 1.47        |
| 2300            | 39.5                | 37.5 ~ 41.5        | 1.67                | 1.59 ~ 1.75        |
| 2450            | 39.2                | 37.2 ~ 41.2        | 1.80                | 1.71 ~ 1.89        |
| 2600            | 39.0                | 37.1 ~ 41.0        | 1.96                | 1.86 ~ 2.06        |
| 3500            | 37.9                | 36.0 ~ 39.8        | 2.91                | 2.76 ~ 3.06        |
| 5200            | 36.0                | 34.2 ~ 37.8        | 4.66                | 4.43 ~ 4.89        |
| 5300            | 35.9                | 34.1 ~ 37.7        | 4.76                | 4.52 ~ 5.00        |
| 5500            | 35.6                | 33.8 ~ 37.4        | 4.96                | 4.71 ~ 5.21        |
| 5600            | 35.5                | 33.7 ~ 37.3        | 5.07                | 4.82 ~ 5.32        |
| 5800            | 35.3                | 33.5 ~ 37.1        | 5.27                | 5.01 ~ 5.53        |
| <b>For Body</b> |                     |                    |                     |                    |
| 750             | 55.5                | 52.7 ~ 58.3        | 0.96                | 0.91 ~ 1.01        |
| 835             | 55.2                | 52.4 ~ 58.0        | 0.97                | 0.92 ~ 1.02        |
| 900             | 55.0                | 52.3 ~ 57.8        | 1.05                | 1.00 ~ 1.10        |
| 1450            | 54.0                | 51.3 ~ 56.7        | 1.30                | 1.24 ~ 1.37        |
| 1640            | 53.8                | 51.1 ~ 56.5        | 1.40                | 1.33 ~ 1.47        |
| 1750            | 53.4                | 50.7 ~ 56.1        | 1.49                | 1.42 ~ 1.56        |
| 1800            | 53.3                | 50.6 ~ 56.0        | 1.52                | 1.44 ~ 1.60        |
| 1900            | 53.3                | 50.6 ~ 56.0        | 1.52                | 1.44 ~ 1.60        |
| 2000            | 53.3                | 50.6 ~ 56.0        | 1.52                | 1.44 ~ 1.60        |
| 2300            | 52.9                | 50.3 ~ 55.5        | 1.81                | 1.72 ~ 1.90        |
| 2450            | 52.7                | 50.1 ~ 55.3        | 1.95                | 1.85 ~ 2.05        |
| 2600            | 52.5                | 49.9 ~ 55.1        | 2.16                | 2.05 ~ 2.27        |
| 3500            | 51.3                | 48.7 ~ 53.9        | 3.31                | 3.14 ~ 3.48        |
| 5200            | 49.0                | 46.6 ~ 51.5        | 5.30                | 5.04 ~ 5.57        |
| 5300            | 48.9                | 46.5 ~ 51.3        | 5.42                | 5.15 ~ 5.69        |
| 5500            | 48.6                | 46.2 ~ 51.0        | 5.65                | 5.37 ~ 5.93        |
| 5600            | 48.5                | 46.1 ~ 50.9        | 5.77                | 5.48 ~ 6.06        |
| 5800            | 48.2                | 45.8 ~ 50.6        | 6.00                | 5.70 ~ 6.30        |

## FCC SAR Test Report


The following table gives the recipes for tissue simulating liquids.

**Table-3.2 Recipes of Tissue Simulating Liquid**

| Tissue Type | Bactericide | DGBE | HEC | NaCl | Sucrose | Triton X-100 | Water | Diethylene Glycol Mono-hexylether |
|-------------|-------------|------|-----|------|---------|--------------|-------|-----------------------------------|
| H750        | 0.2         | -    | 0.2 | 1.5  | 56.0    | -            | 42.1  | -                                 |
| H835        | 0.2         | -    | 0.2 | 1.5  | 57.0    | -            | 41.1  | -                                 |
| H900        | 0.2         | -    | 0.2 | 1.4  | 58.0    | -            | 40.2  | -                                 |
| H1450       | -           | 43.3 | -   | 0.6  | -       | -            | 56.1  | -                                 |
| H1640       | -           | 45.8 | -   | 0.5  | -       | -            | 53.7  | -                                 |
| H1750       | -           | 47.0 | -   | 0.4  | -       | -            | 52.6  | -                                 |
| H1800       | -           | 44.5 | -   | 0.3  | -       | -            | 55.2  | -                                 |
| H1900       | -           | 44.5 | -   | 0.2  | -       | -            | 55.3  | -                                 |
| H2000       | -           | 44.5 | -   | 0.1  | -       | -            | 55.4  | -                                 |
| H2300       | -           | 44.9 | -   | 0.1  | -       | -            | 55.0  | -                                 |
| H2450       | -           | 45.0 | -   | 0.1  | -       | -            | 54.9  | -                                 |
| H2600       | -           | 45.1 | -   | 0.1  | -       | -            | 54.8  | -                                 |
| H3500       | -           | 28.0 | -   | 0.2  | -       | 20.0         | 71.8  | -                                 |
| H5G         | -           | -    | -   | -    | -       | 17.2         | 65.5  | 17.3                              |
| B750        | 0.2         | -    | 0.2 | 0.8  | 48.8    | -            | 50.0  | -                                 |
| B835        | 0.2         | -    | 0.2 | 0.9  | 48.5    | -            | 50.2  | -                                 |
| B900        | 0.2         | -    | 0.2 | 0.9  | 48.2    | -            | 50.5  | -                                 |
| B1450       | -           | 34.0 | -   | 0.3  | -       | -            | 65.7  | -                                 |
| B1640       | -           | 32.5 | -   | 0.3  | -       | -            | 67.2  | -                                 |
| B1750       | -           | 31.0 | -   | 0.2  | -       | -            | 68.8  | -                                 |
| B1800       | -           | 29.5 | -   | 0.4  | -       | -            | 70.1  | -                                 |
| B1900       | -           | 29.5 | -   | 0.3  | -       | -            | 70.2  | -                                 |
| B2000       | -           | 30.0 | -   | 0.2  | -       | -            | 69.8  | -                                 |
| B2300       | -           | 31.0 | -   | 0.1  | -       | -            | 68.9  | -                                 |
| B2450       | -           | 31.4 | -   | 0.1  | -       | -            | 68.5  | -                                 |
| B2600       | -           | 31.8 | -   | 0.1  | -       | -            | 68.1  | -                                 |
| B3500       | -           | 28.8 | -   | 0.1  | -       | -            | 71.1  | -                                 |
| B5G         | -           | -    | -   | -    | -       | 10.7         | 78.6  | 10.7                              |

## 3.3 SAR System Verification

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

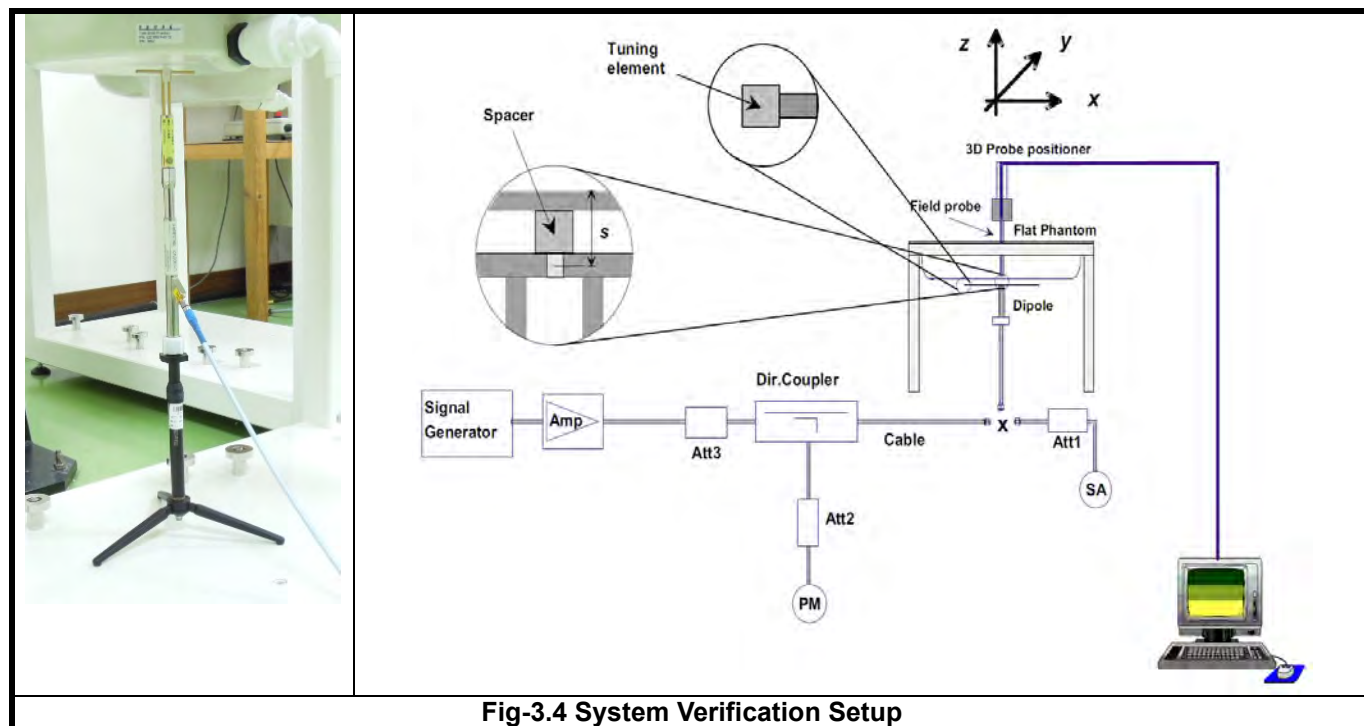

**Fig-3.4 System Verification Setup**

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The spectrum analyzer measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to 6 GHz) at the dipole connector and the power meter is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter.

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

## 3.4 SAR Measurement Procedure

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- Make EUT to transmit maximum output power
- Measure conducted output power through RF cable
- Place the EUT in the specific position of phantom
- Perform SAR testing steps on the DASY system
- Record the SAR value

### 3.4.1 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. According to KDB 865664 D01, the resolution for Area and Zoom scan is specified in the table below.

| Items                              | <= 2 GHz | 2-3 GHz  | 3-4 GHz  | 4-5 GHz  | 5-6 GHz  |
|------------------------------------|----------|----------|----------|----------|----------|
| Area Scan ( $\Delta x, \Delta y$ ) | <= 15 mm | <= 12 mm | <= 12 mm | <= 10 mm | <= 10 mm |
| Zoom Scan ( $\Delta x, \Delta y$ ) | <= 8 mm  | <= 5 mm  | <= 5 mm  | <= 4 mm  | <= 4 mm  |
| Zoom Scan ( $\Delta z$ )           | <= 5 mm  | <= 5 mm  | <= 4 mm  | <= 3 mm  | <= 2 mm  |
| Zoom Scan Volume                   | >= 30 mm | >= 30 mm | >= 28 mm | >= 25 mm | >= 22 mm |

#### Note:

When zoom scan is required and report SAR is <= 1.4 W/kg, the zoom scan resolution of  $\Delta x / \Delta y$  (2-3GHz: <= 8 mm, 3-4GHz: <= 7 mm, 4-6GHz: <= 5 mm) may be applied.

### 3.4.2 Volume Scan Procedure

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### 3.4.3 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

### 3.4.4 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

### 3.4.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.



## 4. SAR Measurement Evaluation

### 4.1 EUT Configuration and Setting

#### <Connections between EUT and System Simulator>

For WWAN SAR testing, the EUT was linked and controlled by base station emulator (Agilent E5515C is used for GSM/WCDMA/CDMA, and Anritsu MT8820C is used for LTE). Communication between the EUT and the emulator was established by air link. The distance between the EUT and the communicating antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during SAR testing.

#### <Considerations Related to GSM / GPRS / EDGE for Setup and Testing>

The maximum multi-slot capability supported by this device is as below.

1. This EUT is class B device
2. This EUT supports GPRS multi-slot class 33 (max. uplink: 4, max. downlink: 5, total timeslots: 6)
3. This EUT supports EDGE multi-slot class 33 (max. uplink: 4, max. downlink: 5, total timeslots: 6)

For GSM850 frequency band, the power control level is set to 5 for GSM mode and GPRS (GMSK: CS1), and set to 8 for EDGE (GMSK: MCS1, 8PSK: MCS9). For GSM1900 frequency band, the power control level is set to 0 for GSM mode and GPRS (GMSK: CS1), and set to 2 for EDGE (GMSK: MCS1, 8PSK: MCS9).

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

#### <Considerations Related to WCDMA for Setup and Testing>

##### WCDMA Handsets Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode.

##### WCDMA Handsets Body-worn SAR

SAR for body-worn configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH<sub>n</sub> configurations supported by the handset with 12.2 kbps RMC as the primary mode.

##### Handsets with Release 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body-worn configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the "Release 5 HSDPA Data Devices", for the highest reported SAR body-worn exposure configuration in 12.2 kbps RMC. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

##### Handsets with Release 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn configurations with

## FCC SAR Test Report

12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the "Release 6 HSPA Data Devices", for the highest reported body-worn exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn measurements is tested for next to the ear head exposure.

### Release 5 HSDPA Data Devices

The 3G SAR test reduction procedure is applied to body SAR with 12.2 kbps RMC as the primary mode. Otherwise, body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. HSDPA is configured according to the applicable UE category of a test device. The number of HS-DSCH / HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms and a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors ( $\beta_c$ ,  $\beta_d$ ), and HS-DPCCH power offset parameters ( $\Delta_{ACK}$ ,  $\Delta_{NACK}$ ,  $\Delta_{CQI}$ ) are set according to values indicated in below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

| Sub-test | $\beta_c$              | $\beta_d$              | $\beta_d$<br>(SF) | $\beta_c / \beta_d$    | $\beta_{hs}^{(1)}$ | CM (dB) <sup>(2)</sup> | MPR |
|----------|------------------------|------------------------|-------------------|------------------------|--------------------|------------------------|-----|
| 1        | 2 / 15                 | 15 / 15                | 64                | 2 / 15                 | 4 / 15             | 0.0                    | 0   |
| 2        | 12 / 15 <sup>(3)</sup> | 15 / 15 <sup>(3)</sup> | 64                | 12 / 15 <sup>(3)</sup> | 24 / 15            | 1.0                    | 0   |
| 3        | 15 / 15                | 8 / 15                 | 64                | 15 / 8                 | 30 / 15            | 1.5                    | 0.5 |
| 4        | 15 / 15                | 4 / 15                 | 64                | 15 / 4                 | 30 / 15            | 1.5                    | 0.5 |

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs} / \beta_c = 30 / 15 \Leftrightarrow \beta_{hs} = 30 / 15 * \beta_c$ .  
Note 2: CM = 1 for  $\beta_c / \beta_d = 12 / 15$ ,  $\beta_{hs} / \beta_c = 24 / 15$ .  
Note 3: For subtest 2 the  $\beta_c / \beta_d$  ratio of 12 / 15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11 / 15$  and  $\beta_d = 15 / 15$ .

### Release 6 HSUPA Data Devices

The 3G SAR test reduction procedure is applied to body SAR with 12.2 kbps RMC as the primary mode. Otherwise, body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode. Otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing. Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the  $\beta$  values indicated in below.

| Sub-test | $\beta_c$              | $\beta_d$              | $\beta_d$<br>(SF) | $\beta_c / \beta_d$    | $\beta_{hs}^{(1)}$ | $\beta_{ec}$ | $\beta_{ed}$                                 | $\beta_{ed}$<br>(SF) | $\beta_{ed}$<br>(codes) | CM <sup>(2)</sup><br>(dB) | MPR<br>(dB) | AG <sup>(4)</sup><br>Index | E-TFCI |
|----------|------------------------|------------------------|-------------------|------------------------|--------------------|--------------|----------------------------------------------|----------------------|-------------------------|---------------------------|-------------|----------------------------|--------|
| 1        | 11 / 15 <sup>(3)</sup> | 15 / 15 <sup>(3)</sup> | 64                | 11 / 15 <sup>(3)</sup> | 22 / 15            | 209 / 225    | 1039 / 225                                   | 4                    | 1                       | 1.0                       | 0.0         | 20                         | 75     |
| 2        | 6 / 15                 | 15 / 15                | 64                | 6 / 15                 | 12 / 15            | 12 / 15      | 94 / 75                                      | 4                    | 1                       | 3.0                       | 2.0         | 12                         | 67     |
| 3        | 15 / 15                | 9 / 15                 | 64                | 15 / 9                 | 30 / 15            | 30 / 15      | $\beta_{ed1}: 47/15$<br>$\beta_{ed2}: 47/15$ | 4                    | 2                       | 2.0                       | 1.0         | 15                         | 92     |
| 4        | 2 / 15                 | 15 / 15                | 64                | 2 / 15                 | 4 / 15             | 2 / 15       | 56 / 75                                      | 4                    | 1                       | 3.0                       | 2.0         | 17                         | 71     |

## FCC SAR Test Report

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                        |                        |    |                        |         |         |          |   |   |     |     |    |    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------------------|----|------------------------|---------|---------|----------|---|---|-----|-----|----|----|
| 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 15 / 15 <sup>(4)</sup> | 15 / 15 <sup>(4)</sup> | 64 | 15 / 15 <sup>(4)</sup> | 30 / 15 | 24 / 15 | 134 / 15 | 4 | 1 | 1.0 | 0.0 | 21 | 81 |
| <p>Note 1: <math>\Delta_{ACK}</math>, <math>\Delta_{NACK}</math> and <math>\Delta_{CQI} = 8 \Leftrightarrow A_{HS} = \beta_{HS} / \beta_C = 30 / 15 \Leftrightarrow \beta_{HS} = 30 / 15 * \beta_C</math>.</p> <p>Note 2: CM = 1 for <math>\beta_C / \beta_d = 12 / 15</math>, <math>\beta_{HS} / \beta_C = 24 / 15</math>. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.</p> <p>Note 3: For subtest 1 the <math>\beta_C / \beta_d</math> ratio of 11 / 15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to <math>\beta_C = 10 / 15</math> and <math>\beta_d = 15 / 15</math>.</p> <p>Note 4: For subtest 5 the <math>\beta_C / \beta_d</math> ratio of 15 / 15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to <math>\beta_C = 14 / 15</math> and <math>\beta_d = 15 / 15</math>.</p> <p>Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.</p> <p>Note 6: <math>\beta_{ed}</math> cannot be set directly; it is set by Absolute Grant Value.</p> |                        |                        |    |                        |         |         |          |   |   |     |     |    |    |

### HSPA+ SAR Guidance

The 3G SAR test reduction procedure is applied to HSPA+ (uplink) with 12.2 kbps RMC as the primary mode. Otherwise, when SAR is required for Rel. 6 HSPA, SAR is required for Rel. 7 HSPA+. Power is measured for HSPA+ that supports uplink 16QAM according to configurations in Table C.11.1.4 of 3GPP TS 34.121-1 to determine SAR test reduction.

### <Considerations Related to CDMA for Setup and Testing>

#### CDMA 1xRTT Handsets Head SAR

SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55. The 3G SAR test reduction procedure is applied to RC1 with RC3 as the primary mode. Otherwise, SAR is required for the channel with maximum measured output in RC1 using the head exposure configuration that results in the highest reported SAR in RC3.

#### CDMA 1xRTT Handsets Body-worn SAR

Body-worn SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH + SCH<sub>n</sub>), with FCH only as the primary mode. Otherwise, SAR is required for multiple code channel configuration (FCH + SCH<sub>n</sub>), with FCH at full rate and SCH<sub>0</sub> enabled at 9600 bps, using the highest reported SAR configuration for FCH only. The 3G SAR test reduction procedure is applied to body-worn SAR in RC1 with RC3 as the primary mode. Otherwise, SAR is required for RC1, with SO55 and full rate, using the highest reported SAR configuration for body-worn exposure in RC3.

#### Handsets with built-in EV-DO

The 3G SAR test reduction procedure is applied to EV-DO Rev. 0 with 1xRTT RC3 as the primary mode to determine body-worn test requirements. Otherwise, body-worn SAR is required for Rev. 0, at 153.6 kbps, using the highest reported SAR configuration for body-worn exposure in RC3. The 3G SAR test reduction procedure is applied separately to Rev. A and Rev. B, with Rev. 0 as the primary mode to determine body-worn SAR test requirements. When SAR is not required for Rev. 0, the 3G SAR test reduction is applied with 1xRTT RC3 as the primary mode. Otherwise, SAR is required for Rev. A or Rev. B, with a Reverse Data Channel payload size of 4096 bits and a Termination Target of 16 slots defined for Subtype 2 and 3 Physical Layer configurations, using the highest reported SAR configuration for body-worn exposure in Rev. 0 or RC3, as appropriate. A Forward Traffic Channel data rate corresponding to the 2-slot version of 307.2 kbps with ACK Channel transmitting in all slots is configured in the downlink for Rev. 0, Rev. A and Rev. B.

#### EV-DO Data Devices

SAR is measured using the F/R TAP configurations required for Rev. 0, Rev. A and Rev. B. The AT is tested with a

## FCC SAR Test Report

Reverse Data Channel rate of 153.6 kbps in Subtype 0/1 Physical Layer configurations. A Reverse Data Channel payload size of 4096 bits and Termination Target of 16 slots are used for Subtype 2 and 3. FTAP, FETAP and FMCTAP are all configured with a Forward Traffic Channel data rate corresponding to the 2-slot version of 307.2 kbps with ACK Channel transmitting in all slots. AT power control is in "All Bits Up" conditions for the TAP / ETAP / MCTAP. Body-worn and other body SAR are measured using Subtype 0/1 Physical Layer configurations for Rev. 0. The 3G SAR test reduction procedure is applied to Rev. A, Subtype 2 Physical layer configuration, with Rev. 0 as the primary mode. Otherwise, SAR is measured for Rev. A using the highest reported SAR configuration for body-worn exposure in Rev. 0. SAR is required for Rev. B, Subtype 3; it is measured by applying both the "test 2" and "test 3" configurations used for power measurement.

### EV-DO Data Devices Support 1xRTT

The 3G SAR test reduction procedure is applied to 1xRTT RC3 and RC1 with EV-DO Rev. 0, Rev. A and Rev. B as the respective primary modes. Otherwise, the "CDMA 1xRTT Handsets Body-worn SAR" procedures are applied.

### 1x-Advanced SAR Guidance

The 3G SAR test reduction procedure is applied to 1x-Advanced with 1xRTT RC3 as the primary mode. When SAR measurement is required, the 1x-Advanced power measurement configurations are used. The 1x Advanced SAR procedures are applied separately to head, body-worn and other exposure conditions.

### <Considerations Related to LTE for Setup and Testing>

This device contains LTE transmitter which follows 3GPP standards, is category 3, supports both QPSK and 16QAM modulations, and supported LTE band and channel bandwidth is listed in below. The output power was tested per 3GPP TS 36.521-1 maximum transmit procedures for both QPSK and 16QAM modulation. The results please refer to section 4.6 of this report.

| EUT Supported LTE Band and Channel Bandwidth |            |          |          |           |           |           |
|----------------------------------------------|------------|----------|----------|-----------|-----------|-----------|
| LTE Band                                     | BW 1.4 MHz | BW 3 MHz | BW 5 MHz | BW 10 MHz | BW 15 MHz | BW 20 MHz |
| 2                                            | V          | V        | V        | V         | V         | V         |
| 4                                            | V          | V        | V        | V         | V         | V         |
| 5                                            | V          | V        | V        | V         |           |           |
| 12                                           | V          | V        | V        | V         |           |           |
| 13                                           |            |          | V        | V         |           |           |
| 14                                           |            |          | V        | V         |           |           |
| 25                                           | V          | V        | V        | V         | V         | V         |
| 26                                           | V          | V        | V        | V         | V         |           |
| 38                                           |            |          | V        | V         | V         | V         |
| 41                                           |            |          | V        | V         | V         | V         |
| 66                                           | V          | V        | V        | V         | V         | V         |

The LTE maximum power reduction (MPR) in accordance with 3GPP TS 36.101 is active all times during LTE operation. The allowed MPR for the maximum output power is specified in below.

| Modulation | Channel Bandwidth / RB Configurations |          |          |           |           |           | LTE MPR Setting (dB) |
|------------|---------------------------------------|----------|----------|-----------|-----------|-----------|----------------------|
|            | BW 1.4 MHz                            | BW 3 MHz | BW 5 MHz | BW 10 MHz | BW 15 MHz | BW 20 MHz |                      |
| QPSK       | > 5                                   | > 4      | > 8      | > 12      | > 16      | > 18      | 1                    |
| 16QAM      | <= 5                                  | <= 4     | <= 8     | <= 12     | <= 16     | <= 18     | 1                    |
| 16QAM      | > 5                                   | > 4      | > 8      | > 12      | > 16      | > 18      | 2                    |

## FCC SAR Test Report


**Note:** MPR is according to the standard and implemented in the circuit (mandatory).

In addition, the device is compliant with additional maximum power reduction (A-MPR) requirements defined in 3GPP TS 36.101 section 6.2.4 that was disabled for all FCC compliance testing.

During LTE SAR testing, the related parameters of operating band, channel bandwidth, uplink channel number, modulation type, and RB was set in base station simulator. When the EUT has registered and communicated to base station simulator, the simulator set to make EUT transmitting the maximum radiated power.

### TDD-LTE Setup Configurations

According to KDB 941225 D05, SAR testing for TDD-LTE device must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP TDD-LTE configurations. The TDD-LTE of this device supports frame structure type 2 defined in 3GPP TS 36.211 section 4.2, and the frame structure configuration can be referred to below.

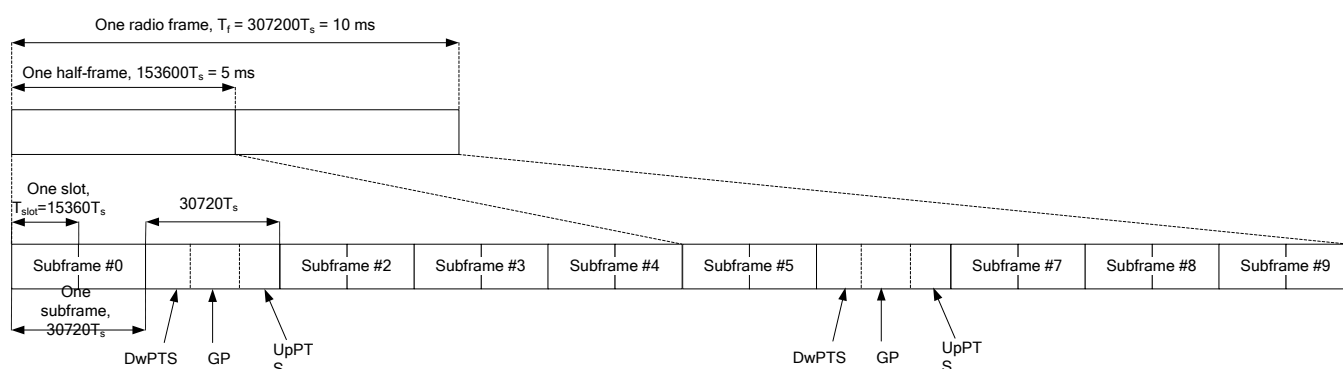

3GPP TS 36.211 Figure 4.2-1: Frame Structure Type 2

| Special Subframe Configuration | Normal Cyclic Prefix in Downlink |                                |                                  | Extended Cyclic Prefix in Downlink |                                |                                  |
|--------------------------------|----------------------------------|--------------------------------|----------------------------------|------------------------------------|--------------------------------|----------------------------------|
|                                | DwPTS                            | UpPTS                          |                                  | DwPTS                              | UpPTS                          |                                  |
|                                |                                  | Normal Cyclic Prefix in Uplink | Extended Cyclic Prefix in Uplink |                                    | Normal Cyclic Prefix in Uplink | Extended Cyclic Prefix in Uplink |
| 0                              | 6592 • T <sub>s</sub>            | 2192 • T <sub>s</sub>          | 2560 • T <sub>s</sub>            | 7680 • T <sub>s</sub>              | 2192 • T <sub>s</sub>          | 2560 • T <sub>s</sub>            |
| 1                              | 19760 • T <sub>s</sub>           |                                |                                  | 20480 • T <sub>s</sub>             |                                |                                  |
| 2                              | 21952 • T <sub>s</sub>           |                                |                                  | 23040 • T <sub>s</sub>             |                                |                                  |
| 3                              | 24144 • T <sub>s</sub>           |                                |                                  | 25600 • T <sub>s</sub>             |                                |                                  |
| 4                              | 26336 • T <sub>s</sub>           | 4384 • T <sub>s</sub>          | 5120 • T <sub>s</sub>            | 7680 • T <sub>s</sub>              | 4384 • T <sub>s</sub>          | 5120 • T <sub>s</sub>            |
| 5                              | 6592 • T <sub>s</sub>            |                                |                                  | 20480 • T <sub>s</sub>             |                                |                                  |
| 6                              | 19760 • T <sub>s</sub>           |                                |                                  | 23040 • T <sub>s</sub>             |                                |                                  |
| 7                              | 21952 • T <sub>s</sub>           |                                |                                  | 12800 • T <sub>s</sub>             |                                |                                  |
| 8                              | 24144 • T <sub>s</sub>           |                                |                                  | -                                  | -                              | -                                |
| 9                              | 13168 • T <sub>s</sub>           |                                |                                  | -                                  | -                              | -                                |

3GPP TS 36.211 Table 4.2-1: Configuration of Special Subframe

| Uplink-Downlink Configuration | Downlink-to-Uplink Switch-Point Periodicity | Subframe Number |   |   |   |   |   |   |   |   |   |
|-------------------------------|---------------------------------------------|-----------------|---|---|---|---|---|---|---|---|---|
|                               |                                             | 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| 0                             | 5 ms                                        | D               | S | U | U | U | D | S | U | U | U |
| 1                             | 5 ms                                        | D               | S | U | U | D | D | S | U | U | D |
| 2                             | 5 ms                                        | D               | S | U | D | D | D | S | U | D | D |
| 3                             | 10 ms                                       | D               | S | U | U | U | D | D | D | D | D |
| 4                             | 10 ms                                       | D               | S | U | U | D | D | D | D | D | D |

## FCC SAR Test Report

|   |       |   |   |   |   |   |   |   |   |   |   |
|---|-------|---|---|---|---|---|---|---|---|---|---|
| 5 | 10 ms | D | S | U | D | D | D | D | D | D | D |
| 6 | 5 ms  | D | S | U | U | U | D | S | U | U | D |

3GPP TS 36.211 Table 4.2-2: Uplink-Downlink Configurations

The variety of different TD-LTE uplink-downlink configurations allows a network operator to allocate the network's capacity between uplink and downlink traffic to meet the needs of the network. The uplink duty cycle of these seven configurations can readily be computed and shown in below.

| UL-DL Configuration | 0      | 1      | 2      | 3      | 4      | 5      | 6      |
|---------------------|--------|--------|--------|--------|--------|--------|--------|
| Highest Duty-Cycle  | 63.33% | 43.33% | 23.33% | 31.67% | 21.67% | 11.67% | 53.33% |

### <Considerations Related to WLAN for Setup and Testing>

In general, various vendor specific external test software and chipset based internal test modes are typically used for SAR measurement. These chipset based test mode utilities are generally hardware and manufacturer dependent, and often include substantial flexibility to reconfigure or reprogram a device. A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement. The test frequencies established using test mode must correspond to the actual channel frequencies. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. In addition, a periodic transmission duty factor is required for current generation SAR systems to measure SAR correctly. The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

According to KDB 248227 D01, this device has installed WLAN engineering testing software which can provide continuous transmitting RF signal. During WLAN SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

### Initial Test Configuration

An initial test configuration is determined for OFDM transmission modes in 2.4 GHz and 5 GHz bands according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

### Subsequent Test Configuration

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. Additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. When the highest reported SAR for the initial test configuration according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the



## FCC SAR Test Report

---

subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for that subsequent test configuration.

### SAR Test Configuration and Channel Selection

When multiple channel bandwidth configurations in a frequency band have the same specified maximum output power, the initial test configuration is using largest channel bandwidth, lowest order modulation, lowest data rate, and lowest order 802.11 mode (i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n). After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following.

- 1) The channel closest to mid-band frequency is selected for SAR measurement.
- 2) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

### Test Reduction for U-NII-1 (5.2 GHz) and U-NII-2A (5.3 GHz) Bands

For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following.

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition).
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for the band with lower maximum output power in that test configuration.


## 4.2 EUT Testing Position

According to KDB 648474 D04, handsets are tested for SAR compliance in head, body-worn accessory and other use configurations described in the following subsections.

### 4.2.1 Head Exposure Conditions

Head exposure is limited to next to the ear voice mode operations. Head SAR compliance is tested according to the test positions defined in IEEE Std 1528-2013 using the SAM phantom illustrated as below.

1. Define two imaginary lines on the handset
  - (a) The vertical centerline passes through two points on the front side of the handset - the midpoint of the width  $w_t$  of the handset at the level of the acoustic output, and the midpoint of the width  $w_b$  of the bottom of the handset.
  - (b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
  - (c) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

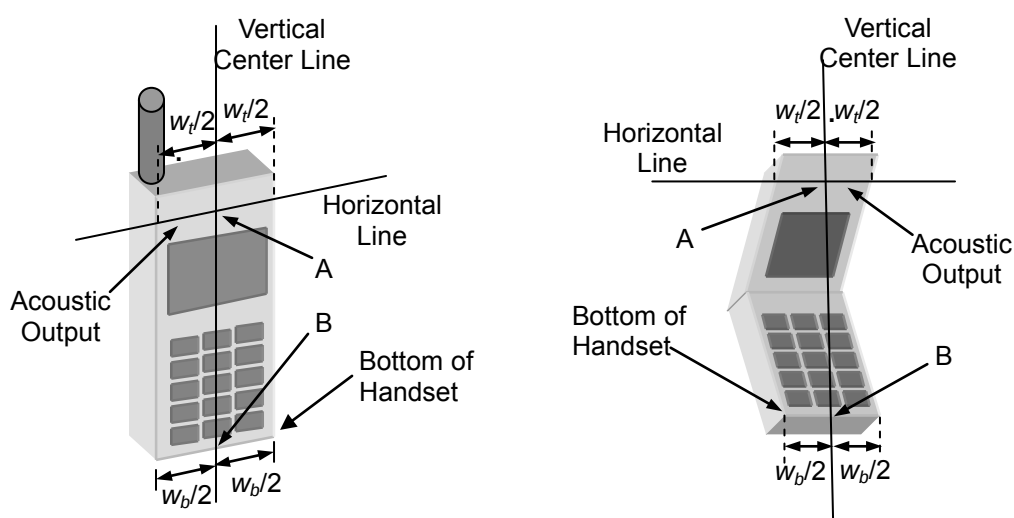

**Fig-4.1 Illustration for Handset Vertical and Horizontal Reference Lines**

### 2. Cheek Position

- (a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear,



## FCC SAR Test Report


move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig-4.2).



**Fig-4.2 Illustration for Cheek Position**

### 3. Tilted Position

- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig-4.3).

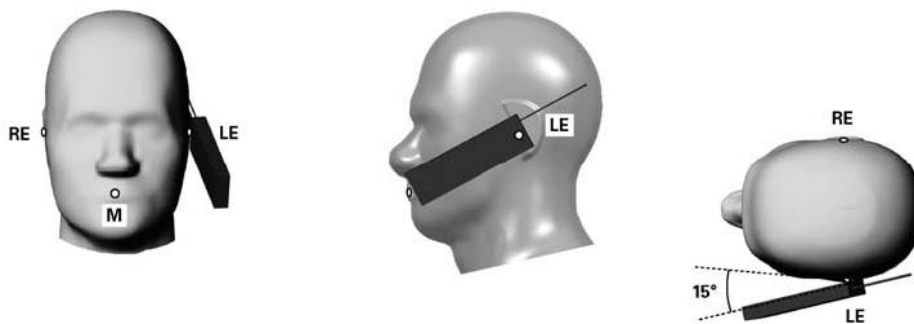

**Fig-4.3 Illustration for Tilted Position**


## 4.2.2 Body-worn Accessory Exposure Conditions

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB 447498 D01 are used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is  $> 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.

Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required.


A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets is used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer, according to the requirements of Supplement C 01-01. Devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, will be tested using a conservative minimum test separation distance  $\leq 5 \text{ mm}$  to support compliance.

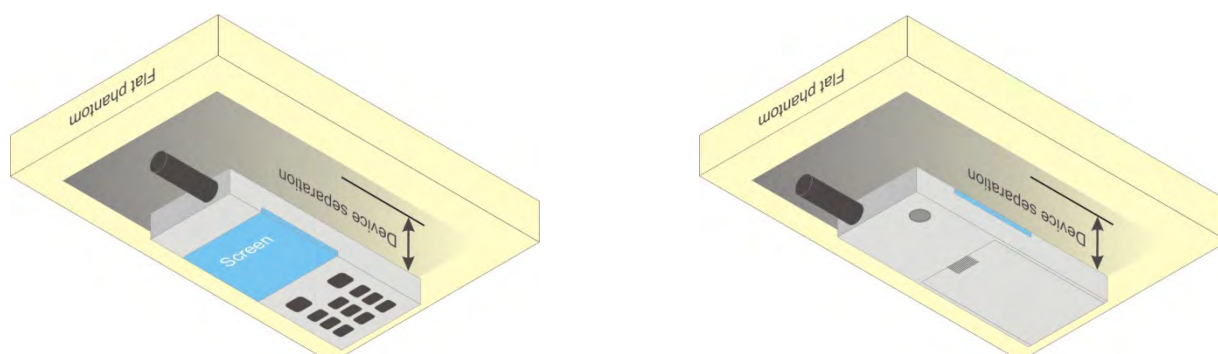

**Fig-4.4 Illustration for Body Worn Position**

## 4.2.3 Hotspot Mode Exposure Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225 D06. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

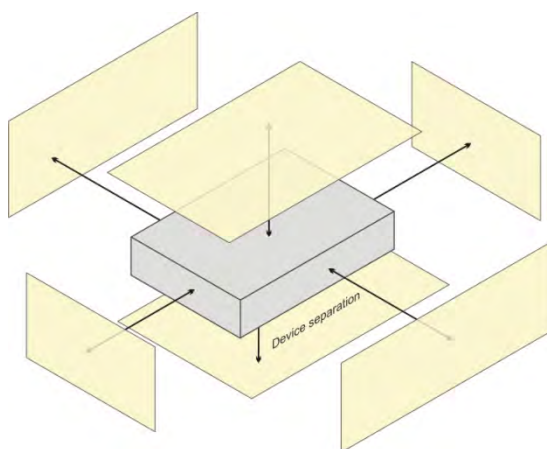

Based on the antenna location shown on appendix D of this report, the SAR testing required for hotspot mode is listed as below.

| Antenna    | Front Face | Rear Face | Left Side | Right Side | Top Side | Bottom Side |
|------------|------------|-----------|-----------|------------|----------|-------------|
| WWAN Ant-0 | V          | V         | V         | V          |          | V           |
| WLAN / BT  | V          | V         | V         | V          | V        |             |

## FCC SAR Test Report

### 4.2.4 SAR Test Exclusion Evaluations

According to KDB 447498 D01, the SAR test exclusion condition is based on source-based time-averaged maximum conducted output power, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions. The SAR exclusion threshold is determined by the following formula.

$$\frac{\text{Max. Tune up Power}_{(\text{mW})}}{\text{Min. Test Separation Distance}_{(\text{mm})}} \times \sqrt{f_{(\text{GHz})}} \leq 3.0 \text{ for SAR-1g, } \leq 7.5 \text{ for SAR-10g}$$

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

| Mode          | Max. Tune-up Power (dBm) | Max. Tune-up Power (mW) | Body-Worn            |                   |                      |
|---------------|--------------------------|-------------------------|----------------------|-------------------|----------------------|
|               |                          |                         | Ant. to Surface (mm) | Calculated Result | Require SAR Testing? |
| BT (2.48 GHz) | 12.5                     | 17.78                   | 15                   | 1.9               | No                   |

#### Note:

1. When separation distance <= 50 mm and the calculated result shown in above table is <= 3.0 for SAR-1g exposure condition, or <= 7.5 for SAR-10g exposure condition, the SAR testing exclusion is applied.

## FCC SAR Test Report

### 4.2.5 Simultaneous Transmission Possibilities

The simultaneous transmission possibilities for this device are listed as below.

| Simultaneous TX Combination | Capable Transmit Configurations        | Head (Voice / VoIP) | Body-worn (Voice / VoIP) | Hotspot (Data) |
|-----------------------------|----------------------------------------|---------------------|--------------------------|----------------|
| 1                           | GSM850 (Voice / Data) + WLAN (Data)    | Yes                 | Yes                      | Yes            |
| 2                           | GSM1900 (Voice / Data) + WLAN (Data)   | Yes                 | Yes                      | Yes            |
| 3                           | WCDMA II (Voice / Data) + WLAN (Data)  | Yes                 | Yes                      | Yes            |
| 4                           | WCDMA IV (Voice / Data) + WLAN (Data)  | Yes                 | Yes                      | Yes            |
| 5                           | WCDMA V (Voice / Data) + WLAN (Data)   | Yes                 | Yes                      | Yes            |
| 6                           | CDMA BC0 (Voice / Data) + WLAN (Data)  | Yes                 | Yes                      | Yes            |
| 7                           | CDMA BC1 (Voice / Data) + WLAN (Data)  | Yes                 | Yes                      | Yes            |
| 8                           | CDMA BC10 (Voice / Data) + WLAN (Data) | Yes                 | Yes                      | Yes            |
| 9                           | LTE 2 (Data) + WLAN (Data)             | Yes                 | Yes                      | Yes            |
| 10                          | LTE 4 (Data) + WLAN (Data)             | Yes                 | Yes                      | Yes            |
| 11                          | LTE 5 (Data) + WLAN (Data)             | Yes                 | Yes                      | Yes            |
| 12                          | LTE 12 (Data) + WLAN (Data)            | Yes                 | Yes                      | Yes            |
| 13                          | LTE 13 (Data) + WLAN (Data)            | Yes                 | Yes                      | Yes            |
| 14                          | LTE 14 (Data) + WLAN (Data)            | Yes                 | Yes                      | Yes            |
| 15                          | LTE 25 (Data) + WLAN (Data)            | Yes                 | Yes                      | Yes            |
| 16                          | LTE 26 (Data) + WLAN (Data)            | Yes                 | Yes                      | Yes            |
| 17                          | LTE 38 (Data) + WLAN (Data)            | Yes                 | Yes                      | Yes            |
| 18                          | LTE 41 (Data) + WLAN (Data)            | Yes                 | Yes                      | Yes            |
| 19                          | LTE 66 (Data) + WLAN (Data)            | Yes                 | Yes                      | Yes            |
| 20                          | GSM850 (Voice / Data) + BT (Data)      | No                  | Yes                      | No             |
| 21                          | GSM1900 (Voice / Data) + BT (Data)     | No                  | Yes                      | No             |
| 22                          | WCDMA II (Voice / Data) + BT (Data)    | No                  | Yes                      | No             |
| 23                          | WCDMA IV (Voice / Data) + BT (Data)    | No                  | Yes                      | No             |
| 24                          | WCDMA V (Voice / Data) + BT (Data)     | No                  | Yes                      | No             |
| 25                          | CDMA BC0 (Voice / Data) + BT (Data)    | No                  | Yes                      | No             |
| 26                          | CDMA BC1 (Voice / Data) + BT (Data)    | No                  | Yes                      | No             |
| 27                          | CDMA BC10 (Voice / Data) + BT (Data)   | No                  | Yes                      | No             |
| 28                          | LTE 2 (Data) + BT (Data)               | No                  | Yes                      | No             |
| 29                          | LTE 4 (Data) + BT (Data)               | No                  | Yes                      | No             |
| 30                          | LTE 5 (Data) + BT (Data)               | No                  | Yes                      | No             |
| 31                          | LTE 12 (Data) + BT (Data)              | No                  | Yes                      | No             |
| 32                          | LTE 13 (Data) + BT (Data)              | No                  | Yes                      | No             |
| 33                          | LTE 14 (Data) + BT (Data)              | No                  | Yes                      | No             |
| 34                          | LTE 25 (Data) + BT (Data)              | No                  | Yes                      | No             |
| 35                          | LTE 26 (Data) + BT (Data)              | No                  | Yes                      | No             |
| 36                          | LTE 38 (Data) + BT (Data)              | No                  | Yes                      | No             |
| 37                          | LTE 41 (Data) + BT (Data)              | No                  | Yes                      | No             |
| 38                          | LTE 66 (Data) + BT (Data)              | No                  | Yes                      | No             |

#### Note :

1. The 2.4G WLAN and 5G WLAN cannot transmit simultaneously.
2. The WLAN and Bluetooth cannot transmit simultaneously, so there is no co-location test requirement for WLAN and Bluetooth.

## FCC SAR Test Report

3. Only 2.4G WLAN (802.11b/g/n) and 5G WLAN (802.11a/n) Band1/4 supports wireless hotspot capability. 5G WLAN (802.11a/n) Band2/3 does not support wireless hotspot mode.

### 4.3 Tissue Verification

The measuring results for tissue simulating liquid are shown as below.

| Test Date     | Tissue Type | Frequency (MHz) | Liquid Temp. (°C) | Measured Conductivity ( $\sigma$ ) | Measured Permittivity ( $\epsilon_r$ ) | Target Conductivity ( $\sigma$ ) | Target Permittivity ( $\epsilon_r$ ) | Conductivity Deviation (%) | Permittivity Deviation (%) |
|---------------|-------------|-----------------|-------------------|------------------------------------|----------------------------------------|----------------------------------|--------------------------------------|----------------------------|----------------------------|
| Oct. 11, 2018 | H750        | 750             | 22.1              | 0.896                              | 40.267                                 | 0.89                             | 41.90                                | 0.67                       | -3.90                      |
| Oct. 12, 2018 | H835        | 835             | 21.9              | 0.889                              | 42.274                                 | 0.90                             | 41.50                                | -1.22                      | 1.87                       |
| Oct. 13, 2018 | H1750       | 1750            | 21.9              | 1.325                              | 40.765                                 | 1.37                             | 40.10                                | -3.28                      | 1.66                       |
| Oct. 14, 2018 | H1900       | 1900            | 22.1              | 1.374                              | 39.600                                 | 1.40                             | 40.00                                | -1.86                      | -1.00                      |
| Oct. 26, 2018 | H2450       | 2450            | 22.1              | 1.745                              | 39.401                                 | 1.80                             | 39.20                                | -3.06                      | 0.51                       |
| Oct. 23, 2018 | H2600       | 2600            | 22.3              | 2.039                              | 38.932                                 | 1.96                             | 39.00                                | 4.03                       | -0.17                      |
| Oct. 18, 2018 | H5G         | 5250            | 22.3              | 4.691                              | 35.329                                 | 4.71                             | 35.90                                | -0.40                      | -1.59                      |
| Oct. 18, 2018 | H5G         | 5600            | 22.3              | 5.040                              | 34.826                                 | 5.07                             | 35.50                                | -0.59                      | -1.90                      |
| Oct. 18, 2018 | H5G         | 5800            | 22.3              | 5.249                              | 34.538                                 | 5.27                             | 35.30                                | -0.40                      | -2.16                      |
| Sep. 26, 2018 | B750        | 750             | 22.1              | 0.976                              | 56.163                                 | 0.96                             | 55.50                                | 1.67                       | 1.19                       |
| Sep. 27, 2018 | B835        | 835             | 22.1              | 0.992                              | 55.615                                 | 0.97                             | 55.20                                | 2.27                       | 0.75                       |
| Dec. 19, 2018 | B835        | 835             | 22.1              | 0.992                              | 54.646                                 | 0.97                             | 55.20                                | 2.27                       | -1.00                      |
| Oct. 10, 2018 | B1750       | 1750            | 21.8              | 1.439                              | 54.051                                 | 1.49                             | 53.40                                | -3.42                      | 1.22                       |
| Dec. 20, 2018 | B1750       | 1750            | 21.8              | 1.470                              | 53.671                                 | 1.49                             | 53.40                                | -1.34                      | 0.51                       |
| Oct. 08, 2018 | B1900       | 1900            | 21.9              | 1.561                              | 54.788                                 | 1.52                             | 53.30                                | 2.70                       | 2.79                       |
| Dec. 21, 2018 | B1900       | 1900            | 21.9              | 1.526                              | 51.959                                 | 1.52                             | 53.30                                | 0.39                       | -2.52                      |
| Oct. 19, 2018 | B2450       | 2450            | 22.1              | 1.961                              | 51.602                                 | 1.95                             | 52.70                                | 0.56                       | -2.08                      |
| Oct. 25, 2018 | B2600       | 2600            | 21.9              | 2.096                              | 50.743                                 | 2.16                             | 52.50                                | -2.96                      | -3.35                      |
| Dec. 18, 2018 | B2600       | 2600            | 21.9              | 2.199                              | 52.350                                 | 2.16                             | 52.50                                | 1.81                       | -0.29                      |
| Oct. 17, 2018 | B5G         | 5250            | 22.2              | 5.379                              | 48.856                                 | 5.36                             | 48.90                                | 0.35                       | -0.09                      |
| Oct. 17, 2018 | B5G         | 5600            | 22.2              | 5.871                              | 48.168                                 | 5.77                             | 48.50                                | 1.75                       | -0.68                      |
| Oct. 17, 2018 | B5G         | 5800            | 22.2              | 6.123                              | 47.668                                 | 6.00                             | 48.20                                | 2.05                       | -1.10                      |

#### Note:

The dielectric properties of the tissue simulating liquid must be measured within 24 hours before the SAR testing and within  $\pm 5\%$  of the target values. Liquid temperature during the SAR testing must be within  $\pm 2^\circ\text{C}$ .

## FCC SAR Test Report

### 4.4 System Validation

The SAR measurement system was validated according to procedures in KDB 865664 D01. The validation status in tabulated summary is as below.

| Test Date     | Probe S/N | Calibration Point |      | Measured Conductivity ( $\sigma$ ) | Measured Permittivity ( $\epsilon_r$ ) | Validation for CW |                 |                | Validation for Modulation |             |      |
|---------------|-----------|-------------------|------|------------------------------------|----------------------------------------|-------------------|-----------------|----------------|---------------------------|-------------|------|
|               |           |                   |      |                                    |                                        | Sensitivity Range | Probe Linearity | Probe Isotropy | Modulation Type           | Duty Factor | PAR  |
| Oct. 11, 2018 | 3873      | Head              | 750  | 0.896                              | 40.267                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Oct. 12, 2018 | 3873      | Head              | 835  | 0.889                              | 42.274                                 | Pass              | Pass            | Pass           | GMSK                      | Pass        | N/A  |
| Oct. 13, 2018 | 3873      | Head              | 1750 | 1.325                              | 40.765                                 | Pass              | Pass            | Pass           | GMSK                      | Pass        | N/A  |
| Oct. 14, 2018 | 3873      | Head              | 1900 | 1.374                              | 39.600                                 | Pass              | Pass            | Pass           | GMSK                      | Pass        | N/A  |
| Oct. 26, 2018 | 3873      | Head              | 2450 | 1.745                              | 39.401                                 | Pass              | Pass            | Pass           | OFDM                      | N/A         | Pass |
| Oct. 23, 2018 | 3873      | Head              | 2600 | 2.039                              | 38.932                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Oct. 18, 2018 | 3873      | Head              | 5250 | 4.691                              | 35.329                                 | Pass              | Pass            | Pass           | OFDM                      | N/A         | Pass |
| Oct. 18, 2018 | 3873      | Head              | 5600 | 5.040                              | 34.826                                 | Pass              | Pass            | Pass           | OFDM                      | N/A         | Pass |
| Oct. 18, 2018 | 3873      | Head              | 5800 | 5.249                              | 34.538                                 | Pass              | Pass            | Pass           | OFDM                      | N/A         | Pass |
| Sep. 26, 2018 | 3873      | Body              | 750  | 0.976                              | 56.163                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Sep. 27, 2018 | 3873      | Body              | 835  | 0.992                              | 55.615                                 | Pass              | Pass            | Pass           | GMSK                      | Pass        | N/A  |
| Dec. 19, 2018 | 3873      | Body              | 835  | 0.992                              | 54.646                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Oct. 10, 2018 | 3873      | Body              | 1750 | 1.439                              | 54.051                                 | Pass              | Pass            | Pass           | GMSK                      | Pass        | N/A  |
| Dec. 20, 2018 | 3873      | Body              | 1750 | 1.470                              | 53.671                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Oct. 08, 2018 | 3873      | Body              | 1900 | 1.561                              | 54.788                                 | Pass              | Pass            | Pass           | GMSK                      | Pass        | N/A  |
| Dec. 21, 2018 | 3873      | Body              | 1900 | 1.526                              | 51.959                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Oct. 19, 2018 | 3873      | Body              | 2450 | 1.961                              | 51.602                                 | Pass              | Pass            | Pass           | OFDM                      | N/A         | Pass |
| Oct. 25, 2018 | 3873      | Body              | 2600 | 2.096                              | 50.743                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Dec. 18, 2018 | 3873      | Body              | 2600 | 2.199                              | 52.350                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Oct. 17, 2018 | 3873      | Body              | 5250 | 5.379                              | 48.856                                 | Pass              | Pass            | Pass           | OFDM                      | N/A         | Pass |
| Oct. 17, 2018 | 3873      | Body              | 5600 | 5.871                              | 48.168                                 | Pass              | Pass            | Pass           | OFDM                      | N/A         | Pass |
| Oct. 17, 2018 | 3873      | Body              | 5800 | 6.123                              | 47.668                                 | Pass              | Pass            | Pass           | OFDM                      | N/A         | Pass |

## FCC SAR Test Report

### 4.5 System Verification

The measuring result for system verification is tabulated as below.

| Test Date     | Mode | Frequency (MHz) | 1W Target SAR-1g (W/kg) | Measured SAR-1g (W/kg) | Normalized to 1W SAR-1g (W/kg) | Deviation (%) | Dipole S/N | Probe S/N | DAE S/N |
|---------------|------|-----------------|-------------------------|------------------------|--------------------------------|---------------|------------|-----------|---------|
| Oct. 11, 2018 | Head | 750             | 8.51                    | 2.14                   | 8.56                           | 0.59          | 1067       | 3873      | 1341    |
| Oct. 12, 2018 | Head | 835             | 9.51                    | 2.42                   | 9.68                           | 1.79          | 4d139      | 3873      | 1341    |
| Oct. 13, 2018 | Head | 1750            | 36.80                   | 9.61                   | 38.44                          | 4.46          | 1071       | 3873      | 1341    |
| Oct. 14, 2018 | Head | 1900            | 39.80                   | 10.40                  | 41.60                          | 4.52          | 5d159      | 3873      | 1341    |
| Oct. 26, 2018 | Head | 2450            | 53.10                   | 14.00                  | 56.00                          | 5.46          | 893        | 3873      | 1341    |
| Oct. 23, 2018 | Head | 2600            | 56.00                   | 14.20                  | 56.80                          | 1.43          | 1110       | 3873      | 1341    |
| Oct. 18, 2018 | Head | 5250            | 81.40                   | 8.04                   | 80.40                          | -1.23         | 1133       | 3873      | 1341    |
| Oct. 18, 2018 | Head | 5600            | 85.70                   | 8.03                   | 80.30                          | -6.30         | 1133       | 3873      | 1341    |
| Oct. 18, 2018 | Head | 5800            | 80.60                   | 7.67                   | 76.70                          | -4.84         | 1133       | 3873      | 1341    |
| Sep. 26, 2018 | Body | 750             | 8.80                    | 2.32                   | 9.28                           | 5.45          | 1067       | 3873      | 1341    |
| Sep. 27, 2018 | Body | 835             | 9.70                    | 2.47                   | 9.88                           | 1.86          | 4d139      | 3873      | 1341    |
| Dec. 19, 2018 | Body | 835             | 9.70                    | 2.41                   | 9.64                           | -0.62         | 4d139      | 3873      | 1341    |
| Oct. 10, 2018 | Body | 1750            | 38.00                   | 9.68                   | 38.72                          | 1.89          | 1071       | 3873      | 1341    |
| Dec. 20, 2018 | Body | 1750            | 38.00                   | 9.35                   | 37.40                          | -1.58         | 1071       | 3873      | 1341    |
| Oct. 08, 2018 | Body | 1900            | 40.20                   | 10.80                  | 43.20                          | 7.46          | 5d159      | 3873      | 1341    |
| Dec. 21, 2018 | Body | 1900            | 40.20                   | 10.40                  | 41.60                          | 3.48          | 5d159      | 3873      | 1341    |
| Oct. 19, 2018 | Body | 2450            | 51.50                   | 13.00                  | 52.00                          | 0.97          | 893        | 3873      | 1341    |
| Oct. 25, 2018 | Body | 2600            | 54.50                   | 14.20                  | 56.80                          | 4.22          | 1110       | 3873      | 1341    |
| Dec. 18, 2018 | Body | 2600            | 54.50                   | 13.80                  | 55.20                          | 1.28          | 1110       | 3873      | 1341    |
| Oct. 17, 2018 | Body | 5250            | 78.60                   | 7.95                   | 79.50                          | 1.15          | 1133       | 3873      | 1341    |
| Oct. 17, 2018 | Body | 5600            | 80.00                   | 7.99                   | 79.90                          | -0.12         | 1133       | 3873      | 1341    |
| Oct. 17, 2018 | Body | 5800            | 77.20                   | 8.01                   | 80.10                          | 3.76          | 1133       | 3873      | 1341    |

#### Note:

Comparing to the reference SAR value provided by SPEAG, the validation data should be within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots can be referred to Appendix A of this report.



## FCC SAR Test Report

### 4.6 Maximum Output Power

#### 4.6.1 Maximum Conducted Power

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

| Mode                  | GSM850 | GSM1900 |
|-----------------------|--------|---------|
| GSM (GMSK, 1Tx-slot)  | 33.2   | 30.3    |
| GPRS (GMSK, 1Tx-slot) | 33.2   | 30.3    |
| GPRS (GMSK, 2Tx-slot) | 31.0   | 28.5    |
| GPRS (GMSK, 3Tx-slot) | 29.5   | 27.0    |
| GPRS (GMSK, 4Tx-slot) | 28.5   | 26.0    |
| EDGE (8PSK, 1Tx-slot) | 26.5   | 26.0    |
| EDGE (8PSK, 2Tx-slot) | 26.5   | 25.5    |
| EDGE (8PSK, 3Tx-slot) | 25.0   | 24.5    |
| EDGE (8PSK, 4Tx-slot) | 24.0   | 23.0    |

| Mode      | WCDMA Band II | WCDMA Band IV | WCDMA Band V |
|-----------|---------------|---------------|--------------|
| RMC 12.2K | 24.0          | 24.0          | 25.0         |
| HSDPA     | 23.0          | 23.0          | 23.5         |
| HSUPA     | 23.0          | 23.0          | 23.5         |

| Mode         | CDMA BC0<br>(without Power Reduction) | CDMA BC0<br>(with Power Reduction) | Power Reduction<br>(dB) |
|--------------|---------------------------------------|------------------------------------|-------------------------|
| 1xRTT        | 25.0                                  | 22.5                               | 2.5                     |
| 1xEVDO Rev.0 | 25.0                                  | 22.5                               | 2.5                     |
| 1xEVDO Rev.A | 25.0                                  | 22.5                               | 2.5                     |

| Mode         | CDMA BC1<br>(without Power Reduction) | CDMA BC1<br>(with Power Reduction) | Power Reduction<br>(dB) |
|--------------|---------------------------------------|------------------------------------|-------------------------|
| 1xRTT        | 25.0                                  | 22.5                               | 2.5                     |
| 1xEVDO Rev.0 | 25.0                                  | 22.5                               | 2.5                     |
| 1xEVDO Rev.A | 25.0                                  | 22.5                               | 2.5                     |

| Mode         | CDMA BC10<br>(without Power Reduction) | CDMA BC10<br>(with Power Reduction) | Power Reduction<br>(dB) |
|--------------|----------------------------------------|-------------------------------------|-------------------------|
| 1xRTT        | 25.0                                   | 22.5                                | 2.5                     |
| 1xEVDO Rev.0 | 25.0                                   | 22.5                                | 2.5                     |
| 1xEVDO Rev.A | 25.0                                   | 22.5                                | 2.5                     |

# FCC SAR Test Report

| Mode                 | LTE 2              | LTE 5              | LTE 12             |
|----------------------|--------------------|--------------------|--------------------|
| QPSK / 16QAM / 64QAM | 24.0 / 23.0 / 22.0 | 24.0 / 23.0 / 22.0 | 24.0 / 23.0 / 22.0 |

| Mode                 | LTE 13             | LTE 14             | LTE 25             |
|----------------------|--------------------|--------------------|--------------------|
| QPSK / 16QAM / 64QAM | 24.0 / 23.0 / 22.0 | 24.0 / 23.0 / 22.0 | 24.0 / 23.0 / 22.0 |

| Mode                 | LTE 26             | LTE 38             | LTE 66             |
|----------------------|--------------------|--------------------|--------------------|
| QPSK / 16QAM / 64QAM | 24.0 / 23.0 / 22.0 | 24.0 / 23.0 / 22.0 | 24.0 / 23.0 / 22.0 |

| Mode                 | LTE 4<br>(without Power Reduction) | LTE 4<br>(with Power Reduction) | Power Reduction<br>(dB) |
|----------------------|------------------------------------|---------------------------------|-------------------------|
| QPSK / 16QAM / 64QAM | 24.0 / 23.0 / 22.0                 | 22.0 / 21.0 / 20.0              | 2                       |

| Mode                 | LTE 41<br>(without Power Reduction) | LTE 41<br>(with Power Reduction) | Power Reduction<br>(dB) |
|----------------------|-------------------------------------|----------------------------------|-------------------------|
| QPSK / 16QAM / 64QAM | 26.5 / 25.5 / 24.5                  | 25.0 / 23.0 / 23.0               | 1.5 / 2.5 / 1.5         |

| Mode         | 2.4G WLAN | 5.2G WLAN | 5.3G WLAN | 5.6G WLAN | 5.8G WLAN |
|--------------|-----------|-----------|-----------|-----------|-----------|
| 802.11b      | 16.0      | N/A       | N/A       | N/A       | N/A       |
| 802.11g      | 16.0      | N/A       | N/A       | N/A       | N/A       |
| 802.11a      | N/A       | 16.5      | 16.5      | 16.5      | 17.0      |
| 802.11n HT20 | 16.0      | 16.0      | 16.0      | 16.5      | 17.0      |
| 802.11n HT40 | 13.0      | 13.0      | 13.0      | 13.0      | 14.0      |

| Mode           | 2.4G Bluetooth                            |
|----------------|-------------------------------------------|
| GFSK           | CH0-38: 9.5<br>CH39: 12.5<br>CH40-78: 9.5 |
| $\pi/4$ -DQPSK | CH0-38: 7.0<br>CH39: 10.0<br>CH40-78: 7.0 |
| 8DPSK          | CH0-38: 7.0<br>CH39: 10.0<br>CH40-78: 7.0 |
| LE             | CH0-18: 0.5<br>CH19: 2.5<br>CH20-39: 0.5  |

## FCC SAR Test Report

### 4.6.2 Measured Conducted Power Result

The measuring conducted average power (Unit: dBm) is shown as below.

| Band                                       | GSM850 |       |              | GSM1900 |              |        |
|--------------------------------------------|--------|-------|--------------|---------|--------------|--------|
| Channel                                    | 128    | 189   | 251          | 512     | 661          | 810    |
| Frequency (MHz)                            | 824.2  | 836.4 | 848.8        | 1850.2  | 1880.0       | 1909.8 |
| <b>Maximum Burst-Averaged Output Power</b> |        |       |              |         |              |        |
| GSM (GMSK, 1Tx-slot)                       | 32.52  | 32.74 | <b>32.84</b> | 28.49   | <b>28.53</b> | 28.45  |
| GPRS (GMSK, 1Tx-slot)                      | 32.50  | 32.72 | 32.82        | 28.48   | 28.52        | 28.44  |
| GPRS (GMSK, 2Tx-slot)                      | 30.51  | 30.73 | 30.83        | 28.04   | 28.08        | 28.00  |
| GPRS (GMSK, 3Tx-slot)                      | 29.10  | 29.32 | 29.42        | 26.87   | 26.91        | 26.83  |
| GPRS (GMSK, 4Tx-slot)                      | 27.66  | 27.88 | 27.98        | 25.31   | 25.35        | 25.27  |
| EDGE (8PSK, 1Tx-slot)                      | 25.89  | 26.11 | 26.21        | 24.97   | 25.01        | 24.93  |
| EDGE (8PSK, 2Tx-slot)                      | 25.60  | 25.82 | 25.92        | 24.81   | 24.85        | 24.77  |
| EDGE (8PSK, 3Tx-slot)                      | 24.30  | 24.52 | 24.62        | 23.59   | 23.63        | 23.55  |
| EDGE (8PSK, 4Tx-slot)                      | 23.04  | 23.26 | 23.36        | 22.36   | 22.40        | 22.32  |
| <b>Maximum Frame-Averaged Output Power</b> |        |       |              |         |              |        |
| GSM (GMSK, 1Tx-slot)                       | 23.52  | 23.74 | 23.84        | 19.49   | 19.53        | 19.45  |
| GPRS (GMSK, 1Tx-slot)                      | 23.50  | 23.72 | 23.82        | 19.48   | 19.52        | 19.44  |
| GPRS (GMSK, 2Tx-slot)                      | 24.51  | 24.73 | 24.83        | 22.04   | 22.08        | 22.00  |
| GPRS (GMSK, 3Tx-slot)                      | 24.84  | 25.06 | <b>25.16</b> | 22.61   | <b>22.65</b> | 22.57  |
| GPRS (GMSK, 4Tx-slot)                      | 24.66  | 24.88 | 24.98        | 22.31   | 22.35        | 22.27  |
| EDGE (8PSK, 1Tx-slot)                      | 16.89  | 17.11 | 17.21        | 15.97   | 16.01        | 15.93  |
| EDGE (8PSK, 2Tx-slot)                      | 19.60  | 19.82 | 19.92        | 18.81   | 18.85        | 18.77  |
| EDGE (8PSK, 3Tx-slot)                      | 20.04  | 20.26 | 20.36        | 19.33   | 19.37        | 19.29  |
| EDGE (8PSK, 4Tx-slot)                      | 20.04  | 20.26 | 20.36        | 19.36   | 19.40        | 19.32  |

#### Note:

- SAR testing was performed on the maximum frame-averaged power mode.
- The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:  
Frame-averaged power = 10 x log (Burst-averaged power mW x Slot used / 8)
- The configuration of time-slot for GSM has transmitting signal in one time-slot during one frame (8 time-slots).

| Band            | WCDMA Band II |        |              | WCDMA Band IV |        |              | WCDMA Band V |       |       | 3GPP<br>MPR<br>(dB) |
|-----------------|---------------|--------|--------------|---------------|--------|--------------|--------------|-------|-------|---------------------|
| Channel         | 9262          | 9400   | 9538         | 1312          | 1413   | 1513         | 4132         | 4182  | 4233  |                     |
| Frequency (MHz) | 1852.4        | 1880.0 | 1907.6       | 1712.4        | 1732.6 | 1752.6       | 826.4        | 836.4 | 846.6 |                     |
| RMC 12.2K       | 23.40         | 23.81  | <b>23.85</b> | 23.52         | 23.61  | <b>23.67</b> | <b>24.41</b> | 24.39 | 24.31 | -                   |
| HSDPA Subtest-1 | 22.08         | 22.49  | 22.53        | 22.53         | 22.62  | 22.68        | 23.09        | 23.07 | 22.99 | 0                   |
| HSDPA Subtest-2 | 22.03         | 22.44  | 22.48        | 22.48         | 22.57  | 22.63        | 23.04        | 23.02 | 22.94 | 0                   |
| HSDPA Subtest-3 | 21.55         | 21.96  | 22.00        | 22.01         | 22.10  | 22.16        | 22.56        | 22.54 | 22.46 | 0.5                 |
| HSDPA Subtest-4 | 21.52         | 21.93  | 21.97        | 21.98         | 22.07  | 22.13        | 22.53        | 22.51 | 22.43 | 0.5                 |
| HSUPA Subtest-1 | 22.04         | 22.45  | 22.49        | 22.50         | 22.59  | 22.65        | 23.06        | 23.04 | 22.96 | 0                   |
| HSUPA Subtest-2 | 20.18         | 20.59  | 20.63        | 20.68         | 20.77  | 20.83        | 21.21        | 21.19 | 21.11 | 2                   |
| HSUPA Subtest-3 | 21.16         | 21.57  | 21.61        | 21.63         | 21.72  | 21.78        | 22.18        | 22.16 | 22.08 | 1                   |
| HSUPA Subtest-4 | 20.15         | 20.56  | 20.60        | 20.63         | 20.72  | 20.78        | 21.17        | 21.15 | 21.07 | 2                   |
| HSUPA Subtest-5 | 22.14         | 22.55  | 22.59        | 22.57         | 22.66  | 22.72        | 23.14        | 23.12 | 23.04 | 0                   |

# FCC SAR Test Report

| Band                               | CDMA BC0 |        |        | CDMA BC1 |         |         |
|------------------------------------|----------|--------|--------|----------|---------|---------|
| Channel                            | 1013     | 384    | 777    | 25       | 600     | 1175    |
| Frequency (MHz)                    | 824.70   | 836.52 | 848.31 | 1851.25  | 1880.00 | 1908.75 |
| <b>EUT without Power Reduction</b> |          |        |        |          |         |         |
| 1xRTT RC1+SO55                     | 24.7     | 24.74  | 24.64  | 24.73    | 24.76   | 24.74   |
| 1xRTT RC3+SO55                     | 24.74    | 24.78  | 24.68  | 24.68    | 24.81   | 24.70   |
| 1xRTT RC3+SO32 (FCH)               | 24.78    | 24.82  | 24.72  | 24.76    | 24.85   | 24.77   |
| 1xRTT RC3+SO32 (SCH)               | 23.89    | 23.93  | 23.83  | 23.43    | 23.52   | 23.44   |
| 1xEVDO Rev.0<br>RTAP 153.6         | 24.42    | 24.53  | 24.38  | 24.47    | 24.57   | 24.49   |
| 1xEVDO Rev.A<br>RETAP 4096         | 24.39    | 24.51  | 24.35  | 24.45    | 24.54   | 24.46   |
| RC1+SO3                            | 23.72    | 23.84  | 23.68  | 23.96    | 24.05   | 23.97   |
| RC3+SO3                            | 24.04    | 24.16  | 24.00  | 23.86    | 23.95   | 23.87   |
| <b>EUT with Power Reduction</b>    |          |        |        |          |         |         |
| 1xRTT RC1+SO55                     | 22.29    | 22.19  | 22.17  | 21.96    | 22.28   | 22.25   |
| 1xRTT RC3+SO55                     | 22.32    | 22.22  | 22.20  | 21.99    | 22.31   | 22.28   |
| 1xRTT RC3+SO32 (FCH)               | 22.36    | 22.26  | 22.24  | 22.03    | 22.35   | 22.32   |
| 1xRTT RC3+SO32 (SCH)               | 21.36    | 21.26  | 21.24  | 21.03    | 21.35   | 21.32   |
| 1xEVDO Rev.0<br>RTAP 153.6         | 22.04    | 21.94  | 21.92  | 21.71    | 22.03   | 22.00   |
| 1xEVDO Rev.A<br>RETAP 4096         | 22.01    | 21.91  | 21.89  | 21.68    | 22.00   | 21.97   |
| RC1+SO3                            | 21.40    | 21.30  | 21.28  | 21.07    | 21.39   | 21.36   |
| RC3+SO3                            | 21.69    | 21.59  | 21.57  | 21.36    | 21.68   | 21.65   |

| Band                               | CDMA BC10 |       |       |
|------------------------------------|-----------|-------|-------|
| Channel                            | 476       | 580   | 684   |
| Frequency (MHz)                    | 817.9     | 820.5 | 823.1 |
| <b>EUT without Power Reduction</b> |           |       |       |
| 1xRTT RC1+SO55                     | 24.68     | 24.61 | 24.68 |
| 1xRTT RC3+SO55                     | 24.71     | 24.64 | 24.58 |
| 1xRTT RC3+SO32 (FCH)               | 24.74     | 24.69 | 24.61 |
| 1xRTT RC3+SO32 (SCH)               | 24.07     | 24.02 | 23.94 |
| 1xEVDO Rev.0<br>RTAP 153.6         | 24.39     | 24.35 | 24.33 |
| 1xEVDO Rev.A<br>RETAP 4096         | 24.37     | 24.33 | 24.30 |
| RC1+SO3                            | 24.18     | 24.14 | 24.11 |
| RC3+SO3                            | 24.24     | 24.20 | 24.17 |
| <b>EUT with Power Reduction</b>    |           |       |       |
| 1xRTT RC1+SO55                     | 22.37     | 22.34 | 22.22 |
| 1xRTT RC3+SO55                     | 22.40     | 22.37 | 22.25 |
| 1xRTT RC3+SO32 (FCH)               | 22.44     | 22.41 | 22.29 |
| 1xRTT RC3+SO32 (SCH)               | 21.44     | 21.41 | 21.29 |
| 1xEVDO Rev.0<br>RTAP 153.6         | 22.12     | 22.09 | 21.97 |
| 1xEVDO Rev.A<br>RETAP 4096         | 22.09     | 22.06 | 21.94 |
| RC1+SO3                            | 21.48     | 21.45 | 21.33 |
| RC3+SO3                            | 21.77     | 21.74 | 21.62 |

# FCC SAR Test Report

| LTE<br>Band / BW | RB<br>Size | RB<br>Offset | QPSK            |                 |                  | 3GPP<br>MPR<br>(dB) | 16QAM           |                 |                  | 3GPP<br>MPR<br>(dB) | 64QAM           |                 |                  | 3GPP<br>MPR<br>(dB) |
|------------------|------------|--------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|
|                  |            |              | Low CH<br>18607 | Mid CH<br>18900 | High CH<br>19193 |                     | Low CH<br>18607 | Mid CH<br>18900 | High CH<br>19193 |                     | Low CH<br>18607 | Mid CH<br>18900 | High CH<br>19193 |                     |
|                  |            |              | 1850.7<br>MHz   | 1880.0<br>MHz   | 1909.3<br>MHz    |                     | 1850.7<br>MHz   | 1880.0<br>MHz   | 1909.3<br>MHz    |                     | 1850.7<br>MHz   | 1880.0<br>MHz   | 1909.3<br>MHz    |                     |
| 2 / 1.4M         | 1          | 0            | 23.55           | 23.72           | 23.69            | 0                   | 22.06           | 22.23           | 22.20            | 1                   | 21.51           | 21.68           | 21.65            | 2                   |
|                  | 1          | 2            | 23.48           | 23.65           | 23.62            | 0                   | 22.25           | 22.42           | 22.39            | 1                   | 22.32           | 22.49           | 22.46            | 2                   |
|                  | 1          | 5            | 23.32           | 23.49           | 23.46            | 0                   | 21.86           | 22.03           | 22.00            | 1                   | 21.54           | 21.71           | 21.68            | 2                   |
|                  | 3          | 0            | 23.54           | 23.71           | 23.68            | 0                   | 22.04           | 22.21           | 22.18            | 1                   | 21.49           | 21.66           | 21.63            | 3                   |
|                  | 3          | 1            | 23.47           | 23.64           | 23.61            | 0                   | 22.23           | 22.40           | 22.37            | 1                   | 22.30           | 22.47           | 22.44            | 3                   |
|                  | 3          | 3            | 23.31           | 23.48           | 23.45            | 0                   | 21.84           | 22.01           | 21.98            | 1                   | 21.52           | 21.69           | 21.66            | 3                   |
|                  | 6          | 0            | 22.43           | 22.60           | 22.57            | 1                   | 21.45           | 21.62           | 21.59            | 2                   | 20.54           | 20.71           | 20.68            | 3                   |

| LTE<br>Band / BW | RB<br>Size | RB<br>Offset | QPSK            |                 |                  | 3GPP<br>MPR<br>(dB) | 16QAM           |                 |                  | 3GPP<br>MPR<br>(dB) | 64QAM           |                 |                  | 3GPP<br>MPR<br>(dB) |
|------------------|------------|--------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|
|                  |            |              | Low CH<br>18615 | Mid CH<br>18900 | High CH<br>19185 |                     | Low CH<br>18615 | Mid CH<br>18900 | High CH<br>19185 |                     | Low CH<br>18615 | Mid CH<br>18900 | High CH<br>19185 |                     |
|                  |            |              | 1851.5<br>MHz   | 1880.0<br>MHz   | 1908.5<br>MHz    |                     | 1851.5<br>MHz   | 1880.0<br>MHz   | 1908.5<br>MHz    |                     | 1851.5<br>MHz   | 1880.0<br>MHz   | 1908.5<br>MHz    |                     |
| 2 / 3M           | 1          | 0            | 23.58           | 23.75           | 23.72            | 0                   | 22.09           | 22.26           | 22.23            | 1                   | 21.54           | 21.71           | 21.68            | 2                   |
|                  | 1          | 7            | 23.51           | 23.68           | 23.65            | 0                   | 22.28           | 22.45           | 22.42            | 1                   | 22.35           | 22.52           | 22.49            | 2                   |
|                  | 1          | 14           | 23.35           | 23.52           | 23.49            | 0                   | 21.89           | 22.06           | 22.03            | 1                   | 21.57           | 21.74           | 21.71            | 2                   |
|                  | 8          | 0            | 22.57           | 22.74           | 22.71            | 1                   | 21.51           | 21.68           | 21.65            | 1                   | 20.61           | 20.78           | 20.75            | 3                   |
|                  | 8          | 3            | 22.46           | 22.63           | 22.60            | 1                   | 21.48           | 21.65           | 21.62            | 1                   | 20.49           | 20.66           | 20.63            | 3                   |
|                  | 8          | 7            | 22.44           | 22.61           | 22.58            | 1                   | 21.57           | 21.74           | 21.71            | 1                   | 20.44           | 20.61           | 20.58            | 3                   |
|                  | 15         | 0            | 22.46           | 22.63           | 22.60            | 1                   | 21.48           | 21.65           | 21.62            | 2                   | 20.57           | 20.74           | 20.71            | 3                   |

| LTE<br>Band / BW | RB<br>Size | RB<br>Offset | QPSK            |                 |                  | 3GPP<br>MPR<br>(dB) | 16QAM           |                 |                  | 3GPP<br>MPR<br>(dB) | 64QAM           |                 |                  | 3GPP<br>MPR<br>(dB) |
|------------------|------------|--------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|
|                  |            |              | Low CH<br>18625 | Mid CH<br>18900 | High CH<br>19175 |                     | Low CH<br>18625 | Mid CH<br>18900 | High CH<br>19175 |                     | Low CH<br>18625 | Mid CH<br>18900 | High CH<br>19175 |                     |
|                  |            |              | 1852.5<br>MHz   | 1880.0<br>MHz   | 1907.5<br>MHz    |                     | 1852.5<br>MHz   | 1880.0<br>MHz   | 1907.5<br>MHz    |                     | 1852.5<br>MHz   | 1880.0<br>MHz   | 1907.5<br>MHz    |                     |
| 2 / 5M           | 1          | 0            | 23.61           | 23.78           | 23.75            | 0                   | 22.12           | 22.29           | 22.26            | 1                   | 21.57           | 21.74           | 21.71            | 2                   |
|                  | 1          | 12           | 23.54           | 23.71           | 23.68            | 0                   | 22.31           | 22.48           | 22.45            | 1                   | 22.38           | 22.55           | 22.52            | 2                   |
|                  | 1          | 24           | 23.38           | 23.55           | 23.52            | 0                   | 21.92           | 22.09           | 22.06            | 1                   | 21.60           | 21.77           | 21.74            | 2                   |
|                  | 12         | 0            | 22.60           | 22.77           | 22.74            | 0                   | 21.54           | 21.71           | 21.68            | 1                   | 20.64           | 20.81           | 20.78            | 3                   |
|                  | 12         | 6            | 22.49           | 22.66           | 22.63            | 0                   | 21.51           | 21.68           | 21.65            | 1                   | 20.52           | 20.69           | 20.66            | 3                   |
|                  | 12         | 13           | 22.47           | 22.64           | 22.61            | 0                   | 21.60           | 21.77           | 21.74            | 1                   | 20.47           | 20.64           | 20.61            | 3                   |
|                  | 25         | 0            | 22.49           | 22.66           | 22.63            | 1                   | 21.51           | 21.68           | 21.65            | 2                   | 20.60           | 20.77           | 20.74            | 3                   |

| LTE<br>Band / BW | RB<br>Size | RB<br>Offset | QPSK            |                 |                  | 3GPP<br>MPR<br>(dB) | 16QAM           |                 |                  | 3GPP<br>MPR<br>(dB) | 64QAM           |                 |                  | 3GPP<br>MPR<br>(dB) |
|------------------|------------|--------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|
|                  |            |              | Low CH<br>18650 | Mid CH<br>18900 | High CH<br>19150 |                     | Low CH<br>18650 | Mid CH<br>18900 | High CH<br>19150 |                     | Low CH<br>18650 | Mid CH<br>18900 | High CH<br>19150 |                     |
|                  |            |              | 1855.0<br>MHz   | 1880.0<br>MHz   | 1905.0<br>MHz    |                     | 1855.0<br>MHz   | 1880.0<br>MHz   | 1905.0<br>MHz    |                     | 1855.0<br>MHz   | 1880.0<br>MHz   | 1905.0<br>MHz    |                     |
| 2 / 10M          | 1          | 0            | 23.63           | 23.80           | 23.77            | 0                   | 22.14           | 22.31           | 22.28            | 1                   | 21.59           | 21.76           | 21.73            | 2                   |
|                  | 1          | 24           | 23.56           | 23.73           | 23.70            | 0                   | 22.33           | 22.50           | 22.47            | 1                   | 22.40           | 22.57           | 22.54            | 2                   |
|                  | 1          | 49           | 23.40           | 23.57           | 23.54            | 0                   | 21.94           | 22.11           | 22.08            | 1                   | 21.62           | 21.79           | 21.76            | 2                   |
|                  | 25         | 0            | 22.62           | 22.79           | 22.76            | 0                   | 21.56           | 21.73           | 21.70            | 1                   | 20.66           | 20.83           | 20.80            | 3                   |
|                  | 25         | 12           | 22.51           | 22.68           | 22.65            | 0                   | 21.53           | 21.70           | 21.67            | 1                   | 20.54           | 20.71           | 20.68            | 3                   |
|                  | 25         | 25           | 22.49           | 22.66           | 22.63            | 0                   | 21.62           | 21.79           | 21.76            | 1                   | 20.49           | 20.66           | 20.63            | 3                   |
|                  | 50         | 0            | 22.51           | 22.68           | 22.65            | 1                   | 21.53           | 21.70           | 21.67            | 2                   | 20.62           | 20.79           | 20.76            | 3                   |

# FCC SAR Test Report

| LTE<br>Band / BW | RB<br>Size | RB<br>Offset | QPSK            |                 |                  | 3GPP<br>MPR<br>(dB) | 16QAM           |                 |                  | 3GPP<br>MPR<br>(dB) | 64QAM           |                 |                  | 3GPP<br>MPR<br>(dB) |
|------------------|------------|--------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|
|                  |            |              | Low CH<br>18675 | Mid CH<br>18900 | High CH<br>19125 |                     | Low CH<br>18675 | Mid CH<br>18900 | High CH<br>19125 |                     | Low CH<br>18675 | Mid CH<br>18900 | High CH<br>19125 |                     |
|                  |            |              | 1857.5<br>MHz   | 1880.0<br>MHz   | 1902.5<br>MHz    |                     | 1857.5<br>MHz   | 1880.0<br>MHz   | 1902.5<br>MHz    |                     | 1857.5<br>MHz   | 1880.0<br>MHz   | 1902.5<br>MHz    |                     |
| 2 / 15M          | 1          | 0            | 23.66           | 23.83           | 23.80            | 0                   | 22.17           | 22.34           | 22.31            | 1                   | 21.62           | 21.79           | 21.76            | 2                   |
|                  | 1          | 37           | 23.59           | 23.76           | 23.73            | 0                   | 22.36           | 22.53           | 22.50            | 1                   | 22.43           | 22.60           | 22.57            | 2                   |
|                  | 1          | 74           | 23.43           | 23.60           | 23.57            | 0                   | 21.97           | 22.14           | 22.11            | 1                   | 21.65           | 21.82           | 21.79            | 2                   |
|                  | 36         | 0            | 22.65           | 22.82           | 22.79            | 1                   | 21.59           | 21.76           | 21.73            | 1                   | 20.69           | 20.86           | 20.83            | 3                   |
|                  | 36         | 19           | 22.54           | 22.71           | 22.68            | 1                   | 21.56           | 21.73           | 21.70            | 1                   | 20.57           | 20.74           | 20.71            | 3                   |
|                  | 36         | 39           | 22.52           | 22.69           | 22.66            | 1                   | 21.65           | 21.82           | 21.79            | 1                   | 20.52           | 20.69           | 20.66            | 3                   |
|                  | 75         | 0            | 22.54           | 22.71           | 22.68            | 1                   | 21.56           | 21.73           | 21.70            | 2                   | 20.65           | 20.82           | 20.79            | 3                   |

| LTE<br>Band / BW | RB<br>Size | RB<br>Offset | QPSK            |                 |                  | 3GPP<br>MPR<br>(dB) | 16QAM           |                 |                  | 3GPP<br>MPR<br>(dB) | 64QAM           |                 |                  | 3GPP<br>MPR<br>(dB) |
|------------------|------------|--------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|
|                  |            |              | Low CH<br>18700 | Mid CH<br>18900 | High CH<br>19100 |                     | Low CH<br>18700 | Mid CH<br>18900 | High CH<br>19100 |                     | Low CH<br>18700 | Mid CH<br>18900 | High CH<br>19100 |                     |
|                  |            |              | 1860.0<br>MHz   | 1880.0<br>MHz   | 1900.0<br>MHz    |                     | 1860.0<br>MHz   | 1880.0<br>MHz   | 1900.0<br>MHz    |                     | 1860.0<br>MHz   | 1880.0<br>MHz   | 1900.0<br>MHz    |                     |
| 2 / 20M          | 1          | 0            | 23.71           | <b>23.88</b>    | 23.85            | 0                   | 22.22           | 22.39           | 22.36            | 1                   | 21.67           | 21.84           | 21.81            | 2                   |
|                  | 1          | 50           | 23.64           | 23.81           | 23.78            | 0                   | 22.41           | 22.58           | 22.55            | 1                   | 22.48           | 22.65           | 22.62            | 2                   |
|                  | 1          | 99           | 23.48           | 23.65           | 23.62            | 0                   | 22.02           | 22.19           | 22.16            | 1                   | 21.70           | 21.87           | 21.84            | 2                   |
|                  | 50         | 0            | 22.70           | 22.87           | 22.84            | 1                   | 21.64           | 21.81           | 21.78            | 1                   | 20.74           | 20.91           | 20.88            | 3                   |
|                  | 50         | 25           | 22.59           | 22.76           | 22.73            | 1                   | 21.61           | 21.78           | 21.75            | 1                   | 20.62           | 20.79           | 20.76            | 3                   |
|                  | 50         | 50           | 22.57           | 22.74           | 22.71            | 1                   | 21.70           | 21.87           | 21.84            | 1                   | 20.57           | 20.74           | 20.71            | 3                   |
|                  | 100        | 0            | 22.59           | 22.76           | 22.73            | 1                   | 21.61           | 21.78           | 21.75            | 2                   | 20.70           | 20.87           | 20.84            | 3                   |

# FCC SAR Test Report

| LTE<br>Band / BW            | RB<br>Size | RB<br>Offset | QPSK            |                 |                  | 3GPP<br>MPR<br>(dB) | 16QAM           |                 |                  | 3GPP<br>MPR<br>(dB) | 64QAM           |                 |                  | 3GPP<br>MPR<br>(dB) |
|-----------------------------|------------|--------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|
|                             |            |              | Low CH<br>19957 | Mid CH<br>20175 | High CH<br>19193 |                     | Low CH<br>19957 | Mid CH<br>20175 | High CH<br>19193 |                     | Low CH<br>19957 | Mid CH<br>20175 | High CH<br>19193 |                     |
|                             |            |              | 1710.7<br>MHz   | 1732.5<br>MHz   | 1754.3<br>MHz    |                     | 1710.7<br>MHz   | 1732.5<br>MHz   | 1754.3<br>MHz    |                     | 1710.7<br>MHz   | 1732.5<br>MHz   | 1754.3<br>MHz    |                     |
| EUT without Power Reduction |            |              |                 |                 |                  |                     |                 |                 |                  |                     |                 |                 |                  |                     |
| 4 / 1.4M                    | 1          | 0            | 22.87           | 22.89           | 23.26            | 0                   | 21.31           | 21.27           | 21.67            | 1                   | 20.78           | 20.78           | 21.19            | 2                   |
|                             | 1          | 2            | 22.83           | 22.78           | 23.20            | 0                   | 21.29           | 21.21           | 21.65            | 1                   | 20.71           | 20.75           | 21.10            | 2                   |
|                             | 1          | 5            | 22.71           | 22.64           | 23.04            | 0                   | 21.20           | 21.15           | 21.60            | 1                   | 20.73           | 20.65           | 21.09            | 2                   |
|                             | 3          | 0            | 22.66           | 22.62           | 23.06            | 0                   | 21.86           | 21.83           | 22.21            | 1                   | 20.82           | 19.82           | 20.18            | 2                   |
|                             | 3          | 1            | 22.62           | 22.59           | 22.91            | 0                   | 21.79           | 21.84           | 22.18            | 1                   | 20.79           | 19.81           | 20.15            | 2                   |
|                             | 3          | 3            | 22.55           | 22.50           | 22.90            | 0                   | 21.76           | 21.73           | 22.15            | 1                   | 20.74           | 19.69           | 20.14            | 2                   |
| 6                           | 0          | 21.66        | 21.59           | 22.01           | 1                | 20.76               | 20.78           | 21.13           | 2                | 19.79               | 19.76           | 20.14           | 3                |                     |
| EUT with Power Reduction    |            |              |                 |                 |                  |                     |                 |                 |                  |                     |                 |                 |                  |                     |
| 4 / 1.4M                    | 1          | 0            | 20.83           | 21.04           | 21.16            | 0                   | 19.76           | 19.91           | 20.06            | 1                   | 19.52           | 19.71           | 19.87            | 2                   |
|                             | 1          | 2            | 21.20           | 21.34           | 21.51            | 0                   | 19.99           | 20.10           | 20.29            | 1                   | 19.61           | 19.84           | 19.94            | 2                   |
|                             | 1          | 5            | 20.87           | 20.99           | 21.14            | 0                   | 19.28           | 19.42           | 19.62            | 1                   | 19.16           | 19.27           | 19.46            | 2                   |
|                             | 3          | 0            | 21.22           | 21.37           | 21.56            | 0                   | 20.25           | 20.41           | 20.54            | 1                   | 20.11           | 19.30           | 19.41            | 2                   |
|                             | 3          | 1            | 21.15           | 21.31           | 21.38            | 0                   | 20.15           | 20.39           | 20.48            | 1                   | 20.19           | 19.40           | 19.49            | 2                   |
|                             | 3          | 3            | 20.94           | 21.08           | 21.23            | 0                   | 20.17           | 20.33           | 20.50            | 1                   | 20.13           | 19.27           | 19.47            | 2                   |
| 6                           | 0          | 20.14        | 20.26           | 20.43           | 1                | 19.19               | 19.40           | 19.50           | 2                | 19.10               | 19.26           | 19.39           | 3                |                     |

| LTE<br>Band / BW            | RB<br>Size | RB<br>Offset | QPSK          |               |               | 3GPP<br>MPR<br><br>(dB) | 16QAM         |               |               | 3GPP<br>MPR<br><br>(dB) | 64QAM         |               |               | 3GPP<br>MPR<br><br>(dB) |
|-----------------------------|------------|--------------|---------------|---------------|---------------|-------------------------|---------------|---------------|---------------|-------------------------|---------------|---------------|---------------|-------------------------|
|                             |            |              | Low CH        | Mid CH        | High CH       |                         | Low CH        | Mid CH        | High CH       |                         | Low CH        | Mid CH        | High CH       |                         |
|                             |            |              | 19965         | 20175         | 20385         |                         | 19965         | 20175         | 20385         |                         | 19965         | 20175         | 20385         |                         |
|                             |            |              | 1711.5<br>MHz | 1732.5<br>MHz | 1753.5<br>MHz |                         | 1711.5<br>MHz | 1732.5<br>MHz | 1753.5<br>MHz |                         | 1711.5<br>MHz | 1732.5<br>MHz | 1753.5<br>MHz |                         |
| EUT without Power Reduction |            |              |               |               |               |                         |               |               |               |                         |               |               |               |                         |
| 4 / 3M                      | 1          | 0            | 22.89         | 22.91         | 23.25         | 0                       | 21.28         | 21.33         | 21.70         | 1                       | 20.84         | 20.81         | 21.13         | 2                       |
|                             | 1          | 7            | 22.79         | 22.79         | 23.20         | 0                       | 21.26         | 21.24         | 21.63         | 1                       | 20.74         | 20.69         | 21.09         | 2                       |
|                             | 1          | 14           | 22.67         | 22.64         | 23.04         | 0                       | 21.23         | 21.15         | 21.60         | 1                       | 20.74         | 20.67         | 21.09         | 2                       |
|                             | 8          | 0            | 21.65         | 21.65         | 22.06         | 1                       | 20.82         | 20.84         | 21.21         | 2                       | 19.85         | 19.86         | 20.19         | 3                       |
|                             | 8          | 3            | 21.55         | 21.59         | 21.93         | 1                       | 20.84         | 20.79         | 21.21         | 2                       | 19.83         | 19.75         | 20.20         | 3                       |
|                             | 8          | 7            | 21.52         | 21.57         | 21.94         | 1                       | 20.78         | 20.71         | 21.11         | 2                       | 19.71         | 19.73         | 20.10         | 3                       |
|                             | 15         | 0            | 21.63         | 21.60         | 21.95         | 1                       | 20.76         | 20.72         | 21.16         | 2                       | 19.81         | 19.73         | 20.18         | 3                       |
| EUT with Power Reduction    |            |              |               |               |               |                         |               |               |               |                         |               |               |               |                         |
| 4 / 3M                      | 1          | 0            | 20.85         | 21.06         | 21.15         | 0                       | 19.73         | 19.97         | 20.09         | 1                       | 19.58         | 19.74         | 19.81         | 2                       |
|                             | 1          | 7            | 21.16         | 21.35         | 21.51         | 0                       | 19.96         | 20.13         | 20.27         | 1                       | 19.64         | 19.78         | 19.93         | 2                       |
|                             | 1          | 14           | 20.83         | 20.99         | 21.14         | 0                       | 19.31         | 19.42         | 19.62         | 1                       | 19.17         | 19.29         | 19.46         | 2                       |
|                             | 8          | 0            | 20.21         | 20.40         | 20.56         | 1                       | 19.21         | 19.42         | 19.54         | 2                       | 19.14         | 19.34         | 19.42         | 3                       |
|                             | 8          | 3            | 20.08         | 20.31         | 20.40         | 1                       | 19.20         | 19.34         | 19.51         | 2                       | 19.23         | 19.34         | 19.54         | 3                       |
|                             | 8          | 7            | 19.91         | 20.15         | 20.27         | 1                       | 19.19         | 19.31         | 19.46         | 2                       | 19.10         | 19.31         | 19.43         | 3                       |
|                             | 15         | 0            | 20.11         | 20.27         | 20.37         | 1                       | 19.19         | 19.34         | 19.53         | 2                       | 19.12         | 19.23         | 19.43         | 3                       |

# FCC SAR Test Report

| LTE<br>Band / BW            | RB<br>Size | RB<br>Offset | QPSK            |                 |                  | 3GPP<br>MPR<br>(dB) | 16QAM           |                 |                  | 3GPP<br>MPR<br>(dB) | 64QAM           |                 |                  | 3GPP<br>MPR<br>(dB) |
|-----------------------------|------------|--------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|
|                             |            |              | Low CH<br>19975 | Mid CH<br>20175 | High CH<br>20375 |                     | Low CH<br>19975 | Mid CH<br>20175 | High CH<br>20375 |                     | Low CH<br>19975 | Mid CH<br>20175 | High CH<br>20375 |                     |
|                             |            |              | 1712.5<br>MHz   | 1732.5<br>MHz   | 1752.5<br>MHz    |                     | 1712.5<br>MHz   | 1732.5<br>MHz   | 1752.5<br>MHz    |                     | 1712.5<br>MHz   | 1732.5<br>MHz   | 1752.5<br>MHz    |                     |
| EUT without Power Reduction |            |              |                 |                 |                  |                     |                 |                 |                  |                     |                 |                 |                  |                     |
| 4 / 5M                      | 1          | 0            | 22.90           | 22.86           | 23.26            | 0                   | 21.29           | 21.29           | 21.70            | 1                   | 20.78           | 20.78           | 21.19            | 2                   |
|                             | 1          | 12           | 22.84           | 22.76           | 23.20            | 0                   | 21.23           | 21.27           | 21.62            | 1                   | 20.71           | 20.75           | 21.09            | 2                   |
|                             | 1          | 24           | 22.68           | 22.63           | 23.08            | 0                   | 21.23           | 21.15           | 21.59            | 1                   | 20.67           | 20.72           | 21.09            | 2                   |
|                             | 12         | 0            | 21.68           | 21.65           | 22.03            | 1                   | 20.82           | 20.82           | 21.18            | 2                   | 19.86           | 19.83           | 20.18            | 3                   |
|                             | 12         | 6            | 21.55           | 21.60           | 21.94            | 1                   | 20.81           | 20.83           | 21.17            | 2                   | 19.77           | 19.82           | 20.19            | 3                   |
|                             | 12         | 13           | 21.56           | 21.53           | 21.95            | 1                   | 20.73           | 20.73           | 21.14            | 2                   | 19.75           | 19.72           | 20.07            | 3                   |
| 25                          | 0          | 21.61        | 21.63           | 21.98           | 1                | 20.76               | 20.73           | 21.13           | 2                | 19.77               | 19.79           | 20.16           | 3                |                     |
| EUT with Power Reduction    |            |              |                 |                 |                  |                     |                 |                 |                  |                     |                 |                 |                  |                     |
| 4 / 5M                      | 1          | 0            | 20.86           | 21.01           | 21.16            | 0                   | 19.74           | 19.93           | 20.09            | 1                   | 19.52           | 19.71           | 19.87            | 2                   |
|                             | 1          | 12           | 21.21           | 21.32           | 21.51            | 0                   | 19.93           | 20.16           | 20.26            | 1                   | 19.61           | 19.84           | 19.93            | 2                   |
|                             | 1          | 24           | 20.84           | 20.98           | 21.18            | 0                   | 19.31           | 19.42           | 19.61            | 1                   | 19.10           | 19.34           | 19.46            | 2                   |
|                             | 12         | 0            | 20.24           | 20.40           | 20.53            | 1                   | 19.21           | 19.40           | 19.51            | 2                   | 19.15           | 19.31           | 19.41            | 3                   |
|                             | 12         | 6            | 20.08           | 20.32           | 20.41            | 1                   | 19.17           | 19.38           | 19.47            | 2                   | 19.17           | 19.41           | 19.53            | 3                   |
|                             | 12         | 13           | 19.95           | 20.11           | 20.28            | 1                   | 19.14           | 19.33           | 19.49            | 2                   | 19.14           | 19.30           | 19.40            | 3                   |
| 25                          | 0          | 20.09        | 20.30           | 20.40           | 1                | 19.19               | 19.35           | 19.50           | 2                | 19.08               | 19.29           | 19.41           | 3                |                     |

| LTE<br>Band / BW            | RB<br>Size | RB<br>Offset | QPSK            |                 |                  | 3GPP<br>MPR<br>(dB) | 16QAM           |                 |                  | 3GPP<br>MPR<br>(dB) | 64QAM           |                 |                  | 3GPP<br>MPR<br>(dB) |
|-----------------------------|------------|--------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|
|                             |            |              | Low CH<br>20000 | Mid CH<br>20175 | High CH<br>20350 |                     | Low CH<br>20000 | Mid CH<br>20175 | High CH<br>20350 |                     | Low CH<br>20000 | Mid CH<br>20175 | High CH<br>20350 |                     |
|                             |            |              | 1715.0<br>MHz   | 1732.5<br>MHz   | 1750.0<br>MHz    |                     | 1715.0<br>MHz   | 1732.5<br>MHz   | 1750.0<br>MHz    |                     | 1715.0<br>MHz   | 1732.5<br>MHz   | 1750.0<br>MHz    |                     |
| EUT without Power Reduction |            |              |                 |                 |                  |                     |                 |                 |                  |                     |                 |                 |                  |                     |
| 4 / 10M                     | 1          | 0            | 22.87           | 22.89           | 23.26            | 0                   | 21.29           | 21.26           | 21.66            | 1                   | 20.77           | 20.79           | 21.16            | 2                   |
|                             | 1          | 24           | 22.84           | 22.76           | 23.21            | 0                   | 21.28           | 21.23           | 21.65            | 1                   | 20.76           | 20.71           | 21.13            | 2                   |
|                             | 1          | 49           | 22.65           | 22.67           | 23.04            | 0                   | 21.23           | 21.16           | 21.56            | 1                   | 20.73           | 20.66           | 21.06            | 2                   |
|                             | 25         | 0            | 21.69           | 21.64           | 22.06            | 1                   | 20.84           | 20.80           | 21.24            | 2                   | 19.84           | 19.80           | 20.24            | 3                   |
|                             | 25         | 12           | 21.61           | 21.54           | 21.94            | 1                   | 20.85           | 20.77           | 21.22            | 2                   | 19.84           | 19.81           | 20.13            | 3                   |
|                             | 25         | 25           | 21.54           | 21.50           | 21.94            | 1                   | 20.72           | 20.74           | 21.11            | 2                   | 19.74           | 19.69           | 20.09            | 3                   |
|                             | 50         | 0            | 21.66           | 21.63           | 21.95            | 1                   | 20.80           | 20.72           | 21.17            | 2                   | 19.82           | 19.75           | 20.17            | 3                   |
| EUT with Power Reduction    |            |              |                 |                 |                  |                     |                 |                 |                  |                     |                 |                 |                  |                     |
| 4 / 10M                     | 1          | 0            | 20.83           | 21.04           | 21.16            | 0                   | 19.74           | 19.90           | 20.05            | 1                   | 19.51           | 19.72           | 19.84            | 2                   |
|                             | 1          | 24           | 21.21           | 21.32           | 21.52            | 0                   | 19.98           | 20.12           | 20.29            | 1                   | 19.66           | 19.80           | 19.97            | 2                   |
|                             | 1          | 49           | 20.81           | 21.02           | 21.14            | 0                   | 19.31           | 19.43           | 19.58            | 1                   | 19.16           | 19.28           | 19.43            | 2                   |
|                             | 25         | 0            | 20.25           | 20.39           | 20.56            | 1                   | 19.23           | 19.38           | 19.57            | 2                   | 19.13           | 19.28           | 19.47            | 3                   |
|                             | 25         | 12           | 20.14           | 20.26           | 20.41            | 1                   | 19.21           | 19.32           | 19.52            | 2                   | 19.24           | 19.40           | 19.47            | 3                   |
|                             | 25         | 25           | 19.93           | 20.08           | 20.27            | 1                   | 19.13           | 19.34           | 19.46            | 2                   | 19.13           | 19.27           | 19.42            | 3                   |
|                             | 50         | 0            | 20.14           | 20.30           | 20.37            | 1                   | 19.23           | 19.34           | 19.54            | 2                   | 19.13           | 19.25           | 19.42            | 3                   |



# FCC SAR Test Report

| LTE<br>Band / BW            | RB<br>Size | RB<br>Offset | QPSK            |                 |                  | 3GPP<br>MPR<br>(dB) | 16QAM           |                 |                  | 3GPP<br>MPR<br>(dB) | 64QAM           |                 |                  | 3GPP<br>MPR<br>(dB) |
|-----------------------------|------------|--------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|
|                             |            |              | Low CH<br>20025 | Mid CH<br>20175 | High CH<br>20325 |                     | Low CH<br>20025 | Mid CH<br>20175 | High CH<br>20325 |                     | Low CH<br>20025 | Mid CH<br>20175 | High CH<br>20325 |                     |
|                             |            |              | 1717.5<br>MHz   | 1732.5<br>MHz   | 1747.5<br>MHz    |                     | 1717.5<br>MHz   | 1732.5<br>MHz   | 1747.5<br>MHz    |                     | 1717.5<br>MHz   | 1732.5<br>MHz   | 1747.5<br>MHz    |                     |
| EUT without Power Reduction |            |              |                 |                 |                  |                     |                 |                 |                  |                     |                 |                 |                  |                     |
| 4 / 15M                     | 1          | 0            | 22.94           | 22.89           | 23.23            | 0                   | 21.33           | 21.33           | 21.66            | 1                   | 20.79           | 20.80           | 21.17            | 2                   |
|                             | 1          | 37           | 22.82           | 22.81           | 23.16            | 0                   | 21.27           | 21.24           | 21.65            | 1                   | 20.77           | 20.70           | 21.10            | 2                   |
|                             | 1          | 74           | 22.71           | 22.70           | 23.05            | 0                   | 21.19           | 21.21           | 21.58            | 1                   | 20.69           | 20.65           | 21.09            | 2                   |
|                             | 36         | 0            | 21.66           | 21.65           | 22.07            | 1                   | 20.88           | 20.80           | 21.25            | 2                   | 19.89           | 19.86           | 20.18            | 3                   |
|                             | 36         | 19           | 21.62           | 21.59           | 21.94            | 1                   | 20.79           | 20.81           | 21.18            | 2                   | 19.78           | 19.75           | 20.15            | 3                   |
|                             | 36         | 39           | 21.52           | 21.51           | 21.94            | 1                   | 20.77           | 20.72           | 21.14            | 2                   | 19.77           | 19.76           | 20.11            | 3                   |
| 75                          | 0          | 21.66        | 21.61           | 22.00           | 1                | 20.81               | 20.75           | 21.10           | 2                | 19.81               | 19.73           | 20.18           | 3                |                     |
| EUT with Power Reduction    |            |              |                 |                 |                  |                     |                 |                 |                  |                     |                 |                 |                  |                     |
| 4 / 15M                     | 1          | 0            | 20.90           | 21.04           | 21.13            | 0                   | 19.78           | 19.97           | 20.05            | 1                   | 19.53           | 19.73           | 19.85            | 2                   |
|                             | 1          | 37           | 21.19           | 21.37           | 21.47            | 0                   | 19.97           | 20.13           | 20.29            | 1                   | 19.67           | 19.79           | 19.94            | 2                   |
|                             | 1          | 74           | 20.87           | 21.05           | 21.15            | 0                   | 19.27           | 19.48           | 19.60            | 1                   | 19.12           | 19.27           | 19.46            | 2                   |
|                             | 36         | 0            | 20.22           | 20.40           | 20.57            | 1                   | 19.27           | 19.38           | 19.58            | 2                   | 19.18           | 19.34           | 19.41            | 3                   |
|                             | 36         | 19           | 20.15           | 20.31           | 20.41            | 1                   | 19.15           | 19.36           | 19.48            | 2                   | 19.18           | 19.34           | 19.49            | 3                   |
|                             | 36         | 39           | 19.91           | 20.09           | 20.27            | 1                   | 19.18           | 19.32           | 19.49            | 2                   | 19.16           | 19.34           | 19.44            | 3                   |
| 75                          | 0          | 20.14        | 20.28           | 20.42           | 1                | 19.24               | 19.37           | 19.47           | 2                | 19.12               | 19.23           | 19.43           | 3                |                     |

| LTE<br>Band / BW            | RB<br>Size | RB<br>Offset | QPSK          |               |               | 3GPP<br>MPR<br>(dB) | 16QAM         |               |               | 3GPP<br>MPR<br>(dB) | 64QAM         |               |               | 3GPP<br>MPR<br>(dB) |
|-----------------------------|------------|--------------|---------------|---------------|---------------|---------------------|---------------|---------------|---------------|---------------------|---------------|---------------|---------------|---------------------|
|                             |            |              | Low CH        | Mid CH        | High CH       |                     | Low CH        | Mid CH        | High CH       |                     | Low CH        | Mid CH        | High CH       |                     |
|                             |            |              | 20050         | 20175         | 20300         |                     | 20050         | 20175         | 20300         |                     | 20050         | 20175         | 20300         |                     |
|                             |            |              | 1720.0<br>MHz | 1732.5<br>MHz | 1745.0<br>MHz |                     | 1720.0<br>MHz | 1732.5<br>MHz | 1745.0<br>MHz |                     | 1720.0<br>MHz | 1732.5<br>MHz | 1745.0<br>MHz |                     |
| EUT without Power Reduction |            |              |               |               |               |                     |               |               |               |                     |               |               |               |                     |
| 4 / 20M                     | 1          | 0            | 22.95         | 22.93         | 23.31         | 0                   | 21.36         | 21.34         | 21.72         | 1                   | 20.85         | 20.83         | 21.21         | 2                   |
|                             | 1          | 50           | 22.86         | 22.84         | 23.22         | 0                   | 21.31         | 21.29         | 21.67         | 1                   | 20.79         | 20.77         | 21.15         | 2                   |
|                             | 1          | 99           | 22.73         | 22.71         | 23.09         | 0                   | 21.25         | 21.23         | 21.61         | 1                   | 20.75         | 20.73         | 21.11         | 2                   |
|                             | 50         | 0            | 21.72         | 21.70         | 22.08         | 1                   | 20.90         | 20.88         | 21.26         | 2                   | 19.90         | 19.88         | 20.26         | 3                   |
|                             | 50         | 25           | 21.63         | 21.61         | 21.99         | 1                   | 20.87         | 20.85         | 21.23         | 2                   | 19.85         | 19.83         | 20.21         | 3                   |
|                             | 50         | 50           | 21.60         | 21.58         | 21.96         | 1                   | 20.80         | 20.78         | 21.16         | 2                   | 19.79         | 19.77         | 20.15         | 3                   |
| 100                         | 0          | 21.67        | 21.65         | 22.03         | 1             | 20.82               | 20.80         | 21.18         | 2             | 19.83               | 19.81         | 20.19         | 3             |                     |
| EUT with Power Reduction    |            |              |               |               |               |                     |               |               |               |                     |               |               |               |                     |
| 4 / 20M                     | 1          | 0            | 20.91         | 21.08         | 21.21         | 0                   | 19.81         | 19.98         | 20.11         | 1                   | 19.59         | 19.76         | 19.89         | 2                   |
|                             | 1          | 50           | 21.23         | 21.40         | 21.53         | 0                   | 20.01         | 20.18         | 20.31         | 1                   | 19.69         | 19.86         | 19.99         | 2                   |
|                             | 1          | 99           | 20.89         | 21.06         | 21.19         | 0                   | 19.33         | 19.50         | 19.63         | 1                   | 19.18         | 19.35         | 19.48         | 2                   |
|                             | 50         | 0            | 20.28         | 20.45         | 20.58         | 1                   | 19.29         | 19.46         | 19.59         | 2                   | 19.19         | 19.36         | 19.49         | 3                   |
|                             | 50         | 25           | 20.16         | 20.33         | 20.46         | 1                   | 19.23         | 19.40         | 19.53         | 2                   | 19.25         | 19.42         | 19.55         | 3                   |
|                             | 50         | 50           | 19.99         | 20.16         | 20.29         | 1                   | 19.21         | 19.38         | 19.51         | 2                   | 19.18         | 19.35         | 19.48         | 3                   |
| 100                         | 0          | 20.15        | 20.32         | 20.45         | 1             | 19.25               | 19.42         | 19.55         | 2             | 19.14               | 19.31         | 19.44         | 3             |                     |

# FCC SAR Test Report

| LTE Band / BW | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) | 64QAM        |              |               | 3GPP MPR (dB) |
|---------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|               |         |           | Low CH 20407 | Mid CH 20525 | High CH 20643 |               | Low CH 20407 | Mid CH 20525 | High CH 20643 |               | Low CH 20407 | Mid CH 20525 | High CH 20643 |               |
|               |         |           | 824.7 MHz    | 836.5 MHz    | 848.3 MHz     |               | 824.7 MHz    | 836.5 MHz    | 848.3 MHz     |               | 824.7 MHz    | 836.5 MHz    | 848.3 MHz     |               |
| 5 / 1.4M      | 1       | 0         | 22.95        | 23.03        | 22.90         | 0             | 21.59        | 21.61        | 21.51         | 1             | 20.96        | 21.02        | 20.93         | 2             |
|               | 1       | 2         | 23.25        | 23.26        | 23.18         | 0             | 21.70        | 21.68        | 21.62         | 1             | 21.08        | 21.18        | 21.03         | 2             |
|               | 1       | 5         | 22.93        | 22.92        | 22.82         | 0             | 21.49        | 21.50        | 21.45         | 1             | 20.92        | 20.90        | 20.84         | 2             |
|               | 3       | 0         | 23.17        | 23.19        | 23.13         | 0             | 22.07        | 22.10        | 21.98         | 1             | 21.28        | 21.34        | 21.20         | 2             |
|               | 3       | 1         | 23.25        | 23.28        | 23.10         | 0             | 22.19        | 22.30        | 22.14         | 1             | 21.38        | 21.46        | 21.30         | 2             |
|               | 3       | 3         | 23.04        | 23.05        | 22.95         | 0             | 22.02        | 22.05        | 21.97         | 1             | 21.23        | 21.24        | 21.19         | 2             |
|               | 6       | 0         | 21.98        | 21.97        | 21.89         | 1             | 21.26        | 21.34        | 21.19         | 2             | 20.32        | 20.35        | 20.23         | 3             |

| LTE Band / BW | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) | 64QAM        |              |               | 3GPP MPR (dB) |
|---------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|               |         |           | Low CH 20415 | Mid CH 20525 | High CH 20635 |               | Low CH 20415 | Mid CH 20525 | High CH 20635 |               | Low CH 20415 | Mid CH 20525 | High CH 20635 |               |
|               |         |           | 825.5 MHz    | 836.5 MHz    | 847.5 MHz     |               | 825.5 MHz    | 836.5 MHz    | 847.5 MHz     |               | 825.5 MHz    | 836.5 MHz    | 847.5 MHz     |               |
| 5 / 3M        | 1       | 0         | 22.97        | 23.05        | 22.89         | 0             | 21.56        | 21.67        | 21.54         | 1             | 21.02        | 21.05        | 20.87         | 2             |
|               | 1       | 7         | 23.21        | 23.27        | 23.18         | 0             | 21.67        | 21.71        | 21.60         | 1             | 21.11        | 21.12        | 21.02         | 2             |
|               | 1       | 14        | 22.89        | 22.92        | 22.82         | 0             | 21.52        | 21.50        | 21.45         | 1             | 20.93        | 20.92        | 20.84         | 2             |
|               | 8       | 0         | 22.16        | 22.22        | 22.13         | 1             | 21.03        | 21.11        | 20.98         | 2             | 20.31        | 20.38        | 20.21         | 3             |
|               | 8       | 3         | 22.18        | 22.28        | 22.12         | 1             | 21.24        | 21.25        | 21.17         | 2             | 20.42        | 20.40        | 20.35         | 3             |
|               | 8       | 7         | 22.01        | 22.12        | 21.99         | 1             | 21.04        | 21.03        | 20.93         | 2             | 20.20        | 20.28        | 20.15         | 3             |
|               | 15      | 0         | 21.95        | 21.98        | 21.83         | 1             | 21.26        | 21.28        | 21.22         | 2             | 20.34        | 20.32        | 20.27         | 3             |

| LTE Band / BW | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) | 64QAM        |              |               | 3GPP MPR (dB) |
|---------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|               |         |           | Low CH 20425 | Mid CH 20525 | High CH 20625 |               | Low CH 20425 | Mid CH 20525 | High CH 20625 |               | Low CH 20425 | Mid CH 20525 | High CH 20625 |               |
|               |         |           | 826.5 MHz    | 836.5 MHz    | 846.5 MHz     |               | 826.5 MHz    | 836.5 MHz    | 846.5 MHz     |               | 826.5 MHz    | 836.5 MHz    | 846.5 MHz     |               |
| 5 / 5M        | 1       | 0         | 22.98        | 23.00        | 22.90         | 0             | 21.57        | 21.63        | 21.54         | 1             | 20.96        | 21.02        | 20.93         | 2             |
|               | 1       | 12        | 23.26        | 23.24        | 23.18         | 0             | 21.64        | 21.74        | 21.59         | 1             | 21.08        | 21.18        | 21.02         | 2             |
|               | 1       | 24        | 22.90        | 22.91        | 22.86         | 0             | 21.52        | 21.50        | 21.44         | 1             | 20.86        | 20.97        | 20.84         | 2             |
|               | 12      | 0         | 22.19        | 22.22        | 22.10         | 1             | 21.03        | 21.09        | 20.95         | 2             | 20.32        | 20.35        | 20.20         | 3             |
|               | 12      | 6         | 22.18        | 22.29        | 22.13         | 1             | 21.21        | 21.29        | 21.13         | 2             | 20.36        | 20.47        | 20.34         | 3             |
|               | 12      | 13        | 22.05        | 22.08        | 22.00         | 1             | 20.99        | 21.05        | 20.96         | 2             | 20.24        | 20.27        | 20.12         | 3             |
|               | 25      | 0         | 21.93        | 22.01        | 21.86         | 1             | 21.26        | 21.29        | 21.19         | 2             | 20.30        | 20.38        | 20.25         | 3             |

| LTE Band / BW | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) | 64QAM        |              |               | 3GPP MPR (dB) |
|---------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|               |         |           | Low CH 20450 | Mid CH 20525 | High CH 20600 |               | Low CH 20450 | Mid CH 20525 | High CH 20600 |               | Low CH 20450 | Mid CH 20525 | High CH 20600 |               |
|               |         |           | 829.0 MHz    | 836.5 MHz    | 844.0 MHz     |               | 829.0 MHz    | 836.5 MHz    | 844.0 MHz     |               | 829.0 MHz    | 836.5 MHz    | 844.0 MHz     |               |
| 5 / 10M       | 1       | 0         | 23.03        | 23.07        | 22.95         | 0             | 21.64        | 21.68        | 21.56         | 1             | 21.03        | 21.07        | 20.95         | 2             |
|               | 1       | 24        | 23.28        | <b>23.32</b> | 23.20         | 0             | 21.72        | 21.76        | 21.64         | 1             | 21.16        | 21.20        | 21.08         | 2             |
|               | 1       | 49        | 22.95        | 22.99        | 22.87         | 0             | 21.54        | 21.58        | 21.46         | 1             | 20.94        | 20.98        | 20.86         | 2             |
|               | 25      | 0         | 22.23        | 22.27        | 22.15         | 1             | 21.11        | 21.15        | 21.03         | 2             | 20.36        | 20.40        | 20.28         | 3             |
|               | 25      | 12        | 22.26        | 22.30        | 22.18         | 1             | 21.27        | 21.31        | 21.19         | 2             | 20.44        | 20.48        | 20.36         | 3             |
|               | 25      | 25        | 22.09        | 22.13        | 22.01         | 1             | 21.06        | 21.10        | 20.98         | 2             | 20.28        | 20.32        | 20.20         | 3             |
|               | 50      | 0         | 21.99        | 22.03        | 21.91         | 1             | 21.32        | 21.36        | 21.24         | 2             | 20.36        | 20.40        | 20.28         | 3             |

# FCC SAR Test Report

| LTE Band / BW | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) | 64QAM        |              |               | 3GPP MPR (dB) |
|---------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|               |         |           | Low CH 23017 | Mid CH 23095 | High CH 23173 |               | Low CH 23017 | Mid CH 23095 | High CH 23173 |               | Low CH 23017 | Mid CH 23095 | High CH 23173 |               |
|               |         |           | 699.7 MHz    | 707.5 MHz    | 715.3 MHz     |               | 699.7 MHz    | 707.5 MHz    | 715.3 MHz     |               | 699.7 MHz    | 707.5 MHz    | 715.3 MHz     |               |
| 12 / 1.4M     | 1       | 0         | 23.25        | 23.40        | 23.57         | 0             | 22.06        | 22.12        | 22.32         | 1             | 21.47        | 21.33        | 21.53         | 2             |
|               | 1       | 2         | 23.56        | 23.72        | 23.90         | 0             | 22.49        | 22.50        | 22.71         | 1             | 21.52        | 21.79        | 22.08         | 2             |
|               | 1       | 5         | 23.56        | 23.72        | 23.45         | 0             | 22.26        | 22.08        | 21.97         | 1             | 21.59        | 21.70        | 21.38         | 2             |
|               | 3       | 0         | 23.70        | 23.58        | 23.79         | 0             | 22.71        | 22.53        | 22.72         | 1             | 21.70        | 21.62        | 21.68         | 2             |
|               | 3       | 1         | 23.64        | 23.63        | 23.74         | 0             | 22.68        | 22.76        | 22.84         | 1             | 21.67        | 21.74        | 21.84         | 2             |
|               | 3       | 3         | 23.59        | 23.59        | 23.66         | 0             | 22.60        | 22.74        | 22.73         | 1             | 21.63        | 21.62        | 21.84         | 2             |
|               | 6       | 0         | 22.70        | 22.54        | 22.72         | 1             | 21.50        | 21.68        | 21.60         | 2             | 20.67        | 20.57        | 20.73         | 3             |

| LTE Band / BW | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) | 64QAM        |              |               | 3GPP MPR (dB) |
|---------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|               |         |           | Low CH 23025 | Mid CH 23095 | High CH 23165 |               | Low CH 23025 | Mid CH 23095 | High CH 23165 |               | Low CH 23025 | Mid CH 23095 | High CH 23165 |               |
|               |         |           | 700.5 MHz    | 707.5 MHz    | 714.5 MHz     |               | 700.5 MHz    | 707.5 MHz    | 714.5 MHz     |               | 700.5 MHz    | 707.5 MHz    | 714.5 MHz     |               |
| 12 / 3M       | 1       | 0         | 23.27        | 23.42        | 23.56         | 0             | 22.03        | 22.18        | 22.35         | 1             | 21.53        | 21.36        | 21.47         | 2             |
|               | 1       | 7         | 23.52        | 23.73        | 23.90         | 0             | 22.46        | 22.53        | 22.69         | 1             | 21.55        | 21.73        | 22.07         | 2             |
|               | 1       | 14        | 23.52        | 23.72        | 23.45         | 0             | 22.29        | 22.08        | 21.97         | 1             | 21.60        | 21.72        | 21.38         | 2             |
|               | 8       | 0         | 22.69        | 22.61        | 22.79         | 1             | 21.67        | 21.54        | 21.72         | 2             | 20.73        | 20.66        | 20.69         | 3             |
|               | 8       | 3         | 22.57        | 22.63        | 22.76         | 1             | 21.73        | 21.71        | 21.87         | 2             | 20.71        | 20.68        | 20.89         | 3             |
|               | 8       | 7         | 22.56        | 22.66        | 22.70         | 1             | 21.62        | 21.72        | 21.69         | 2             | 20.60        | 20.66        | 20.80         | 3             |
|               | 15      | 0         | 22.67        | 22.55        | 22.66         | 1             | 21.50        | 21.62        | 21.63         | 2             | 20.69        | 20.54        | 20.77         | 3             |

| LTE Band / BW | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) | 64QAM        |              |               | 3GPP MPR (dB) |
|---------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|               |         |           | Low CH 23035 | Mid CH 23095 | High CH 23155 |               | Low CH 23035 | Mid CH 23095 | High CH 23155 |               | Low CH 23035 | Mid CH 23095 | High CH 23155 |               |
|               |         |           | 701.5 MHz    | 707.5 MHz    | 713.5 MHz     |               | 701.5 MHz    | 707.5 MHz    | 713.5 MHz     |               | 701.5 MHz    | 707.5 MHz    | 713.5 MHz     |               |
| 12 / 5M       | 1       | 0         | 23.28        | 23.37        | 23.57         | 0             | 22.04        | 22.14        | 22.35         | 1             | 21.47        | 21.33        | 21.53         | 2             |
|               | 1       | 12        | 23.57        | 23.70        | 23.90         | 0             | 22.43        | 22.56        | 22.68         | 1             | 21.52        | 21.79        | 22.07         | 2             |
|               | 1       | 24        | 23.53        | 23.71        | 23.49         | 0             | 22.29        | 22.08        | 21.96         | 1             | 21.53        | 21.77        | 21.38         | 2             |
|               | 12      | 0         | 22.72        | 22.61        | 22.76         | 1             | 21.67        | 21.52        | 21.69         | 2             | 20.74        | 20.63        | 20.68         | 3             |
|               | 12      | 6         | 22.57        | 22.64        | 22.77         | 1             | 21.70        | 21.75        | 21.83         | 2             | 20.65        | 20.75        | 20.88         | 3             |
|               | 12      | 13        | 22.60        | 22.62        | 22.71         | 1             | 21.57        | 21.74        | 21.72         | 2             | 20.64        | 20.65        | 20.77         | 3             |
|               | 25      | 0         | 22.65        | 22.58        | 22.69         | 1             | 21.50        | 21.63        | 21.60         | 2             | 20.65        | 20.60        | 20.75         | 3             |

| LTE Band / BW | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) | 64QAM        |              |               | 3GPP MPR (dB) |
|---------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|               |         |           | Low CH 23060 | Mid CH 23095 | High CH 23130 |               | Low CH 23060 | Mid CH 23095 | High CH 23130 |               | Low CH 23060 | Mid CH 23095 | High CH 23130 |               |
|               |         |           | 704.0 MHz    | 707.5 MHz    | 711.0 MHz     |               | 704.0 MHz    | 707.5 MHz    | 711.0 MHz     |               | 704.0 MHz    | 707.5 MHz    | 711.0 MHz     |               |
| 12 / 10M      | 1       | 0         | 23.33        | 23.44        | 23.62         | 0             | 22.11        | 22.19        | 22.37         | 1             | 21.54        | 21.38        | 21.55         | 2             |
|               | 1       | 24        | 23.59        | 23.78        | 23.92         | 0             | 22.51        | 22.58        | 22.73         | 1             | 21.60        | 21.81        | 22.13         | 2             |
|               | 1       | 49        | 23.58        | 23.79        | 23.50         | 0             | 22.31        | 22.16        | 21.98         | 1             | 21.61        | 21.78        | 21.40         | 2             |
|               | 25      | 0         | 22.76        | 22.66        | 22.81         | 1             | 21.75        | 21.58        | 21.77         | 2             | 20.78        | 20.68        | 20.76         | 3             |
|               | 25      | 12        | 22.65        | 22.65        | 22.82         | 1             | 21.76        | 21.77        | 21.89         | 2             | 20.73        | 20.76        | 20.90         | 3             |
|               | 25      | 25        | 22.64        | 22.67        | 22.72         | 1             | 21.64        | 21.79        | 21.74         | 2             | 20.68        | 20.70        | 20.85         | 3             |
|               | 50      | 0         | 22.71        | 22.60        | 22.74         | 1             | 21.56        | 21.70        | 21.65         | 2             | 20.71        | 20.62        | 20.78         | 3             |

# FCC SAR Test Report

| LTE<br>Band / BW | RB<br>Size | RB<br>Offset | QPSK            |                 |                  | 3GPP<br>MPR<br>(dB) | 16QAM           |                 |                  | 3GPP<br>MPR<br>(dB) | 64QAM           |                 |                  | 3GPP<br>MPR<br>(dB) |
|------------------|------------|--------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|
|                  |            |              | Low CH<br>23205 | Mid CH<br>23230 | High CH<br>23255 |                     | Low CH<br>23205 | Mid CH<br>23230 | High CH<br>23255 |                     | Low CH<br>23205 | Mid CH<br>23230 | High CH<br>23255 |                     |
|                  |            |              | 779.5<br>MHz    | 782.0<br>MHz    | 784.5<br>MHz     |                     | 779.5<br>MHz    | 782.0<br>MHz    | 784.5<br>MHz     |                     | 779.5<br>MHz    | 782.0<br>MHz    | 784.5<br>MHz     |                     |
| 13 / 5M          | 1          | 0            | 23.88           | 23.83           | 23.81            | 0                   | 22.80           | 22.75           | 22.73            | 1                   | 21.74           | 21.69           | 21.67            | 2                   |
|                  | 1          | 12           | 23.92           | 23.87           | 23.85            | 0                   | 22.88           | 22.83           | 22.81            | 1                   | 21.95           | 21.90           | 21.88            | 2                   |
|                  | 1          | 24           | 23.83           | 23.78           | 23.76            | 0                   | 22.44           | 22.39           | 22.37            | 1                   | 21.56           | 21.51           | 21.49            | 2                   |
|                  | 12         | 0            | 22.92           | 22.87           | 22.85            | 1                   | 21.95           | 21.90           | 21.88            | 2                   | 20.92           | 20.87           | 20.85            | 3                   |
|                  | 12         | 6            | 22.85           | 22.80           | 22.78            | 1                   | 21.97           | 21.92           | 21.90            | 2                   | 20.82           | 20.77           | 20.75            | 3                   |
|                  | 12         | 13           | 22.83           | 22.78           | 22.76            | 1                   | 21.92           | 21.87           | 21.85            | 2                   | 20.72           | 20.67           | 20.65            | 3                   |
|                  | 25         | 0            | 22.84           | 22.79           | 22.77            | 1                   | 21.77           | 21.72           | 21.70            | 2                   | 20.95           | 20.90           | 20.88            | 3                   |

| LTE<br>Band / BW | RB<br>Size | RB<br>Offset | QPSK            | 3GPP<br>MPR<br>(dB) | 16QAM           | 3GPP<br>MPR<br>(dB) | 64QAM           | 3GPP<br>MPR<br>(dB) |
|------------------|------------|--------------|-----------------|---------------------|-----------------|---------------------|-----------------|---------------------|
|                  |            |              | Mid CH<br>23230 |                     | Mid CH<br>23230 |                     | Mid CH<br>23230 |                     |
|                  |            |              | 782.0<br>MHz    |                     | 782.0<br>MHz    |                     | 782.0<br>MHz    |                     |
| 13 / 10M         | 1          | 0            | 23.89           | 0                   | 22.81           | 1                   | 21.74           | 2                   |
|                  | 1          | 24           | 23.93           | 0                   | 22.89           | 1                   | 21.96           | 2                   |
|                  | 1          | 49           | 23.84           | 0                   | 22.45           | 1                   | 21.56           | 2                   |
|                  | 25         | 0            | 22.93           | 1                   | 21.96           | 2                   | 20.92           | 3                   |
|                  | 25         | 12           | 22.86           | 1                   | 21.98           | 2                   | 20.82           | 3                   |
|                  | 25         | 25           | 22.84           | 1                   | 21.93           | 2                   | 20.72           | 3                   |
|                  | 50         | 0            | 22.85           | 1                   | 21.77           | 2                   | 20.95           | 3                   |

| LTE<br>Band / BW | RB<br>Size | RB<br>Offset | QPSK            |                 |                  | 3GPP<br>MPR<br>(dB) | 16QAM           |                 |                  | 3GPP<br>MPR<br>(dB) | 64QAM           |                 |                  | 3GPP<br>MPR<br>(dB) |
|------------------|------------|--------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|
|                  |            |              | Low CH<br>23305 | Mid CH<br>23330 | High CH<br>23355 |                     | Low CH<br>23305 | Mid CH<br>23330 | High CH<br>23355 |                     | Low CH<br>23305 | Mid CH<br>23330 | High CH<br>23355 |                     |
|                  |            |              | 790.5<br>MHz    | 793.0<br>MHz    | 795.5<br>MHz     |                     | 790.5<br>MHz    | 793.0<br>MHz    | 795.5<br>MHz     |                     | 790.5<br>MHz    | 793.0<br>MHz    | 795.5<br>MHz     |                     |
| 14 / 5M          | 1          | 0            | 23.17           | 23.12           | 23.22            | 0                   | 21.67           | 21.62           | 21.72            | 1                   | 21.04           | 20.99           | 21.09            | 2                   |
|                  | 1          | 12           | 23.28           | 23.23           | 23.33            | 0                   | 21.78           | 21.73           | 21.83            | 1                   | 21.29           | 21.24           | 21.34            | 2                   |
|                  | 1          | 24           | 23.19           | 23.14           | 23.24            | 0                   | 21.66           | 21.61           | 21.71            | 1                   | 21.20           | 21.15           | 21.25            | 2                   |
|                  | 12         | 0            | 22.33           | 22.28           | 22.38            | 1                   | 21.17           | 21.12           | 21.22            | 2                   | 20.42           | 20.37           | 20.47            | 3                   |
|                  | 12         | 6            | 22.35           | 22.30           | 22.40            | 1                   | 21.38           | 21.33           | 21.43            | 2                   | 20.40           | 20.35           | 20.45            | 3                   |
|                  | 12         | 13           | 22.26           | 22.21           | 22.31            | 1                   | 21.36           | 21.31           | 21.41            | 2                   | 20.32           | 20.27           | 20.37            | 3                   |
|                  | 25         | 0            | 22.21           | 22.16           | 22.26            | 1                   | 21.07           | 21.02           | 21.12            | 2                   | 20.34           | 20.29           | 20.39            | 3                   |

| LTE<br>Band / BW | RB<br>Size | RB<br>Offset | QPSK            | 3GPP<br>MPR<br>(dB) | 16QAM           | 3GPP<br>MPR<br>(dB) | 64QAM           | 3GPP<br>MPR<br>(dB) |
|------------------|------------|--------------|-----------------|---------------------|-----------------|---------------------|-----------------|---------------------|
|                  |            |              | Mid CH<br>23330 |                     | Mid CH<br>23330 |                     | Mid CH<br>23330 |                     |
|                  |            |              | 793.0<br>MHz    |                     | 793.0<br>MHz    |                     | 793.0<br>MHz    |                     |
| 14 / 10M         | 1          | 0            | 23.19           | 0                   | 21.67           | 1                   | 21.04           | 2                   |
|                  | 1          | 24           | 23.31           | 0                   | 21.75           | 1                   | 21.26           | 2                   |
|                  | 1          | 49           | 23.22           | 0                   | 21.69           | 1                   | 21.16           | 2                   |
|                  | 25         | 0            | 22.33           | 1                   | 21.18           | 2                   | 20.42           | 3                   |
|                  | 25         | 12           | 22.31           | 1                   | 21.35           | 2                   | 20.36           | 3                   |
|                  | 25         | 25           | 22.26           | 1                   | 21.36           | 2                   | 20.32           | 3                   |
|                  | 50         | 0            | 22.18           | 1                   | 21.09           | 2                   | 20.31           | 3                   |

# FCC SAR Test Report

| LTE Band / BW | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) | 64QAM        |              |               | 3GPP MPR (dB) |
|---------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|               |         |           | Low CH 26047 | Mid CH 26365 | High CH 26683 |               | Low CH 26047 | Mid CH 26365 | High CH 26683 |               | Low CH 26047 | Mid CH 26365 | High CH 26683 |               |
|               |         |           | 1850.7 MHz   | 1882.5 MHz   | 1914.3 MHz    |               | 1850.7 MHz   | 1882.5 MHz   | 1914.3 MHz    |               | 1850.7 MHz   | 1882.5 MHz   | 1914.3 MHz    |               |
| 25 / 1.4M     | 1       | 0         | 23.51        | 23.70        | 23.63         | 0             | 22.32        | 22.45        | 22.41         | 1             | 21.77        | 21.94        | 21.91         | 2             |
|               | 1       | 2         | 23.53        | 23.65        | 23.63         | 0             | 22.32        | 22.41        | 22.41         | 1             | 21.72        | 21.93        | 21.84         | 2             |
|               | 1       | 5         | 23.50        | 23.60        | 23.56         | 0             | 22.24        | 22.36        | 22.37         | 1             | 21.74        | 21.83        | 21.83         | 2             |
|               | 3       | 0         | 23.50        | 23.63        | 23.63         | 0             | 22.72        | 22.86        | 22.80         | 1             | 21.56        | 21.73        | 21.65         | 2             |
|               | 3       | 1         | 23.49        | 23.63        | 23.51         | 0             | 22.62        | 22.84        | 22.74         | 1             | 21.54        | 21.73        | 21.63         | 2             |
|               | 3       | 3         | 23.35        | 23.47        | 23.43         | 0             | 22.62        | 22.76        | 22.74         | 1             | 21.51        | 21.63        | 21.64         | 2             |
|               | 6       | 0         | 22.53        | 22.63        | 22.61         | 1             | 21.32        | 21.51        | 21.42         | 2             | 20.48        | 20.62        | 20.56         | 3             |

| LTE Band / BW | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) | 64QAM        |              |               | 3GPP MPR (dB) |
|---------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|               |         |           | Low CH 26055 | Mid CH 26365 | High CH 26675 |               | Low CH 26055 | Mid CH 26365 | High CH 26675 |               | Low CH 26055 | Mid CH 26365 | High CH 26675 |               |
|               |         |           | 1851.5 MHz   | 1882.5 MHz   | 1913.5 MHz    |               | 1851.5 MHz   | 1882.5 MHz   | 1913.5 MHz    |               | 1851.5 MHz   | 1882.5 MHz   | 1913.5 MHz    |               |
| 25 / 3M       | 1       | 0         | 23.53        | 23.72        | 23.62         | 0             | 22.29        | 22.51        | 22.44         | 1             | 21.83        | 21.97        | 21.85         | 2             |
|               | 1       | 7         | 23.49        | 23.66        | 23.63         | 0             | 22.29        | 22.44        | 22.39         | 1             | 21.75        | 21.87        | 21.83         | 2             |
|               | 1       | 14        | 23.46        | 23.60        | 23.56         | 0             | 22.27        | 22.36        | 22.37         | 1             | 21.75        | 21.85        | 21.83         | 2             |
|               | 8       | 0         | 22.49        | 22.66        | 22.63         | 1             | 21.68        | 21.87        | 21.80         | 2             | 20.59        | 20.77        | 20.66         | 3             |
|               | 8       | 3         | 22.42        | 22.63        | 22.53         | 1             | 21.67        | 21.79        | 21.77         | 2             | 20.58        | 20.67        | 20.68         | 3             |
|               | 8       | 7         | 22.32        | 22.54        | 22.47         | 1             | 21.64        | 21.74        | 21.70         | 2             | 20.48        | 20.67        | 20.60         | 3             |
|               | 15      | 0         | 22.50        | 22.64        | 22.55         | 1             | 21.32        | 21.45        | 21.45         | 2             | 20.50        | 20.59        | 20.60         | 3             |

| LTE Band / BW | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) | 64QAM        |              |               | 3GPP MPR (dB) |
|---------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|               |         |           | Low CH 26065 | Mid CH 26365 | High CH 26665 |               | Low CH 26065 | Mid CH 26365 | High CH 26665 |               | Low CH 26065 | Mid CH 26365 | High CH 26665 |               |
|               |         |           | 1852.5 MHz   | 1882.5 MHz   | 1912.5 MHz    |               | 1852.5 MHz   | 1882.5 MHz   | 1912.5 MHz    |               | 1852.5 MHz   | 1882.5 MHz   | 1912.5 MHz    |               |
| 25 / 5M       | 1       | 0         | 23.54        | 23.67        | 23.63         | 0             | 22.30        | 22.47        | 22.44         | 1             | 21.77        | 21.94        | 21.91         | 2             |
|               | 1       | 12        | 23.54        | 23.63        | 23.63         | 0             | 22.26        | 22.47        | 22.38         | 1             | 21.72        | 21.93        | 21.83         | 2             |
|               | 1       | 24        | 23.47        | 23.59        | 23.60         | 0             | 22.27        | 22.36        | 22.36         | 1             | 21.68        | 21.90        | 21.83         | 2             |
|               | 12      | 0         | 22.52        | 22.66        | 22.60         | 1             | 21.68        | 21.85        | 21.77         | 2             | 20.60        | 20.74        | 20.65         | 3             |
|               | 12      | 6         | 22.42        | 22.64        | 22.54         | 1             | 21.64        | 21.83        | 21.73         | 2             | 20.52        | 20.74        | 20.67         | 3             |
|               | 12      | 13        | 22.36        | 22.50        | 22.48         | 1             | 21.59        | 21.76        | 21.73         | 2             | 20.52        | 20.66        | 20.57         | 3             |
|               | 25      | 0         | 22.48        | 22.67        | 22.58         | 1             | 21.32        | 21.46        | 21.42         | 2             | 20.46        | 20.65        | 20.58         | 3             |

| LTE Band / BW | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) | 64QAM        |              |               | 3GPP MPR (dB) |
|---------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|               |         |           | Low CH 26090 | Mid CH 26365 | High CH 26640 |               | Low CH 26090 | Mid CH 26365 | High CH 26640 |               | Low CH 26090 | Mid CH 26365 | High CH 26640 |               |
|               |         |           | 1855.0 MHz   | 1882.5 MHz   | 1910.0 MHz    |               | 1855.0 MHz   | 1882.5 MHz   | 1910.0 MHz    |               | 1855.0 MHz   | 1882.5 MHz   | 1910.0 MHz    |               |
| 25 / 10M      | 1       | 0         | 23.51        | 23.70        | 23.63         | 0             | 22.30        | 22.44        | 22.40         | 1             | 21.76        | 21.95        | 21.88         | 2             |
|               | 1       | 24        | 23.54        | 23.63        | 23.64         | 0             | 22.31        | 22.43        | 22.41         | 1             | 21.77        | 21.89        | 21.87         | 2             |
|               | 1       | 49        | 23.44        | 23.63        | 23.56         | 0             | 22.27        | 22.37        | 22.33         | 1             | 21.74        | 21.84        | 21.80         | 2             |
|               | 25      | 0         | 22.53        | 22.65        | 22.63         | 1             | 21.70        | 21.83        | 21.83         | 2             | 20.58        | 20.71        | 20.71         | 3             |
|               | 25      | 12        | 22.48        | 22.58        | 22.54         | 1             | 21.68        | 21.77        | 21.78         | 2             | 20.59        | 20.73        | 20.61         | 3             |
|               | 25      | 25        | 22.34        | 22.47        | 22.47         | 1             | 21.58        | 21.77        | 21.70         | 2             | 20.51        | 20.63        | 20.59         | 3             |
|               | 50      | 0         | 22.53        | 22.67        | 22.55         | 1             | 21.36        | 21.45        | 21.46         | 2             | 20.51        | 20.61        | 20.59         | 3             |

# FCC SAR Test Report

| LTE<br>Band / BW | RB<br>Size | RB<br>Offset | QPSK                             |                                  |                                   | 3GPP<br>MPR<br>(dB) | 16QAM                            |                                  |                                   | 3GPP<br>MPR<br>(dB) | 64QAM                            |                                  |                                   | 3GPP<br>MPR<br>(dB) |
|------------------|------------|--------------|----------------------------------|----------------------------------|-----------------------------------|---------------------|----------------------------------|----------------------------------|-----------------------------------|---------------------|----------------------------------|----------------------------------|-----------------------------------|---------------------|
|                  |            |              | Low CH<br>26115<br>1857.5<br>MHz | Mid CH<br>26365<br>1882.5<br>MHz | High CH<br>26615<br>1907.5<br>MHz |                     | Low CH<br>26115<br>1857.5<br>MHz | Mid CH<br>26365<br>1882.5<br>MHz | High CH<br>26615<br>1907.5<br>MHz |                     | Low CH<br>26115<br>1857.5<br>MHz | Mid CH<br>26365<br>1882.5<br>MHz | High CH<br>26615<br>1907.5<br>MHz |                     |
|                  |            |              |                                  |                                  |                                   |                     |                                  |                                  |                                   |                     |                                  |                                  |                                   |                     |
| 25 / 15M         | 1          | 0            | 23.58                            | 23.70                            | 23.60                             | 0                   | 22.34                            | 22.51                            | 22.40                             | 1                   | 21.78                            | 21.96                            | 21.89                             | 2                   |
|                  | 1          | 37           | 23.52                            | 23.68                            | 23.59                             | 0                   | 22.30                            | 22.44                            | 22.41                             | 1                   | 21.78                            | 21.88                            | 21.84                             | 2                   |
|                  | 1          | 74           | 23.50                            | 23.66                            | 23.57                             | 0                   | 22.23                            | 22.42                            | 22.35                             | 1                   | 21.70                            | 21.83                            | 21.83                             | 2                   |
|                  | 36         | 0            | 22.50                            | 22.66                            | 22.64                             | 1                   | 21.74                            | 21.83                            | 21.84                             | 2                   | 20.63                            | 20.77                            | 20.65                             | 3                   |
|                  | 36         | 19           | 22.49                            | 22.63                            | 22.54                             | 1                   | 21.62                            | 21.81                            | 21.74                             | 2                   | 20.53                            | 20.67                            | 20.63                             | 3                   |
|                  | 36         | 39           | 22.32                            | 22.48                            | 22.47                             | 1                   | 21.63                            | 21.75                            | 21.73                             | 2                   | 20.54                            | 20.70                            | 20.61                             | 3                   |
|                  | 75         | 0            | 22.53                            | 22.65                            | 22.60                             | 1                   | 21.37                            | 21.48                            | 21.39                             | 2                   | 20.50                            | 20.59                            | 20.60                             | 3                   |

| LTE<br>Band / BW | RB<br>Size | RB<br>Offset | QPSK                             |                                  |                                   | 3GPP<br>MPR<br>(dB) | 16QAM                            |                                  |                                   | 3GPP<br>MPR<br>(dB) | 64QAM                            |                                  |                                   | 3GPP<br>MPR<br>(dB) |
|------------------|------------|--------------|----------------------------------|----------------------------------|-----------------------------------|---------------------|----------------------------------|----------------------------------|-----------------------------------|---------------------|----------------------------------|----------------------------------|-----------------------------------|---------------------|
|                  |            |              | Low CH<br>26140<br>1860.0<br>MHz | Mid CH<br>26365<br>1882.5<br>MHz | High CH<br>26590<br>1905.0<br>MHz |                     | Low CH<br>26140<br>1860.0<br>MHz | Mid CH<br>26365<br>1882.5<br>MHz | High CH<br>26590<br>1905.0<br>MHz |                     | Low CH<br>26140<br>1860.0<br>MHz | Mid CH<br>26365<br>1882.5<br>MHz | High CH<br>26590<br>1905.0<br>MHz |                     |
|                  |            |              |                                  |                                  |                                   |                     |                                  |                                  |                                   |                     |                                  |                                  |                                   |                     |
| 25 / 20M         | 1          | 0            | 23.59                            | 23.74                            | 23.68                             | 0                   | 22.37                            | 22.52                            | 22.46                             | 1                   | 21.84                            | 21.99                            | 21.93                             | 2                   |
|                  | 1          | 50           | 23.56                            | 23.71                            | 23.65                             | 0                   | 22.34                            | 22.49                            | 22.43                             | 1                   | 21.80                            | 21.95                            | 21.89                             | 2                   |
|                  | 1          | 99           | 23.52                            | 23.67                            | 23.61                             | 0                   | 22.29                            | 22.44                            | 22.38                             | 1                   | 21.76                            | 21.91                            | 21.85                             | 2                   |
|                  | 50         | 0            | 22.56                            | 22.71                            | 22.65                             | 1                   | 21.76                            | 21.91                            | 21.85                             | 2                   | 20.64                            | 20.79                            | 20.73                             | 3                   |
|                  | 50         | 25           | 22.50                            | 22.65                            | 22.59                             | 1                   | 21.70                            | 21.85                            | 21.79                             | 2                   | 20.60                            | 20.75                            | 20.69                             | 3                   |
|                  | 50         | 50           | 22.40                            | 22.55                            | 22.49                             | 1                   | 21.66                            | 21.81                            | 21.75                             | 2                   | 20.56                            | 20.71                            | 20.65                             | 3                   |
|                  | 100        | 0            | 22.54                            | 22.69                            | 22.63                             | 1                   | 21.38                            | 21.53                            | 21.47                             | 2                   | 20.52                            | 20.67                            | 20.61                             | 3                   |

| LTE<br>Band / BW | RB<br>Size | RB<br>Offset | QPSK                            |                                 |                                  | 3GPP<br>MPR<br>(dB) | 16QAM                           |                                 |                                  | 3GPP<br>MPR<br>(dB) | 64QAM                           |                                 |                                  | 3GPP<br>MPR<br>(dB) |
|------------------|------------|--------------|---------------------------------|---------------------------------|----------------------------------|---------------------|---------------------------------|---------------------------------|----------------------------------|---------------------|---------------------------------|---------------------------------|----------------------------------|---------------------|
|                  |            |              | Low CH<br>26697<br>814.7<br>MHz | Mid CH<br>26865<br>831.5<br>MHz | High CH<br>27033<br>848.3<br>MHz |                     | Low CH<br>26697<br>814.7<br>MHz | Mid CH<br>26865<br>831.5<br>MHz | High CH<br>27033<br>848.3<br>MHz |                     | Low CH<br>26697<br>814.7<br>MHz | Mid CH<br>26865<br>831.5<br>MHz | High CH<br>27033<br>848.3<br>MHz |                     |
|                  |            |              |                                 |                                 |                                  |                     |                                 |                                 |                                  |                     |                                 |                                 |                                  |                     |
| 26 / 1.4M        | 1          | 0            | 22.97                           | 23.05                           | 22.96                            | 0                   | 21.41                           | 21.43                           | 21.37                            | 1                   | 20.90                           | 20.96                           | 20.91                            | 2                   |
|                  | 1          | 2            | 23.23                           | 23.24                           | 23.20                            | 0                   | 21.38                           | 21.36                           | 21.34                            | 1                   | 20.85                           | 20.95                           | 20.84                            | 2                   |
|                  | 1          | 5            | 22.98                           | 22.97                           | 22.91                            | 0                   | 21.31                           | 21.32                           | 21.31                            | 1                   | 20.89                           | 20.87                           | 20.85                            | 2                   |
|                  | 3          | 0            | 23.09                           | 23.11                           | 23.09                            | 0                   | 22.28                           | 22.31                           | 22.23                            | 1                   | 21.19                           | 21.25                           | 21.15                            | 2                   |
|                  | 3          | 1            | 23.10                           | 23.13                           | 22.99                            | 0                   | 22.19                           | 22.30                           | 22.18                            | 1                   | 21.19                           | 21.27                           | 21.15                            | 2                   |
|                  | 3          | 3            | 23.00                           | 23.01                           | 22.95                            | 0                   | 22.19                           | 22.22                           | 22.18                            | 1                   | 21.17                           | 21.18                           | 21.17                            | 2                   |
|                  | 6          | 0            | 22.04                           | 22.03                           | 21.99                            | 1                   | 21.03                           | 21.11                           | 21.00                            | 2                   | 20.19                           | 20.22                           | 20.14                            | 3                   |

# FCC SAR Test Report

| LTE Band / BW | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) | 64QAM        |              |               | 3GPP MPR (dB) |
|---------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|               |         |           | Low CH 26705 | Mid CH 26865 | High CH 27025 |               | Low CH 26705 | Mid CH 26865 | High CH 27025 |               | Low CH 26705 | Mid CH 26865 | High CH 27025 |               |
|               |         |           | 815.5 MHz    | 831.5 MHz    | 847.5 MHz     |               | 815.5 MHz    | 831.5 MHz    | 847.5 MHz     |               | 815.5 MHz    | 831.5 MHz    | 847.5 MHz     |               |
| 26 / 3M       | 1       | 0         | 22.99        | 23.07        | 22.95         | 0             | 21.38        | 21.49        | 21.40         | 1             | 20.96        | 20.99        | 20.85         | 2             |
|               | 1       | 7         | 23.19        | 23.25        | 23.20         | 0             | 21.35        | 21.39        | 21.32         | 1             | 20.88        | 20.89        | 20.83         | 2             |
|               | 1       | 14        | 22.94        | 22.97        | 22.91         | 0             | 21.34        | 21.32        | 21.31         | 1             | 20.90        | 20.89        | 20.85         | 2             |
|               | 8       | 0         | 22.08        | 22.14        | 22.09         | 1             | 21.24        | 21.32        | 21.23         | 2             | 20.22        | 20.29        | 20.16         | 3             |
|               | 8       | 3         | 22.03        | 22.13        | 22.01         | 1             | 21.24        | 21.25        | 21.21         | 2             | 20.23        | 20.21        | 20.20         | 3             |
|               | 8       | 7         | 21.97        | 22.08        | 21.99         | 1             | 21.21        | 21.20        | 21.14         | 2             | 20.14        | 20.22        | 20.13         | 3             |
|               | 15      | 0         | 22.01        | 22.04        | 21.93         | 1             | 21.03        | 21.05        | 21.03         | 2             | 20.21        | 20.19        | 20.18         | 3             |

| LTE Band / BW | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) | 64QAM        |              |               | 3GPP MPR (dB) |
|---------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|               |         |           | Low CH 26715 | Mid CH 26865 | High CH 27015 |               | Low CH 26715 | Mid CH 26865 | High CH 27015 |               | Low CH 26715 | Mid CH 26865 | High CH 27015 |               |
|               |         |           | 816.5 MHz    | 831.5 MHz    | 846.5 MHz     |               | 816.5 MHz    | 831.5 MHz    | 846.5 MHz     |               | 816.5 MHz    | 831.5 MHz    | 846.5 MHz     |               |
| 26 / 5M       | 1       | 0         | 23.00        | 23.02        | 22.96         | 0             | 21.39        | 21.45        | 21.40         | 1             | 20.90        | 20.96        | 20.91         | 2             |
|               | 1       | 12        | 23.24        | 23.22        | 23.20         | 0             | 21.32        | 21.42        | 21.31         | 1             | 20.85        | 20.95        | 20.83         | 2             |
|               | 1       | 24        | 22.95        | 22.96        | 22.95         | 0             | 21.34        | 21.32        | 21.30         | 1             | 20.83        | 20.94        | 20.85         | 2             |
|               | 12      | 0         | 22.11        | 22.14        | 22.06         | 1             | 21.24        | 21.30        | 21.20         | 2             | 20.23        | 20.26        | 20.15         | 3             |
|               | 12      | 6         | 22.03        | 22.14        | 22.02         | 1             | 21.21        | 21.29        | 21.17         | 2             | 20.17        | 20.28        | 20.19         | 3             |
|               | 12      | 13        | 22.01        | 22.04        | 22.00         | 1             | 21.16        | 21.22        | 21.17         | 2             | 20.18        | 20.21        | 20.10         | 3             |
|               | 25      | 0         | 21.99        | 22.07        | 21.96         | 1             | 21.03        | 21.06        | 21.00         | 2             | 20.17        | 20.25        | 20.16         | 3             |

| LTE Band / BW | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) | 64QAM        |              |               | 3GPP MPR (dB) |
|---------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|               |         |           | Low CH 26740 | Mid CH 26865 | High CH 26990 |               | Low CH 26740 | Mid CH 26865 | High CH 26990 |               | Low CH 26740 | Mid CH 26865 | High CH 26990 |               |
|               |         |           | 819.0 MHz    | 831.5 MHz    | 844.0 MHz     |               | 819.0 MHz    | 831.5 MHz    | 844.0 MHz     |               | 819.0 MHz    | 831.5 MHz    | 844.0 MHz     |               |
| 26 / 10M      | 1       | 0         | 22.97        | 23.05        | 22.96         | 0             | 21.39        | 21.42        | 21.36         | 1             | 20.89        | 20.97        | 20.88         | 2             |
|               | 1       | 24        | 23.24        | 23.22        | 23.21         | 0             | 21.37        | 21.38        | 21.34         | 1             | 20.90        | 20.91        | 20.87         | 2             |
|               | 1       | 49        | 22.92        | 23.00        | 22.91         | 0             | 21.34        | 21.33        | 21.27         | 1             | 20.89        | 20.88        | 20.82         | 2             |
|               | 25      | 0         | 22.12        | 22.13        | 22.09         | 1             | 21.26        | 21.28        | 21.26         | 2             | 20.21        | 20.23        | 20.21         | 3             |
|               | 25      | 12        | 22.09        | 22.08        | 22.02         | 1             | 21.25        | 21.23        | 21.22         | 2             | 20.24        | 20.27        | 20.13         | 3             |
|               | 25      | 25        | 21.99        | 22.01        | 21.99         | 1             | 21.15        | 21.23        | 21.14         | 2             | 20.17        | 20.18        | 20.12         | 3             |
|               | 50      | 0         | 22.04        | 22.07        | 21.93         | 1             | 21.07        | 21.05        | 21.04         | 2             | 20.22        | 20.21        | 20.17         | 3             |

| LTE Band / BW | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) | 64QAM        |              |               | 3GPP MPR (dB) |
|---------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|               |         |           | Low CH 26765 | Mid CH 26865 | High CH 26965 |               | Low CH 26765 | Mid CH 26865 | High CH 26965 |               | Low CH 26765 | Mid CH 26865 | High CH 26965 |               |
|               |         |           | 821.5 MHz    | 831.5 MHz    | 841.5 MHz     |               | 821.5 MHz    | 831.5 MHz    | 841.5 MHz     |               | 821.5 MHz    | 831.5 MHz    | 841.5 MHz     |               |
| 26 / 15M      | 1       | 0         | 23.05        | 23.09        | 23.01         | 0             | 21.46        | 21.50        | 21.42         | 1             | 20.97        | 21.01        | 20.93         | 2             |
|               | 1       | 37        | 23.26        | <b>23.30</b> | 23.22         | 0             | 21.40        | 21.44        | 21.36         | 1             | 20.93        | 20.97        | 20.89         | 2             |
|               | 1       | 74        | 23.00        | 23.04        | 22.96         | 0             | 21.36        | 21.40        | 21.32         | 1             | 20.91        | 20.95        | 20.87         | 2             |
|               | 36      | 0         | 22.15        | 22.19        | 22.11         | 1             | 21.32        | 21.36        | 21.28         | 2             | 20.27        | 20.31        | 20.23         | 3             |
|               | 36      | 19        | 22.11        | 22.15        | 22.07         | 1             | 21.27        | 21.31        | 21.23         | 2             | 20.25        | 20.29        | 20.21         | 3             |
|               | 36      | 39        | 22.05        | 22.09        | 22.01         | 1             | 21.23        | 21.27        | 21.19         | 2             | 20.22        | 20.26        | 20.18         | 3             |
|               | 75      | 0         | 22.05        | 22.09        | 22.01         | 1             | 21.09        | 21.13        | 21.05         | 2             | 20.23        | 20.27        | 20.19         | 3             |

# FCC SAR Test Report

| LTE<br>Band / BW | RB<br>Size | RB<br>Offset | QPSK            |                 |                  | 3GPP<br>MPR<br>(dB) | 16QAM           |                 |                  | 3GPP<br>MPR<br>(dB) | 64QAM           |                 |                  | 3GPP<br>MPR<br>(dB) |
|------------------|------------|--------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|
|                  |            |              | Low CH<br>37775 | Mid CH<br>38000 | High CH<br>38225 |                     | Low CH<br>37775 | Mid CH<br>38000 | High CH<br>38225 |                     | Low CH<br>37775 | Mid CH<br>38000 | High CH<br>38225 |                     |
|                  |            |              | 2572.5<br>MHz   | 2595.0<br>MHz   | 2617.5<br>MHz    |                     | 2572.5<br>MHz   | 2595.0<br>MHz   | 2617.5<br>MHz    |                     | 2572.5<br>MHz   | 2595.0<br>MHz   | 2617.5<br>MHz    |                     |
| 38 / 5M          | 1          | 0            | 23.13           | 22.98           | 22.91            | 0                   | 21.89           | 21.78           | 21.72            | 1                   | 20.95           | 20.84           | 20.78            | 2                   |
|                  | 1          | 12           | 23.29           | 23.10           | 23.07            | 0                   | 22.03           | 21.96           | 21.84            | 1                   | 21.48           | 21.41           | 21.28            | 2                   |
|                  | 1          | 24           | 23.14           | 22.98           | 22.96            | 0                   | 22.22           | 22.03           | 22.00            | 1                   | 21.23           | 21.17           | 21.07            | 2                   |
|                  | 12         | 0            | 22.50           | 22.36           | 22.27            | 1                   | 21.33           | 21.22           | 21.11            | 2                   | 20.85           | 20.71           | 20.59            | 3                   |
|                  | 12         | 6            | 22.59           | 22.53           | 22.40            | 1                   | 21.48           | 21.39           | 21.26            | 2                   | 20.99           | 20.93           | 20.83            | 3                   |
|                  | 12         | 13           | 22.38           | 22.24           | 22.19            | 1                   | 21.03           | 20.92           | 20.86            | 2                   | 20.58           | 20.44           | 20.32            | 3                   |
|                  | 25         | 0            | 22.44           | 22.35           | 22.23            | 1                   | 21.31           | 21.17           | 21.10            | 2                   | 20.85           | 20.76           | 20.66            | 3                   |

| LTE<br>Band / BW | RB<br>Size | RB<br>Offset | QPSK            |                 |                  | 3GPP<br>MPR<br>(dB) | 16QAM           |                 |                  | 3GPP<br>MPR<br>(dB) | 64QAM           |                 |                  | 3GPP<br>MPR<br>(dB) |
|------------------|------------|--------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|
|                  |            |              | Low CH<br>37800 | Mid CH<br>38000 | High CH<br>38200 |                     | Low CH<br>37800 | Mid CH<br>38000 | High CH<br>38200 |                     | Low CH<br>37800 | Mid CH<br>38000 | High CH<br>38200 |                     |
|                  |            |              | 2575.0<br>MHz   | 2595.0<br>MHz   | 2615.0<br>MHz    |                     | 2575.0<br>MHz   | 2595.0<br>MHz   | 2615.0<br>MHz    |                     | 2575.0<br>MHz   | 2595.0<br>MHz   | 2615.0<br>MHz    |                     |
| 38 / 10M         | 1          | 0            | 23.10           | 23.01           | 22.91            | 0                   | 21.89           | 21.75           | 21.68            | 1                   | 20.94           | 20.85           | 20.75            | 2                   |
|                  | 1          | 24           | 23.29           | 23.10           | 23.08            | 0                   | 22.08           | 21.92           | 21.87            | 1                   | 21.53           | 21.37           | 21.32            | 2                   |
|                  | 1          | 49           | 23.11           | 23.02           | 22.92            | 0                   | 22.22           | 22.04           | 21.97            | 1                   | 21.29           | 21.11           | 21.04            | 2                   |
|                  | 25         | 0            | 22.51           | 22.35           | 22.30            | 1                   | 21.35           | 21.20           | 21.17            | 2                   | 20.83           | 20.68           | 20.65            | 3                   |
|                  | 25         | 12           | 22.65           | 22.47           | 22.40            | 1                   | 21.52           | 21.33           | 21.31            | 2                   | 21.06           | 20.92           | 20.77            | 3                   |
|                  | 25         | 25           | 22.36           | 22.21           | 22.18            | 1                   | 21.02           | 20.93           | 20.83            | 2                   | 20.57           | 20.41           | 20.34            | 3                   |
|                  | 50         | 0            | 22.49           | 22.35           | 22.20            | 1                   | 21.35           | 21.16           | 21.14            | 2                   | 20.90           | 20.72           | 20.67            | 3                   |

| LTE<br>Band / BW | RB<br>Size | RB<br>Offset | QPSK            |                 |                  | 3GPP<br>MPR<br>(dB) | 16QAM           |                 |                  | 3GPP<br>MPR<br>(dB) | 64QAM           |                 |                  | 3GPP<br>MPR<br>(dB) |
|------------------|------------|--------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|
|                  |            |              | Low CH<br>37825 | Mid CH<br>38000 | High CH<br>38175 |                     | Low CH<br>37825 | Mid CH<br>38000 | High CH<br>38175 |                     | Low CH<br>37825 | Mid CH<br>38000 | High CH<br>38175 |                     |
|                  |            |              | 2577.5<br>MHz   | 2595.0<br>MHz   | 2612.5<br>MHz    |                     | 2577.5<br>MHz   | 2595.0<br>MHz   | 2612.5<br>MHz    |                     | 2577.5<br>MHz   | 2595.0<br>MHz   | 2612.5<br>MHz    |                     |
| 38 / 15M         | 1          | 0            | 23.17           | 23.01           | 22.88            | 0                   | 21.93           | 21.82           | 21.68            | 1                   | 20.96           | 20.86           | 20.76            | 2                   |
|                  | 1          | 37           | 23.27           | 23.15           | 23.03            | 0                   | 22.07           | 21.93           | 21.87            | 1                   | 21.54           | 21.36           | 21.29            | 2                   |
|                  | 1          | 74           | 23.17           | 23.05           | 22.93            | 0                   | 22.18           | 22.09           | 21.99            | 1                   | 21.25           | 21.10           | 21.07            | 2                   |
|                  | 36         | 0            | 22.48           | 22.36           | 22.31            | 1                   | 21.39           | 21.20           | 21.18            | 2                   | 20.88           | 20.74           | 20.59            | 3                   |
|                  | 36         | 19           | 22.66           | 22.52           | 22.40            | 1                   | 21.46           | 21.37           | 21.27            | 2                   | 21.00           | 20.86           | 20.79            | 3                   |
|                  | 36         | 39           | 22.34           | 22.22           | 22.18            | 1                   | 21.07           | 20.91           | 20.86            | 2                   | 20.60           | 20.48           | 20.36            | 3                   |
|                  | 75         | 0            | 22.49           | 22.33           | 22.25            | 1                   | 21.36           | 21.19           | 21.07            | 2                   | 20.89           | 20.70           | 20.68            | 3                   |

| LTE<br>Band / BW | RB<br>Size | RB<br>Offset | QPSK            |                 |                  | 3GPP<br>MPR<br>(dB) | 16QAM           |                 |                  | 3GPP<br>MPR<br>(dB) | 64QAM           |                 |                  | 3GPP<br>MPR<br>(dB) |
|------------------|------------|--------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|-----------------|-----------------|------------------|---------------------|
|                  |            |              | Low CH<br>37850 | Mid CH<br>38000 | High CH<br>38150 |                     | Low CH<br>37850 | Mid CH<br>38000 | High CH<br>38150 |                     | Low CH<br>37850 | Mid CH<br>38000 | High CH<br>38150 |                     |
|                  |            |              | 2580.0<br>MHz   | 2595.0<br>MHz   | 2610.0<br>MHz    |                     | 2580.0<br>MHz   | 2595.0<br>MHz   | 2610.0<br>MHz    |                     | 2580.0<br>MHz   | 2595.0<br>MHz   | 2610.0<br>MHz    |                     |
| 38 / 20M         | 1          | 0            | 23.18           | 23.05           | 22.96            | 0                   | 21.96           | 21.83           | 21.74            | 1                   | 21.02           | 20.89           | 20.80            | 2                   |
|                  | 1          | 50           | 23.31           | 23.18           | 23.09            | 0                   | 22.11           | 21.98           | 21.89            | 1                   | 21.56           | 21.43           | 21.34            | 2                   |
|                  | 1          | 99           | 23.19           | 23.06           | 22.97            | 0                   | 22.24           | 22.11           | 22.02            | 1                   | 21.31           | 21.18           | 21.09            | 2                   |
|                  | 50         | 0            | 22.54           | 22.41           | 22.32            | 1                   | 21.41           | 21.28           | 21.19            | 2                   | 20.89           | 20.76           | 20.67            | 3                   |
|                  | 50         | 25           | 22.67           | 22.54           | 22.45            | 1                   | 21.54           | 21.41           | 21.32            | 2                   | 21.07           | 20.94           | 20.85            | 3                   |
|                  | 50         | 50           | 22.42           | 22.29           | 22.20            | 1                   | 21.10           | 20.97           | 20.88            | 2                   | 20.62           | 20.49           | 20.40            | 3                   |
|                  | 100        | 0            | 22.50           | 22.37           | 22.28            | 1                   | 21.37           | 21.24           | 21.15            | 2                   | 20.91           | 20.78           | 20.69            | 3                   |



# FCC SAR Test Report

| LTE<br>Band /<br>BW         | RB<br>Size | RB<br>Offset | QPSK          |               |               |               |               | 3GPP<br>MPR<br><br>(dB) | 16QAM         |               |               |               |               | 3GPP<br>MPR<br><br>(dB) |
|-----------------------------|------------|--------------|---------------|---------------|---------------|---------------|---------------|-------------------------|---------------|---------------|---------------|---------------|---------------|-------------------------|
|                             |            |              | L-CH<br>39675 | M-CH<br>40148 | M-CH<br>40620 | M-CH<br>41093 | H-CH<br>41565 |                         | L-CH<br>39675 | M-CH<br>40148 | M-CH<br>40620 | M-CH<br>41093 | H-CH<br>41565 |                         |
|                             |            |              | 2498.5<br>MHz | 2545.8<br>MHz | 2593.0<br>MHz | 2640.3<br>MHz | 2687.5<br>MHz |                         | 2498.5<br>MHz | 2545.8<br>MHz | 2593.0<br>MHz | 2640.3<br>MHz | 2687.5<br>MHz |                         |
| EUT without Power Reduction |            |              |               |               |               |               |               |                         |               |               |               |               |               |                         |
| 41 /<br>5M                  | 1          | 0            | 25.94         | 25.92         | 25.86         | 25.66         | 26.00         | 0                       | 24.56         | 24.54         | 24.48         | 24.28         | 24.62         | 1                       |
|                             | 1          | 12           | 26.15         | 26.13         | 26.07         | 25.87         | 26.21         | 0                       | 24.79         | 24.77         | 24.71         | 24.51         | 24.85         | 1                       |
|                             | 1          | 24           | 25.56         | 25.54         | 25.48         | 25.28         | 25.62         | 0                       | 24.50         | 24.48         | 24.42         | 24.22         | 24.56         | 1                       |
|                             | 12         | 0            | 25.07         | 25.05         | 24.99         | 24.79         | 25.13         | 1                       | 23.80         | 23.78         | 23.72         | 23.52         | 23.86         | 2                       |
|                             | 12         | 6            | 25.13         | 25.11         | 25.05         | 24.85         | 25.19         | 1                       | 23.87         | 23.85         | 23.79         | 23.59         | 23.93         | 2                       |
|                             | 12         | 13           | 25.23         | 25.21         | 25.15         | 24.95         | 25.29         | 1                       | 23.73         | 23.71         | 23.65         | 23.45         | 23.79         | 2                       |
|                             | 25         | 0            | 25.10         | 25.08         | 25.02         | 24.82         | 25.16         | 1                       | 23.83         | 23.81         | 23.75         | 23.55         | 23.89         | 2                       |
| EUT with Power Reduction    |            |              |               |               |               |               |               |                         |               |               |               |               |               |                         |
| 41 /<br>5M                  | 1          | 0            | 23.56         | 23.68         | 24.05         | 23.74         | 23.59         | 0                       | 22.13         | 22.25         | 22.62         | 22.31         | 22.16         | 1                       |
|                             | 1          | 12           | 23.95         | 24.07         | 24.44         | 24.13         | 23.98         | 0                       | 22.09         | 22.21         | 22.58         | 22.27         | 22.12         | 1                       |
|                             | 1          | 24           | 23.51         | 23.63         | 24.00         | 23.69         | 23.54         | 0                       | 22.03         | 22.15         | 22.52         | 22.21         | 22.06         | 1                       |
|                             | 12         | 0            | 22.84         | 22.96         | 23.33         | 23.02         | 22.87         | 1                       | 21.97         | 22.09         | 22.46         | 22.15         | 22.00         | 2                       |
|                             | 12         | 6            | 22.81         | 22.93         | 23.30         | 22.99         | 22.84         | 1                       | 21.94         | 22.06         | 22.43         | 22.12         | 21.97         | 2                       |
|                             | 12         | 13           | 22.54         | 22.66         | 23.03         | 22.72         | 22.57         | 1                       | 21.89         | 22.01         | 22.38         | 22.07         | 21.92         | 2                       |
|                             | 25         | 0            | 22.76         | 22.88         | 23.25         | 22.94         | 22.79         | 1                       | 21.81         | 21.93         | 22.30         | 21.99         | 21.84         | 2                       |

| LTE<br>Band /<br>BW         | RB<br>Size | RB<br>Offset | 64QAM         |               |               |               |               | 3GPP<br>MPR<br>(dB) |
|-----------------------------|------------|--------------|---------------|---------------|---------------|---------------|---------------|---------------------|
|                             |            |              | L-CH<br>39675 | M-CH<br>40148 | M-CH<br>40620 | M-CH<br>41093 | H-CH<br>41565 |                     |
|                             |            |              | 2498.5<br>MHz | 2545.8<br>MHz | 2593.0<br>MHz | 2640.3<br>MHz | 2687.5<br>MHz |                     |
| EUT without Power Reduction |            |              |               |               |               |               |               |                     |
| 41 /<br>5M                  | 1          | 0            | 23.48         | 23.46         | 23.40         | 23.20         | 23.54         | 2                   |
|                             | 1          | 12           | 24.15         | 24.13         | 24.07         | 23.87         | 24.21         | 2                   |
|                             | 1          | 24           | 23.44         | 23.42         | 23.36         | 23.16         | 23.50         | 2                   |
|                             | 12         | 0            | 23.20         | 23.18         | 23.12         | 22.92         | 23.26         | 3                   |
|                             | 12         | 6            | 23.28         | 23.30         | 23.24         | 23.04         | 23.34         | 3                   |
|                             | 12         | 13           | 23.17         | 23.15         | 23.09         | 22.89         | 23.23         | 3                   |
| 25                          | 0          | 23.28        | 23.26         | 23.20         | 23.00         | 23.34         | 3             |                     |
| EUT with Power Reduction    |            |              |               |               |               |               |               |                     |
| 41 /<br>5M                  | 1          | 0            | 21.99         | 22.11         | 22.48         | 22.17         | 22.02         | 2                   |
|                             | 1          | 12           | 21.95         | 22.07         | 22.44         | 22.13         | 21.98         | 2                   |
|                             | 1          | 24           | 21.93         | 22.05         | 22.42         | 22.11         | 21.96         | 2                   |
|                             | 12         | 0            | 21.57         | 21.69         | 22.06         | 21.75         | 21.60         | 3                   |
|                             | 12         | 6            | 21.55         | 21.67         | 22.04         | 21.73         | 21.58         | 3                   |
|                             | 12         | 13           | 21.51         | 21.63         | 22.00         | 21.69         | 21.54         | 3                   |
|                             | 25         | 0            | 21.57         | 21.69         | 22.06         | 21.75         | 21.60         | 3                   |

# FCC SAR Test Report

| LTE<br>Band /<br>BW         | RB<br>Size | RB<br>Offset | QPSK          |               |               |               |               | 3GPP<br>MPR<br><br>(dB) | 16QAM         |               |               |               |               | 3GPP<br>MPR<br><br>(dB) |
|-----------------------------|------------|--------------|---------------|---------------|---------------|---------------|---------------|-------------------------|---------------|---------------|---------------|---------------|---------------|-------------------------|
|                             |            |              | L-CH          | M-CH          | M-CH          | M-CH          | H-CH          |                         | L-CH          | M-CH          | M-CH          | M-CH          | H-CH          |                         |
|                             |            |              | 39700         | 40160         | 40620         | 41080         | 41540         |                         | 39700         | 40160         | 40620         | 41080         | 41540         |                         |
|                             |            |              | 2501.0<br>MHz | 2547.0<br>MHz | 2593.0<br>MHz | 2639.0<br>MHz | 2685.0<br>MHz |                         | 2501.0<br>MHz | 2547.0<br>MHz | 2593.0<br>MHz | 2639.0<br>MHz | 2685.0<br>MHz |                         |
| EUT without Power Reduction |            |              |               |               |               |               |               |                         |               |               |               |               |               |                         |
| 41 /<br>10M                 | 1          | 0            | 25.97         | 25.95         | 25.89         | 25.69         | 26.03         | 0                       | 24.59         | 24.57         | 24.51         | 24.31         | 24.65         | 1                       |
|                             | 1          | 24           | 26.18         | 26.16         | 26.10         | 25.90         | 26.24         | 0                       | 24.82         | 24.80         | 24.74         | 24.54         | 24.88         | 1                       |
|                             | 1          | 49           | 25.59         | 25.57         | 25.51         | 25.31         | 25.65         | 0                       | 24.53         | 24.51         | 24.45         | 24.25         | 24.59         | 1                       |
|                             | 25         | 0            | 25.10         | 25.08         | 25.02         | 24.82         | 25.16         | 1                       | 23.83         | 23.81         | 23.75         | 23.55         | 23.89         | 2                       |
|                             | 25         | 12           | 25.16         | 25.14         | 25.08         | 24.88         | 25.22         | 1                       | 23.90         | 23.88         | 23.82         | 23.62         | 23.96         | 2                       |
|                             | 25         | 25           | 25.26         | 25.24         | 25.18         | 24.98         | 25.32         | 1                       | 23.76         | 23.74         | 23.68         | 23.48         | 23.82         | 2                       |
|                             | 50         | 0            | 25.13         | 25.11         | 25.05         | 24.85         | 25.19         | 1                       | 23.86         | 23.84         | 23.78         | 23.58         | 23.92         | 2                       |
| EUT with Power Reduction    |            |              |               |               |               |               |               |                         |               |               |               |               |               |                         |
| 41 /<br>10M                 | 1          | 0            | 23.59         | 23.71         | 24.08         | 23.77         | 23.62         | 0                       | 22.16         | 22.28         | 22.65         | 22.34         | 22.19         | 1                       |
|                             | 1          | 24           | 23.98         | 24.10         | 24.47         | 24.16         | 24.01         | 0                       | 22.12         | 22.24         | 22.61         | 22.30         | 22.15         | 1                       |
|                             | 1          | 49           | 23.54         | 23.66         | 24.03         | 23.72         | 23.57         | 0                       | 22.06         | 22.18         | 22.55         | 22.24         | 22.09         | 1                       |
|                             | 25         | 0            | 22.87         | 22.99         | 23.36         | 23.05         | 22.90         | 1                       | 22.00         | 22.12         | 22.49         | 22.18         | 22.03         | 2                       |
|                             | 25         | 12           | 22.84         | 22.96         | 23.33         | 23.02         | 22.87         | 1                       | 21.97         | 22.09         | 22.46         | 22.15         | 22.00         | 2                       |
|                             | 25         | 25           | 22.57         | 22.69         | 23.06         | 22.75         | 22.60         | 1                       | 21.92         | 22.04         | 22.41         | 22.10         | 21.95         | 2                       |
|                             | 50         | 0            | 22.79         | 22.91         | 23.28         | 22.97         | 22.82         | 1                       | 21.84         | 21.96         | 22.33         | 22.02         | 21.87         | 2                       |

| LTE Band / BW               | RB Size | RB Offset | 64QAM      |            |            |            |            | 3GPP MPR (dB) |
|-----------------------------|---------|-----------|------------|------------|------------|------------|------------|---------------|
|                             |         |           | L-CH 39700 | M-CH 40160 | M-CH 40620 | M-CH 41080 | H-CH 41540 |               |
|                             |         |           | 2501.0 MHz | 2547.0 MHz | 2593.0 MHz | 2639.0 MHz | 2685.0 MHz |               |
| EUT without Power Reduction |         |           |            |            |            |            |            |               |
| 41 / 10M                    | 1       | 0         | 23.53      | 23.51      | 23.45      | 23.25      | 23.59      | 2             |
|                             | 1       | 24        | 24.20      | 24.18      | 24.12      | 23.92      | 24.26      | 2             |
|                             | 1       | 49        | 23.49      | 23.47      | 23.41      | 23.21      | 23.55      | 2             |
|                             | 25      | 0         | 23.25      | 23.23      | 23.17      | 22.97      | 23.31      | 3             |
|                             | 25      | 12        | 23.33      | 23.35      | 23.29      | 23.09      | 23.39      | 3             |
|                             | 25      | 25        | 23.22      | 23.20      | 23.14      | 22.94      | 23.28      | 3             |
|                             | 50      | 0         | 23.33      | 23.31      | 23.25      | 23.05      | 23.39      | 3             |
| EUT with Power Reduction    |         |           |            |            |            |            |            |               |
| 41 / 10M                    | 1       | 0         | 22.04      | 22.16      | 22.53      | 22.22      | 22.07      | 2             |
|                             | 1       | 24        | 22.00      | 22.12      | 22.49      | 22.18      | 22.03      | 2             |
|                             | 1       | 49        | 21.98      | 22.10      | 22.47      | 22.16      | 22.01      | 2             |
|                             | 25      | 0         | 21.62      | 21.74      | 22.11      | 21.80      | 21.65      | 3             |
|                             | 25      | 12        | 21.60      | 21.72      | 22.09      | 21.78      | 21.63      | 3             |
|                             | 25      | 25        | 21.56      | 21.68      | 22.05      | 21.74      | 21.59      | 3             |
|                             | 50      | 0         | 21.62      | 21.74      | 22.11      | 21.80      | 21.65      | 3             |

# FCC SAR Test Report

| LTE<br>Band /<br>BW         | RB<br>Size | RB<br>Offset | QPSK          |               |               |               |               | 3GPP<br>MPR<br><br>(dB) | 16QAM         |               |               |               |               | 3GPP<br>MPR<br><br>(dB) |
|-----------------------------|------------|--------------|---------------|---------------|---------------|---------------|---------------|-------------------------|---------------|---------------|---------------|---------------|---------------|-------------------------|
|                             |            |              | L-CH<br>39725 | M-CH<br>40173 | M-CH<br>40620 | M-CH<br>41068 | H-CH<br>41515 |                         | L-CH<br>39725 | M-CH<br>40173 | M-CH<br>40620 | M-CH<br>41068 | H-CH<br>41515 |                         |
|                             |            |              | 2503.5<br>MHz | 2548.3<br>MHz | 2593.0<br>MHz | 2637.8<br>MHz | 2682.5<br>MHz |                         | 2503.5<br>MHz | 2548.3<br>MHz | 2593.0<br>MHz | 2637.8<br>MHz | 2682.5<br>MHz |                         |
| EUT without Power Reduction |            |              |               |               |               |               |               |                         |               |               |               |               |               |                         |
| 41 /<br>15M                 | 1          | 0            | 26.01         | 25.99         | 25.93         | 25.73         | 26.07         | 0                       | 24.63         | 24.61         | 24.55         | 24.35         | 24.69         | 1                       |
|                             | 1          | 37           | 26.22         | 26.20         | 26.14         | 25.94         | 26.28         | 0                       | 24.86         | 24.84         | 24.78         | 24.58         | 24.92         | 1                       |
|                             | 1          | 74           | 25.63         | 25.61         | 25.55         | 25.35         | 25.69         | 0                       | 24.57         | 24.55         | 24.49         | 24.29         | 24.63         | 1                       |
|                             | 36         | 0            | 25.14         | 25.12         | 25.06         | 24.86         | 25.20         | 1                       | 23.87         | 23.85         | 23.79         | 23.59         | 23.93         | 2                       |
|                             | 36         | 19           | 25.20         | 25.18         | 25.12         | 24.92         | 25.26         | 1                       | 23.94         | 23.92         | 23.86         | 23.66         | 24.00         | 2                       |
|                             | 36         | 39           | 25.30         | 25.28         | 25.22         | 25.02         | 25.36         | 1                       | 23.80         | 23.78         | 23.72         | 23.52         | 23.86         | 2                       |
| 75                          | 0          | 25.17        | 25.15         | 25.09         | 24.89         | 25.23         | 1             | 23.90                   | 23.88         | 23.82         | 23.62         | 23.96         | 2             |                         |
| EUT with Power Reduction    |            |              |               |               |               |               |               |                         |               |               |               |               |               |                         |
| 41 /<br>15M                 | 1          | 0            | 23.63         | 23.75         | 24.12         | 23.81         | 23.66         | 0                       | 22.20         | 22.32         | 22.69         | 22.38         | 22.23         | 1                       |
|                             | 1          | 37           | 24.02         | 24.14         | 24.51         | 24.20         | 24.05         | 0                       | 22.16         | 22.28         | 22.65         | 22.34         | 22.19         | 1                       |
|                             | 1          | 74           | 23.58         | 23.70         | 24.07         | 23.76         | 23.61         | 0                       | 22.10         | 22.22         | 22.59         | 22.28         | 22.13         | 1                       |
|                             | 36         | 0            | 22.91         | 23.03         | 23.40         | 23.09         | 22.94         | 1                       | 22.04         | 22.16         | 22.53         | 22.22         | 22.07         | 2                       |
|                             | 36         | 19           | 22.88         | 23.00         | 23.37         | 23.06         | 22.91         | 1                       | 22.01         | 22.13         | 22.50         | 22.19         | 22.04         | 2                       |
|                             | 36         | 39           | 22.61         | 22.73         | 23.10         | 22.79         | 22.64         | 1                       | 21.96         | 22.08         | 22.45         | 22.14         | 21.99         | 2                       |
| 75                          | 0          | 22.83        | 22.95         | 23.32         | 23.01         | 22.86         | 1             | 21.88                   | 22.00         | 22.37         | 22.06         | 21.91         | 2             |                         |

| LTE<br>Band /<br>BW         | RB<br>Size | RB<br>Offset | 64QAM         |               |               |               |               | 3GPP<br>MPR<br>(dB) |
|-----------------------------|------------|--------------|---------------|---------------|---------------|---------------|---------------|---------------------|
|                             |            |              | L-CH<br>39725 | M-CH<br>40173 | M-CH<br>40620 | M-CH<br>41068 | H-CH<br>41515 |                     |
|                             |            |              | 2503.5<br>MHz | 2548.3<br>MHz | 2593.0<br>MHz | 2637.8<br>MHz | 2682.5<br>MHz |                     |
| EUT without Power Reduction |            |              |               |               |               |               |               |                     |
| 41 /<br>15M                 | 1          | 0            | 23.58         | 23.56         | 23.50         | 23.30         | 23.64         | 2                   |
|                             | 1          | 37           | 24.25         | 24.23         | 24.17         | 23.97         | 24.31         | 2                   |
|                             | 1          | 74           | 23.54         | 23.52         | 23.46         | 23.26         | 23.60         | 2                   |
|                             | 36         | 0            | 23.30         | 23.28         | 23.22         | 23.02         | 23.36         | 3                   |
|                             | 36         | 19           | 23.38         | 23.40         | 23.34         | 23.14         | 23.44         | 3                   |
|                             | 36         | 39           | 23.27         | 23.25         | 23.19         | 22.99         | 23.33         | 3                   |
| 75                          | 0          | 23.38        | 23.36         | 23.30         | 23.10         | 23.44         | 3             |                     |
| EUT with Power Reduction    |            |              |               |               |               |               |               |                     |
| 41 /<br>15M                 | 1          | 0            | 22.09         | 22.21         | 22.58         | 22.27         | 22.12         | 2                   |
|                             | 1          | 37           | 22.05         | 22.17         | 22.54         | 22.23         | 22.08         | 2                   |
|                             | 1          | 74           | 22.03         | 22.15         | 22.52         | 22.21         | 22.06         | 2                   |
|                             | 36         | 0            | 21.67         | 21.79         | 22.16         | 21.85         | 21.70         | 3                   |
|                             | 36         | 19           | 21.65         | 21.77         | 22.14         | 21.83         | 21.68         | 3                   |
|                             | 36         | 39           | 21.61         | 21.73         | 22.10         | 21.79         | 21.64         | 3                   |
| 75                          | 0          | 21.67        | 21.79         | 22.16         | 21.85         | 21.70         | 3             |                     |

# FCC SAR Test Report

| LTE<br>Band /<br>BW         | RB<br>Size | RB<br>Offset | QPSK          |               |               |               |               | 3GPP<br>MPR<br>(dB) | 16QAM         |               |               |               |               | 3GPP<br>MPR<br>(dB) |
|-----------------------------|------------|--------------|---------------|---------------|---------------|---------------|---------------|---------------------|---------------|---------------|---------------|---------------|---------------|---------------------|
|                             |            |              | L-CH<br>39750 | M-CH<br>40185 | M-CH<br>40620 | M-CH<br>41055 | H-CH<br>41490 |                     | L-CH<br>39750 | M-CH<br>40185 | M-CH<br>40620 | M-CH<br>41055 | H-CH<br>41490 |                     |
|                             |            |              | 2506.0<br>MHz | 2549.5<br>MHz | 2593.0<br>MHz | 2636.5<br>MHz | 2680.0<br>MHz |                     | 2506.0<br>MHz | 2549.5<br>MHz | 2593.0<br>MHz | 2636.5<br>MHz | 2680.0<br>MHz |                     |
| EUT without Power Reduction |            |              |               |               |               |               |               |                     |               |               |               |               |               |                     |
| 41 /<br>20M                 | 1          | 0            | 26.07         | 26.05         | 25.99         | 25.79         | 26.13         | 0                   | 24.69         | 24.67         | 24.61         | 24.41         | 24.75         | 1                   |
|                             | 1          | 50           | 26.28         | 26.26         | 26.20         | 26.00         | <b>26.34</b>  | 0                   | 24.92         | 24.90         | 24.84         | 24.64         | 24.98         | 1                   |
|                             | 1          | 99           | 25.69         | 25.67         | 25.61         | 25.41         | 25.75         | 0                   | 24.63         | 24.61         | 24.55         | 24.35         | 24.69         | 1                   |
|                             | 50         | 0            | 25.20         | 25.18         | 25.12         | 24.92         | 25.26         | 1                   | 23.93         | 23.91         | 23.85         | 23.65         | 23.99         | 2                   |
|                             | 50         | 25           | 25.26         | 25.24         | 25.18         | 24.98         | 25.32         | 1                   | 24.00         | 23.98         | 23.92         | 23.72         | 24.06         | 2                   |
|                             | 50         | 50           | 25.36         | 25.34         | 25.28         | 25.08         | 25.42         | 1                   | 23.86         | 23.84         | 23.78         | 23.58         | 23.92         | 2                   |
| 100                         | 0          | 25.23        | 25.21         | 25.15         | 24.95         | 25.29         | 1             | 23.96               | 23.94         | 23.88         | 23.68         | 24.02         | 2             |                     |
| EUT with Power Reduction    |            |              |               |               |               |               |               |                     |               |               |               |               |               |                     |
| 41 /<br>20M                 | 1          | 0            | 23.69         | 23.81         | 24.18         | 23.87         | 23.72         | 0                   | 22.26         | 22.38         | 22.75         | 22.44         | 22.29         | 2                   |
|                             | 1          | 50           | 24.08         | 24.20         | <b>24.57</b>  | 24.26         | 24.11         | 0                   | 22.22         | 22.34         | 22.71         | 22.40         | 22.25         | 2                   |
|                             | 1          | 99           | 23.64         | 23.76         | 24.13         | 23.82         | 23.67         | 0                   | 22.16         | 22.28         | 22.65         | 22.34         | 22.19         | 2                   |
|                             | 50         | 0            | 22.97         | 23.09         | 23.46         | 23.15         | 23.00         | 1                   | 22.10         | 22.22         | 22.59         | 22.28         | 22.13         | 2                   |
|                             | 50         | 25           | 22.94         | 23.06         | 23.43         | 23.12         | 22.97         | 1                   | 22.07         | 22.19         | 22.56         | 22.25         | 22.10         | 2                   |
|                             | 50         | 50           | 22.67         | 22.79         | 23.16         | 22.85         | 22.70         | 1                   | 22.02         | 22.14         | 22.51         | 22.20         | 22.05         | 2                   |
| 100                         | 0          | 22.89        | 23.01         | 23.38         | 23.07         | 22.92         | 1             | 21.94               | 22.06         | 22.43         | 22.12         | 21.97         | 2             |                     |

| LTE<br>Band /<br>BW         | RB<br>Size | RB<br>Offset | 64QAM         |               |               |               |               | 3GPP<br>MPR<br>(dB) |
|-----------------------------|------------|--------------|---------------|---------------|---------------|---------------|---------------|---------------------|
|                             |            |              | L-CH<br>39750 | M-CH<br>40185 | M-CH<br>40620 | M-CH<br>41055 | H-CH<br>41490 |                     |
|                             |            |              | 2506.0<br>MHz | 2549.5<br>MHz | 2593.0<br>MHz | 2636.5<br>MHz | 2680.0<br>MHz |                     |
| EUT without Power Reduction |            |              |               |               |               |               |               |                     |
| 41 /<br>20M                 | 1          | 0            | 23.63         | 23.61         | 23.55         | 23.35         | 23.69         | 2                   |
|                             | 1          | 50           | 24.30         | 24.28         | 24.22         | 24.02         | 24.36         | 2                   |
|                             | 1          | 99           | 23.59         | 23.57         | 23.51         | 23.31         | 23.65         | 2                   |
|                             | 50         | 0            | 23.35         | 23.33         | 23.27         | 23.07         | 23.41         | 3                   |
|                             | 50         | 25           | 23.43         | 23.45         | 23.39         | 23.19         | 23.49         | 3                   |
|                             | 50         | 50           | 23.32         | 23.30         | 23.24         | 23.04         | 23.38         | 3                   |
|                             | 100        | 0            | 23.43         | 23.41         | 23.35         | 23.15         | 23.49         | 3                   |
| EUT with Power Reduction    |            |              |               |               |               |               |               |                     |
| 41 /<br>20M                 | 1          | 0            | 22.14         | 22.26         | 22.63         | 22.32         | 22.17         | 2                   |
|                             | 1          | 50           | 22.10         | 22.22         | 22.59         | 22.28         | 22.13         | 2                   |
|                             | 1          | 99           | 22.08         | 22.20         | 22.57         | 22.26         | 22.11         | 2                   |
|                             | 50         | 0            | 21.72         | 21.84         | 22.21         | 21.90         | 21.75         | 3                   |
|                             | 50         | 25           | 21.70         | 21.82         | 22.19         | 21.88         | 21.73         | 3                   |
|                             | 50         | 50           | 21.66         | 21.78         | 22.15         | 21.84         | 21.69         | 3                   |
|                             | 100        | 0            | 21.72         | 21.84         | 22.21         | 21.90         | 21.75         | 3                   |

# FCC SAR Test Report

| LTE<br>Band / BW | RB<br>Size | RB<br>Offset | QPSK             |                  |                   | 3GPP<br>MPR<br>(dB) | 16QAM            |                  |                   | 3GPP<br>MPR<br>(dB) | 64QAM            |                  |                   | 3GPP<br>MPR<br>(dB) |
|------------------|------------|--------------|------------------|------------------|-------------------|---------------------|------------------|------------------|-------------------|---------------------|------------------|------------------|-------------------|---------------------|
|                  |            |              | Low CH<br>131979 | Mid CH<br>132322 | High CH<br>132665 |                     | Low CH<br>131979 | Mid CH<br>132322 | High CH<br>132665 |                     | Low CH<br>131979 | Mid CH<br>132322 | High CH<br>132665 |                     |
|                  |            |              | 1710.7<br>MHz    | 1745.0<br>MHz    | 1779.3<br>MHz     |                     | 1710.7<br>MHz    | 1745.0<br>MHz    | 1779.3<br>MHz     |                     | 1710.7<br>MHz    | 1745.0<br>MHz    | 1779.3<br>MHz     |                     |
| 66 / 1.4M        | 1          | 0            | 22.05            | 22.27            | 22.47             | 0                   | 20.57            | 20.79            | 20.99             | 1                   | 20.51            | 20.73            | 20.93             | 2                   |
|                  | 1          | 2            | 21.96            | 22.18            | 22.38             | 0                   | 20.86            | 21.08            | 21.28             | 1                   | 20.78            | 21.00            | 21.20             | 2                   |
|                  | 1          | 5            | 21.53            | 21.75            | 21.95             | 0                   | 20.77            | 20.99            | 21.19             | 1                   | 20.34            | 20.56            | 20.76             | 2                   |
|                  | 3          | 0            | 22.04            | 22.26            | 22.46             | 0                   | 20.55            | 20.77            | 20.97             | 1                   | 19.79            | 20.01            | 20.21             | 3                   |
|                  | 3          | 1            | 21.95            | 22.17            | 22.37             | 0                   | 20.84            | 21.06            | 21.26             | 1                   | 19.72            | 19.94            | 20.14             | 3                   |
|                  | 3          | 3            | 21.52            | 21.74            | 21.94             | 0                   | 20.75            | 20.97            | 21.17             | 1                   | 19.70            | 19.92            | 20.12             | 3                   |
|                  | 6          | 0            | 20.88            | 21.10            | 21.30             | 1                   | 19.91            | 20.13            | 20.33             | 2                   | 19.80            | 20.02            | 20.22             | 3                   |

| LTE<br>Band / BW | RB<br>Size | RB<br>Offset | QPSK             |                  |                   | 3GPP<br>MPR<br>(dB) | 16QAM            |                  |                   | 3GPP<br>MPR<br>(dB) | 64QAM            |                  |                   | 3GPP<br>MPR<br>(dB) |
|------------------|------------|--------------|------------------|------------------|-------------------|---------------------|------------------|------------------|-------------------|---------------------|------------------|------------------|-------------------|---------------------|
|                  |            |              | Low CH<br>131987 | Mid CH<br>132322 | High CH<br>132657 |                     | Low CH<br>131987 | Mid CH<br>132322 | High CH<br>132657 |                     | Low CH<br>131987 | Mid CH<br>132322 | High CH<br>132657 |                     |
|                  |            |              | 1711.5<br>MHz    | 1745.0<br>MHz    | 1778.5<br>MHz     |                     | 1711.5<br>MHz    | 1745.0<br>MHz    | 1778.5<br>MHz     |                     | 1711.5<br>MHz    | 1745.0<br>MHz    | 1778.5<br>MHz     |                     |
| 66 / 3M          | 1          | 0            | 22.08            | 22.30            | 22.50             | 0                   | 20.60            | 20.82            | 21.02             | 1                   | 20.56            | 20.78            | 20.98             | 2                   |
|                  | 1          | 7            | 21.99            | 22.21            | 22.41             | 0                   | 20.89            | 21.11            | 21.31             | 1                   | 20.83            | 21.05            | 21.25             | 2                   |
|                  | 1          | 14           | 21.56            | 21.78            | 21.98             | 0                   | 20.80            | 21.02            | 21.22             | 1                   | 20.39            | 20.61            | 20.81             | 2                   |
|                  | 8          | 0            | 21.02            | 21.24            | 21.44             | 1                   | 19.86            | 20.08            | 20.28             | 2                   | 19.84            | 20.06            | 20.26             | 3                   |
|                  | 8          | 3            | 20.84            | 21.06            | 21.26             | 1                   | 19.93            | 20.15            | 20.35             | 2                   | 19.77            | 19.99            | 20.19             | 3                   |
|                  | 8          | 7            | 20.87            | 21.09            | 21.29             | 1                   | 20.07            | 20.29            | 20.49             | 2                   | 19.75            | 19.97            | 20.17             | 3                   |
|                  | 15         | 0            | 20.91            | 21.13            | 21.33             | 1                   | 19.94            | 20.16            | 20.36             | 2                   | 19.85            | 20.07            | 20.27             | 3                   |

| LTE<br>Band / BW | RB<br>Size | RB<br>Offset | QPSK             |                  |                   | 3GPP<br>MPR<br>(dB) | 16QAM            |                  |                   | 3GPP<br>MPR<br>(dB) | 64QAM            |                  |                   | 3GPP<br>MPR<br>(dB) |
|------------------|------------|--------------|------------------|------------------|-------------------|---------------------|------------------|------------------|-------------------|---------------------|------------------|------------------|-------------------|---------------------|
|                  |            |              | Low CH<br>131997 | Mid CH<br>132322 | High CH<br>132647 |                     | Low CH<br>131997 | Mid CH<br>132322 | High CH<br>132647 |                     | Low CH<br>131997 | Mid CH<br>132322 | High CH<br>132647 |                     |
|                  |            |              | 1712.5<br>MHz    | 1745.0<br>MHz    | 1777.5<br>MHz     |                     | 1712.5<br>MHz    | 1745.0<br>MHz    | 1777.5<br>MHz     |                     | 1712.5<br>MHz    | 1745.0<br>MHz    | 1777.5<br>MHz     |                     |
| 66 / 5M          | 1          | 0            | 22.11            | 22.33            | 22.53             | 0                   | 20.63            | 20.85            | 21.05             | 1                   | 20.61            | 20.83            | 21.03             | 2                   |
|                  | 1          | 12           | 22.02            | 22.24            | 22.44             | 0                   | 20.92            | 21.14            | 21.34             | 1                   | 20.88            | 21.10            | 21.30             | 2                   |
|                  | 1          | 24           | 21.59            | 21.81            | 22.01             | 0                   | 20.83            | 21.05            | 21.25             | 1                   | 20.44            | 20.66            | 20.86             | 2                   |
|                  | 12         | 0            | 21.05            | 21.27            | 21.47             | 1                   | 19.89            | 20.11            | 20.31             | 2                   | 19.89            | 20.11            | 20.31             | 3                   |
|                  | 12         | 6            | 20.87            | 21.09            | 21.29             | 1                   | 19.96            | 20.18            | 20.38             | 2                   | 19.82            | 20.04            | 20.24             | 3                   |
|                  | 12         | 13           | 20.90            | 21.12            | 21.32             | 1                   | 20.10            | 20.32            | 20.52             | 2                   | 19.80            | 20.02            | 20.22             | 3                   |
|                  | 25         | 0            | 20.94            | 21.16            | 21.36             | 1                   | 19.97            | 20.19            | 20.39             | 2                   | 19.90            | 20.12            | 20.32             | 3                   |

| LTE<br>Band / BW | RB<br>Size | RB<br>Offset | QPSK             |                  |                   | 3GPP<br>MPR<br>(dB) | 16QAM            |                  |                   | 3GPP<br>MPR<br>(dB) | 64QAM            |                  |                   | 3GPP<br>MPR<br>(dB) |
|------------------|------------|--------------|------------------|------------------|-------------------|---------------------|------------------|------------------|-------------------|---------------------|------------------|------------------|-------------------|---------------------|
|                  |            |              | Low CH<br>132022 | Mid CH<br>132322 | High CH<br>132622 |                     | Low CH<br>132022 | Mid CH<br>132322 | High CH<br>132622 |                     | Low CH<br>132022 | Mid CH<br>132322 | High CH<br>132622 |                     |
|                  |            |              | 1715.0<br>MHz    | 1745.0<br>MHz    | 1775.0<br>MHz     |                     | 1715.0<br>MHz    | 1745.0<br>MHz    | 1775.0<br>MHz     |                     | 1715.0<br>MHz    | 1745.0<br>MHz    | 1775.0<br>MHz     |                     |
| 66 / 10M         | 1          | 0            | 22.13            | 22.35            | 22.55             | 0                   | 20.65            | 20.87            | 21.07             | 1                   | 20.66            | 20.88            | 21.08             | 2                   |
|                  | 1          | 24           | 22.04            | 22.26            | 22.46             | 0                   | 20.94            | 21.16            | 21.36             | 1                   | 20.93            | 21.15            | 21.35             | 2                   |
|                  | 1          | 49           | 21.61            | 21.83            | 22.03             | 0                   | 20.85            | 21.07            | 21.27             | 1                   | 20.49            | 20.71            | 20.91             | 2                   |
|                  | 25         | 0            | 21.07            | 21.29            | 21.49             | 1                   | 19.91            | 20.13            | 20.33             | 2                   | 19.94            | 20.16            | 20.36             | 3                   |
|                  | 25         | 12           | 20.89            | 21.11            | 21.31             | 1                   | 19.98            | 20.20            | 20.40             | 2                   | 19.87            | 20.09            | 20.29             | 3                   |
|                  | 25         | 25           | 20.92            | 21.14            | 21.34             | 1                   | 20.12            | 20.34            | 20.54             | 2                   | 19.85            | 20.07            | 20.27             | 3                   |
|                  | 50         | 0            | 20.96            | 21.18            | 21.38             | 1                   | 19.99            | 20.21            | 20.41             | 2                   | 19.95            | 20.17            | 20.37             | 3                   |

# FCC SAR Test Report

| LTE<br>Band / BW | RB<br>Size | RB<br>Offset | QPSK             |                  |                   | 3GPP<br>MPR<br>(dB) | 16QAM            |                  |                   | 3GPP<br>MPR<br>(dB) | 64QAM            |                  |                   | 3GPP<br>MPR<br>(dB) |
|------------------|------------|--------------|------------------|------------------|-------------------|---------------------|------------------|------------------|-------------------|---------------------|------------------|------------------|-------------------|---------------------|
|                  |            |              | Low CH<br>132047 | Mid CH<br>132322 | High CH<br>132597 |                     | Low CH<br>132047 | Mid CH<br>132322 | High CH<br>132597 |                     | Low CH<br>132047 | Mid CH<br>132322 | High CH<br>132597 |                     |
|                  |            |              | 1717.5<br>MHz    | 1745.0<br>MHz    | 1772.5<br>MHz     |                     | 1717.5<br>MHz    | 1745.0<br>MHz    | 1772.5<br>MHz     |                     | 1717.5<br>MHz    | 1745.0<br>MHz    | 1772.5<br>MHz     |                     |
| 66 / 15M         | 1          | 0            | 22.16            | 22.38            | 22.58             | 0                   | 20.68            | 20.90            | 21.10             | 1                   | 20.71            | 20.93            | 21.13             | 2                   |
|                  | 1          | 37           | 22.07            | 22.29            | 22.49             | 0                   | 20.97            | 21.19            | 21.39             | 1                   | 20.98            | 21.20            | 21.40             | 2                   |
|                  | 1          | 74           | 21.64            | 21.86            | 22.06             | 0                   | 20.88            | 21.10            | 21.30             | 1                   | 20.54            | 20.76            | 20.96             | 2                   |
|                  | 36         | 0            | 21.10            | 21.32            | 21.52             | 1                   | 19.94            | 20.16            | 20.36             | 2                   | 19.99            | 20.21            | 20.41             | 3                   |
|                  | 36         | 19           | 20.92            | 21.14            | 21.34             | 1                   | 20.01            | 20.23            | 20.43             | 2                   | 19.92            | 20.14            | 20.34             | 3                   |
|                  | 36         | 39           | 20.95            | 21.17            | 21.37             | 1                   | 20.15            | 20.37            | 20.57             | 2                   | 19.90            | 20.12            | 20.32             | 3                   |
|                  | 75         | 0            | 20.99            | 21.21            | 21.41             | 1                   | 20.02            | 20.24            | 20.44             | 2                   | 20.00            | 20.22            | 20.42             | 3                   |

| LTE<br>Band / BW | RB<br>Size | RB<br>Offset | QPSK             |                  |                   | 3GPP<br>MPR<br>(dB) | 16QAM            |                  |                   | 3GPP<br>MPR<br>(dB) | 64QAM            |                  |                   | 3GPP<br>MPR<br>(dB) |
|------------------|------------|--------------|------------------|------------------|-------------------|---------------------|------------------|------------------|-------------------|---------------------|------------------|------------------|-------------------|---------------------|
|                  |            |              | Low CH<br>132072 | Mid CH<br>132322 | High CH<br>132572 |                     | Low CH<br>132072 | Mid CH<br>132322 | High CH<br>132572 |                     | Low CH<br>132072 | Mid CH<br>132322 | High CH<br>132572 |                     |
|                  |            |              | 1720.0<br>MHz    | 1745.0<br>MHz    | 1770.0<br>MHz     |                     | 1720.0<br>MHz    | 1745.0<br>MHz    | 1770.0<br>MHz     |                     | 1720.0<br>MHz    | 1745.0<br>MHz    | 1770.0<br>MHz     |                     |
| 66 / 20M         | 1          | 0            | 22.21            | 22.43            | <b>22.63</b>      | 0                   | 20.73            | 20.95            | 21.15             | 1                   | 20.76            | 20.98            | 21.18             | 2                   |
|                  | 1          | 50           | 22.12            | 22.34            | 22.54             | 0                   | 21.02            | 21.24            | 21.44             | 1                   | 21.03            | 21.25            | 21.45             | 2                   |
|                  | 1          | 99           | 21.69            | 21.91            | 22.11             | 0                   | 20.93            | 21.15            | 21.35             | 1                   | 20.59            | 20.81            | 21.01             | 2                   |
|                  | 50         | 0            | 21.15            | 21.37            | 21.57             | 1                   | 19.99            | 20.21            | 20.41             | 2                   | 20.04            | 20.26            | 20.46             | 3                   |
|                  | 50         | 25           | 20.97            | 21.19            | 21.39             | 1                   | 20.06            | 20.28            | 20.48             | 2                   | 19.97            | 20.19            | 20.39             | 3                   |
|                  | 50         | 50           | 21.00            | 21.22            | 21.42             | 1                   | 20.20            | 20.42            | 20.62             | 2                   | 19.95            | 20.17            | 20.37             | 3                   |
|                  | 100        | 0            | 21.04            | 21.26            | 21.46             | 1                   | 20.07            | 20.29            | 20.49             | 2                   | 20.05            | 20.27            | 20.47             | 3                   |

# FCC SAR Test Report

## <WLAN 2.4G>

| Mode                      | 802.11b        |          |           |
|---------------------------|----------------|----------|-----------|
| Channel / Frequency (MHz) | 1 (2412)       | 6 (2437) | 11 (2462) |
| Average Power             | 15.10          | 15.00    | 15.00     |
| Mode                      | 802.11g        |          |           |
| Channel / Frequency (MHz) | 1 (2412)       | 6 (2437) | 11 (2462) |
| Average Power             | 14.14          | 14.25    | 14.75     |
| Mode                      | 802.11n (HT20) |          |           |
| Channel / Frequency (MHz) | 1 (2412)       | 6 (2437) | 11 (2462) |
| Average Power             | 14.13          | 14.31    | 14.57     |
| Mode                      | 802.11n (HT40) |          |           |
| Channel / Frequency (MHz) | 3 (2422)       | 6 (2437) | 9 (2452)  |
| Average Power             | 10.93          | 11.38    | 11.15     |

## <WLAN 5.2G>

| Mode                      | 802.11a        |           |           |           |
|---------------------------|----------------|-----------|-----------|-----------|
| Channel / Frequency (MHz) | 36 (5180)      | 40 (5200) | 44 (5220) | 48 (5240) |
| Average Power             | 16.00          | 16.20     | 16.02     | 15.50     |
| Mode                      | 802.11n (HT20) |           |           |           |
| Channel / Frequency (MHz) | 36 (5180)      | 40 (5200) | 44 (5220) | 48 (5240) |
| Average Power             | 15.57          | 15.84     | 15.65     | 15.53     |
| Mode                      | 802.11n (HT40) |           |           |           |
| Channel / Frequency (MHz) | 38 (5190)      |           | 46 (5230) |           |
| Average Power             | 12.25          |           | 12.48     |           |

## <WLAN 5.3G>

| Mode                      | 802.11a        |           |           |           |
|---------------------------|----------------|-----------|-----------|-----------|
| Channel / Frequency (MHz) | 52 (5260)      | 56 (5280) | 60 (5300) | 64 (5320) |
| Average Power             | 15.52          | 15.62     | 15.56     | 15.94     |
| Mode                      | 802.11n (HT20) |           |           |           |
| Channel / Frequency (MHz) | 52 (5260)      | 56 (5280) | 60 (5300) | 64 (5320) |
| Average Power             | 15.40          | 15.59     | 15.70     | 15.97     |
| Mode                      | 802.11n (HT40) |           |           |           |
| Channel / Frequency (MHz) | 54 (5270)      |           | 62 (5310) |           |
| Average Power             | 12.08          |           | 12.31     |           |

# FCC SAR Test Report

## <WLAN 5.6G>

| Mode                      | 802.11a        |            |            |            |            |            |            |            |
|---------------------------|----------------|------------|------------|------------|------------|------------|------------|------------|
| Channel / Frequency (MHz) | 100 (5500)     | 104 (5520) | 108 (5540) | 112 (5560) | 116 (5580) | 132 (5660) | 136 (5680) | 140 (5700) |
| Average Power             | 15.25          | 15.21      | 15.38      | 15.42      | 15.47      | 15.34      | 15.46      | 15.50      |
| Mode                      | 802.11n (HT20) |            |            |            |            |            |            |            |
| Channel / Frequency (MHz) | 100 (5500)     | 104 (5520) | 108 (5540) | 112 (5560) | 116 (5580) | 132 (5660) | 136 (5680) | 140 (5700) |
| Average Power             | 15.36          | 15.26      | 15.59      | 15.65      | 15.70      | 15.55      | 15.53      | 15.45      |
| Mode                      | 802.11n (HT40) |            |            |            |            |            |            |            |
| Channel / Frequency (MHz) | 102 (5510)     |            |            |            | 134 (5670) |            |            |            |
| Average Power             | 12.05          |            |            |            | 12.16      |            |            |            |

## <WLAN 5.8G>

| Mode                      | 802.11a        |            |            |            |            |
|---------------------------|----------------|------------|------------|------------|------------|
| Channel / Frequency (MHz) | 149 (5745)     | 153 (5765) | 157 (5785) | 161 (5805) | 165 (5825) |
| Average Power             | 16.40          | 16.59      | 16.62      | 16.35      | 16.20      |
| Mode                      | 802.11n (HT20) |            |            |            |            |
| Channel / Frequency (MHz) | 149 (5745)     | 153 (5765) | 157 (5785) | 161 (5805) | 165 (5825) |
| Average Power             | 16.45          | 16.59      | 16.66      | 16.32      | 16.22      |
| Mode                      | 802.11n (HT40) |            |            |            |            |
| Channel / Frequency (MHz) | 151 (5755)     |            | 159 (5795) |            |            |
| Average Power             | 13.25          |            | 13.59      |            |            |

## <Bluetooth>

| Mode                      | Bluetooth GFSK           |           |           |
|---------------------------|--------------------------|-----------|-----------|
| Channel / Frequency (MHz) | 0 (2402)                 | 39 (2441) | 78 (2480) |
| Average Power             | 8.91                     | 11.89     | 9.17      |
| Mode                      | Bluetooth $\pi/4$ -DQPSK |           |           |
| Channel / Frequency (MHz) | 0 (2402)                 | 39 (2441) | 78 (2480) |
| Average Power             | 6.68                     | 9.68      | 6.90      |
| Mode                      | Bluetooth 8-DPSK         |           |           |
| Channel / Frequency (MHz) | 0 (2402)                 | 39 (2441) | 78 (2480) |
| Average Power             | 6.71                     | 9.75      | 6.77      |
| Mode                      | Bluetooth LE             |           |           |
| Channel / Frequency (MHz) | 0 (2402)                 | 19 (2440) | 39 (2480) |
| Average Power             | -0.17                    | 1.83      | 0.23      |



### 4.7 SAR Testing Results

#### 4.7.1 SAR Test Reduction Considerations

##### <KDB 447498 D01, General RF Exposure Guidance>

Testing of other required channels within the operating mode of a frequency band is not required when the reported SAR for the mid-band or highest output power channel is:

- (1)  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
- (2)  $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- (3)  $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz

##### <KDB 941225 D01, 3G SAR Measurement Procedures>

The mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq 1/4$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

##### <KDB 941225 D05, SAR Evaluation Considerations for LTE Devices>

###### (1) QPSK with 1 RB and 50% RB allocation

Start with the largest channel bandwidth and measure SAR, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that required test channel.

###### (2) QPSK with 100% RB allocation

SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.

###### (3) Higher order modulations

SAR is required only when the highest maximum output power for the configuration in the higher order modulation is  $> 1/2$  dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45$  W/kg.

###### (4) Other channel bandwidth

SAR is required when the highest maximum output power of the smaller channel bandwidth is  $> 1/2$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is  $> 1.45$  W/kg.

### <KDB 248227 D01, SAR Guidance for Wi-Fi Transmitters>

- (1) For handsets operating next to ear, hotspot mode or mini-tablet configurations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When the reported SAR of initial test position is  $\leq 0.4$  W/kg, SAR testing for remaining test positions is not required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.
- (2) For WLAN 2.4 GHz, the highest measured maximum output power channel for DSSS was selected for SAR measurement. When the reported SAR is  $\leq 0.8$  W/kg, no further SAR testing is required. Otherwise, SAR is evaluated at the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel. For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is  $\leq 1.2$  W/kg.
- (3) For WLAN 5 GHz, the initial test configuration was selected according to the transmission mode with the highest maximum output power. When the reported SAR of initial test configuration is  $> 0.8$  W/kg, SAR is required for the subsequent highest measured output power channel until the reported SAR result is  $\leq 1.2$  W/kg or all required channels are measured. For other transmission modes, SAR is not required when the highest reported SAR for initial test configuration is adjusted by the ratio of subsequent test configuration to initial test configuration specified maximum output power and it is  $\leq 1.2$  W/kg.

# FCC SAR Test Report

## 4.7.2 SAR Results for Head Exposure Condition

| Plot No. | Band      | Mode     | Test Position | Ch.  | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaling Factor | Scaled SAR-1g (W/kg) |
|----------|-----------|----------|---------------|------|--------------------------|--------------------------------|------------------|------------------------|----------------|----------------------|
| 1        | GSM850    | GPRS11   | Right Cheek   | 251  | 29.5                     | 29.42                          | 0.09             | 0.625                  | 1.02           | <b>0.64</b>          |
|          | GSM850    | GPRS11   | Right Tilted  | 251  | 29.5                     | 29.42                          | 0.05             | 0.288                  | 1.02           | 0.29                 |
|          | GSM850    | GPRS11   | Left Cheek    | 251  | 29.5                     | 29.42                          | 0.06             | 0.623                  | 1.02           | 0.63                 |
|          | GSM850    | GPRS11   | Left Tilted   | 251  | 29.5                     | 29.42                          | 0.05             | 0.286                  | 1.02           | 0.29                 |
| 2        | GSM1900   | GPRS12   | Right Cheek   | 661  | 26.0                     | 25.35                          | 0.06             | 0.324                  | 1.16           | <b>0.38</b>          |
|          | GSM1900   | GPRS12   | Right Tilted  | 661  | 26.0                     | 25.35                          | -0.03            | 0.154                  | 1.16           | 0.18                 |
|          | GSM1900   | GPRS12   | Left Cheek    | 661  | 26.0                     | 25.35                          | 0.07             | 0.303                  | 1.16           | 0.35                 |
|          | GSM1900   | GPRS12   | Left Tilted   | 661  | 26.0                     | 25.35                          | 0.01             | 0.103                  | 1.16           | 0.12                 |
| 3        | WCDMA II  | RMC12.2K | Right Cheek   | 9538 | 24.0                     | 23.85                          | -0.03            | 0.301                  | 1.04           | 0.31                 |
|          | WCDMA II  | RMC12.2K | Right Tilted  | 9538 | 24.0                     | 23.85                          | 0.01             | 0.143                  | 1.04           | 0.15                 |
|          | WCDMA II  | RMC12.2K | Left Cheek    | 9538 | 24.0                     | 23.85                          | 0.00             | 0.322                  | 1.04           | <b>0.33</b>          |
|          | WCDMA II  | RMC12.2K | Left Tilted   | 9538 | 24.0                     | 23.85                          | 0.05             | 0.103                  | 1.04           | 0.11                 |
| 4        | WCDMA IV  | RMC12.2K | Right Cheek   | 1513 | 24.0                     | 23.67                          | 0.01             | 0.355                  | 1.08           | <b>0.38</b>          |
|          | WCDMA IV  | RMC12.2K | Right Tilted  | 1513 | 24.0                     | 23.67                          | -0.01            | 0.103                  | 1.08           | 0.11                 |
|          | WCDMA IV  | RMC12.2K | Left Cheek    | 1513 | 24.0                     | 23.67                          | 0.03             | 0.282                  | 1.08           | 0.30                 |
|          | WCDMA IV  | RMC12.2K | Left Tilted   | 1513 | 24.0                     | 23.67                          | 0.01             | 0.078                  | 1.08           | 0.08                 |
|          | WCDMA V   | RMC12.2K | Right Cheek   | 4132 | 25.0                     | 24.41                          | -0.15            | 0.727                  | 1.15           | 0.83                 |
|          | WCDMA V   | RMC12.2K | Right Tilted  | 4132 | 25.0                     | 24.41                          | -0.02            | 0.324                  | 1.15           | 0.37                 |
|          | WCDMA V   | RMC12.2K | Left Cheek    | 4132 | 25.0                     | 24.41                          | 0.15             | 0.78                   | 1.15           | 0.89                 |
|          | WCDMA V   | RMC12.2K | Left Tilted   | 4132 | 25.0                     | 24.41                          | 0.15             | 0.327                  | 1.15           | 0.37                 |
| 5        | WCDMA V   | RMC12.2K | Right Cheek   | 4182 | 25.0                     | 24.39                          | 0.15             | 0.866                  | 1.15           | <b>1.00</b>          |
|          | WCDMA V   | RMC12.2K | Right Cheek   | 4233 | 25.0                     | 24.31                          | 0.11             | 0.756                  | 1.17           | 0.89                 |
|          | WCDMA V   | RMC12.2K | Left Cheek    | 4182 | 25.0                     | 24.39                          | 0.01             | 0.724                  | 1.15           | 0.83                 |
|          | WCDMA V   | RMC12.2K | Left Cheek    | 4233 | 25.0                     | 24.31                          | 0.10             | 0.742                  | 1.17           | 0.87                 |
|          | WCDMA V   | RMC12.2K | Right Cheek   | 4182 | 25.0                     | 24.39                          | 0.15             | 0.858                  | 1.15           | 0.99                 |
|          | CDMA BC0  | RC3+SO55 | Right Cheek   | 384  | 25.0                     | 24.78                          | 0.06             | 0.819                  | 1.05           | 0.86                 |
|          | CDMA BC0  | RC3+SO55 | Right Tilted  | 384  | 25.0                     | 24.78                          | -0.02            | 0.354                  | 1.05           | 0.37                 |
|          | CDMA BC0  | RC3+SO55 | Left Cheek    | 384  | 25.0                     | 24.78                          | 0.09             | 0.816                  | 1.05           | 0.86                 |
|          | CDMA BC0  | RC3+SO55 | Left Tilted   | 384  | 25.0                     | 24.78                          | -0.03            | 0.391                  | 1.05           | 0.41                 |
|          | CDMA BC0  | RC3+SO55 | Right Cheek   | 1013 | 25.0                     | 24.74                          | 0.05             | 0.805                  | 1.06           | 0.85                 |
|          | CDMA BC0  | RC3+SO55 | Right Cheek   | 777  | 25.0                     | 24.68                          | -0.01            | 0.79                   | 1.08           | 0.85                 |
|          | CDMA BC0  | RC3+SO55 | Left Cheek    | 1013 | 25.0                     | 24.78                          | 0.07             | 0.863                  | 1.05           | <b>0.91</b>          |
|          | CDMA BC0  | RC3+SO55 | Left Cheek    | 777  | 25.0                     | 24.78                          | 0.10             | 0.8111                 | 1.05           | 0.85                 |
|          | CDMA BC0  | RC3+SO55 | Left Cheek    | 1013 | 25.0                     | 24.78                          | 0.01             | 0.855                  | 1.05           | 0.90                 |
|          | CDMA BC1  | RC3+SO55 | Right Cheek   | 600  | 25.0                     | 24.81                          | -0.02            | 0.278                  | 1.04           | 0.29                 |
|          | CDMA BC1  | RC3+SO55 | Right Tilted  | 600  | 25.0                     | 24.81                          | 0.01             | 0.133                  | 1.04           | 0.14                 |
|          | CDMA BC1  | RC3+SO55 | Left Cheek    | 600  | 25.0                     | 24.81                          | 0.02             | 0.298                  | 1.04           | <b>0.31</b>          |
|          | CDMA BC1  | RC3+SO55 | Left Tilted   | 600  | 25.0                     | 24.81                          | 0.03             | 0.095                  | 1.04           | 0.10                 |
|          | CDMA BC10 | RC3+SO55 | Right Cheek   | 476  | 25.0                     | 24.71                          | 0.04             | 0.833                  | 1.07           | 0.89                 |
|          | CDMA BC10 | RC3+SO55 | Right Tilted  | 476  | 25.0                     | 24.71                          | 0.05             | 0.401                  | 1.07           | 0.43                 |
|          | CDMA BC10 | RC3+SO55 | Left Cheek    | 476  | 25.0                     | 24.71                          | 0.07             | 0.883                  | 1.07           | 0.94                 |
|          | CDMA BC10 | RC3+SO55 | Left Tilted   | 476  | 25.0                     | 24.71                          | 0.01             | 0.423                  | 1.07           | 0.45                 |
|          | CDMA BC10 | RC3+SO55 | Right Cheek   | 580  | 25.0                     | 24.64                          | 0.00             | 0.843                  | 1.09           | 0.92                 |
|          | CDMA BC10 | RC3+SO55 | Right Cheek   | 684  | 25.0                     | 24.58                          | 0.03             | 0.831                  | 1.10           | 0.92                 |
|          | CDMA BC10 | RC3+SO55 | Left Cheek    | 580  | 25.0                     | 24.64                          | 0.12             | 0.901                  | 1.09           | <b>0.98</b>          |
|          | CDMA BC10 | RC3+SO55 | Left Cheek    | 684  | 25.0                     | 24.58                          | 0.05             | 0.888                  | 1.10           | 0.98                 |
|          | CDMA BC10 | RC3+SO55 | Left Cheek    | 580  | 25.0                     | 24.64                          | 0.12             | 0.891                  | 1.09           | 0.97                 |

# FCC SAR Test Report

| Plot No. | Band   | Mode    | Test Position | Ch.   | RB# | RB Offset | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaling Factor | Scaled SAR-1g (W/kg) |
|----------|--------|---------|---------------|-------|-----|-----------|--------------------------|--------------------------------|------------------|------------------------|----------------|----------------------|
|          | LTE 2  | QPSK20M | Right Cheek   | 18900 | 1   | 0         | 24.0                     | 23.88                          | 0.06             | 0.182                  | 1.03           | 0.19                 |
|          | LTE 2  | QPSK20M | Right Tilted  | 18900 | 1   | 0         | 24.0                     | 23.88                          | 0.04             | 0.087                  | 1.03           | 0.09                 |
| 9        | LTE 2  | QPSK20M | Left Cheek    | 18900 | 1   | 0         | 24.0                     | 23.88                          | 0.09             | 0.195                  | 1.03           | 0.20                 |
|          | LTE 2  | QPSK20M | Left Tilted   | 18900 | 1   | 0         | 24.0                     | 23.88                          | -0.01            | 0.062                  | 1.03           | 0.06                 |
|          | LTE 2  | QPSK20M | Right Cheek   | 18900 | 50  | 0         | 23.0                     | 22.87                          | 0.04             | 0.155                  | 1.03           | 0.16                 |
|          | LTE 2  | QPSK20M | Right Tilted  | 18900 | 50  | 0         | 23.0                     | 22.87                          | -0.12            | 0.069                  | 1.03           | 0.07                 |
|          | LTE 2  | QPSK20M | Left Cheek    | 18900 | 50  | 0         | 23.0                     | 22.87                          | 0.03             | 0.166                  | 1.03           | 0.17                 |
|          | LTE 2  | QPSK20M | Left Tilted   | 18900 | 50  | 0         | 23.0                     | 22.87                          | 0.01             | 0.053                  | 1.03           | 0.05                 |
| 10       | LTE 4  | QPSK20M | Right Cheek   | 20300 | 1   | 0         | 24.0                     | 23.31                          | 0.14             | 0.404                  | 1.17           | 0.47                 |
|          | LTE 4  | QPSK20M | Right Tilted  | 20300 | 1   | 0         | 24.0                     | 23.31                          | 0.01             | 0.117                  | 1.17           | 0.14                 |
|          | LTE 4  | QPSK20M | Left Cheek    | 20300 | 1   | 0         | 24.0                     | 23.31                          | 0.01             | 0.321                  | 1.17           | 0.38                 |
|          | LTE 4  | QPSK20M | Left Tilted   | 20300 | 1   | 0         | 24.0                     | 23.31                          | 0.07             | 0.089                  | 1.17           | 0.10                 |
|          | LTE 4  | QPSK20M | Right Cheek   | 20300 | 50  | 0         | 23.0                     | 22.08                          | -0.11            | 0.329                  | 1.24           | 0.41                 |
|          | LTE 4  | QPSK20M | Right Tilted  | 20300 | 50  | 0         | 23.0                     | 22.08                          | 0.08             | 0.096                  | 1.24           | 0.12                 |
|          | LTE 4  | QPSK20M | Left Cheek    | 20300 | 50  | 0         | 23.0                     | 22.08                          | 0.01             | 0.261                  | 1.24           | 0.32                 |
|          | LTE 4  | QPSK20M | Left Tilted   | 20300 | 50  | 0         | 23.0                     | 22.08                          | 0.02             | 0.072                  | 1.24           | 0.09                 |
|          | LTE 5  | QPSK10M | Right Cheek   | 20525 | 1   | 24        | 24.0                     | 23.32                          | -0.07            | 0.788                  | 1.17           | 0.92                 |
|          | LTE 5  | QPSK10M | Right Tilted  | 20525 | 1   | 24        | 24.0                     | 23.32                          | 0.15             | 0.341                  | 1.17           | 0.40                 |
|          | LTE 5  | QPSK10M | Left Cheek    | 20525 | 1   | 24        | 24.0                     | 23.32                          | 0.06             | 0.805                  | 1.17           | 0.94                 |
|          | LTE 5  | QPSK10M | Left Tilted   | 20525 | 1   | 24        | 24.0                     | 23.32                          | 0.02             | 0.361                  | 1.17           | 0.42                 |
|          | LTE 5  | QPSK10M | Right Cheek   | 20525 | 25  | 12        | 23.0                     | 22.30                          | -0.03            | 0.654                  | 1.17           | 0.77                 |
|          | LTE 5  | QPSK10M | Right Tilted  | 20525 | 25  | 12        | 23.0                     | 22.30                          | -0.03            | 0.283                  | 1.17           | 0.33                 |
|          | LTE 5  | QPSK10M | Left Cheek    | 20525 | 25  | 12        | 23.0                     | 22.30                          | 0.02             | 0.668                  | 1.17           | 0.78                 |
|          | LTE 5  | QPSK10M | Left Tilted   | 20525 | 25  | 12        | 23.0                     | 22.30                          | 0.08             | 0.299                  | 1.17           | 0.35                 |
|          | LTE 5  | QPSK10M | Right Cheek   | 20450 | 1   | 24        | 24.0                     | 23.28                          | 0.02             | 0.824                  | 1.18           | 0.97                 |
|          | LTE 5  | QPSK10M | Right Cheek   | 20600 | 1   | 24        | 24.0                     | 23.20                          | 0.14             | 0.776                  | 1.20           | 0.93                 |
| 11       | LTE 5  | QPSK10M | Left Cheek    | 20450 | 1   | 24        | 24.0                     | 23.28                          | 0.09             | 0.83                   | 1.18           | 0.98                 |
|          | LTE 5  | QPSK10M | Left Cheek    | 20600 | 1   | 24        | 24.0                     | 23.20                          | -0.07            | 0.762                  | 1.20           | 0.92                 |
|          | LTE 5  | QPSK10M | Right Cheek   | 20525 | 50  | 0         | 23.0                     | 22.03                          | -0.05            | 0.652                  | 1.17           | 0.92                 |
|          | LTE 5  | QPSK10M | Left Cheek    | 20525 | 50  | 0         | 23.0                     | 22.03                          | 0.03             | 0.639                  | 1.17           | 0.94                 |
|          | LTE 5  | QPSK10M | Left Cheek    | 20450 | 1   | 24        | 24.0                     | 23.28                          | 0.09             | 0.821                  | 1.18           | 0.97                 |
| 12       | LTE 12 | QPSK10M | Right Cheek   | 23130 | 1   | 24        | 24.0                     | 23.92                          | 0.00             | 0.6                    | 1.02           | 0.61                 |
|          | LTE 12 | QPSK10M | Right Tilted  | 23130 | 1   | 24        | 24.0                     | 23.92                          | 0.03             | 0.222                  | 1.02           | 0.23                 |
|          | LTE 12 | QPSK10M | Left Cheek    | 23130 | 1   | 24        | 24.0                     | 23.92                          | 0.10             | 0.516                  | 1.02           | 0.53                 |
|          | LTE 12 | QPSK10M | Left Tilted   | 23130 | 1   | 24        | 24.0                     | 23.92                          | 0.08             | 0.213                  | 1.02           | 0.22                 |
|          | LTE 12 | QPSK10M | Right Cheek   | 23130 | 25  | 12        | 23.0                     | 22.82                          | 0.09             | 0.517                  | 1.04           | 0.54                 |
|          | LTE 12 | QPSK10M | Right Tilted  | 23130 | 25  | 12        | 23.0                     | 22.82                          | -0.01            | 0.191                  | 1.04           | 0.20                 |
|          | LTE 12 | QPSK10M | Left Cheek    | 23130 | 25  | 12        | 23.0                     | 22.82                          | 0.01             | 0.444                  | 1.04           | 0.46                 |
|          | LTE 12 | QPSK10M | Left Tilted   | 23130 | 25  | 12        | 23.0                     | 22.82                          | 0.08             | 0.183                  | 1.04           | 0.19                 |
| 13       | LTE 13 | QPSK10M | Right Cheek   | 23230 | 1   | 24        | 24.0                     | 23.93                          | 0.00             | 0.606                  | 1.02           | 0.62                 |
|          | LTE 13 | QPSK10M | Right Tilted  | 23230 | 1   | 24        | 24.0                     | 23.93                          | -0.01            | 0.248                  | 1.02           | 0.25                 |
|          | LTE 13 | QPSK10M | Left Cheek    | 23230 | 1   | 24        | 24.0                     | 23.93                          | -0.09            | 0.402                  | 1.02           | 0.41                 |
|          | LTE 13 | QPSK10M | Left Tilted   | 23230 | 1   | 24        | 24.0                     | 23.93                          | -0.07            | 0.256                  | 1.02           | 0.26                 |
|          | LTE 13 | QPSK10M | Right Cheek   | 23230 | 25  | 0         | 23.0                     | 22.93                          | 0.02             | 0.565                  | 1.02           | 0.57                 |
|          | LTE 13 | QPSK10M | Right Tilted  | 23230 | 25  | 0         | 23.0                     | 22.93                          | -0.02            | 0.231                  | 1.02           | 0.23                 |
|          | LTE 13 | QPSK10M | Left Cheek    | 23230 | 25  | 0         | 23.0                     | 22.93                          | 0.01             | 0.374                  | 1.02           | 0.38                 |
|          | LTE 13 | QPSK10M | Left Tilted   | 23230 | 25  | 0         | 23.0                     | 22.93                          | 0.06             | 0.238                  | 1.02           | 0.24                 |

# FCC SAR Test Report

| Plot No. | Band   | Mode    | Test Position | Ch.   | RB# | RB Offset | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaling Factor | Scaled SAR-1g (W/kg) |
|----------|--------|---------|---------------|-------|-----|-----------|--------------------------|--------------------------------|------------------|------------------------|----------------|----------------------|
| 14       | LTE 14 | QPSK10M | Right Cheek   | 23330 | 1   | 24        | 24.0                     | 23.31                          | 0.06             | 0.593                  | 1.17           | <b>0.70</b>          |
|          | LTE 14 | QPSK10M | Right Tilted  | 23330 | 1   | 24        | 24.0                     | 23.31                          | -0.06            | 0.299                  | 1.17           | 0.35                 |
|          | LTE 14 | QPSK10M | Left Cheek    | 23330 | 1   | 24        | 24.0                     | 23.31                          | 0.09             | 0.592                  | 1.17           | 0.69                 |
|          | LTE 14 | QPSK10M | Left Tilted   | 23330 | 1   | 24        | 24.0                     | 23.31                          | -0.01            | 0.28                   | 1.17           | 0.33                 |
|          | LTE 14 | QPSK10M | Right Cheek   | 23330 | 25  | 0         | 23.0                     | 22.33                          | -0.01            | 0.468                  | 1.17           | 0.55                 |
|          | LTE 14 | QPSK10M | Right Tilted  | 23330 | 25  | 0         | 23.0                     | 22.33                          | -0.06            | 0.235                  | 1.17           | 0.27                 |
|          | LTE 14 | QPSK10M | Left Cheek    | 23330 | 25  | 0         | 23.0                     | 22.33                          | 0.01             | 0.467                  | 1.17           | 0.54                 |
|          | LTE 14 | QPSK10M | Left Tilted   | 23330 | 25  | 0         | 23.0                     | 22.33                          | 0.13             | 0.221                  | 1.17           | 0.26                 |
|          | LTE 25 | QPSK20M | Right Cheek   | 26365 | 1   | 0         | 24.0                     | 23.74                          | -0.07            | 0.182                  | 1.06           | 0.19                 |
| 15       | LTE 25 | QPSK20M | Right Tilted  | 26365 | 1   | 0         | 24.0                     | 23.74                          | -0.10            | 0.086                  | 1.06           | 0.09                 |
|          | LTE 25 | QPSK20M | Left Cheek    | 26365 | 1   | 0         | 24.0                     | 23.74                          | 0.07             | 0.198                  | 1.06           | <b>0.21</b>          |
|          | LTE 25 | QPSK20M | Left Tilted   | 26365 | 1   | 0         | 24.0                     | 23.74                          | 0.01             | 0.067                  | 1.06           | 0.07                 |
|          | LTE 25 | QPSK20M | Right Cheek   | 26365 | 50  | 0         | 23.0                     | 22.71                          | 0.08             | 0.147                  | 1.07           | 0.16                 |
|          | LTE 25 | QPSK20M | Right Tilted  | 26365 | 50  | 0         | 23.0                     | 22.71                          | 0.16             | 0.069                  | 1.07           | 0.07                 |
|          | LTE 25 | QPSK20M | Left Cheek    | 26365 | 50  | 0         | 23.0                     | 22.71                          | -0.11            | 0.152                  | 1.07           | 0.16                 |
|          | LTE 25 | QPSK20M | Left Tilted   | 26365 | 50  | 0         | 23.0                     | 22.71                          | 0.01             | 0.051                  | 1.07           | 0.05                 |
|          | LTE 26 | QPSK15M | Right Cheek   | 26865 | 1   | 37        | 24.0                     | 23.30                          | -0.03            | 0.901                  | 1.17           | <b>1.06</b>          |
| 16       | LTE 26 | QPSK15M | Right Tilted  | 26865 | 1   | 37        | 24.0                     | 23.30                          | -0.19            | 0.365                  | 1.17           | 0.43                 |
|          | LTE 26 | QPSK15M | Left Cheek    | 26865 | 1   | 37        | 24.0                     | 23.30                          | -0.09            | 0.843                  | 1.17           | 0.99                 |
|          | LTE 26 | QPSK15M | Left Tilted   | 26865 | 1   | 37        | 24.0                     | 23.30                          | -0.16            | 0.363                  | 1.17           | 0.43                 |
|          | LTE 26 | QPSK15M | Right Cheek   | 26865 | 36  | 0         | 23.0                     | 22.19                          | -0.02            | 0.669                  | 1.21           | 0.81                 |
|          | LTE 26 | QPSK15M | Right Tilted  | 26865 | 36  | 0         | 23.0                     | 22.19                          | 0.01             | 0.271                  | 1.21           | 0.33                 |
|          | LTE 26 | QPSK15M | Left Cheek    | 26865 | 36  | 0         | 23.0                     | 22.19                          | -0.01            | 0.626                  | 1.21           | 0.75                 |
|          | LTE 26 | QPSK15M | Left Tilted   | 26865 | 36  | 0         | 23.0                     | 22.19                          | 0.01             | 0.269                  | 1.21           | 0.32                 |
|          | LTE 26 | QPSK15M | Right Cheek   | 26765 | 1   | 37        | 24.0                     | 23.26                          | -0.17            | 0.684                  | 1.19           | 0.81                 |
|          | LTE 26 | QPSK15M | Right Cheek   | 26965 | 1   | 37        | 24.0                     | 23.22                          | 0.05             | 0.853                  | 1.20           | 1.02                 |
|          | LTE 26 | QPSK15M | Left Cheek    | 26765 | 1   | 37        | 24.0                     | 23.26                          | 0.16             | 0.81                   | 1.19           | 0.96                 |
|          | LTE 26 | QPSK15M | Left Cheek    | 26965 | 1   | 37        | 24.0                     | 23.22                          | 0.05             | 0.777                  | 1.20           | 0.93                 |
|          | LTE 26 | QPSK15M | Right Cheek   | 26765 | 36  | 0         | 23.0                     | 22.15                          | 0.02             | 0.614                  | 1.22           | 0.75                 |
|          | LTE 26 | QPSK15M | Right Cheek   | 26965 | 36  | 0         | 23.0                     | 22.11                          | 0.01             | 0.633                  | 1.23           | 0.78                 |
|          | LTE 26 | QPSK15M | Right Cheek   | 26865 | 75  | 0         | 23.0                     | 22.09                          | 0.04             | 0.683                  | 1.23           | 0.84                 |
|          | LTE 26 | QPSK15M | Left Cheek    | 26865 | 75  | 0         | 23.0                     | 22.09                          | 0.03             | 0.667                  | 1.23           | 0.82                 |
|          | LTE 26 | QPSK15M | Right Cheek   | 26865 | 1   | 37        | 24.0                     | 23.30                          | -0.03            | 0.889                  | 1.17           | 1.04                 |
| 17       | LTE 38 | QPSK20M | Right Cheek   | 37850 | 1   | 50        | 24.0                     | 23.31                          | -0.15            | 0.471                  | 1.17           | <b>0.55</b>          |
|          | LTE 38 | QPSK20M | Right Tilted  | 37850 | 1   | 50        | 24.0                     | 23.31                          | -0.09            | 0.085                  | 1.17           | 0.10                 |
|          | LTE 38 | QPSK20M | Left Cheek    | 37850 | 1   | 50        | 24.0                     | 23.31                          | -0.06            | 0.315                  | 1.17           | 0.37                 |
|          | LTE 38 | QPSK20M | Left Tilted   | 37850 | 1   | 50        | 24.0                     | 23.31                          | -0.02            | 0.067                  | 1.17           | 0.08                 |
|          | LTE 38 | QPSK20M | Right Cheek   | 37850 | 50  | 25        | 23.0                     | 22.67                          | 0.03             | 0.367                  | 1.08           | 0.40                 |
|          | LTE 38 | QPSK20M | Right Tilted  | 37850 | 50  | 25        | 23.0                     | 22.67                          | -0.05            | 0.066                  | 1.08           | 0.07                 |
|          | LTE 38 | QPSK20M | Left Cheek    | 37850 | 50  | 25        | 23.0                     | 22.67                          | 0.01             | 0.245                  | 1.08           | 0.26                 |
|          | LTE 38 | QPSK20M | Left Tilted   | 37850 | 50  | 25        | 23.0                     | 22.67                          | 0.06             | 0.052                  | 1.08           | 0.06                 |

# FCC SAR Test Report

| Plot No. | Band   | Mode    | Test Position | Ch.    | RB# | RB Offset | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaling Factor | Scaled SAR-1g (W/kg) |
|----------|--------|---------|---------------|--------|-----|-----------|--------------------------|--------------------------------|------------------|------------------------|----------------|----------------------|
| 18       | LTE 41 | QPSK20M | Right Cheek   | 41490  | 1   | 50        | 26.5                     | 26.34                          | 0.06             | 1.14                   | 1.04           | <b>1.18</b>          |
|          | LTE 41 | QPSK20M | Right Tilted  | 41490  | 1   | 50        | 26.5                     | 26.34                          | -0.07            | 0.222                  | 1.04           | 0.23                 |
|          | LTE 41 | QPSK20M | Left Cheek    | 41490  | 1   | 50        | 26.5                     | 26.34                          | 0.03             | 0.916                  | 1.04           | 0.95                 |
|          | LTE 41 | QPSK20M | Left Tilted   | 41490  | 1   | 50        | 26.5                     | 26.34                          | 0.02             | 0.139                  | 1.04           | 0.14                 |
|          | LTE 41 | QPSK20M | Right Cheek   | 41490  | 50  | 50        | 25.5                     | 25.42                          | 0.03             | 0.705                  | 1.02           | 0.72                 |
|          | LTE 41 | QPSK20M | Right Tilted  | 41490  | 50  | 50        | 25.5                     | 25.42                          | 0.04             | 0.165                  | 1.02           | 0.17                 |
|          | LTE 41 | QPSK20M | Left Cheek    | 41490  | 50  | 50        | 25.5                     | 25.42                          | -0.05            | 0.543                  | 1.02           | 0.55                 |
|          | LTE 41 | QPSK20M | Left Tilted   | 41490  | 50  | 50        | 25.5                     | 25.42                          | 0.05             | 0.093                  | 1.02           | 0.09                 |
|          | LTE 41 | QPSK20M | Right Cheek   | 39750  | 1   | 50        | 26.5                     | 26.28                          | 0.08             | 0.566                  | 1.05           | 0.60                 |
|          | LTE 41 | QPSK20M | Right Cheek   | 40185  | 1   | 50        | 26.5                     | 26.26                          | 0.06             | 0.549                  | 1.06           | 0.58                 |
|          | LTE 41 | QPSK20M | Right Cheek   | 40620  | 1   | 50        | 26.5                     | 26.20                          | -0.13            | 0.763                  | 1.07           | 0.82                 |
|          | LTE 41 | QPSK20M | Right Cheek   | 41055  | 1   | 50        | 26.5                     | 26.00                          | 0.02             | 0.961                  | 1.12           | 1.08                 |
|          | LTE 41 | QPSK20M | Left Cheek    | 39750  | 1   | 50        | 26.5                     | 26.28                          | 0.05             | 0.447                  | 1.05           | 0.47                 |
|          | LTE 41 | QPSK20M | Left Cheek    | 40185  | 1   | 50        | 26.5                     | 26.26                          | -0.01            | 0.634                  | 1.06           | 0.67                 |
|          | LTE 41 | QPSK20M | Left Cheek    | 40620  | 1   | 50        | 26.5                     | 26.20                          | -0.06            | 0.59                   | 1.07           | 0.63                 |
|          | LTE 41 | QPSK20M | Left Cheek    | 41055  | 1   | 50        | 26.5                     | 26.00                          | 0.02             | 0.72                   | 1.12           | 0.81                 |
|          | LTE 41 | QPSK20M | Right Cheek   | 41490  | 100 | 0         | 25.5                     | 25.29                          | 0.16             | 1                      | 1.05           | 1.05                 |
|          | LTE 41 | QPSK20M | Left Cheek    | 41490  | 100 | 0         | 25.5                     | 25.29                          | 0.05             | 0.659                  | 1.05           | 0.69                 |
|          | LTE 41 | QPSK20M | Right Cheek   | 41490  | 1   | 50        | 26.5                     | 26.34                          | 0.06             | 1.09                   | 1.04           | 1.13                 |
| 19       | LTE 66 | QPSK20M | Right Cheek   | 132572 | 1   | 0         | 24.0                     | 22.63                          | 0.09             | 0.306                  | 1.37           | <b>0.42</b>          |
|          | LTE 66 | QPSK20M | Right Tilted  | 132572 | 1   | 0         | 24.0                     | 22.63                          | 0.04             | 0.089                  | 1.37           | 0.12                 |
|          | LTE 66 | QPSK20M | Left Cheek    | 132572 | 1   | 0         | 24.0                     | 22.63                          | 0.02             | 0.292                  | 1.37           | 0.40                 |
|          | LTE 66 | QPSK20M | Left Tilted   | 132572 | 1   | 0         | 24.0                     | 22.63                          | 0.16             | 0.088                  | 1.37           | 0.12                 |
|          | LTE 66 | QPSK20M | Right Cheek   | 132572 | 50  | 0         | 23.0                     | 21.57                          | -0.05            | 0.257                  | 1.39           | 0.36                 |
|          | LTE 66 | QPSK20M | Right Tilted  | 132572 | 50  | 0         | 23.0                     | 21.57                          | 0.01             | 0.074                  | 1.39           | 0.10                 |
|          | LTE 66 | QPSK20M | Left Cheek    | 132572 | 50  | 0         | 23.0                     | 21.57                          | 0.01             | 0.245                  | 1.39           | 0.34                 |
|          | LTE 66 | QPSK20M | Left Tilted   | 132572 | 50  | 0         | 23.0                     | 21.57                          | 0.06             | 0.074                  | 1.39           | 0.10                 |

| Plot No. | Band    | Mode | Test Position | Ch. | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaling Factor | Scaled SAR-1g (W/kg) |
|----------|---------|------|---------------|-----|--------------------------|--------------------------------|------------------|------------------------|----------------|----------------------|
| 20       | 802.11b | -    | Right Cheek   | 1   | 16.0                     | 15.10                          | 0.06             | 0.014                  | 1.23           | <b>0.02</b>          |
|          | 802.11b | -    | Right Tilted  | 1   | 16.0                     | 15.10                          | 0.05             | 0.012                  | 1.23           | 0.01                 |
|          | 802.11b | -    | Left Cheek    | 1   | 16.0                     | 15.10                          | -0.08            | 0.013                  | 1.23           | 0.02                 |
|          | 802.11b | -    | Left Tilted   | 1   | 16.0                     | 15.10                          | -0.13            | 0.014                  | 1.23           | 0.02                 |
|          | 802.11a | -    | Right Cheek   | 40  | 16.5                     | 16.20                          | -0.06            | 0.073                  | 1.07           | 0.08                 |
|          | 802.11a | -    | Right Tilted  | 40  | 16.5                     | 16.20                          | 0.05             | 0.042                  | 1.07           | 0.05                 |
| 21       | 802.11a | -    | Left Cheek    | 40  | 16.5                     | 16.20                          | 0.02             | 0.141                  | 1.07           | <b>0.15</b>          |
|          | 802.11a | -    | Left Tilted   | 40  | 16.5                     | 16.20                          | 0.04             | 0.025                  | 1.07           | 0.03                 |
|          | 802.11a | -    | Right Cheek   | 140 | 16.5                     | 15.50                          | -0.01            | 0.098                  | 1.26           | 0.12                 |
|          | 802.11a | -    | Right Tilted  | 140 | 16.5                     | 15.50                          | -0.03            | 0.056                  | 1.26           | 0.07                 |
| 22       | 802.11a | -    | Left Cheek    | 140 | 16.5                     | 15.50                          | 0.01             | 0.204                  | 1.26           | <b>0.26</b>          |
|          | 802.11a | -    | Left Tilted   | 140 | 16.5                     | 15.50                          | 0.00             | 0.04                   | 1.26           | 0.05                 |
|          | 802.11a | -    | Right Cheek   | 157 | 17.0                     | 16.62                          | 0.06             | 0.117                  | 1.09           | 0.13                 |
|          | 802.11a | -    | Right Tilted  | 157 | 17.0                     | 16.62                          | -0.06            | 0.035                  | 1.09           | 0.04                 |
| 23       | 802.11a | -    | Left Cheek    | 157 | 17.0                     | 16.62                          | 0.09             | 0.15                   | 1.09           | <b>0.16</b>          |
|          | 802.11a | -    | Left Tilted   | 157 | 17.0                     | 16.62                          | 0.16             | 0.039                  | 1.09           | 0.04                 |



## FCC SAR Test Report

### 4.7.3 SAR Results for Body-worn Exposure Condition (Separation Distance is 1.5 cm Gap)

| Plot No. | Band      | Mode     | Test Position | Ch.  | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaling Factor | Scaled SAR-1g (W/kg) |
|----------|-----------|----------|---------------|------|--------------------------|--------------------------------|------------------|------------------------|----------------|----------------------|
|          | GSM850    | GPRS11   | Front Face    | 251  | 29.5                     | 29.42                          | -0.02            | 0.282                  | 1.02           | 0.29                 |
| 24       | GSM850    | GPRS11   | Rear Face     | 251  | 29.5                     | 29.42                          | 0.01             | 0.482                  | 1.02           | 0.49                 |
|          | GSM1900   | GPRS12   | Front Face    | 661  | 26.0                     | 25.35                          | -0.11            | 0.294                  | 1.16           | 0.34                 |
| 25       | GSM1900   | GPRS12   | Rear Face     | 661  | 26.0                     | 25.35                          | -0.08            | 0.575                  | 1.16           | 0.67                 |
|          | WCDMA II  | RMC12.2K | Front Face    | 9538 | 24.0                     | 23.85                          | 0.12             | 0.262                  | 1.04           | 0.27                 |
| 26       | WCDMA II  | RMC12.2K | Rear Face     | 9538 | 24.0                     | 23.85                          | 0.11             | 0.488                  | 1.04           | 0.51                 |
|          | WCDMA IV  | RMC12.2K | Front Face    | 1513 | 24.0                     | 23.67                          | 0.05             | 0.302                  | 1.08           | 0.33                 |
| 27       | WCDMA IV  | RMC12.2K | Rear Face     | 1513 | 24.0                     | 23.67                          | 0.11             | 0.563                  | 1.08           | 0.61                 |
|          | WCDMA V   | RMC12.2K | Front Face    | 4132 | 25.0                     | 24.41                          | 0.02             | 0.473                  | 1.15           | 0.54                 |
| 28       | WCDMA V   | RMC12.2K | Rear Face     | 4132 | 25.0                     | 24.41                          | 0.10             | 0.806                  | 1.15           | 0.92                 |
|          | WCDMA V   | RMC12.2K | Rear Face     | 4182 | 25.0                     | 24.39                          | 0.07             | 0.765                  | 1.15           | 0.88                 |
|          | WCDMA V   | RMC12.2K | Rear Face     | 4233 | 25.0                     | 24.31                          | 0.07             | 0.723                  | 1.17           | 0.85                 |
|          | WCDMA V   | RMC12.2K | Rear Face     | 4132 | 25.0                     | 24.41                          | 0.11             | 0.799                  | 1.15           | 0.92                 |
|          | CDMA BC0  | RC3+SO32 | Front Face    | 384  | 25.0                     | 24.82                          | -0.05            | 0.504                  | 1.04           | 0.53                 |
| 29       | CDMA BC0  | RC3+SO32 | Rear Face     | 384  | 25.0                     | 24.82                          | 0.12             | 0.86                   | 1.04           | 0.90                 |
|          | CDMA BC0  | RC3+SO32 | Rear Face     | 1013 | 25.0                     | 24.78                          | -0.04            | 0.854                  | 1.05           | 0.90                 |
|          | CDMA BC0  | RC3+SO32 | Rear Face     | 777  | 25.0                     | 24.72                          | -0.03            | 0.699                  | 1.07           | 0.75                 |
|          | CDMA BC0  | RC3+SO32 | Rear Face     | 384  | 25.0                     | 24.82                          | 0.15             | 0.851                  | 1.04           | 0.89                 |
|          | CDMA BC1  | RC3+SO32 | Front Face    | 600  | 25.0                     | 24.85                          | 0.02             | 0.335                  | 1.04           | 0.35                 |
| 30       | CDMA BC1  | RC3+SO32 | Rear Face     | 600  | 25.0                     | 24.85                          | 0.05             | 0.81                   | 1.04           | 0.84                 |
|          | CDMA BC1  | RC3+SO32 | Rear Face     | 25   | 25.0                     | 24.76                          | 0.08             | 0.75                   | 1.06           | 0.79                 |
|          | CDMA BC1  | RC3+SO32 | Rear Face     | 1175 | 25.0                     | 24.77                          | 0.03             | 0.62                   | 1.05           | 0.65                 |
|          | CDMA BC1  | RC3+SO32 | Rear Face     | 600  | 25.0                     | 24.85                          | 0.09             | 0.789                  | 1.04           | 0.82                 |
|          | CDMA BC10 | RC3+SO32 | Front Face    | 476  | 25.0                     | 24.74                          | 0.01             | 0.522                  | 1.06           | 0.55                 |
|          | CDMA BC10 | RC3+SO32 | Rear Face     | 476  | 25.0                     | 24.74                          | 0.15             | 0.886                  | 1.06           | 0.94                 |
|          | CDMA BC10 | RC3+SO32 | Rear Face     | 580  | 25.0                     | 24.69                          | 0.04             | 0.892                  | 1.07           | 0.96                 |
| 31       | CDMA BC10 | RC3+SO32 | Rear Face     | 684  | 25.0                     | 24.61                          | 0.02             | 0.888                  | 1.09           | 0.97                 |
|          | CDMA BC10 | RC3+SO32 | Rear Face     | 684  | 25.0                     | 24.61                          | 0.04             | 0.876                  | 1.09           | 0.96                 |

| Plot No. | Band   | Mode    | Test Position | Ch.   | RB# | RB Offset | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaling Factor | Scaled SAR-1g (W/kg) |
|----------|--------|---------|---------------|-------|-----|-----------|--------------------------|--------------------------------|------------------|------------------------|----------------|----------------------|
|          | LTE 2  | QPSK20M | Front Face    | 18900 | 1   | 0         | 24.0                     | 23.88                          | 0.01             | 0.244                  | 1.03           | 0.25                 |
| 32       | LTE 2  | QPSK20M | Rear Face     | 18900 | 1   | 0         | 24.0                     | 23.88                          | 0.00             | 0.59                   | 1.03           | 0.61                 |
|          | LTE 2  | QPSK20M | Front Face    | 18900 | 50  | 0         | 23.0                     | 22.87                          | 0.02             | 0.186                  | 1.03           | 0.19                 |
|          | LTE 2  | QPSK20M | Rear Face     | 18900 | 50  | 0         | 23.0                     | 22.87                          | 0.10             | 0.451                  | 1.03           | 0.46                 |
|          | LTE 4  | QPSK20M | Front Face    | 20300 | 1   | 0         | 24.0                     | 23.31                          | 0.01             | 0.221                  | 1.17           | 0.26                 |
| 33       | LTE 4  | QPSK20M | Rear Face     | 20300 | 1   | 0         | 24.0                     | 23.31                          | 0.06             | 0.533                  | 1.17           | 0.62                 |
|          | LTE 4  | QPSK20M | Front Face    | 20300 | 50  | 0         | 23.0                     | 22.08                          | 0.02             | 0.168                  | 1.24           | 0.21                 |
|          | LTE 4  | QPSK20M | Rear Face     | 20300 | 50  | 0         | 23.0                     | 22.08                          | -0.03            | 0.43                   | 1.24           | 0.53                 |
|          | LTE 5  | QPSK10M | Front Face    | 20525 | 1   | 24        | 24.0                     | 23.32                          | -0.03            | 0.384                  | 1.17           | 0.45                 |
| 34       | LTE 5  | QPSK10M | Rear Face     | 20525 | 1   | 24        | 24.0                     | 23.32                          | 0.04             | 0.654                  | 1.17           | 0.76                 |
|          | LTE 5  | QPSK10M | Front Face    | 20525 | 25  | 12        | 23.0                     | 22.30                          | -0.03            | 0.288                  | 1.17           | 0.34                 |
|          | LTE 5  | QPSK10M | Rear Face     | 20525 | 25  | 12        | 23.0                     | 22.30                          | 0.12             | 0.515                  | 1.17           | 0.61                 |
|          | LTE 12 | QPSK10M | Front Face    | 23130 | 1   | 24        | 24.0                     | 23.92                          | 0.12             | 0.121                  | 1.02           | 0.12                 |
| 35       | LTE 12 | QPSK10M | Rear Face     | 23130 | 1   | 24        | 24.0                     | 23.92                          | 0.06             | 0.538                  | 1.02           | 0.55                 |
|          | LTE 12 | QPSK10M | Front Face    | 23130 | 25  | 12        | 23.0                     | 22.82                          | 0.10             | 0.091                  | 1.04           | 0.09                 |
|          | LTE 12 | QPSK10M | Rear Face     | 23130 | 25  | 12        | 23.0                     | 22.82                          | 0.06             | 0.427                  | 1.04           | 0.45                 |

# FCC SAR Test Report

| Plot No. | Band   | Mode    | Test Position | Ch.    | RB# | RB Offset | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaling Factor | Scaled SAR-1g (W/kg) |
|----------|--------|---------|---------------|--------|-----|-----------|--------------------------|--------------------------------|------------------|------------------------|----------------|----------------------|
|          | LTE 13 | QPSK10M | Front Face    | 23230  | 1   | 24        | 24.0                     | 23.93                          | -0.05            | 0.346                  | 1.02           | 0.35                 |
| 36       | LTE 13 | QPSK10M | Rear Face     | 23230  | 1   | 24        | 24.0                     | 23.93                          | -0.04            | 0.846                  | 1.02           | 0.86                 |
|          | LTE 13 | QPSK10M | Front Face    | 23230  | 25  | 0         | 23.0                     | 22.93                          | -0.15            | 0.272                  | 1.02           | 0.28                 |
|          | LTE 13 | QPSK10M | Rear Face     | 23230  | 25  | 0         | 23.0                     | 22.93                          | 0.13             | 0.679                  | 1.02           | 0.69                 |
|          | LTE 13 | QPSK10M | Rear Face     | 23230  | 1   | 24        | 24.0                     | 23.93                          | -0.07            | 0.832                  | 1.02           | 0.85                 |
|          | LTE 14 | QPSK10M | Front Face    | 23330  | 1   | 24        | 24.0                     | 23.31                          | -0.09            | 0.274                  | 1.17           | 0.32                 |
| 37       | LTE 14 | QPSK10M | Rear Face     | 23330  | 1   | 24        | 24.0                     | 23.31                          | -0.01            | 0.702                  | 1.17           | 0.82                 |
|          | LTE 14 | QPSK10M | Front Face    | 23330  | 25  | 0         | 23.0                     | 22.33                          | -0.09            | 0.239                  | 1.17           | 0.28                 |
|          | LTE 14 | QPSK10M | Rear Face     | 23330  | 25  | 0         | 23.0                     | 22.33                          | 0.05             | 0.574                  | 1.17           | 0.67                 |
|          | LTE 14 | QPSK10M | Rear Face     | 23330  | 1   | 24        | 24.0                     | 23.31                          | -0.05            | 0.692                  | 1.17           | 0.81                 |
|          | LTE 25 | QPSK20M | Front Face    | 26365  | 1   | 0         | 24.0                     | 23.74                          | -0.03            | 0.253                  | 1.06           | 0.27                 |
| 38       | LTE 25 | QPSK20M | Rear Face     | 26365  | 1   | 0         | 24.0                     | 23.74                          | -0.06            | 0.612                  | 1.06           | 0.65                 |
|          | LTE 25 | QPSK20M | Front Face    | 26365  | 50  | 0         | 23.0                     | 22.71                          | 0.01             | 0.192                  | 1.07           | 0.21                 |
|          | LTE 25 | QPSK20M | Rear Face     | 26365  | 50  | 0         | 23.0                     | 22.71                          | -0.02            | 0.465                  | 1.07           | 0.50                 |
|          | LTE 26 | QPSK15M | Front Face    | 26865  | 1   | 37        | 24.0                     | 23.30                          | -0.01            | 0.271                  | 1.17           | 0.32                 |
| 39       | LTE 26 | QPSK15M | Rear Face     | 26865  | 1   | 37        | 24.0                     | 23.30                          | 0.04             | 0.694                  | 1.17           | 0.82                 |
|          | LTE 26 | QPSK15M | Front Face    | 26865  | 36  | 0         | 23.0                     | 22.19                          | 0.02             | 0.236                  | 1.21           | 0.28                 |
|          | LTE 26 | QPSK15M | Rear Face     | 26865  | 36  | 0         | 23.0                     | 22.19                          | 0.12             | 0.504                  | 1.21           | 0.61                 |
|          | LTE 26 | QPSK15M | Rear Face     | 26765  | 1   | 37        | 24.0                     | 23.26                          | 0.04             | 0.688                  | 1.19           | 0.82                 |
|          | LTE 26 | QPSK15M | Rear Face     | 26965  | 1   | 37        | 24.0                     | 23.22                          | 0.00             | 0.467                  | 1.20           | 0.56                 |
|          | LTE 26 | QPSK15M | Rear Face     | 26865  | 1   | 37        | 24.0                     | 23.30                          | 0.01             | 0.688                  | 1.17           | 0.81                 |
|          | LTE 38 | QPSK20M | Front Face    | 37850  | 1   | 50        | 24.0                     | 23.31                          | 0.05             | 0.195                  | 1.17           | 0.23                 |
| 40       | LTE 38 | QPSK20M | Rear Face     | 37850  | 1   | 50        | 24.0                     | 23.31                          | 0.19             | 0.235                  | 1.17           | 0.28                 |
|          | LTE 38 | QPSK20M | Front Face    | 37850  | 50  | 25        | 23.0                     | 22.67                          | 0.02             | 0.161                  | 1.08           | 0.17                 |
|          | LTE 38 | QPSK20M | Rear Face     | 37850  | 50  | 25        | 23.0                     | 22.67                          | 0.08             | 0.194                  | 1.08           | 0.21                 |
|          | LTE 41 | QPSK20M | Front Face    | 41490  | 1   | 50        | 26.5                     | 26.34                          | 0.04             | 0.217                  | 1.04           | 0.23                 |
| 41       | LTE 41 | QPSK20M | Rear Face     | 41490  | 1   | 50        | 26.5                     | 26.34                          | 0.06             | 0.326                  | 1.04           | 0.34                 |
|          | LTE 41 | QPSK20M | Front Face    | 41490  | 50  | 50        | 25.5                     | 25.42                          | 0.01             | 0.157                  | 1.02           | 0.16                 |
|          | LTE 41 | QPSK20M | Rear Face     | 41490  | 50  | 50        | 25.5                     | 25.42                          | 0.18             | 0.237                  | 1.02           | 0.24                 |
|          | LTE 66 | QPSK20M | Front Face    | 132572 | 1   | 0         | 24.0                     | 22.63                          | 0.01             | 0.167                  | 1.37           | 0.23                 |
| 42       | LTE 66 | QPSK20M | Rear Face     | 132572 | 1   | 0         | 24.0                     | 22.63                          | 0.05             | 0.402                  | 1.37           | 0.55                 |
|          | LTE 66 | QPSK20M | Front Face    | 132572 | 50  | 0         | 23.0                     | 21.57                          | 0.03             | 0.126                  | 1.39           | 0.18                 |
|          | LTE 66 | QPSK20M | Rear Face     | 132572 | 50  | 0         | 23.0                     | 21.57                          | 0.08             | 0.309                  | 1.39           | 0.43                 |

| Plot No. | Band    | Mode | Test Position | Ch. | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaling Factor | Scaled SAR-1g (W/kg) |
|----------|---------|------|---------------|-----|--------------------------|--------------------------------|------------------|------------------------|----------------|----------------------|
|          | 802.11b | -    | Front Face    | 1   | 16.0                     | 15.10                          | 0.06             | 0.008                  | 1.23           | 0.01                 |
| 43       | 802.11b | -    | Rear Face     | 1   | 16.0                     | 15.10                          | 0.05             | 0.011                  | 1.23           | 0.01                 |
|          | 802.11a | -    | Front Face    | 40  | 16.5                     | 16.20                          | -0.02            | 0.065                  | 1.07           | 0.07                 |
| 44       | 802.11a | -    | Rear Face     | 40  | 16.5                     | 16.20                          | 0.01             | 0.084                  | 1.07           | 0.09                 |
|          | 802.11a | -    | Front Face    | 140 | 16.5                     | 15.50                          | -0.06            | 0.073                  | 1.26           | 0.09                 |
| 45       | 802.11a | -    | Rear Face     | 140 | 16.5                     | 15.50                          | 0.08             | 0.199                  | 1.26           | 0.25                 |
|          | 802.11a | -    | Front Face    | 157 | 17.0                     | 16.62                          | 0.02             | 0.061                  | 1.09           | 0.07                 |
| 46       | 802.11a | -    | Rear Face     | 157 | 17.0                     | 16.62                          | -0.02            | 0.167                  | 1.09           | 0.18                 |



# FCC SAR Test Report



## 4.7.4 SAR Results for Hotspot Exposure Condition (Separation Distance is 1.0 cm Gap)

| Plot No. | Band     | Mode       | Test Position | Ch.  | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaling Factor | Scaled SAR-1g (W/kg) |
|----------|----------|------------|---------------|------|--------------------------|--------------------------------|------------------|------------------------|----------------|----------------------|
| 47       | GSM850   | GPRS11     | Front Face    | 251  | 29.5                     | 29.42                          | -0.16            | 0.403                  | 1.02           | 0.41                 |
|          | GSM850   | GPRS11     | Rear Face     | 251  | 29.5                     | 29.42                          | -0.06            | 0.865                  | 1.02           | 0.88                 |
|          | GSM850   | GPRS11     | Left Side     | 251  | 29.5                     | 29.42                          | -0.02            | 0.36                   | 1.02           | 0.37                 |
|          | GSM850   | GPRS11     | Right Side    | 251  | 29.5                     | 29.42                          | -0.09            | 0.494                  | 1.02           | 0.50                 |
|          | GSM850   | GPRS11     | Bottom Side   | 251  | 29.5                     | 29.42                          | -0.05            | 0.092                  | 1.02           | 0.09                 |
|          | GSM850   | GPRS11     | Rear Face     | 251  | 29.5                     | 29.42                          | -0.06            | 0.857                  | 1.02           | 0.87                 |
|          | GSM1900  | GPRS12     | Front Face    | 661  | 26.0                     | 25.35                          | -0.03            | 0.464                  | 1.16           | 0.54                 |
|          | GSM1900  | GPRS12     | Rear Face     | 661  | 26.0                     | 25.35                          | 0.09             | 1.04                   | 1.16           | 1.21                 |
|          | GSM1900  | GPRS12     | Left Side     | 661  | 26.0                     | 25.35                          | -0.07            | 0.136                  | 1.16           | 0.16                 |
|          | GSM1900  | GPRS12     | Right Side    | 661  | 26.0                     | 25.35                          | -0.05            | 0.587                  | 1.16           | 0.68                 |
|          | GSM1900  | GPRS12     | Bottom Side   | 661  | 26.0                     | 25.35                          | 0.08             | 0.356                  | 1.16           | 0.41                 |
|          | GSM1900  | GPRS12     | Rear Face     | 512  | 26.0                     | 25.31                          | 0.09             | 1.11                   | 1.17           | 1.30                 |
| 48       | GSM1900  | GPRS12     | Rear Face     | 810  | 26.0                     | 25.27                          | 0.11             | 0.964                  | 1.18           | 1.14                 |
|          | GSM1900  | GPRS12     | Rear Face     | 512  | 26.0                     | 25.31                          | -0.03            | 1.09                   | 1.17           | 1.28                 |
|          | WCDMA II | RMC12.2K   | Front Face    | 9538 | 24.0                     | 23.85                          | 0.00             | 0.434                  | 1.04           | 0.45                 |
|          | WCDMA II | RMC12.2K   | Rear Face     | 9538 | 24.0                     | 23.85                          | 0.11             | 0.776                  | 1.04           | 0.80                 |
|          | WCDMA II | RMC12.2K   | Left Side     | 9538 | 24.0                     | 23.85                          | 0.03             | 0.103                  | 1.04           | 0.11                 |
|          | WCDMA II | RMC12.2K   | Right Side    | 9538 | 24.0                     | 23.85                          | 0.01             | 0.521                  | 1.04           | 0.54                 |
| 49       | WCDMA II | RMC12.2K   | Bottom Side   | 9538 | 24.0                     | 23.85                          | -0.01            | 0.237                  | 1.04           | 0.25                 |
|          | WCDMA II | RMC12.2K   | Rear Face     | 9262 | 24.0                     | 23.40                          | 0.10             | 0.863                  | 1.15           | 0.99                 |
|          | WCDMA II | RMC12.2K   | Rear Face     | 9400 | 24.0                     | 23.81                          | 0.03             | 0.867                  | 1.04           | 0.91                 |
|          | WCDMA II | RMC12.2K   | Rear Face     | 9262 | 24.0                     | 23.40                          | 0.06             | 0.855                  | 1.15           | 0.98                 |
|          | WCDMA IV | RMC12.2K   | Front Face    | 1513 | 24.0                     | 23.67                          | -0.03            | 0.315                  | 1.08           | 0.34                 |
|          | WCDMA IV | RMC12.2K   | Rear Face     | 1513 | 24.0                     | 23.67                          | 0.09             | 0.919                  | 1.08           | 0.99                 |
| 50       | WCDMA IV | RMC12.2K   | Left Side     | 1513 | 24.0                     | 23.67                          | 0.01             | 0.084                  | 1.08           | 0.09                 |
|          | WCDMA IV | RMC12.2K   | Right Side    | 1513 | 24.0                     | 23.67                          | 0.02             | 0.427                  | 1.08           | 0.46                 |
|          | WCDMA IV | RMC12.2K   | Bottom Side   | 1513 | 24.0                     | 23.67                          | 0.01             | 0.195                  | 1.08           | 0.21                 |
|          | WCDMA IV | RMC12.2K   | Rear Face     | 1312 | 24.0                     | 23.52                          | 0.00             | 1.03                   | 1.12           | 1.15                 |
|          | WCDMA IV | RMC12.2K   | Rear Face     | 1413 | 24.0                     | 23.61                          | 0.01             | 0.955                  | 1.09           | 1.04                 |
|          | WCDMA IV | RMC12.2K   | Rear Face     | 1312 | 24.0                     | 23.52                          | 0.00             | 1                      | 1.12           | 1.12                 |
| 51       | WCDMA V  | RMC12.2K   | Front Face    | 4132 | 25.0                     | 24.41                          | -0.12            | 0.473                  | 1.15           | 0.54                 |
|          | WCDMA V  | RMC12.2K   | Rear Face     | 4132 | 25.0                     | 24.41                          | -0.05            | 0.959                  | 1.15           | 1.10                 |
|          | WCDMA V  | RMC12.2K   | Left Side     | 4132 | 25.0                     | 24.41                          | -0.12            | 0.461                  | 1.15           | 0.53                 |
|          | WCDMA V  | RMC12.2K   | Right Side    | 4132 | 25.0                     | 24.41                          | 0.01             | 0.728                  | 1.15           | 0.83                 |
|          | WCDMA V  | RMC12.2K   | Bottom Side   | 4132 | 25.0                     | 24.41                          | -0.01            | 0.078                  | 1.15           | 0.09                 |
|          | WCDMA V  | RMC12.2K   | Rear Face     | 4182 | 25.0                     | 24.39                          | -0.06            | 1.05                   | 1.15           | 1.21                 |
| 52       | WCDMA V  | RMC12.2K   | Rear Face     | 4233 | 25.0                     | 24.31                          | -0.04            | 0.986                  | 1.17           | 1.16                 |
|          | WCDMA V  | RMC12.2K   | Right Side    | 4182 | 25.0                     | 24.39                          | -0.05            | 0.699                  | 1.15           | 0.80                 |
|          | WCDMA V  | RMC12.2K   | Right Side    | 4233 | 25.0                     | 24.31                          | 0.04             | 0.657                  | 1.17           | 0.77                 |
|          | WCDMA V  | RMC12.2K   | Rear Face     | 4182 | 25.0                     | 24.39                          | -0.06            | 1.02                   | 1.15           | 1.17                 |
|          | CDMA BC0 | RTAP 153.6 | Front Face    | 1013 | 22.5                     | 22.04                          | 0.16             | 0.339                  | 1.11           | 0.38                 |
|          | CDMA BC0 | RTAP 153.6 | Rear Face     | 1013 | 22.5                     | 22.04                          | 0.11             | 0.629                  | 1.11           | 0.70                 |
| 53       | CDMA BC0 | RTAP 153.6 | Left Side     | 1013 | 22.5                     | 22.04                          | -0.09            | 0.408                  | 1.11           | 0.45                 |
|          | CDMA BC0 | RTAP 153.6 | Right Side    | 1013 | 22.5                     | 22.04                          | 0.00             | 0.399                  | 1.11           | 0.44                 |
|          | CDMA BC0 | RTAP 153.6 | Bottom Side   | 1013 | 22.5                     | 22.04                          | 0.09             | 0.056                  | 1.11           | 0.06                 |
|          | CDMA BC1 | RTAP 153.6 | Front Face    | 600  | 22.5                     | 22.03                          | 0.09             | 0.271                  | 1.11           | 0.30                 |
|          | CDMA BC1 | RTAP 153.6 | Rear Face     | 600  | 22.5                     | 22.03                          | 0.05             | 0.67                   | 1.11           | 0.75                 |
|          | CDMA BC1 | RTAP 153.6 | Left Side     | 600  | 22.5                     | 22.03                          | 0.00             | 0.085                  | 1.11           | 0.09                 |
|          | CDMA BC1 | RTAP 153.6 | Right Side    | 600  | 22.5                     | 22.03                          | -0.03            | 0.311                  | 1.11           | 0.35                 |
|          | CDMA BC1 | RTAP 153.6 | Bottom Side   | 600  | 22.5                     | 22.03                          | 0.01             | 0.142                  | 1.11           | 0.16                 |

# FCC SAR Test Report

| Plot No. | Band      | Mode       | Test Position | Ch. | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaling Factor | Scaled SAR-1g (W/kg) |
|----------|-----------|------------|---------------|-----|--------------------------|--------------------------------|------------------|------------------------|----------------|----------------------|
|          | CDMA BC10 | RTAP 153.6 | Front Face    | 476 | 22.5                     | 22.12                          | 0.08             | 0.332                  | 1.09           | 0.36                 |
| 54       | CDMA BC10 | RTAP 153.6 | Rear Face     | 476 | 22.5                     | 22.12                          | -0.02            | 0.647                  | 1.09           | 0.71                 |
|          | CDMA BC10 | RTAP 153.6 | Left Side     | 476 | 22.5                     | 22.12                          | 0.02             | 0.268                  | 1.09           | 0.29                 |
|          | CDMA BC10 | RTAP 153.6 | Right Side    | 476 | 22.5                     | 22.12                          | 0.00             | 0.404                  | 1.09           | 0.44                 |
|          | CDMA BC10 | RTAP 153.6 | Bottom Side   | 476 | 22.5                     | 22.12                          | 0.10             | 0.056                  | 1.09           | 0.06                 |

| Plot No. | Band  | Mode    | Test Position | Ch.   | RB# | RB Offset | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaling Factor | Scaled SAR-1g (W/kg) |
|----------|-------|---------|---------------|-------|-----|-----------|--------------------------|--------------------------------|------------------|------------------------|----------------|----------------------|
|          | LTE 2 | QPSK20M | Front Face    | 18900 | 1   | 0         | 24.0                     | 23.88                          | -0.07            | 0.395                  | 1.03           | 0.41                 |
| 55       | LTE 2 | QPSK20M | Rear Face     | 18900 | 1   | 0         | 24.0                     | 23.88                          | 0.00             | 1.15                   | 1.03           | 1.18                 |
|          | LTE 2 | QPSK20M | Left Side     | 18900 | 1   | 0         | 24.0                     | 23.88                          | -0.16            | 0.107                  | 1.03           | 0.11                 |
|          | LTE 2 | QPSK20M | Right Side    | 18900 | 1   | 0         | 24.0                     | 23.88                          | 0.00             | 0.535                  | 1.03           | 0.55                 |
|          | LTE 2 | QPSK20M | Bottom Side   | 18900 | 1   | 0         | 24.0                     | 23.88                          | 0.11             | 0.245                  | 1.03           | 0.25                 |
|          | LTE 2 | QPSK20M | Front Face    | 18900 | 50  | 0         | 23.0                     | 22.87                          | 0.03             | 0.289                  | 1.03           | 0.30                 |
|          | LTE 2 | QPSK20M | Rear Face     | 18900 | 50  | 0         | 23.0                     | 22.87                          | 0.06             | 0.841                  | 1.03           | 0.87                 |
|          | LTE 2 | QPSK20M | Left Side     | 18900 | 50  | 0         | 23.0                     | 22.87                          | 0.02             | 0.078                  | 1.03           | 0.08                 |
|          | LTE 2 | QPSK20M | Right Side    | 18900 | 50  | 0         | 23.0                     | 22.87                          | 0.00             | 0.391                  | 1.03           | 0.40                 |
|          | LTE 2 | QPSK20M | Bottom Side   | 18900 | 50  | 0         | 23.0                     | 22.87                          | 0.10             | 0.179                  | 1.03           | 0.18                 |
|          | LTE 2 | QPSK20M | Rear Face     | 18700 | 1   | 0         | 24.0                     | 23.71                          | 0.02             | 1.05                   | 1.07           | 1.12                 |
|          | LTE 2 | QPSK20M | Rear Face     | 19100 | 1   | 0         | 24.0                     | 23.85                          | -0.13            | 1.04                   | 1.04           | 1.08                 |
|          | LTE 2 | QPSK20M | Rear Face     | 18700 | 50  | 0         | 23.0                     | 22.70                          | 0.01             | 0.882                  | 1.07           | 0.95                 |
|          | LTE 2 | QPSK20M | Rear Face     | 19100 | 50  | 0         | 23.0                     | 22.84                          | 0.02             | 0.764                  | 1.04           | 0.79                 |
|          | LTE 2 | QPSK20M | Rear Face     | 18900 | 100 | 0         | 23.0                     | 22.76                          | 0.04             | 0.846                  | 1.06           | 0.89                 |
|          | LTE 2 | QPSK20M | Rear Face     | 18900 | 1   | 0         | 24.0                     | 23.88                          | -0.01            | 1.12                   | 1.03           | 1.15                 |
|          | LTE 4 | QPSK20M | Front Face    | 20300 | 1   | 50        | 22.0                     | 21.53                          | -0.05            | 0.342                  | 1.11           | 0.38                 |
| 56       | LTE 4 | QPSK20M | Rear Face     | 20300 | 1   | 50        | 22.0                     | 21.53                          | 0.00             | 0.633                  | 1.11           | 0.71                 |
|          | LTE 4 | QPSK20M | Left Side     | 20300 | 1   | 50        | 22.0                     | 21.53                          | 0.01             | 0.098                  | 1.11           | 0.11                 |
|          | LTE 4 | QPSK20M | Right Side    | 20300 | 1   | 50        | 22.0                     | 21.53                          | -0.10            | 0.403                  | 1.11           | 0.45                 |
|          | LTE 4 | QPSK20M | Bottom Side   | 20300 | 1   | 50        | 22.0                     | 21.53                          | 0.18             | 0.291                  | 1.11           | 0.32                 |
|          | LTE 4 | QPSK20M | Front Face    | 20300 | 50  | 0         | 21.0                     | 20.58                          | 0.04             | 0.285                  | 1.10           | 0.31                 |
|          | LTE 4 | QPSK20M | Rear Face     | 20300 | 50  | 0         | 21.0                     | 20.58                          | 0.10             | 0.52                   | 1.10           | 0.57                 |
|          | LTE 4 | QPSK20M | Left Side     | 20300 | 50  | 0         | 21.0                     | 20.58                          | 0.06             | 0.081                  | 1.10           | 0.09                 |
|          | LTE 4 | QPSK20M | Right Side    | 20300 | 50  | 0         | 21.0                     | 20.58                          | 0.04             | 0.331                  | 1.10           | 0.36                 |
|          | LTE 4 | QPSK20M | Bottom Side   | 20300 | 50  | 0         | 21.0                     | 20.58                          | 0.01             | 0.239                  | 1.10           | 0.26                 |
|          | LTE 5 | QPSK10M | Front Face    | 20525 | 1   | 24        | 24.0                     | 23.32                          | -0.17            | 0.478                  | 1.17           | 0.56                 |
| 57       | LTE 5 | QPSK10M | Rear Face     | 20525 | 1   | 24        | 24.0                     | 23.32                          | 0.08             | 0.921                  | 1.17           | 1.08                 |
|          | LTE 5 | QPSK10M | Left Side     | 20525 | 1   | 24        | 24.0                     | 23.32                          | -0.08            | 0.412                  | 1.17           | 0.48                 |
|          | LTE 5 | QPSK10M | Right Side    | 20525 | 1   | 24        | 24.0                     | 23.32                          | 0.09             | 0.571                  | 1.17           | 0.67                 |
|          | LTE 5 | QPSK10M | Bottom Side   | 20525 | 1   | 24        | 24.0                     | 23.32                          | 0.05             | 0.078                  | 1.17           | 0.09                 |
|          | LTE 5 | QPSK10M | Front Face    | 20525 | 25  | 12        | 23.0                     | 22.30                          | -0.02            | 0.376                  | 1.17           | 0.44                 |
|          | LTE 5 | QPSK10M | Rear Face     | 20525 | 25  | 12        | 23.0                     | 22.30                          | 0.02             | 0.709                  | 1.17           | 0.83                 |
|          | LTE 5 | QPSK10M | Left Side     | 20525 | 25  | 12        | 23.0                     | 22.30                          | -0.03            | 0.324                  | 1.17           | 0.38                 |
|          | LTE 5 | QPSK10M | Right Side    | 20525 | 25  | 12        | 23.0                     | 22.30                          | 0.01             | 0.451                  | 1.17           | 0.53                 |
|          | LTE 5 | QPSK10M | Bottom Side   | 20525 | 25  | 12        | 23.0                     | 22.30                          | 0.05             | 0.062                  | 1.17           | 0.07                 |
|          | LTE 5 | QPSK10M | Rear Face     | 20450 | 1   | 24        | 24.0                     | 23.28                          | -0.04            | 0.822                  | 1.18           | 0.97                 |
|          | LTE 5 | QPSK10M | Rear Face     | 20600 | 1   | 24        | 24.0                     | 23.20                          | -0.08            | 0.748                  | 1.20           | 0.90                 |
|          | LTE 5 | QPSK10M | Rear Face     | 20450 | 25  | 12        | 23.0                     | 22.26                          | -0.03            | 0.839                  | 1.19           | 0.99                 |
|          | LTE 5 | QPSK10M | Rear Face     | 20600 | 25  | 12        | 23.0                     | 22.18                          | 0.00             | 0.679                  | 1.21           | 0.82                 |
|          | LTE 5 | QPSK10M | Rear Face     | 20525 | 50  | 0         | 23.0                     | 22.03                          | -0.05            | 0.699                  | 1.25           | 0.87                 |
|          | LTE 5 | QPSK10M | Rear Face     | 20525 | 1   | 24        | 24.0                     | 23.32                          | 0.01             | 0.888                  | 1.17           | 1.04                 |

# FCC SAR Test Report

| Plot No. | Band   | Mode    | Test Position | Ch.   | RB# | RB Offset | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaling Factor | Scaled SAR-1g (W/kg) |
|----------|--------|---------|---------------|-------|-----|-----------|--------------------------|--------------------------------|------------------|------------------------|----------------|----------------------|
| 58       | LTE 12 | QPSK10M | Front Face    | 23130 | 1   | 24        | 24.0                     | 23.92                          | -0.07            | 0.156                  | 1.02           | 0.16                 |
|          | LTE 12 | QPSK10M | Rear Face     | 23130 | 1   | 24        | 24.0                     | 23.92                          | -0.02            | 0.768                  | 1.02           | 0.78                 |
|          | LTE 12 | QPSK10M | Left Side     | 23130 | 1   | 24        | 24.0                     | 23.92                          | 0.09             | 0.434                  | 1.02           | 0.44                 |
|          | LTE 12 | QPSK10M | Right Side    | 23130 | 1   | 24        | 24.0                     | 23.92                          | -0.05            | 0.412                  | 1.02           | 0.42                 |
|          | LTE 12 | QPSK10M | Bottom Side   | 23130 | 1   | 24        | 24.0                     | 23.92                          | 0.05             | 0.056                  | 1.02           | 0.06                 |
|          | LTE 12 | QPSK10M | Front Face    | 23130 | 25  | 12        | 23.0                     | 22.82                          | -0.01            | 0.122                  | 1.04           | 0.13                 |
|          | LTE 12 | QPSK10M | Rear Face     | 23130 | 25  | 12        | 23.0                     | 22.82                          | -0.11            | 0.584                  | 1.04           | 0.61                 |
|          | LTE 12 | QPSK10M | Left Side     | 23130 | 25  | 12        | 23.0                     | 22.82                          | 0.03             | 0.339                  | 1.04           | 0.35                 |
|          | LTE 12 | QPSK10M | Right Side    | 23130 | 25  | 12        | 23.0                     | 22.82                          | 0.01             | 0.322                  | 1.04           | 0.34                 |
|          | LTE 12 | QPSK10M | Bottom Side   | 23130 | 25  | 12        | 23.0                     | 22.82                          | 0.05             | 0.044                  | 1.04           | 0.05                 |
| 59       | LTE 13 | QPSK10M | Front Face    | 23230 | 1   | 24        | 24.0                     | 23.93                          | 0.12             | 0.455                  | 1.02           | 0.46                 |
|          | LTE 13 | QPSK10M | Rear Face     | 23230 | 1   | 24        | 24.0                     | 23.93                          | -0.14            | 1.18                   | 1.02           | 1.20                 |
|          | LTE 13 | QPSK10M | Left Side     | 23230 | 1   | 24        | 24.0                     | 23.93                          | -0.05            | 0.345                  | 1.02           | 0.35                 |
|          | LTE 13 | QPSK10M | Right Side    | 23230 | 1   | 24        | 24.0                     | 23.93                          | -0.01            | 0.752                  | 1.02           | 0.76                 |
|          | LTE 13 | QPSK10M | Bottom Side   | 23230 | 1   | 24        | 24.0                     | 23.93                          | 0.07             | 0.101                  | 1.02           | 0.10                 |
|          | LTE 13 | QPSK10M | Front Face    | 23230 | 25  | 0         | 23.0                     | 22.93                          | -0.03            | 0.364                  | 1.02           | 0.37                 |
|          | LTE 13 | QPSK10M | Rear Face     | 23230 | 25  | 0         | 23.0                     | 22.93                          | 0.00             | 0.944                  | 1.02           | 0.96                 |
|          | LTE 13 | QPSK10M | Left Side     | 23230 | 25  | 0         | 23.0                     | 22.93                          | 0.01             | 0.276                  | 1.02           | 0.28                 |
|          | LTE 13 | QPSK10M | Right Side    | 23230 | 25  | 0         | 23.0                     | 22.93                          | 0.02             | 0.602                  | 1.02           | 0.61                 |
|          | LTE 13 | QPSK10M | Bottom Side   | 23230 | 25  | 0         | 23.0                     | 22.93                          | 0.05             | 0.081                  | 1.02           | 0.08                 |
|          | LTE 13 | QPSK10M | Rear Face     | 23230 | 50  | 0         | 23.0                     | 22.85                          | -0.01            | 0.899                  | 1.04           | 0.93                 |
|          | LTE 13 | QPSK10M | Rear Face     | 23230 | 1   | 0         | 24.0                     | 23.93                          | -0.04            | 1.13                   | 1.02           | 1.15                 |
|          | LTE 14 | QPSK10M | Front Face    | 23330 | 1   | 24        | 24.0                     | 23.31                          | 0.00             | 0.371                  | 1.17           | 0.43                 |
|          | LTE 14 | QPSK10M | Rear Face     | 23330 | 1   | 24        | 24.0                     | 23.31                          | -0.02            | 0.954                  | 1.17           | 1.12                 |
| 60       | LTE 14 | QPSK10M | Left Side     | 23330 | 1   | 24        | 24.0                     | 23.31                          | 0.02             | 0.314                  | 1.17           | 0.37                 |
|          | LTE 14 | QPSK10M | Right Side    | 23330 | 1   | 24        | 24.0                     | 23.31                          | -0.03            | 0.606                  | 1.17           | 0.71                 |
|          | LTE 14 | QPSK10M | Bottom Side   | 23330 | 1   | 24        | 24.0                     | 23.31                          | 0.07             | 0.098                  | 1.17           | 0.11                 |
|          | LTE 14 | QPSK10M | Front Face    | 23330 | 25  | 0         | 23.0                     | 22.33                          | -0.01            | 0.318                  | 1.17           | 0.37                 |
|          | LTE 14 | QPSK10M | Rear Face     | 23330 | 25  | 0         | 23.0                     | 22.33                          | -0.01            | 0.793                  | 1.17           | 0.93                 |
|          | LTE 14 | QPSK10M | Left Side     | 23330 | 25  | 0         | 23.0                     | 22.33                          | 0.03             | 0.268                  | 1.17           | 0.31                 |
|          | LTE 14 | QPSK10M | Right Side    | 23330 | 25  | 0         | 23.0                     | 22.33                          | 0.05             | 0.518                  | 1.17           | 0.60                 |
|          | LTE 14 | QPSK10M | Bottom Side   | 23330 | 25  | 0         | 23.0                     | 22.33                          | 0.05             | 0.084                  | 1.17           | 0.10                 |
|          | LTE 14 | QPSK10M | Rear Face     | 23330 | 50  | 0         | 23.0                     | 22.18                          | -0.02            | 0.769                  | 1.21           | 0.93                 |
|          | LTE 14 | QPSK10M | Rear Face     | 23330 | 1   | 24        | 24.0                     | 23.31                          | -0.01            | 0.918                  | 1.17           | 1.08                 |
|          | LTE 25 | QPSK20M | Front Face    | 26365 | 1   | 0         | 24.0                     | 23.74                          | -0.03            | 0.384                  | 1.06           | 0.41                 |
|          | LTE 25 | QPSK20M | Rear Face     | 26365 | 1   | 0         | 24.0                     | 23.74                          | 0.07             | 1.12                   | 1.06           | 1.19                 |
|          | LTE 25 | QPSK20M | Left Side     | 26365 | 1   | 0         | 24.0                     | 23.74                          | 0.01             | 0.104                  | 1.06           | 0.11                 |
|          | LTE 25 | QPSK20M | Right Side    | 26365 | 1   | 0         | 24.0                     | 23.74                          | 0.02             | 0.521                  | 1.06           | 0.55                 |
| 61       | LTE 25 | QPSK20M | Bottom Side   | 26365 | 1   | 0         | 24.0                     | 23.74                          | 0.05             | 0.238                  | 1.06           | 0.25                 |
|          | LTE 25 | QPSK20M | Front Face    | 26365 | 50  | 0         | 23.0                     | 22.71                          | 0.01             | 0.301                  | 1.07           | 0.32                 |
|          | LTE 25 | QPSK20M | Rear Face     | 26365 | 50  | 0         | 23.0                     | 22.71                          | -0.04            | 0.877                  | 1.07           | 0.94                 |
|          | LTE 25 | QPSK20M | Left Side     | 26365 | 50  | 0         | 23.0                     | 22.71                          | -0.03            | 0.082                  | 1.07           | 0.09                 |
|          | LTE 25 | QPSK20M | Right Side    | 26365 | 50  | 0         | 23.0                     | 22.71                          | 0.01             | 0.407                  | 1.07           | 0.44                 |
|          | LTE 25 | QPSK20M | Bottom Side   | 26365 | 50  | 0         | 23.0                     | 22.71                          | 0.04             | 0.186                  | 1.07           | 0.20                 |
|          | LTE 25 | QPSK20M | Rear Face     | 26140 | 1   | 0         | 24.0                     | 23.59                          | -0.07            | 1.11                   | 1.10           | 1.22                 |
|          | LTE 25 | QPSK20M | Rear Face     | 26590 | 1   | 0         | 24.0                     | 23.68                          | 0.16             | 0.936                  | 1.08           | 1.01                 |
|          | LTE 25 | QPSK20M | Rear Face     | 26140 | 50  | 0         | 23.0                     | 22.56                          | 0.04             | 0.872                  | 1.11           | 0.96                 |
|          | LTE 25 | QPSK20M | Rear Face     | 26590 | 50  | 0         | 23.0                     | 22.65                          | 0.09             | 0.738                  | 1.08           | 0.80                 |
|          | LTE 25 | QPSK20M | Rear Face     | 26365 | 100 | 0         | 23.0                     | 22.69                          | 0.00             | 0.826                  | 1.07           | 0.89                 |
|          | LTE 25 | QPSK20M | Rear Face     | 26140 | 1   | 0         | 24.0                     | 23.59                          | -0.07            | 1.09                   | 1.10           | 1.20                 |

# FCC SAR Test Report

| Plot No. | Band   | Mode    | Test Position | Ch.   | RB# | RB Offset | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaling Factor | Scaled SAR-1g (W/kg) |
|----------|--------|---------|---------------|-------|-----|-----------|--------------------------|--------------------------------|------------------|------------------------|----------------|----------------------|
|          | LTE 26 | QPSK15M | Front Face    | 26865 | 1   | 37        | 24.0                     | 23.30                          | 0.08             | 0.375                  | 1.17           | 0.44                 |
|          | LTE 26 | QPSK15M | Rear Face     | 26865 | 1   | 37        | 24.0                     | 23.30                          | -0.10            | 0.722                  | 1.17           | 0.85                 |
|          | LTE 26 | QPSK15M | Left Side     | 26865 | 1   | 37        | 24.0                     | 23.30                          | 0.00             | 0.312                  | 1.17           | 0.37                 |
|          | LTE 26 | QPSK15M | Right Side    | 26865 | 1   | 37        | 24.0                     | 23.30                          | 0.06             | 0.601                  | 1.17           | 0.71                 |
|          | LTE 26 | QPSK15M | Bottom Side   | 26865 | 1   | 37        | 24.0                     | 23.30                          | 0.08             | 0.083                  | 1.17           | 0.10                 |
|          | LTE 26 | QPSK15M | Front Face    | 26865 | 36  | 0         | 23.0                     | 22.19                          | -0.02            | 0.321                  | 1.21           | 0.39                 |
|          | LTE 26 | QPSK15M | Rear Face     | 26865 | 36  | 0         | 23.0                     | 22.19                          | 0.02             | 0.618                  | 1.21           | 0.74                 |
|          | LTE 26 | QPSK15M | Left Side     | 26865 | 36  | 0         | 23.0                     | 22.19                          | 0.01             | 0.267                  | 1.21           | 0.32                 |
|          | LTE 26 | QPSK15M | Right Side    | 26865 | 36  | 0         | 23.0                     | 22.19                          | 0.03             | 0.514                  | 1.21           | 0.62                 |
|          | LTE 26 | QPSK15M | Bottom Side   | 26865 | 36  | 0         | 23.0                     | 22.19                          | 0.01             | 0.071                  | 1.21           | 0.09                 |
|          | LTE 26 | QPSK15M | Rear Face     | 26765 | 1   | 37        | 24.0                     | 23.26                          | -0.08            | 0.873                  | 1.19           | 1.04                 |
| 62       | LTE 26 | QPSK15M | Rear Face     | 26965 | 1   | 37        | 24.0                     | 23.22                          | 0.02             | 0.929                  | 1.20           | 1.11                 |
|          | LTE 26 | QPSK15M | Rear Face     | 26865 | 75  | 0         | 23.0                     | 22.09                          | 0.06             | 0.732                  | 1.23           | 0.90                 |
|          | LTE 26 | QPSK15M | Rear Face     | 26965 | 1   | 37        | 24.0                     | 23.30                          | -0.01            | 0.899                  | 1.17           | 1.06                 |
|          | LTE 38 | QPSK20M | Front Face    | 37850 | 1   | 50        | 24.0                     | 23.31                          | -0.12            | 0.154                  | 1.17           | 0.18                 |
|          | LTE 38 | QPSK20M | Rear Face     | 37850 | 1   | 50        | 24.0                     | 23.31                          | 0.04             | 0.376                  | 1.17           | 0.44                 |
|          | LTE 38 | QPSK20M | Left Side     | 37850 | 1   | 50        | 24.0                     | 23.31                          | -0.01            | 0.066                  | 1.17           | 0.08                 |
|          | LTE 38 | QPSK20M | Right Side    | 37850 | 1   | 50        | 24.0                     | 23.31                          | -0.01            | 0.301                  | 1.17           | 0.35                 |
|          | LTE 38 | QPSK20M | Bottom Side   | 37850 | 1   | 50        | 24.0                     | 23.31                          | 0.16             | 0.728                  | 1.17           | 0.85                 |
|          | LTE 38 | QPSK20M | Front Face    | 37850 | 50  | 25        | 23.0                     | 22.67                          | -0.03            | 0.123                  | 1.08           | 0.13                 |
|          | LTE 38 | QPSK20M | Rear Face     | 37850 | 50  | 25        | 23.0                     | 22.67                          | 0.01             | 0.301                  | 1.08           | 0.32                 |
|          | LTE 38 | QPSK20M | Left Side     | 37850 | 50  | 25        | 23.0                     | 22.67                          | 0.03             | 0.053                  | 1.08           | 0.06                 |
|          | LTE 38 | QPSK20M | Right Side    | 37850 | 50  | 25        | 23.0                     | 22.67                          | 0.00             | 0.241                  | 1.08           | 0.26                 |
|          | LTE 38 | QPSK20M | Bottom Side   | 37850 | 50  | 25        | 23.0                     | 22.67                          | 0.17             | 0.582                  | 1.08           | 0.63                 |
|          | LTE 38 | QPSK20M | Bottom Side   | 38000 | 1   | 50        | 24.0                     | 23.18                          | 0.08             | 0.799                  | 1.21           | 0.97                 |
| 63       | LTE 38 | QPSK20M | Bottom Side   | 38150 | 1   | 50        | 24.0                     | 23.09                          | -0.05            | 0.825                  | 1.23           | 1.02                 |
|          | LTE 38 | QPSK20M | Bottom Side   | 37850 | 100 | 0         | 23.0                     | 22.50                          | 0.09             | 0.585                  | 1.12           | 0.66                 |
|          | LTE 38 | QPSK20M | Bottom Side   | 38150 | 1   | 50        | 24.0                     | 23.09                          | -0.01            | 0.819                  | 1.23           | 1.01                 |
|          | LTE 41 | QPSK20M | Front Face    | 40620 | 1   | 50        | 25.0                     | 24.57                          | 0.08             | 0.145                  | 1.10           | 0.16                 |
|          | LTE 41 | QPSK20M | Rear Face     | 40620 | 1   | 50        | 25.0                     | 24.57                          | 0.00             | 0.416                  | 1.10           | 0.46                 |
|          | LTE 41 | QPSK20M | Left Side     | 40620 | 1   | 50        | 25.0                     | 24.57                          | 0.03             | 0.062                  | 1.10           | 0.07                 |
|          | LTE 41 | QPSK20M | Right Side    | 40620 | 1   | 50        | 25.0                     | 24.57                          | -0.10            | 0.283                  | 1.10           | 0.31                 |
|          | LTE 41 | QPSK20M | Bottom Side   | 40620 | 1   | 50        | 25.0                     | 24.57                          | 0.09             | 0.819                  | 1.10           | 0.90                 |
|          | LTE 41 | QPSK20M | Front Face    | 40620 | 50  | 0         | 24.0                     | 23.46                          | 0.03             | 0.104                  | 1.13           | 0.12                 |
|          | LTE 41 | QPSK20M | Rear Face     | 40620 | 50  | 0         | 24.0                     | 23.46                          | 0.00             | 0.3                    | 1.13           | 0.34                 |
|          | LTE 41 | QPSK20M | Left Side     | 40620 | 50  | 0         | 24.0                     | 23.46                          | -0.03            | 0.045                  | 1.13           | 0.05                 |
|          | LTE 41 | QPSK20M | Right Side    | 40620 | 50  | 0         | 24.0                     | 23.46                          | 0.02             | 0.204                  | 1.13           | 0.23                 |
|          | LTE 41 | QPSK20M | Bottom Side   | 40620 | 50  | 0         | 24.0                     | 23.46                          | 0.09             | 0.64                   | 1.13           | 0.72                 |
|          | LTE 41 | QPSK20M | Bottom Side   | 39750 | 1   | 50        | 25.0                     | 24.08                          | 0.09             | 0.53                   | 1.24           | 0.66                 |
|          | LTE 41 | QPSK20M | Bottom Side   | 40185 | 1   | 50        | 25.0                     | 24.20                          | 0.05             | 0.67                   | 1.20           | 0.81                 |
| 64       | LTE 41 | QPSK20M | Bottom Side   | 41055 | 1   | 50        | 25.0                     | 24.26                          | 0.08             | 0.925                  | 1.19           | 1.10                 |
|          | LTE 41 | QPSK20M | Bottom Side   | 41490 | 1   | 50        | 25.0                     | 24.11                          | -0.10            | 0.839                  | 1.23           | 1.03                 |
|          | LTE 41 | QPSK20M | Bottom Side   | 40620 | 100 | 0         | 24.0                     | 23.38                          | 0.03             | 0.71                   | 1.15           | 0.82                 |
|          | LTE 41 | QPSK20M | Bottom Side   | 41055 | 1   | 50        | 25.0                     | 24.26                          | 0.01             | 0.919                  | 1.19           | 1.09                 |

# FCC SAR Test Report

| Plot No. | Band   | Mode    | Test Position | Ch.    | RB# | RB Offset | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaling Factor | Scaled SAR-1g (W/kg) |
|----------|--------|---------|---------------|--------|-----|-----------|--------------------------|--------------------------------|------------------|------------------------|----------------|----------------------|
|          | LTE 66 | QPSK20M | Front Face    | 132572 | 1   | 0         | 24.0                     | 22.63                          | 0.01             | 0.354                  | 1.37           | 0.49                 |
|          | LTE 66 | QPSK20M | Rear Face     | 132572 | 1   | 0         | 24.0                     | 22.63                          | -0.17            | 0.826                  | 1.37           | 1.13                 |
|          | LTE 66 | QPSK20M | Left Side     | 132572 | 1   | 0         | 24.0                     | 22.63                          | -0.09            | 0.123                  | 1.37           | 0.17                 |
|          | LTE 66 | QPSK20M | Right Side    | 132572 | 1   | 0         | 24.0                     | 22.63                          | 0.05             | 0.487                  | 1.37           | 0.67                 |
|          | LTE 66 | QPSK20M | Bottom Side   | 132572 | 1   | 0         | 24.0                     | 22.63                          | -0.08            | 0.363                  | 1.37           | 0.50                 |
|          | LTE 66 | QPSK20M | Front Face    | 132572 | 50  | 0         | 23.0                     | 21.57                          | -0.06            | 0.28                   | 1.39           | 0.39                 |
|          | LTE 66 | QPSK20M | Rear Face     | 132572 | 50  | 0         | 23.0                     | 21.57                          | -0.01            | 0.583                  | 1.39           | 0.81                 |
|          | LTE 66 | QPSK20M | Left Side     | 132572 | 50  | 0         | 23.0                     | 21.57                          | -0.03            | 0.087                  | 1.39           | 0.12                 |
|          | LTE 66 | QPSK20M | Right Side    | 132572 | 50  | 0         | 23.0                     | 21.57                          | 0.02             | 0.343                  | 1.39           | 0.48                 |
|          | LTE 66 | QPSK20M | Bottom Side   | 132572 | 50  | 0         | 23.0                     | 21.57                          | -0.01            | 0.256                  | 1.39           | 0.36                 |
| 65       | LTE 66 | QPSK20M | Rear Face     | 132072 | 1   | 0         | 24.0                     | 22.21                          | 0.01             | 0.852                  | 1.51           | 1.29                 |
|          | LTE 66 | QPSK20M | Rear Face     | 132422 | 1   | 0         | 24.0                     | 22.43                          | 0.08             | 0.849                  | 1.44           | 1.22                 |
|          | LTE 66 | QPSK20M | Rear Face     | 132572 | 100 | 0         | 23.0                     | 21.46                          | -0.04            | 0.595                  | 1.43           | 0.85                 |
|          | LTE 66 | QPSK20M | Rear Face     | 132072 | 1   | 0         | 24.0                     | 22.21                          | 0.03             | 0.847                  | 1.51           | 1.28                 |

| Plot No. | Band    | Mode | Test Position | Ch. | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaling Factor | Scaled SAR-1g (W/kg) |
|----------|---------|------|---------------|-----|--------------------------|--------------------------------|------------------|------------------------|----------------|----------------------|
|          | 802.11b | -    | Front Face    | 1   | 16.0                     | 15.10                          | 0.07             | 0.00155                | 1.23           | 0.00                 |
| 66       | 802.11b | -    | Rear Face     | 1   | 16.0                     | 15.10                          | 0.09             | 0.024                  | 1.23           | 0.03                 |
|          | 802.11b | -    | Left Side     | 1   | 16.0                     | 15.10                          | 0.04             | 0.013                  | 1.23           | 0.02                 |
|          | 802.11b | -    | Top Side      | 1   | 16.0                     | 15.10                          | 0.06             | 0.012                  | 1.23           | 0.01                 |
|          | 802.11a | -    | Front Face    | 40  | 16.5                     | 16.20                          | 0.00             | 0.108                  | 1.07           | 0.12                 |
| 67       | 802.11a | -    | Rear Face     | 40  | 16.5                     | 16.20                          | 0.07             | 0.14                   | 1.07           | 0.15                 |
|          | 802.11a | -    | Left Side     | 40  | 16.5                     | 16.20                          | 0.05             | 0.109                  | 1.07           | 0.12                 |
|          | 802.11a | -    | Top Side      | 40  | 16.5                     | 16.20                          | 0.07             | 0.081                  | 1.07           | 0.09                 |
|          | 802.11a | -    | Front Face    | 157 | 17.0                     | 16.62                          | -0.03            | 0.072                  | 1.09           | 0.08                 |
| 68       | 802.11a | -    | Rear Face     | 157 | 17.0                     | 16.62                          | 0.00             | 0.197                  | 1.09           | 0.22                 |
|          | 802.11a | -    | Left Side     | 157 | 17.0                     | 16.62                          | 0.01             | 0.152                  | 1.09           | 0.17                 |
|          | 802.11a | -    | Top Side      | 157 | 17.0                     | 16.62                          | 0.01             | 0.113                  | 1.09           | 0.12                 |



## FCC SAR Test Report

### 4.7.5 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are  $\leq 1.45$  W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is  $\leq 1.10$ , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is  $< 0.80$  W/kg, repeated measurement is not required.
2. When the highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$ , or when the original or repeated measurement is  $\geq 1.45$  W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ , and the original, first or second repeated measurement is  $\geq 1.5$  W/kg, perform a third repeated measurement.

| Band      | Mode     | Test Position | Ch.    | Original Measured SAR-1g (W/kg) | 1st Repeated SAR-1g (W/kg) | L/S Ratio | 2nd Repeated SAR-1g (W/kg) | L/S Ratio | 3rd Repeated SAR-1g (W/kg) | L/S Ratio |
|-----------|----------|---------------|--------|---------------------------------|----------------------------|-----------|----------------------------|-----------|----------------------------|-----------|
| GSM850    | GPRS11   | Rear Face     | 251    | 0.865                           | 0.857                      | 1.01      | N/A                        | N/A       | N/A                        | N/A       |
| GSM1900   | GPRS12   | Rear Face     | 512    | 1.11                            | 1.09                       | 1.02      | N/A                        | N/A       | N/A                        | N/A       |
| WCDMA II  | RMC12.2K | Rear Face     | 9262   | 0.863                           | 0.855                      | 1.01      | N/A                        | N/A       | N/A                        | N/A       |
| WCDMA IV  | RMC12.2K | Rear Face     | 1312   | 1.03                            | 1                          | 1.03      | N/A                        | N/A       | N/A                        | N/A       |
| WCDMA V   | RMC12.2K | Rear Face     | 4132   | 0.806                           | 0.799                      | 1.01      | N/A                        | N/A       | N/A                        | N/A       |
| WCDMA V   | RMC12.2K | Right Cheek   | 4182   | 0.866                           | 0.858                      | 1.01      | N/A                        | N/A       | N/A                        | N/A       |
| CDMA BC0  | RC3+SO32 | Rear Face     | 384    | 0.86                            | 0.821                      | 1.01      | N/A                        | N/A       | N/A                        | N/A       |
| CDMA BC0  | RC3+SO55 | Left Cheek    | 1013   | 0.863                           | 0.855                      | 1.01      | N/A                        | N/A       | N/A                        | N/A       |
| CDMA BC1  | RC3+SO32 | Rear Face     | 600    | 0.81                            | 0.789                      | 1.03      | N/A                        | N/A       | N/A                        | N/A       |
| CDMA BC10 | RC3+SO32 | Rear Face     | 684    | 0.888                           | 0.876                      | 1.01      | N/A                        | N/A       | N/A                        | N/A       |
| CDMA BC10 | RC3+SO55 | Left Cheek    | 580    | 0.901                           | 0.891                      | 1.01      | N/A                        | N/A       | N/A                        | N/A       |
| LTE 2     | QPSK20M  | Rear Face     | 18900  | 1.15                            | 1.12                       | 1.03      | N/A                        | N/A       | N/A                        | N/A       |
| LTE 5     | QPSK10M  | Left Cheek    | 20450  | 0.83                            | 0.821                      | 1.01      | N/A                        | N/A       | N/A                        | N/A       |
| LTE 5     | QPSK10M  | Rear Face     | 20525  | 0.921                           | 0.888                      | 1.04      | N/A                        | N/A       | N/A                        | N/A       |
| LTE 13    | QPSK10M  | Rear Face     | 23230  | 0.846                           | 0.832                      | 1.02      | N/A                        | N/A       | N/A                        | N/A       |
| LTE 14    | QPSK10M  | Rear Face     | 23330  | 0.702                           | 0.692                      | 1.01      | N/A                        | N/A       | N/A                        | N/A       |
| LTE 25    | QPSK20M  | Rear Face     | 26140  | 1.11                            | 1.09                       | 1.02      | N/A                        | N/A       | N/A                        | N/A       |
| LTE 26    | QPSK15M  | Right Cheek   | 26865  | 0.901                           | 0.889                      | 1.01      | N/A                        | N/A       | N/A                        | N/A       |
| LTE 26    | QPSK15M  | Rear Face     | 26965  | 0.929                           | 0.899                      | 1.03      | N/A                        | N/A       | N/A                        | N/A       |
| LTE 38    | QPSK20M  | Bottom Side   | 38150  | 0.825                           | 0.819                      | 1.01      | N/A                        | N/A       | N/A                        | N/A       |
| LTE 41    | QPSK20M  | Right Cheek   | 41490  | 1.14                            | 1.09                       | 1.05      | N/A                        | N/A       | N/A                        | N/A       |
| LTE 41    | QPSK20M  | Bottom Side   | 41055  | 0.925                           | 0.919                      | 1.01      | N/A                        | N/A       | N/A                        | N/A       |
| LTE 66    | QPSK20M  | Rear Face     | 132072 | 0.852                           | 0.847                      | 1.01      | N/A                        | N/A       | N/A                        | N/A       |

## FCC SAR Test Report

### 4.7.6 Simultaneous Multi-band Transmission Evaluation

#### <Estimated SAR Calculation>

According to KDB 447498 D01, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR was estimated according to following formula to result in substantially conservative SAR values of  $\leq 0.4$  W/kg to determine simultaneous transmission SAR test exclusion.

$$\text{Estimated SAR} = \frac{\text{Max. Tune up Power}_{(\text{mW})}}{\text{Min. Test Separation Distance}_{(\text{mm})}} \times \frac{\sqrt{f_{(\text{GHz})}}}{7.5}$$

If the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is used for estimated SAR calculation. When the test separation distance is  $> 50$  mm, the 0.4 W/kg is used for SAR-1g.

| Mode / Band | Frequency (GHz) | Max. Tune-up Power (dBm) | Test Position | Separation Distance (mm) | Estimated SAR (W/kg) |
|-------------|-----------------|--------------------------|---------------|--------------------------|----------------------|
| BT (DSS)    | 2.48            | 12.5                     | Body-worn     | 15                       | 0.25                 |

#### Note:

1. The separation distance is determined from the outer housing of the EUT to the user.
2. When standalone SAR testing is not required, an estimated SAR can be applied to determine simultaneous transmission SAR test exclusion.

## FCC SAR Test Report

### <SAR Summation Analysis>

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR<sub>1g</sub> of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR<sub>1g</sub> 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR<sub>1g</sub> is greater than the SAR limit (SAR<sub>1g</sub> 1.6 W/kg), SAR test exclusion is determined by the SPLSR.

| No. | Conditions<br>(SAR1 + SAR2) | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | SAR<br>Summation | SPLSR<br>Analysis           |
|-----|-----------------------------|-----------------------|------------------|--------------|--------------|------------------|-----------------------------|
| 1   | GSM850<br>+<br>WLAN (DTS)   | Head                  | Right Cheek      | 0.64         | 0.02         | 0.66             | ΣSAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.29         | 0.01         | 0.30             | ΣSAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.63         | 0.02         | 0.65             | ΣSAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.29         | 0.02         | 0.31             | ΣSAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.29         | 0.01         | 0.30             | ΣSAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.49         | 0.01         | 0.50             | ΣSAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.41         | 0.00         | 0.41             | ΣSAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.88         | 0.03         | 0.91             | ΣSAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.37         | 0.02         | 0.39             | ΣSAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.50         | 0.00         | 0.50             | ΣSAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.01         | 0.01             | ΣSAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.09         | 0.00         | 0.09             | ΣSAR < 1.6,<br>Not required |
| 2   | GSM850<br>+<br>WLAN (NII)   | Head                  | Right Cheek      | 0.64         | 0.13         | 0.77             | ΣSAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.29         | 0.07         | 0.36             | ΣSAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.63         | 0.26         | 0.89             | ΣSAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.29         | 0.05         | 0.34             | ΣSAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.29         | 0.09         | 0.38             | ΣSAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.49         | 0.25         | 0.74             | ΣSAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.41         | 0.12         | 0.53             | ΣSAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.88         | 0.22         | 1.10             | ΣSAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.37         | 0.17         | 0.54             | ΣSAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.50         | 0.00         | 0.50             | ΣSAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.12         | 0.12             | ΣSAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.09         | 0.00         | 0.09             | ΣSAR < 1.6,<br>Not required |
| 3   | GSM 850<br>+<br>BT (DSS)    | Body-Worn             | Front Face       | 0.29         | 0.25         | 0.54             | ΣSAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.49         | 0.25         | 0.74             | ΣSAR < 1.6,<br>Not required |



# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2)         | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|-------------------------------------|-----------------------|------------------|--------------|--------------|------------------|-------------------------------------|
| 4   | <b>GSM1900<br/>+<br/>WLAN (DTS)</b> | Head                  | Right Cheek      | 0.38         | 0.02         | 0.40             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Right Tilted     | 0.18         | 0.01         | 0.19             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Left Cheek       | 0.35         | 0.02         | 0.37             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Left Tilted      | 0.12         | 0.02         | 0.14             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     | Body-Worn             | Front Face       | 0.34         | 0.01         | 0.35             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Rear Face        | 0.67         | 0.01         | 0.68             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     | Hotspot               | Front Face       | 0.54         | 0.00         | 0.54             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Rear Face        | 1.30         | 0.03         | 1.33             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Left Side        | 0.16         | 0.02         | 0.18             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Right Side       | 0.68         | 0.00         | 0.68             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Top Side         | 0.00         | 0.01         | 0.01             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Bottom Side      | 0.41         | 0.00         | 0.41             | $\Sigma$ SAR < 1.6,<br>Not required |
| 5   | <b>GSM1900<br/>+<br/>WLAN (NII)</b> | Head                  | Right Cheek      | 0.38         | 0.13         | 0.51             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Right Tilted     | 0.18         | 0.07         | 0.25             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Left Cheek       | 0.35         | 0.26         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Left Tilted      | 0.12         | 0.05         | 0.17             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     | Body-Worn             | Front Face       | 0.34         | 0.09         | 0.43             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Rear Face        | 0.67         | 0.25         | 0.92             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     | Hotspot               | Front Face       | 0.54         | 0.12         | 0.66             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Rear Face        | 1.30         | 0.22         | 1.52             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Left Side        | 0.16         | 0.17         | 0.33             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Right Side       | 0.68         | 0.00         | 0.68             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Top Side         | 0.00         | 0.12         | 0.12             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Bottom Side      | 0.41         | 0.00         | 0.41             | $\Sigma$ SAR < 1.6,<br>Not required |
| 6   | <b>GSM1900<br/>+<br/>BT (DSS)</b>   | Body-Worn             | Front Face       | 0.34         | 0.25         | 0.59             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Rear Face        | 0.67         | 0.25         | 0.92             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2) | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|-----------------------------|-----------------------|------------------|--------------|--------------|------------------|-------------------------------------|
| 7   | WCDMA II<br>+<br>WLAN (DTS) | Head                  | Right Cheek      | 0.31         | 0.02         | 0.33             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.15         | 0.01         | 0.16             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.33         | 0.02         | 0.35             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.11         | 0.02         | 0.13             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.27         | 0.01         | 0.28             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.51         | 0.01         | 0.52             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.45         | 0.00         | 0.45             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.99         | 0.03         | 1.02             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.11         | 0.02         | 0.13             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.54         | 0.00         | 0.54             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.01         | 0.01             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.25         | 0.00         | 0.25             | $\Sigma$ SAR < 1.6,<br>Not required |
| 8   | WCDMA II<br>+<br>WLAN (NII) | Head                  | Right Cheek      | 0.31         | 0.13         | 0.44             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.15         | 0.07         | 0.22             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.33         | 0.26         | 0.59             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.11         | 0.05         | 0.16             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.27         | 0.09         | 0.36             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.51         | 0.25         | 0.76             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.45         | 0.12         | 0.57             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.99         | 0.22         | 1.21             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.11         | 0.17         | 0.28             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.54         | 0.00         | 0.54             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.12         | 0.12             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.25         | 0.00         | 0.25             | $\Sigma$ SAR < 1.6,<br>Not required |
| 9   | WCDMA II<br>+<br>BT (DSS)   | Body-Worn             | Front Face       | 0.27         | 0.25         | 0.52             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.51         | 0.25         | 0.76             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2)          | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|--------------------------------------|-----------------------|------------------|--------------|--------------|------------------|-------------------------------------|
| 10  | <b>WCDMA IV<br/>+<br/>WLAN (DTS)</b> | Head                  | Right Cheek      | 0.38         | 0.02         | 0.40             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                      |                       | Right Tilted     | 0.11         | 0.01         | 0.12             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                      |                       | Left Cheek       | 0.30         | 0.02         | 0.32             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                      |                       | Left Tilted      | 0.08         | 0.02         | 0.10             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                      | Body-Worn             | Front Face       | 0.33         | 0.01         | 0.34             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                      |                       | Rear Face        | 0.61         | 0.01         | 0.62             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                      | Hotspot               | Front Face       | 0.34         | 0.00         | 0.34             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                      |                       | Rear Face        | 1.15         | 0.03         | 1.18             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                      |                       | Left Side        | 0.09         | 0.02         | 0.11             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                      |                       | Right Side       | 0.46         | 0.00         | 0.46             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                      |                       | Top Side         | 0.00         | 0.01         | 0.01             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                      |                       | Bottom Side      | 0.21         | 0.00         | 0.21             | $\Sigma$ SAR < 1.6,<br>Not required |
| 11  | <b>WCDMA IV<br/>+<br/>WLAN (NII)</b> | Head                  | Right Cheek      | 0.38         | 0.13         | 0.51             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                      |                       | Right Tilted     | 0.11         | 0.07         | 0.18             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                      |                       | Left Cheek       | 0.30         | 0.26         | 0.56             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                      |                       | Left Tilted      | 0.08         | 0.05         | 0.13             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                      | Body-Worn             | Front Face       | 0.33         | 0.09         | 0.42             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                      |                       | Rear Face        | 0.61         | 0.25         | 0.86             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                      | Hotspot               | Front Face       | 0.34         | 0.12         | 0.46             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                      |                       | Rear Face        | 1.15         | 0.22         | 1.37             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                      |                       | Left Side        | 0.09         | 0.17         | 0.26             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                      |                       | Right Side       | 0.46         | 0.00         | 0.46             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                      |                       | Top Side         | 0.00         | 0.12         | 0.12             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                      |                       | Bottom Side      | 0.21         | 0.00         | 0.21             | $\Sigma$ SAR < 1.6,<br>Not required |
| 12  | <b>WCDMA IV<br/>+<br/>BT (DSS)</b>   | Body-Worn             | Front Face       | 0.33         | 0.25         | 0.58             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                      |                       | Rear Face        | 0.61         | 0.25         | 0.86             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2)         | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|-------------------------------------|-----------------------|------------------|--------------|--------------|------------------|-------------------------------------|
| 13  | <b>WCDMA V<br/>+<br/>WLAN (DTS)</b> | Head                  | Right Cheek      | 1.00         | 0.02         | 1.02             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Right Tilted     | 0.37         | 0.01         | 0.38             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Left Cheek       | 0.89         | 0.02         | 0.91             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Left Tilted      | 0.37         | 0.02         | 0.39             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     | Body-Worn             | Front Face       | 0.54         | 0.01         | 0.55             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Rear Face        | 0.92         | 0.01         | 0.93             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     | Hotspot               | Front Face       | 0.54         | 0.00         | 0.54             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Rear Face        | 1.21         | 0.03         | 1.24             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Left Side        | 0.53         | 0.02         | 0.55             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Right Side       | 0.83         | 0.00         | 0.83             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Top Side         | 0.00         | 0.01         | 0.01             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Bottom Side      | 0.09         | 0.00         | 0.09             | $\Sigma$ SAR < 1.6,<br>Not required |
| 14  | <b>WCDMA V<br/>+<br/>WLAN (NII)</b> | Head                  | Right Cheek      | 1.00         | 0.13         | 1.13             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Right Tilted     | 0.37         | 0.07         | 0.44             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Left Cheek       | 0.89         | 0.26         | 1.15             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Left Tilted      | 0.37         | 0.05         | 0.42             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     | Body-Worn             | Front Face       | 0.54         | 0.09         | 0.63             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Rear Face        | 0.92         | 0.25         | 1.17             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     | Hotspot               | Front Face       | 0.54         | 0.12         | 0.66             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Rear Face        | 1.21         | 0.22         | 1.43             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Left Side        | 0.53         | 0.17         | 0.70             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Right Side       | 0.83         | 0.00         | 0.83             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Top Side         | 0.00         | 0.12         | 0.12             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Bottom Side      | 0.09         | 0.00         | 0.09             | $\Sigma$ SAR < 1.6,<br>Not required |
| 15  | <b>WCDMA V<br/>+<br/>BT (DSS)</b>   | Body-Worn             | Front Face       | 0.54         | 0.25         | 0.79             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                     |                       | Rear Face        | 0.92         | 0.25         | 1.17             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2) | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|-----------------------------|-----------------------|------------------|--------------|--------------|------------------|-------------------------------------|
| 16  | CDMA BC0<br>+<br>WLAN (DTS) | Head                  | Right Cheek      | 0.86         | 0.02         | 0.88             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.37         | 0.01         | 0.38             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.91         | 0.02         | 0.93             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.41         | 0.02         | 0.43             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.53         | 0.01         | 0.54             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.90         | 0.01         | 0.91             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.38         | 0.00         | 0.38             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.70         | 0.03         | 0.73             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.45         | 0.02         | 0.47             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.44         | 0.00         | 0.44             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.01         | 0.01             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.06         | 0.00         | 0.06             | $\Sigma$ SAR < 1.6,<br>Not required |
| 17  | CDMA BC0<br>+<br>WLAN (NII) | Head                  | Right Cheek      | 0.86         | 0.13         | 0.99             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.37         | 0.07         | 0.44             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.91         | 0.26         | 1.17             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.41         | 0.05         | 0.46             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.53         | 0.09         | 0.62             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.90         | 0.25         | 1.15             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.38         | 0.12         | 0.50             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.70         | 0.22         | 0.92             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.45         | 0.17         | 0.62             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.44         | 0.00         | 0.44             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.12         | 0.12             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.06         | 0.00         | 0.06             | $\Sigma$ SAR < 1.6,<br>Not required |
| 18  | CDMA BC0<br>+<br>BT (DSS)   | Body-Worn             | Front Face       | 0.53         | 0.25         | 0.78             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.90         | 0.25         | 1.15             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2) | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|-----------------------------|-----------------------|------------------|--------------|--------------|------------------|-------------------------------------|
| 19  | CDMA BC1<br>+<br>WLAN (DTS) | Head                  | Right Cheek      | 0.29         | 0.02         | 0.31             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.14         | 0.01         | 0.15             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.31         | 0.02         | 0.33             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.10         | 0.02         | 0.12             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.35         | 0.01         | 0.36             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.84         | 0.01         | 0.85             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.30         | 0.00         | 0.30             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.75         | 0.03         | 0.78             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.09         | 0.02         | 0.11             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.35         | 0.00         | 0.35             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.01         | 0.01             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.16         | 0.00         | 0.16             | $\Sigma$ SAR < 1.6,<br>Not required |
| 20  | CDMA BC1<br>+<br>WLAN (NII) | Head                  | Right Cheek      | 0.29         | 0.13         | 0.42             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.14         | 0.07         | 0.21             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.31         | 0.26         | 0.57             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.10         | 0.05         | 0.15             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.35         | 0.09         | 0.44             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.84         | 0.25         | 1.09             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.30         | 0.12         | 0.42             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.75         | 0.22         | 0.97             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.09         | 0.17         | 0.26             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.35         | 0.00         | 0.35             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.12         | 0.12             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.16         | 0.00         | 0.16             | $\Sigma$ SAR < 1.6,<br>Not required |
| 21  | CDMA BC1<br>+<br>BT (DSS)   | Body-Worn             | Front Face       | 0.35         | 0.25         | 0.60             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.84         | 0.25         | 1.09             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2)  | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|------------------------------|-----------------------|------------------|--------------|--------------|------------------|-------------------------------------|
| 22  | CDMA BC10<br>+<br>WLAN (DTS) | Head                  | Right Cheek      | 0.92         | 0.02         | 0.94             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                              |                       | Right Tilted     | 0.43         | 0.01         | 0.44             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                              |                       | Left Cheek       | 0.94         | 0.02         | 0.96             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                              |                       | Left Tilted      | 0.45         | 0.02         | 0.47             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                              | Body-Worn             | Front Face       | 0.55         | 0.01         | 0.56             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                              |                       | Rear Face        | 0.97         | 0.01         | 0.98             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                              | Hotspot               | Front Face       | 0.36         | 0.00         | 0.36             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                              |                       | Rear Face        | 0.71         | 0.03         | 0.74             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                              |                       | Left Side        | 0.29         | 0.02         | 0.31             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                              |                       | Right Side       | 0.44         | 0.00         | 0.44             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                              |                       | Top Side         | 0.00         | 0.01         | 0.01             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                              |                       | Bottom Side      | 0.06         | 0.00         | 0.06             | $\Sigma$ SAR < 1.6,<br>Not required |
| 23  | CDMA BC10<br>+<br>WLAN (NII) | Head                  | Right Cheek      | 0.92         | 0.13         | 1.05             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                              |                       | Right Tilted     | 0.43         | 0.07         | 0.50             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                              |                       | Left Cheek       | 0.94         | 0.26         | 1.20             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                              |                       | Left Tilted      | 0.45         | 0.05         | 0.50             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                              | Body-Worn             | Front Face       | 0.55         | 0.09         | 0.64             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                              |                       | Rear Face        | 0.97         | 0.25         | 1.22             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                              | Hotspot               | Front Face       | 0.36         | 0.12         | 0.48             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                              |                       | Rear Face        | 0.71         | 0.22         | 0.93             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                              |                       | Left Side        | 0.29         | 0.17         | 0.46             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                              |                       | Right Side       | 0.44         | 0.00         | 0.44             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                              |                       | Top Side         | 0.00         | 0.12         | 0.12             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                              |                       | Bottom Side      | 0.06         | 0.00         | 0.06             | $\Sigma$ SAR < 1.6,<br>Not required |
| 24  | CDMA BC10<br>+<br>BT (DSS)   | Body-Worn             | Front Face       | 0.55         | 0.25         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                              |                       | Rear Face        | 0.97         | 0.25         | 1.22             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2) | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|-----------------------------|-----------------------|------------------|--------------|--------------|------------------|-------------------------------------|
| 25  | LTE 2<br>+<br>WLAN (DTS)    | Head                  | Right Cheek      | 0.19         | 0.02         | 0.21             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.09         | 0.01         | 0.10             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.20         | 0.02         | 0.22             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.06         | 0.02         | 0.08             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.25         | 0.01         | 0.26             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.61         | 0.01         | 0.62             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.41         | 0.00         | 0.41             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 1.18         | 0.03         | 1.21             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.11         | 0.02         | 0.13             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.55         | 0.00         | 0.55             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.01         | 0.01             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.25         | 0.00         | 0.25             | $\Sigma$ SAR < 1.6,<br>Not required |
| 26  | LTE 2<br>+<br>WLAN (NII)    | Head                  | Right Cheek      | 0.19         | 0.13         | 0.32             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.09         | 0.07         | 0.16             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.20         | 0.26         | 0.46             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.06         | 0.05         | 0.11             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.25         | 0.09         | 0.34             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.61         | 0.25         | 0.86             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.41         | 0.12         | 0.53             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 1.18         | 0.22         | 1.40             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.11         | 0.17         | 0.28             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.55         | 0.00         | 0.55             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.12         | 0.12             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.25         | 0.00         | 0.25             | $\Sigma$ SAR < 1.6,<br>Not required |
| 27  | LTE 2<br>+<br>BT (DSS)      | Body-Worn             | Front Face       | 0.25         | 0.25         | 0.50             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.61         | 0.25         | 0.86             | $\Sigma$ SAR < 1.6,<br>Not required |



# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2) | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|-----------------------------|-----------------------|------------------|--------------|--------------|------------------|-------------------------------------|
| 28  | LTE 4<br>+<br>WLAN (DTS)    | Head                  | Right Cheek      | 0.47         | 0.02         | 0.49             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.14         | 0.01         | 0.15             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.38         | 0.02         | 0.40             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.10         | 0.02         | 0.12             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.26         | 0.01         | 0.27             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.62         | 0.01         | 0.63             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.38         | 0.00         | 0.38             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.71         | 0.03         | 0.74             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.11         | 0.02         | 0.13             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.45         | 0.00         | 0.45             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.01         | 0.01             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.32         | 0.00         | 0.32             | $\Sigma$ SAR < 1.6,<br>Not required |
| 29  | LTE 4<br>+<br>WLAN (NII)    | Head                  | Right Cheek      | 0.47         | 0.13         | 0.60             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.14         | 0.07         | 0.21             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.38         | 0.26         | 0.64             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.10         | 0.05         | 0.15             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.26         | 0.09         | 0.35             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.62         | 0.25         | 0.87             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.38         | 0.12         | 0.50             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.71         | 0.22         | 0.93             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.11         | 0.17         | 0.28             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.45         | 0.00         | 0.45             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.12         | 0.12             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.32         | 0.00         | 0.32             | $\Sigma$ SAR < 1.6,<br>Not required |
| 30  | LTE 4<br>+<br>BT (DSS)      | Body-Worn             | Front Face       | 0.26         | 0.25         | 0.51             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.62         | 0.25         | 0.87             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2) | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|-----------------------------|-----------------------|------------------|--------------|--------------|------------------|-------------------------------------|
| 31  | LTE 5<br>+<br>WLAN (DTS)    | Head                  | Right Cheek      | 0.97         | 0.02         | 0.99             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.40         | 0.01         | 0.41             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.98         | 0.02         | 1.00             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.42         | 0.02         | 0.44             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.45         | 0.01         | 0.46             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.76         | 0.01         | 0.77             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.56         | 0.00         | 0.56             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 1.08         | 0.03         | 1.11             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.48         | 0.02         | 0.50             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.67         | 0.00         | 0.67             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.01         | 0.01             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.09         | 0.00         | 0.09             | $\Sigma$ SAR < 1.6,<br>Not required |
| 32  | LTE 5<br>+<br>WLAN (NII)    | Head                  | Right Cheek      | 0.97         | 0.13         | 1.10             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.40         | 0.07         | 0.47             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.98         | 0.26         | 1.24             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.42         | 0.05         | 0.47             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.45         | 0.09         | 0.54             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.76         | 0.25         | 1.01             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.56         | 0.12         | 0.68             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 1.08         | 0.22         | 1.30             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.48         | 0.17         | 0.65             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.67         | 0.00         | 0.67             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.12         | 0.12             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.09         | 0.00         | 0.09             | $\Sigma$ SAR < 1.6,<br>Not required |
| 33  | LTE 5<br>+<br>BT (DSS)      | Body-Worn             | Front Face       | 0.45         | 0.25         | 0.70             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.76         | 0.25         | 1.01             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2) | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|-----------------------------|-----------------------|------------------|--------------|--------------|------------------|-------------------------------------|
| 34  | LTE 12<br>+<br>WLAN (DTS)   | Head                  | Right Cheek      | 0.61         | 0.02         | 0.63             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.23         | 0.01         | 0.24             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.53         | 0.02         | 0.55             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.22         | 0.02         | 0.24             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.12         | 0.01         | 0.13             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.55         | 0.01         | 0.56             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.16         | 0.00         | 0.16             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.78         | 0.03         | 0.81             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.44         | 0.02         | 0.46             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.42         | 0.00         | 0.42             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.01         | 0.01             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.06         | 0.00         | 0.06             | $\Sigma$ SAR < 1.6,<br>Not required |
| 35  | LTE 12<br>+<br>WLAN (NII)   | Head                  | Right Cheek      | 0.61         | 0.13         | 0.74             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.23         | 0.07         | 0.30             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.53         | 0.26         | 0.79             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.22         | 0.05         | 0.27             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.12         | 0.09         | 0.21             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.55         | 0.25         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.16         | 0.12         | 0.28             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.78         | 0.22         | 1.00             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.44         | 0.17         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.42         | 0.00         | 0.42             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.12         | 0.12             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.06         | 0.00         | 0.06             | $\Sigma$ SAR < 1.6,<br>Not required |
| 36  | LTE 12<br>+<br>BT (DSS)     | Body-Worn             | Front Face       | 0.12         | 0.25         | 0.37             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.55         | 0.25         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2) | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|-----------------------------|-----------------------|------------------|--------------|--------------|------------------|-------------------------------------|
| 37  | LTE 13<br>+<br>WLAN (DTS)   | Head                  | Right Cheek      | 0.62         | 0.02         | 0.64             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.25         | 0.01         | 0.26             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.41         | 0.02         | 0.43             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.26         | 0.02         | 0.28             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.35         | 0.01         | 0.36             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.86         | 0.01         | 0.87             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.46         | 0.00         | 0.46             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 1.20         | 0.03         | 1.23             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.35         | 0.02         | 0.37             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.76         | 0.00         | 0.76             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.01         | 0.01             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.10         | 0.00         | 0.10             | $\Sigma$ SAR < 1.6,<br>Not required |
| 38  | LTE 13<br>+<br>WLAN (NII)   | Head                  | Right Cheek      | 0.62         | 0.13         | 0.75             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.25         | 0.07         | 0.32             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.41         | 0.26         | 0.67             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.26         | 0.05         | 0.31             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.35         | 0.09         | 0.44             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.86         | 0.25         | 1.11             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.46         | 0.12         | 0.58             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 1.20         | 0.22         | 1.42             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.35         | 0.17         | 0.52             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.76         | 0.00         | 0.76             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.12         | 0.12             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.10         | 0.00         | 0.10             | $\Sigma$ SAR < 1.6,<br>Not required |
| 39  | LTE 13<br>+<br>BT (DSS)     | Body-Worn             | Front Face       | 0.35         | 0.25         | 0.60             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.86         | 0.25         | 1.11             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2) | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|-----------------------------|-----------------------|------------------|--------------|--------------|------------------|-------------------------------------|
| 40  | LTE 14<br>+<br>WLAN (DTS)   | Head                  | Right Cheek      | 0.70         | 0.02         | 0.72             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.35         | 0.01         | 0.36             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.69         | 0.02         | 0.71             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.33         | 0.02         | 0.35             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.32         | 0.01         | 0.33             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.82         | 0.01         | 0.83             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.43         | 0.00         | 0.43             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 1.12         | 0.03         | 1.15             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.37         | 0.02         | 0.39             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.71         | 0.00         | 0.71             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.01         | 0.01             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.11         | 0.00         | 0.11             | $\Sigma$ SAR < 1.6,<br>Not required |
| 41  | LTE 14<br>+<br>WLAN (NII)   | Head                  | Right Cheek      | 0.70         | 0.13         | 0.83             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.35         | 0.07         | 0.42             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.69         | 0.26         | 0.95             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.33         | 0.05         | 0.38             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.32         | 0.09         | 0.41             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.82         | 0.25         | 1.07             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.43         | 0.12         | 0.55             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 1.12         | 0.22         | 1.34             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.37         | 0.17         | 0.54             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.71         | 0.00         | 0.71             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.12         | 0.12             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.11         | 0.00         | 0.11             | $\Sigma$ SAR < 1.6,<br>Not required |
| 42  | LTE 14<br>+<br>BT (DSS)     | Body-Worn             | Front Face       | 0.32         | 0.25         | 0.57             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.82         | 0.25         | 1.07             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2) | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|-----------------------------|-----------------------|------------------|--------------|--------------|------------------|-------------------------------------|
| 43  | LTE 25<br>+<br>WLAN (DTS)   | Head                  | Right Cheek      | 0.19         | 0.02         | 0.21             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.09         | 0.01         | 0.10             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.21         | 0.02         | 0.23             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.07         | 0.02         | 0.09             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.27         | 0.01         | 0.28             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.65         | 0.01         | 0.66             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.41         | 0.00         | 0.41             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 1.22         | 0.03         | 1.25             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.11         | 0.02         | 0.13             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.55         | 0.00         | 0.55             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.01         | 0.01             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.25         | 0.00         | 0.25             | $\Sigma$ SAR < 1.6,<br>Not required |
| 44  | LTE 25<br>+<br>WLAN (NII)   | Head                  | Right Cheek      | 0.19         | 0.13         | 0.32             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.09         | 0.07         | 0.16             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.21         | 0.26         | 0.47             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.07         | 0.05         | 0.12             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.27         | 0.09         | 0.36             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.65         | 0.25         | 0.90             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.41         | 0.12         | 0.53             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 1.22         | 0.22         | 1.44             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.11         | 0.17         | 0.28             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.55         | 0.00         | 0.55             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.12         | 0.12             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.25         | 0.00         | 0.25             | $\Sigma$ SAR < 1.6,<br>Not required |
| 45  | LTE 25<br>+<br>BT (DSS)     | Body-Worn             | Front Face       | 0.27         | 0.25         | 0.52             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.65         | 0.25         | 0.90             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2) | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|-----------------------------|-----------------------|------------------|--------------|--------------|------------------|-------------------------------------|
| 46  | LTE 26<br>+<br>WLAN (DTS)   | Head                  | Right Cheek      | 1.06         | 0.02         | 1.08             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.43         | 0.01         | 0.44             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.99         | 0.02         | 1.01             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.43         | 0.02         | 0.45             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.32         | 0.01         | 0.33             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.82         | 0.01         | 0.83             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.44         | 0.00         | 0.44             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 1.11         | 0.03         | 1.14             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.37         | 0.02         | 0.39             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.71         | 0.00         | 0.71             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.01         | 0.01             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.10         | 0.00         | 0.10             | $\Sigma$ SAR < 1.6,<br>Not required |
| 47  | LTE 26<br>+<br>WLAN (NII)   | Head                  | Right Cheek      | 1.06         | 0.13         | 1.19             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.43         | 0.07         | 0.50             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.99         | 0.26         | 1.25             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.43         | 0.05         | 0.48             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.32         | 0.09         | 0.41             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.82         | 0.25         | 1.07             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.44         | 0.12         | 0.56             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 1.11         | 0.22         | 1.33             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.37         | 0.17         | 0.54             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.71         | 0.00         | 0.71             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.12         | 0.12             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.10         | 0.00         | 0.10             | $\Sigma$ SAR < 1.6,<br>Not required |
| 48  | LTE 26<br>+<br>BT (DSS)     | Body-Worn             | Front Face       | 0.32         | 0.25         | 0.57             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.82         | 0.25         | 1.07             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2) | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|-----------------------------|-----------------------|------------------|--------------|--------------|------------------|-------------------------------------|
| 49  | LTE 38<br>+<br>WLAN (DTS)   | Head                  | Right Cheek      | 0.55         | 0.02         | 0.57             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.10         | 0.01         | 0.11             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.37         | 0.02         | 0.39             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.08         | 0.02         | 0.10             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.23         | 0.01         | 0.24             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.28         | 0.01         | 0.29             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.18         | 0.00         | 0.18             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.44         | 0.03         | 0.47             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.08         | 0.02         | 0.10             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.35         | 0.00         | 0.35             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.01         | 0.01             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 1.02         | 0.00         | 1.02             | $\Sigma$ SAR < 1.6,<br>Not required |
| 50  | LTE 38<br>+<br>WLAN (NII)   | Head                  | Right Cheek      | 0.55         | 0.13         | 0.68             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.10         | 0.07         | 0.17             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.37         | 0.26         | 0.63             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.08         | 0.05         | 0.13             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.23         | 0.09         | 0.32             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.28         | 0.25         | 0.53             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.18         | 0.12         | 0.30             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.44         | 0.22         | 0.66             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.08         | 0.17         | 0.25             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.35         | 0.00         | 0.35             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.12         | 0.12             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 1.02         | 0.00         | 1.02             | $\Sigma$ SAR < 1.6,<br>Not required |
| 51  | LTE 38<br>+<br>BT (DSS)     | Body-Worn             | Front Face       | 0.23         | 0.25         | 0.48             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.28         | 0.25         | 0.53             | $\Sigma$ SAR < 1.6,<br>Not required |



# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2) | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|-----------------------------|-----------------------|------------------|--------------|--------------|------------------|-------------------------------------|
| 52  | LTE 41<br>+<br>WLAN (DTS)   | Head                  | Right Cheek      | 1.18         | 0.02         | 1.20             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.23         | 0.01         | 0.24             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.95         | 0.02         | 0.97             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.14         | 0.02         | 0.16             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.23         | 0.01         | 0.24             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.34         | 0.01         | 0.35             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.16         | 0.00         | 0.16             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.46         | 0.03         | 0.49             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.07         | 0.02         | 0.09             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.31         | 0.00         | 0.31             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.01         | 0.01             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 1.10         | 0.00         | 1.10             | $\Sigma$ SAR < 1.6,<br>Not required |
| 53  | LTE 41<br>+<br>WLAN (NII)   | Head                  | Right Cheek      | 1.18         | 0.13         | 1.31             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.23         | 0.07         | 0.30             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.95         | 0.26         | 1.21             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.14         | 0.05         | 0.19             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.23         | 0.09         | 0.32             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.34         | 0.25         | 0.59             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.16         | 0.12         | 0.28             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.46         | 0.22         | 0.68             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.07         | 0.17         | 0.24             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.31         | 0.00         | 0.31             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.12         | 0.12             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 1.10         | 0.00         | 1.10             | $\Sigma$ SAR < 1.6,<br>Not required |
| 54  | LTE 41<br>+<br>BT (DSS)     | Body-Worn             | Front Face       | 0.23         | 0.25         | 0.48             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.34         | 0.25         | 0.59             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2) | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|-----------------------------|-----------------------|------------------|--------------|--------------|------------------|-------------------------------------|
| 55  | LTE 66<br>+<br>WLAN (DTS)   | Head                  | Right Cheek      | 0.42         | 0.02         | 0.44             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.12         | 0.01         | 0.13             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.40         | 0.02         | 0.42             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.12         | 0.02         | 0.14             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.23         | 0.01         | 0.24             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.55         | 0.01         | 0.56             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.49         | 0.00         | 0.49             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 1.29         | 0.03         | 1.32             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.17         | 0.02         | 0.19             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.67         | 0.00         | 0.67             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.01         | 0.01             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.50         | 0.00         | 0.50             | $\Sigma$ SAR < 1.6,<br>Not required |
| 56  | LTE 66<br>+<br>WLAN (NII)   | Head                  | Right Cheek      | 0.42         | 0.13         | 0.55             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Tilted     | 0.12         | 0.07         | 0.19             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Cheek       | 0.40         | 0.26         | 0.66             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Tilted      | 0.12         | 0.05         | 0.17             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Body-Worn             | Front Face       | 0.23         | 0.09         | 0.32             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.55         | 0.25         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             | Hotspot               | Front Face       | 0.49         | 0.12         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 1.29         | 0.22         | 1.51             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Left Side        | 0.17         | 0.17         | 0.34             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Right Side       | 0.67         | 0.00         | 0.67             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Top Side         | 0.00         | 0.12         | 0.12             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Bottom Side      | 0.50         | 0.00         | 0.50             | $\Sigma$ SAR < 1.6,<br>Not required |
| 57  | LTE 66<br>+<br>BT (DSS)     | Body-Worn             | Front Face       | 0.23         | 0.25         | 0.48             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                             |                       | Rear Face        | 0.55         | 0.25         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |

Test Engineer : Xianxiong Qin

## FCC SAR Test Report

### 5. Calibration of Test Equipment

| Equipment                       | Manufacturer | Model          | SN         | Cal. Date     | Cal. Interval |
|---------------------------------|--------------|----------------|------------|---------------|---------------|
| System Validation Dipole        | SPEAG        | D750V3         | 1067       | Sep. 05, 2018 | 1 Year        |
| System Validation Dipole        | SPEAG        | D835V2         | 4d139      | Sep. 06, 2018 | 1 Year        |
| System Validation Dipole        | SPEAG        | D1750V2        | 1071       | Sep. 13, 2018 | 1 Year        |
| System Validation Dipole        | SPEAG        | D1900V2        | 5d159      | Sep. 11, 2018 | 1 Year        |
| System Validation Dipole        | SPEAG        | D2450V2        | 893        | Aug. 31, 2018 | 1 Year        |
| System Validation Dipole        | SPEAG        | D2600V2        | 1110       | Aug. 31, 2018 | 1 Year        |
| System Validation Dipole        | SPEAG        | D5GHzV2        | 1133       | Aug. 31, 2018 | 1 Year        |
| Dosimetric E-Field Probe        | SPEAG        | EX3DV4         | 3873       | Aug. 31, 2018 | 1 Year        |
| Data Acquisition Electronics    | SPEAG        | DAE4           | 1341       | Aug. 28, 2018 | 1 Year        |
| Radio Communication Analyzer    | ANRITSU      | MT8820C        | 6201300717 | Jul. 09, 2018 | 1 Year        |
| Wireless Communication Test Set | Agilent      | E5515C         | MY50260600 | May. 14, 2018 | 1 Year        |
| ENA Series Network Analyzer     | Agilent      | E5071C         | MY46214638 | Jul. 09, 2018 | 1 Year        |
| Spectrum Analyzer               | KEYSIGHT     | N9010A         | MY54510355 | Jul. 09, 2018 | 1 Year        |
| MXG Analog Signal Generator     | KEYSIGHT     | N5183A         | MY50143024 | Mar. 14, 2018 | 1 Year        |
| Power Meter                     | Agilent      | N1914A         | MY52180044 | Oct. 10, 2018 | 2 Years       |
| Power Sensor                    | Agilent      | E9304A H18     | MY52050011 | Jan. 04, 2018 | 1 Year        |
| Power Meter                     | ANRITSU      | ML2495A        | 1506002    | Mar. 02, 2018 | 1 Year        |
| Power Sensor                    | ANRITSU      | MA2411B        | 1339353    | Mar. 02, 2018 | 1 Year        |
| Temp. & Humi. Recorder          | CLOCK        | HTC-1          | 157248     | Jul. 11, 2018 | 1 Year        |
| Electronic Thermometer          | YONGFA       | YF-160A        | 120100323  | Sep. 14, 2018 | 1 Year        |
| Coupler                         | Woken        | 0110A056020-10 | COM27RW1A3 | Sep. 14, 2018 | 1 Year        |

## FCC SAR Test Report

### 6. Measurement Uncertainty

| Source of Uncertainty                                                            | Tolerance<br>(± %) | Probability<br>Distribution | Divisor | Ci<br>(1g) | Ci<br>(10g) | Standard<br>Uncertainty<br>(± %, 1g) | Standard<br>Uncertainty<br>(± %, 10g) | Vi |
|----------------------------------------------------------------------------------|--------------------|-----------------------------|---------|------------|-------------|--------------------------------------|---------------------------------------|----|
| <b>Measurement System</b>                                                        |                    |                             |         |            |             |                                      |                                       |    |
| Probe Calibration                                                                | 6.0                | Normal                      | 1       | 1          | 1           | 6.0                                  | 6.0                                   | ∞  |
| Axial Isotropy                                                                   | 4.7                | Rectangular                 | √3      | 0.707      | 0.707       | 1.9                                  | 1.9                                   | ∞  |
| Hemispherical Isotropy                                                           | 9.6                | Rectangular                 | √3      | 0.707      | 0.707       | 3.9                                  | 3.9                                   | ∞  |
| Boundary Effect                                                                  | 1.0                | Rectangular                 | √3      | 1          | 1           | 0.6                                  | 0.6                                   | ∞  |
| Linearity                                                                        | 4.7                | Rectangular                 | √3      | 1          | 1           | 2.7                                  | 2.7                                   | ∞  |
| System Detection Limits                                                          | 0.25               | Rectangular                 | √3      | 1          | 1           | 0.14                                 | 0.14                                  | ∞  |
| Readout Electronics                                                              | 0.3                | Normal                      | 1       | 1          | 1           | 0.3                                  | 0.3                                   | ∞  |
| Response Time                                                                    | 0.0                | Rectangular                 | √3      | 1          | 1           | 0.0                                  | 0.0                                   | ∞  |
| Integration Time                                                                 | 1.7                | Rectangular                 | √3      | 1          | 1           | 1.0                                  | 1.0                                   | ∞  |
| RF Ambient Conditions - Noise                                                    | 3.0                | Rectangular                 | √3      | 1          | 1           | 1.7                                  | 1.7                                   | ∞  |
| RF Ambient Conditions - Reflections                                              | 3.0                | Rectangular                 | √3      | 1          | 1           | 1.7                                  | 1.7                                   | ∞  |
| Probe Positioner Mechanical Tolerance                                            | 0.4                | Rectangular                 | √3      | 1          | 1           | 0.2                                  | 0.2                                   | ∞  |
| Probe Positioning with Respect to Phantom Shell                                  | 2.9                | Rectangular                 | √3      | 1          | 1           | 1.7                                  | 1.7                                   | ∞  |
| Extrapolation, interpolation, and integration algorithms for max. SAR evaluation | 2.0                | Rectangular                 | √3      | 1          | 1           | 1.2                                  | 1.2                                   | ∞  |
| <b>Test Sample Related</b>                                                       |                    |                             |         |            |             |                                      |                                       |    |
| Test Sample Positioning                                                          | 1.5 / 0.7          | Normal                      | 1       | 1          | 1           | 1.5                                  | 0.7                                   | 32 |
| Device Holder Uncertainty                                                        | 4.2 / 1.8          | Normal                      | 1       | 1          | 1           | 4.2                                  | 1.8                                   | 32 |
| Output Power Variation - SAR Drift Measurement                                   | 5.0                | Rectangular                 | √3      | 1          | 1           | 2.9                                  | 2.9                                   | ∞  |
| <b>Phantom and Tissue Parameters</b>                                             |                    |                             |         |            |             |                                      |                                       |    |
| Phantom Uncertainty (Shape and Thickness Tolerances)                             | 7.2                | Rectangular                 | √3      | 1          | 1           | 4.2                                  | 4.2                                   | ∞  |
| Liquid Conductivity - Deviation from Target Values                               | 5.0                | Rectangular                 | √3      | 0.64       | 0.43        | 1.8                                  | 1.2                                   | ∞  |
| Liquid Conductivity - Measurement Uncertainty                                    | 1.0                | Normal                      | 1       | 0.64       | 0.43        | 0.6                                  | 0.4                                   | 25 |
| Liquid Permittivity - Deviation from Target Values                               | 5.0                | Rectangular                 | √3      | 0.60       | 0.49        | 1.7                                  | 1.4                                   | ∞  |
| Liquid Permittivity - Measurement Uncertainty                                    | 0.5                | Normal                      | 1       | 0.60       | 0.49        | 0.3                                  | 0.2                                   | 25 |
| <b>Combined Standard Uncertainty</b>                                             |                    |                             |         |            |             | ± 11.2 %                             | ± 10.4 %                              |    |
| <b>Expanded Uncertainty (K=2)</b>                                                |                    |                             |         |            |             | ± 22.4 %                             | ± 20.8 %                              |    |

Uncertainty budget for frequency range 300 MHz to 3 GHz

# FCC SAR Test Report

| Source of Uncertainty                                                            | Tolerance<br>(± %) | Probability<br>Distribution | Divisor | Ci<br>(1g) | Ci<br>(10g) | Standard<br>Uncertainty<br>(± %, 1g) | Standard<br>Uncertainty<br>(± %, 10g) | Vi |
|----------------------------------------------------------------------------------|--------------------|-----------------------------|---------|------------|-------------|--------------------------------------|---------------------------------------|----|
| <b>Measurement System</b>                                                        |                    |                             |         |            |             |                                      |                                       |    |
| Probe Calibration                                                                | 6.55               | Normal                      | 1       | 1          | 1           | 6.55                                 | 6.55                                  | ∞  |
| Axial Isotropy                                                                   | 4.7                | Rectangular                 | √3      | 0.707      | 0.707       | 1.9                                  | 1.9                                   | ∞  |
| Hemispherical Isotropy                                                           | 9.6                | Rectangular                 | √3      | 0.707      | 0.707       | 3.9                                  | 3.9                                   | ∞  |
| Boundary Effect                                                                  | 2.0                | Rectangular                 | √3      | 1          | 1           | 1.2                                  | 1.2                                   | ∞  |
| Linearity                                                                        | 4.7                | Rectangular                 | √3      | 1          | 1           | 2.7                                  | 2.7                                   | ∞  |
| System Detection Limits                                                          | 0.25               | Rectangular                 | √3      | 1          | 1           | 0.14                                 | 0.14                                  | ∞  |
| Readout Electronics                                                              | 0.3                | Normal                      | 1       | 1          | 1           | 0.3                                  | 0.3                                   | ∞  |
| Response Time                                                                    | 0.0                | Rectangular                 | √3      | 1          | 1           | 0.0                                  | 0.0                                   | ∞  |
| Integration Time                                                                 | 1.7                | Rectangular                 | √3      | 1          | 1           | 1.0                                  | 1.0                                   | ∞  |
| RF Ambient Conditions - Noise                                                    | 3.0                | Rectangular                 | √3      | 1          | 1           | 1.7                                  | 1.7                                   | ∞  |
| RF Ambient Conditions - Reflections                                              | 3.0                | Rectangular                 | √3      | 1          | 1           | 1.7                                  | 1.7                                   | ∞  |
| Probe Positioner Mechanical Tolerance                                            | 0.4                | Rectangular                 | √3      | 1          | 1           | 0.2                                  | 0.2                                   | ∞  |
| Probe Positioning with Respect to Phantom Shell                                  | 6.7                | Rectangular                 | √3      | 1          | 1           | 3.9                                  | 3.9                                   | ∞  |
| Extrapolation, interpolation, and integration algorithms for max. SAR evaluation | 4.0                | Rectangular                 | √3      | 1          | 1           | 2.3                                  | 2.3                                   | ∞  |
| <b>Test Sample Related</b>                                                       |                    |                             |         |            |             |                                      |                                       |    |
| Test Sample Positioning                                                          | 1.5 / 0.7          | Normal                      | 1       | 1          | 1           | 1.5                                  | 0.7                                   | 32 |
| Device Holder Uncertainty                                                        | 4.2 / 1.8          | Normal                      | 1       | 1          | 1           | 4.2                                  | 1.8                                   | 32 |
| Output Power Variation - SAR Drift Measurement                                   | 5.0                | Rectangular                 | √3      | 1          | 1           | 2.9                                  | 2.9                                   | ∞  |
| <b>Phantom and Tissue Parameters</b>                                             |                    |                             |         |            |             |                                      |                                       |    |
| Phantom Uncertainty (Shape and Thickness Tolerances)                             | 7.6                | Rectangular                 | √3      | 1          | 1           | 4.4                                  | 4.4                                   | ∞  |
| Liquid Conductivity - Deviation from Target Values                               | 5.0                | Rectangular                 | √3      | 0.64       | 0.43        | 1.8                                  | 1.2                                   | ∞  |
| Liquid Conductivity - Measurement Uncertainty                                    | 1.0                | Normal                      | 1       | 0.64       | 0.43        | 0.6                                  | 0.4                                   | 25 |
| Liquid Permittivity - Deviation from Target Values                               | 5.0                | Rectangular                 | √3      | 0.60       | 0.49        | 1.7                                  | 1.4                                   | ∞  |
| Liquid Permittivity - Measurement Uncertainty                                    | 0.5                | Normal                      | 1       | 0.60       | 0.49        | 0.3                                  | 0.2                                   | 25 |
| <b>Combined Standard Uncertainty</b>                                             |                    |                             |         |            |             | ± 12.3 %                             | ± 11.5 %                              |    |
| <b>Expanded Uncertainty (K=2)</b>                                                |                    |                             |         |            |             | ± 24.6 %                             | ± 23.0 %                              |    |

Uncertainty budget for frequency range 3 GHz to 6 GHz

## **7. Information on the Testing Laboratories**

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Add: No. B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industry Park, Nanshan District, Shenzhen, Guangdong, China

Tel: 86-755-8869-6566

Fax: 86-755-8869-6577

**Email:** [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)

**Web Site:** [www.bureauveritas.com](http://www.bureauveritas.com)

The road map of all our labs can be found in our web site also.

**---END---**

### Appendix A. SAR Plots of System Verification

The plots for system verification with largest deviation for each SAR system combination are shown as follows.

**System Check\_H750\_181011****DUT: Dipole:750 MHz;Type:D750V3;SN:1067**

Communication System: CW; Frequency: 750 MHz;Duty Cycle: 1:1

Medium: HSL750\_1011 Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.896$  S/m;  $\epsilon_r = 40.267$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(10.15, 10.15, 10.15); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Left Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1722
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (71x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.78 W/kg


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 55.48 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.16 W/kg

**SAR(1 g) = 2.14 W/kg; SAR(10 g) = 1.43 W/kg**

Maximum value of SAR (measured) = 2.82 W/kg

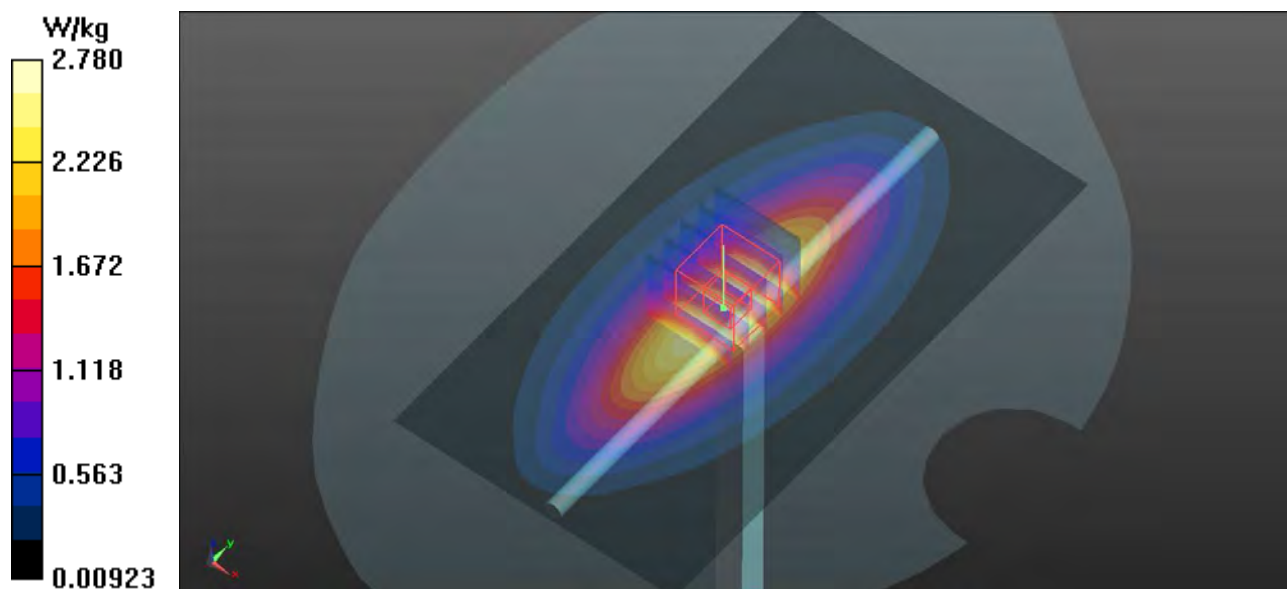



## System Check\_H835\_181012

**DUT: Dipole:835 MHz;Type:D835V2; SN:4d139**

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium: HSL835\_1012 Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.889$  S/m;  $\epsilon_r = 42.274$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.69, 9.69, 9.69); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Left Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1722
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.16 W/kg


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 59.68 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 3.61 W/kg

**SAR(1 g) = 2.42 W/kg; SAR(10 g) = 1.6 W/kg**

Maximum value of SAR (measured) = 3.22 W/kg

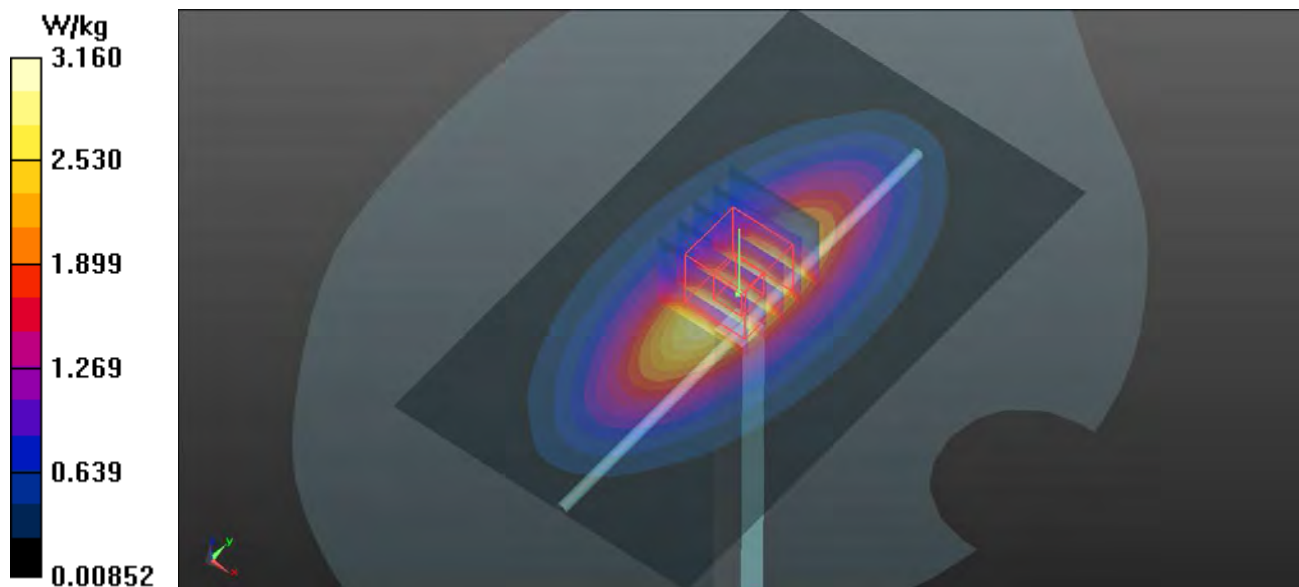

**System Check\_H1750\_181013****DUT: Dipole:1750 MHz;Type:D1750V2; SN:1071**

Communication System: CW; Frequency: 1750 MHz;Duty Cycle: 1:1

Medium: HSL1750\_1013 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.325$  S/m;  $\epsilon_r = 40.765$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8.39, 8.39, 8.39); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Front Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1695
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 14.6 W/kg


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 104.8 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 17.2 W/kg

**SAR(1 g) = 9.61 W/kg; SAR(10 g) = 5.19 W/kg**

Maximum value of SAR (measured) = 14.5 W/kg

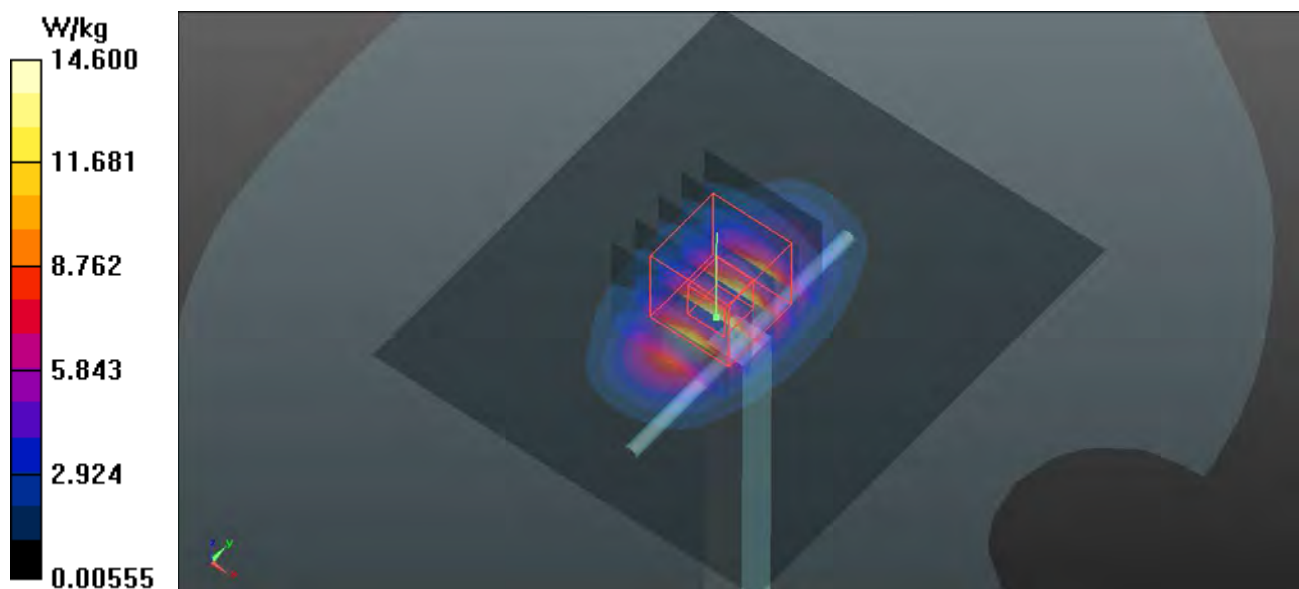

**System Check\_H1900\_181014****DUT: Dipole:1900MHz;Type:D1900V2; SN:5d159**

Communication System: CW; Frequency: 1900 MHz;Duty Cycle: 1:1

Medium: HSL1900\_1014 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.374$  S/m;  $\epsilon_r = 39.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8.12, 8.12, 8.12); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Front Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1695
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 15.9 W/kg


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 103.0 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 19.0 W/kg

**SAR(1 g) = 10.4 W/kg; SAR(10 g) = 5.44 W/kg**

Maximum value of SAR (measured) = 15.9 W/kg

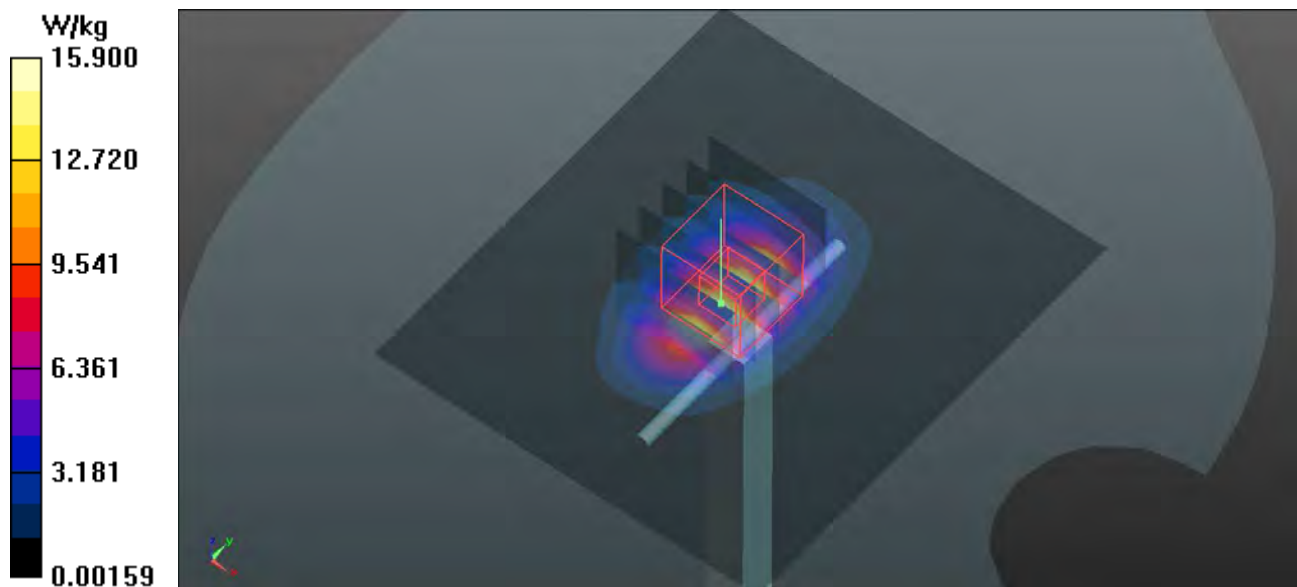

**System Check\_H2450\_181026****DUT: Dipole:2450 MHz;Type:D2450V2; SN:893**

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1

Medium: HSL2450\_1026 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.845$  S/m;  $\epsilon_r = 39.401$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.19, 7.19, 7.19); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Front Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1695
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 23.2 W/kg


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 108.0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 29.6 W/kg

**SAR(1 g) = 14 W/kg; SAR(10 g) = 6.45 W/kg**

Maximum value of SAR (measured) = 23.8 W/kg

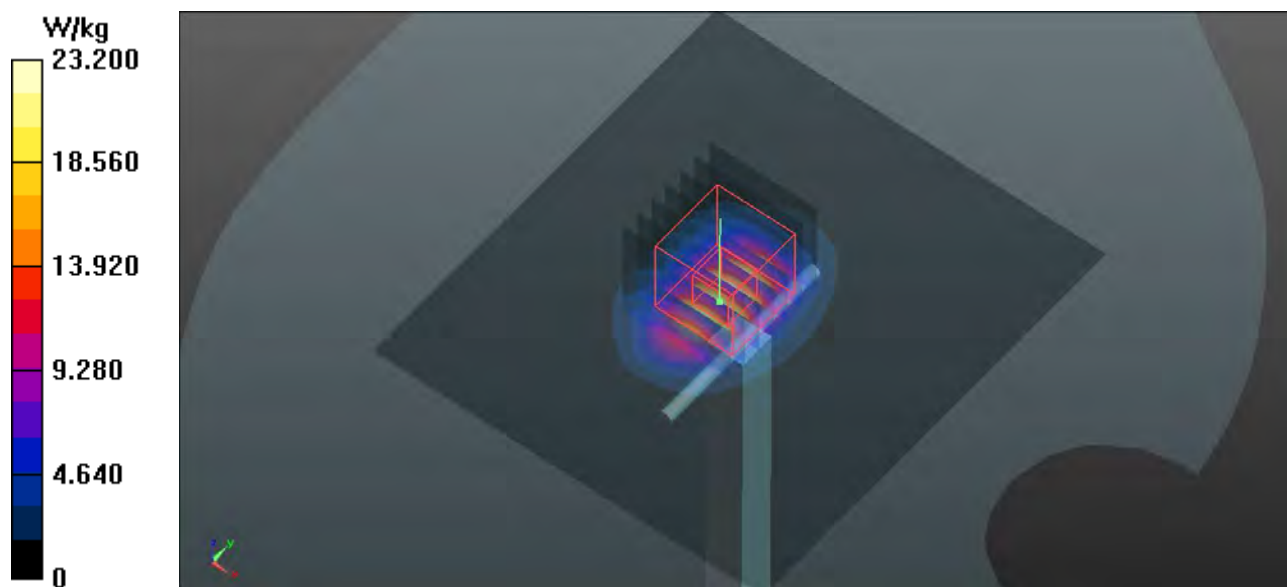

**System Check\_H2600\_181023****DUT: Dipole:2600 MHz;Type:D2600V2; SN:1110**

Communication System: CW; Frequency: 2600 MHz;Duty Cycle: 1:1

Medium: H2600\_1023 Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.039$  S/m;  $\epsilon_r = 38.932$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.11, 7.11, 7.11); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Front Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1695
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (81x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 25.2 W/kg


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 111.5 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 31.5 W/kg

**SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.23 W/kg**

Maximum value of SAR (measured) = 24.6 W/kg

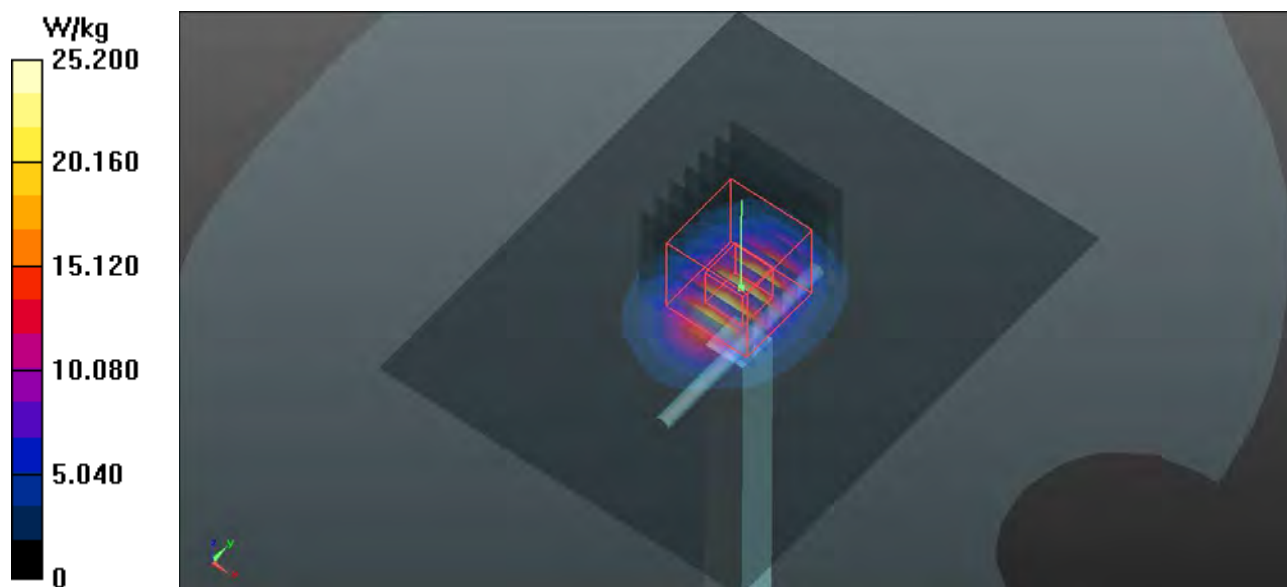

**System Check\_H5250\_181018****DUT: Dipole:5GHzV2;Type:D5GHzV2; SN:1133**

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: HSL5G\_1018 Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.691$  S/m;  $\epsilon_r = 35.329$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.9, 4.9, 4.9); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Left Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1722
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.2 W/kg


**Pin=100mW/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.89 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 32.6 W/kg

**SAR(1 g) = 8.04 W/kg; SAR(10 g) = 2.27 W/kg**

Maximum value of SAR (measured) = 20.3 W/kg

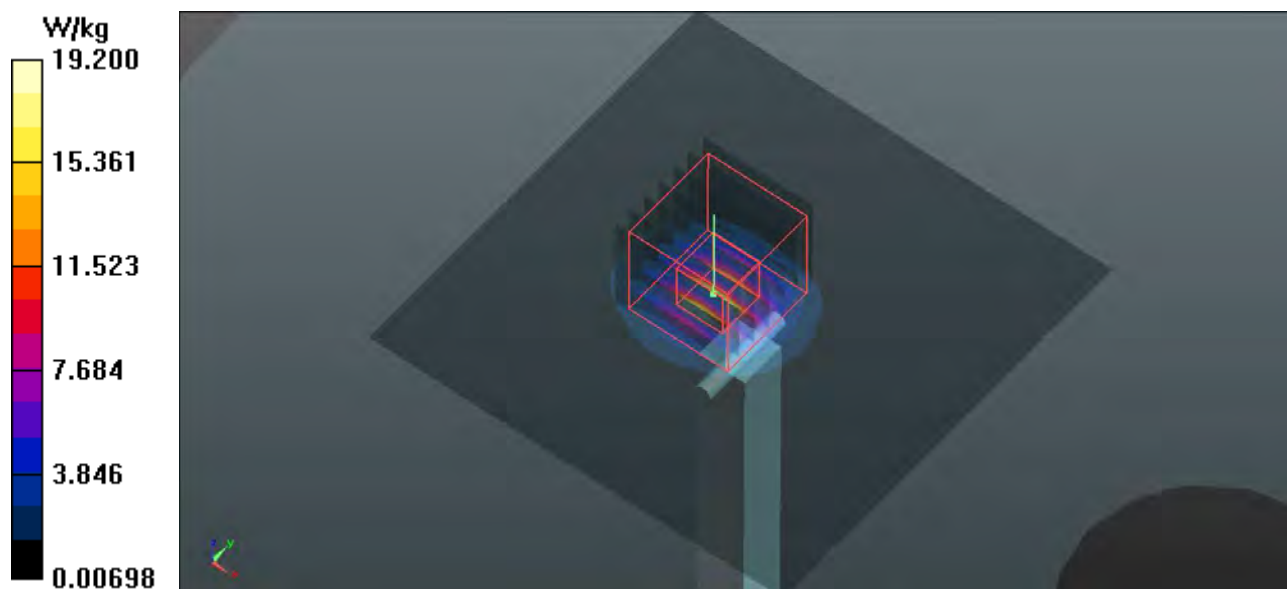

## System Check\_H5600\_181018

**DUT: Dipole:5GHzV2;Type:D5GHzV2; SN:1133**

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: HSL5G\_1018 Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.04$  S/m;  $\epsilon_r = 34.826$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.56, 4.56, 4.56); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Left Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1722
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.5 W/kg


**Pin=100mW/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 57.10 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 35.1 W/kg

**SAR(1 g) = 8.03 W/kg; SAR(10 g) = 2.25 W/kg**

Maximum value of SAR (measured) = 20.8 W/kg

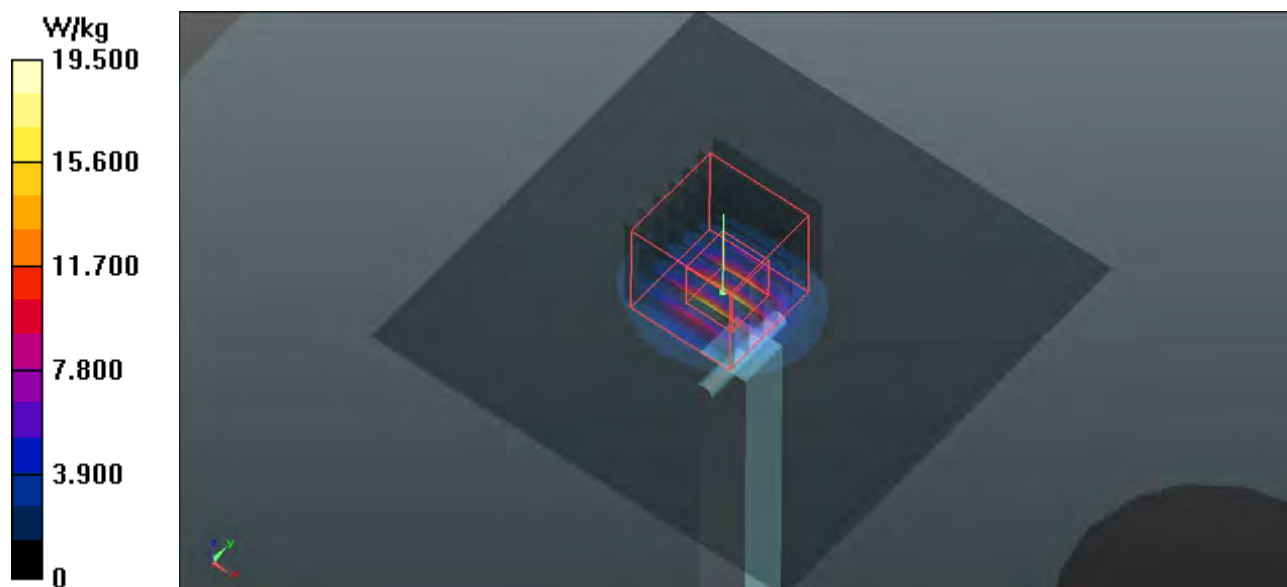



## System Check\_H5800\_181018

**DUT: Dipole:5GHzV2;Type:D5GHzV2; SN:1133**

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: HSL5G\_1018 Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.249$  S/m;  $\epsilon_r = 34.538$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.6, 4.6, 4.6); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Left Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1722
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.0 W/kg


**Pin=100mW/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.62 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 35.2 W/kg

**SAR(1 g) = 7.67 W/kg; SAR(10 g) = 2.15 W/kg**

Maximum value of SAR (measured) = 20.3 W/kg

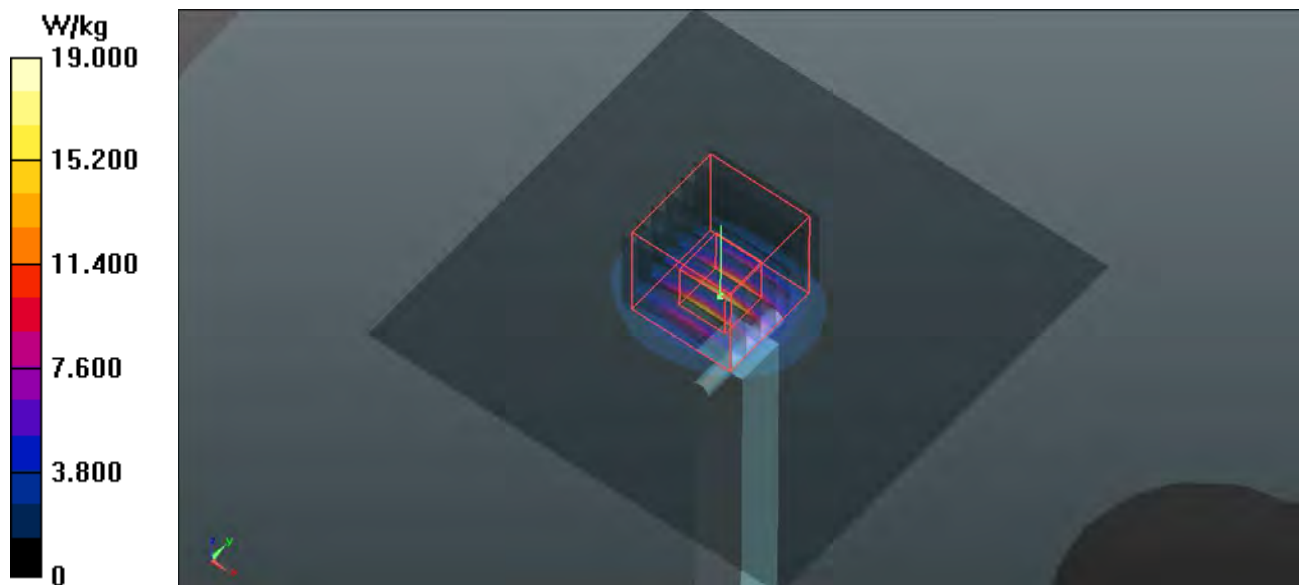




**System Check\_B750\_180926****DUT: Dipole:750 MHz;Type:D750V3;SN:1067**

Communication System: CW; Frequency: 750 MHz;Duty Cycle: 1:1

Medium: MSL750\_0926 Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.976 \text{ S/m}$ ;  $\epsilon_r = 56.163$ ;  $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature :  $23.1 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.1 \text{ }^\circ\text{C}$ 

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.67, 9.67, 9.67); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Left Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1722
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

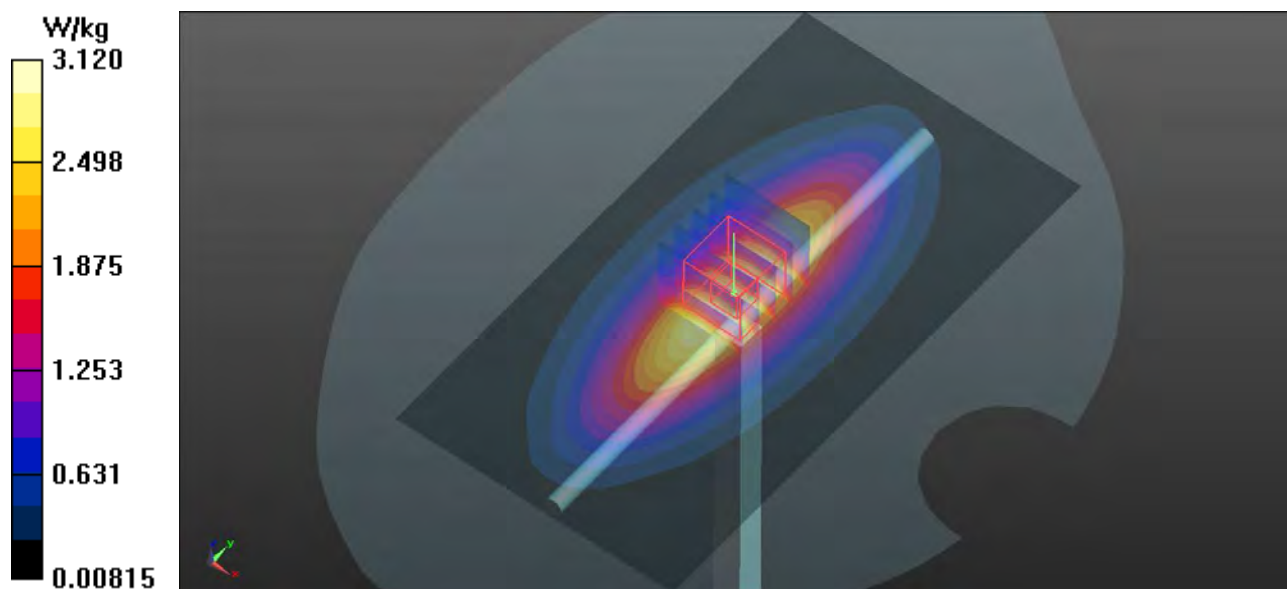**Pin=250mW/Area Scan (71x131x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) =  $3.12 \text{ W/kg}$ **Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $56.21 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$ Peak SAR (extrapolated) =  $3.52 \text{ W/kg}$ **SAR(1 g) =  $2.32 \text{ W/kg}$ ; SAR(10 g) =  $1.58 \text{ W/kg}$** Maximum value of SAR (measured) =  $3.16 \text{ W/kg}$ 


**System Check\_B835\_180927****DUT: Dipole:835 MHz;Type:D835V2; SN:4d139**

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium: MSL835\_0927 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.992 \text{ S/m}$ ;  $\epsilon_r = 55.615$ ;  $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature :  $23.1^\circ\text{C}$ ; Liquid Temperature :  $22.1^\circ\text{C}$ 

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.49, 9.49, 9.49); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Left Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1722
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

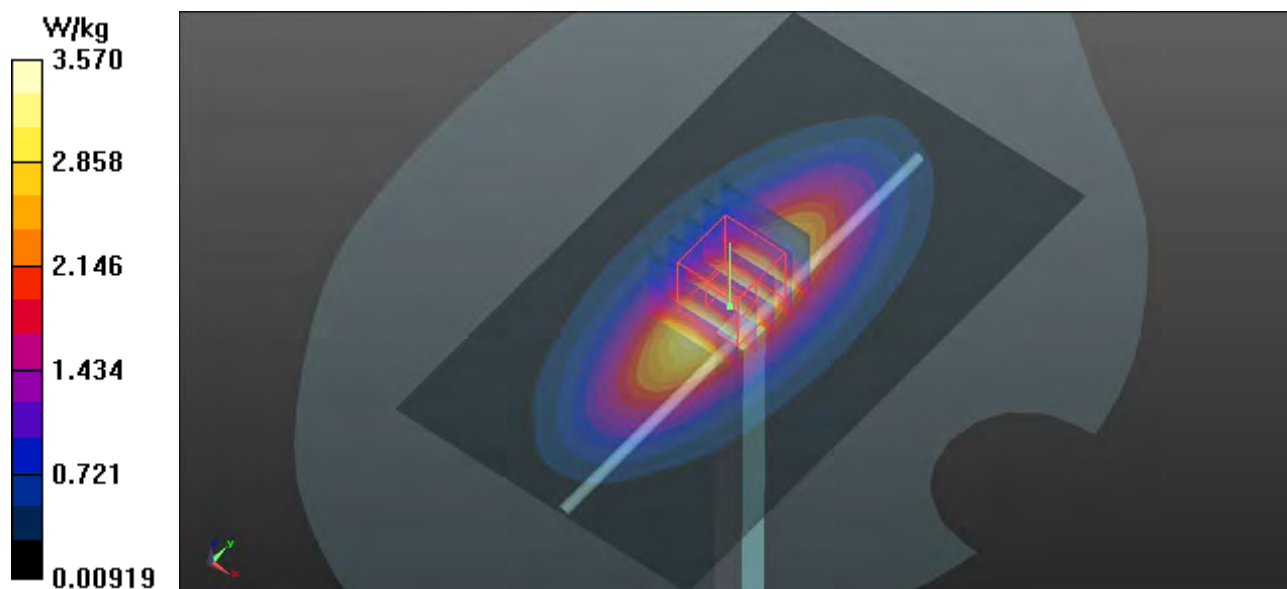**Pin=250mW/Area Scan (71x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) =  $3.57 \text{ W/kg}$ **Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $59.66 \text{ V/m}$ ; Power Drift =  $-0.04 \text{ dB}$ Peak SAR (extrapolated) =  $4.07 \text{ W/kg}$ **SAR(1 g) =  $2.47 \text{ W/kg}$ ; SAR(10 g) =  $1.68 \text{ W/kg}$** Maximum value of SAR (measured) =  $3.64 \text{ W/kg}$ 


**System Check\_B835\_181219****DUT: Dipole:835 MHz;Type:D835V2; SN:4d139**

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium: MSL835\_1219 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.992 \text{ S/m}$ ;  $\epsilon_r = 54.646$ ;  $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature :  $23.1^\circ\text{C}$ ; Liquid Temperature :  $22.1^\circ\text{C}$ 

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.49, 9.49, 9.49); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1205
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

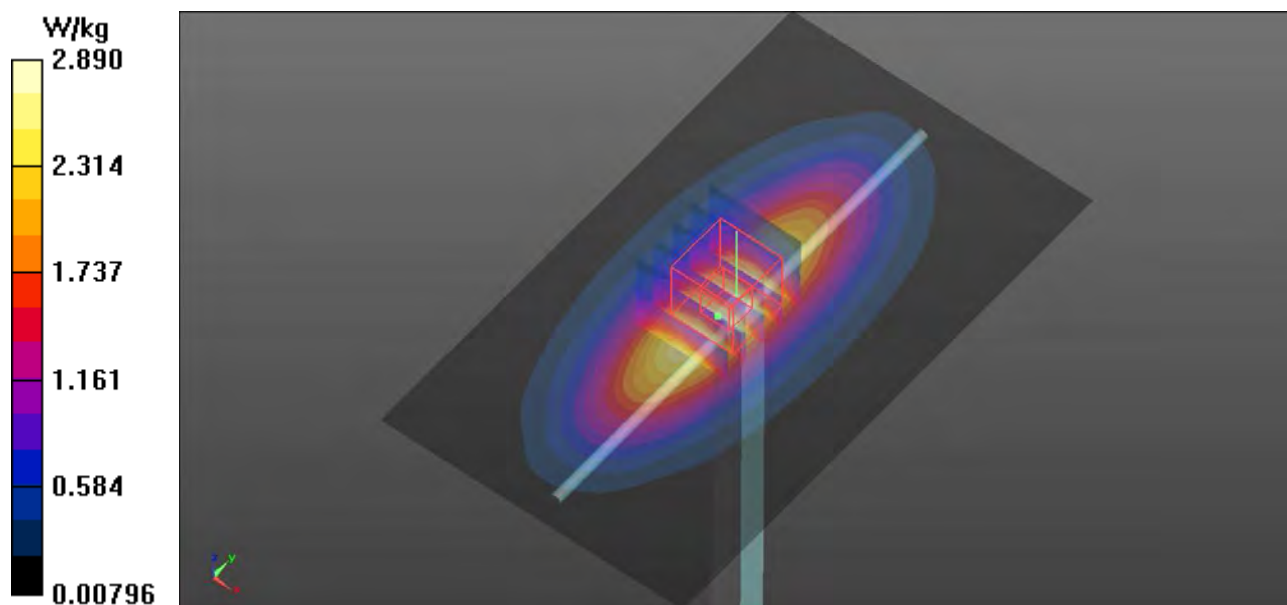**Pin=250mW/Area Scan (71x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) =  $2.89 \text{ W/kg}$ **Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $52.89 \text{ V/m}$ ; Power Drift =  $-0.00 \text{ dB}$ Peak SAR (extrapolated) =  $3.29 \text{ W/kg}$ **SAR(1 g) =  $2.41 \text{ W/kg}$ ; SAR(10 g) =  $1.57 \text{ W/kg}$** Maximum value of SAR (measured) =  $2.93 \text{ W/kg}$ 

**System Check\_B1750\_181010****DUT: Dipole:1750 MHz;Type:D1750V2; SN:1071**

Communication System: CW; Frequency: 1750 MHz;Duty Cycle: 1:1

Medium: MSL1750\_1010 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.439$  S/m;  $\epsilon_r = 54.051$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.8, 7.8, 7.8); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Front Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1695
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.9 W/kg


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 94.94 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 16.8 W/kg

**SAR(1 g) = 9.68 W/kg; SAR(10 g) = 5.22 W/kg**

Maximum value of SAR (measured) = 14.6 W/kg

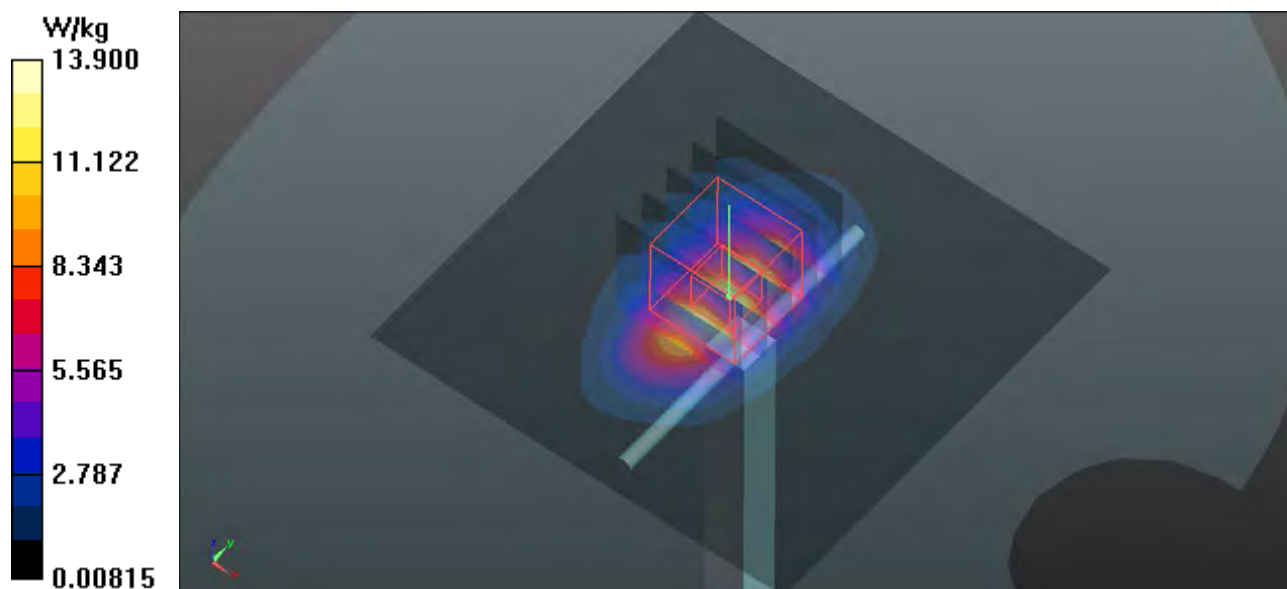

**System Check\_B1750\_181220****DUT: Dipole:1750 MHz;Type:D1750V2; SN:1071**

Communication System: CW; Frequency: 1750 MHz;Duty Cycle: 1:1

Medium: MSL1750\_1220 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.470$  S/m;  $\epsilon_r = 53.671$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.8, 7.8, 7.8); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1205
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 12.8 W/kg


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 95.72 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 15.1 W/kg

**SAR(1 g) = 9.35 W/kg; SAR(10 g) = 5.16 W/kg**

Maximum value of SAR (measured) = 12.9 W/kg

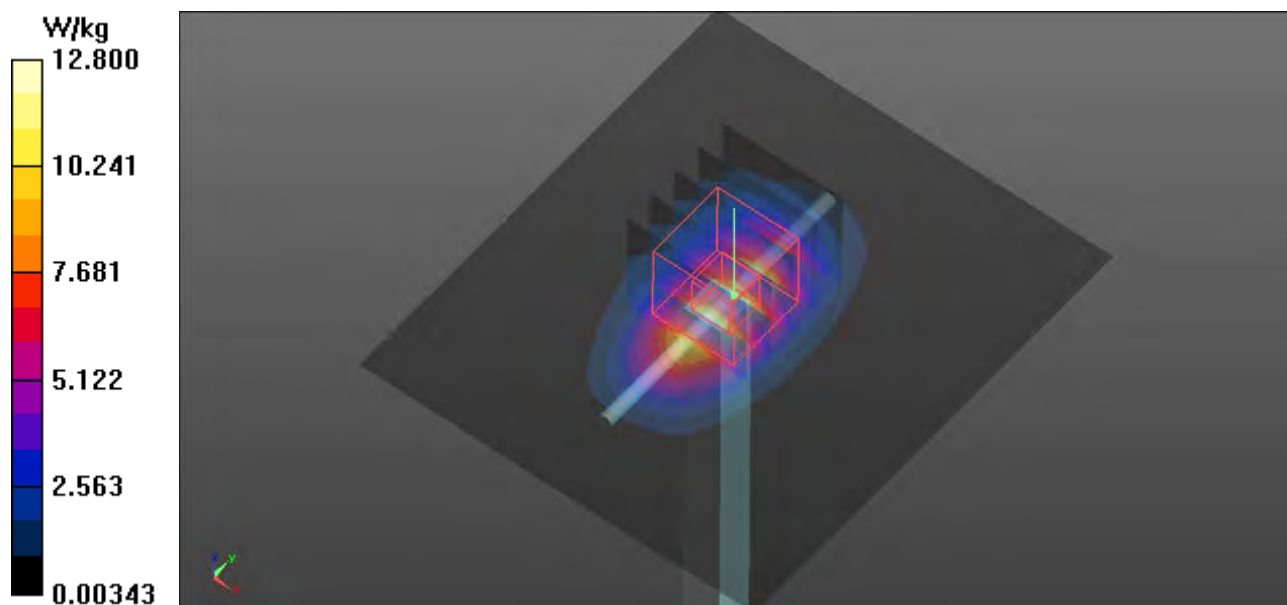

## System Check\_B1900\_181008

**DUT: Dipole:1900MHz;Type:D1900V2; SN:5d159**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL1900\_1008 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.561$  S/m;  $\epsilon_r = 54.788$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.61, 7.61, 7.61); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Front Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1695
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 16.0 W/kg


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 98.95 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 19.5 W/kg

**SAR(1 g) = 10.8 W/kg; SAR(10 g) = 5.61 W/kg**

Maximum value of SAR (measured) = 16.6 W/kg

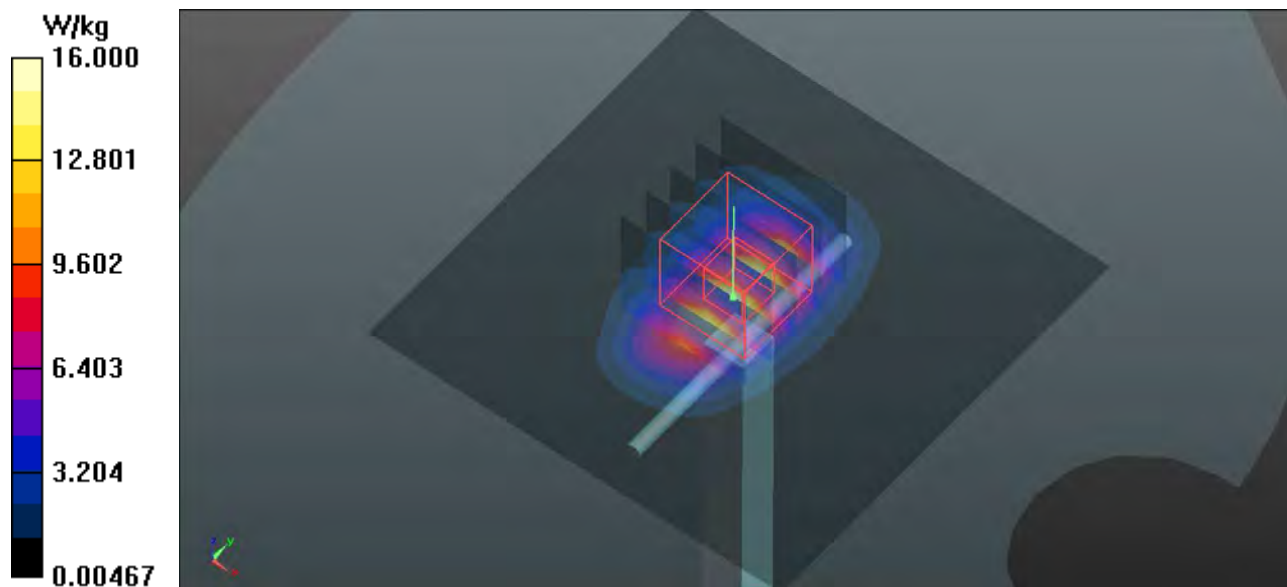

**System Check\_B1900\_181221****DUT: Dipole:1900MHz;Type:D1900V2; SN:5d159**

Communication System: CW; Frequency: 1900 MHz;Duty Cycle: 1:1

Medium: MSL1900\_1221 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.526$  S/m;  $\epsilon_r = 51.959$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.61, 7.61, 7.61); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1205
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 15.8 W/kg


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 97.56 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 18.7 W/kg

**SAR(1 g) = 10.4 W/kg; SAR(10 g) = 5.45 W/kg**

Maximum value of SAR (measured) = 15.7 W/kg

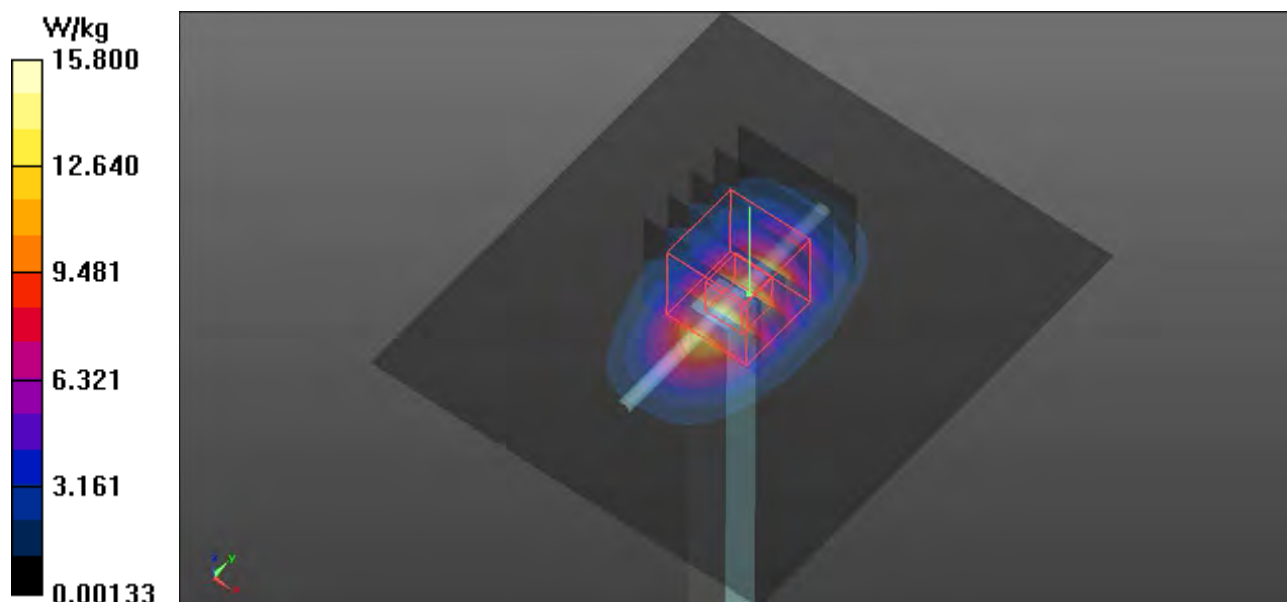



## System Check\_B2450\_181019

**DUT: Dipole:2450 MHz;Type:D2450V2; SN:893**

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1

Medium: MSL2450\_1019 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.961$  S/m;  $\epsilon_r = 51.602$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.39, 7.39, 7.39); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1205
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 22.6 W/kg



**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 110.4 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 27.1 W/kg

**SAR(1 g) = 13 W/kg; SAR(10 g) = 5.99 W/kg**

Maximum value of SAR (measured) = 21.7 W/kg

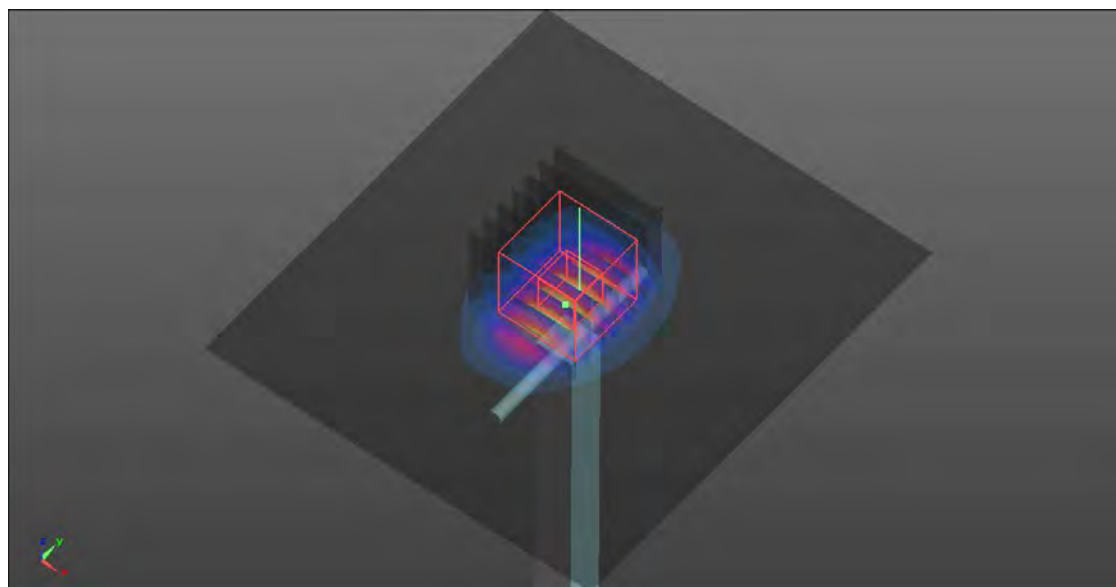



**System Check\_B2600\_181025****DUT: Dipole:2600 MHz;Type:D2600V2; SN:1110**

Communication System: CW; Frequency: 2600 MHz;Duty Cycle: 1:1

Medium: MSL2600\_1025 Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.096$  S/m;  $\epsilon_r = 50.743$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.28, 7.28, 7.28); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1205
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (81x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 26.2 W/kg


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 115.4 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 32.8 W/kg

**SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.45 W/kg**

Maximum value of SAR (measured) = 26.1 W/kg

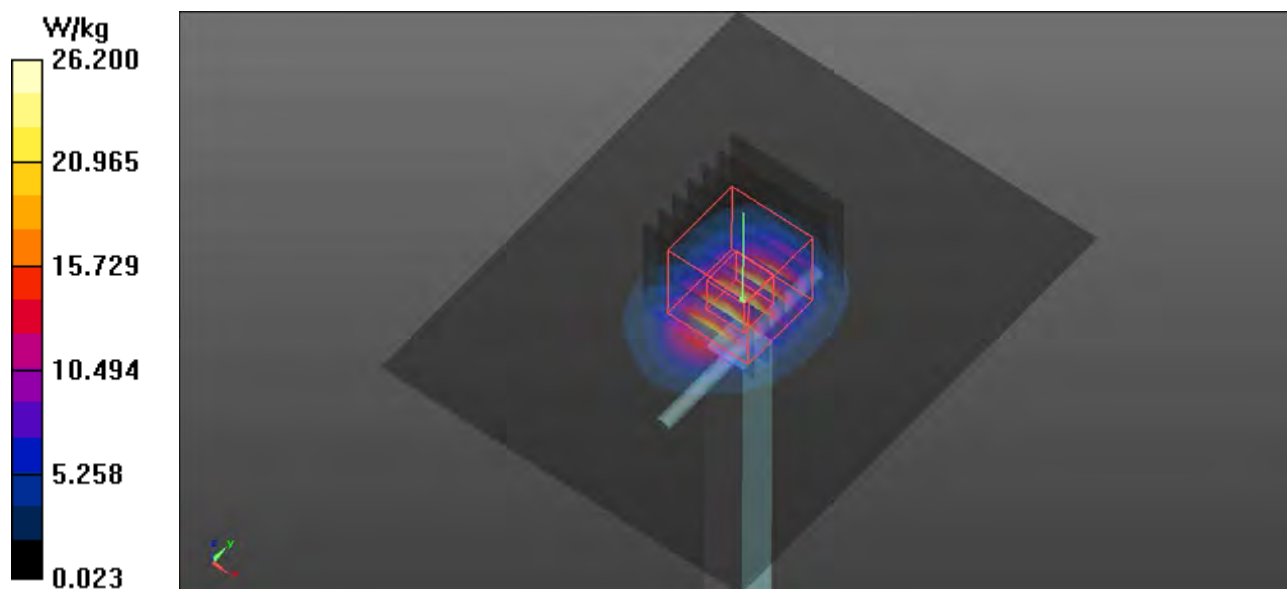

**System Check\_B2600\_181218****DUT: Dipole:2600 MHz;Type:D2600V2; SN:1110**

Communication System: CW; Frequency: 2600 MHz;Duty Cycle: 1:1

Medium: MSL2600\_1218 Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.199$  S/m;  $\epsilon_r = 52.350$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.28, 7.28, 7.28); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1205
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (81x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 23.8 W/kg


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 109.1 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 30.4 W/kg

**SAR(1 g) = 13.8 W/kg; SAR(10 g) = 6.06 W/kg**

Maximum value of SAR (measured) = 23.9 W/kg

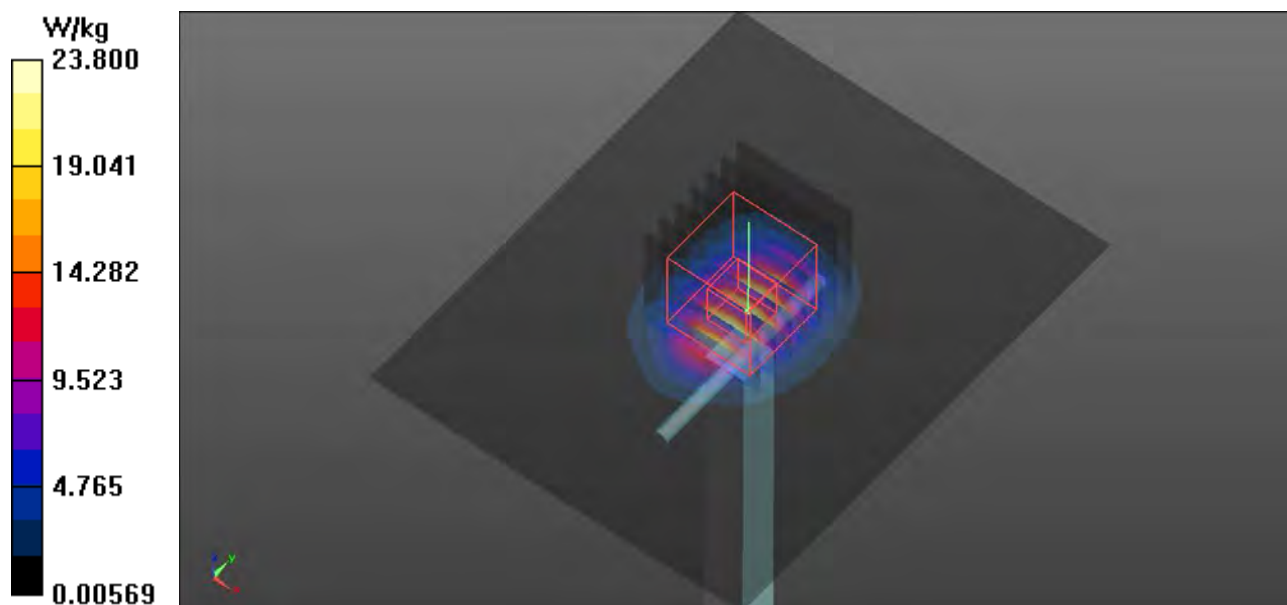

**System Check\_B5250\_181017****DUT: Dipole:D5GHzV2;Type:D5GHzV2; SN:1133**

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: MSL5G\_1017 Medium parameters used:  $f = 5250$  MHz;  $\sigma = 5.379$  S/m;  $\epsilon_r = 48.856$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.27, 4.27, 4.27); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Left Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1722
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 15.9 W/kg


**Pin=100mW/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 46.70 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 26.2 W/kg

**SAR(1 g) = 7.95 W/kg; SAR(10 g) = 2.24 W/kg**

Maximum value of SAR (measured) = 16.7 W/kg

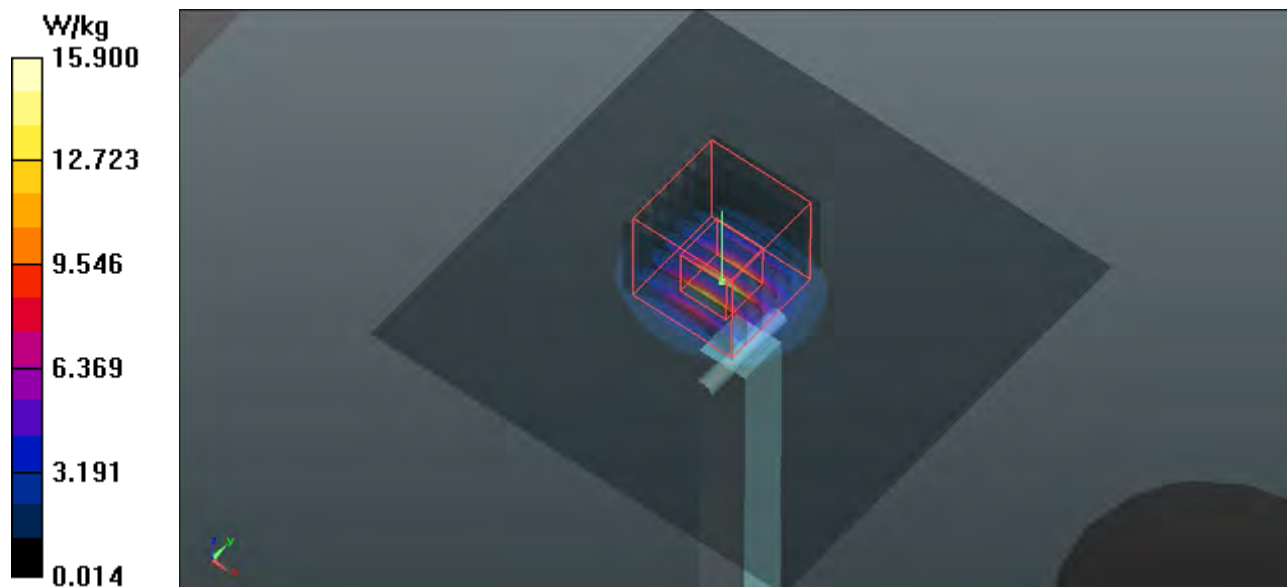

**System Check\_B5600\_181017****DUT: Dipole:D5GHzV2;Type:D5GHzV2; SN:1133**

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: MSL5G\_1017 Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.871$  S/m;  $\epsilon_r = 48.168$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(3.77, 3.77, 3.77); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Left Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1722
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.7 W/kg



**Pin=100mW/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 49.70 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 32.3 W/kg

**SAR(1 g) = 7.99 W/kg; SAR(10 g) = 2.25 W/kg**

Maximum value of SAR (measured) = 20.6 W/kg

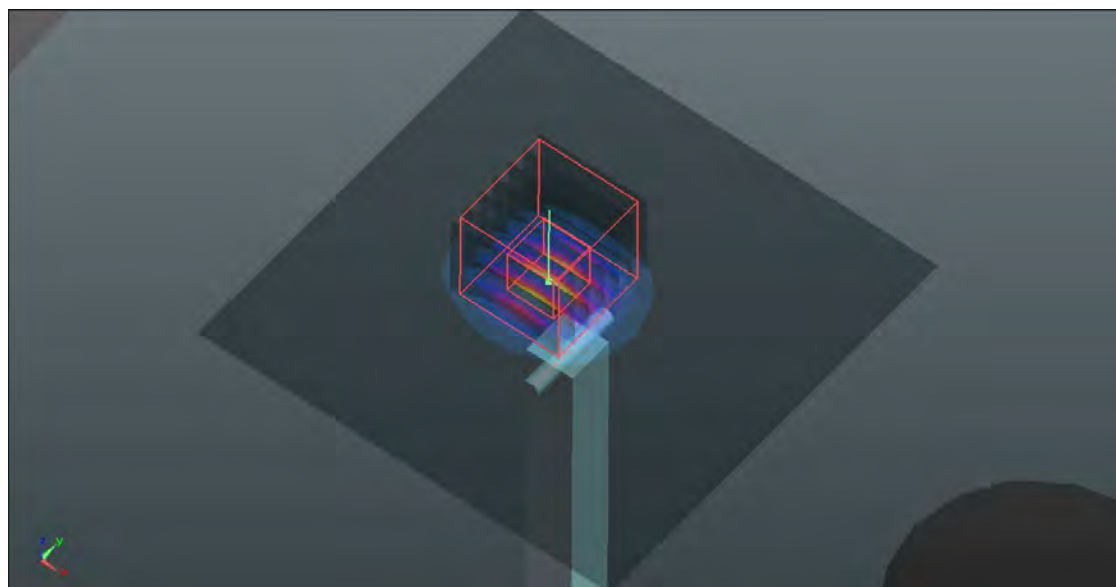

**System Check\_B5800\_181017****DUT: Dipole:D5GHzV2;Type:D5GHzV2; SN:1133**

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: MSL5G\_1017 Medium parameters used:  $f = 5800$  MHz;  $\sigma = 6.123$  S/m;  $\epsilon_r = 47.668$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4, 4, 4); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Left Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1722
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 16.3 W/kg


**Pin=100mW/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 47.70 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 29.3 W/kg

**SAR(1 g) = 8.01 W/kg; SAR(10 g) = 2.22 W/kg**

Maximum value of SAR (measured) = 17.8 W/kg

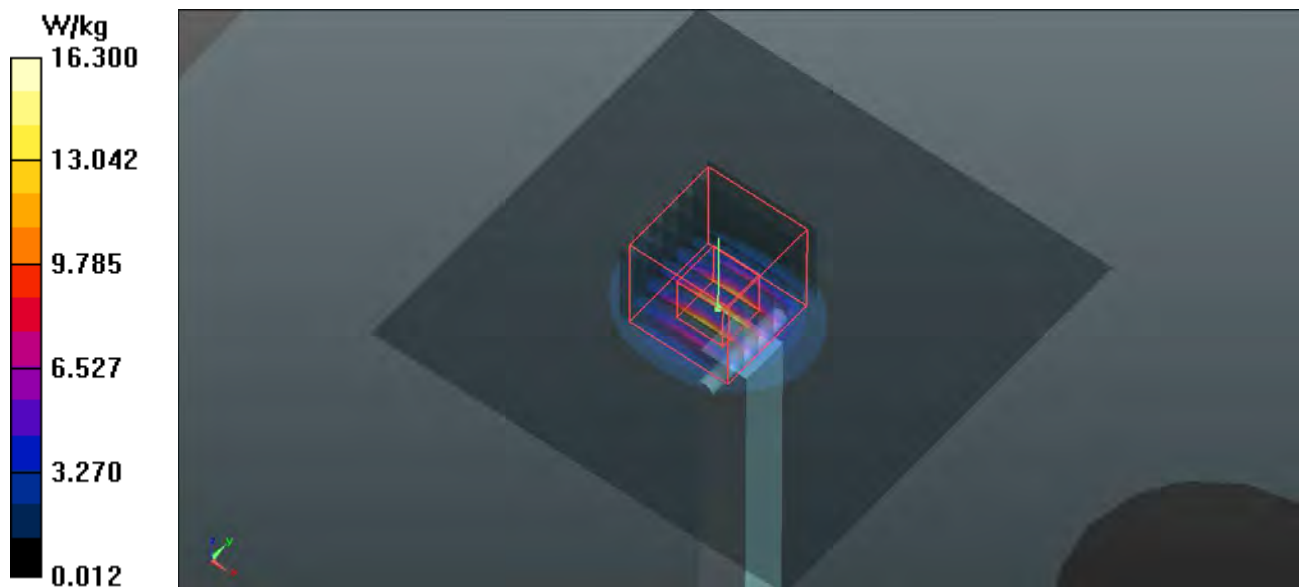

## **Appendix B. SAR Plots of SAR Measurement**

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination, and measured SAR > 1.5 W/kg are shown as follows.

**P01 GSM850\_GPRS11\_Right Cheek\_Ch251****DUT: 180829W002**

Communication System: GPRS11; Frequency: 848.8 MHz; Duty Cycle: 1:2.67

Medium: HSL835\_1012 Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.902$  S/m;  $\epsilon_r = 42.085$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.9 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3873; ConvF(9.69, 9.69, 9.69); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Left Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1722
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**- Area Scan (71x151x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.752 W/kg

**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.997 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.804 W/kg

**SAR(1 g) = 0.625 W/kg; SAR(10 g) = 0.451 W/kg**

Maximum value of SAR (measured) = 0.726 W/kg



**P02 GSM1900\_GPRS12\_Right Cheek\_Ch661****DUT: 180829W002**

Communication System: GPRS12; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium: HSL1900\_1014 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.387$  S/m;  $\epsilon_r = 39.605$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C ; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3873; ConvF(8.12, 8.12, 8.12); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Front Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1695
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**- Area Scan (81x151x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.421 W/kg


**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.340 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.490 W/kg

**SAR(1 g) = 0.324 W/kg; SAR(10 g) = 0.216 W/kg**

Maximum value of SAR (measured) = 0.405 W/kg

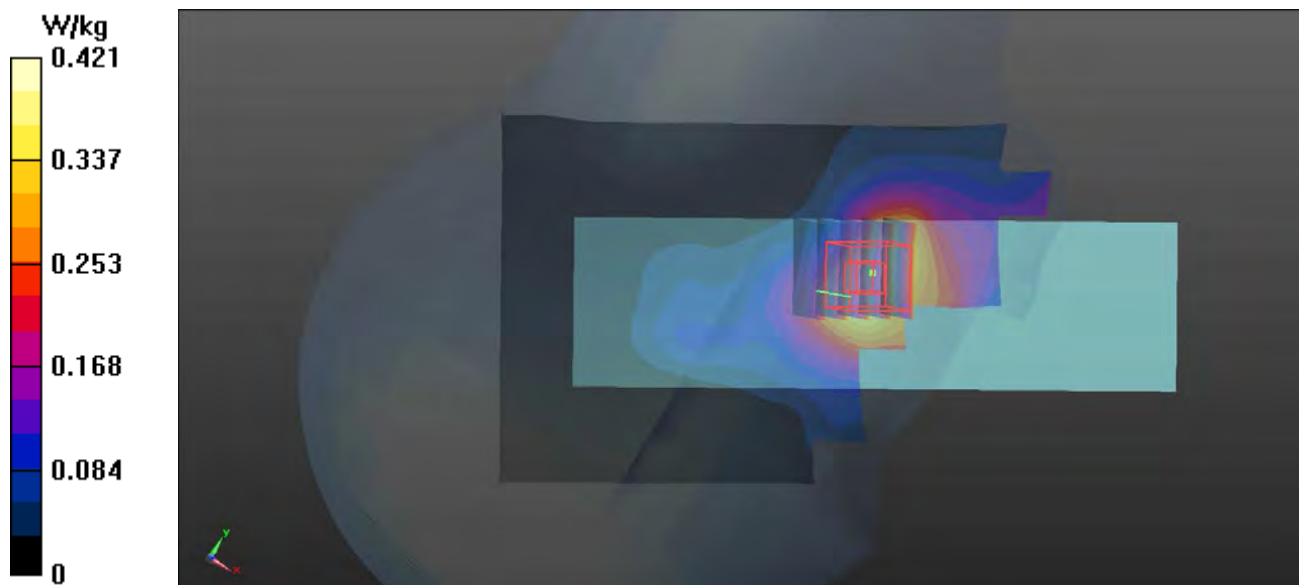



**P03 WCDMA II\_RMC12.2K\_Left Cheek\_Ch9538****DUT: 180829W002**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL1900\_1014 Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.377$  S/m;  $\epsilon_r = 39.527$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3873; ConvF(8.12, 8.12, 8.12); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Front Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1695
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**- Area Scan (81x151x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.424 W/kg


**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.765 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.505 W/kg

**SAR(1 g) = 0.322 W/kg; SAR(10 g) = 0.204 W/kg**

Maximum value of SAR (measured) = 0.413 W/kg

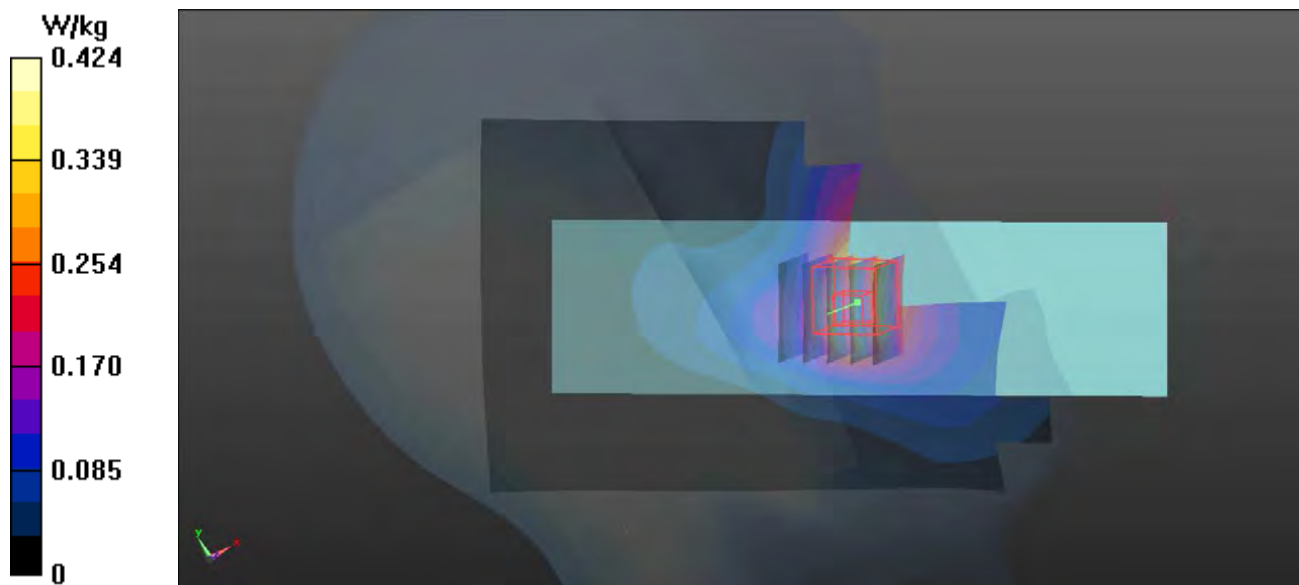

**P04 WCDMA IV\_RMC12.2K\_Right Cheek\_Ch1513****DUT: 180829W002**

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: HSL1750\_1013 Medium parameters used:  $f = 1753$  MHz;  $\sigma = 1.35$  S/m;  $\epsilon_r = 39.493$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.9 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3873; ConvF(8.39, 8.39, 8.39); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Front Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1695
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**- Area Scan (81x151x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.482 W/kg


**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.626 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.531 W/kg

**SAR(1 g) = 0.355 W/kg; SAR(10 g) = 0.240 W/kg**

Maximum value of SAR (measured) = 0.435 W/kg

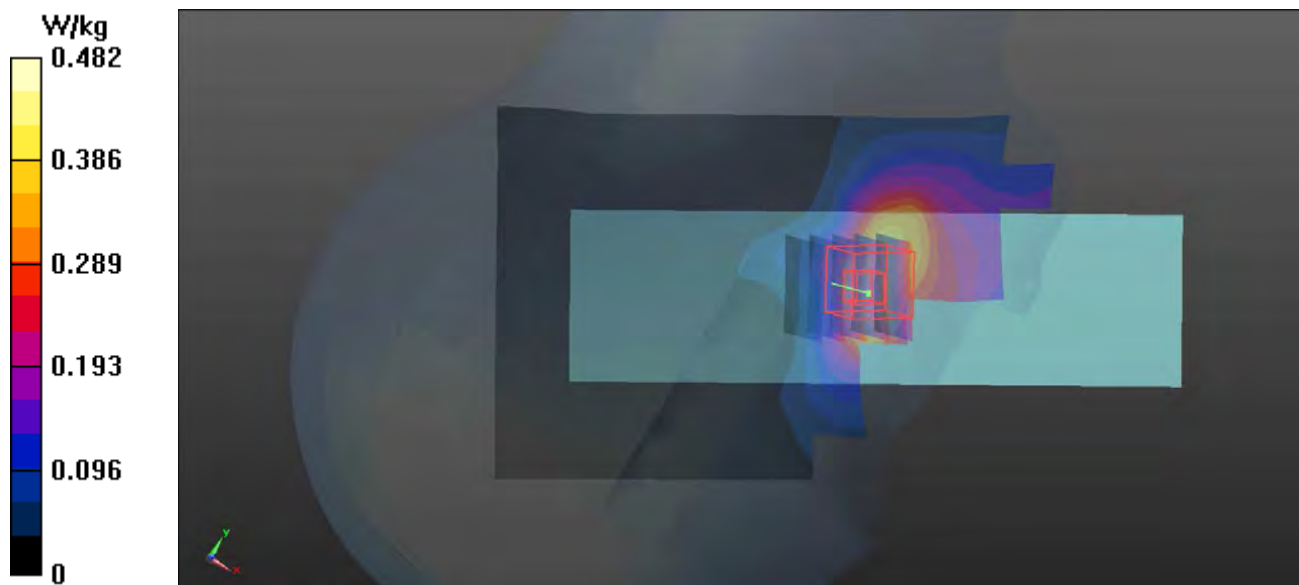

**P05 WCDMA V\_RMC12.2K\_Right Cheek\_Ch4182****DUT: 180829W002**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835\_1012 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.889$  S/m;  $\epsilon_r = 42.259$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.9 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3873; ConvF(9.49, 9.49, 9.49); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Left Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1722
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**- Area Scan (81x151x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.872 W/kg

**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.017 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.16 W/kg

**SAR(1 g) = 0.866 W/kg; SAR(10 g) = 0.597 W/kg**

Maximum value of SAR (measured) = 1.12 W/kg



**P06 CDMA BC0\_RC3+SO55\_Left Cheek\_Ch1013****DUT: 180829W002**

Communication System: CDMA2000; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: HSL835\_1012 Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 42.397$ ;  $\rho =$

$1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.9 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3873; ConvF(9.69, 9.69, 9.69); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Left Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1722
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**- Area Scan (81x151x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.03 W/kg


**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.520 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.863 W/kg; SAR(10 g) = 0.621 W/kg**

Maximum value of SAR (measured) = 1.02 W/kg

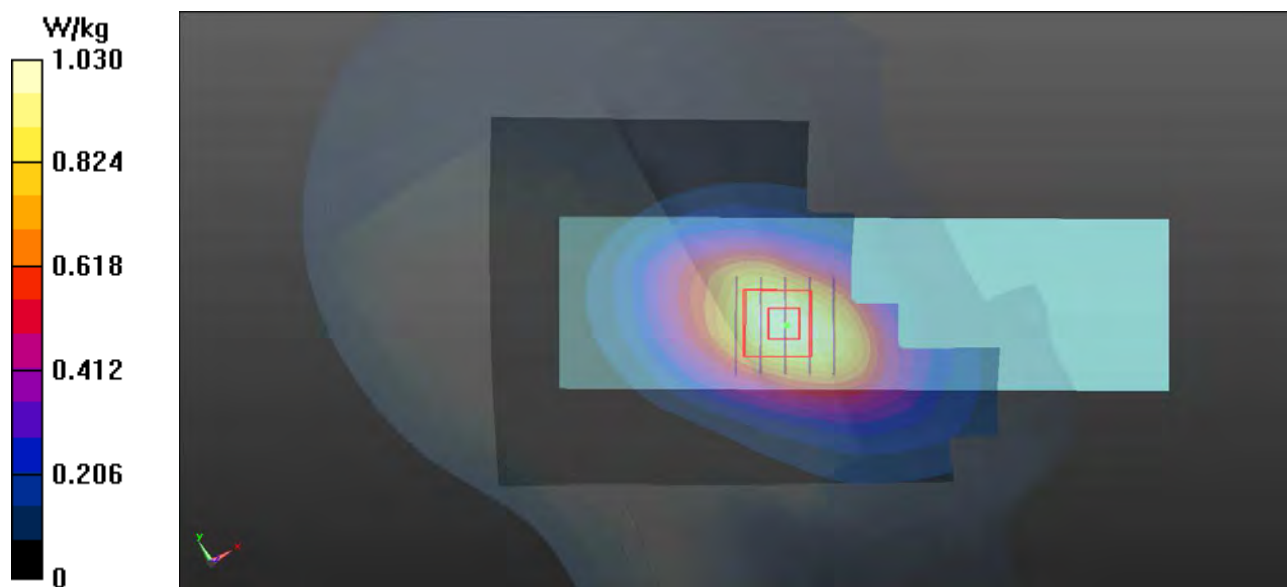

**P07 CDMA BC1\_RC3+SO55\_Left Cheek\_Ch600****DUT: 180829W002**

Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900\_1014 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.387$  S/m;  $\epsilon_r = 39.605$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3873; ConvF(8.12, 8.12, 8.12); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Front Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1695
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (81x151x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.405 W/kg



- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.999 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.463 W/kg

**SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.189 W/kg**

Maximum value of SAR (measured) = 0.377 W/kg

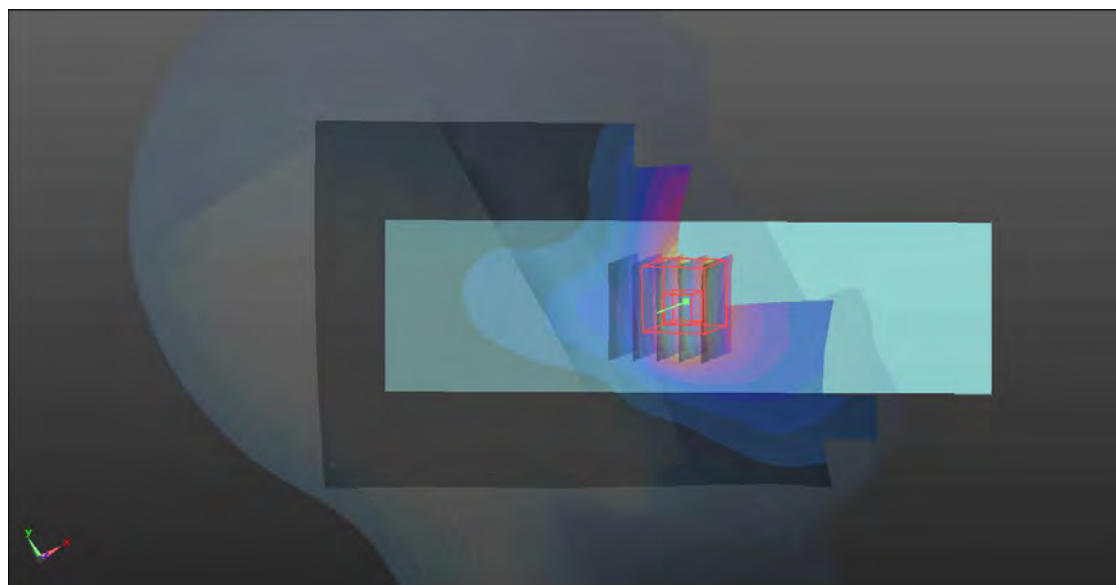

**P08 CDMA BC10\_RC3+SO55\_Left Cheek\_Ch580****DUT: 180829W002**

Communication System: CDMA2000; Frequency: 820.5 MHz; Duty Cycle: 1:1

Medium: HSL835\_1012 Medium parameters used:  $f = 820.5$  MHz;  $\sigma = 0.875$  S/m;  $\epsilon_r = 42.455$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.9 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3873; ConvF(9.69, 9.69, 9.69); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Left Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1722
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**- Area Scan (71x151x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 1.07 W/kg



**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 9.717 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.18 W/kg

**SAR(1 g) = 0.901 W/kg; SAR(10 g) = 0.649 W/kg**

Maximum value of SAR (measured) = 1.06 W/kg

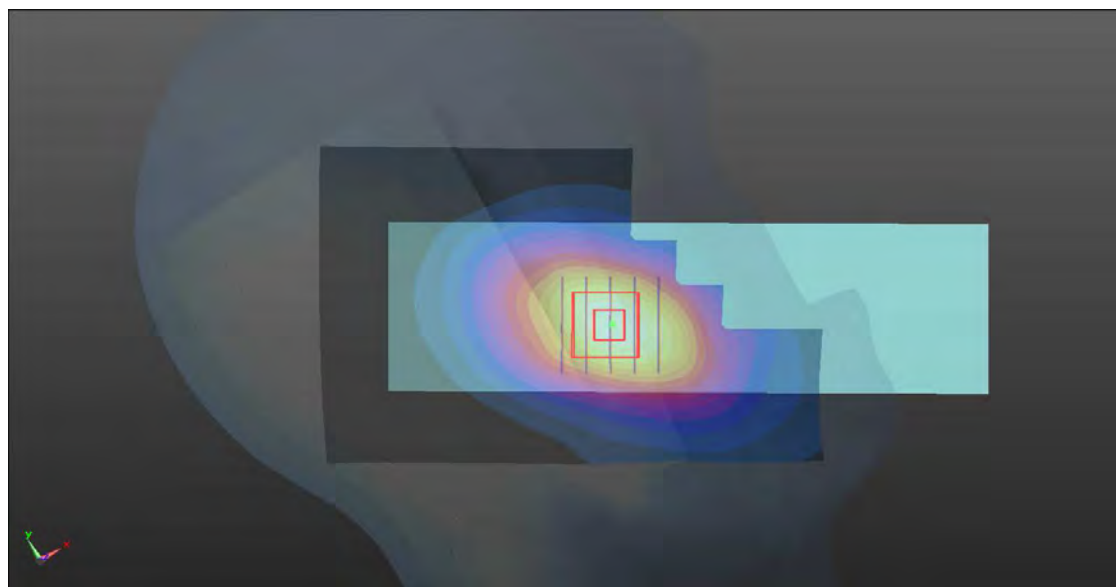

**P09 LTE 2\_QPSK20M\_Left Cheek\_Ch18900\_1RB\_OS0****DUT: 180829W002**

Communication System: LTE; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900\_1014 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.387$  S/m;  $\epsilon_r = 39.605$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3873; ConvF(8.12, 8.12, 8.12); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Front Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1695
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (81x151x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.254 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.086 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.302 W/kg

**SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.124 W/kg**

Maximum value of SAR (measured) = 0.251 W/kg





**P10 LTE 4\_QPSK20M\_Right Cheek\_Ch20300\_1RB\_OS0****DUT: 180829W002**

Communication System: LTE; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750\_1013 Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.341$  S/m;  $\epsilon_r = 39.523$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.9 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3873; ConvF(8.39, 8.39, 8.39); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Front Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1695
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**- Area Scan (81x151x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.552 W/kg

**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.670 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.603 W/kg

**SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.275 W/kg**

Maximum value of SAR (measured) = 0.492 W/kg





**P11 LTE 5\_QPSK10M\_Left Cheek\_Ch20450\_1RB\_OS24****DUT: 180829W002**

Communication System: LTE; Frequency: 829 MHz; Duty Cycle: 1:1

Medium: HSL835\_1012 Medium parameters used:  $f = 829$  MHz;  $\sigma = 0.883$  S/m;  $\epsilon_r = 42.347$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.9 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3873; ConvF(9.69, 9.69, 9.69); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Left Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1722
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**- Area Scan (81x151x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.978 W/kg


**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 8.683 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.830 W/kg; SAR(10 g) = 0.611 W/kg**

Maximum value of SAR (measured) = 0.957 W/kg

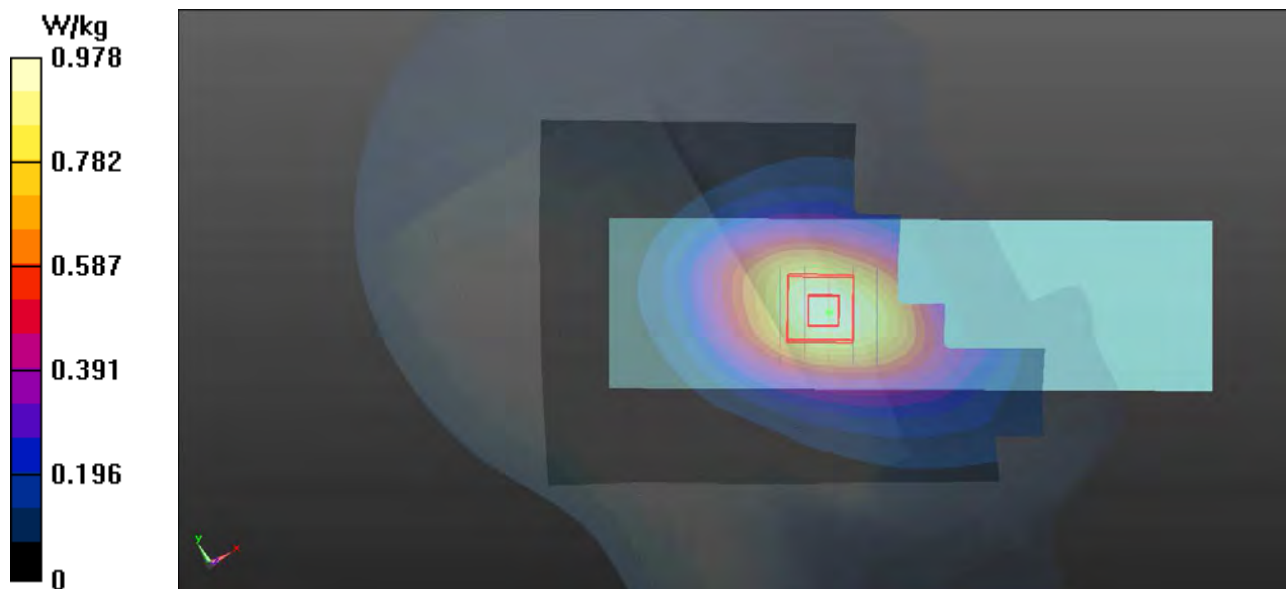

**P12 LTE 12\_QPSK10M\_Right Cheek\_Ch23130\_1RB\_OS24****DUT: 180829W002**

Communication System: LTE; Frequency: 711 MHz; Duty Cycle: 1:1

Medium: HSL750\_1011 Medium parameters used:  $f = 711$  MHz;  $\sigma = 0.863$  S/m;  $\epsilon_r = 40.760$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3873; ConvF(9.67, 9.67, 9.67); Calibrated: 2018/08/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2018/08/28
- Phantom: Left Phantom with CRP v5.0; Type: QD000P40CD; Serial: TP:1722
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**- Area Scan (71x151x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.629 W/kg

**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.135 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.600 W/kg; SAR(10 g) = 0.408 W/kg**

Maximum value of SAR (measured) = 0.597 W/kg

