

FCC SAR EVALUATION REPORT

**In accordance with the requirements of
FCC 47 CFR Part 2(2.1093), ANSI/IEEE C95.1-1992 and
IEEE Std 1528-2013**

Product Name : Smart Phone

Trademark : N/A

Model Name : H2022

Family Model : N/A

Report No. : S21071601209001

FCC ID : 2AXNU-H2022

Prepared for

Shenzhen Kaicheng Technology Co., Ltd.
Room 2005,20th Floor, Block C, Dachong Business Center, Yuehai Street,Nanshan
District,Shenzhen,Guangdong,China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,
Bao'an District, Shenzhen 518126 P.R.China.
Tel.: 400-800-6106, 0755-2320 0050, 0755-2320 0090
Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name.....: Shenzhen Kaicheng Technology Co., Ltd.
Address.....: Room 2005,20th Floor, Block C, Dachong Business Center, Yuehai
Street,Nanshan District,Shenzhen,Guangdong,China
Manufacturer's Name.....: Shenzhen Kaicheng Technology Co., Ltd.
Address.....: Room 2005,20th Floor, Block C, Dachong Business Center, Yuehai
Street,Nanshan District,Shenzhen,Guangdong,China

Product description

Product name.....: Smart Phone
Trademark: N/A
Model Name: H2022
Family Model.....: N/A
FCC 47 CFR Part 2(2.1093)

Standards.....: ANSI/IEEE C95.1-1992;IEEE Std 1528-2013
Published RF exposure KDB procedures

This device described above has been tested by Shenzhen NTEK. In accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 and KDB 865664 D01. Testing has shown that this device is capable of compliance with localized specific absorption rate (SAR) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992. The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests.....: Jul. 26, 2021 ~ Aug. 12, 2021
Date of Issue: Aug. 28, 2021
Test Result: **Pass**

Prepared By : Jacob . chen
(Test Engineer) (Jacob Chen)

Approved By : Alex
(Lab Manager) (Alex Li)

※ ※ Revision History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	Aug. 28, 2021	Jacob Chen

TABLE OF CONTENTS

1. General Information	6
1.1. RF exposure limits.....	6
1.2. Statement of Compliance	7
1.3. EUT Description	7
1.4. Test specification(s)	9
1.5. Ambient Condition.....	9
2. SAR Measurement System	10
2.1. SATIMO SAR Measurement Set-up Diagram	10
2.2. Robot	11
2.3. E-Field Probe.....	12
2.3.1. E-Field Probe Calibration	12
2.4. SAM phantoms	13
2.4.1. Technical Data	14
2.5. Device Holder	15
2.6. Test Equipment List	16
3. SAR Measurement Procedures	18
3.1. Power Reference	18
3.2. Area scan & Zoom scan.....	18
3.3. Description of interpolation/extrapolation scheme	20
3.4. Volumetric Scan	20
3.5. Power Drift	20
4. System Verification Procedure	21
4.1. Tissue Verification	21
4.1.1. Tissue Dielectric Parameter Check Results	22
4.2. System Verification Procedure	23
4.2.1. System Verification Results	24
5. SAR Measurement variability and uncertainty	25
5.1. SAR measurement variability.....	25
5.2. SAR measurement uncertainty	25
6. RF Exposure Positions	26
6.1. Ear and handset reference point	26
6.2. Definition of the cheek position	26
6.3. Definition of the tilt position	28
6.4. Body Worn Accessory	28
6.5. Wireless Router Devices	29
7. RF Output Power	30
7.1. GSM Conducted Power	30
7.2. WCDMA Conducted Power	31
7.3. LTE Conducted Power	32

7.4. WLAN & Bluetooth Output Power	51
7.4.1. Output Power Results Of WLAN	51
7.4.2. Output Power Results Of Bluetooth.....	53
8. Antenna Location.....	54
9. Stand-alone SAR test exclusion.....	55
10. SAR Results	55
10.1. SAR measurement results	55
10.1.1. SAR measurement Result of GSM850.....	55
10.1.2. SAR measurement Result of GSM1900.....	56
10.1.3. SAR measurement Result of WCDMA Band 2.....	57
10.1.4. SAR measurement Result of WCDMA Band 4.....	58
10.1.5. SAR measurement Result of WCDMA Band 5.....	59
10.1.6. SAR measurement Result of LTE Band 2	60
10.1.7. SAR measurement Result of LTE Band 4	62
10.1.8. SAR measurement Result of LTE Band 5	64
10.1.9. SAR measurement Result of LTE Band 7	66
10.1.10. SAR measurement Result of LTE Band 12	68
10.1.11. SAR measurement Result of LTE Band 17	70
10.1.12. SAR measurement Result of LTE Band 25	72
10.1.13. SAR measurement Result of LTE Band 26A	73
10.1.14. SAR measurement Result of LTE Band 26B	75
10.1.15. SAR measurement Result of WLAN 2.4G	77
10.1.16. SAR measurement Result of WLAN 5.2G	78
10.1.17. SAR measurement Result of WLAN 5.3G	78
10.1.18. SAR measurement Result of WLAN 5.6G	79
10.1.19. SAR measurement Result of WLAN 5.8G	80
10.2. SAR Summation Scenario.....	81
11. Appendix A. Photo documentation	82
12. Appendix B. System Check Plots.....	83
13. Appendix C. Plots of High SAR Measurement.....	102
14. Appendix D. Calibration Certificate	180

1. General Information

1.1. RF exposure limits

(A).Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B).Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE
HEAD AND TRUNK LIMIT
1.6 W/kg
APPLIED TO THIS EUT

1.2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for H2022 are as follows.

RF Exposure Conditions		Equipment Class -Highest Reported SAR (W/kg)			
		PCE	DTS	NII	DSS
1-g Head		0.644	0.347	0.726	N/A
1-g Body-Worn (Separation distance of 10mm)		1.150	0.397	0.327	N/A
1-g Hotspot (Separation distance of 10mm)		1.150	0.397	0.327	N/A
Max Simultaneous Tx	Head	1.370	0.991	1.370	0.811
	Body-Worn	1.547	1.547	1.477	1.234
	Hotspot	1.547	1.547	1.477	1.234

Note: The Max Simultaneous Tx is calculated based on the same configuration and test position. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 & KDB 865664 D01.

1.3. EUT Description

Device Information	
Product Name	Smart Phone
Trade Name	N/A
Model Name	H2022
Family Model	N/A
FCC ID	2AXNU-H2022
Device Phase	Identical Prototype
Exposure Category	General population / Uncontrolled environment
Antenna	PIFA Antenna
Battery Information	DC 3.85V, 4800mAh
Hard Ware Version	2000-MB-P2.1
Soft Ware Version	H2022_2201_V0238
Device Operating Configurations	
Supporting Mode(s)	GSM 850/1900, WCDMA Band 2/4/5, LTE Band 2/4/5/7/12/17/25/26, WLAN 2.4G/5G, Bluetooth, NFC
Test Modulation	GSM(GMSK/8PSK), WCDMA(QPSK), LTE(QPSK/16QAM), WLAN(DSSS/OFDM), Bluetooth(GFSK, $\pi/4$ -DQPSK, 8DPSK), NFC(ASK)
Device Class	B

Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824-849	869-894
	GSM 1900	1850-1910	1930-1990
	WCDMA Band 2	1850-1910	1930-1990
	WCDMA Band 4	1710-1755	2110-2155
	WCDMA Band 5	824-849	869-894
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710-1755	2110-2155
	LTE Band 5	824-849	869-894
	LTE Band 7	2500-2570	2620-2690
	LTE Band 12	699-716	729-746
	LTE Band 17	704-716	734-746
	LTE Band 25	1850-1915	1930-1995
	LTE Band 26	814-849	859-894
	WLAN 2.4G	2412-2462	
	WLAN 5.2G	5180-5240	
	WLAN 5.3G	5260-5320	
	WLAN 5.6G	5500-5700	
	WLAN 5.8G	5745-5825	
	Bluetooth	2402-2480	
	NFC	13.56	
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
EDGE Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
Power Class	4, tested with power level 5(GSM 850)		
	1, tested with power level 0(GSM 1900)		
	3, tested with power control -all 1"(WCDMA Band 2)		
	3, tested with power control —all 1"(WCDMA Band 4)		
	3, tested with power control —all 1"(WCDMA Band 5)		
	3, tested with power control all Max.(LTE Band 2)		
	3, tested with power control all Max.(LTE Band 4)		
	3, tested with power control all Max.(LTE Band 5)		
	3, tested with power control all Max.(LTE Band 7)		
	3, tested with power control all Max.(LTE Band 12)		
	3, tested with power control all Max.(LTE Band 17)		
	3, tested with power control all Max.(LTE Band 25)		
	3, tested with power control all Max.(LTE Band 26)		

1.4. Test specification(s)


FCC 47 CFR Part 2(2.1093)
ANSI/IEEE C95.1-1992
IEEE Std 1528-2013
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting
KDB 447498 D01 General RF Exposure Guidance
KDB 248227 D01 802.11 Wi-Fi SAR
KDB 941225 D01 3G SAR Procedures
KDB 941225 D05 SAR for LTE Devices
KDB 941225 D06 Hotspot SAR
KDB 648474 D04 Handset SAR

1.5. Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2. SAR Measurement System

2.1. SATIMO SAR Measurement Set-up Diagram

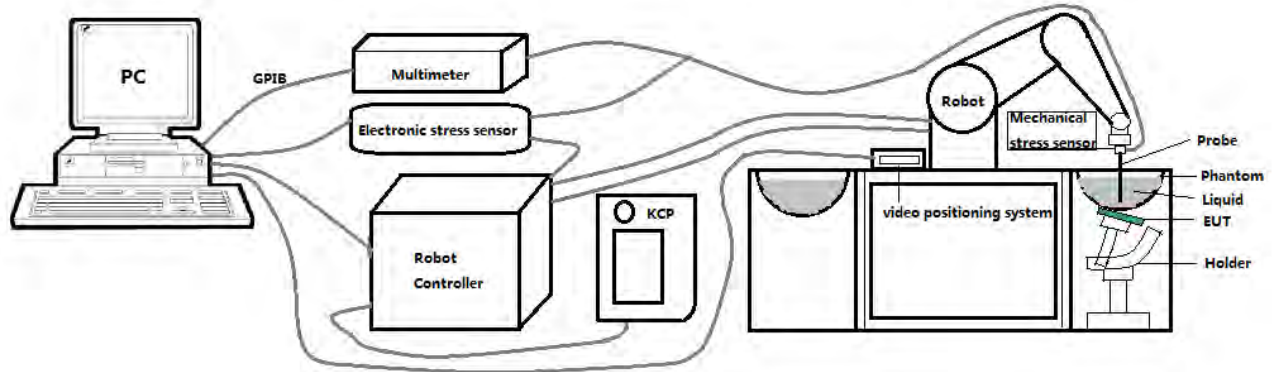

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 901 mm), which positions the probes with a positional repeatability of better than ± 0.03 mm. The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

The first step of the field measurement is the evaluation of the voltages induced on the probe by the device under test. Probe diode detectors are nonlinear. Below the diode compression point, the output voltage is proportional to the square of the applied E-field; above the diode compression point, it is linear to the applied E-field. The compression point depends on the diode, and a calibration procedure is necessary for each sensor of the probe.

The Keithley multimeter reads the voltage of each sensor and send these three values to the PC. The corresponding E field value is calculated using the probe calibration factors, which are stored in the working directory. This evaluation includes linearization of the diode characteristics. The field calculation is done separately for each sensor. Each component of the E field is displayed on the "Dipole Area Scan Interface" and the total E field is displayed on the "3D Interface"

2.2. Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability ± 0.03 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

2.3. E-Field Probe

This E-field detection probe is composed of three orthogonal dipoles linked to special Schottky diodes with low detection thresholds. The probe allows the measurement of electric fields in liquids such as the one defined in the IEEE and CENELEC standards.

For the measurements the Specific Dosimetric E-Field Probe SN 08/16 EPGO287 with following specifications is used



- Dynamic range: 0.01-100 W/kg
 - Tip Diameter : 2.5 mm
 - Distance between probe tip and sensor center: 1 mm
 - Distance between sensor center and the inner phantom surface: 2 mm (repeatability better than ± 1 mm).
 - Probe linearity: ± 0.08 dB
 - Axial isotropy: ± 0.01 dB
 - Hemispherical Isotropy: ± 0.01 dB
 - Calibration range: 650MHz to 5900MHz for head & body simulating liquid.
 - Lower detection limit: 8mW/kg
- Angle between probe axis (evaluation axis) and surface normal line: less than 30° .

2.3.1. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe are tested. The calibration data can be referred to appendix D of this report.

2.4. SAM phantoms


Photo of SAM phantom SN 16/15 SAM119



The SAM phantom is used to measure the SAR relative to people exposed to electro-magnetic field radiated by mobile phones.

2.4.1. Technical Data

Serial Number	Shell thickness	Filling volume	Dimensions	Positionner Material	Permittivity	Loss Tangent
SN 16/15 SAM119	2 mm ±0.2 mm	27 liters	Length:1000 mm Width:500 mm Height:200 mm	Gelcoat with fiberglass	3.4	0.02

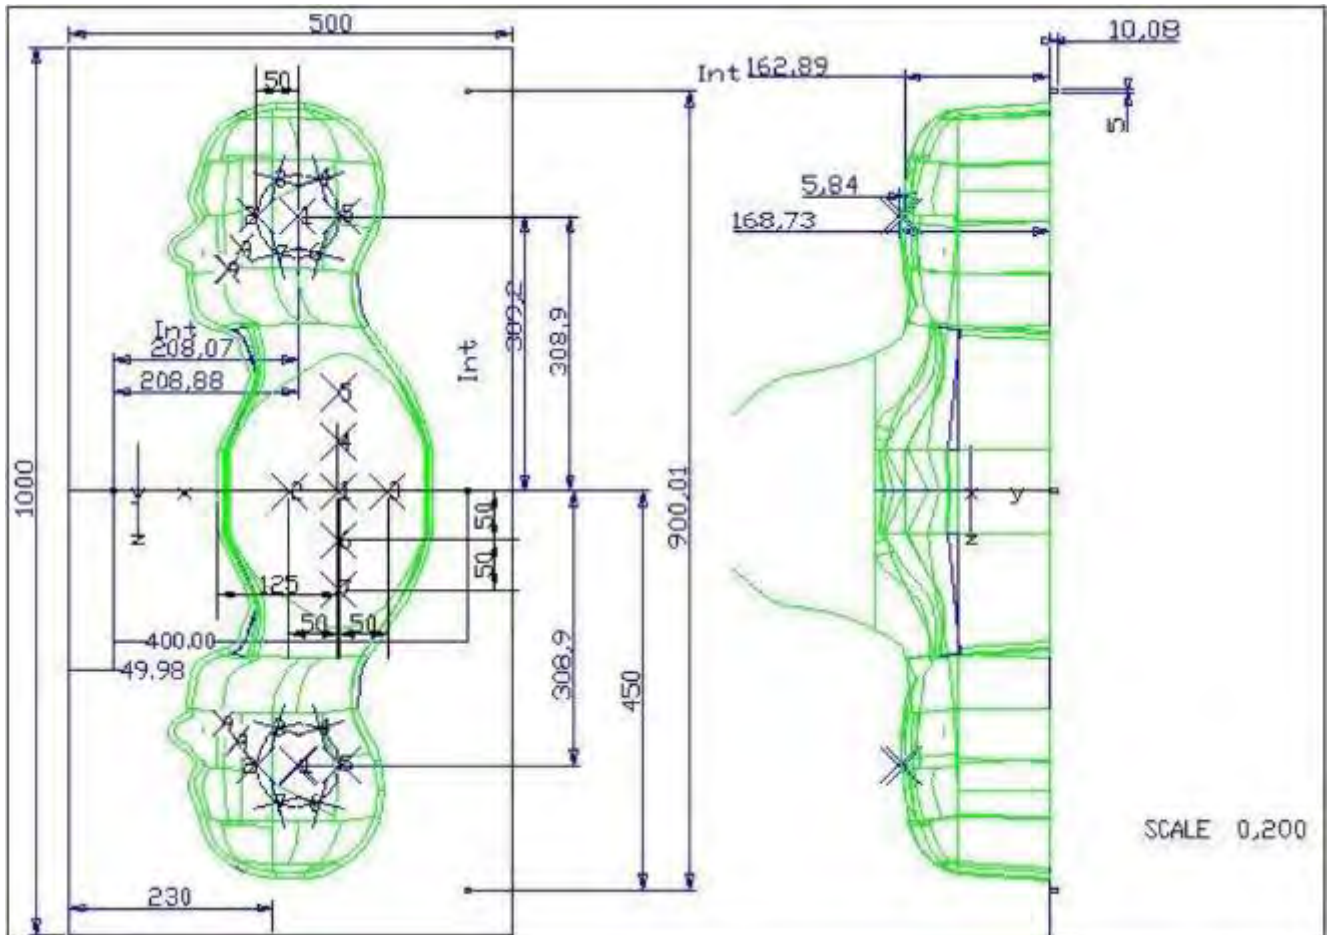


Serial Number	Left Head(mm)		Right Head(mm)		Flat Part(mm)	
SN 16/15 SAM119	2	2.02	2	2.08	1	2.09
	3	2.05	3	2.06	2	2.06
	4	2.07	4	2.07	3	2.08
	5	2.08	5	2.08	4	2.10
	6	2.05	6	2.07	5	2.10
	7	2.05	7	2.05	6	2.07
	8	2.07	8	2.06	7	2.07
	9	2.08	9	2.06	-	-

The test, based on ultrasonic system, allows measuring the thickness with an accuracy of 10 μm .

2.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 degree.

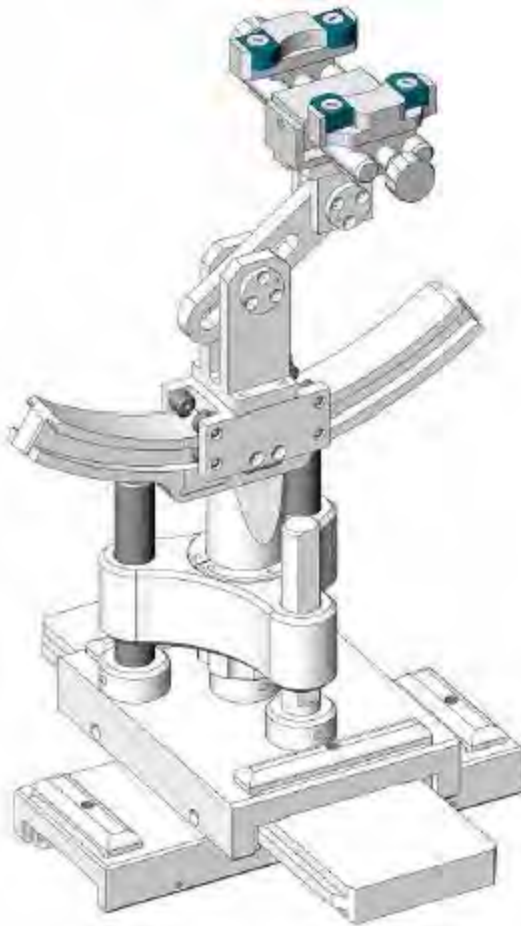

Serial Number	Holder Material	Permittivity	Loss Tangent
SN 16/15 MSH100	Delrin	3.7	0.005

2.6. Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked ☒

	Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
					Last Cal.	Due Date
☒	MVG	E FIELD PROBE	SSE2	SN 08/16 EPGO287	Mar. 01, 2021	Feb. 28, 2022
☒	MVG	750 MHz Dipole	SID750	SN 03/15 DIP 0G750-355	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	835 MHz Dipole	SID835	SN 03/15 DIP 0G835-347	Mar. 01, 2021	Feb. 28, 2024
☐	MVG	900 MHz Dipole	SID900	SN 03/15 DIP 0G900-348	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	1800 MHz Dipole	SID1800	SN 03/15 DIP 1G800-349	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	1900 MHz Dipole	SID1900	SN 03/15 DIP 1G900-350	Mar. 01, 2021	Feb. 28, 2024
☐	MVG	2000 MHz Dipole	SID2000	SN 03/15 DIP 2G000-351	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	2450 MHz Dipole	SID2450	SN 03/15 DIP 2G450-352	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	2600 MHz Dipole	SID2600	SN 03/15 DIP 2G600-356	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	5000 MHz Dipole	SWG5500	SN 13/14 WGA 33	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	Liquid measurement Kit	SCLMP	SN 21/15 OCPG 72	NCR	NCR
☒	MVG	Power Amplifier	N.A	AMPLISAR_28/14_003	NCR	NCR
☒	KEITHLEY	Millivoltmeter	2000	4072790	NCR	NCR
☒	R&S	Universal radio communication tester	CMU200	117858	Jul. 01, 2021	Jun. 30, 2022
☒	R&S	Wideband radio communication tester	CMW500	103917	Jul. 01, 2021	Jun. 30, 2022
☒	HP	Network Analyzer	8753D	3410J01136	Jul. 01, 2021	Jun. 30, 2022
☒	Agilent	PSG Analog Signal Generator	E8257D	MY51110112	Jul. 01, 2021	Jun. 30, 2022

☒	Agilent	Power meter	E4419B	MY45102538	Jul. 01, 2021	Jun. 30, 2022
☒	Agilent	Power sensor	E9301A	MY41495644	Jul. 01, 2021	Jun. 30, 2022
☒	Agilent	Power sensor	E9301A	US39212148	Jul. 01, 2021	Jun. 30, 2022
☒	MCLI/USA	Directional Coupler	CB11-20	0D2L51502	Jul. 17, 2020	Jul. 16, 2023

3. SAR Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/Bluetooth power measurement, use engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/Bluetooth output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix A demonstrates.
- (c) Set scan area, grid size and other setting on the OPENSAR software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

3.1. Power Reference

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

3.2. Area scan & Zoom scan

The area scan is a 2D scan to find the hot spot location on the DUT. The zoom scan is a 3D scan above the hot spot to calculate the 1g and 10g SAR value.

Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W/kg 1 g limit, or 1,26 W/kg for 2 W/kg, 10 g limit).

Area scan & Zoom scan scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	≤ 1.5 · $\Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

3.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is used to determine these highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

3.4. Volumetric Scan

The volumetric scan consists of a full 3D scan over a specific area. This 3D scan is useful for multi Tx SAR measurement. Indeed, it is possible with OpenSAR to add, point by point, several volumetric scans to calculate the SAR value of the combined measurement as it is defined in the standard IEEE1528 and IEC62209.

3.5. Power Drift

All SAR testing is under the EUT installed full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in V/m. If the power drifts more than $\pm 5\%$, the SAR will be retested.


4. System Verification Procedure

4.1. Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% of weight)	Head Tissue									
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	34.40	34.40	34.40	55.36	55.36	57.87	57.87	57.87	65.53	65.53
NaCl	0.79	0.79	0.79	0.35	0.35	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	64.81	64.81	64.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	30.45	30.45	19.97	19.97	19.97	24.24	24.24
DGBE	0.00	0.00	0.00	13.84	13.84	22.00	22.00	22.00	10.23	10.23

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid depth from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm.

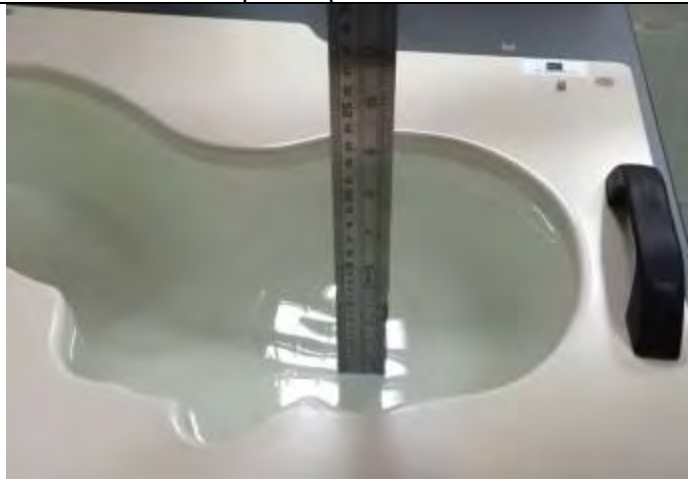Photo of Liquid depth for Head Position	Photo of Liquid depth for Body Position
	

4.1.1. Tissue Dielectric Parameter Check Results

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.


Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		ϵ_r ($\pm 5\%$)	σ (S/m) ($\pm 5\%$)	ϵ_r	σ (S/m)		
Head 750	750	41.96 (39.86~44.06)	0.89 (0.85~0.93)	42.64	0.90	21.3 °C	Jul. 26, 2021
Head 850	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	42.61	0.94	21.6 °C	Jul. 28, 2021
Head 1800	1800	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.96	1.38	21.3 °C	Jul. 29, 2021
Head 1900	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.95	1.44	21.5 °C	Aug. 12, 2021
Head 2450	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	39.76	1.80	21.5 °C	Aug. 03, 2021
Head 2600	2600	39.01 (37.06~40.96)	1.96 (1.86~2.06)	39.31	1.96	21.4 °C	Aug. 09, 2021
Head 5200	5200	36.00 (34.20~37.80)	4.66 (4.43~4.89)	37.15	4.73	21.5 °C	Aug. 08, 2021
Head 5600	5600	35.50 (33.73~37.28)	5.07 (4.82~5.32)	36.17	5.12	21.3 °C	Aug. 11, 2021
Head 5800	5800	35.30 (33.54~37.07)	5.27 (5.01~5.53)	36.01	5.27	21.8 °C	Aug. 05, 2021

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

4.2. System Verification Procedure

The system verification is performed for verifying the accuracy of the complete measurement system and performance of the software. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system verification to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system verification to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

The system verification is shown as below picture:

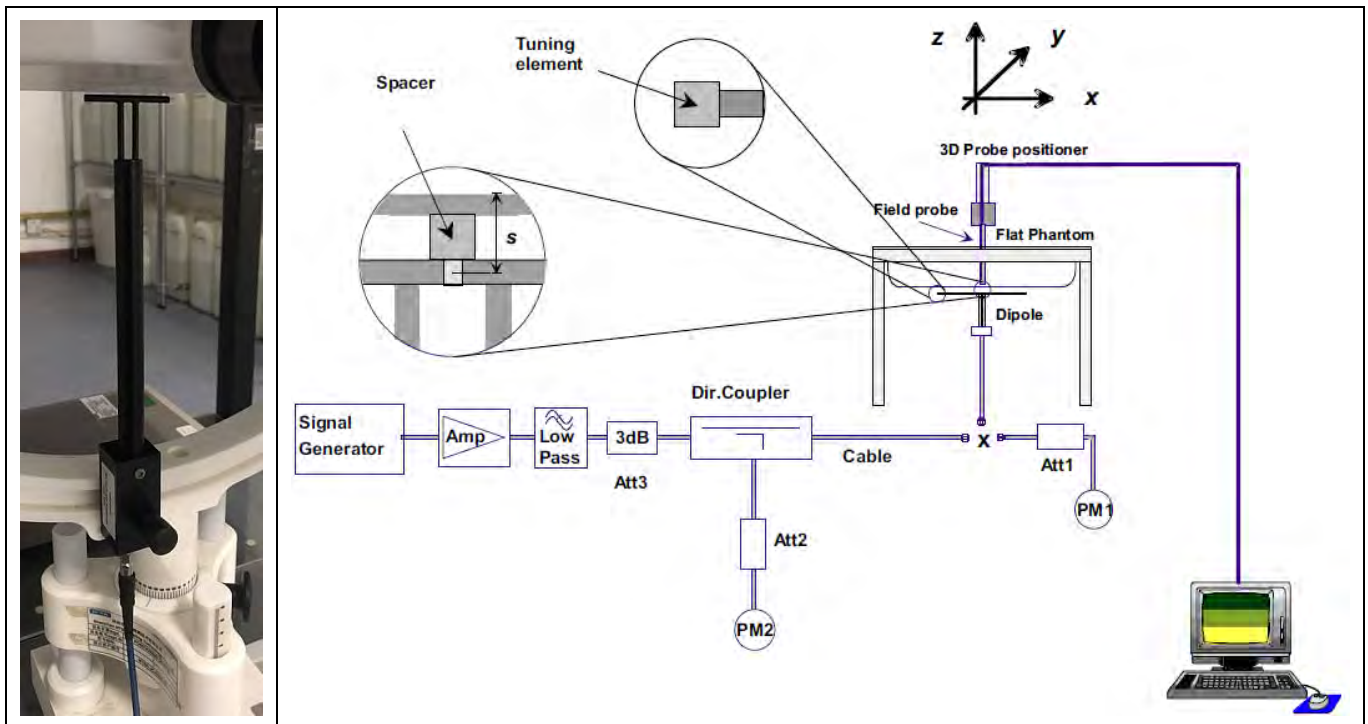

4.2.1. System Verification Results

Comparing to the original SAR value provided by SATIMO, the verification data should be within its specification of $\pm 10\%$. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance verification can meet the variation criterion and the plots can be referred to Appendix B of this report.

System Verification	Target SAR (1W) ($\pm 10\%$)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (W/Kg)	10-g (W/Kg)	1-g (W/Kg)	10-g (W/Kg)		
750MHz	8.53 (7.68~9.38)	5.56 (5.01~6.11)	8.06	5.26	21.3 °C	Jul. 26, 2021
835MHz	9.84 (8.86~10.82)	6.22 (5.60~6.84)	9.93	5.98	21.6 °C	Jul. 28, 2021
1800MHz	37.96 (34.17~41.75)	19.81 (17.83~21.79)	37.25	21.41	21.3 °C	Jul. 29, 2021
1900MHz	40.37 (36.34~44.40)	20.48 (18.44~22.52)	41.18	21.09	21.5 °C	Aug. 12, 2021
2450MHz	53.69 (48.33~59.05)	23.94 (21.55~26.33)	50.07	23.34	21.5 °C	Aug. 03, 2021
2600MHz	55.83 (50.25~61.41)	24.19 (21.78~26.60)	55.26	24.28	21.4 °C	Aug. 09, 2021
5200MHz	162.34 (146.11~178.57)	55.42 (49.88~60.96)	167.89	56.31	21.5 °C	Aug. 08, 2021
5600MHz	174.92 (157.43~192.41)	58.63 (52.77~64.49)	189.96	59.64	21.3 °C	Aug. 11, 2021
5800MHz	178.89 (161.01~196.77)	59.32 (53.39~65.25)	186.37	60.37	21.8 °C	Aug. 05, 2021

5. SAR Measurement variability and uncertainty

5.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

5.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

6. RF Exposure Positions

6.1. Ear and handset reference point

Figure 6.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M”, the left ear reference point (ERP) is marked “LE”, and the right ERP is marked “RE”.



Fig 6.1.1 Front, back, and side views of SAM phantom

6.2. Definition of the cheek position

1. Define two imaginary lines on the handset, the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 6.2.1 and Figure 6.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 6.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 6.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
2. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
3. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP
4. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
5. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.

6. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 6.2.3. The actual rotation angles should be documented in the test report.

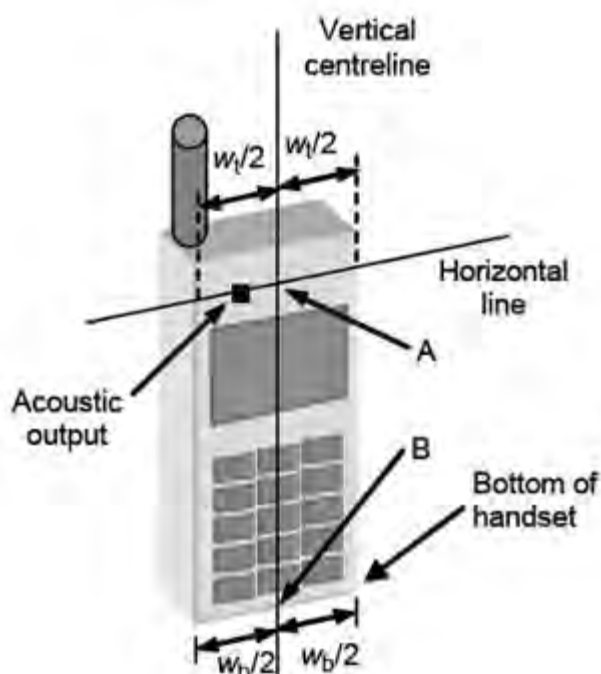


Fig 6.2.1 Handset vertical and horizontal reference lines—fixed case

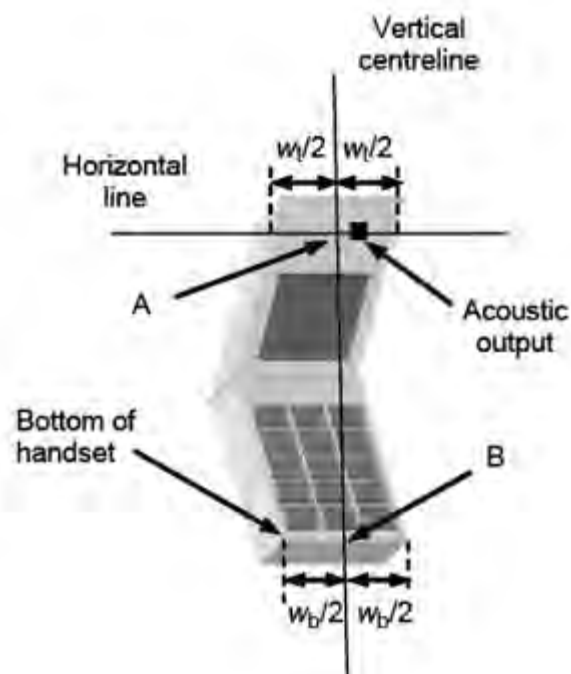


Fig 6.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

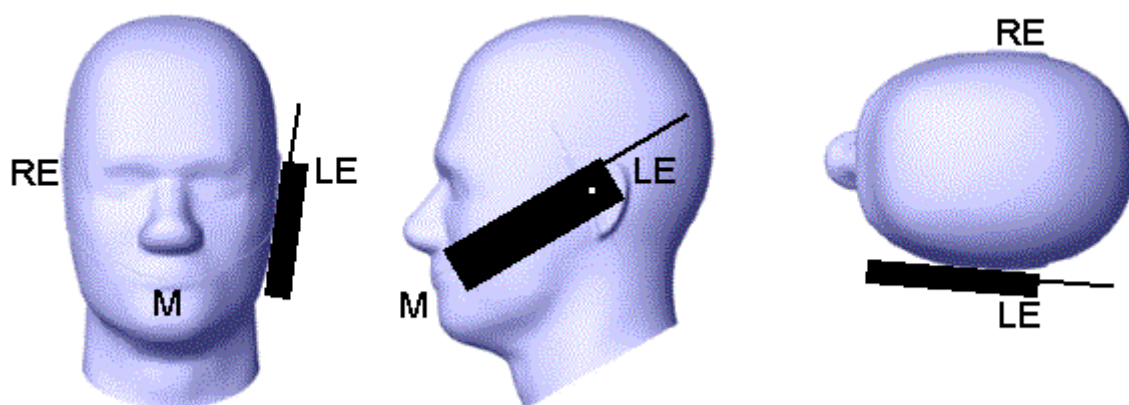


Fig 6.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

6.3. Definition of the tilt position

1. While maintaining the orientation of the handset, retract the handset parallel to the reference plane far enough away from the phantom to enable a rotation of the device by 15 degree.
2. Rotate the Handset around the horizontal line by 15 degree (see Figure 6.3.1).
3. While maintaining the orientation of the handset, move the handset towards the phantom on a line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, e.g., the antenna with the back of the phantom head, the angle of the handset shall be reduced. In this case, the tilt position is obtained if any part of the handset is in contact with the pinna as well as a second part of the handset is in contact with the phantom, e.g., the antenna with the back of the head.

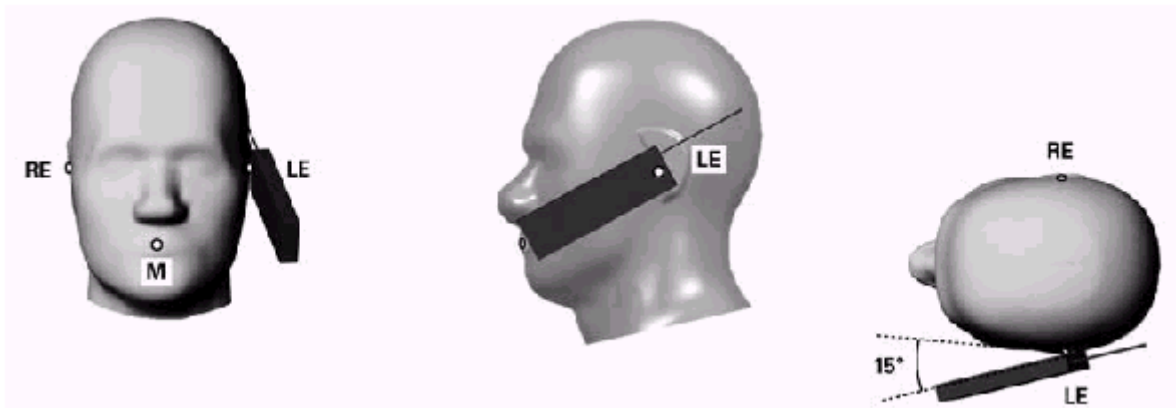


Figure 6.3.1 – Tilt position of the wireless device on the left side of SAM

6.4. Body Worn Accessory

1. Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.4.1). Per KDB 648474 D04, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $< 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.
2. Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest

spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

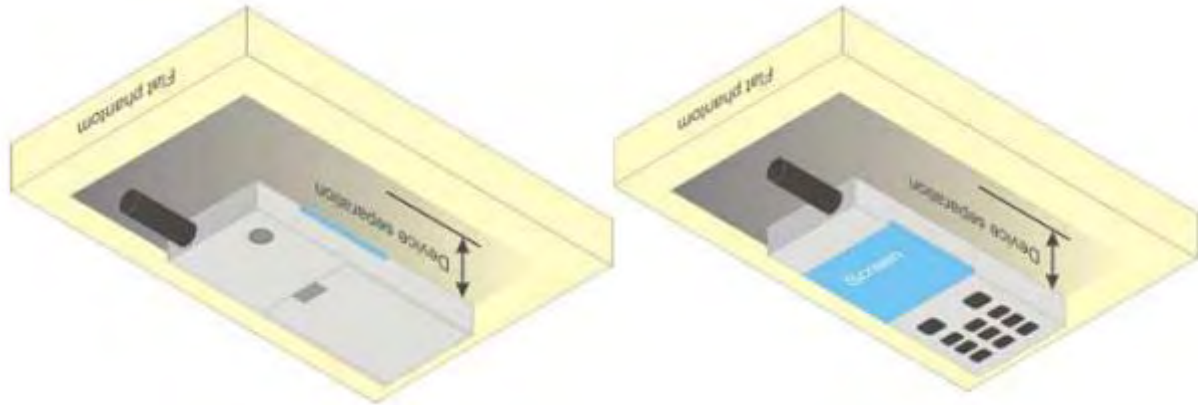


Figure 6.4.1 – Test positions for body-worn devices

6.5. Wireless Router Devices

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WLAN simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WLAN transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WLAN transmitter according to FCC KDB Publication 447498 D01 publication procedures. The “Portable Hotspot” feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

7. RF Output Power

7.1. GSM Conducted Power

Band GSM850	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	128	189	251	Tune-up	128	189	251
Frequency (MHz)	(dBm)	824.2	836.4	848.8	(dBm)	824.2	836.4	848.8
GSM (GMSK)	33.00	32.56	32.57	32.53	23.97	23.53	23.54	23.50
GPRS(GMSK,1 Tx slot)	33.00	32.61	32.57	32.57	23.97	23.58	23.54	23.54
GPRS(GMSK,2 Tx slot)	32.00	31.98	31.94	31.93	25.98	25.96	25.92	25.91
GPRS(GMSK,3 Tx slot)	30.50	30.37	30.33	30.31	26.24	26.11	26.07	26.05
GPRS(GMSK,4 Tx slot)	29.50	29.38	29.37	29.34	26.49	26.37	26.36	26.33
EGPRS(8PSK,1 Tx slot)	27.50	26.88	27.34	27.38	18.47	17.85	18.31	18.35
EGPRS(8PSK,2 Tx slot)	26.50	25.96	26.27	26.30	20.48	19.94	20.25	20.28
EGPRS(8PSK,3 Tx slot)	24.50	24.10	23.98	23.95	20.24	19.84	19.72	19.69
EGPRS(8PSK,4 Tx slot)	23.00	22.70	22.68	22.68	19.99	19.69	19.67	19.67
Band GSM1900	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	512	661	810	Tune-up	512	661	810
Frequency (MHz)	(dBm)	1850.2	1880.0	1909.8	(dBm)	1850.2	1880.0	1909.8
GSM (GMSK)	30.50	29.84	30.33	30.40	21.47	20.81	21.30	21.37
GPRS(GMSK,1 Tx slot)	30.50	29.83	30.28	30.37	21.47	20.80	21.25	21.34
GPRS(GMSK,2 Tx slot)	30.00	29.08	29.54	29.67	23.98	23.06	23.52	23.65
GPRS(GMSK,3 Tx slot)	28.00	27.33	27.81	27.93	23.74	23.07	23.55	23.67
GPRS(GMSK,4 Tx slot)	27.00	26.26	26.77	26.90	23.99	23.25	23.76	23.89
EGPRS(8PSK,1 Tx slot)	26.50	25.61	26.10	26.07	17.47	16.58	17.07	17.04
EGPRS(8PSK,2 Tx slot)	25.50	24.86	25.00	25.08	19.48	18.84	18.98	19.06
EGPRS(8PSK,3 Tx slot)	23.50	22.41	22.77	23.09	19.24	18.15	18.51	18.83
EGPRS(8PSK,4 Tx slot)	22.00	21.29	21.81	21.56	18.99	18.28	18.80	18.55

Note: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 TS) - 9.03 dB

Frame-averaged power = Maximum burst averaged power (2 TS) - 6.02 dB

Frame-averaged power = Maximum burst averaged power (3 TS) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 TS) - 3.01 dB

7.2. WCDMA Conducted Power

Band	WCDMA Band 2			
Tx Channel	Tune-up	9262	9400	9538
Frequency (MHz)		1852.4	1880	1907.6
RMC 12.2Kbps	23.50	23.14	23.03	22.98
HSDPA Subtest-1	22.50	22.17	22.07	22.01
HSDPA Subtest-2	22.00	21.69	21.71	21.51
HSDPA Subtest-3	21.00	20.37	20.41	20.53
HSDPA Subtest-4	21.00	20.53	20.80	20.25
HSUPA Subtest-1	22.00	20.81	21.91	21.80
HSUPA Subtest-2	22.50	22.11	21.91	21.81
HSUPA Subtest-3	21.00	20.50	20.93	20.80
HSUPA Subtest-4	22.50	22.18	22.08	22.02
HSUPA Subtest-5	21.50	20.65	21.22	21.43
Band	WCDMA Band 4			
Tx Channel	Tune-up	1312	1413	1513
Frequency (MHz)		1712.4	1732.6	1752.6
RMC12.2K	23.50	23.09	23.09	23.30
HSDPA Sub 1	22.50	22.14	22.12	22.34
HSDPA Sub 2	22.00	21.75	21.70	21.91
HSDPA Sub 3	21.00	20.54	20.41	20.32
HSDPA Sub 4	21.00	20.85	20.86	20.95
HSUPA Sub 1	22.50	20.63	21.95	22.11
HSUPA Sub 2	22.50	22.09	22.04	22.14
HSUPA Sub 3	21.00	20.37	20.86	20.99
HSUPA Sub 4	22.50	22.13	22.14	22.35
HSUPA Sub 5	22.00	20.65	21.36	21.65
Band	WCDMA Band 5			
Tx Channel	Tune-up	4132	4182	4233
Frequency (MHz)		826.4	836.4	846.6
RMC12.2K	23.50	23.14	23.07	23.01
HSDPA Sub 1	22.50	22.25	22.14	22.20
HSDPA Sub 2	22.00	21.88	21.73	21.91
HSDPA Sub 3	21.00	20.89	20.74	20.74
HSDPA Sub 4	21.00	20.48	20.78	20.57
HSUPA Sub 1	22.00	21.43	21.99	21.98
HSUPA Sub 2	22.50	22.11	22.07	22.08
HSUPA Sub 3	21.00	20.61	20.78	20.68

HSUPA Sub 4	22.50	22.27	22.14	22.18
HSUPA Sub 5	21.50	20.78	21.26	21.46

7.3. LTE Conducted Power

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18607/1850.7	18900/1880	19193/1909.3
LTE Band 2	1.4MHz	QPSK	1	0	22.00	20.64	21.79	21.74
			1	2	22.00	21.73	21.77	21.71
			1	5	22.00	21.75	21.76	21.69
			3	0	22.00	21.64	21.84	21.80
			3	1	22.00	21.64	21.86	21.79
			3	2	22.00	21.63	21.85	21.76
			6	0	21.00	20.60	20.75	20.72
		16QAM	1	0	21.50	20.83	21.04	20.61
			1	2	21.50	20.83	21.06	20.66
			1	5	21.50	20.84	21.05	20.65
			3	0	21.00	20.82	20.97	20.86
			3	1	21.00	20.83	20.95	20.88
			3	2	21.00	20.78	20.97	20.88
			6	0	20.00	19.82	19.92	19.86
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18615/1851.5	18900/1880	19185/1908.5
LTE Band 2	3MHz	QPSK	1	0	22.00	21.63	21.84	21.73
			1	7	22.00	21.67	21.88	21.74
			1	14	22.00	21.65	21.85	21.72
			8	0	21.00	20.64	20.75	20.67
			8	4	21.00	20.61	20.73	20.68
			8	7	21.00	20.64	20.73	20.67
			15	0	21.00	20.61	20.74	20.69
		16QAM	1	0	21.50	20.88	20.79	21.17
			1	7	21.50	20.89	20.76	21.21
			1	14	21.50	20.84	20.71	21.16
			8	0	20.00	19.66	19.79	19.73
			8	4	20.00	19.61	19.74	19.75
			8	7	20.00	19.62	19.74	19.71

			15	0	20.00	19.53	19.79	19.73
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18625/1852.5	18900/1880	19175/1907.5
LTE Band 2	5MHz	QPSK	1	0	22.00	21.65	21.88	21.74
			1	12	22.00	21.70	21.88	21.73
			1	24	22.00	21.65	21.80	21.67
			12	0	21.00	20.67	20.82	20.81
			12	6	21.00	20.63	20.77	20.72
			12	11	21.00	20.61	20.64	20.63
			25	0	21.00	20.67	20.73	20.71
		16QAM	1	0	21.50	20.99	21.42	21.16
			1	12	21.50	20.99	21.39	21.14
			1	24	21.50	21.00	21.34	21.18
			12	0	20.00	19.67	19.84	19.70
			12	6	20.00	19.62	19.73	19.60
			12	11	20.00	19.57	19.63	19.60
			25	0	20.00	19.62	19.70	19.74
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18650/1855	18900/1880	19150/1905
LTE Band 2	10MHz	QPSK	1	0	22.00	21.66	21.65	21.31
			1	24	22.00	21.69	21.46	21.23
			1	49	22.00	21.72	21.38	21.25
			25	0	21.00	20.67	20.84	20.85
			25	12	21.00	20.68	20.73	20.71
			25	24	21.00	20.75	20.73	20.64
			50	0	21.00	20.73	20.82	20.78
		16QAM	1	0	21.00	20.74	20.24	20.64
			1	24	21.00	20.79	20.24	20.62
			1	49	21.00	20.74	20.15	20.61
			25	0	20.00	19.68	19.82	19.85
			25	12	20.00	19.65	19.74	19.73
			25	24	20.00	19.74	19.70	19.66
			50	0	20.00	19.73	19.76	19.76
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB	RB		18675/1857.5	18900/1880	19125/1902.5

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18700/1860	18900/1880	19100/1900
LTE Band 2	15MHz	QPSK	1	0	21.50	21.08	21.20	21.20
			1	37	21.50	21.22	21.31	21.12
			1	74	21.50	21.14	21.23	21.10
			36	0	21.00	20.60	20.83	20.68
			36	18	21.00	20.62	20.72	20.65
			36	37	21.00	20.77	20.71	20.54
			75	0	21.00	20.67	20.73	20.64
		16QAM	1	0	21.00	20.23	20.67	20.42
			1	37	21.00	20.31	20.76	20.37
			1	74	21.00	20.25	20.68	20.31
			36	0	20.00	19.58	19.82	19.77
			36	18	20.00	19.59	19.75	19.74
			36	37	20.00	19.75	19.73	19.60
			75	0	20.00	19.70	19.74	19.67
LTE Band 2	20MHz	QPSK	1	0	22.00	21.08	21.19	21.25
			1	49	22.00	21.17	21.30	21.22
			1	99	22.00	21.10	21.14	21.13
			50	0	21.00	20.57	20.92	20.63
			50	24	21.00	20.70	20.78	20.72
			50	49	21.00	20.84	20.76	20.46
			100	0	21.00	20.74	20.85	20.55
		16QAM	1	0	21.00	20.35	20.49	20.65
			1	49	21.00	20.49	20.61	20.65
			1	99	21.00	20.39	20.45	20.57
			50	0	20.00	19.54	19.98	19.61
			50	24	20.00	19.64	19.82	19.74
			50	49	20.00	19.86	19.76	19.51
			100	0	20.00	19.71	19.83	19.51

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		19957/1710.7	20175/1732.5	20393/1754.3
LTE Band	1.4MHz	QPSK	1	0	22.50	21.00	21.86	21.97
			1	2	22.50	22.07	21.90	21.95

4			1	5	22.50	22.03	21.84	21.96
			3	0	22.50	22.06	21.86	22.07
			3	1	22.50	22.08	21.86	22.05
			3	2	22.50	22.03	21.81	22.04
			6	0	21.50	20.96	20.82	21.01
		16QAM	1	0	21.50	20.91	21.02	21.24
			1	2	21.50	20.92	21.03	21.24
			1	5	21.50	20.91	21.02	21.21
			3	0	21.50	21.15	21.01	21.19
			3	1	21.50	21.15	21.02	21.21
			3	2	21.50	21.15	20.96	21.21
			6	0	20.50	20.13	20.01	20.19
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		19965/1711.5	20175/1732.5	20385/1753.5
LTE Band 4	3MHz	QPSK	1	0	22.50	21.94	21.76	21.86
			1	7	22.50	21.96	21.81	22.06
			1	14	22.50	21.85	21.80	21.95
			8	0	21.00	20.94	20.81	20.99
			8	4	21.00	20.96	20.82	20.98
			8	7	21.00	20.89	20.78	20.98
			15	0	21.00	20.93	20.77	20.98
		16QAM	1	0	21.50	21.45	21.05	20.52
			1	7	21.50	21.49	21.07	20.52
			1	14	21.50	21.36	21.02	20.51
			8	0	20.50	20.03	19.88	20.02
			8	4	20.50	20.02	19.83	19.98
			8	7	20.50	19.95	19.75	19.97
			15	0	20.50	19.96	19.74	20.11
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		19975/1712.5	20175/1732.5	20375/1752.5
LTE Band 4	5MHz	QPSK	1	0	22.50	21.86	21.38	21.57
			1	12	22.50	21.70	21.33	21.57
			1	24	22.50	21.53	21.36	21.59
			12	0	21.50	20.95	20.87	21.05
			12	6	21.50	20.93	20.80	21.02
			12	11	21.50	20.90	20.74	20.95

			25	0	21.50	20.94	20.82	21.03
		16QAM	1	0	21.50	20.94	20.68	21.07
			1	12	21.50	20.88	20.70	21.06
			1	24	21.50	20.86	20.67	21.09
			12	0	20.00	19.86	19.87	20.00
			12	6	20.00	19.85	19.81	20.00
			12	11	20.00	19.84	19.77	19.99
			25	0	20.00	19.96	19.79	19.98
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20000/1715	20175/1732.5	20350/1750
LTE Band 4	10MHz	QPSK	1	0	22.50	21.46	21.34	21.42
			1	24	22.50	21.39	21.34	21.51
			1	49	22.50	21.39	21.32	21.54
			25	0	21.50	20.83	20.85	20.94
			25	12	21.50	20.89	20.81	21.01
			25	24	21.50	20.95	20.76	21.02
			50	0	21.50	20.91	20.87	21.04
		16QAM	1	0	21.00	20.96	20.53	20.31
			1	24	21.00	20.87	20.52	20.36
			1	49	21.00	20.85	20.53	20.43
			25	0	20.00	19.87	19.87	19.94
			25	12	20.00	19.90	19.79	19.95
			25	24	20.00	19.99	19.78	19.99
			50	0	20.00	19.91	19.88	19.97
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20025/1717.5	20175/1732.5	20325/1747.5
LTE Band 4	15MHz	QPSK	1	0	22.50	21.29	21.31	21.29
			1	37	22.50	21.24	21.30	21.38
			1	74	22.50	21.16	21.30	21.36
			36	0	21.00	20.73	20.81	20.92
			36	18	21.00	20.80	20.83	20.92
			36	37	21.00	20.83	20.81	20.98
			75	0	21.00	20.84	20.81	20.95
		16QAM	1	0	21.00	20.94	20.50	20.42
			1	37	21.00	20.84	20.54	20.54
			1	74	21.00	20.77	20.51	20.53

			36	0	20.00	19.83	19.86	19.86
			36	18	20.00	19.87	19.89	19.88
			36	37	20.00	19.92	19.84	19.94
			75	0	20.00	19.82	19.81	19.96
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20050/1720	20175/1732.5	20300/1745
LTE Band 4	20MHz	QPSK	1	0	22.50	21.40	21.28	21.27
			1	49	22.50	21.33	21.38	21.46
			1	99	22.50	21.34	21.39	21.45
			50	0	21.00	20.73	20.88	20.97
			50	24	21.00	20.89	20.88	21.00
			50	49	21.00	20.82	20.81	20.95
			100	0	21.00	20.80	20.81	20.97
		16QAM	1	0	21.00	20.68	20.56	20.62
			1	49	21.00	20.60	20.61	20.84
			1	99	21.00	20.61	20.67	20.88
			50	0	20.50	19.70	19.91	20.00
			50	24	20.50	19.81	19.87	20.02
			50	49	20.50	19.82	19.81	19.98
			100	0	20.00	19.76	19.82	19.94

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20407/824.7	20525/836.5	20643/848.3
LTE Band 5	1.4MHz	QPSK	1	0	22.50	22.31	22.10	22.20
			1	2	22.50	22.33	22.08	22.23
			1	5	22.50	22.30	22.08	22.19
			3	0	22.50	22.19	22.12	22.24
			3	1	22.50	22.23	22.14	22.23
			3	2	22.50	22.19	22.14	22.25
			6	0	21.50	21.34	21.21	21.19
		16QAM	1	0	22.00	21.56	21.49	21.08
			1	2	22.00	21.55	21.46	21.07
			1	5	22.00	21.52	21.47	21.09
			3	0	22.00	21.56	21.42	21.32
			3	1	22.00	21.56	21.43	21.34
			3	2	22.00	21.53	21.43	21.36

			6	0	21.00	20.56	20.39	20.49
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20415/825.5	20525/836.5	20635/847.5
LTE Band 5	3MHz	QPSK	1	0	22.50	22.21	22.08	22.14
			1	7	22.50	22.20	22.14	22.17
			1	14	22.50	22.21	22.00	22.15
			8	0	21.50	21.37	21.16	21.13
			8	4	21.50	21.36	21.18	21.16
			8	7	21.50	21.33	21.20	21.10
			15	0	21.50	21.37	21.21	21.09
		16QAM	1	0	22.00	21.28	21.65	21.38
			1	7	22.00	21.22	21.77	21.43
			1	14	22.00	21.22	21.68	21.40
			8	0	20.50	20.39	20.24	20.41
			8	4	20.50	20.35	20.26	20.39
			8	7	20.50	20.30	20.23	20.31
			15	0	20.50	20.43	20.24	20.29
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20425/826.5	20525/836.5	20625/846.5
LTE Band 5	5MHz	QPSK	1	0	22.50	22.28	22.14	22.25
			1	12	22.50	22.18	22.15	22.25
			1	24	22.50	22.24	22.11	22.26
			12	0	21.50	21.40	21.27	21.20
			12	6	21.50	21.30	21.22	21.15
			12	11	21.50	21.33	21.14	20.98
			25	0	21.50	21.34	21.21	21.09
		16QAM	1	0	22.00	21.83	21.59	21.77
			1	12	22.00	21.74	21.60	21.72
			1	24	22.00	21.75	21.56	21.75
			12	0	20.50	20.31	20.29	20.33
			12	6	20.50	20.24	20.22	20.30
			12	11	20.50	20.26	20.16	20.13
			25	0	20.50	20.35	20.22	20.28
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		

			RB Size	RB Offset		20450/829	20525/836.5	20600/844
LTE Band 5	10MHz	QPSK	1	0	22.50	22.32	22.11	22.15
			1	24	22.50	22.19	22.12	22.25
			1	49	22.50	22.12	22.17	22.27
			25	0	21.50	21.34	21.25	21.25
			25	12	21.50	21.34	21.21	21.15
			25	24	21.50	21.26	21.21	20.94
			50	0	21.50	21.32	21.27	21.12
		16QAM	1	0	22.00	21.82	21.43	21.13
			1	24	22.00	21.78	21.48	21.09
			1	49	22.00	21.67	21.48	21.12
			25	0	20.50	20.37	20.24	20.24
			25	12	20.50	20.33	20.21	20.25
			25	24	20.50	20.32	20.19	20.14
			50	0	20.50	20.33	20.32	20.19

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20775/2502.5	21100/2535	21425/2567.5
LTE Band 7	5MHz	QPSK	1	0	22.00	21.68	21.74	21.88
			1	12	22.00	21.70	21.76	21.89
			1	24	22.00	21.71	21.75	21.91
			12	0	21.50	21.18	21.23	21.34
			12	6	21.50	21.17	21.20	21.28
			12	11	21.50	21.13	21.19	21.25
			25	0	21.50	21.19	21.21	21.30
		16QAM	1	0	21.50	21.07	21.08	21.36
			1	12	21.50	21.11	21.10	21.32
			1	24	21.50	21.08	21.10	21.34
			12	0	20.50	20.11	20.25	20.31
			12	6	20.50	20.10	20.26	20.29
			12	11	20.50	20.04	20.16	20.26
			25	0	20.50	20.22	20.18	20.28
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20800/2505	21100/2535	21400/2565
LTE	10MHz	QPSK	1	0	22.00	21.67	21.73	21.71

Band 7			1	24	22.00	21.74	21.78	21.82
			1	49	22.00	21.73	21.79	21.81
			25	0	21.50	21.21	21.26	21.32
			25	12	21.50	21.19	21.25	21.33
			25	24	21.50	21.25	21.25	21.31
			50	0	21.50	21.19	21.25	21.31
		16QAM	1	0	21.50	20.57	21.15	20.91
			1	24	21.50	20.60	21.19	21.05
			1	49	21.50	20.63	21.21	21.01
			25	0	20.50	20.22	20.31	20.32
			25	12	20.50	20.20	20.29	20.32
			25	24	20.50	20.22	20.28	20.30
			50	0	20.50	20.18	20.24	20.32
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20825/2507.5	21100/2535	21375/2562.5
LTE Band 7	15MHz	QPSK	1	0	22.00	21.53	21.67	21.67
			1	37	22.00	21.57	21.73	21.74
			1	74	22.00	21.56	21.72	21.72
			36	0	21.50	21.17	21.25	21.25
			36	18	21.50	21.19	21.22	21.26
			36	37	21.50	21.19	21.23	21.27
			75	0	21.50	21.23	21.25	21.29
		16QAM	1	0	21.50	21.09	20.88	20.83
			1	37	21.50	21.13	20.97	20.93
			1	74	21.50	21.11	20.93	20.91
			36	0	20.50	20.25	20.32	20.25
			36	18	20.50	20.23	20.29	20.25
			36	37	20.50	20.24	20.30	20.27
			75	0	20.50	20.20	20.19	20.31
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20850/2510	21100/2535	21350/2560
LTE Band 7	20MHz	QPSK	1	0	22.00	21.65	21.69	21.69
			1	49	22.00	21.76	21.79	21.80
			1	99	22.00	21.76	21.74	21.83
			50	0	21.50	21.16	21.32	21.19
			50	24	21.50	21.24	21.33	21.30

			50	49	21.50	21.26	21.30	21.27
			100	0	21.50	21.25	21.23	21.22
		16QAM	1	0	21.50	20.90	21.14	20.94
			1	49	21.50	20.98	21.22	21.03
			1	99	21.50	21.01	21.15	21.07
			50	0	20.50	20.19	20.37	20.22
			50	24	20.50	20.29	20.36	20.28
			50	49	20.50	20.33	20.31	20.26
			100	0	20.50	20.22	20.25	20.24

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23017/699.7	23095/707.5	23173/715.3
LTE Band 12	1.4MHz	QPSK	1	0	22.50	20.87	22.02	21.87
			1	2	22.50	22.04	22.01	21.85
			1	5	22.50	22.00	22.00	21.90
			3	0	22.50	21.84	22.05	21.91
			3	1	22.50	21.85	22.07	21.92
			3	2	22.50	21.87	22.04	21.93
			6	0	21.50	20.87	21.01	20.89
		16QAM	1	0	21.50	21.10	21.26	20.76
			1	2	21.50	21.11	21.26	20.79
			1	5	21.50	21.09	21.26	20.80
			3	0	21.50	21.10	21.22	21.01
			3	1	21.50	21.09	21.20	20.99
			3	2	21.50	21.07	21.20	21.02
			6	0	20.50	20.05	20.16	20.01
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23025/700.5	23095/707.5	23165/714.5
LTE Band 12	3MHz	QPSK	1	0	22.50	21.86	22.02	21.98
			1	7	22.50	21.91	22.08	21.90
			1	14	22.50	21.95	22.02	21.91
			8	0	21.00	20.85	20.95	20.86
			8	4	21.00	20.89	21.00	20.83
			8	7	21.00	20.91	20.96	20.82
			15	0	21.00	20.88	20.97	20.91
		16QAM	1	0	21.50	21.08	20.91	21.36

			1	7	21.50	21.11	20.98	21.30
			1	14	21.50	21.09	20.92	21.28
			8	0	20.00	19.86	20.00	19.92
			8	4	20.00	19.91	19.95	19.87
			8	7	20.00	19.89	19.95	19.85
			15	0	20.50	19.86	20.06	19.89
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23035/701.5	23095/707.5	23155/713.5
LTE Band 12	5MHz	QPSK	1	0	22.50	21.85	22.04	22.03
			1	12	22.50	21.94	22.12	21.99
			1	24	22.50	22.00	22.09	21.88
			12	0	21.50	20.83	21.06	20.97
			12	6	21.50	20.92	20.97	20.92
			12	11	21.50	20.94	21.04	20.81
			25	0	21.50	20.91	21.03	20.91
		16QAM	1	0	22.00	21.22	21.56	21.45
			1	12	22.00	21.26	21.57	21.40
			1	24	22.00	21.31	21.55	21.45
			12	0	20.50	19.87	20.04	19.86
			12	6	20.50	19.93	19.99	19.85
			12	11	20.50	19.90	19.97	19.72
			25	0	20.50	19.88	20.03	19.93
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23060/704	23095/707.5	23130/711
LTE Band 12	10MHz	QPSK	1	0	22.50	21.90	21.94	22.02
			1	24	22.50	22.00	22.05	22.08
			1	49	22.50	22.07	21.98	21.91
			25	0	21.50	20.94	21.05	20.93
			25	12	21.50	20.95	21.01	20.97
			25	24	21.50	20.98	21.06	20.90
			50	0	21.50	21.01	21.11	20.97
		16QAM	1	0	21.50	21.34	21.16	20.89
			1	24	21.50	21.42	21.27	20.96
			1	49	21.50	21.49	21.15	20.79
			25	0	20.50	19.96	20.03	19.94
			25	12	20.50	20.02	19.99	19.99

			25	24	20.50	20.03	20.11	19.87
			50	0	20.50	19.99	20.16	19.91

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23755/706.5	23790/710	23825/713.5
LTE Band 17	5MHz	QPSK	1	0	23.00	22.57	22.65	22.64
			1	12	23.00	22.76	22.70	22.68
			1	24	23.00	22.71	22.66	22.63
			12	0	22.00	21.58	21.75	21.79
			12	6	22.00	21.84	21.79	21.70
			12	11	22.00	21.81	21.57	21.73
			25	0	22.00	21.73	21.66	21.74
		16QAM	1	0	22.50	22.25	22.12	22.00
			1	12	22.50	22.44	22.13	22.07
			1	24	22.50	22.31	21.99	21.98
			12	0	21.00	20.64	20.71	20.88
			12	6	21.00	20.86	20.80	20.88
			12	11	21.00	20.82	20.59	20.87
			25	0	21.00	20.74	20.75	20.85
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23780/709	23790/710	23800/711
LTE Band 17	10MHz	QPSK	1	0	23.00	22.69	22.71	22.78
			1	24	23.00	22.75	22.77	22.84
			1	49	23.00	22.73	22.71	22.76
			25	0	22.00	21.55	21.59	21.69
			25	12	22.00	21.82	21.75	21.74
			25	24	22.00	21.53	21.49	21.58
			50	0	22.00	21.62	21.62	21.71
		16QAM	1	0	22.50	22.23	21.96	21.72
			1	24	22.50	22.26	21.99	21.73
			1	49	22.50	22.20	21.94	21.63
			25	0	21.00	20.62	20.68	20.83
			25	12	21.00	20.88	20.90	20.89
			25	24	21.00	20.65	20.63	20.71
			50	0	21.00	20.62	20.70	20.78

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		26047/1850.7	26365/1882.5	26683/1914.3
LTE Band 25	1.4MHz	QPSK	1	0	23.00	21.73	22.53	22.46
			1	2	23.00	22.69	22.55	22.49
			1	5	23.00	22.64	22.51	22.44
			3	0	23.00	22.72	22.68	22.49
			3	1	23.00	22.74	22.66	22.50
			3	2	23.00	22.73	22.66	22.47
			6	0	22.00	21.77	21.66	21.56
		16QAM	1	0	22.00	21.76	21.77	21.23
			1	2	22.00	21.89	21.77	21.35
			1	5	22.00	21.80	21.73	21.27
			3	0	22.00	21.91	21.87	21.60
			3	1	22.00	21.92	21.96	21.62
			3	2	22.00	21.84	21.89	21.59
			6	0	21.00	20.97	20.83	20.70
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		26055/1851.5	26365/1882.5	26675/1913.5
LTE Band 25	3MHz	QPSK	1	0	23.00	22.49	22.32	22.32
			1	7	23.00	22.53	22.45	22.40
			1	14	23.00	22.43	22.36	22.30
			8	0	22.00	21.60	21.53	21.48
			8	4	22.00	21.70	21.59	21.51
			8	7	22.00	21.65	21.55	21.43
			15	0	22.00	21.65	21.56	21.42
		16QAM	1	0	22.00	21.88	21.55	21.12
			1	7	22.00	21.96	21.66	21.23
			1	14	22.00	21.86	21.59	21.12
			8	0	21.00	20.66	20.60	20.44
			8	4	21.00	20.70	20.61	20.44
			8	7	21.00	20.67	20.59	20.42
			15	0	21.00	20.68	20.53	20.52
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		26065/1852.5	26365/1882.5	26665/1912.5

LTE Band 25	5MHz	QPSK	1	0	23.00	22.68	22.60	22.50
			1	12	23.00	22.77	22.70	22.62
			1	24	23.00	22.71	22.59	22.51
			12	0	22.00	21.68	21.59	21.61
			12	6	22.00	21.72	21.63	21.55
			12	11	22.00	21.69	21.62	21.38
			25	0	22.00	21.73	21.61	21.47
		16QAM	1	0	22.50	22.04	21.92	22.01
			1	12	22.50	22.10	22.04	22.06
			1	24	22.50	22.03	21.94	21.97
			12	0	21.00	20.63	20.60	20.56
			12	6	21.00	20.71	20.76	20.55
			12	11	21.00	20.61	20.69	20.38
			25	0	21.00	20.73	20.58	20.48
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		26090/1855	26365/1882.5	26640/1910
LTE Band 25	10MHz	QPSK	1	0	23.00	22.74	22.65	22.60
			1	24	23.00	22.81	22.71	22.61
			1	49	23.00	22.76	22.64	22.58
			25	0	22.00	21.67	21.55	21.50
			25	12	22.00	21.76	21.64	21.53
			25	24	22.00	21.75	21.59	21.25
			50	0	22.00	21.75	21.63	21.44
		16QAM	1	0	22.50	22.14	21.84	21.47
			1	24	22.50	22.21	21.91	21.45
			1	49	22.50	22.23	21.85	21.40
			25	0	21.00	20.75	20.61	20.49
			25	12	21.00	20.82	20.68	20.41
			25	24	21.00	20.76	20.62	20.29
			50	0	21.00	20.74	20.64	20.41
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		26115/1857.5	26365/1882.5	26615/1907.5
LTE Band 25	15MHz	QPSK	1	0	23.00	22.62	22.65	22.52
			1	37	23.00	22.79	22.69	22.54
			1	74	23.00	22.64	22.57	22.28
			36	0	22.00	21.75	21.54	21.28

			36	18	22.00	21.78	21.62	21.21
			36	37	22.00	21.72	21.55	21.22
			75	0	22.00	21.71	21.58	21.00
		16QAM	1	0	22.50	22.11	21.77	21.30
			1	37	22.50	22.23	21.83	21.53
			1	74	22.50	22.16	21.75	21.17
			36	0	21.00	20.76	20.67	20.04
			36	18	21.00	20.79	20.66	20.18
			36	37	21.00	20.77	20.52	20.02
			75	0	21.00	20.74	20.57	20.20
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		26140/1860	26365/1882.5	26590/1905
LTE Band 25	20MHz	QPSK	1	0	23.00	22.63	22.37	22.22
			1	49	23.00	22.85	22.40	22.25
			1	99	23.00	22.65	22.24	22.09
			50	0	22.00	21.74	21.16	21.01
			50	24	22.00	21.78	21.44	21.09
			50	49	22.00	21.80	21.25	20.84
			100	0	22.00	21.76	21.06	20.90
		16QAM	1	0	22.50	21.76	21.67	21.29
			1	49	22.50	22.01	21.63	21.43
			1	99	22.50	21.82	21.37	21.18
			50	0	21.00	20.79	20.33	20.07
			50	24	21.00	20.73	20.43	20.12
			50	49	21.00	20.72	20.41	19.96
			100	0	21.00	20.51	20.15	20.00

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		26697/814.7	26740/819	26783/823.3
LTE Band 26a	1.4MHz	QPSK	1	0	22.50	21.48	22.38	22.41
			1	2	22.50	22.43	22.43	22.49
			1	5	22.50	22.34	22.36	22.44
			3	0	23.00	22.46	22.48	22.52
			3	1	23.00	22.51	22.50	22.54
			3	2	23.00	22.42	22.49	22.52
			6	0	22.00	21.51	21.53	21.57

			1	0	22.00	21.56	21.58	21.32
			1	2	22.00	21.62	21.62	21.37
			1	5	22.00	21.59	21.59	21.33
		16QAM	3	0	22.00	21.64	21.69	21.66
			3	1	22.00	21.69	21.76	21.70
			3	2	22.00	21.62	21.73	21.69
			6	0	21.00	20.73	20.71	20.77
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		26705/818.5	26740/819	26775/822.5
LTE Band 26a	3MHz	QPSK	1	0	22.50	22.27	22.23	22.20
			1	7	22.50	22.38	22.34	22.34
			1	14	22.50	22.29	22.25	22.27
			8	0	22.00	21.40	21.44	21.43
			8	4	22.00	21.48	21.49	21.55
			8	7	22.00	21.48	21.46	21.48
			15	0	21.50	21.43	21.47	21.47
		16QAM	1	0	22.00	21.14	21.66	21.42
			1	7	22.00	21.23	21.72	21.55
			1	14	22.00	21.09	21.65	21.50
			8	0	21.00	20.38	20.44	20.42
			8	4	21.00	20.48	20.51	20.52
			8	7	21.00	20.44	20.44	20.48
			15	0	21.00	20.50	20.47	20.46
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		26715/816.5	26740/819	26765/821.5
LTE Band 26a	5MHz	QPSK	1	0	23.00	22.40	22.43	22.43
			1	12	23.00	22.53	22.55	22.65
			1	24	23.00	22.49	22.45	22.57
			12	0	22.00	21.38	21.40	21.48
			12	6	22.00	21.53	21.57	21.58
			12	11	22.00	21.55	21.54	21.48
			25	0	22.00	21.49	21.50	21.50
		16QAM	1	0	22.50	21.78	21.80	22.05
			1	12	22.50	21.87	21.88	22.16
			1	24	22.50	21.82	21.81	22.11
			12	0	21.00	20.38	20.44	20.51

			12	6	21.00	20.46	20.61	20.59
			12	11	21.00	20.47	20.57	20.51
			25	0	21.00	20.54	20.43	20.50
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		/	26740/819	/
LTE Band 26a	10MHz	QPSK	1	0	23.00	/	22.51	/
			1	24	23.00	/	22.62	/
			1	49	23.00	/	22.71	/
			25	0	21.50	/	21.34	/
			25	12	21.50	/	21.49	/
			25	24	21.50	/	21.49	/
			50	0	21.50	/	21.46	/
		16QAM	1	0	22.00	/	21.66	/
			1	24	22.00	/	21.79	/
			1	49	22.00	/	21.81	/
			25	0	21.00	/	20.32	/
			25	12	21.00	/	20.58	/
			25	24	21.00	/	20.54	/
			50	0	20.50	/	20.46	/

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		26797/824.7	26915/836.5	27033/848.3
LTE Band 26b	1.4MHz	QPSK	1	0	22.50	22.36	22.34	21.83
			1	2	22.50	22.47	22.34	21.86
			1	5	22.50	22.35	22.28	21.73
			3	0	23.00	22.43	22.16	21.89
			3	1	23.00	22.51	22.21	21.97
			3	2	23.00	22.45	22.25	21.88
			6	0	22.00	21.52	21.06	20.93
		16QAM	1	0	22.00	21.57	20.84	20.95
			1	2	22.00	21.65	21.04	21.01
			1	5	22.00	21.62	20.78	20.95
			3	0	22.00	21.70	21.18	21.04
			3	1	22.00	21.65	21.27	21.06
			3	2	22.00	21.70	21.18	21.01
			6	0	21.00	20.71	20.28	20.19

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		26805/825.5	26915/836.5	27025/847.5
LTE Band 26b	3MHz	QPSK	1	0	22.50	22.27	22.03	21.74
			1	7	22.50	22.37	22.10	21.76
			1	14	22.50	22.26	22.01	21.58
			8	0	21.50	21.43	20.94	20.82
			8	4	21.50	21.32	21.02	20.98
			8	7	21.50	21.17	21.00	20.87
			15	0	21.50	21.16	21.04	20.86
		16QAM	1	0	21.50	21.20	20.71	21.12
			1	7	21.50	21.28	20.74	21.16
			1	14	21.50	21.09	20.63	21.04
			8	0	20.50	20.15	19.99	19.96
			8	4	20.50	20.05	20.10	20.04
			8	7	20.50	20.05	19.98	20.03
			15	0	20.50	20.04	20.14	19.96
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		26815/826.5	26915/836.5	27015/846.5
LTE Band 26b	5MHz	QPSK	1	0	23.00	22.47	22.33	21.98
			1	12	23.00	22.55	22.10	22.01
			1	24	23.00	22.44	22.10	21.90
			12	0	22.00	21.51	21.04	20.98
			12	6	22.00	21.64	21.19	21.03
			12	11	22.00	21.37	21.15	20.90
			25	0	21.50	21.40	21.09	20.94
		16QAM	1	0	22.00	21.58	21.58	21.28
			1	12	22.00	21.75	21.67	21.33
			1	24	22.00	21.68	21.62	21.25
			12	0	20.50	20.22	20.14	20.02
			12	6	20.50	20.27	20.16	20.05
			12	11	20.50	20.23	20.16	19.89
			25	0	20.50	20.19	20.08	20.11
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		26840/829	26915/836.5	26990/844

LTE Band 26b	10MHz	QPSK	1	0	23.00	22.57	22.23	22.09
			1	24	23.00	22.68	22.14	22.10
			1	49	23.00	22.70	22.06	22.04
			25	0	22.00	21.58	20.91	21.02
			25	12	22.00	21.51	21.05	21.12
			25	24	22.00	21.38	21.02	20.88
			50	0	21.50	21.29	21.01	20.98
		16QAM	1	0	22.00	21.67	21.24	20.96
			1	24	22.00	21.73	21.36	20.96
			1	49	22.00	21.75	21.22	20.85
			25	0	20.50	20.33	20.06	20.11
			25	12	20.50	20.37	20.18	20.13
			25	24	20.50	20.33	20.10	19.96
			50	0	20.50	20.37	20.18	20.06
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		26865/831.5	26915/836.5	26965/841.5
LTE Band 26b	15MHz	QPSK	1	0	23.00	22.59	22.28	22.24
			1	37	23.00	22.75	22.46	22.20
			1	74	23.00	22.57	22.22	22.02
			36	0	22.00	21.60	21.35	21.20
			36	18	22.00	21.63	21.34	21.08
			36	37	22.00	21.64	21.18	20.96
			75	0	22.00	21.65	21.37	21.03
		16QAM	1	0	22.00	21.73	21.57	21.52
			1	37	22.00	21.89	21.56	21.48
			1	74	22.00	21.67	21.44	21.47
			36	0	21.00	20.66	20.25	20.18
			36	18	21.00	20.72	20.38	20.35
			36	37	21.00	20.65	20.13	20.16
			75	0	21.00	20.53	20.44	20.13

7.4. WLAN & Bluetooth Output Power

7.4.1. Output Power Results Of WLAN

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11b	1	2412	13.50	12.20
	6	2437	13.50	13.41
	11	2462	13.50	12.63
802.11g	1	2412	11.70	9.99
	6	2437	11.70	11.69
	11	2462	11.70	11.54
802.11n HT20	1	2412	11.50	10.01
	6	2437	11.50	10.54
	11	2462	11.50	11.15
802.11n HT40	3	2422	11.50	10.14
	6	2437	11.50	11.18
	9	2452	11.50	10.85

NOTE: Power measurement results of WLAN 2.4G.

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11a	36	5180	11.00	9.52
	40	5200	11.00	10.58
	48	5240	11.00	10.15
802.11n HT20	36	5180	11.00	9.39
	40	5200	11.00	10.52
	48	5240	11.00	9.91
802.11n HT40	38	5190	11.00	9.98
	46	5230	11.00	10.86
802.11ac VHT20	36	5180	10.50	9.30
	40	5200	10.50	10.47
	48	5240	10.50	9.42
802.11ac VHT40	38	5190	11.00	10.03
	46	5230	11.00	10.90
802.11ac VHT80	42	5210	11.00	10.72

NOTE: Power measurement results of WLAN 5.2G.

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
------	---------	-----------------	---------	--------------------

802.11a	52	5260	10.50	9.02
	56	5280	10.50	9.07
	64	5320	10.50	10.36
802.11n	52	5260	10.50	8.85
(HT20)	56	5280	10.50	8.92
	64	5320	10.50	10.23
802.11n	54	5270	10.50	8.80
(HT40)	62	5310	10.50	10.36
802.11ac	52	5260	10.50	8.77
(VHT20)	56	5280	10.50	8.88
	64	5320	10.50	10.49
802.11ac	54	5270	10.00	9.02
(VHT40)	62	5310	10.00	9.63
802.11ac (VHT80)	58	5290	9.50	9.35

NOTE: Power measurement results of WLAN 5.3G.

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11a	100	5500	10.00	9.85
	120	5600	10.00	8.90
	140	5700	10.00	8.60
802.11n (HT20)	100	5500	10.00	9.73
	120	5600	10.00	8.84
	140	5700	10.00	8.09
802.11n (HT40)	102	5510	9.00	8.76
	118	5590	9.00	8.16
	134	5670	9.00	8.61
802.11ac (HT20)	100	5500	10.00	9.79
	120	5600	10.00	8.70
	140	5700	10.00	8.54
802.11ac (HT40)	102	5510	9.00	8.82
	118	5590	9.00	8.22
	134	5670	9.00	8.57
802.11ac (VHT80)	106	5530	9.00	8.78
	122	5610	9.00	8.86

NOTE: Power measurement results of WLAN 5.6G.

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
------	---------	-----------------	---------	--------------------

802.11a	149	5745	10.50	9.46
	157	5785	10.50	8.53
	165	5825	10.50	10.37
802.11n HT20	149	5745	10.50	9.37
	157	5785	10.50	9.52
	165	5825	10.50	10.46
802.11n HT40	151	5755	9.00	9.00
	159	5795	9.00	8.71
802.11ac VHT20	149	5745	10.44	9.51
	157	5785	10.44	8.45
	165	5825	10.44	10.44
802.11ac VHT40	151	5755	9.50	9.21
	159	5795	9.50	8.60
802.11ac VHT80	155	5775	9.00	8.79


NOTE: Power measurement results of WLAN 5.8G.

7.4.2. Output Power Results Of Bluetooth

BR+EDR	Output Power (dBm)				
	Channel	Tune-up	Data Rates		
			1M	2M	3M
	0CH	6.000	5.615	4.832	4.892
	39CH	6.000	5.581	5.013	5.054
	78CH	6.000	5.318	4.685	4.706

BLE	Channel	Tune - up	Output Power (dBm)	Tune - up	Output Power (dBm)
		Data Rates 1M		Data Rates 2M	
	0CH	-5.000	-5.820	-5.000	-5.780
	19CH	-5.000	-5.288	-5.000	-5.177
	39CH	-6.000	-6.540	-6.000	-6.477

8. Antenna Location

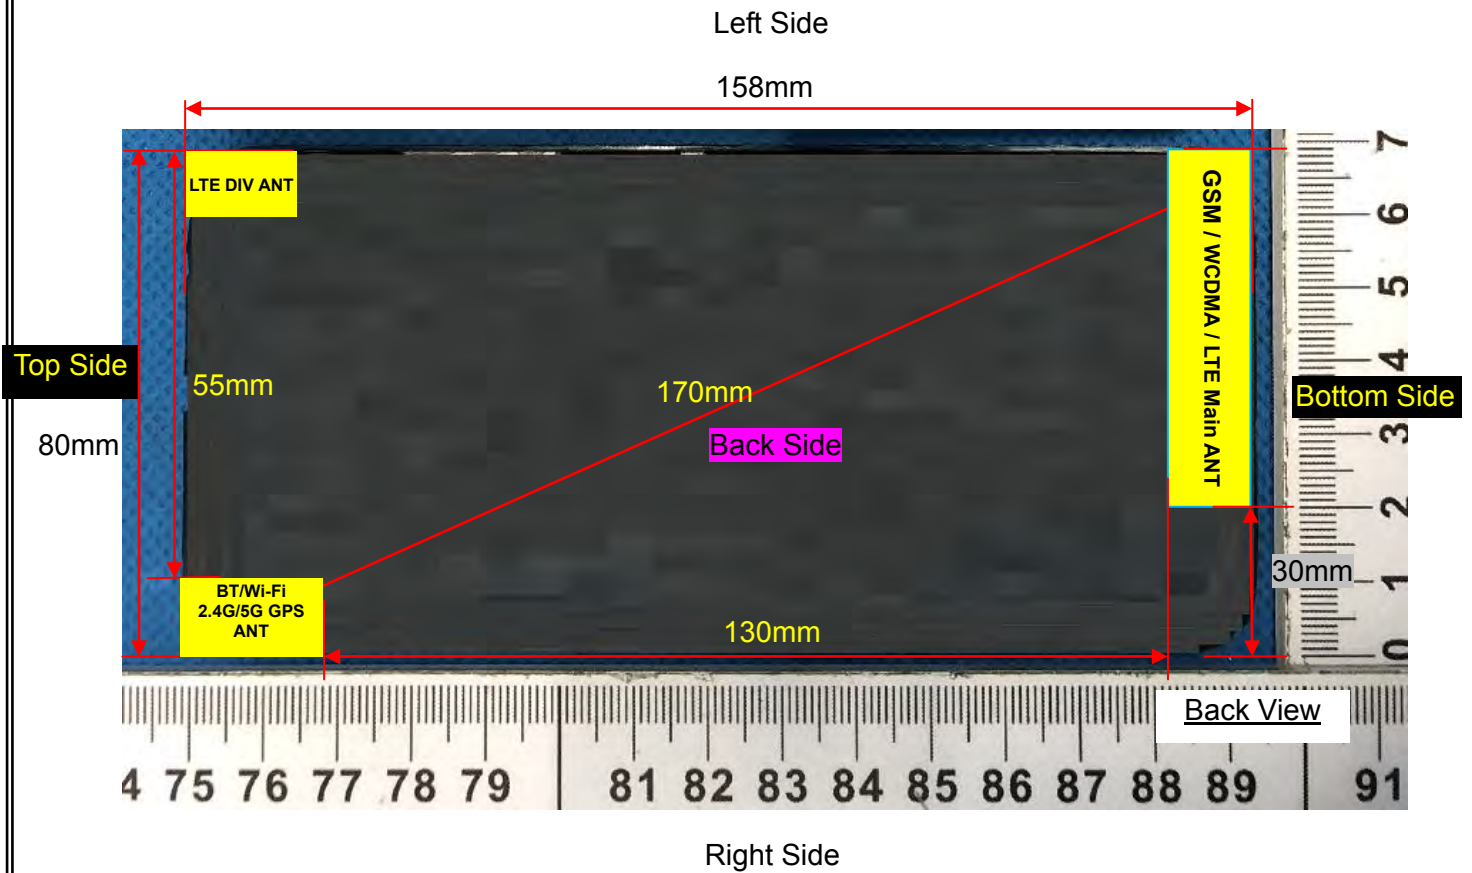

Note: Since the confidentiality request of EUT, the antenna location example diagram see as above.

Distance of the Antenna to the EUT surface/edge						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main	≤ 25mm	≤ 25mm	≤ 25mm	> 25mm	> 25mm	≤ 25mm
WLAN & Bluetooth	≤ 25mm	≤ 25mm	> 25mm	≤25mm	≤ 25mm	>25mm
Positions for SAR tests						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main	Yes	Yes	Yes	NO	NO	Yes
WLAN & Bluetooth	Yes	Yes	NO	Yes	Yes	NO

9. Stand-alone SAR test exclusion

Refer to FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	P _{max} (dBm)	P _{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
Bluetooth	6.00	3.98	5	2.480	1.25	3	Yes

NOTE: Standalone SAR test exclusion for Bluetooth.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}}/x] \text{ W/kg}$ for test separation distances $\leq 50\text{mm}$, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P _{max} (dBm)	P _{max} (mW)	Distance (mm)	f (GHz)	x	Estimated SAR (W/Kg)
Bluetooth	Head	6.00	3.98	5	2.48	7.5	0.167
Bluetooth	Body	6.00	3.98	10	2.48	7.5	0.084
Bluetooth	Hotspot	6.00	3.98	10	2.48	7.5	0.084

NOTE: Estimated SAR calculation for Bluetooth

10. SAR Results

10.1. SAR measurement results

10.1.1. SAR measurement Result of GSM850

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	189/836.4	GPRS(GMSK 4TS)	0.255	0.196	0.37	29.37	29.50	0.263	2021/7/28
Left Tilt 15	189/836.4	GPRS(GMSK 4TS)	0.151	0.110	-3.32	29.37	29.50	0.156	2021/7/28

Degree									
Right Cheek	189/836.4	GPRS(GMSK 4TS)	0.221	0.161	-4.38	29.37	29.50	0.228	2021/7/28
Right Tilt 15 Degree	189/836.4	GPRS(GMSK 4TS)	0.118	0.089	-0.53	29.37	29.50	0.122	2021/7/28

NOTE: Head SAR test results of GSM850.

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	189/836.4	GPRS(GMSK 4TS)	0.216	0.157	0.90	29.37	29.50	0.223	2021/7/28
Back Side	189/836.4	GPRS(GMSK 4TS)	0.358	0.268	-2.87	29.37	29.50	0.369	2021/7/28

NOTE: Body-Worn SAR test results of GSM850

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	189/836.4	GPRS(GMSK 4TS)	0.216	0.157	0.90	29.37	29.50	0.223	2021/7/28
Back Side	189/836.4	GPRS(GMSK 4TS)	0.358	0.268	-2.87	29.37	29.50	0.369	2021/7/28
Left Side	189/836.4	GPRS(GMSK 4TS)	0.080	0.057	1.45	29.37	29.50	0.082	2021/7/28
Bottom Side	189/836.4	GPRS(GMSK 4TS)	0.152	0.110	0.77	29.37	29.50	0.157	2021/7/28

NOTE: Hotspot SAR test results of GSM850

10.1.2. SAR measurement Result of GSM1900

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	661/1880	GPRS(GMSK 4TS)	0.177	0.112	-0.97	26.77	27.00	0.187	2021/8/12
Left Tilt 15 Degree	661/1880	GPRS(GMSK 4TS)	0.099	0.062	3.52	26.77	27.00	0.104	2021/8/12
Right Cheek	661/1880	GPRS(GMSK 4TS)	0.163	0.099	-4.20	26.77	27.00	0.172	2021/8/12
Right Tilt 15 Degree	661/1880	GPRS(GMSK 4TS)	0.075	0.047	0.43	26.77	27.00	0.079	2021/8/12

NOTE: Head SAR test results of GSM1900

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	661/1880	GPRS(GMSK 4TS)	0.252	0.137	3.41	26.77	27.00	0.266	2021/8/12
Back Side	661/1880	GPRS(GMSK 4TS)	0.410	0.228	1.17	26.77	27.00	0.432	2021/8/12

NOTE: Body-Worn SAR test results of GSM1900

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	661/1880	GPRS(GMSK 4TS)	0.252	0.137	3.41	26.77	27.00	0.266	2021/8/12
Back Side	661/1880	GPRS(GMSK 4TS)	0.410	0.228	1.17	26.77	27.00	0.432	2021/8/12
Left Side	661/1880	GPRS(GMSK 4TS)	0.088	0.048	1.15	26.77	27.00	0.093	2021/8/12
Bottom Side	661/1880	GPRS(GMSK 4TS)	0.164	0.088	2.01	26.77	27.00	0.173	2021/8/12

NOTE: Hotspot SAR test results of GSM1900

10.1.3. SAR measurement Result of WCDMA Band 2

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	9400/1880	RMC12.2K	0.235	0.146	0.03	23.03	23.50	0.262	2021/8/12
Left Tilt 15 Degree	9400/1880	RMC12.2K	0.130	0.081	-2.26	23.03	23.50	0.145	2021/8/12
Right Cheek	9400/1880	RMC12.2K	0.215	0.131	2.23	23.03	23.50	0.240	2021/8/12
Right Tilt 15 Degree	9400/1880	RMC12.2K	0.117	0.072	-2.81	23.03	23.50	0.130	2021/8/12

NOTE: Head SAR test results of WCDMA Band 2

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	9400/1880	RMC12.2K	0.444	0.232	2.71	23.03	23.50	0.495	2021/8/12

Back Side	9400/1880	RMC12.2K	0.723	0.389	-4.91	23.03	23.50	0.806	2021/8/12
Back Side	9262/1852.4	RMC12.2K	0.586	0.300	-3.52	23.14	23.50	0.637	2021/8/12
Back Side	9538/1907.6	RMC12.2K	0.622	0.335	0.27	22.98	23.50	0.701	2021/8/12

NOTE: Body-Worn SAR test results of WCDMA Band 2

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	9400/1880	RMC12.2K	0.444	0.232	2.71	23.03	23.50	0.495	2021/8/12
Back Side	9400/1880	RMC12.2K	0.723	0.389	-4.91	23.03	23.50	0.806	2021/8/12
Left Side	9400/1880	RMC12.2K	0.146	0.076	-2.21	23.03	23.50	0.163	2021/8/12
Bottom Side	9400/1880	RMC12.2K	0.308	0.161	-2.15	23.03	23.50	0.343	2021/8/12
Back Side	9262/1852.4	RMC12.2K	0.586	0.300	-3.52	23.14	23.50	0.637	2021/8/12
Back Side	9538/1907.6	RMC12.2K	0.622	0.335	0.27	22.98	23.50	0.701	2021/8/12

NOTE: Hotspot SAR test results of WCDMA Band 2

10.1.4. SAR measurement Result of WCDMA Band 4

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	1413/1732.6	RMC12.2K	0.322	0.206	0.04	23.09	23.50	0.354	2021/7/29
Left Tilt 15 Degree	1413/1732.6	RMC12.2K	0.178	0.114	-1.51	23.09	23.50	0.196	2021/7/29
Right Cheek	1413/1732.6	RMC12.2K	0.277	0.170	2.16	23.09	23.50	0.304	2021/7/29
Right Tilt 15 Degree	1413/1732.6	RMC12.2K	0.141	0.089	-1.52	23.09	23.50	0.155	2021/7/29

NOTE: Head SAR test results of WCDMA Band 4

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	1413/1732.6	RMC12.2K	0.630	0.337	-3.16	23.09	23.50	0.692	2021/7/29
Back Side	1413/1732.6	RMC12.2K	1.046	0.560	-0.90	23.09	23.50	1.150	2021/7/29
Back Side Repeated	1413/1732.6	RMC12.2K	1.040	0.556	1.25	23.09	23.50	1.143	2021/7/29

Back Side	1312/1712.4	RMC12.2K	0.879	0.452	-1.59	23.09	23.50	0.966	2021/7/29
Back Side	1513/1752.6	RMC12.2K	0.920	0.468	-3.43	23.30	23.50	0.963	2021/7/29

NOTE: Body-Worn SAR test results of WCDMA Band 4

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	1413/1732.6	RMC12.2K	0.630	0.337	-3.16	23.09	23.50	0.692	2021/7/29
Back Side	1413/1732.6	RMC12.2K	1.046	0.560	-0.90	23.09	23.50	1.150	2021/7/29
Back Side Repeated	1413/1732.6	RMC12.2K	1.040	0.556	1.25	23.09	23.50	1.143	2021/7/29
Left Side	1413/1732.6	RMC12.2K	0.214	0.111	-1.32	23.09	23.50	0.235	2021/7/29
Bottom Side	1413/1732.6	RMC12.2K	0.420	0.216	-2.10	23.09	23.50	0.462	2021/7/29
Back Side	1312/1712.4	RMC12.2K	0.879	0.452	-1.59	23.09	23.50	0.966	2021/7/29
Back Side	1513/1752.6	RMC12.2K	0.920	0.468	-3.43	23.30	23.50	0.963	2021/7/29

NOTE: Hotspot SAR test results of WCDMA Band 4

10.1.5. SAR measurement Result of WCDMA Band 5

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	4182/836.4	RMC12.2K	0.143	0.115	1.09	23.07	23.50	0.158	2021/7/28
Left Tilt 15 Degree	4182/836.4	RMC12.2K	0.083	0.065	3.93	23.07	23.50	0.092	2021/7/28
Right Cheek	4182/836.4	RMC12.2K	0.123	0.096	4.16	23.07	23.50	0.136	2021/7/28
Right Tilt 15 Degree	4182/836.4	RMC12.2K	0.065	0.050	-2.11	23.07	23.50	0.072	2021/7/28

NOTE: Head SAR test results of WCDMA Band 5

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	4182/836.4	RMC12.2K	0.126	0.096	1.12	23.07	23.50	0.139	2021/7/28
Back Side	4182/836.4	RMC12.2K	0.201	0.155	0.34	23.07	23.50	0.222	2021/7/28

NOTE: Body-Worn SAR test results of WCDMA Band 5

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	4182/836.4	RMC12.2K	0.126	0.096	1.12	23.07	23.50	0.139	2021/7/28
Back Side	4182/836.4	RMC12.2K	0.201	0.155	0.34	23.07	23.50	0.222	2021/7/28
Left Side	4182/836.4	RMC12.2K	0.050	0.038	0.88	23.07	23.50	0.055	2021/7/28
Bottom Side	4182/836.4	RMC12.2K	0.088	0.064	-3.06	23.07	23.50	0.097	2021/7/28

NOTE: Hotspot SAR test results of WCDMA Band 5

10.1.6. SAR measurement Result of LTE Band 2

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Left Cheek	18900/1880	20M QPSK(1,49)	0.227	0.142	1.91	21.30	22.00	0.267	2021/8/12
Left Tilt 15 Degree	18900/1880	20M QPSK(1,49)	0.121	0.072	3.11	21.30	22.00	0.142	2021/8/12
Right Cheek	18900/1880	20M QPSK(1,49)	0.207	0.124	0.01	21.30	22.00	0.243	2021/8/12
Right Tilt 15 Degree	18900/1880	20M QPSK(1,49)	0.105	0.066	4.02	21.30	22.00	0.123	2021/8/12
50%RB									
Left Cheek	18900/1880	20M QPSK(50,0)	0.132	0.084	4.75	20.92	21.00	0.134	2021/8/12
Left Tilt 15 Degree	18900/1880	20M QPSK(50,0)	0.061	0.041	-0.86	20.92	21.00	0.062	2021/8/12
Right Cheek	18900/1880	20M QPSK(50,0)	0.122	0.072	1.33	20.92	21.00	0.124	2021/8/12
Right Tilt 15 Degree	18900/1880	20M QPSK(50,0)	0.058	0.033	-1.65	20.92	21.00	0.059	2021/8/12

NOTE: Head SAR test results of LTE Band 2

Test Position of	Test channel /Freq.	Test Mode	SAR Value (W/kg)	Power Drift	Conducted power	Tune-up power	Scaled SAR	Date
------------------	---------------------	-----------	------------------	-------------	-----------------	---------------	------------	------

Body-Worn with 10mm			1g	10g	(±5%)	(dBm)	(dBm)	1g (W/Kg)	
1RB									
Front Side	18900/1880	20M QPSK(1,49)	0.420	0.224	2.58	21.30	22.00	0.493	2021/8/12
Back Side	18900/1880	20M QPSK(1,49)	0.666	0.370	-0.13	21.30	22.00	0.782	2021/8/12
50%RB									
Front Side	18900/1880	20M QPSK(50,0)	0.229	0.116	-3.92	20.92	21.00	0.233	2021/8/12
Back Side	18900/1880	20M QPSK(50,0)	0.349	0.190	-0.66	20.92	21.00	0.355	2021/8/12

NOTE: Body-Worn SAR test results of LTE Band 2

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	18900/1880	20M QPSK(1,49)	0.420	0.224	2.58	21.30	22.00	0.493	2021/8/12
Back Side	18900/1880	20M QPSK(1,49)	0.666	0.370	-0.13	21.30	22.00	0.782	2021/8/12
Left Side	18900/1880	20M QPSK(1,49)	0.140	0.075	-3.59	21.30	22.00	0.164	2021/8/12
Bottom Side	18900/1880	20M QPSK(1,49)	0.272	0.144	1.04	21.30	22.00	0.320	2021/8/12
50%RB									
Front Side	18900/1880	20M QPSK(50,0)	0.229	0.116	-3.92	20.92	21.00	0.233	2021/8/12
Back Side	18900/1880	20M QPSK(50,0)	0.349	0.190	-0.66	20.92	21.00	0.355	2021/8/12
Left Side	18900/1880	20M QPSK(50,0)	0.073	0.039	-0.30	20.92	21.00	0.074	2021/8/12
Bottom Side	18900/1880	20M QPSK(50,0)	0.145	0.074	0.70	20.92	21.00	0.148	2021/8/12

NOTE: Hotspot SAR test results of LTE Band 2

10.1.7. SAR measurement Result of LTE Band 4

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Left Cheek	20175/1732.5	20M QPSK(1,49)	0.283	0.181	1.36	21.38	22.50	0.366	2021/7/29
Left Tilt 15 Degree	20175/1732.5	20M QPSK(1,49)	0.147	0.090	4.80	21.38	22.50	0.190	2021/7/29
Right Cheek	20175/1732.5	20M QPSK(1,49)	0.266	0.162	2.93	21.38	22.50	0.344	2021/7/29
Right Tilt 15 Degree	20175/1732.5	20M QPSK(1,49)	0.144	0.087	-4.76	21.38	22.50	0.186	2021/7/29
50%RB									
Left Cheek	20175/1732.5	20M QPSK(50,24)	0.167	0.102	-0.90	20.88	21.00	0.172	2021/7/29
Left Tilt 15 Degree	20175/1732.5	20M QPSK(50,24)	0.086	0.053	-2.59	20.88	21.00	0.088	2021/7/29
Right Cheek	20175/1732.5	20M QPSK(50,24)	0.140	0.086	2.76	20.88	21.00	0.144	2021/7/29
Right Tilt 15 Degree	20175/1732.5	20M QPSK(50,24)	0.083	0.050	4.65	20.88	21.00	0.085	2021/7/29

NOTE: Head SAR test results of LTE Band 4

Test Position of Body-Worn with 10mm		Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
		1g		10g						
1RB										
Front Side	20175/1732.5	20M QPSK(1,49)	0.558	0.306	-1.15	21.38	22.50	0.722	2021/7/29	
Back Side	20175/1732.5	20M QPSK(1,49	0.882	0.483	-0.91	21.38	22.50	1.141	2021/7/29	

		)							
Back Side Repeated	20175/1732.5	20M QPSK(1,49)	0.879	0.480	1.26	21.38	22.50	1.138	2021/7/29
Back Side	20050/1720	20M QPSK(1,49)	0.767	0.416	-0.14	21.33	22.50	1.004	2021/7/29
Back Side	20300/1745	20M QPSK(1,49)	0.732	0.401	-0.89	21.46	22.50	0.930	2021/7/29
50%RB									
Front Side	20175/1732.5	20M QPSK(50,24)	0.311	0.163	-4.86	20.88	21.00	0.320	2021/7/29
Back Side	20175/1732.5	20M QPSK(50,24)	0.446	0.258	-3.84	20.88	21.00	0.458	2021/7/29
100%RB									
Back Side	20175/1732.5	20M QPSK(100,0)	0.428	0.235	2.80	20.81	21.00	0.447	2021/7/29

NOTE: Body-Worn SAR test results of LTE Band 4

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	20175/1732.5	20M QPSK(1,49)	0.558	0.306	-1.15	21.38	22.50	0.722	2021/7/29
Back Side	20175/1732.5	20M QPSK(1,49)	0.882	0.483	-0.91	21.38	22.50	1.141	2021/7/29
Back Side Repeated	20175/1732.5	20M QPSK(1,49)	0.879	0.480	1.26	21.38	22.50	1.138	2021/7/29
Left Side	20175/1732.5	20M QPSK(1,49)	0.186	0.101	0.63	21.38	22.50	0.241	2021/7/29
Bottom Side	20175/1732.5	20M QPSK(1,49)	0.356	0.191	3.84	21.38	22.50	0.461	2021/7/29
Back Side	20050/1720	20M	0.767	0.416	-0.14	21.33	22.50	1.004	2021/7/29

		QPSK(1,49)							
Back Side	20300/1745	20M QPSK(1,49)	0.732	0.401	-0.89	21.46	22.50	0.930	2021/7/29
50%RB									
Front Side	20175/1732.5	20M QPSK(50,24)	0.311	0.163	-4.86	20.88	21.00	0.320	2021/7/29
Back Side	20175/1732.5	20M QPSK(50,24)	0.446	0.258	-3.84	20.88	21.00	0.458	2021/7/29
Left Side	20175/1732.5	20M QPSK(50,24)	0.097	0.060	0.52	20.88	21.00	0.100	2021/7/29
Bottom Side	20175/1732.5	20M QPSK(50,24)	0.206	0.105	3.19	20.88	21.00	0.212	2021/7/29
100%RB									
Back Side	20175/1732.5	20M QPSK(100,0)	0.428	0.235	2.80	20.81	21.00	0.447	2021/7/29

NOTE: Hotspot SAR test results of LTE Band 4

10.1.8. SAR measurement Result of LTE Band 5

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Left Cheek	20525/836.5	10M QPSK(1,0)	0.139	0.113	3.87	22.11	22.50	0.152	2021/7/28
Left Tilt 15 Degree	20525/836.5	10M QPSK(1,0)	0.076	0.059	4.59	22.11	22.50	0.083	2021/7/28
Right Cheek	20525/836.5	10M QPSK(1,0)	0.122	0.097	2.27	22.11	22.50	0.133	2021/7/28
Right Tilt 15 Degree	20525/836.5	10M QPSK(1,0)	0.063	0.049	-3.72	22.11	22.50	0.069	2021/7/28
50%RB									
Left Cheek	20525/836.5	10M QPSK(25,0)	0.081	0.066	4.94	21.25	21.50	0.086	2021/7/28
Left Tilt 15 Degree	20525/836.5	10M QPSK(25,0)	0.045	0.034	-0.62	21.25	21.50	0.048	2021/7/28
Right Cheek	20525/836.5	10M QPSK(25,0)	0.071	0.054	4.14	21.25	21.50	0.075	2021/7/28

Right Tilt 15 Degree	20525/836.5	10M QPSK(25,0)	0.037	0.028	-3.02	21.25	21.50	0.039	2021/7/28
----------------------------	-------------	-------------------	-------	-------	-------	-------	-------	-------	-----------

NOTE: Head SAR test results of LTE Band 5

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	20525/836.5	10M QPSK(1,0)	0.132	0.096	3.95	22.11	22.50	0.144	2021/7/28
Back Side	20525/836.5	10M QPSK(1,0)	0.192	0.144	0.14	22.11	22.50	0.210	2021/7/28
50%RB									
Front Side	20525/836.5	10M QPSK(25,0)	0.077	0.049	-0.17	21.25	21.50	0.082	2021/7/28
Back Side	20525/836.5	10M QPSK(25,0)	0.100	0.082	-4.17	21.25	21.50	0.106	2021/7/28

NOTE: Body-Worn SAR test results of LTE Band 5

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	20525/836.5	10M QPSK(1,0)	0.132	0.096	3.95	22.11	22.50	0.144	2021/7/28
Back Side	20525/836.5	10M QPSK(1,0)	0.192	0.144	0.14	22.11	22.50	0.210	2021/7/28
Left Side	20525/836.5	10M QPSK(1,0)	0.042	0.032	-1.59	22.11	22.50	0.046	2021/7/28
Bottom Side	20525/836.5	10M QPSK(1,0)	0.088	0.064	-3.68	22.11	22.50	0.096	2021/7/28
50%RB									
Front Side	20525/836.5	10M QPSK(25,0)	0.077	0.049	-0.17	21.25	21.50	0.082	2021/7/28
Back Side	20525/836.5	10M QPSK(25,0)	0.100	0.082	-4.17	21.25	21.50	0.106	2021/7/28

Left Side	20525/836.5	10M QPSK(25,0)	0.023	0.017	-2.96	21.25	21.50	0.024	2021/7/28
Bottom Side	20525/836.5	10M QPSK(25,0)	0.046	0.038	-0.85	21.25	21.50	0.049	2021/7/28

NOTE: Hotspot SAR test results of LTE Band 5

10.1.9. SAR measurement Result of LTE Band 7

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Left Cheek	21100/2535	20M QPSK(1,99)	0.607	0.401	-1.79	21.74	22.00	0.644	2021/8/09
Left Tilt 15 Degree	21100/2535	20M QPSK(1,99)	0.332	0.219	2.99	21.74	22.00	0.352	2021/8/09
Right Cheek	21100/2535	20M QPSK(1,99)	0.554	0.359	-2.64	21.74	22.00	0.588	2021/8/09
Right Tilt 15 Degree	21100/2535	20M QPSK(1,99)	0.301	0.191	-2.14	21.74	22.00	0.320	2021/8/09
50%RB									
Left Cheek	21100/2535	20M QPSK(50,24)	0.306	0.238	-3.67	21.33	21.50	0.318	2021/8/09
Left Tilt 15 Degree	21100/2535	20M QPSK(50,24)	0.166	0.127	-1.02	21.33	21.50	0.173	2021/8/09
Right Cheek	21100/2535	20M QPSK(50,24)	0.288	0.197	-3.45	21.33	21.50	0.299	2021/8/09
Right Tilt 15 Degree	21100/2535	20M QPSK(50,24)	0.157	0.099	1.27	21.33	21.50	0.163	2021/8/09

NOTE: Head SAR test results of LTE Band 7

Test Position of Body-Wor n with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									

Front Side	21100/2535	20M QPSK(1,99)	0.546	0.295	1.24	21.74	22.00	0.580	2021/8/09
Back Side	21100/2535	20M QPSK(1,99)	0.870	0.495	-0.38	21.74	22.00	0.924	2021/8/09
Back Side Repeated	21100/2535	20M QPSK(1,99)	0.866	0.490	1.25	21.74	22.00	0.919	2021/8/09
Back Side	20850/2510	20M QPSK(1,99)	0.783	0.437	-0.96	21.76	22.00	0.827	2021/8/09
Back Side	21350/2560	20M QPSK(1,99)	0.722	0.403	0.81	21.83	22.00	0.751	2021/8/09
50%RB									
Front Side	21100/2535	20M QPSK(50,24)	0.317	0.174	4.62	21.33	21.50	0.330	2021/8/09
Back Side	21100/2535	20M QPSK(50,24)	0.480	0.288	-0.72	21.33	21.50	0.499	2021/8/09
100%RB									
Back Side	21100/2535	20M QPSK(100,0)	0.446	0.254	0.66	21.23	21.50	0.475	2021/8/09

NOTE: Body-Worn SAR test results of LTE Band 7

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	21100/2535	20M QPSK(1,99)	0.546	0.295	1.24	21.74	22.00	0.580	2021/8/09
Back Side	21100/2535	20M QPSK(1,99)	0.870	0.495	-0.38	21.74	22.00	0.924	2021/8/09
Back Side Repeated	21100/2535	20M QPSK(1,99)	0.866	0.490	1.25	21.74	22.00	0.919	2021/8/09

Left Side	21100/2535	20M QPSK(1,99)	0.176	0.095	-0.64	21.74	22.00	0.187	2021/8/09
Bottom Side	21100/2535	20M QPSK(1,99)	0.364	0.207	-2.73	21.74	22.00	0.386	2021/8/09
Back Side	20850/2510	20M QPSK(1,99)	0.783	0.437	-0.96	21.76	22.00	0.827	2021/8/09
Back Side	21350/2560	20M QPSK(1,99)	0.722	0.403	0.81	21.83	22.00	0.751	2021/8/09
50%RB									
Front Side	21100/2535	20M QPSK(50,24)	0.317	0.174	4.62	21.33	21.50	0.330	2021/8/09
Back Side	21100/2535	20M QPSK(50,24)	0.480	0.288	-0.72	21.33	21.50	0.499	2021/8/09
Left Side	21100/2535	20M QPSK(50,24)	0.097	0.053	1.35	21.33	21.50	0.101	2021/8/09
Bottom Side	21100/2535	20M QPSK(50,24)	0.213	0.117	-0.27	21.33	21.50	0.222	2021/8/09
100%RB									
Back Side	21100/2535	20M QPSK(100,0)	0.446	0.254	0.66	21.23	21.50	0.475	2021/8/09

NOTE: Hotspot SAR test results of LTE Band 7

10.1.10. SAR measurement Result of LTE Band 12

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Left Cheek	23095/707.5	10M QPSK(1,24)	0.145	0.122	0.66	22.05	22.50	0.161	2021/7/26
Left Tilt 15 Degree	23095/707.5	10M QPSK(1,24)	0.083	0.068	1.38	22.05	22.50	0.092	2021/7/26
Right Cheek	23095/707.5	10M QPSK(1,24)	0.123	0.103	3.96	22.05	22.50	0.136	2021/7/26
Right Tilt 15 Degree	23095/707.5	10M QPSK(1,24)	0.063	0.051	-4.81	22.05	22.50	0.070	2021/7/26
50%RB									
Left	23095/707.5	10M	0.079	0.064	-4.92	21.06	21.50	0.087	2021/7/26

Cheek		QPSK(25,24)							
Left Tilt 15 Degree	23095/707.5	10M QPSK(25,24)	0.043	0.038	-0.80	21.06	21.50	0.048	2021/7/26
Right Cheek	23095/707.5	10M QPSK(25,24)	0.071	0.058	-4.40	21.06	21.50	0.079	2021/7/26
Right Tilt 15 Degree	23095/707.5	10M QPSK(25,24)	0.037	0.028	2.48	21.06	21.50	0.041	2021/7/26

NOTE: Head SAR test results of LTE Band 12

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	23095/707.5	10M QPSK(1,24)	0.174	0.136	-0.39	22.05	22.50	0.193	2021/7/26
Back Side	23095/707.5	10M QPSK(1,24)	0.276	0.220	0.38	22.05	22.50	0.306	2021/7/26
50%RB									
Front Side	23095/707.5	10M QPSK(25,24)	0.100	0.078	-0.54	21.06	21.50	0.111	2021/7/26
Back Side	23095/707.5	10M QPSK(25,24)	0.146	0.124	3.54	21.06	21.50	0.162	2021/7/26

NOTE: Body-Worn SAR test results of LTE Band 12

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	23095/707.5	10M QPSK(1,24)	0.174	0.136	-0.39	22.05	22.50	0.193	2021/7/26
Back Side	23095/707.5	10M QPSK(1,24)	0.276	0.220	0.38	22.05	22.50	0.306	2021/7/26
Left Side	23095/707.5	10M QPSK(1,24)	0.056	0.045	-3.71	22.05	22.50	0.062	2021/7/26
Bottom	23095/707.5	10M	0.128	0.100	-1.75	22.05	22.50	0.142	2021/7/26

Side		QPSK(1,24)							
50%RB									
Front Side	23095/707.5	10M QPSK(25,24)	0.100	0.078	-0.54	21.06	21.50	0.111	2021/7/26
Back Side	23095/707.5	10M QPSK(25,24)	0.146	0.124	3.54	21.06	21.50	0.162	2021/7/26
Left Side	23095/707.5	10M QPSK(25,24)	0.032	0.024	4.76	21.06	21.50	0.035	2021/7/26
Bottom Side	23095/707.5	10M QPSK(25,24)	0.077	0.052	-1.94	21.06	21.50	0.085	2021/7/26

NOTE: Hotspot SAR test results of LTE Band 12

10.1.11. SAR measurement Result of LTE Band 17

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Left Cheek	23790/710	10M QPSK(1,24)	0.145	0.122	2.25	22.77	23.00	0.153	2021/7/26
Left Tilt 15 Degree	23790/710	10M QPSK(1,24)	0.081	0.065	-1.93	22.77	23.00	0.085	2021/7/26
Right Cheek	23790/710	10M QPSK(1,24)	0.129	0.104	0.18	22.77	23.00	0.136	2021/7/26
Right Tilt 15 Degree	23790/710	10M QPSK(1,24)	0.063	0.052	-4.50	22.77	23.00	0.066	2021/7/26
50%RB									
Left Cheek	23790/710	10M QPSK(25,12)	0.085	0.073	4.65	21.75	22.00	0.090	2021/7/26
Left Tilt 15 Degree	23790/710	10M QPSK(25,12)	0.046	0.033	-4.90	21.75	22.00	0.049	2021/7/26
Right Cheek	23790/710	10M QPSK(25,12)	0.067	0.060	3.46	21.75	22.00	0.071	2021/7/26
Right Tilt 15 Degree	23790/710	10M QPSK(25,12)	0.036	0.030	-2.55	21.75	22.00	0.038	2021/7/26

NOTE: Head SAR test results of LTE Band 17

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	23790/710	10M QPSK(1,24)	0.186	0.141	0.14	22.77	23.00	0.196	2021/7/26
Back Side	23790/710	10M QPSK(1,24)	0.274	0.219	0.07	22.77	23.00	0.289	2021/7/26
50%RB									
Front Side	23790/710	10M QPSK(25,12)	0.108	0.071	-3.49	21.75	22.00	0.114	2021/7/26
Back Side	23790/710	10M QPSK(25,12)	0.150	0.118	-2.82	21.75	22.00	0.159	2021/7/26

NOTE: Body-Worn SAR test results of LTE Band 17

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	23790/710	10M QPSK(1,24)	0.186	0.141	0.14	22.77	23.00	0.196	2021/7/26
Back Side	23790/710	10M QPSK(1,24)	0.274	0.219	0.07	22.77	23.00	0.289	2021/7/26
Left Side	23790/710	10M QPSK(1,24)	0.060	0.046	-1.43	22.77	23.00	0.063	2021/7/26
Bottom Side	23790/710	10M QPSK(1,24)	0.116	0.088	0.27	22.77	23.00	0.122	2021/7/26
50%RB									
Front Side	23790/710	10M QPSK(25,12)	0.108	0.071	-3.49	21.75	22.00	0.114	2021/7/26
Back Side	23790/710	10M QPSK(25,12)	0.150	0.118	-2.82	21.75	22.00	0.159	2021/7/26
Left Side	23790/710	10M QPSK(25,12)	0.031	0.024	0.67	21.75	22.00	0.033	2021/7/26
Bottom Side	23790/710	10M QPSK(25,12)	0.066	0.047	-4.93	21.75	22.00	0.070	2021/7/26

NOTE: Hotspot SAR test results of LTE Band 17

10.1.12. SAR measurement Result of LTE Band 25

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Left Cheek	26365/1882.5	20M QPSK(1,49)	0.273	0.168	-2.37	22.40	23.00	0.313	2021/8/12
Left Tilt 15 Degree	26365/1882.5	20M QPSK(1,49)	0.151	0.092	5.39	22.40	23.00	0.173	2021/8/12
Right Cheek	26365/1882.5	20M QPSK(1,49)	0.237	0.146	-4.28	22.40	23.00	0.272	2021/8/12
Right Tilt 15 Degree	26365/1882.5	20M QPSK(1,49)	0.108	0.066	1.41	22.40	23.00	0.124	2021/8/12
50%RB									
Left Cheek	26365/1882.5	20M QPSK(50,49)	0.138	0.093	-3.81	21.25	22.00	0.164	2021/8/12
Left Tilt 15 Degree	26365/1882.5	20M QPSK(50,49)	0.084	0.050	0.32	21.25	22.00	0.100	2021/8/12
Right Cheek	26365/1882.5	20M QPSK(50,49)	0.137	0.079	-0.77	21.25	22.00	0.163	2021/8/12
Right Tilt 15 Degree	26365/1882.5	20M QPSK(50,49)	0.065	0.033	0.23	21.25	22.00	0.077	2021/8/12

NOTE: Head SAR test results of LTE Band 25

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	26365/1882.5	20M QPSK(1,49)	0.426	0.227	3.04	22.40	23.00	0.489	2021/8/12
Back Side	26365/1882.5	20M QPSK(1,49)	0.691	0.383	-0.03	22.40	23.00	0.793	2021/8/12
50%RB									
Front Side	26365/1882.5	20M	0.255	0.129	-2.78	21.25	22.00	0.303	2021/8/12

		QPSK(50,49)							
Back Side	26365/1882.5	20M QPSK(50,49)	0.408	0.201	-4.01	21.25	22.00	0.485	2021/8/12

NOTE: Body-Worn SAR test results of LTE Band 25

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	26365/1882.5	20M QPSK(1,49)	0.426	0.227	3.04	22.40	23.00	0.489	2021/8/12
Back Side	26365/1882.5	20M QPSK(1,49)	0.691	0.383	-0.03	22.40	23.00	0.793	2021/8/12
Left Side	26365/1882.5	20M QPSK(1,49)	0.146	0.077	-0.77	22.40	23.00	0.168	2021/8/12
Bottom Side	26365/1882.5	20M QPSK(1,49)	0.280	0.154	0.79	22.40	23.00	0.321	2021/8/12
50%RB									
Front Side	26365/1882.5	20M QPSK(50,49)	0.255	0.129	-2.78	21.25	22.00	0.303	2021/8/12
Back Side	26365/1882.5	20M QPSK(50,49)	0.408	0.201	-4.01	21.25	22.00	0.485	2021/8/12
Left Side	26365/1882.5	20M QPSK(50,49)	0.076	0.041	2.14	21.25	22.00	0.090	2021/8/12
Bottom Side	26365/1882.5	20M QPSK(50,49)	0.140	0.090	-0.49	21.25	22.00	0.166	2021/8/12

NOTE: Head SAR test results of LTE Band 25

10.1.13. SAR measurement Result of LTE Band 26A

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Left Cheek	26740/819	10M QPSK(1,49)	0.099	0.083	2.63	22.71	23.00	0.106	2021/7/28
Left Tilt 15	26740/819	10M QPSK(1,49)	0.058	0.047	4.85	22.71	23.00	0.062	2021/7/28

Degree									
Right Cheek	26740/819	10M QPSK(1,49)	0.094	0.078	4.88	22.71	23.00	0.100	2021/7/28
Right Tilt 15 Degree	26740/819	10M QPSK(1,49)	0.045	0.037	-2.14	22.71	23.00	0.048	2021/7/28
50%RB									
Left Cheek	26740/819	10M QPSK(25,12)	0.058	0.042	4.53	21.49	21.50	0.058	2021/7/28
Left Tilt 15 Degree	26740/819	10M QPSK(25,12)	0.034	0.026	-0.37	21.49	21.50	0.034	2021/7/28
Right Cheek	26740/819	10M QPSK(25,12)	0.056	0.047	-4.40	21.49	21.50	0.056	2021/7/28
Right Tilt 15 Degree	26740/819	10M QPSK(25,12)	0.023	0.022	2.80	21.49	21.50	0.023	2021/7/28

NOTE: Head SAR test results of LTE Band 26A

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	26740/819	10M QPSK(1,49)	0.114	0.092	-3.40	22.71	23.00	0.122	2021/7/28
Back Side	26740/819	10M QPSK(1,49)	0.175	0.142	0.20	22.71	23.00	0.187	2021/7/28
50%RB									
Front Side	26740/819	10M QPSK(25,12)	0.060	0.052	-2.05	21.49	21.50	0.060	2021/7/28
Back Side	26740/819	10M QPSK(25,12)	0.092	0.085	2.72	21.49	21.50	0.092	2021/7/28

NOTE: Body-Worn SAR test results of LTE Band 26A

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					

1RB									
Front Side	26740/819	10M QPSK(1,49)	0.114	0.092	-3.40	22.71	23.00	0.122	2021/7/28
Back Side	26740/819	10M QPSK(1,49)	0.175	0.142	0.20	22.71	23.00	0.187	2021/7/28
Left Side	26740/819	10M QPSK(1,49)	0.042	0.033	-3.89	22.71	23.00	0.045	2021/7/28
Bottom Side	26740/819	10M QPSK(1,49)	0.088	0.070	-2.54	22.71	23.00	0.094	2021/7/28
50%RB									
Front Side	26740/819	10M QPSK(25,12)	0.060	0.052	-2.05	21.49	21.50	0.060	2021/7/28
Back Side	26740/819	10M QPSK(25,12)	0.092	0.085	2.72	21.49	21.50	0.092	2021/7/28
Left Side	26740/819	10M QPSK(25,12)	0.024	0.018	2.80	21.49	21.50	0.024	2021/7/28
Bottom Side	26740/819	10M QPSK(25,12)	0.052	0.040	-2.88	21.49	21.50	0.052	2021/7/28

NOTE: Hotspot SAR test results of LTE Band 26A

10.1.14. SAR measurement Result of LTE Band 26B

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Left Cheek	26915/836.5	15M QPSK(1,37)	0.091	0.077	1.15	22.46	23.00	0.103	2021/7/28
Left Tilt 15 Degree	26915/836.5	15M QPSK(1,37)	0.049	0.041	-3.95	22.46	23.00	0.055	2021/7/28
Right Cheek	26915/836.5	15M QPSK(1,37)	0.085	0.072	-0.95	22.46	23.00	0.096	2021/7/28
Right Tilt 15 Degree	26915/836.5	15M QPSK(1,37)	0.042	0.035	4.10	22.46	23.00	0.048	2021/7/28
50%RB									
Left Cheek	26915/836.5	15M QPSK(36,37)	0.051	0.040	-4.44	21.18	22.00	0.062	2021/7/28
Left Tilt 15	26915/836.5	15M QPSK(36,37)	0.029	0.024	3.93	21.18	22.00	0.035	2021/7/28

Degree									
Right Cheek	26915/836.5	15M QPSK(36,37)	0.045	0.038	4.97	21.18	22.00	0.054	2021/7/28
Right Tilt 15 Degree	26915/836.5	15M QPSK(36,37)	0.021	0.020	0.48	21.18	22.00	0.025	2021/7/28

NOTE: Head SAR test results of LTE Band 26B

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	26915/836.5	15M QPSK(1,37)	0.120	0.096	0.50	22.46	23.00	0.136	2021/7/28
Back Side	26915/836.5	15M QPSK(1,37)	0.194	0.155	-1.12	22.46	23.00	0.220	2021/7/28
50%RB									
Front Side	26915/836.5	15M QPSK(36,37)	0.071	0.053	1.90	21.18	22.00	0.086	2021/7/28
Back Side	26915/836.5	15M QPSK(36,37)	0.099	0.091	-3.00	21.18	22.00	0.120	2021/7/28

NOTE: Body-Worn SAR test results of LTE Band 26B

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	26915/836.5	15M QPSK(1,37)	0.120	0.096	0.50	22.46	23.00	0.136	2021/7/28
Back Side	26915/836.5	15M QPSK(1,37)	0.194	0.155	-1.12	22.46	23.00	0.220	2021/7/28
Left Side	26915/836.5	15M QPSK(1,37)	0.040	0.032	2.91	22.46	23.00	0.045	2021/7/28
Bottom Side	26915/836.5	15M QPSK(1,37)	0.080	0.064	-3.48	22.46	23.00	0.091	2021/7/28
50%RB									
Front	26915/836.5	15M	0.071	0.053	1.90	21.18	22.00	0.086	2021/7/28

Side		QPSK(36,37)							
Back Side	26915/836.5	15M QPSK(36,37)	0.099	0.091	-3.00	21.18	22.00	0.120	2021/7/28
Left Side	26915/836.5	15M QPSK(36,37)	0.022	0.016	4.86	21.18	22.00	0.027	2021/7/28
Bottom Side	26915/836.5	15M QPSK(36,37)	0.046	0.033	-1.15	21.18	22.00	0.056	2021/7/28

NOTE: Hotspot SAR test results of LTE Band 26B

10.1.15. SAR measurement Result of WLAN 2.4G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	6/2437	802.11b	0.340	0.167	-1.57	13.41	13.50	0.347	2021/8/03
Left Tilt 15 Degree	6/2437	802.11b	0.201	0.094	4.74	13.41	13.50	0.205	2021/8/03
Right Cheek	6/2437	802.11b	0.319	0.149	3.82	13.41	13.50	0.326	2021/8/03
Right Tilt 15 Degree	6/2437	802.11b	0.151	0.070	-1.50	13.41	13.50	0.154	2021/8/03

NOTE: Head SAR test results of WLAN 2.4G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	6/2437	802.11b	0.233	0.117	-2.31	13.41	13.50	0.238	2021/8/03
Back Side	6/2437	802.11b	0.389	0.204	-1.01	13.41	13.50	0.397	2021/8/03

NOTE: Body-Worn SAR test results of WLAN 2.4G

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	6/2437	802.11b	0.233	0.117	-2.31	13.41	13.50	0.238	2021/8/03
Back Side	6/2437	802.11b	0.389	0.204	-1.01	13.41	13.50	0.397	2021/8/03
Right Side	6/2437	802.11b	0.117	0.061	-3.35	13.41	13.50	0.119	2021/8/03
Top Side	6/2437	802.11b	0.156	0.078	-2.09	13.41	13.50	0.159	2021/8/03

NOTE: Hotspot SAR test results of WLAN 2.4G

10.1.16. SAR measurement Result of WLAN 5.2G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	40/5200	802.11a	0.253	0.112	-0.79	10.58	11.00	0.279	2021/8/08
Left Tilt 15 Degree	40/5200	802.11a	0.138	0.059	-3.29	10.58	11.00	0.152	2021/8/08
Right Cheek	40/5200	802.11a	0.227	0.095	-2.38	10.58	11.00	0.250	2021/8/08
Right Tilt 15 Degree	40/5200	802.11a	0.118	0.050	-3.83	10.58	11.00	0.130	2021/8/08

NOTE: Head SAR test results of WLAN 5.2G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	40/5200	802.11a	0.108	0.063	-0.38	10.58	11.00	0.119	2021/8/08
Back Side	40/5200	802.11a	0.138	0.082	-2.13	10.58	11.00	0.152	2021/8/08

NOTE: Body-Worn SAR test results of WLAN 5.2G

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	40/5200	802.11a	0.108	0.063	-0.38	10.58	11.00	0.119	2021/8/08
Back Side	40/5200	802.11a	0.138	0.082	-2.13	10.58	11.00	0.152	2021/8/08
Right Side	40/5200	802.11a	0.051	0.029	1.90	10.58	11.00	0.056	2021/8/08
Top Side	40/5200	802.11a	0.060	0.035	-1.60	10.58	11.00	0.066	2021/8/08

NOTE: Hotspot SAR test results of WLAN 5.2G

10.1.17. SAR measurement Result of WLAN 5.3G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	56/5280	802.11a	0.451	0.200	0.04	9.07	10.50	0.627	2021/8/8
Left Tilt 15 Degree	56/5280	802.11a	0.247	0.104	-0.31	9.07	10.50	0.343	2021/8/8
Right Cheek	56/5280	802.11a	0.410	0.178	-1.98	9.07	10.50	0.570	2021/8/8

Right Tilt 15 Degree	56/5280	802.11a	0.218	0.092	-4.68	9.07	10.50	0.303	2021/8/8
----------------------	---------	---------	-------	-------	-------	------	-------	-------	----------

NOTE: Head SAR test results of WLAN 5.3G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	56/5280	802.11a	0.126	0.074	-3.93	9.07	10.50	0.175	2021/8/8
Back Side	56/5280	802.11a	0.182	0.109	-1.72	9.07	10.50	0.253	2021/8/8

NOTE: Body-Worn SAR test results of WLAN 5.3G

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	56/5280	802.11a	0.126	0.074	-3.93	9.07	10.50	0.175	2021/8/8
Back Side	56/5280	802.11a	0.182	0.109	-1.72	9.07	10.50	0.253	2021/8/8
Right Side	56/5280	802.11a	0.057	0.033	-3.52	9.07	10.50	0.079	2021/8/8
Top Side	56/5280	802.11a	0.080	0.047	2.94	9.07	10.50	0.111	2021/8/8

NOTE: Hotspot SAR test results of WLAN 5.3G

10.1.18. SAR measurement Result of WLAN 5.6G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	120/5600	802.11a	0.385	0.151	1.26	8.90	10.00	0.496	2021/8/11
Left Tilt 15 Degree	120/5600	802.11a	0.223	0.087	0.46	8.90	10.00	0.287	2021/8/11
Right Cheek	120/5600	802.11a	0.333	0.128	4.57	8.90	10.00	0.429	2021/8/11
Right Tilt 15 Degree	120/5600	802.11a	0.183	0.070	2.08	8.90	10.00	0.236	2021/8/11

NOTE: Head SAR test results of WLAN 5.6G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	120/5600	802.11a	0.096	0.055	1.18	8.90	10.00	0.124	2021/8/11
Back Side	120/5600	802.11a	0.148	0.090	0.26	8.90	10.00	0.191	2021/8/11

NOTE: Body-Worn SAR test results of WLAN 5.6G

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	120/5600	802.11a	0.096	0.055	1.18	8.90	10.00	0.124	2021/8/11
Back Side	120/5600	802.11a	0.148	0.090	0.26	8.90	10.00	0.191	2021/8/11
Right Side	120/5600	802.11a	0.054	0.032	-3.14	8.90	10.00	0.070	2021/8/11
Top Side	120/5600	802.11a	0.072	0.043	-2.19	8.90	10.00	0.093	2021/8/11

NOTE: Hotspot SAR test results of WLAN 5.6G

10.1.19. SAR measurement Result of WLAN 5.8G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	157/5785	802.11a	0.461	0.209	2.54	8.53	10.50	0.726	2021/8/05
Left Tilt 15 Degree	157/5785	802.11a	0.329	0.119	-0.31	8.53	10.50	0.518	2021/8/05
Right Cheek	157/5785	802.11a	0.415	0.188	-4.72	8.53	10.50	0.653	2021/8/05
Right Tilt 15 Degree	157/5785	802.11a	0.273	0.100	-2.71	8.53	10.50	0.430	2021/8/05

NOTE: Head SAR test results of WLAN 5.8G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	157/5785	802.11a	0.144	0.073	-2.16	8.53	10.50	0.227	2021/8/05
Back Side	157/5785	802.11a	0.208	0.107	0.36	8.53	10.50	0.327	2021/8/05

NOTE: Body-Worn SAR test results of WLAN 5.8G

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	157/5785	802.11a	0.144	0.073	-2.16	8.53	10.50	0.227	2021/8/05
Back Side	157/5785	802.11a	0.208	0.107	0.36	8.53	10.50	0.327	2021/8/05
Right Side	157/5785	802.11a	0.075	0.037	-0.41	8.53	10.50	0.118	2021/8/05
Top Side	157/5785	802.11a	0.096	0.049	-0.49	8.53	10.50	0.151	2021/8/05

NOTE: Hotspot SAR test results of WLAN 5.8G

10.2. SAR Summation Scenario

Per KDB 447498 D01, simultaneous transmission SAR is compliant if,

- 1) Scalar SAR summation $< 1.6\text{W/kg}$.
- 2) $\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan. If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WWAN	DTS			
Head	Left Cheek	0.644	0.347	0.991	N/A	N/A
	Left Tilt 15 Degree	0.352	0.205	0.557	N/A	N/A
	Right Cheek	0.588	0.326	0.914	N/A	N/A
	Right Tilt 15 Degree	0.320	0.154	0.474	N/A	N/A
Body-Worn	Front Side	0.722	0.238	0.960	N/A	N/A
	Back Side	1.150	0.397	1.547	N/A	N/A
Hotspot	Front Side	0.722	0.238	0.960	N/A	N/A
	Back Side	1.150	0.397	1.547	N/A	N/A
	Left Side	0.241	N/A	0.241	N/A	N/A
	Right Side	N/A	0.119	0.119	N/A	N/A
	Top Side	N/A	0.159	0.159	N/A	N/A
	Bottom Side	0.462	N/A	0.462	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WWAN and DTS.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WWAN	NII			
Head	Left Cheek	0.644	0.726	1.370	N/A	N/A
	Left Tilt 15 Degree	0.352	0.518	0.870	N/A	N/A
	Right Cheek	0.588	0.653	1.241	N/A	N/A
	Right Tilt 15 Degree	0.320	0.430	0.750	N/A	N/A

Body-Worn	Front Side	0.722	0.227	0.949	N/A	N/A
	Back Side	1.150	0.327	1.477	N/A	N/A
Hotspot	Front Side	0.722	0.227	0.949	N/A	N/A
	Back Side	1.150	0.327	1.477	N/A	N/A
	Left Side	0.241	N/A	0.241	N/A	N/A
	Right Side	N/A	0.118	0.118	N/A	N/A
	Top Side	N/A	0.151	0.151	N/A	N/A
	Bottom Side	0.462	N/A	0.462	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WWAN and NII.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WWAN	DSS			
Head	Left Cheek	0.644	0.167	0.811	N/A	N/A
	Left Tilt 15 Degree	0.352	0.167	0.519	N/A	N/A
	Right Cheek	0.588	0.167	0.755	N/A	N/A
	Right Tilt 15 Degree	0.320	0.167	0.487	N/A	N/A
Body-Worn	Front Side	0.722	0.084	0.806	N/A	N/A
	Back Side	1.150	0.084	1.234	N/A	N/A
Hotspot	Front Side	0.722	0.084	0.806	N/A	N/A
	Back Side	1.150	0.084	1.234	N/A	N/A
	Left Side	0.241	N/A	0.241	N/A	N/A
	Right Side	N/A	0.084	0.084	N/A	N/A
	Top Side	N/A	0.084	0.084	N/A	N/A
	Bottom Side	0.462	N/A	0.462	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WWAN and DSS.

11. Appendix A. Photo documentation

Refer to appendix Test Setup photo---SAR

12. Appendix B. System Check Plots

Table of contents
MEASUREMENT 1 System Performance Check - 750MHz
MEASUREMENT 2 System Performance Check - 835MHz
MEASUREMENT 3 System Performance Check - 1800MHz
MEASUREMENT 4 System Performance Check - 1900MHz
MEASUREMENT 5 System Performance Check - 2450MHz
MEASUREMENT 6 System Performance Check - 2600MHz
MEASUREMENT 7 System Performance Check - 5200MHz
MEASUREMENT 8 System Performance Check - 5600MHz
MEASUREMENT 9 System Performance Check - 5800MHz

MEASUREMENT 1

Date of measurement: 26/7/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW750</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	750.000000
Relative permittivity (real part)	42.636899
Relative permittivity (imaginary part)	21.654704
Conductivity (S/m)	0.902279
Variation (%)	-1.810000

SURFACE SAR

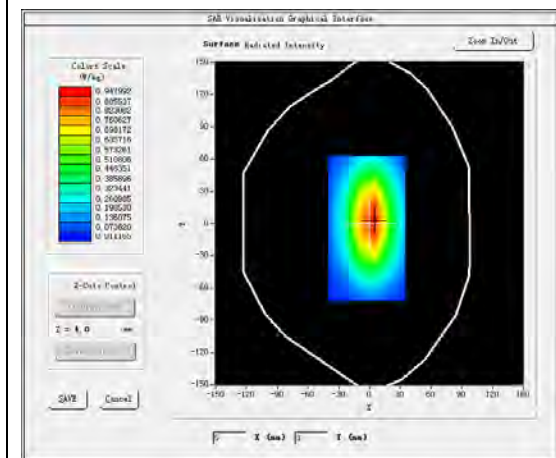


VOLUME SAR

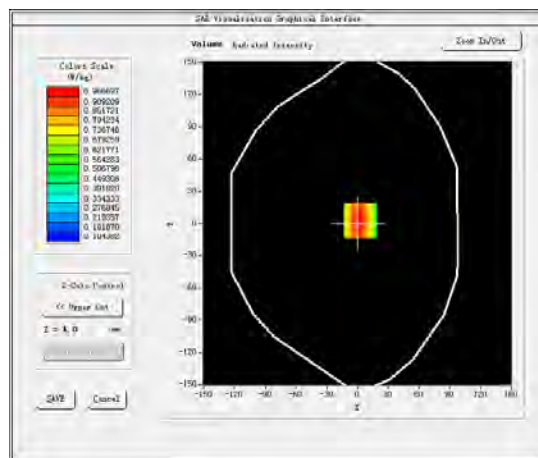


Maximum location: X=3.00, Y=3.00

SAR Peak: 1.30 W/kg


SAR 10g (W/Kg)	0.526218
SAR 1g (W/Kg)	0.806362

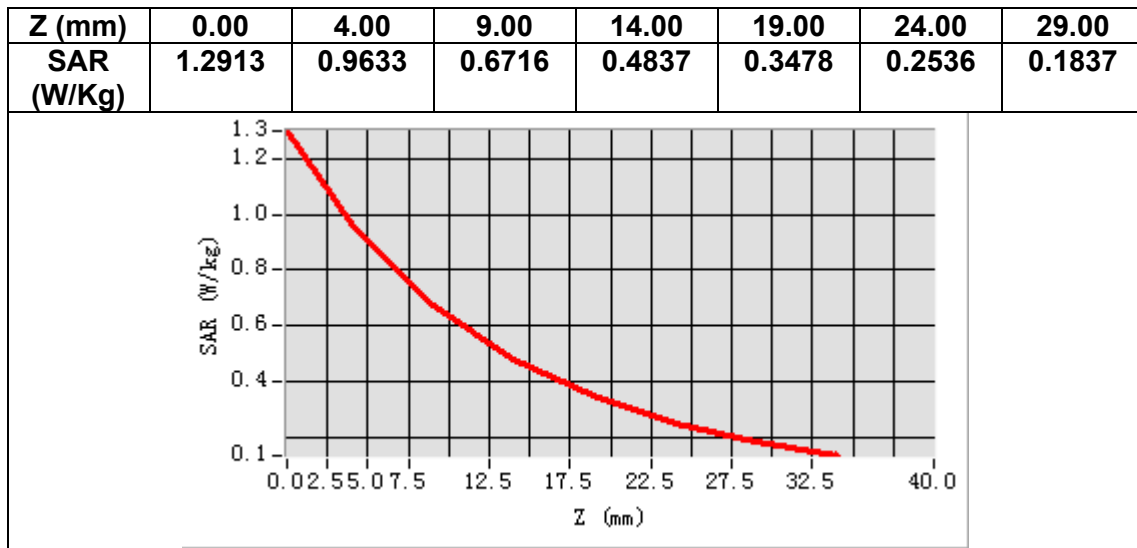

3D screen shot

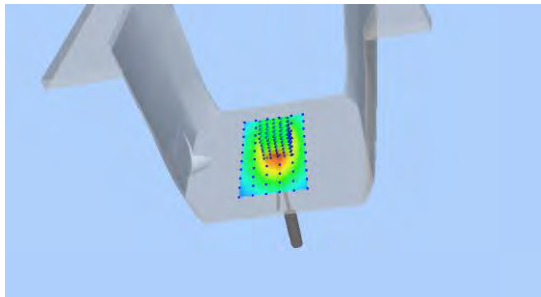

Hot spot position

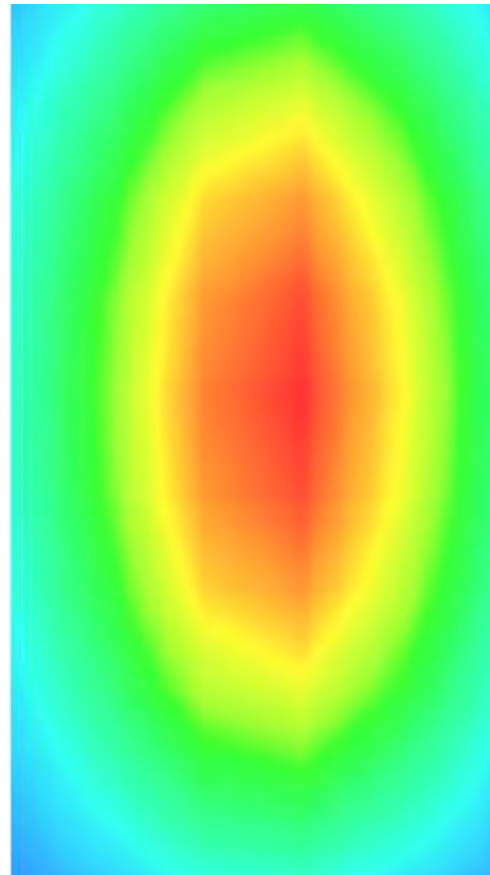

MEASUREMENT 2

Date of measurement: 28/7/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW835</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	835.000000
Relative permittivity (real part)	42.612652
Relative permittivity (imaginary part)	20.171503
Conductivity (S/m)	0.935734
Variation (%)	1.870000

SURFACE SAR

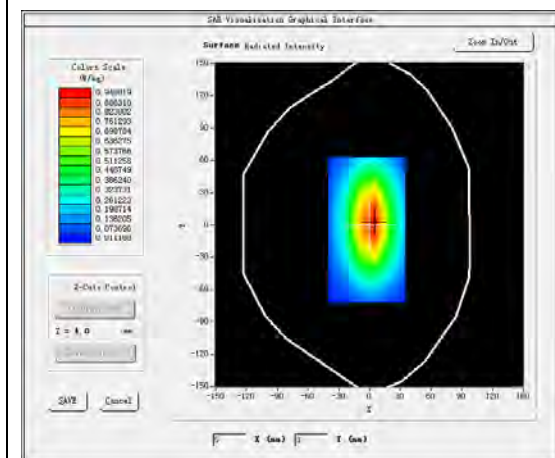


VOLUME SAR

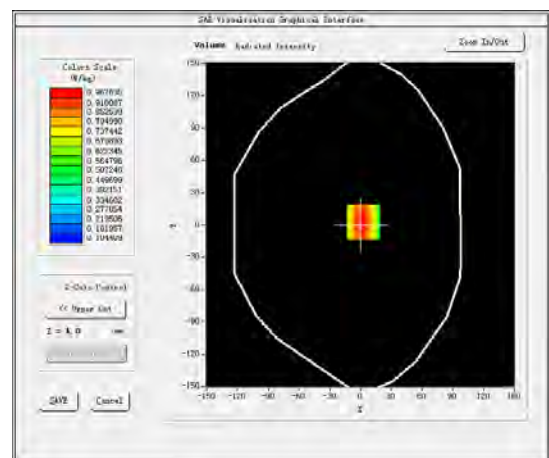


Maximum location: X=3.00, Y=3.00

SAR Peak: 1.30 W/kg


SAR 10g (W/Kg)	0.598466
SAR 1g (W/Kg)	0.993035

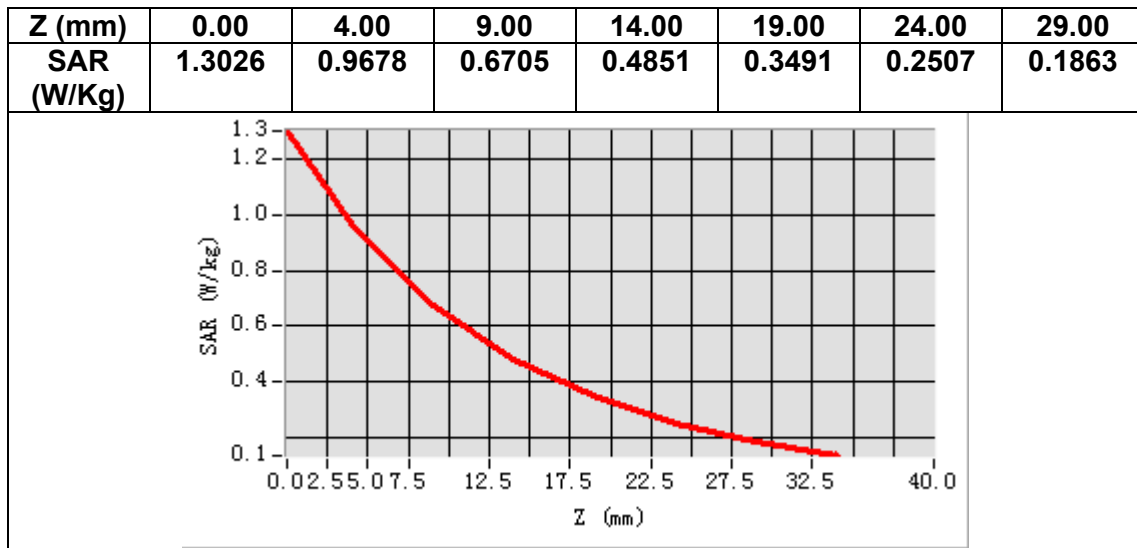

3D screen shot

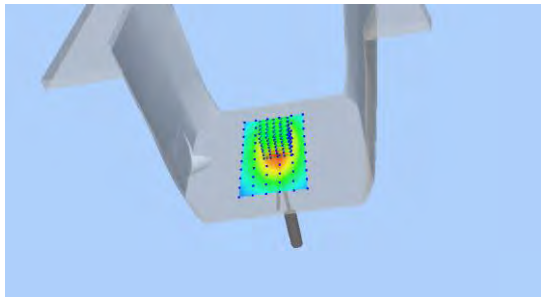

Hot spot position

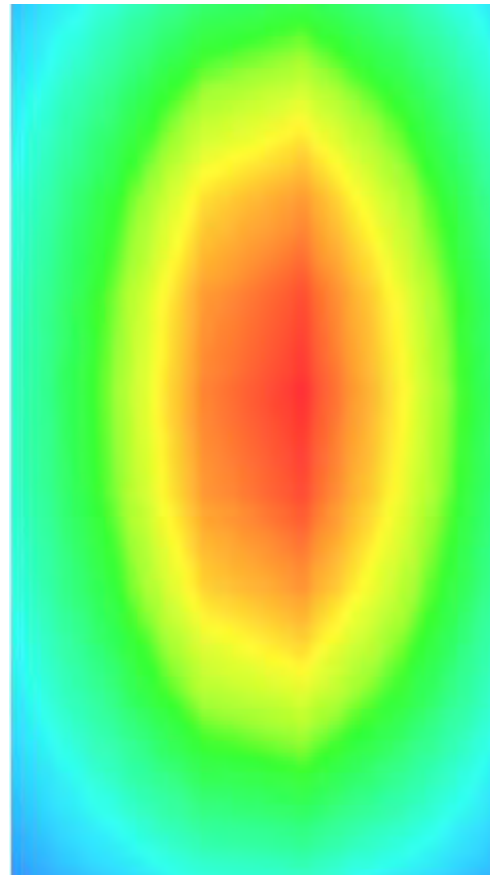

MEASUREMENT 3

Date of measurement: 29/7/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1800.000000
Relative permittivity (real part)	39.963307
Relative permittivity (imaginary part)	13.766647
Conductivity (S/m)	1.376665
Variation (%)	-2.113000

SURFACE SAR

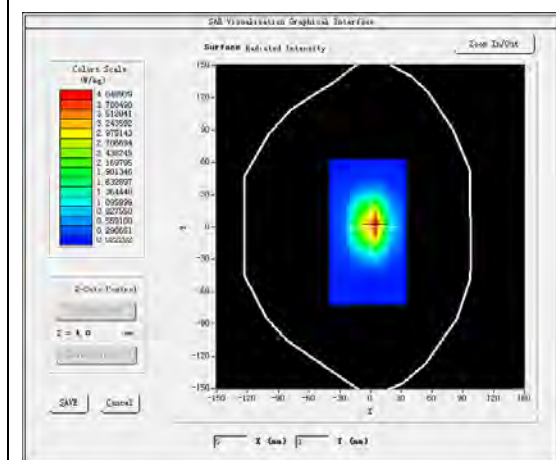


VOLUME SAR

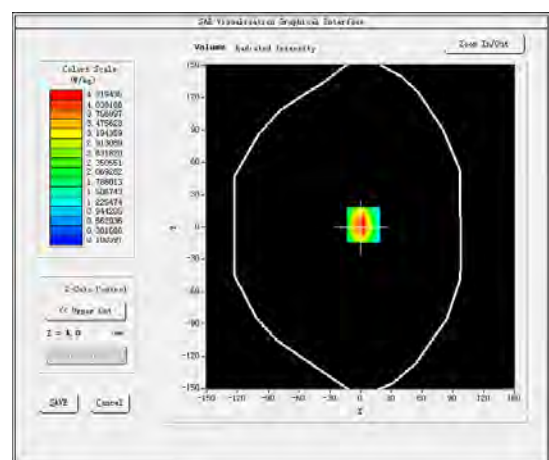


Maximum location: X=3.00, Y=2.00

SAR Peak: 6.82 W/kg


SAR 10g (W/Kg)	2.141397
SAR 1g (W/Kg)	3.725451

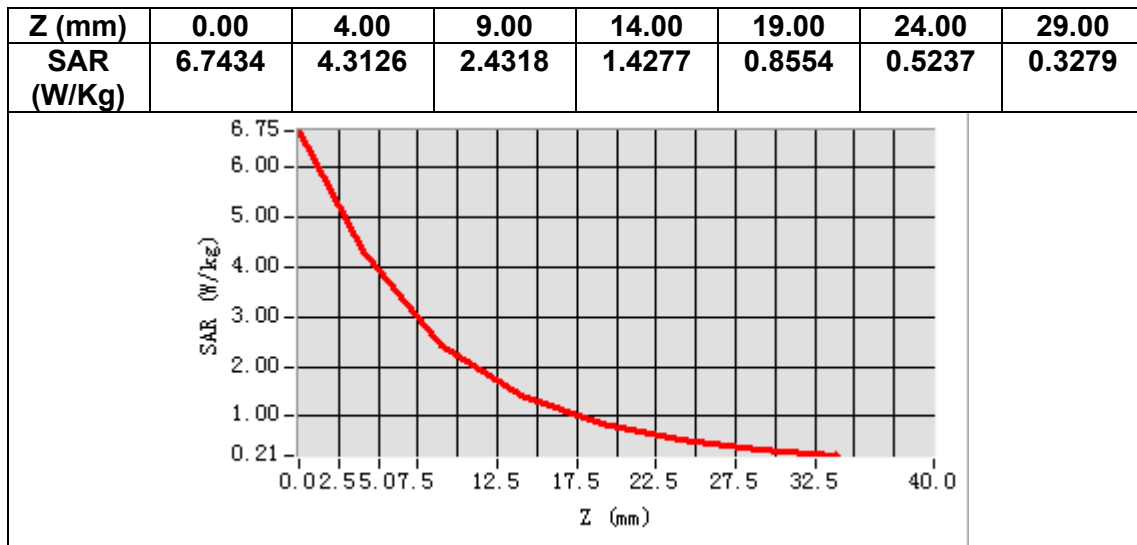

3D screen shot

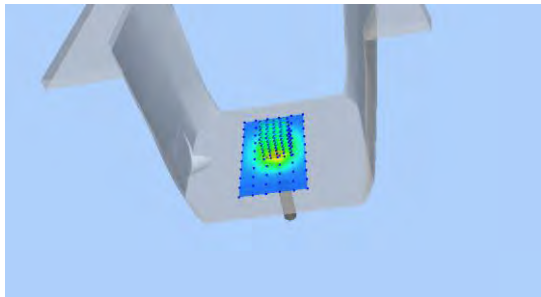

Hot spot position

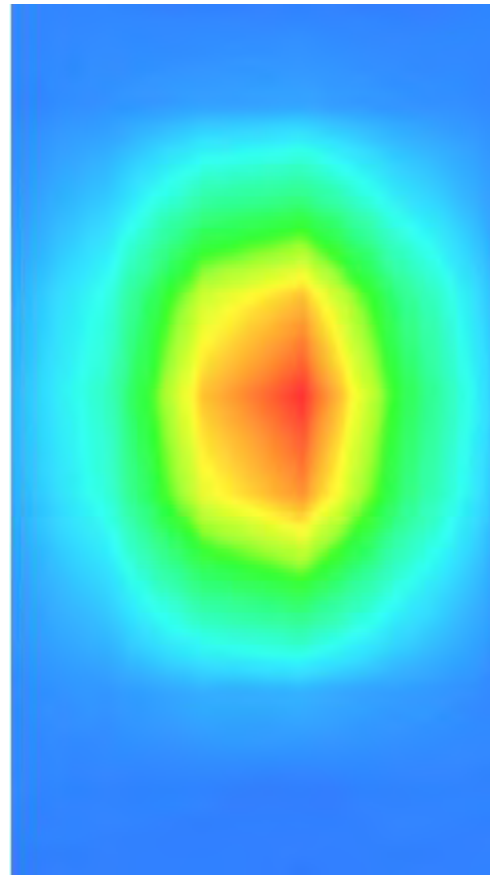

MEASUREMENT 4

Date of measurement: 12/8/2021


A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW1900</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative permittivity (real part)	38.954846
Relative permittivity (imaginary part)	13.658601
Conductivity (S/m)	1.441741
Variation (%)	-1.430000

SURFACE SAR

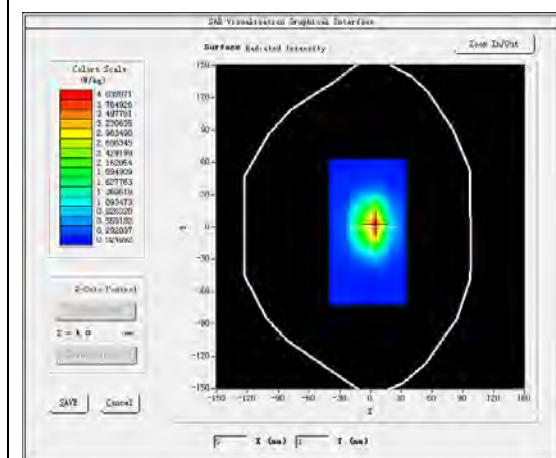


VOLUME SAR

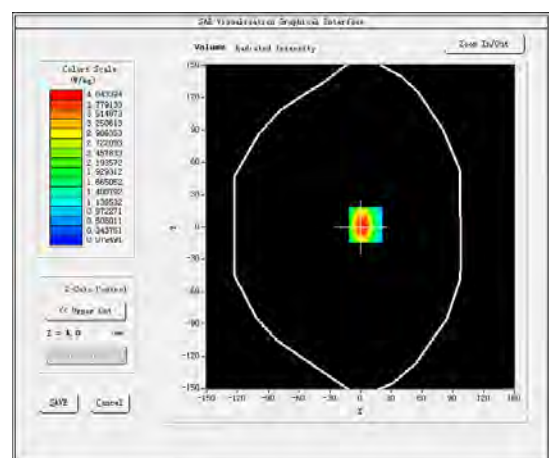


Maximum location: X=5.00, Y=2.00

SAR Peak: 6.70 W/kg


SAR 10g (W/Kg)	2.109456
SAR 1g (W/Kg)	4.118365

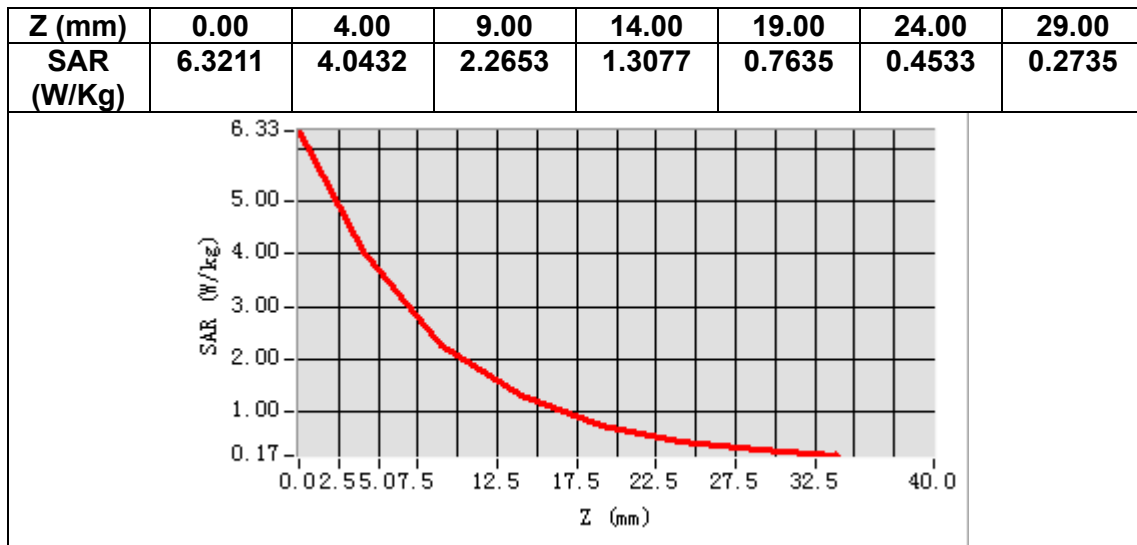

3D screen shot

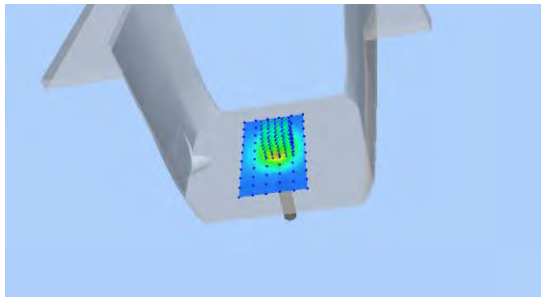

Hot spot position

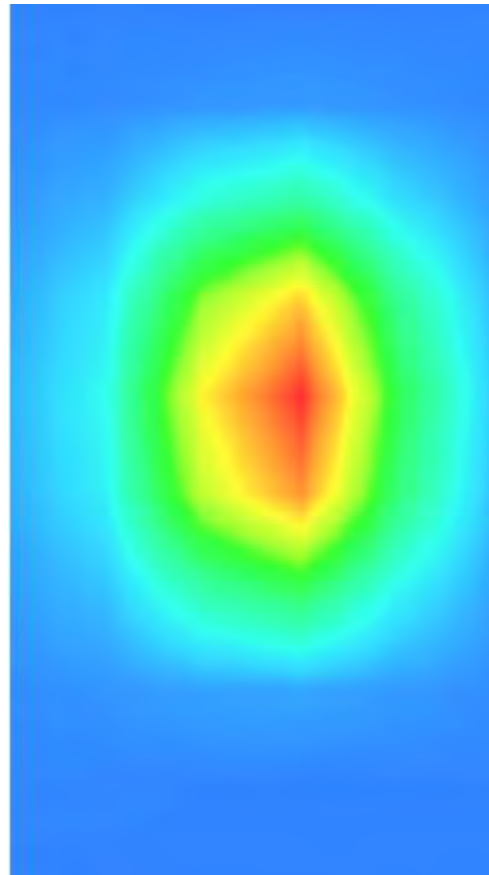

MEASUREMENT 5

Date of measurement: 3/8/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2450</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative permittivity (real part)	39.762810
Relative permittivity (imaginary part)	13.260726
Conductivity (S/m)	1.804932
Variation (%)	0.350000

SURFACE SAR

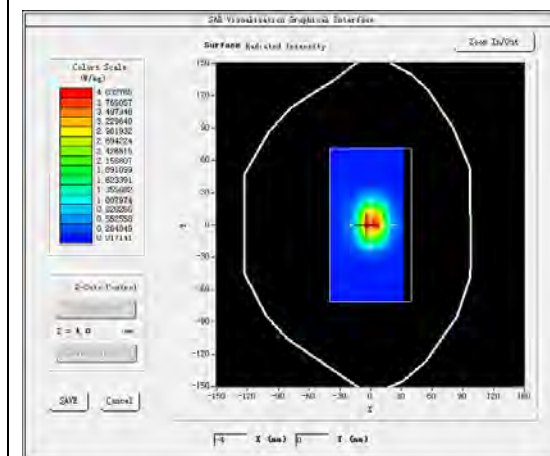


VOLUME SAR

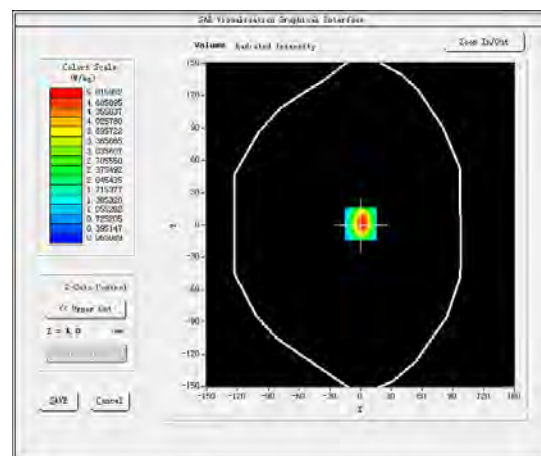


Maximum location: X=0.00, Y=1.00

SAR Peak: 8.14 W/kg


SAR 10g (W/Kg)	2.334375
SAR 1g (W/Kg)	5.007435

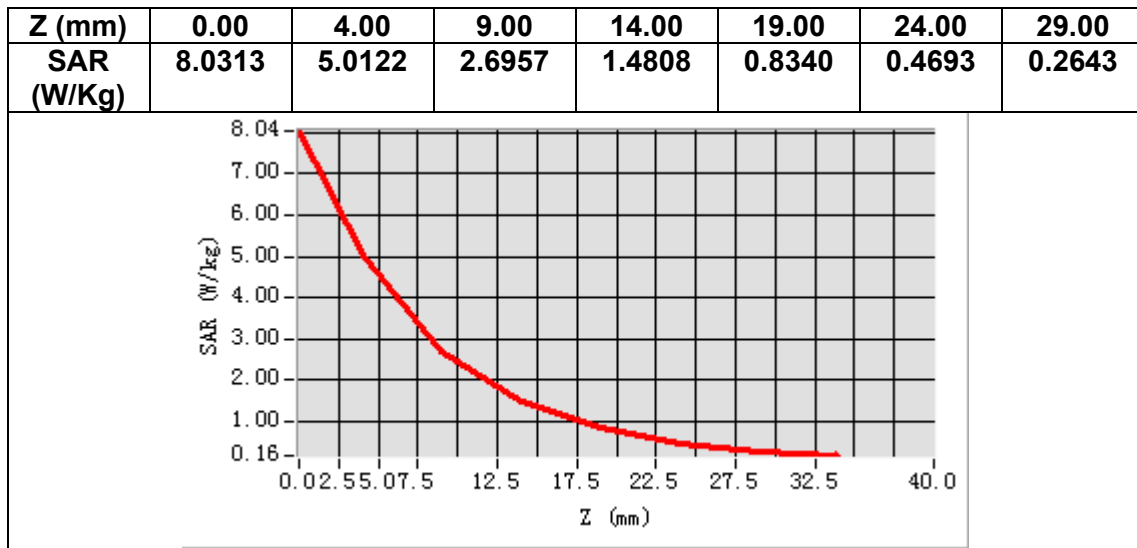

3D screen shot

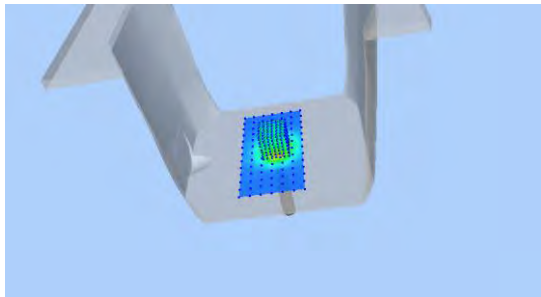

Hot spot position

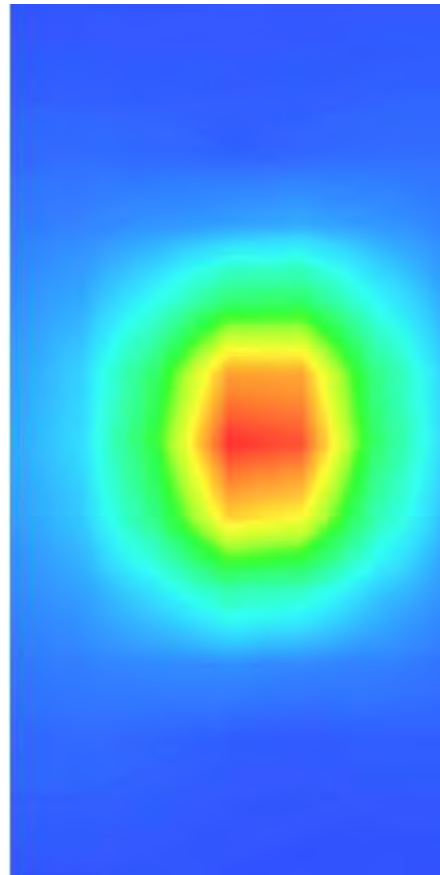

MEASUREMENT 6

Date of measurement: 9/8/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2600</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2600.000000
Relative permittivity (real part)	39.314096
Relative permittivity (imaginary part)	13.587865
Conductivity (S/m)	1.962692
Variation (%)	-0.040000

SURFACE SAR

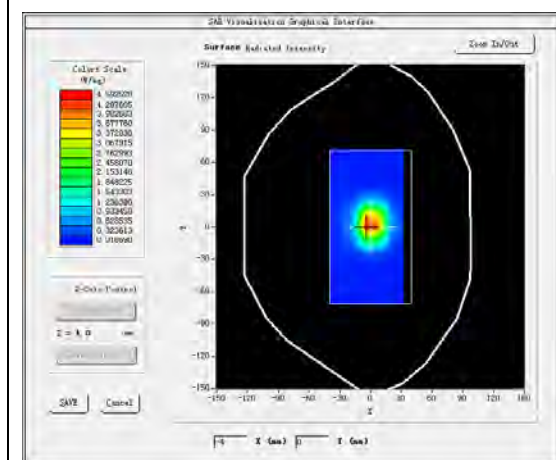


VOLUME SAR

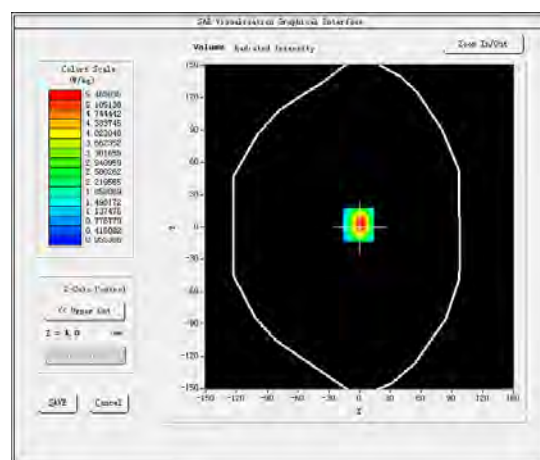


Maximum location: X=-1.00, Y=2.00

SAR Peak: 9.07 W/kg


SAR 10g (W/Kg)	2.428205
SAR 1g (W/Kg)	5.526267

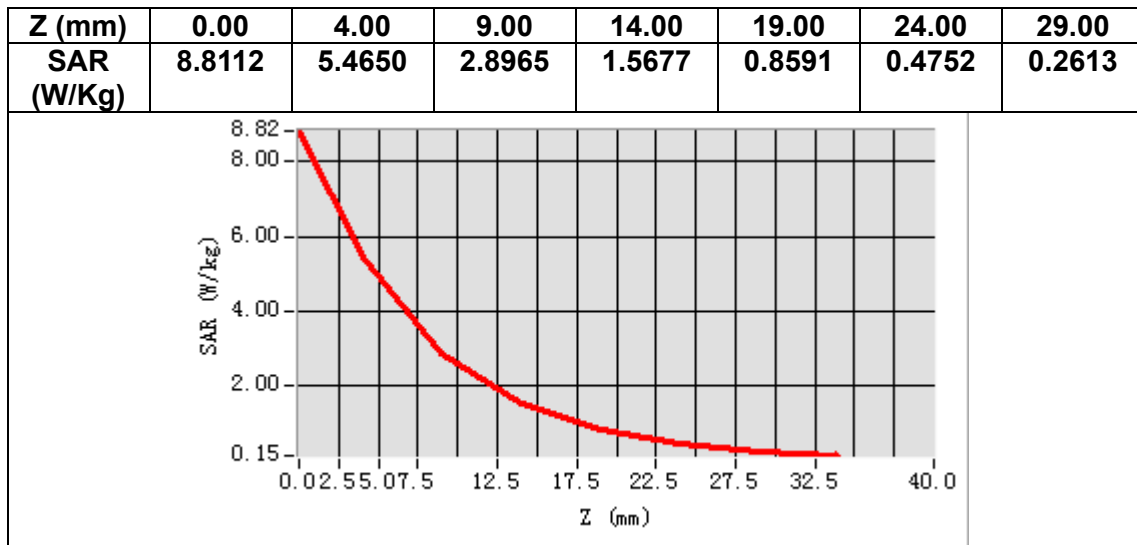

3D screen shot

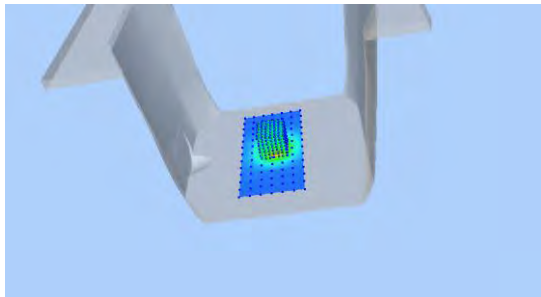

Hot spot position

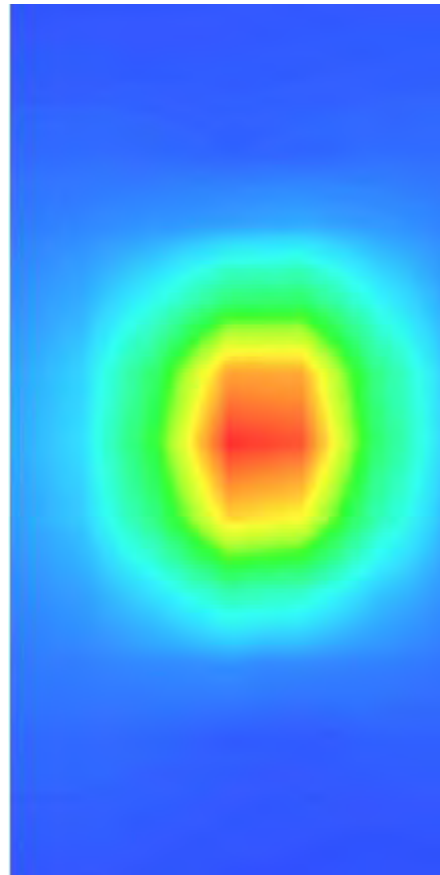

MEASUREMENT 7


Date of measurement: 8/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5200</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	5200.000000
Relative permittivity (real part)	37.149364
Relative permittivity (imaginary part)	16.380868
Conductivity (S/m)	4.732251
Variation (%)	1.660000

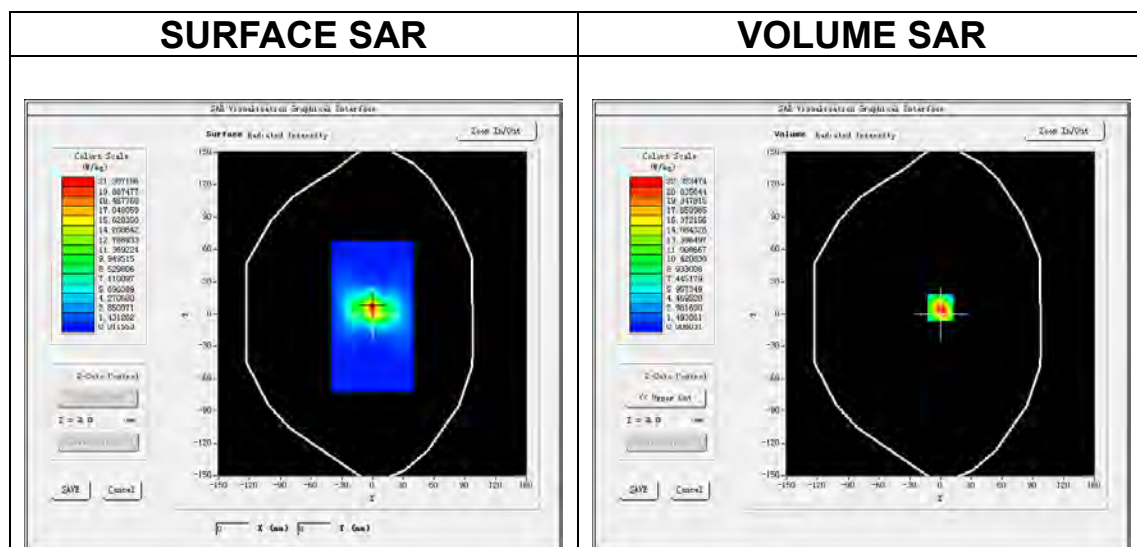


Maximum location: X=0.00, Y=6.00


SAR Peak: 40.06 W/kg

SAR 10g (W/Kg)	5.631495
SAR 1g (W/Kg)	16.789221


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0
SAR (W/ Kg)	37.8 356	22.3 278	11.3 730	5.66 18	2.82 55	1.40 93	0.71 24	0.36 60	0.18 08	0.10 12	0.05 13	0.03 23

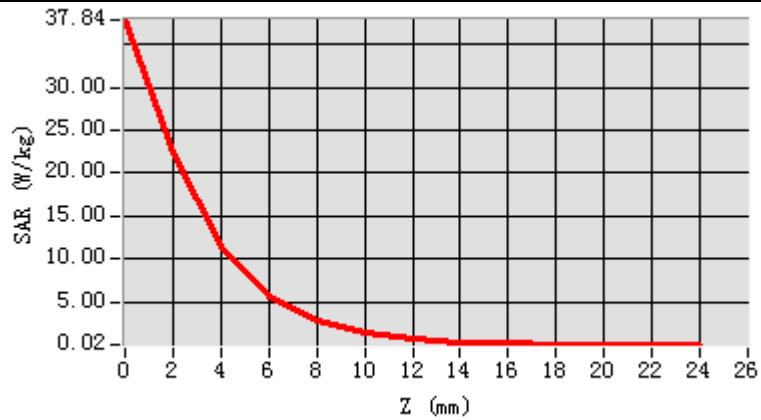

3D screen shot

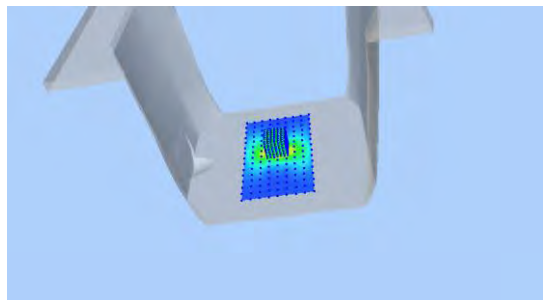

Hot spot position

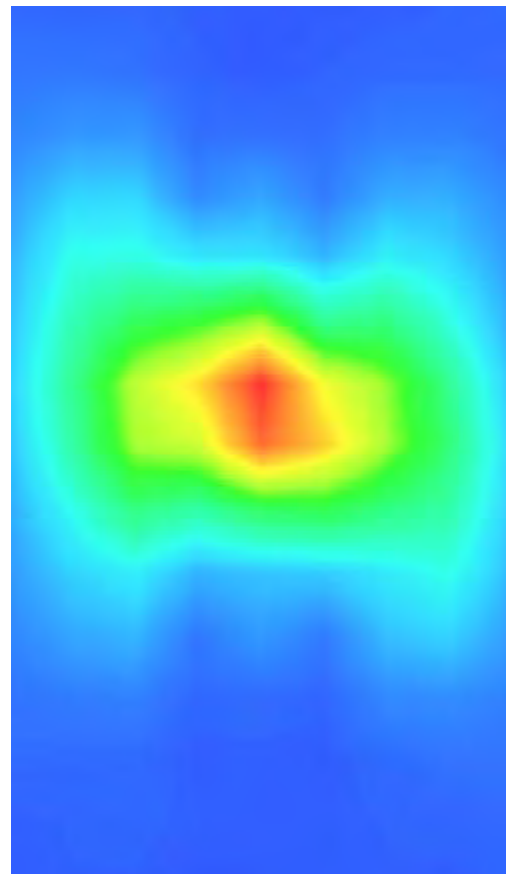

MEASUREMENT 8

Date of measurement: 11/8/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5600</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5600.000000
Relative permittivity (real part)	36.165790
Relative permittivity (imaginary part)	16.472167
Conductivity (S/m)	5.124674
Variation (%)	-3.120000

SURFACE SAR

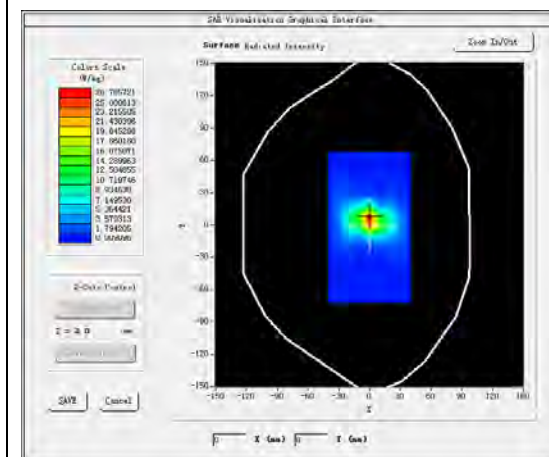

VOLUME SAR

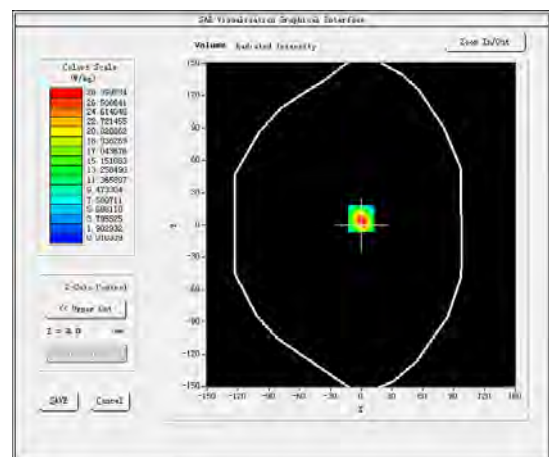


Maximum location: X=0.00, Y=6.00


SAR Peak: 50.97 W/kg

SAR 10g (W/Kg)	5.964019
SAR 1g (W/Kg)	18.996075


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0
SAR (W/ Kg)	48.0 319	28.3 990	14.4 532	7.29 35	3.64 97	1.82 04	0.92 45	0.46 66	0.24 96	0.13 43	0.07 29	0.04 94

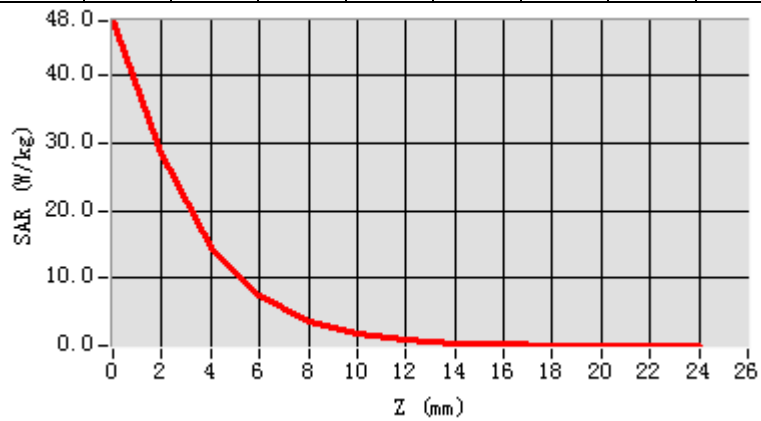

3D screen shot

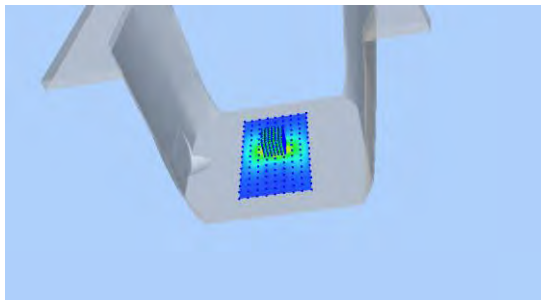

Hot spot position

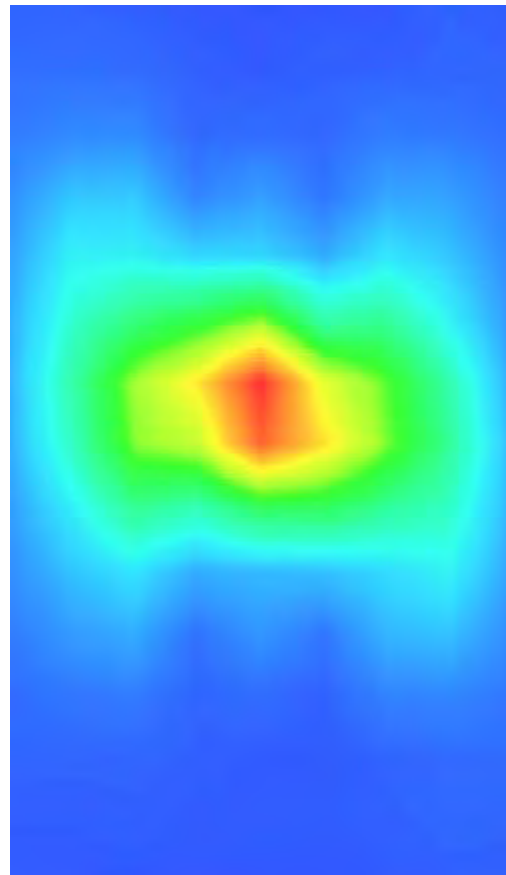

MEASUREMENT 9

Date of measurement: 5/8/2021


A. Experimental conditions.

Area Scan	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW5800</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5800.000000
Relative permittivity (real part)	36.013115
Relative permittivity (imaginary part)	16.347563
Conductivity (S/m)	5.267548
Variation (%)	1.880000

SURFACE SAR

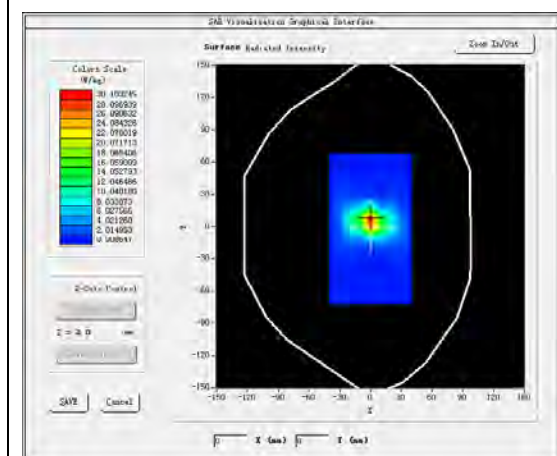

VOLUME SAR

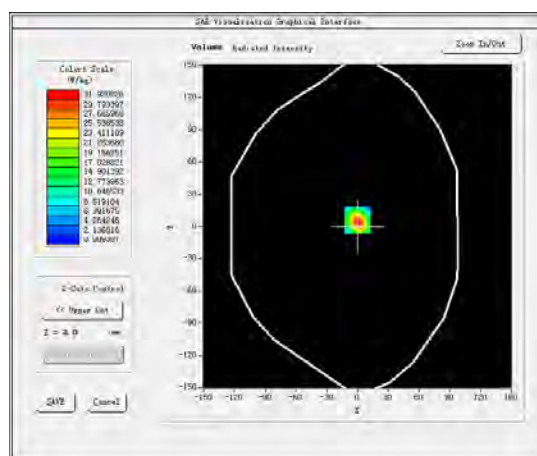


Maximum location: X=0.00, Y=6.00


SAR Peak: 57.37 W/kg

SAR 10g (W/Kg)	6.037095
SAR 1g (W/Kg)	18.637093


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0
SAR (W/ Kg)	54.0 337	31.9 251	16.1 709	8.17 95	4.08 15	2.05 72	1.03 29	0.51 77	0.27 63	0.15 42	0.07 82	0.04 46

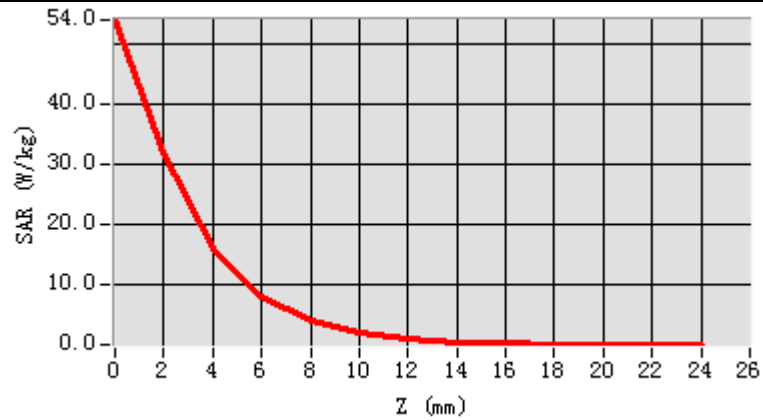

3D screen shot

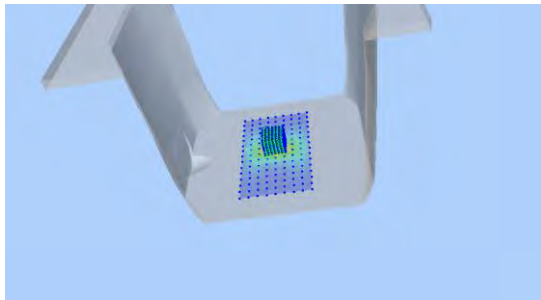

Hot spot position

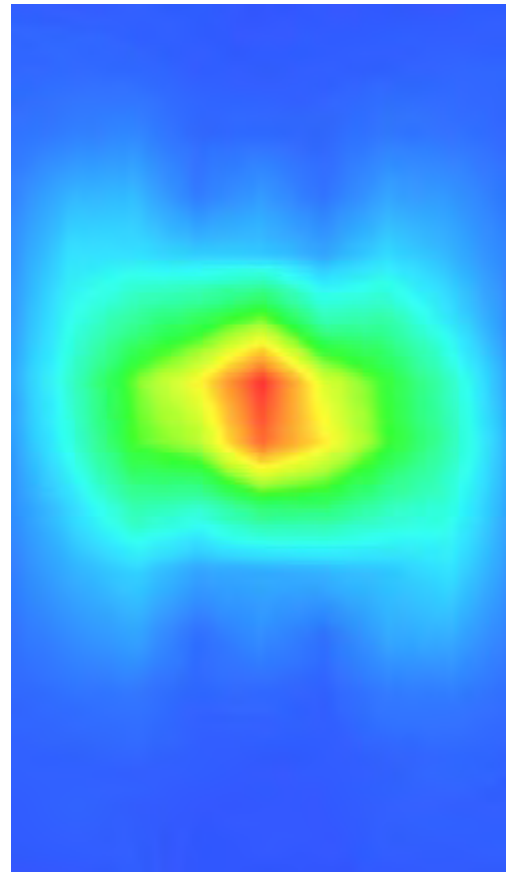

13. Appendix C. Plots of High SAR Measurement

Table of contents
MEASUREMENT 1 GSM 850 Head
MEASUREMENT 2 GSM 850 Body
MEASUREMENT 3 GSM 1900 Head
MEASUREMENT 4 GSM 1900 Body
MEASUREMENT 5 WCDMA Band 2 Head
MEASUREMENT 6 WCDMA Band 2 Body
MEASUREMENT 7 WCDMA Band 4 Head
MEASUREMENT 8 WCDMA Band 4 Body
MEASUREMENT 9 WCDMA Band 5 Head
MEASUREMENT 10 WCDMA Band 5 Body
MEASUREMENT 11 WLAN 5.2G Head
MEASUREMENT 12 WLAN 5.2G Body
MEASUREMENT 13 WLAN 5.3G Head
MEASUREMENT 14 WLAN 5.3G Body
MEASUREMENT 15 WLAN 5.6G Head
MEASUREMENT 16 WLAN 5.6G Body
MEASUREMENT 17 WLAN 5.8G Head
MEASUREMENT 18 WLAN 5.8G Body
MEASUREMENT 19 WLAN 2.4G Head
MEASUREMENT 20 WLAN 2.4G Body
MEASUREMENT 21 LTE Band 2 Head
MEASUREMENT 22 LTE Band 2 Body
MEASUREMENT 23 LTE Band 4 Head
MEASUREMENT 24 LTE Band 4 Body
MEASUREMENT 25 LTE Band 5 Head
MEASUREMENT 26 LTE Band 5 Body
MEASUREMENT 27 LTE Band 7 Head
MEASUREMENT 28 LTE Band 7 Body
MEASUREMENT 29 LTE Band 12 Head
MEASUREMENT 30 LTE Band 12 Body
MEASUREMENT 31 LTE Band 17 Head
MEASUREMENT 32 LTE Band 17 Body
MEASUREMENT 33 LTE Band 25 Head
MEASUREMENT 34 LTE Band 25 Body
MEASUREMENT 35 LTE Band 26A Head
MEASUREMENT 36 LTE Band 26A Body
MEASUREMENT 37 LTE Band 26B Head

MEASUREMENT 38 LTE Band 26B Body

MEASUREMENT 1

Date of measurement: 28/7/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	42.517952
Relative permittivity (imaginary part)	20.202703
Conductivity (S/m)	0.938752
Variation (%)	0.370000

SURFACE SAR

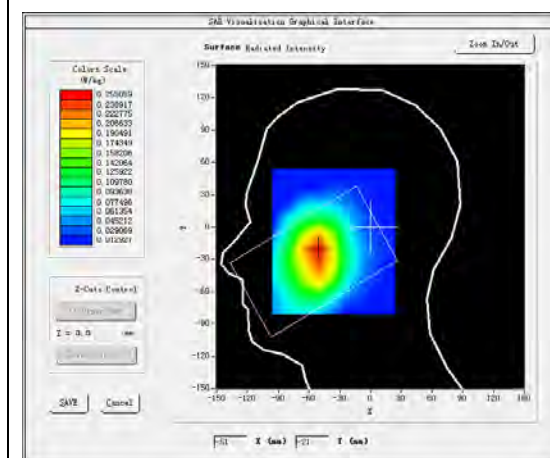


VOLUME SAR

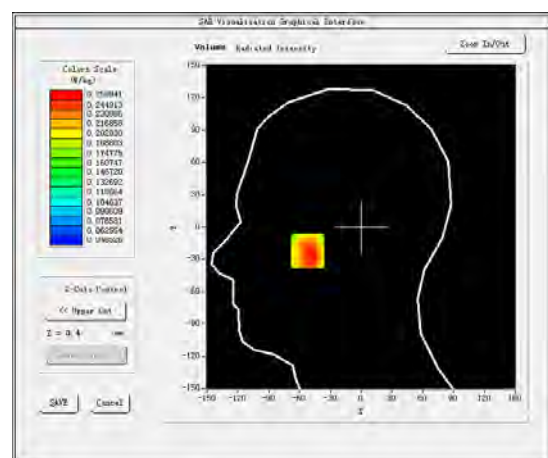


Maximum location: X=-52.00, Y=-22.00

SAR Peak: 0.31 W/kg


SAR 10g (W/Kg)	0.196364
SAR 1g (W/Kg)	0.254539

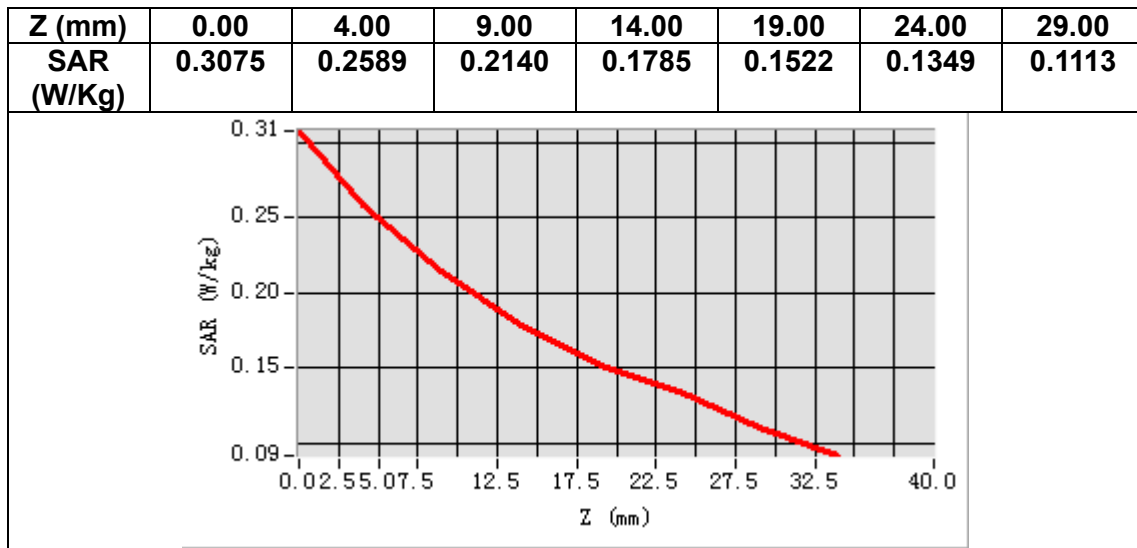

3D screen shot

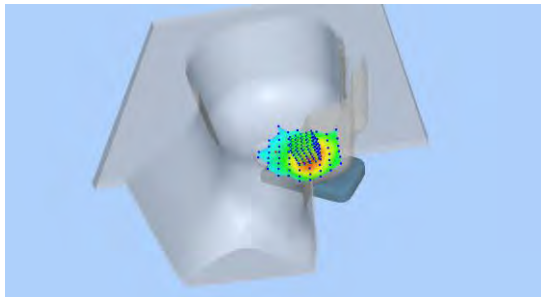

Hot spot position

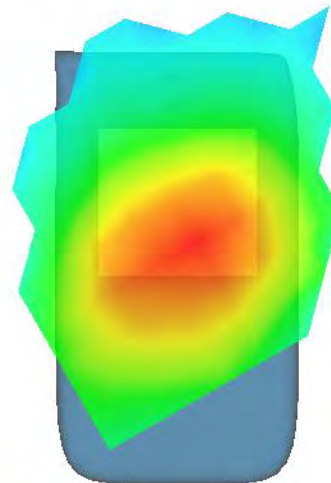

MEASUREMENT 2

Date of measurement: 28/7/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	42.517952
Relative permittivity (imaginary part)	20.202703
Conductivity (S/m)	0.938752
Variation (%)	-2.870000

SURFACE SAR

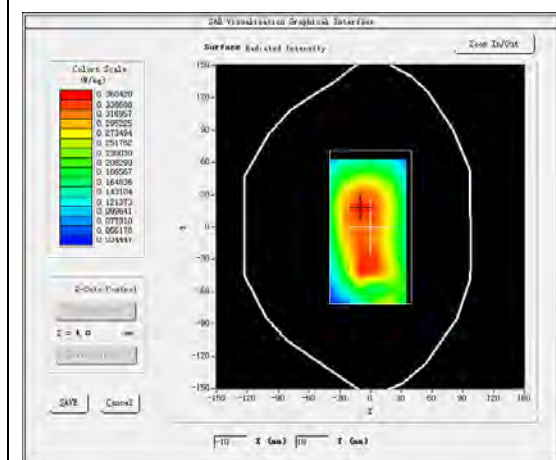


VOLUME SAR

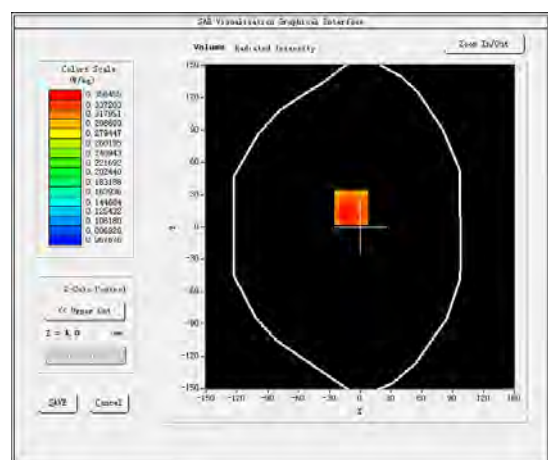


Maximum location: X=-9.00, Y=18.00

SAR Peak: 0.46 W/kg


SAR 10g (W/Kg)	0.267905
SAR 1g (W/Kg)	0.358401

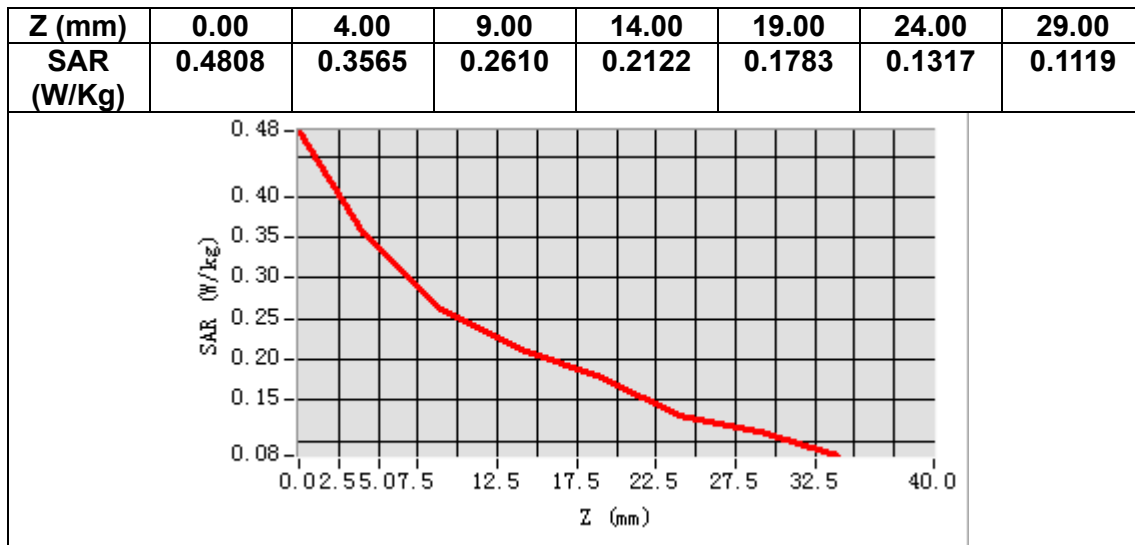

3D screen shot

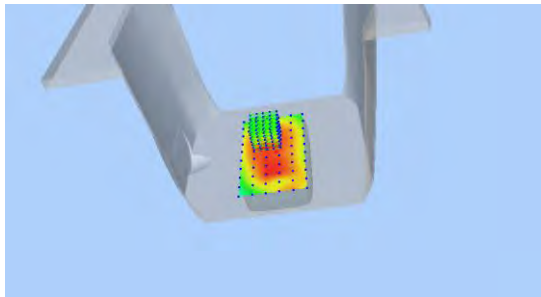

Hot spot position

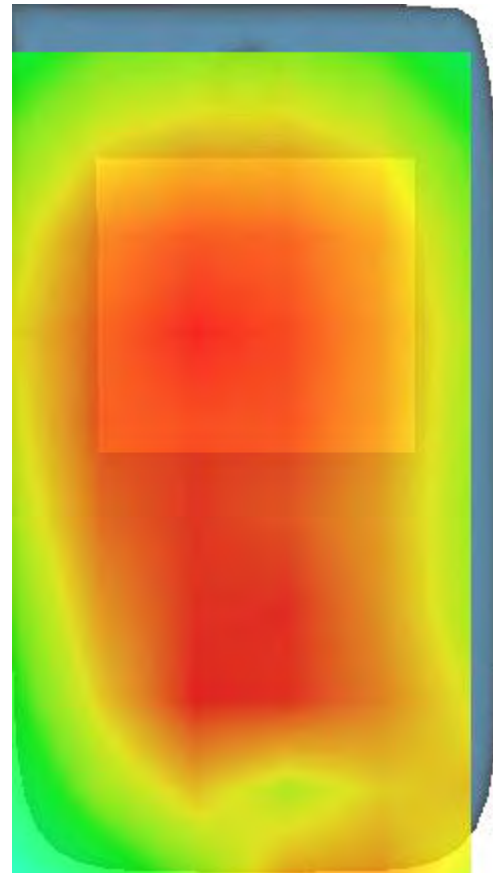

MEASUREMENT 3

Date of measurement: 12/8/2021


A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>GSM1900</u>
Channels	<u>Middle</u>
Signal	<u>TDMA (Crest factor: 2.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	39.041246
Relative permittivity (imaginary part)	13.676401
Conductivity (S/m)	1.428424
Variation (%)	-0.970000

SURFACE SAR

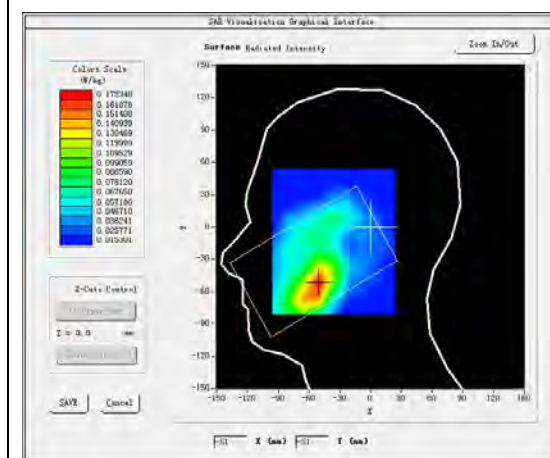


VOLUME SAR

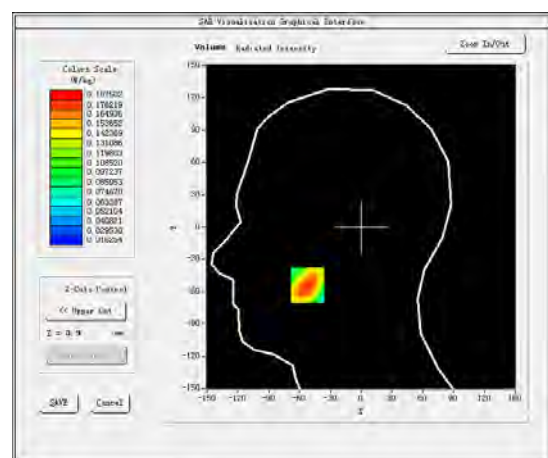


Maximum location: X=-52.00, Y=-54.00

SAR Peak: 0.26 W/kg


SAR 10g (W/Kg)	0.111675
SAR 1g (W/Kg)	0.177392

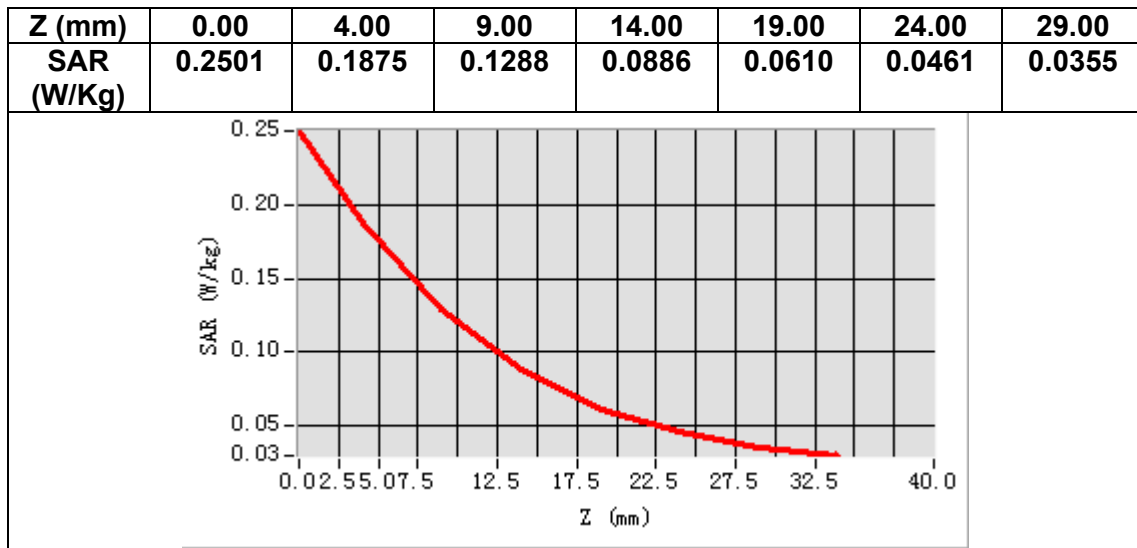

3D screen shot

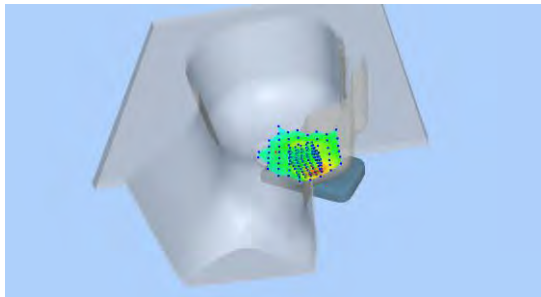

Hot spot position

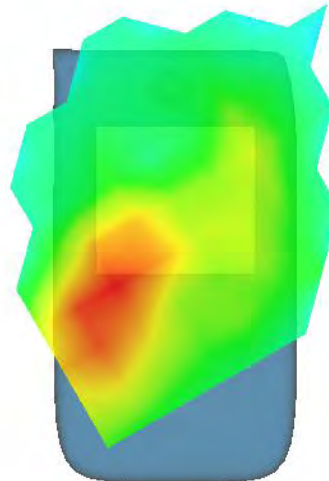

MEASUREMENT 4

Date of measurement: 12/8/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	39.041246
Relative permittivity (imaginary part)	13.676401
Conductivity (S/m)	1.428424
Variation (%)	1.170000

SURFACE SAR

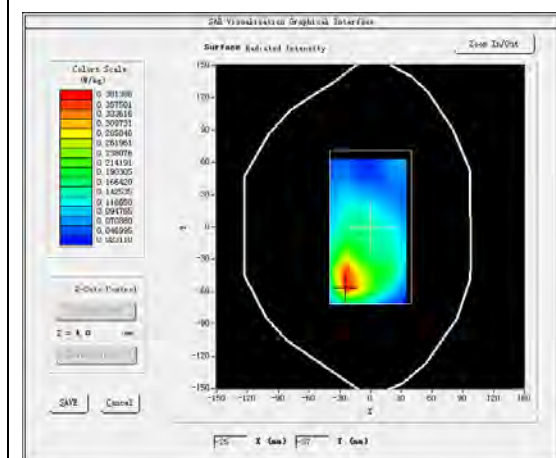


VOLUME SAR

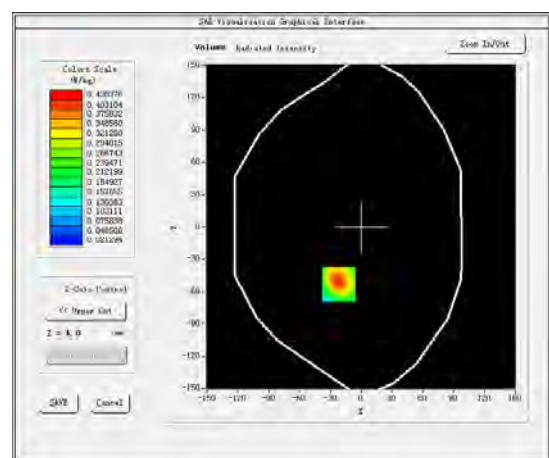


Maximum location: X=-22.00, Y=-53.00

SAR Peak: 0.65 W/kg


SAR 10g (W/Kg)	0.228112
SAR 1g (W/Kg)	0.409619

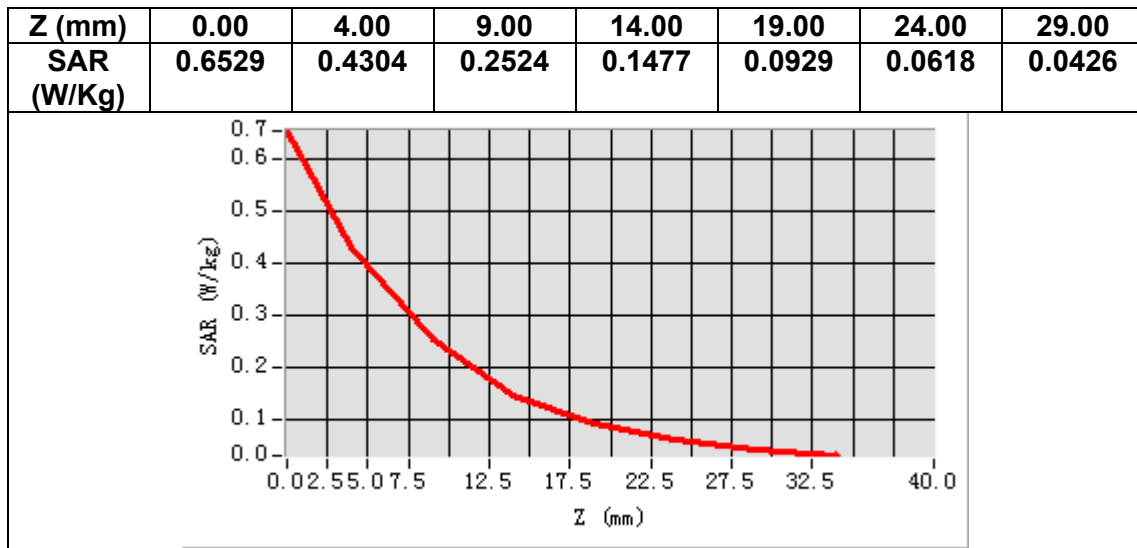

3D screen shot

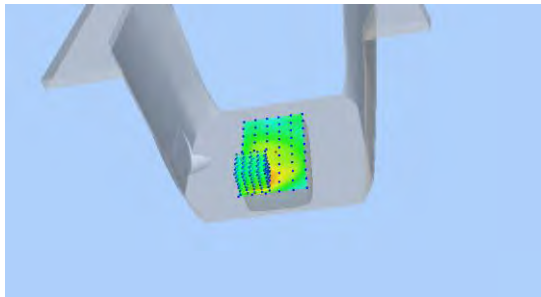

Hot spot position

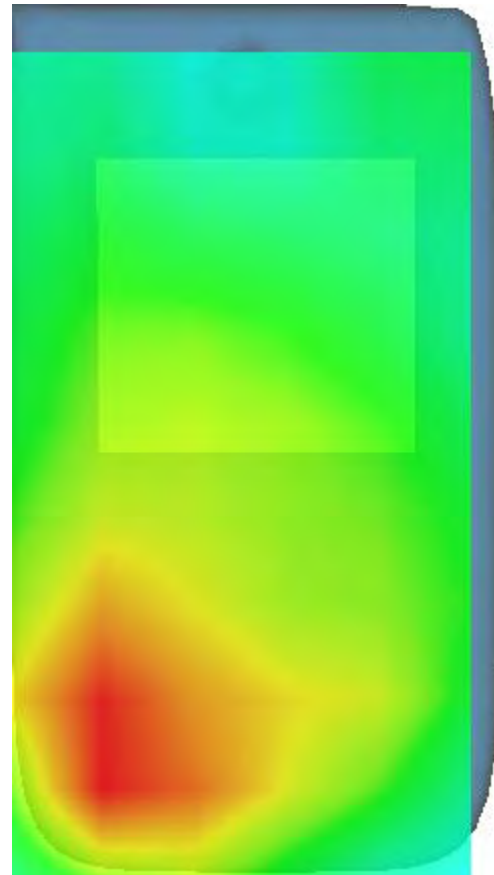

MEASUREMENT 5

Date of measurement: 12/8/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band2 WCDMA1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	39.041246
Relative permittivity (imaginary part)	13.676401
Conductivity (S/m)	1.428424
Variation (%)	0.030000

SURFACE SAR

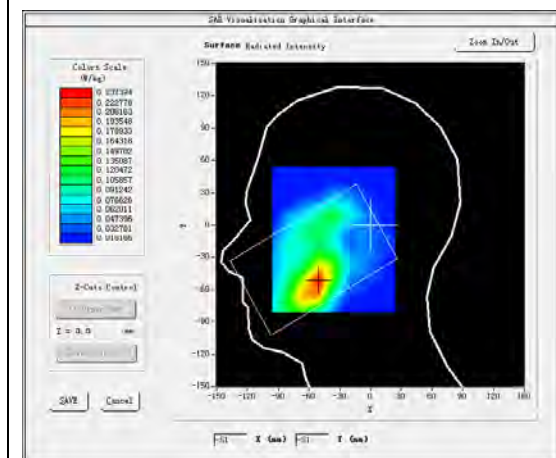


VOLUME SAR

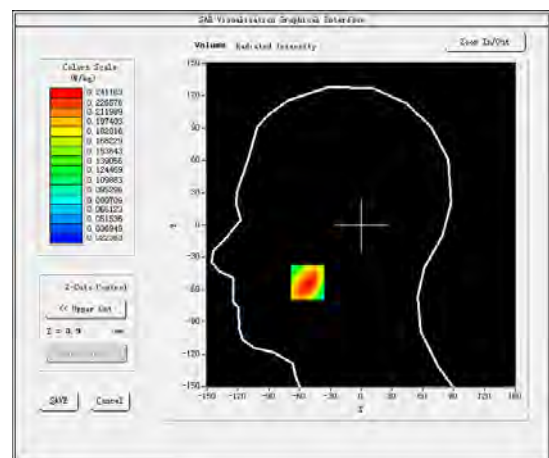


Maximum location: X=-52.00, Y=-53.00

SAR Peak: 0.35 W/kg


SAR 10g (W/Kg)	0.146052
SAR 1g (W/Kg)	0.235358

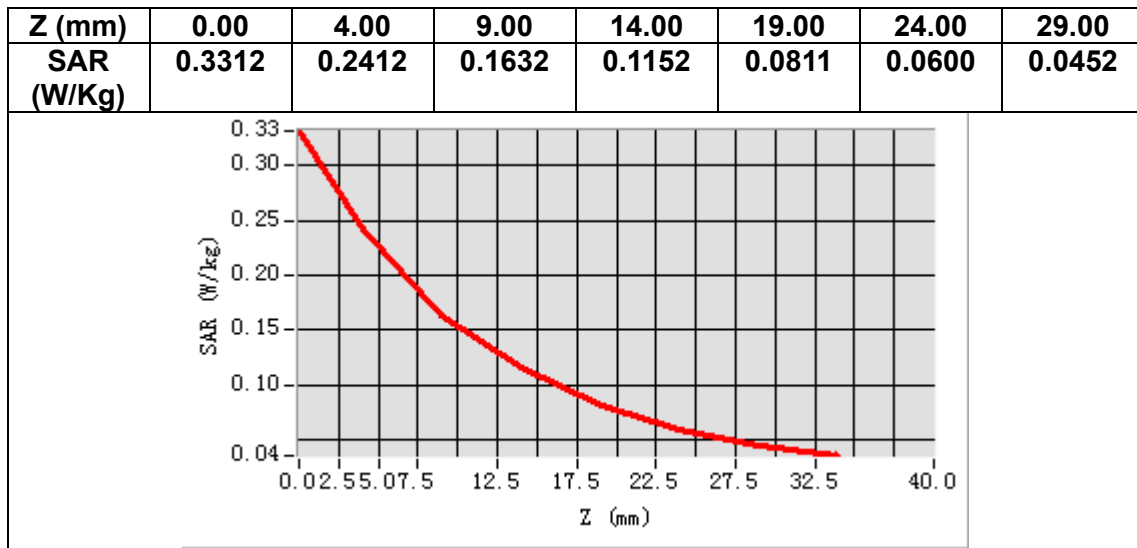

3D screen shot

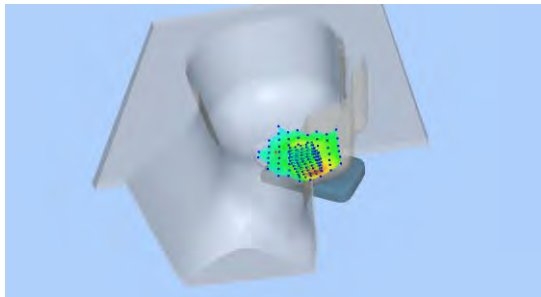

Hot spot position

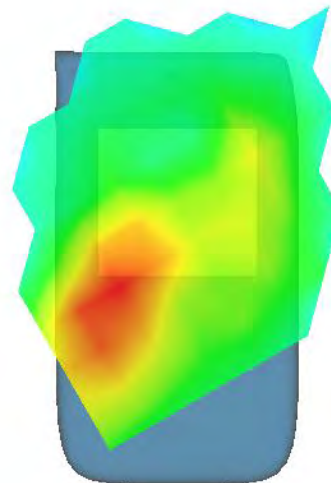

MEASUREMENT 6

Date of measurement: 12/8/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band2 WCDMA1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	39.041246
Relative permittivity (imaginary part)	13.676401
Conductivity (S/m)	1.428424
Variation (%)	-4.910000

SURFACE SAR

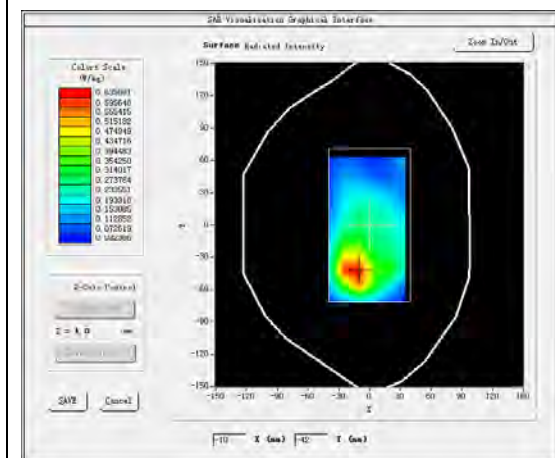


VOLUME SAR

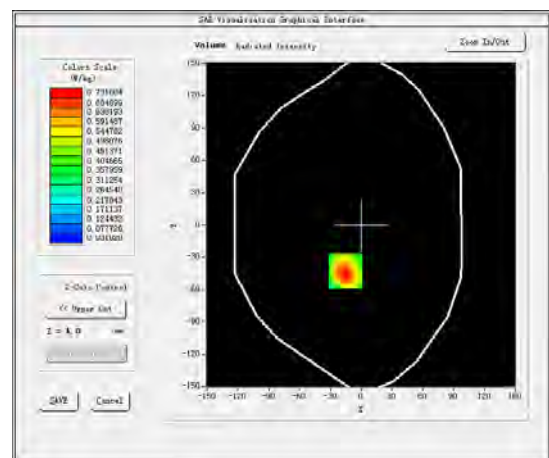


Maximum location: X=-15.00, Y=-43.00

SAR Peak: 1.19 W/kg


SAR 10g (W/Kg)	0.388557
SAR 1g (W/Kg)	0.722917

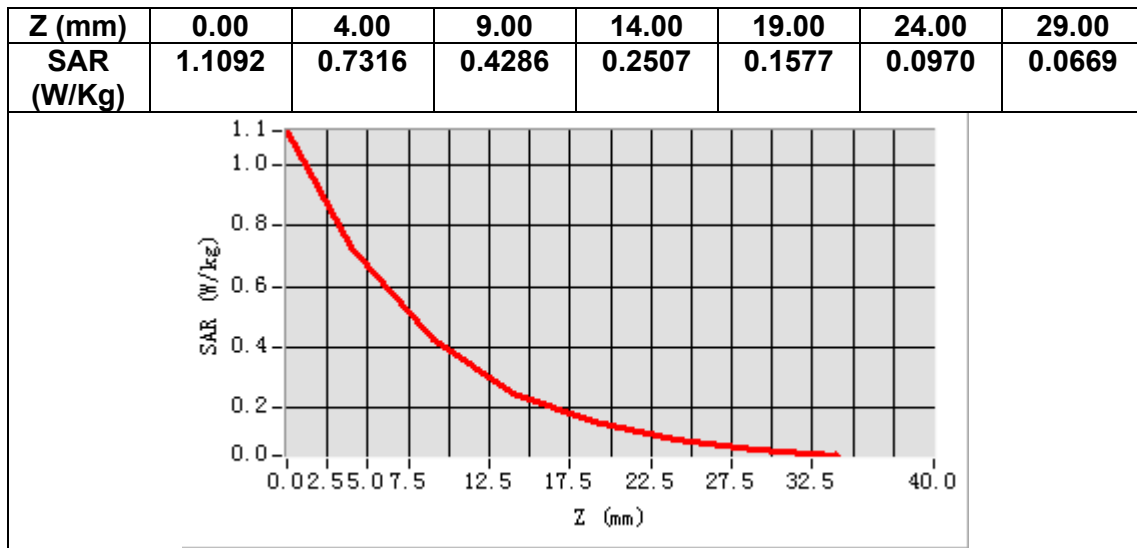

3D screen shot

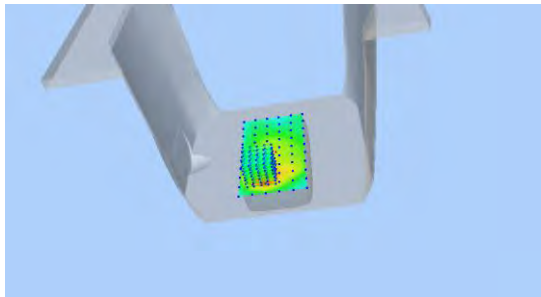

Hot spot position

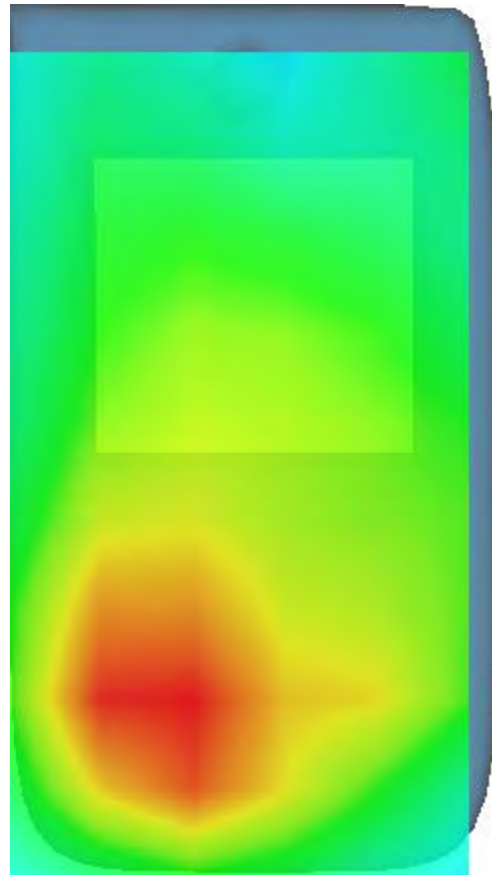

MEASUREMENT 7

Date of measurement: 29/7/2021


A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>Band4 WCDMA1700</u>
Channels	<u>Middle</u>
Signal	<u>WCDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1732.600000
Relative permittivity (real part)	40.423007
Relative permittivity (imaginary part)	13.718947
Conductivity (S/m)	1.320525
Variation (%)	0.040000

SURFACE SAR

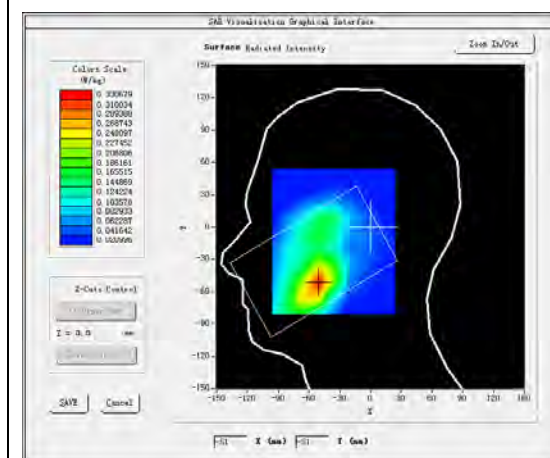


VOLUME SAR

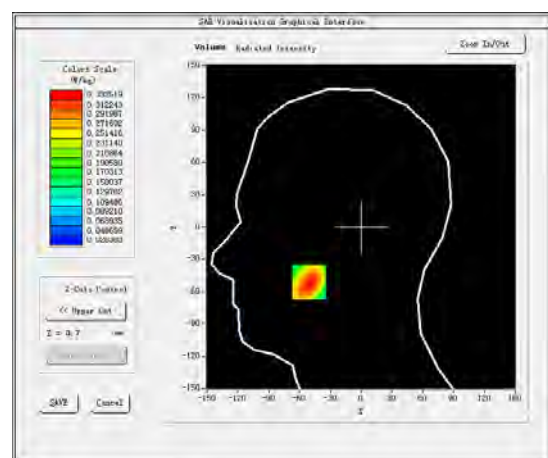


Maximum location: X=-51.00, Y=-51.00

SAR Peak: 0.47 W/kg


SAR 10g (W/Kg)	0.206048
SAR 1g (W/Kg)	0.322240

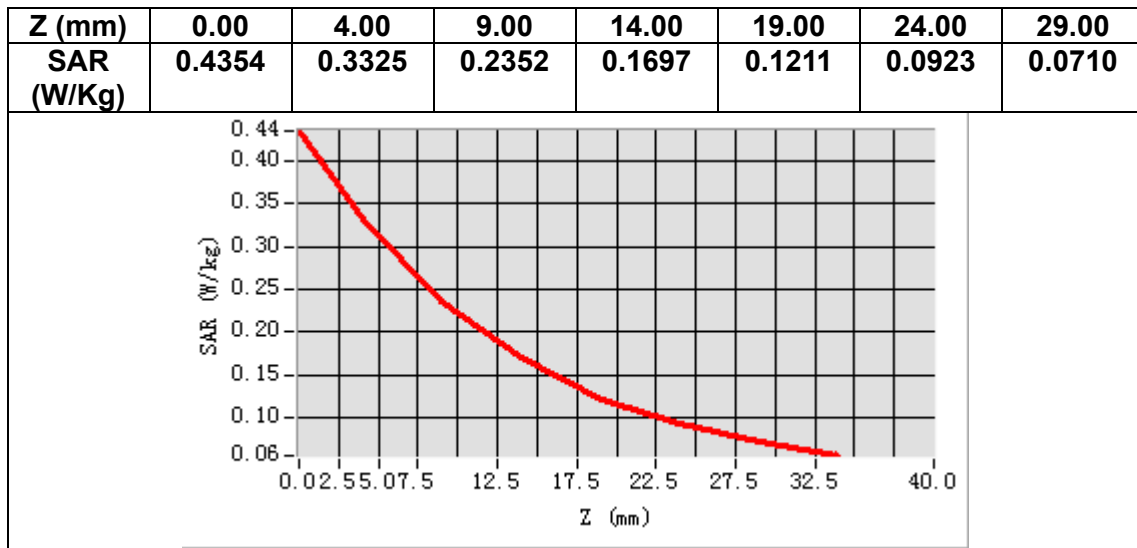

3D screen shot

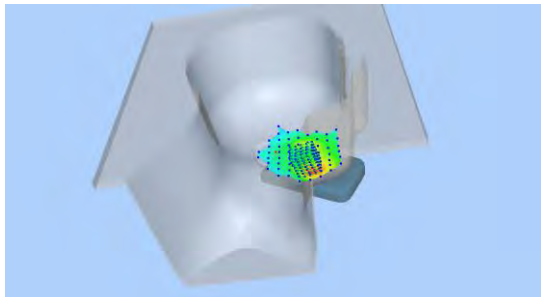

Hot spot position

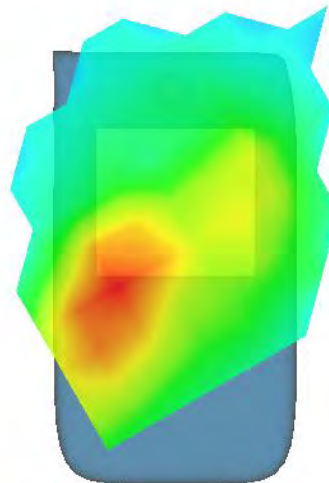

MEASUREMENT 8

Date of measurement: 29/7/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band4 WCDMA1700</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1732.600000
Relative permittivity (real part)	40.423007
Relative permittivity (imaginary part)	13.718947
Conductivity (S/m)	1.320525
Variation (%)	-0.900000

SURFACE SAR

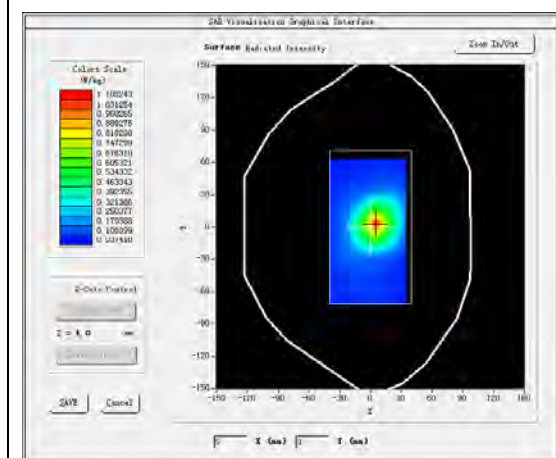


VOLUME SAR

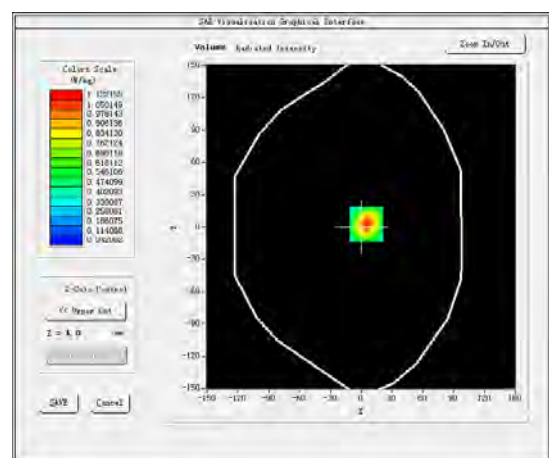


Maximum location: X=5.00, Y=3.00

SAR Peak: 1.70 W/kg


SAR 10g (W/Kg)	0.560150
SAR 1g (W/Kg)	1.045674

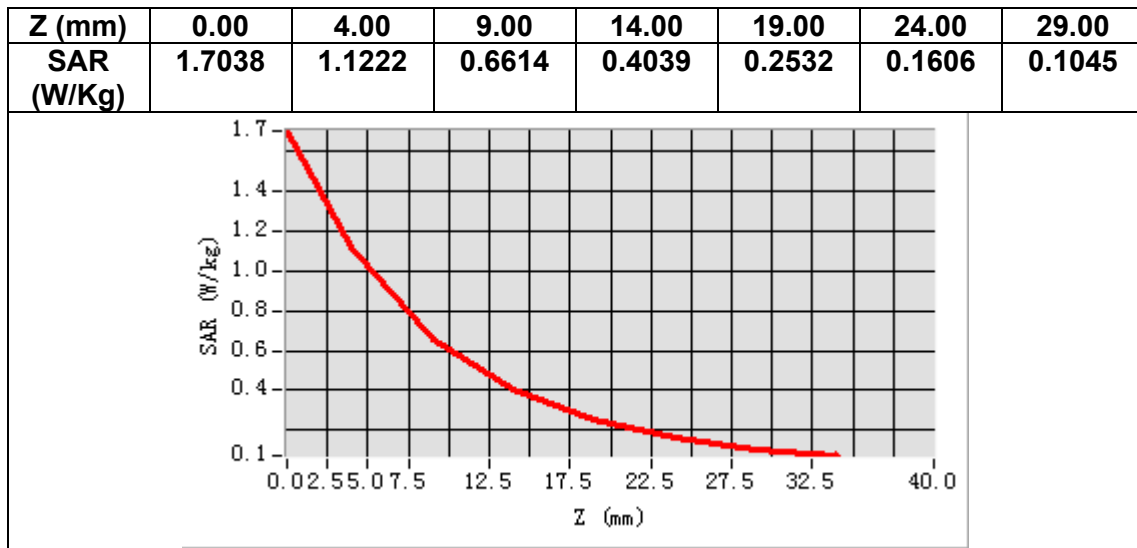

3D screen shot

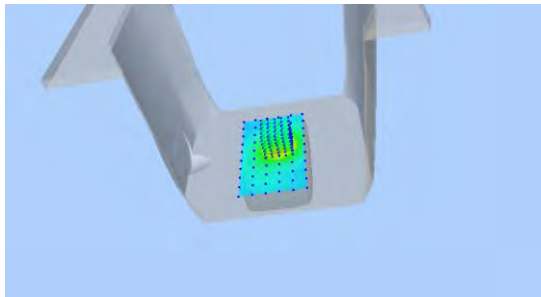

Hot spot position

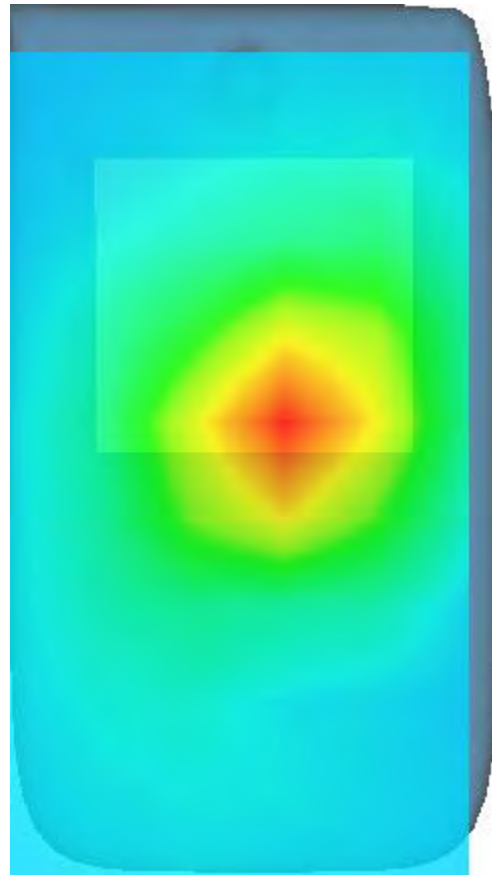

MEASUREMENT 9

Date of measurement: 28/7/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band5 WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	42.517952
Relative permittivity (imaginary part)	20.202703
Conductivity (S/m)	0.938752
Variation (%)	1.090000

SURFACE SAR

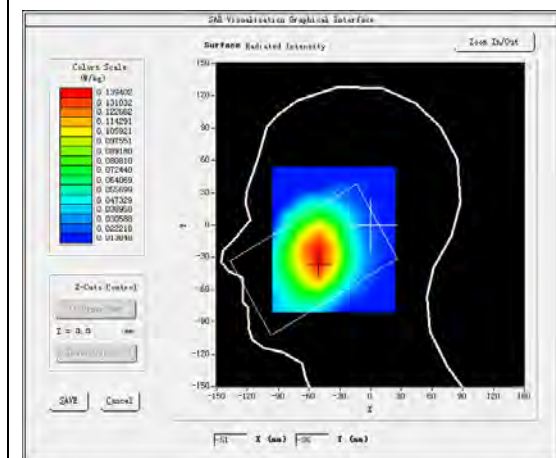


VOLUME SAR

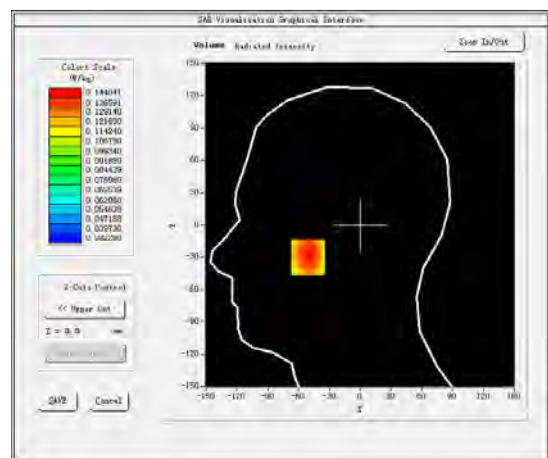


Maximum location: X=-51.00, Y=-30.00

SAR Peak: 0.17 W/kg


SAR 10g (W/Kg)	0.115395
SAR 1g (W/Kg)	0.143376

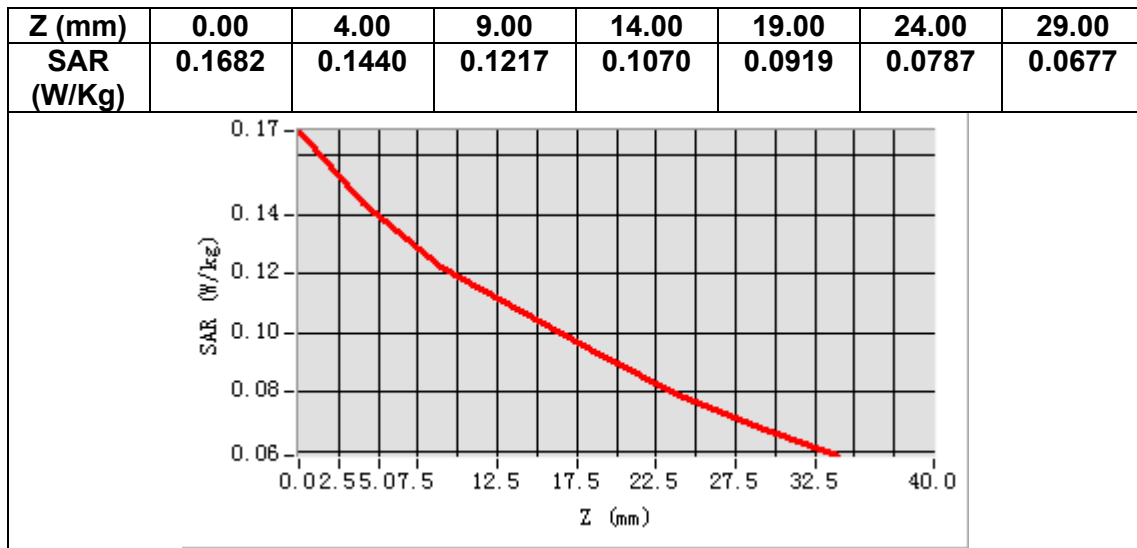

3D screen shot

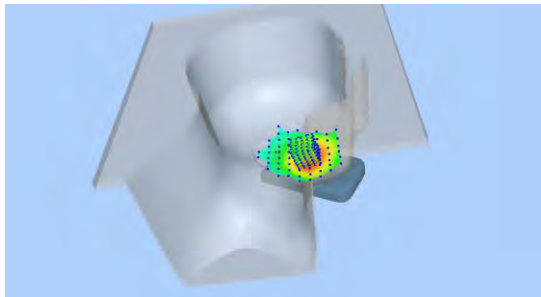

Hot spot position

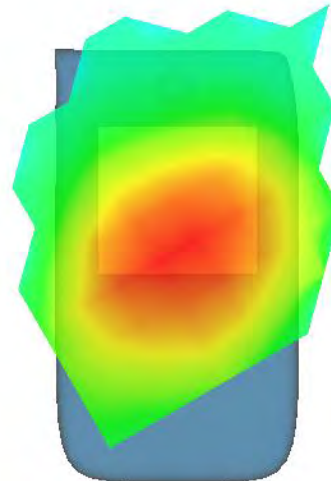

MEASUREMENT 10

Date of measurement: 28/7/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band5 WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	42.517952
Relative permittivity (imaginary part)	20.202703
Conductivity (S/m)	0.938752
Variation (%)	0.340000

SURFACE SAR

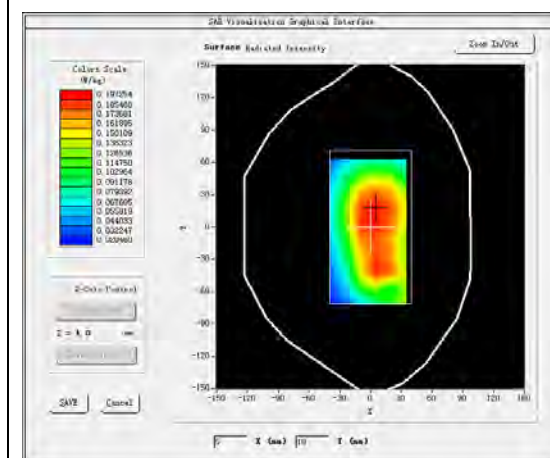


VOLUME SAR

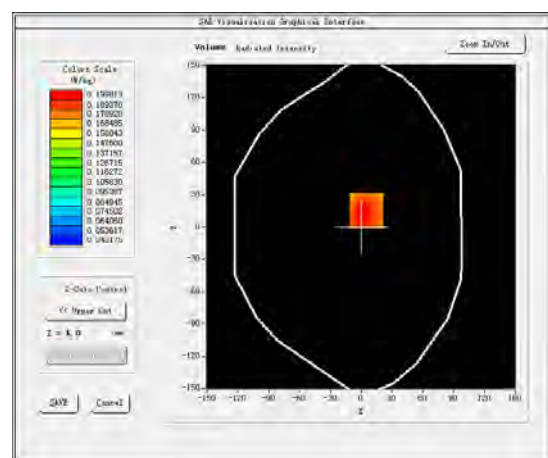


Maximum location: X=5.00, Y=15.00

SAR Peak: 0.24 W/kg


SAR 10g (W/Kg)	0.154704
SAR 1g (W/Kg)	0.200816

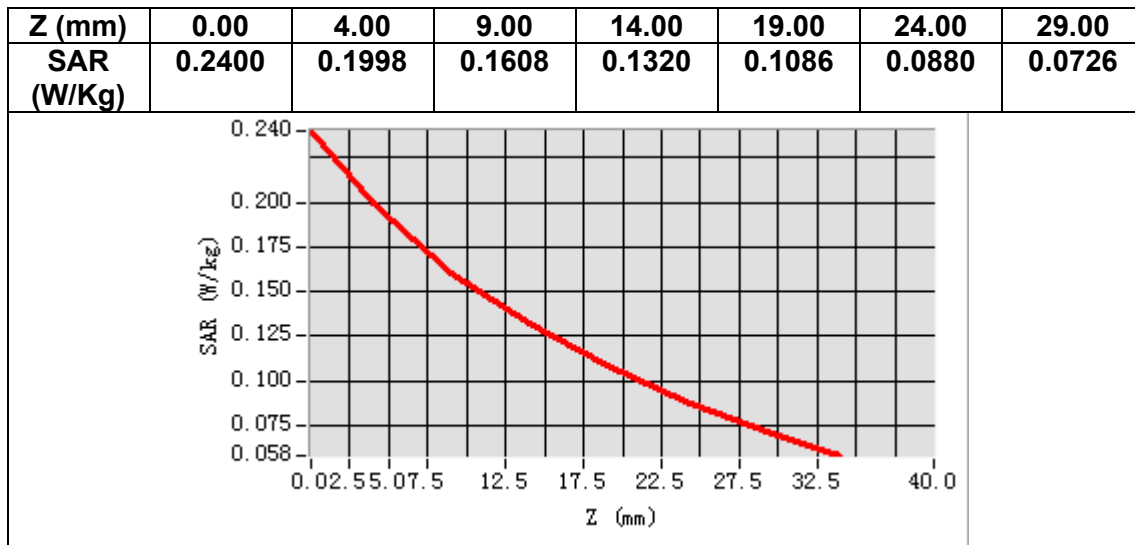

3D screen shot

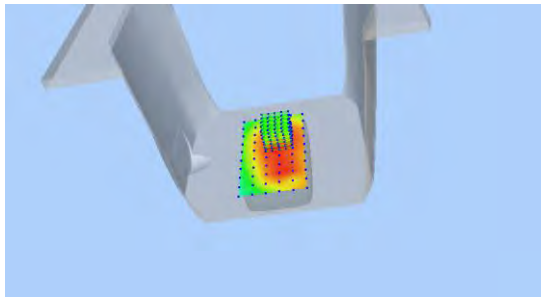

Hot spot position

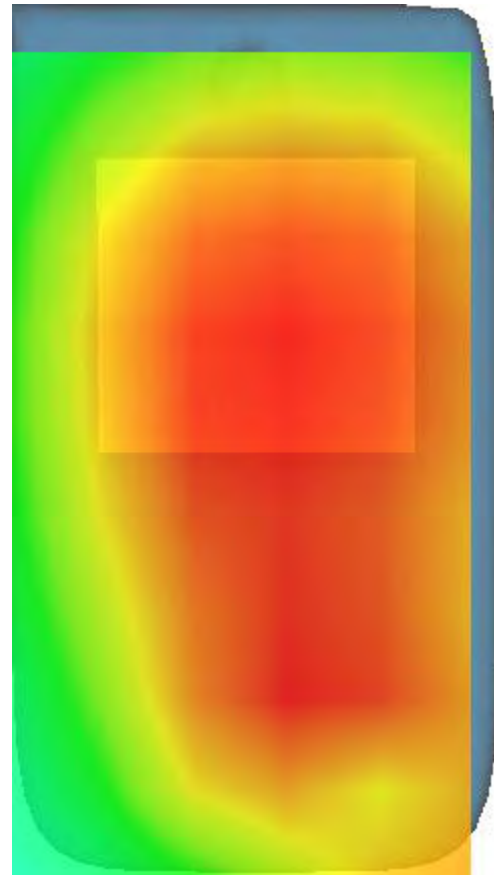

MEASUREMENT 11

Date of measurement: 8/8/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5200.000000
Relative permittivity (real part)	37.149364
Relative permittivity (imaginary part)	16.380868
Conductivity (S/m)	4.732251
Variation (%)	-0.790000

SURFACE SAR

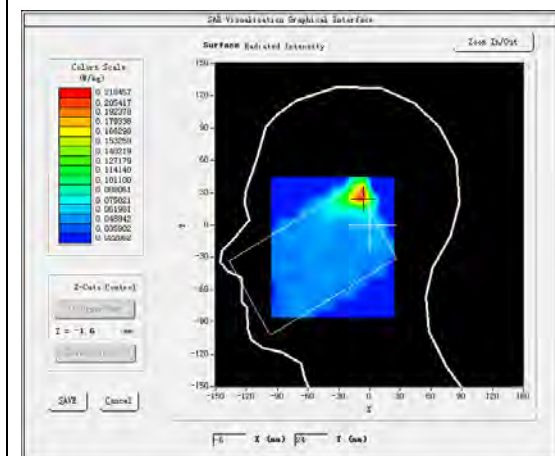

VOLUME SAR

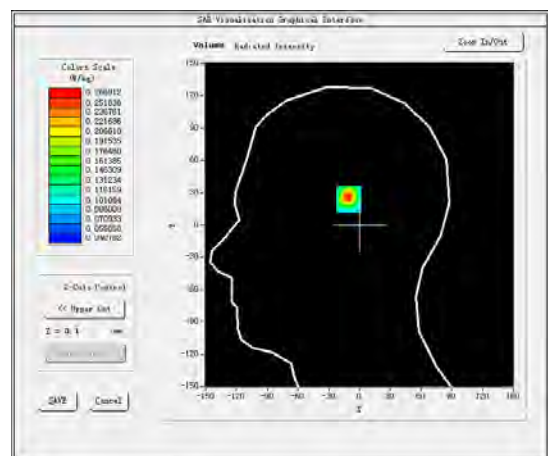


Maximum location: X=-8.00, Y=26.00


SAR Peak: 0.62 W/kg

SAR 10g (W/Kg)	0.111788
SAR 1g (W/Kg)	0.253572


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
SAR (W/ Kg)	0.40 92	0.26 69	0.16 51	0.10 90	0.08 21	0.07 06	0.05 75	0.05 34	0.05 14	0.04 66	0.05 34	0.04 44

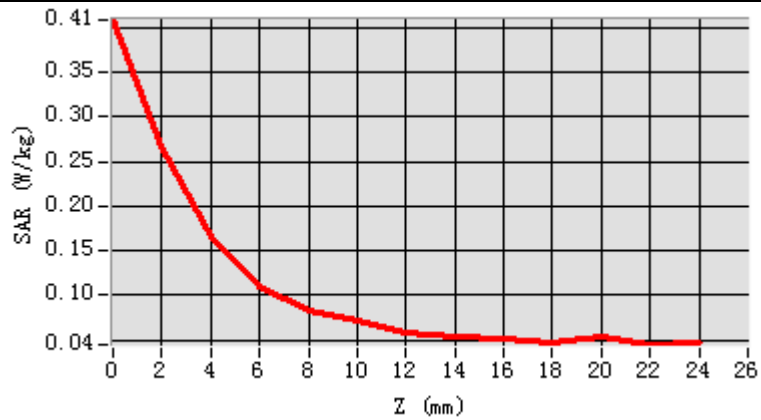

3D screen shot

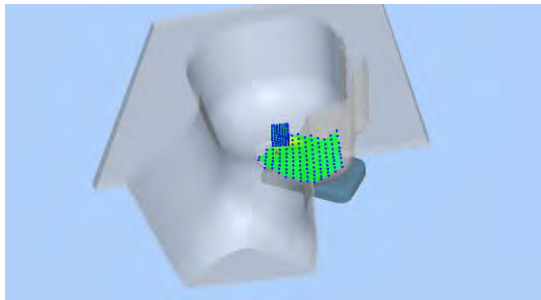

Hot spot position

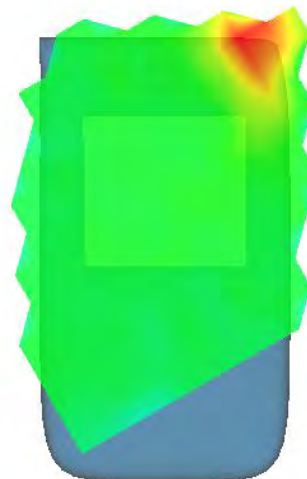

MEASUREMENT 12


Date of measurement: 8/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	5200.000000
Relative permittivity (real part)	37.149364
Relative permittivity (imaginary part)	16.380868
Conductivity (S/m)	4.732251
Variation (%)	-2.130000

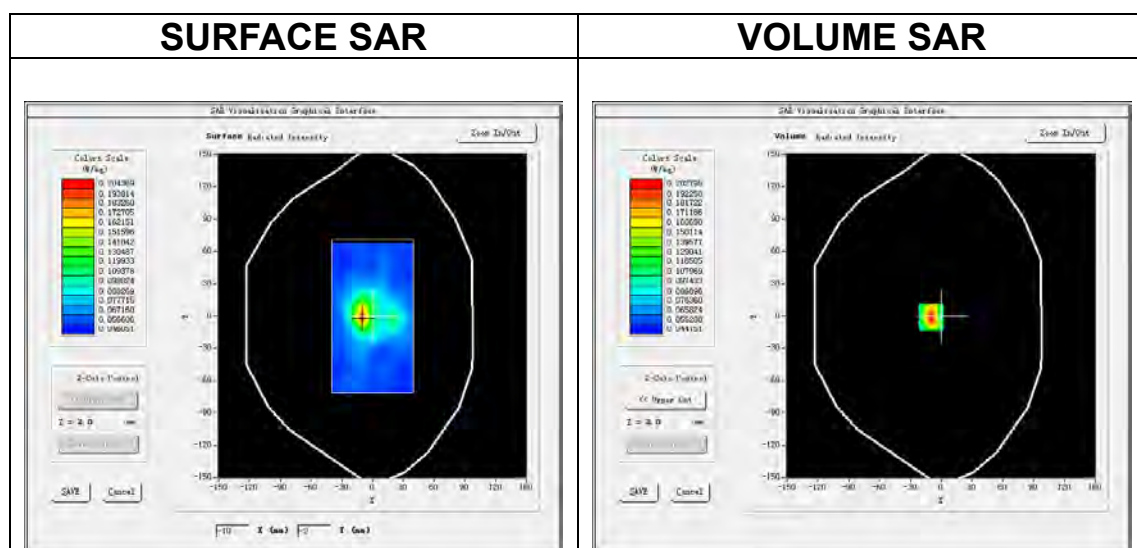


Maximum location: X=-10.00, Y=-1.00


SAR Peak: 0.32 W/kg

SAR 10g (W/Kg)	0.081856
SAR 1g (W/Kg)	0.137502


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
SAR (W/ Kg)	0.30 71	0.20 28	0.13 51	0.09 36	0.07 44	0.06 41	0.05 95	0.05 59	0.05 73	0.04 70	0.04 99	0.05 15

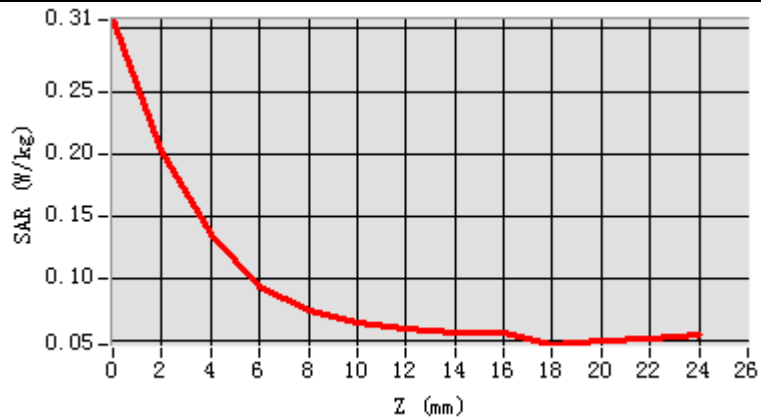

3D screen shot

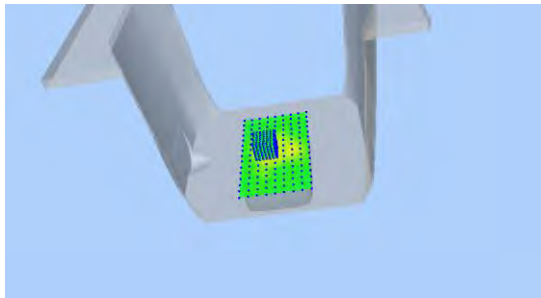

Hot spot position

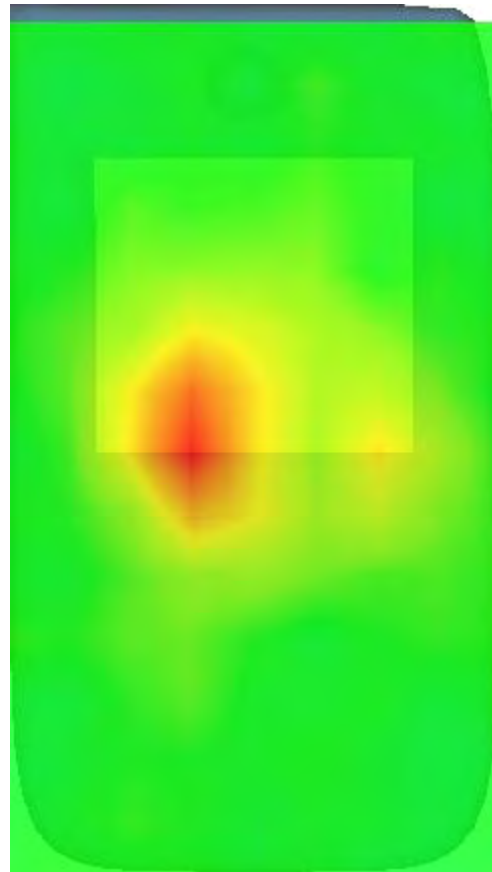

MEASUREMENT 13


Date of measurement: 8/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	5280.000000
Relative permittivity (real part)	37.040169
Relative permittivity (imaginary part)	16.466027
Conductivity (S/m)	4.830035
Variation (%)	0.040000

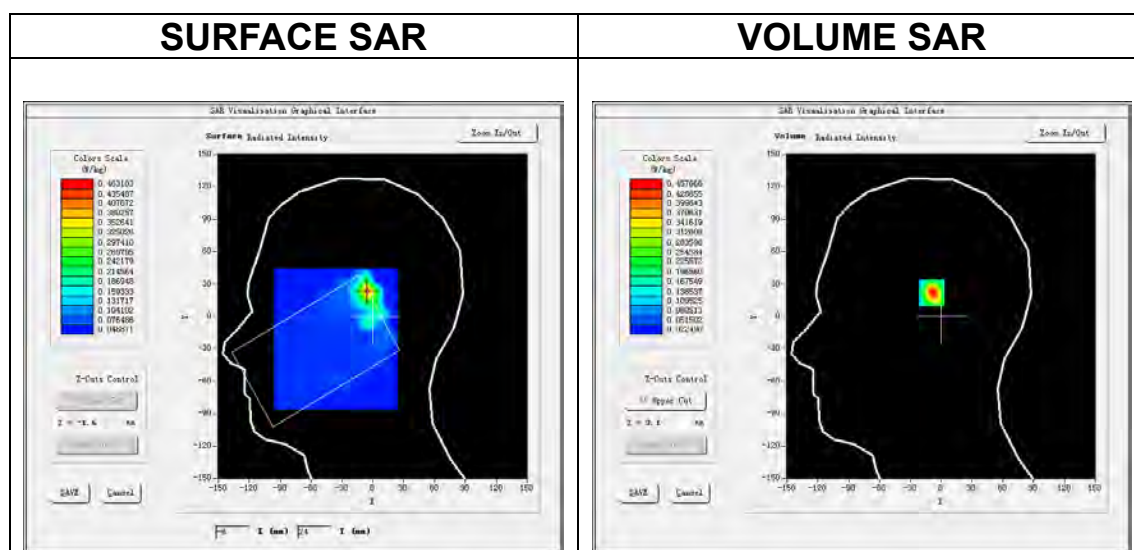


Maximum location: X=-6.00, Y=24.00


SAR Peak: 1.21 W/kg

SAR 10g (W/Kg)	0.199954
SAR 1g (W/Kg)	0.451416


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
SAR (W/ Kg)	0.76 30	0.45 77	0.23 80	0.13 96	0.09 64	0.05 20	0.05 93	0.05 84	0.06 14	0.05 88	0.05 79	0.05 99

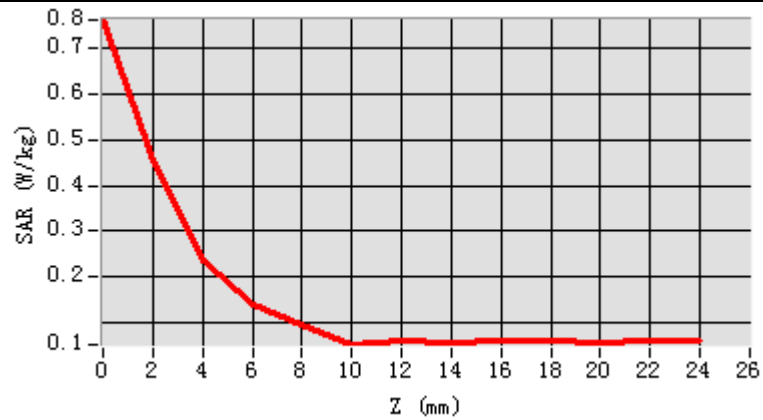

3D screen shot

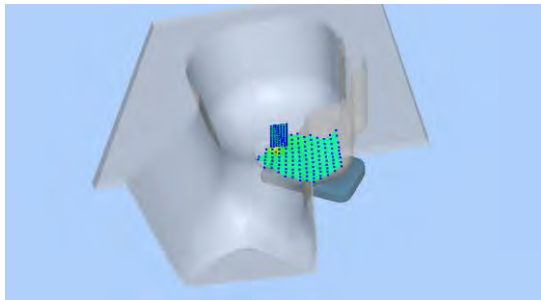

Hot spot position

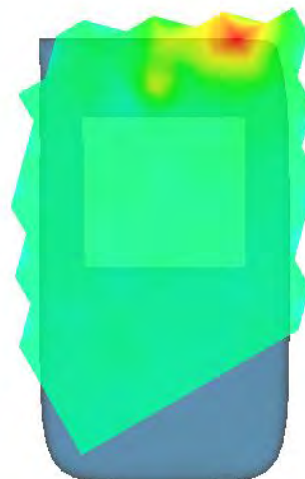

MEASUREMENT 14


Date of measurement: 8/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	5280.000000
Relative permittivity (real part)	37.040169
Relative permittivity (imaginary part)	16.466027
Conductivity (S/m)	4.830035
Variation (%)	-1.720000

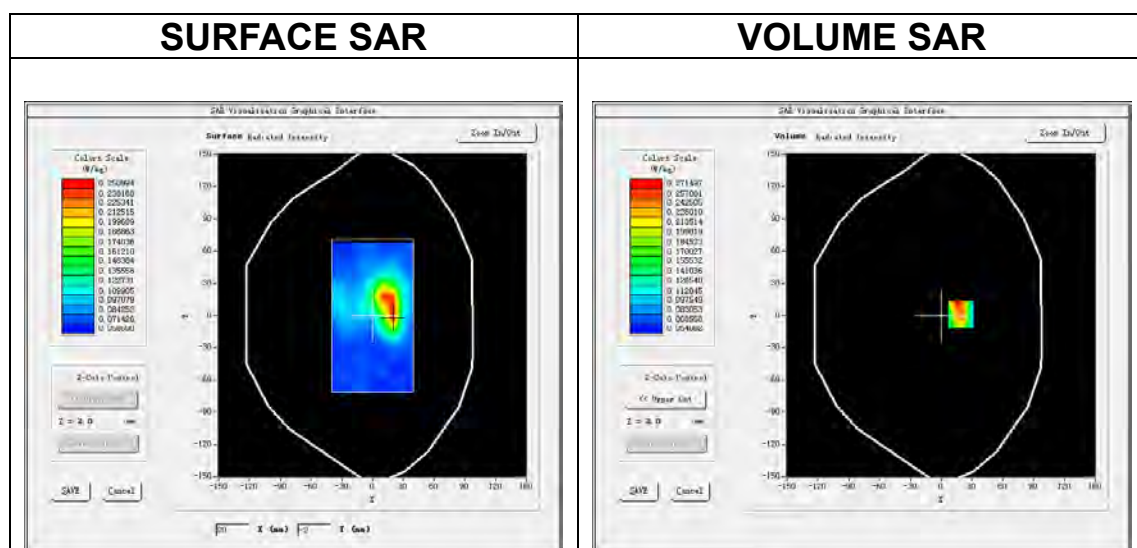


Maximum location: X=19.00, Y=1.00


SAR Peak: 0.42 W/kg

SAR 10g (W/Kg)	0.108592
SAR 1g (W/Kg)	0.181995


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0
SAR (W/ Kg)	0.42 02	0.27 15	0.13 12	0.13 07	0.08 82	0.07 46	0.07 31	0.07 38	0.06 55	0.06 48	0.06 08	0.06 37

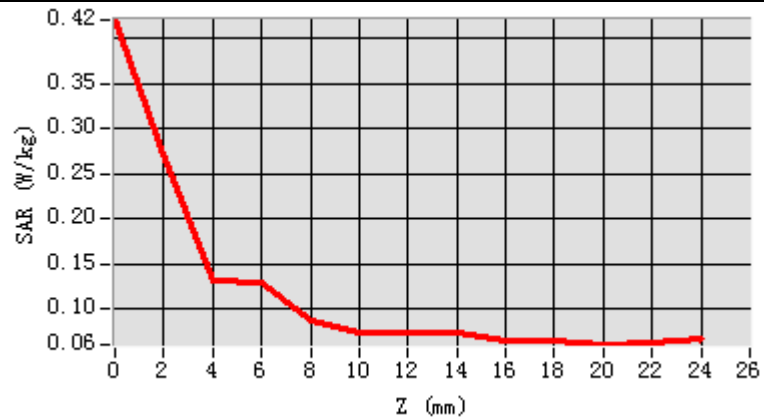

3D screen shot

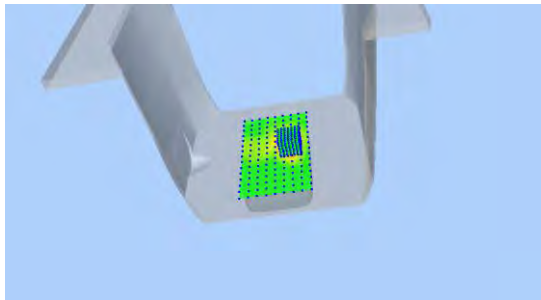

Hot spot position

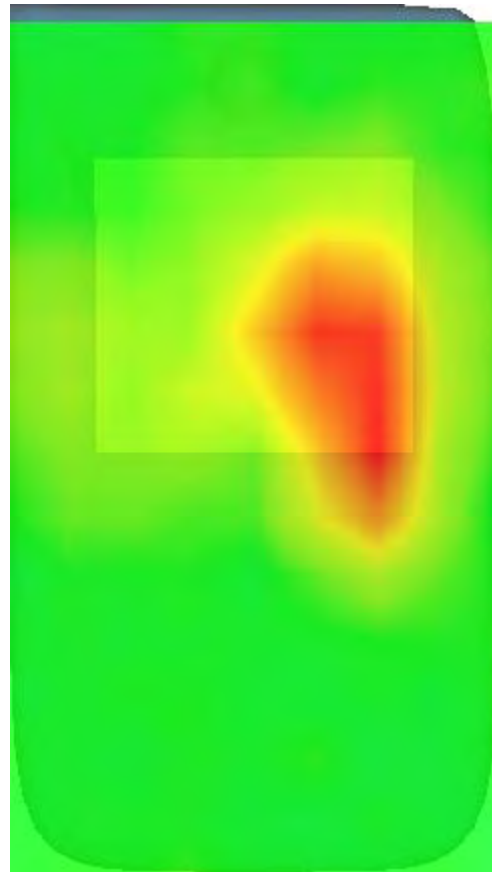

MEASUREMENT 15


Date of measurement: 11/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	5600.000000
Relative permittivity (real part)	36.165790
Relative permittivity (imaginary part)	16.472167
Conductivity (S/m)	5.124674
Variation (%)	1.260000

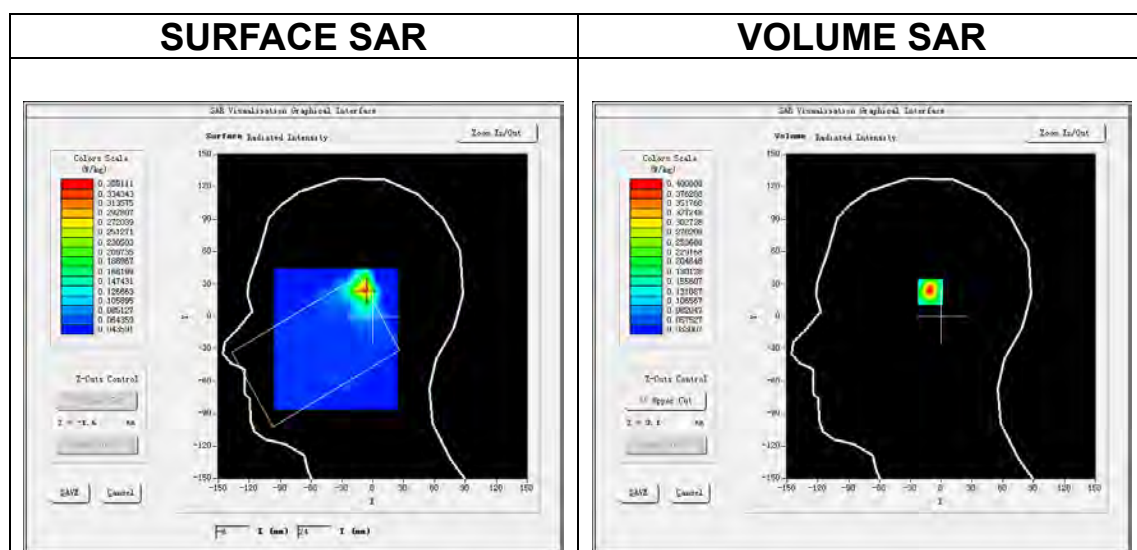

Maximum location: X=-8.00, Y=25.00

SAR Peak: 1.02 W/kg

SAR 10g (W/Kg)	0.151415
SAR 1g (W/Kg)	0.384733

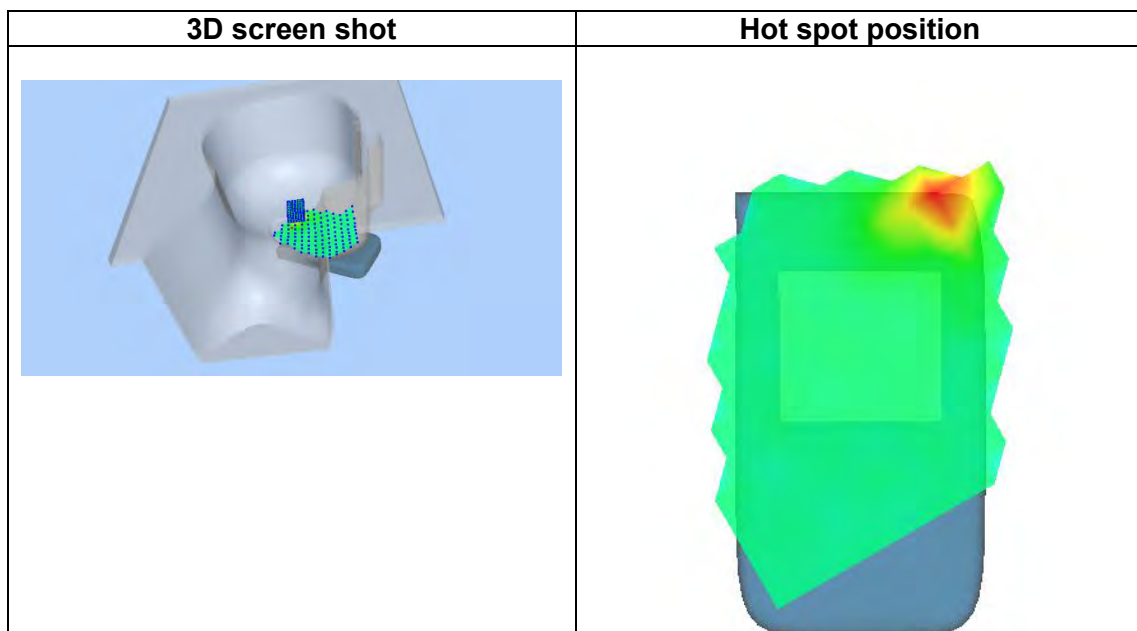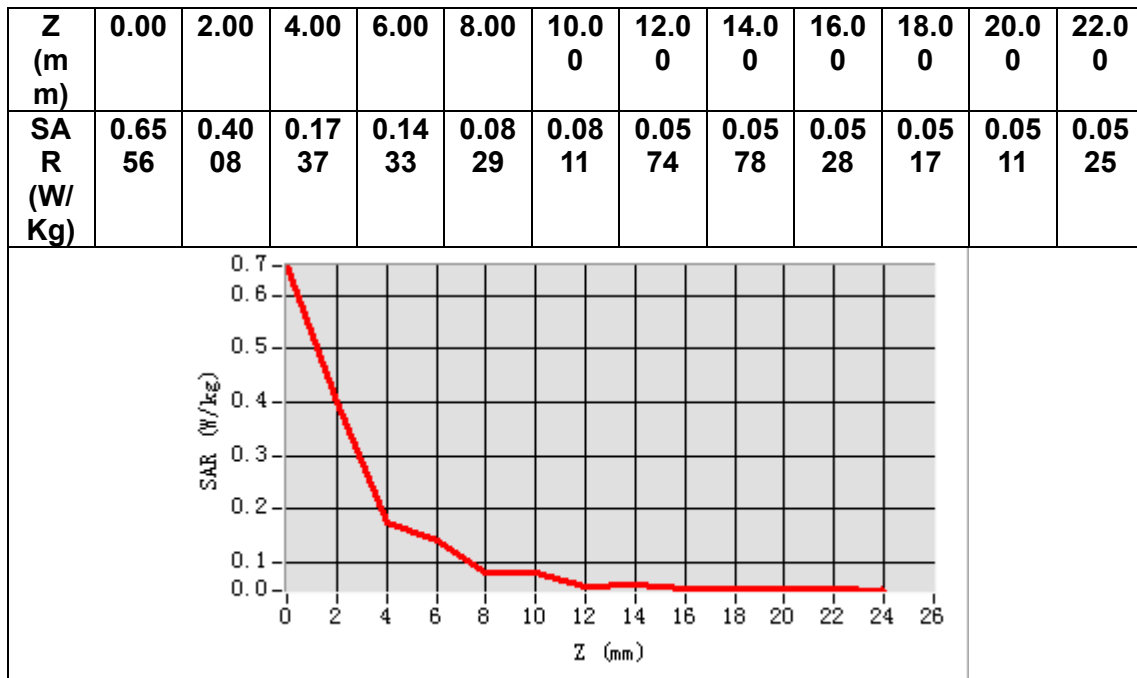

MEASUREMENT 16


Date of measurement: 11/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	5600.000000
Relative permittivity (real part)	36.165790
Relative permittivity (imaginary part)	16.472167
Conductivity (S/m)	5.124674
Variation (%)	0.260000

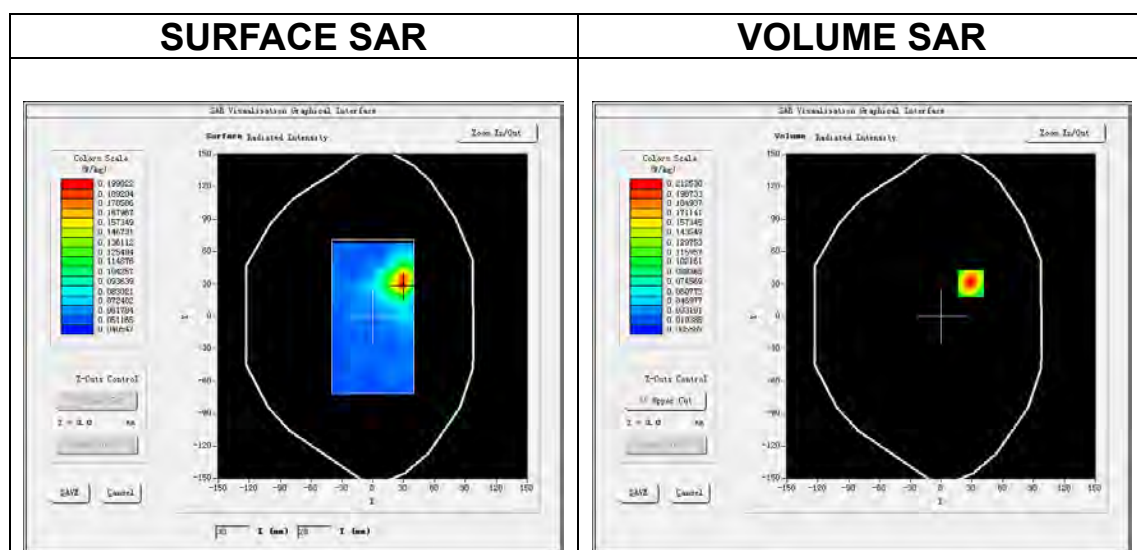


Maximum location: X=29.00, Y=31.00


SAR Peak: 0.32 W/kg

SAR 10g (W/Kg)	0.089760
SAR 1g (W/Kg)	0.148414


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
SA R (W/ Kg)	0.30 42	0.21 25	0.15 22	0.10 63	0.08 41	0.07 32	0.06 49	0.05 96	0.05 69	0.05 07	0.05 76	0.05 65

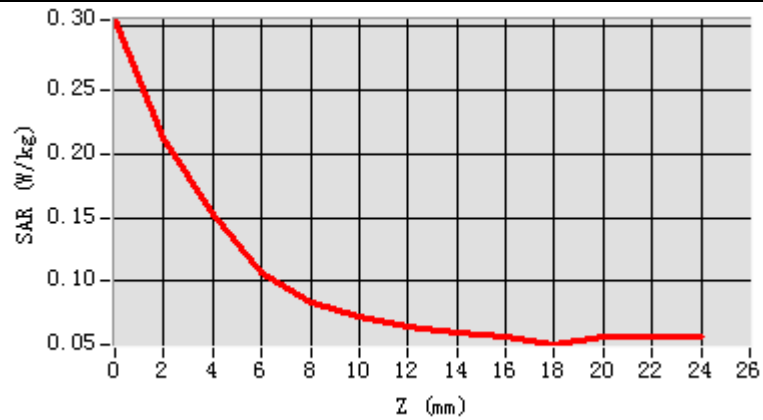

3D screen shot

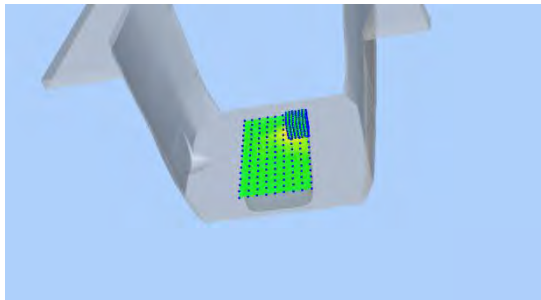

Hot spot position

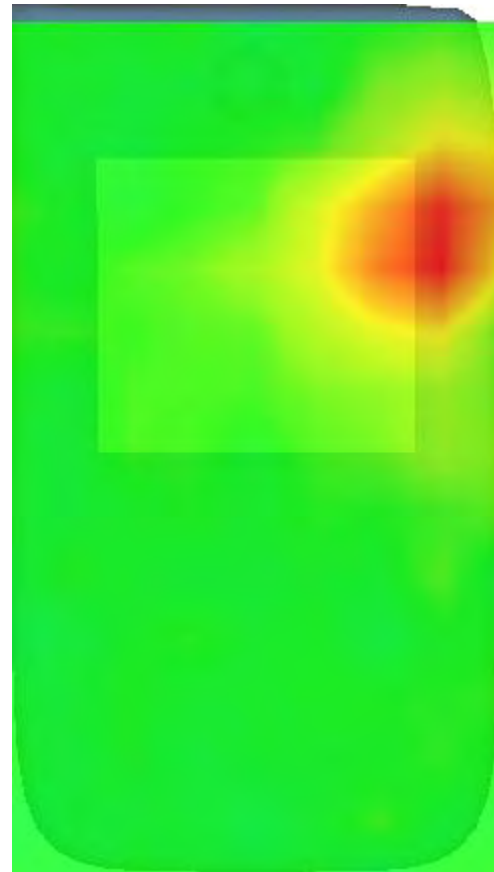

MEASUREMENT 17

Date of measurement: 5/8/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5785.000000
Relative permittivity (real part)	36.089066
Relative permittivity (imaginary part)	16.223120
Conductivity (S/m)	5.213931
Variation (%)	2.540000

SURFACE SAR

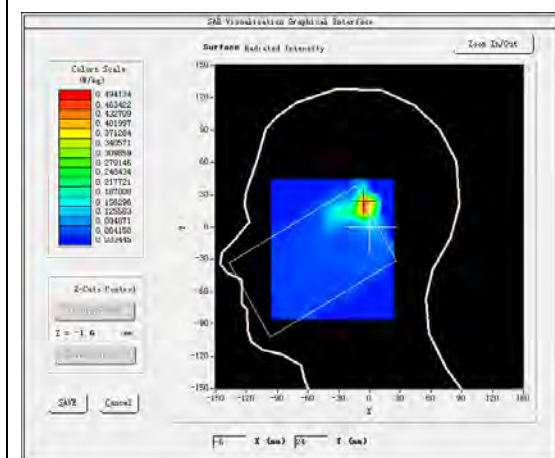

VOLUME SAR

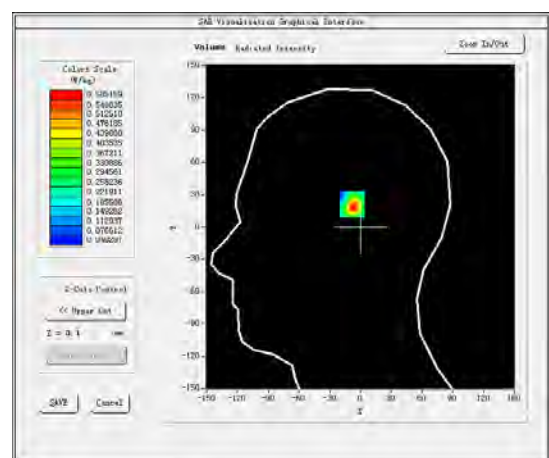


Maximum location: X=-5.00, Y=22.00


SAR Peak: 1.47 W/kg

SAR 10g (W/Kg)	0.209382
SAR 1g (W/Kg)	0.460888


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
SAR (W/ Kg)	0.96 29	0.58 52	0.27 74	0.19 73	0.11 04	0.09 45	0.07 51	0.06 78	0.05 82	0.05 68	0.05 90	0.05 56

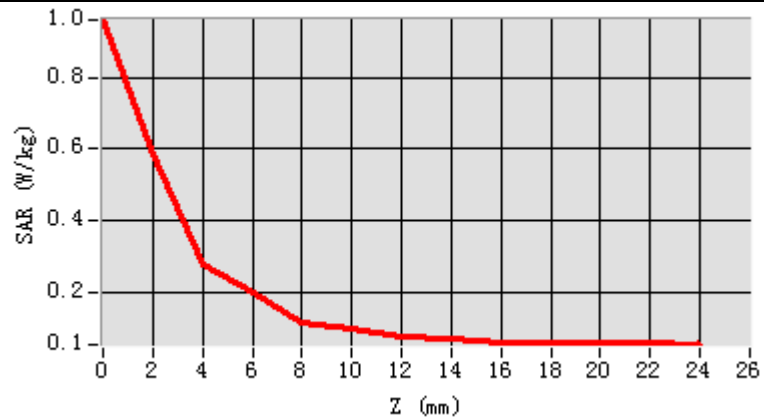

3D screen shot

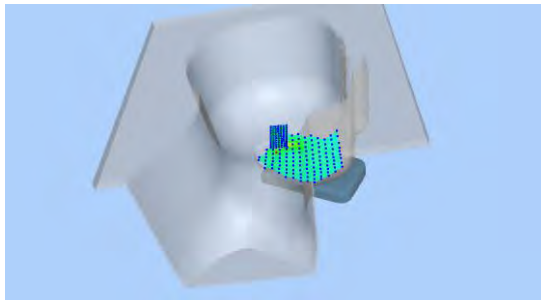

Hot spot position

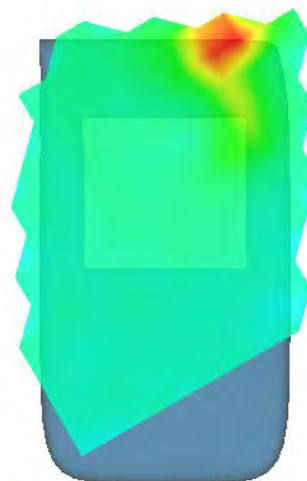

MEASUREMENT 18

Date of measurement: 5/8/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5785.000000
Relative permittivity (real part)	36.089066
Relative permittivity (imaginary part)	16.223120
Conductivity (S/m)	5.213931
Variation (%)	0.360000

SURFACE SAR

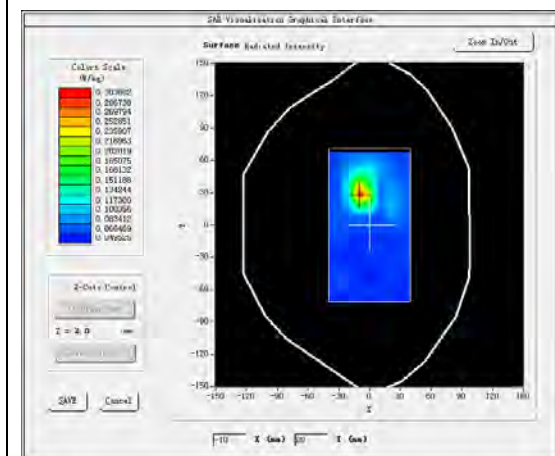


VOLUME SAR

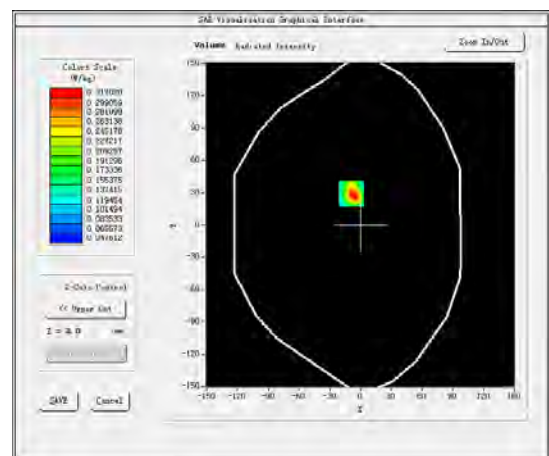


Maximum location: X=-9.00, Y=29.00

SAR Peak: 0.52 W/kg


SAR 10g (W/Kg)	0.106766
SAR 1g (W/Kg)	0.208303

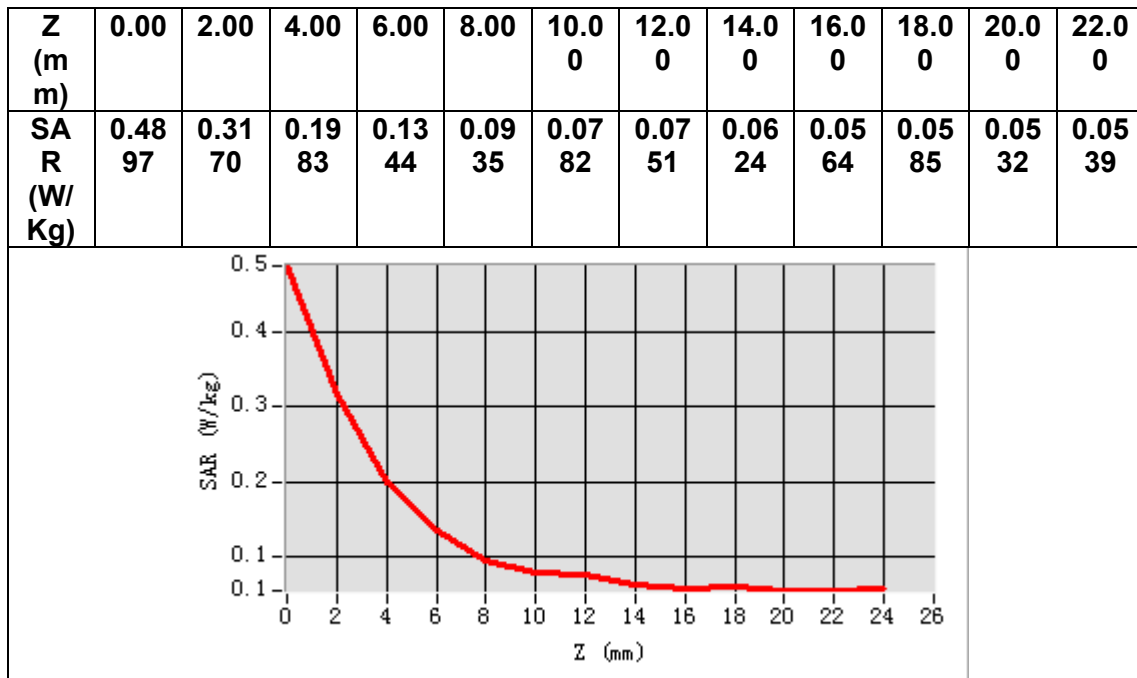

3D screen shot

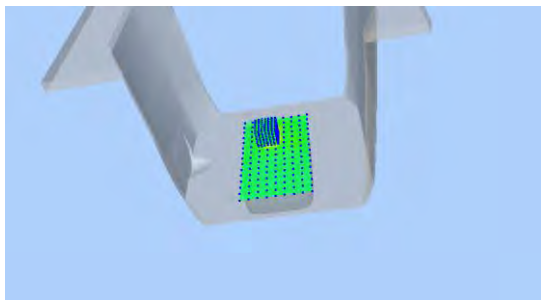

Hot spot position

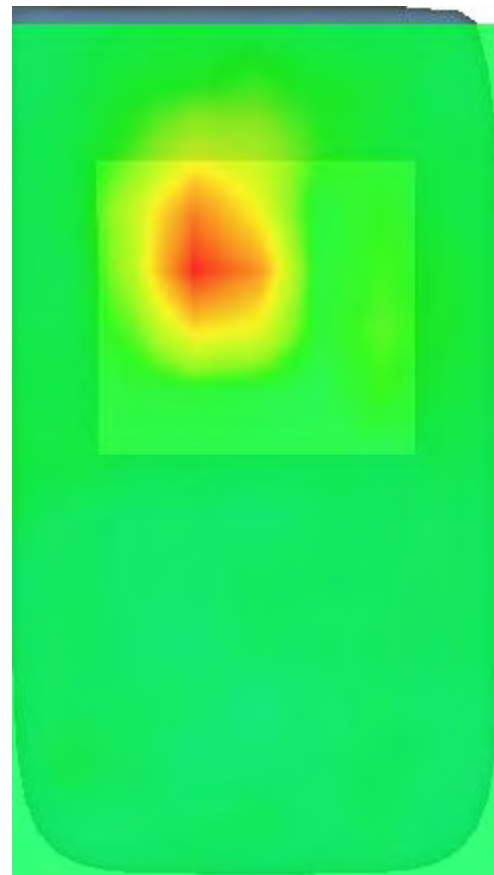

MEASUREMENT 19


Date of measurement: 3/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	2437.000000
Relative permittivity (real part)	39.814910
Relative permittivity (imaginary part)	13.179226
Conductivity (S/m)	1.784321
Variation (%)	-1.570000

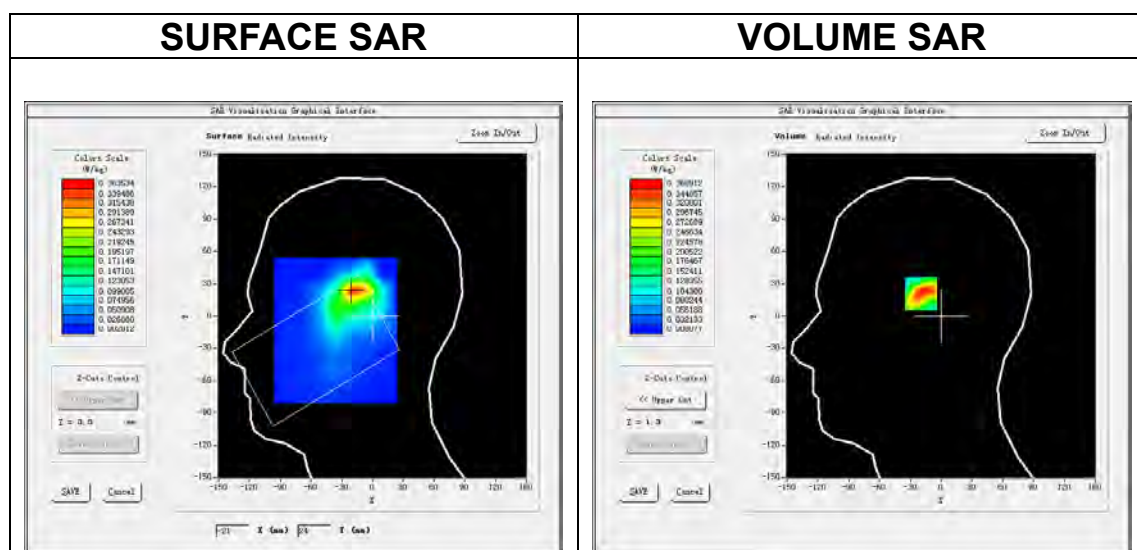

Maximum location: X=-19.00, Y=23.00

SAR Peak: 0.60 W/kg

SAR 10g (W/Kg)	0.167190
SAR 1g (W/Kg)	0.339971

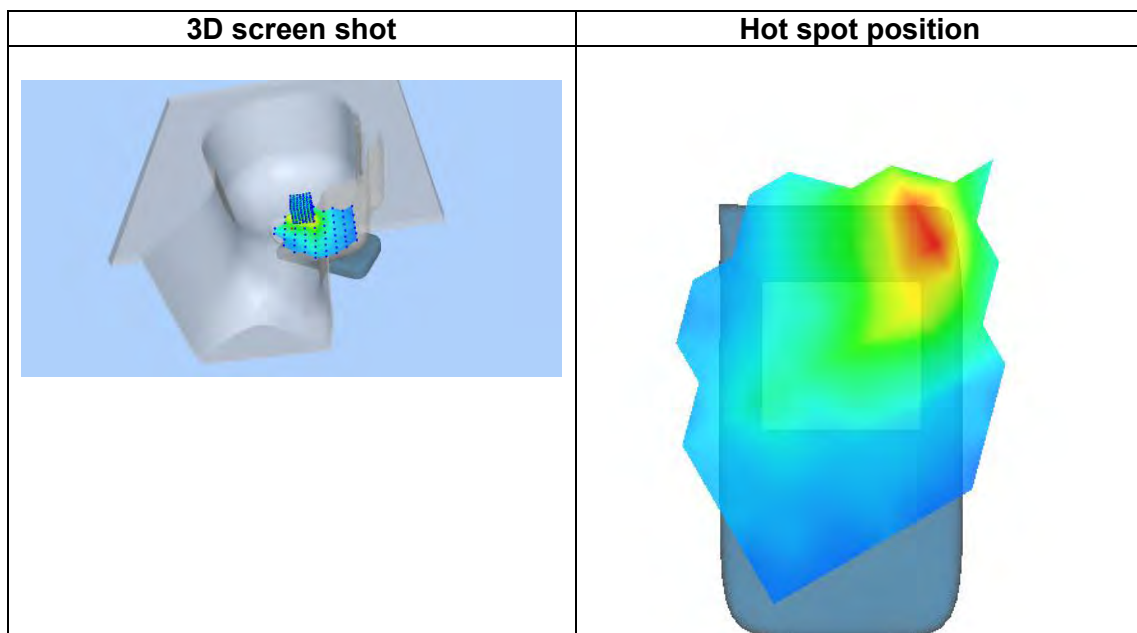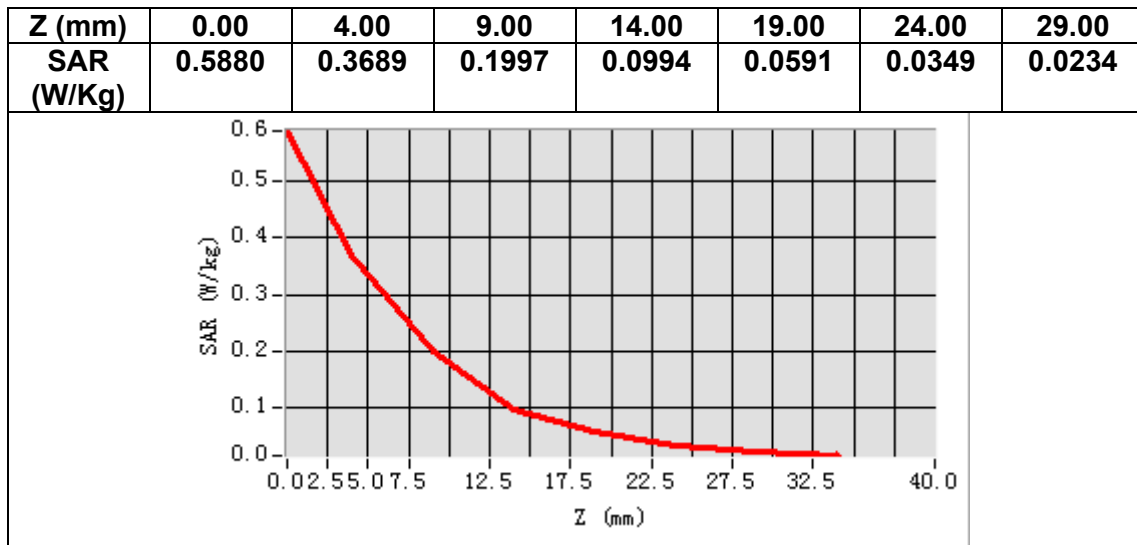

MEASUREMENT 20


Date of measurement: 3/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>

B. SAR Measurement Results


Frequency (MHz)	2437.000000
Relative permittivity (real part)	39.814910
Relative permittivity (imaginary part)	13.179226
Conductivity (S/m)	1.784321
Variation (%)	-1.010000

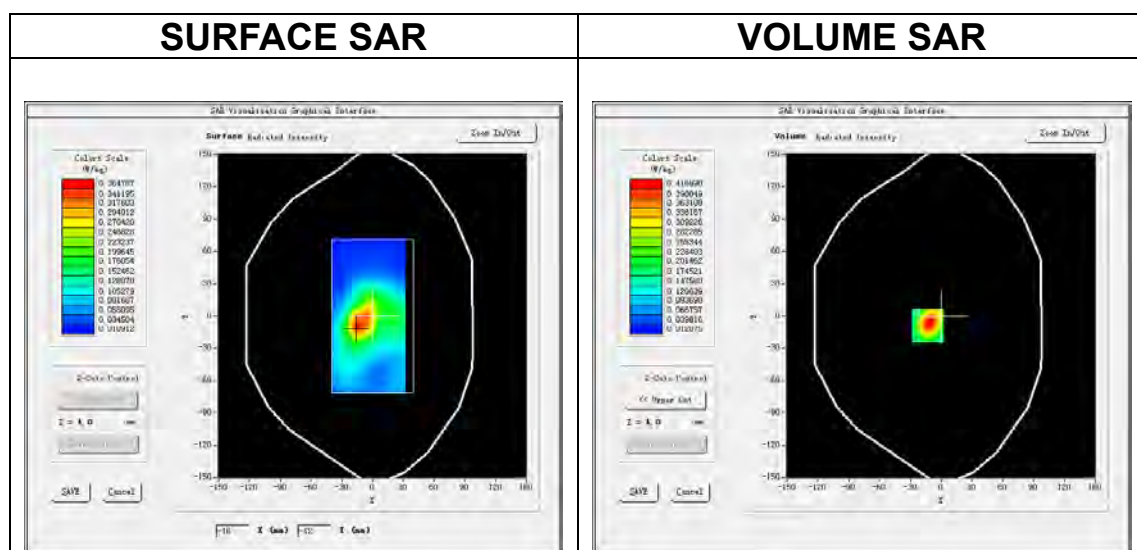


Maximum location: X=-13.00, Y=-9.00

SAR Peak: 0.62 W/kg


SAR 10g (W/Kg)	0.203855
SAR 1g (W/Kg)	0.389040

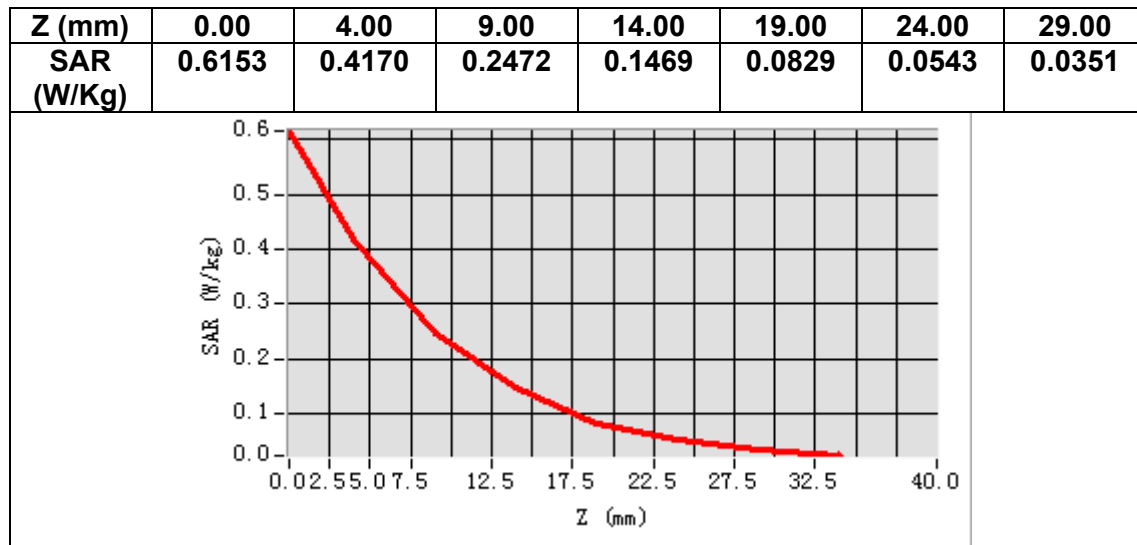

3D screen shot

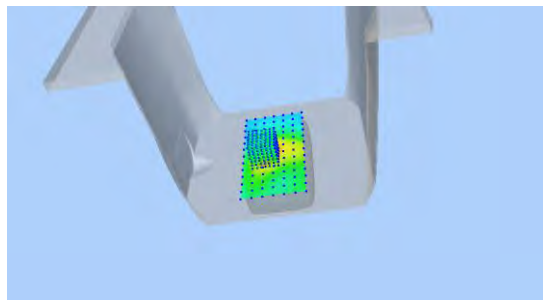

Hot spot position

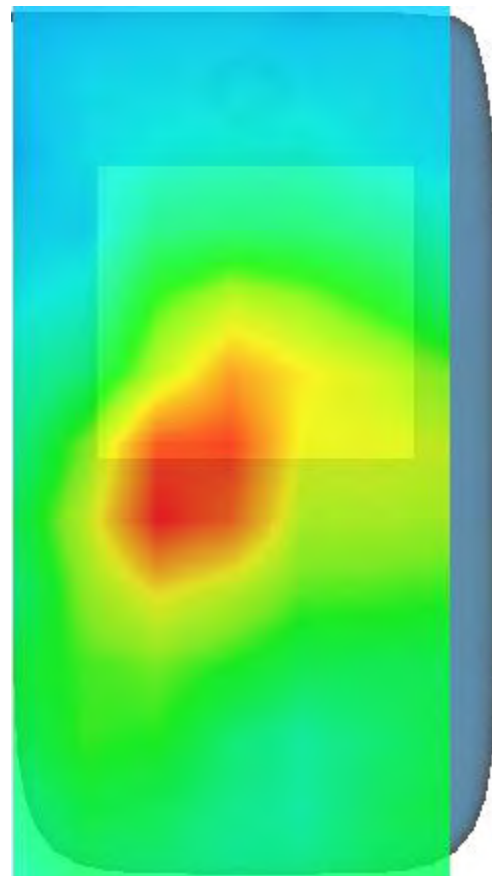

MEASUREMENT 21

Date of measurement: 12/8/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 2</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	39.041246
Relative permittivity (imaginary part)	13.676401
Conductivity (S/m)	1.428424
Variation (%)	1.910000

SURFACE SAR

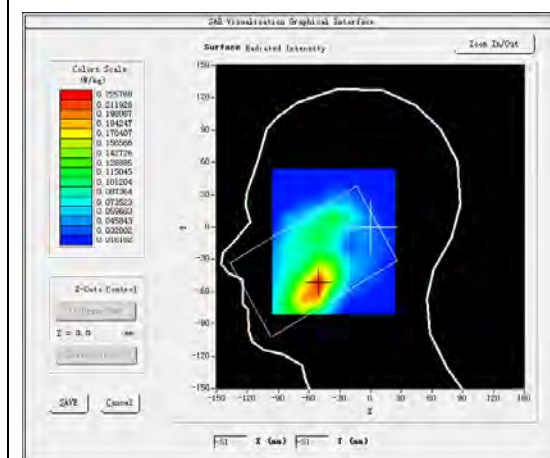



VOLUME SAR

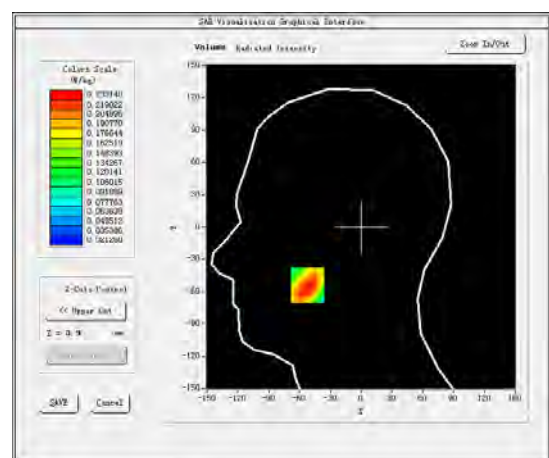

Maximum location: X=-52.00, Y=-54.00

SAR Peak: 0.34 W/kg

SAR 10g (W/Kg)	0.141754
SAR 1g (W/Kg)	0.226934

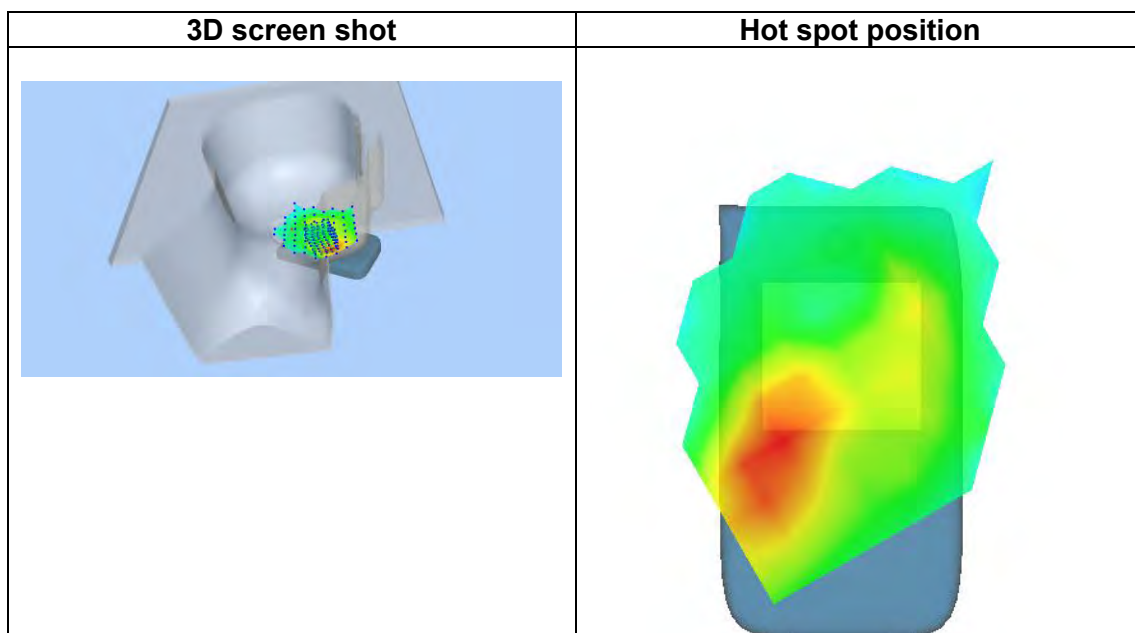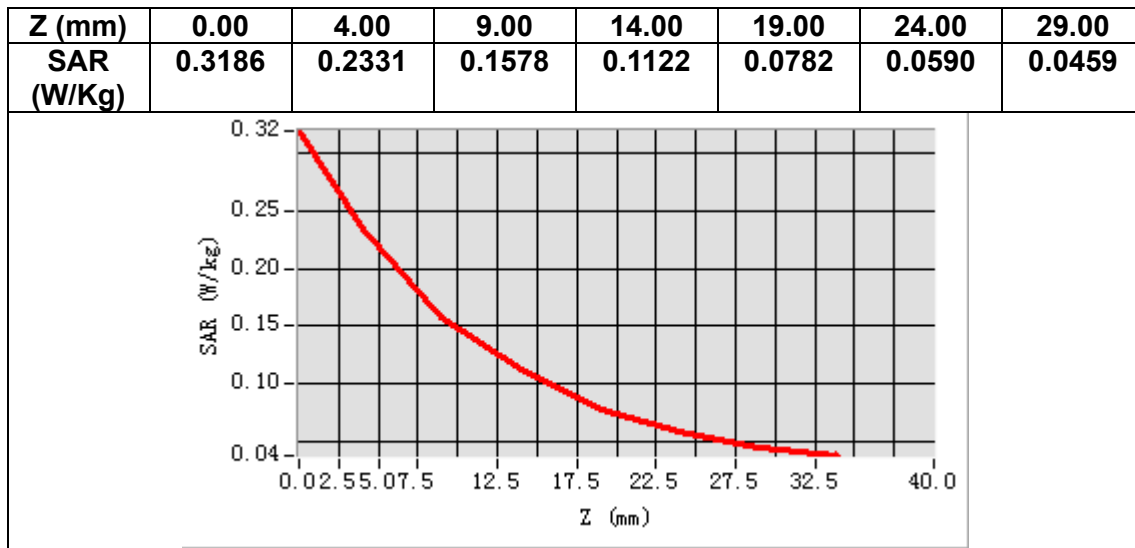

MEASUREMENT 22

Date of measurement: 12/8/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 2</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	39.041246
Relative permittivity (imaginary part)	13.676401
Conductivity (S/m)	1.428424
Variation (%)	-0.130000

SURFACE SAR

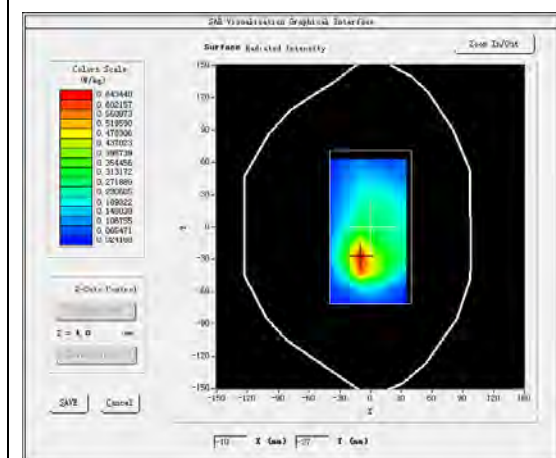


VOLUME SAR

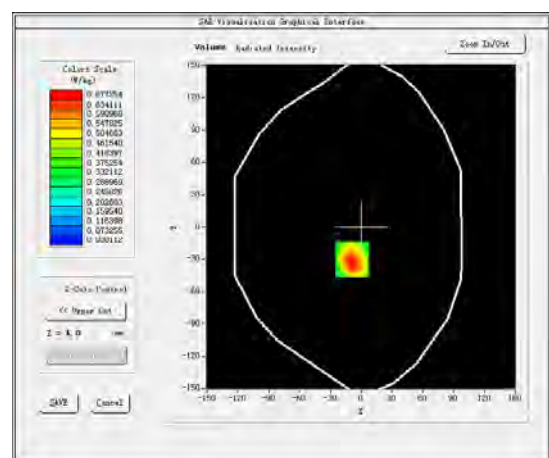


Maximum location: X=-9.00, Y=-30.00

SAR Peak: 1.05 W/kg


SAR 10g (W/Kg)	0.369606
SAR 1g (W/Kg)	0.665849

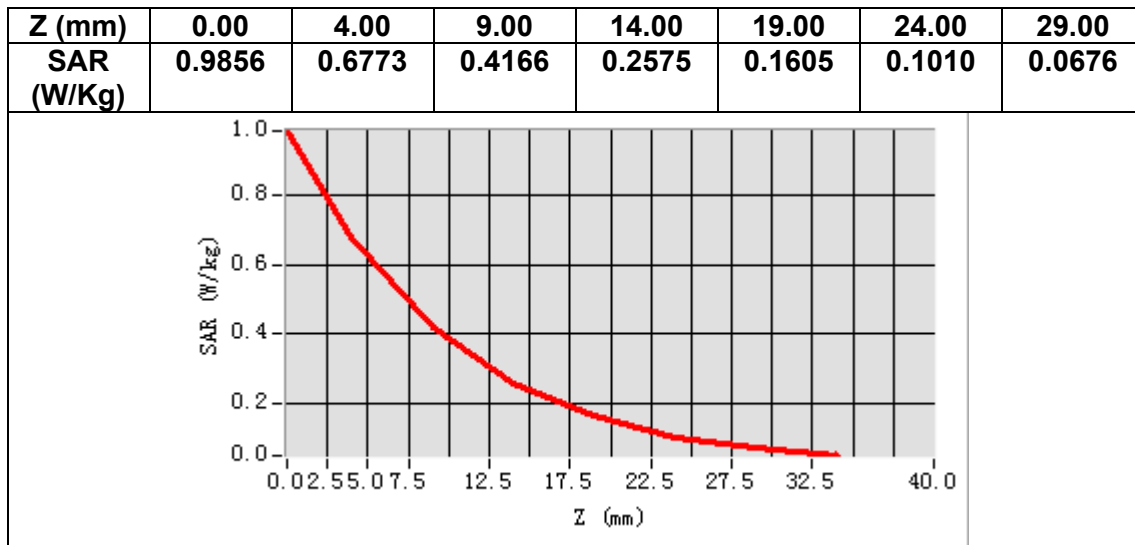

3D screen shot

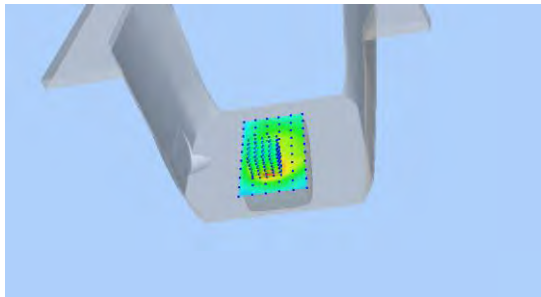

Hot spot position

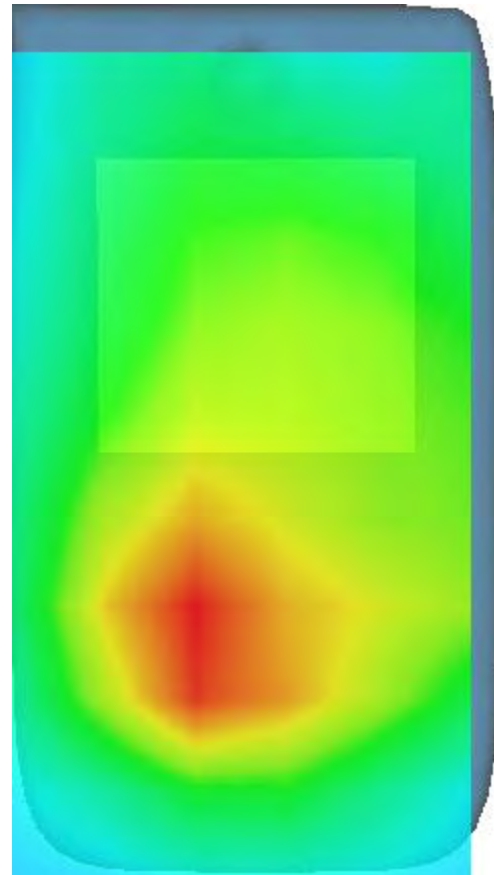

MEASUREMENT 23

Date of measurement: 29/7/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1732.500000
Relative permittivity (real part)	40.438807
Relative permittivity (imaginary part)	13.688647
Conductivity (S/m)	1.317532
Variation (%)	1.360000

SURFACE SAR

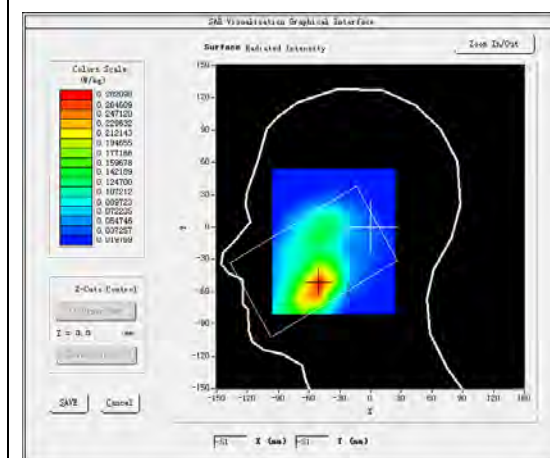



VOLUME SAR

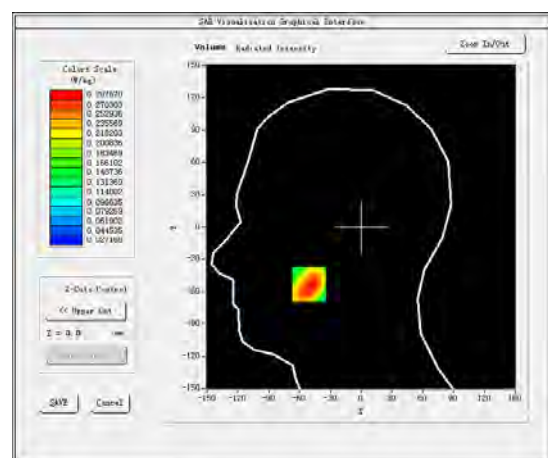

Maximum location: X=-51.00, Y=-53.00

SAR Peak: 0.41 W/kg

SAR 10g (W/Kg)	0.180608
SAR 1g (W/Kg)	0.283171

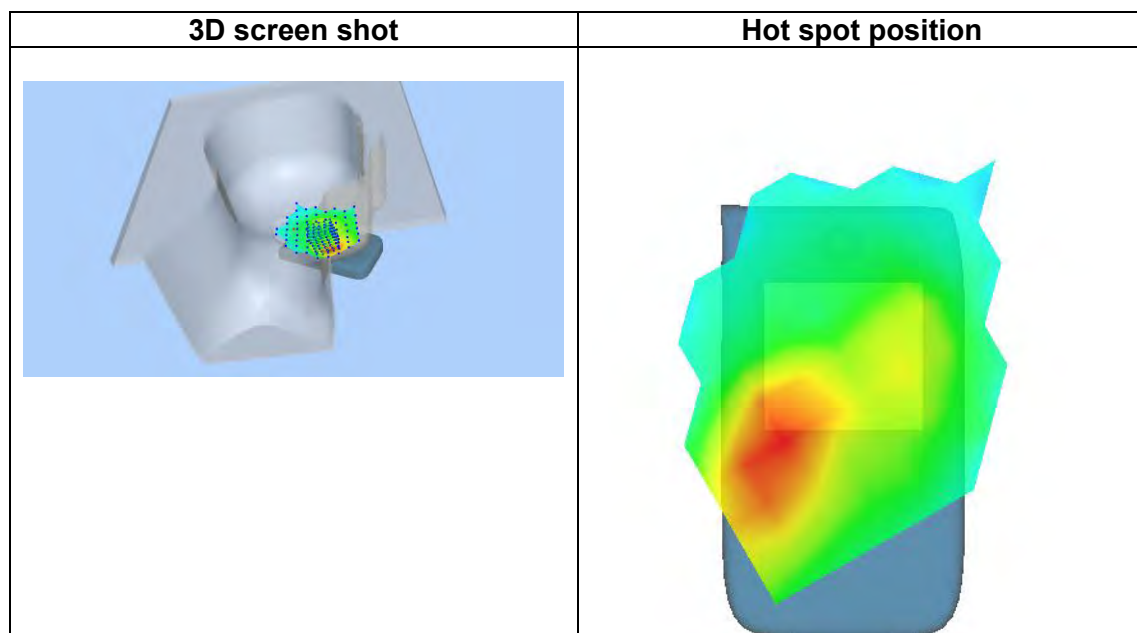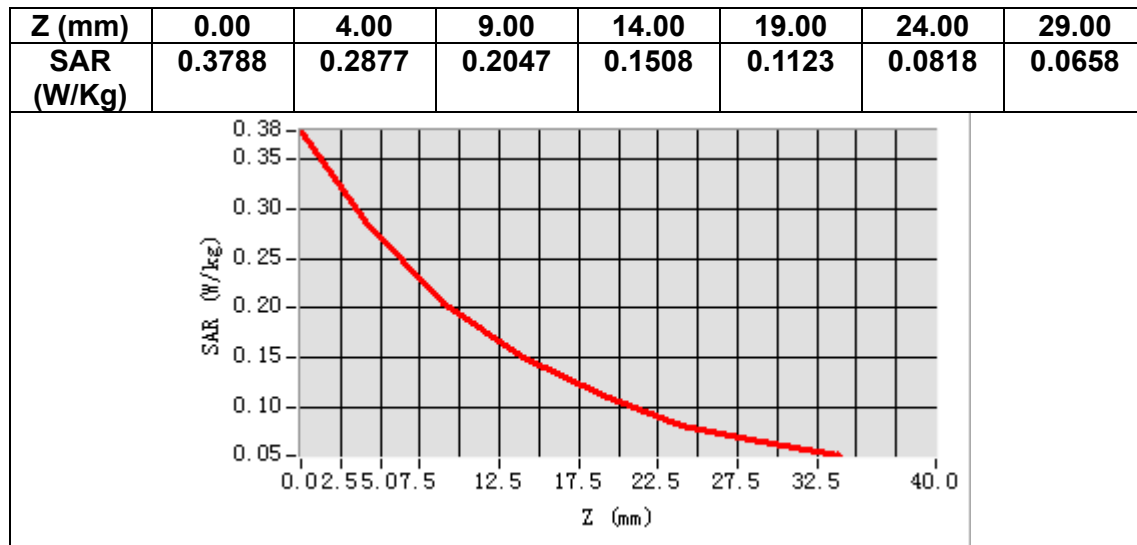

MEASUREMENT 24

Date of measurement: 29/7/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1732.500000
Relative permittivity (real part)	40.438807
Relative permittivity (imaginary part)	13.688647
Conductivity (S/m)	1.317532
Variation (%)	-0.910000

SURFACE SAR

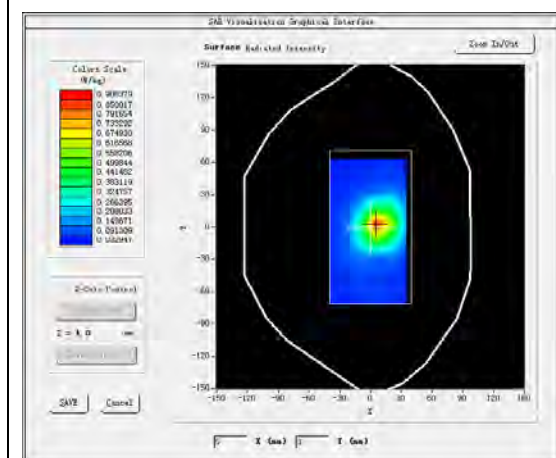


VOLUME SAR

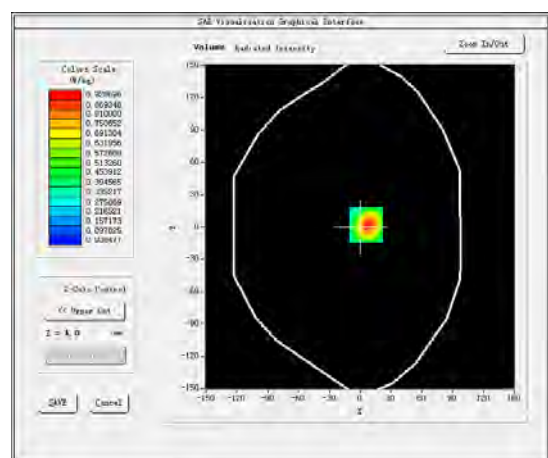


Maximum location: X=6.00, Y=2.00

SAR Peak: 1.40 W/kg


SAR 10g (W/Kg)	0.482855
SAR 1g (W/Kg)	0.881666

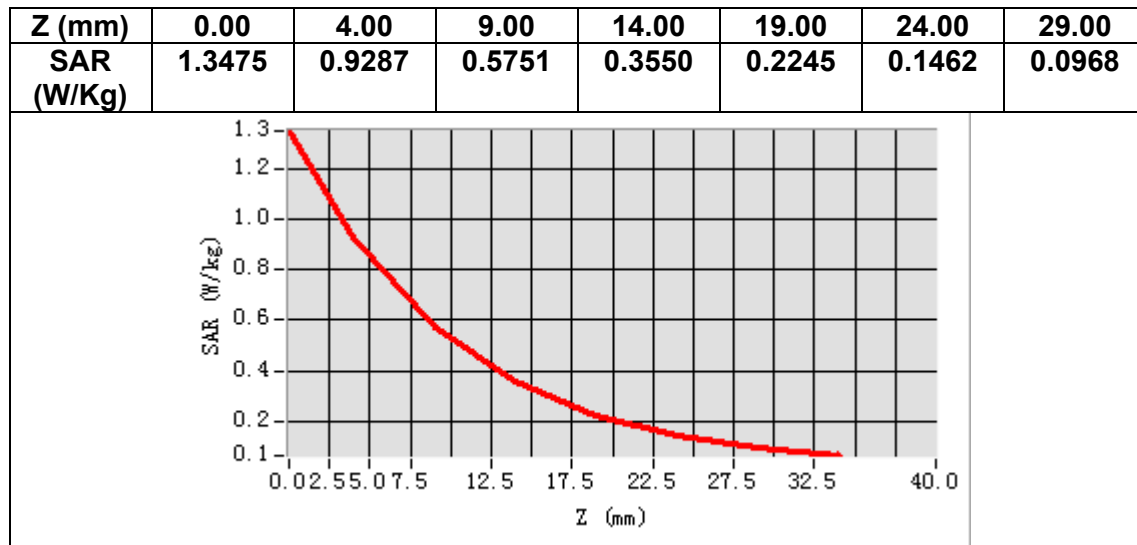

3D screen shot

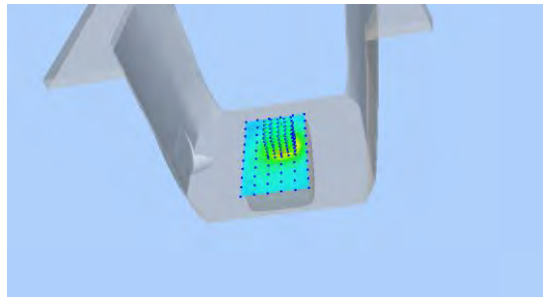

Hot spot position

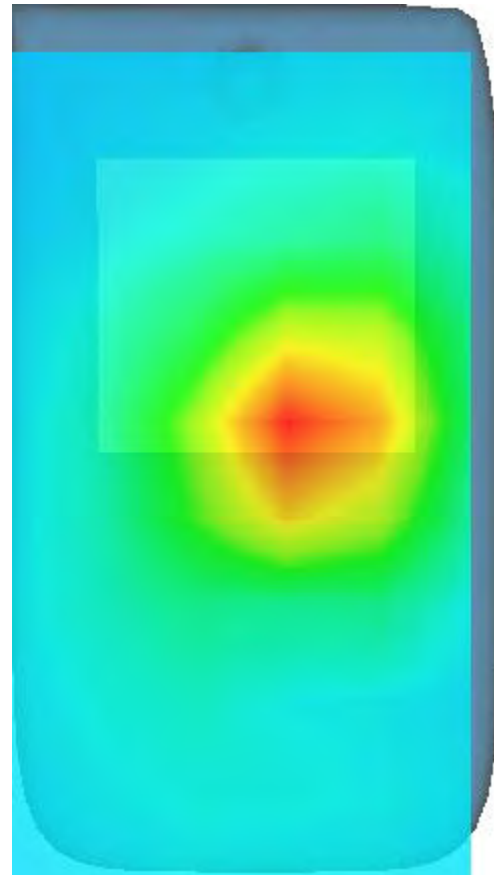

MEASUREMENT 25

Date of measurement: 28/7/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 5</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.500000
Relative permittivity (real part)	42.543852
Relative permittivity (imaginary part)	20.189303
Conductivity (S/m)	0.938242
Variation (%)	3.870000

SURFACE SAR

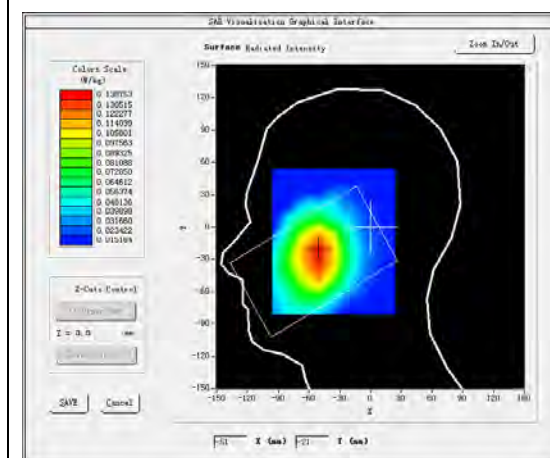



VOLUME SAR

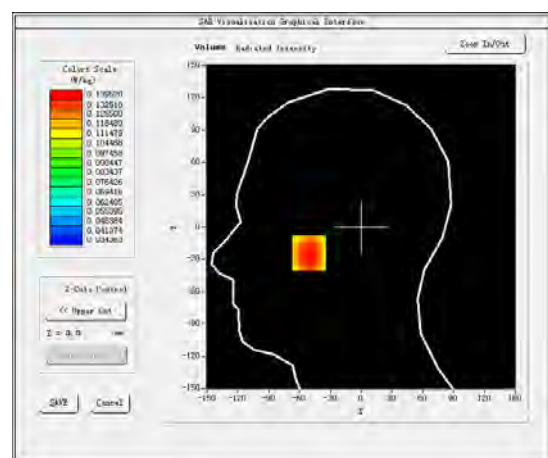

Maximum location: X=-51.00, Y=-24.00

SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.112950
SAR 1g (W/Kg)	0.139002

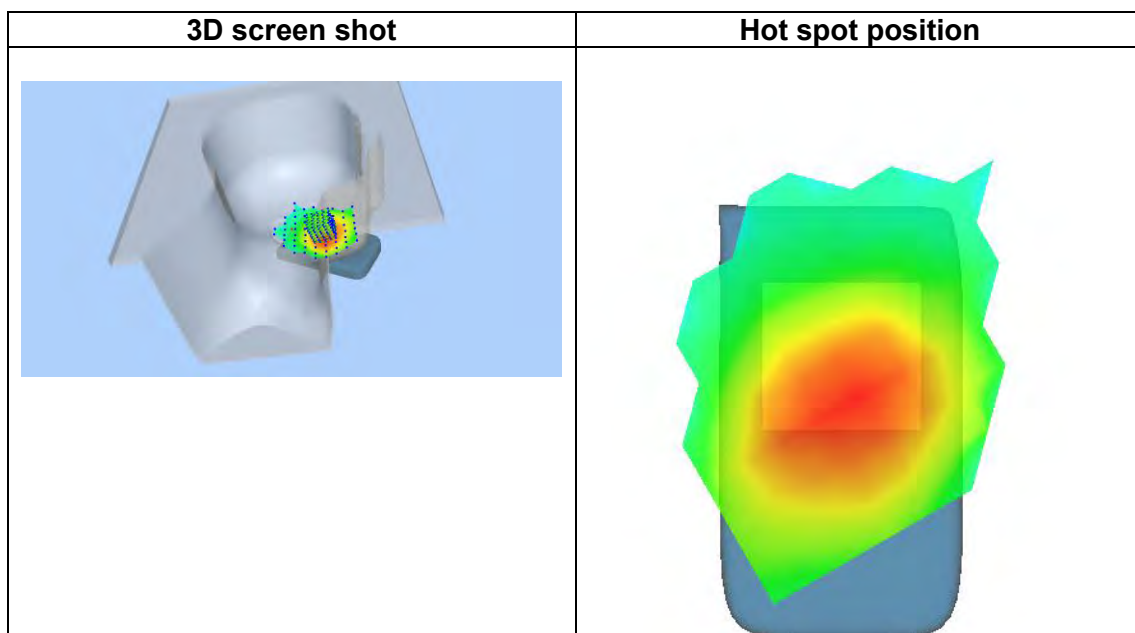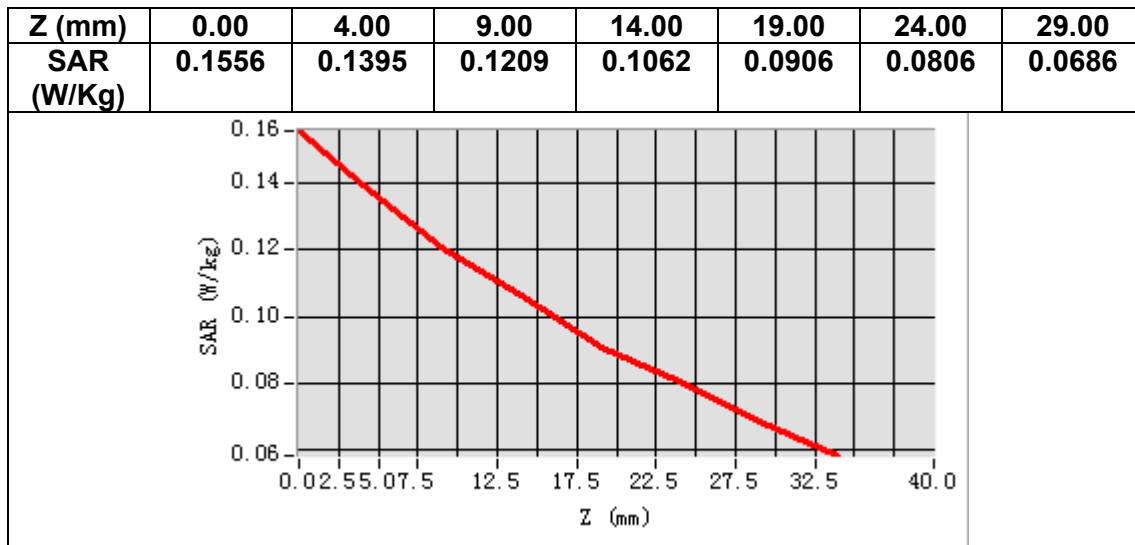

MEASUREMENT 26

Date of measurement: 28/7/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 5</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.500000
Relative permittivity (real part)	42.543852
Relative permittivity (imaginary part)	20.189303
Conductivity (S/m)	0.938242
Variation (%)	0.140000

SURFACE SAR

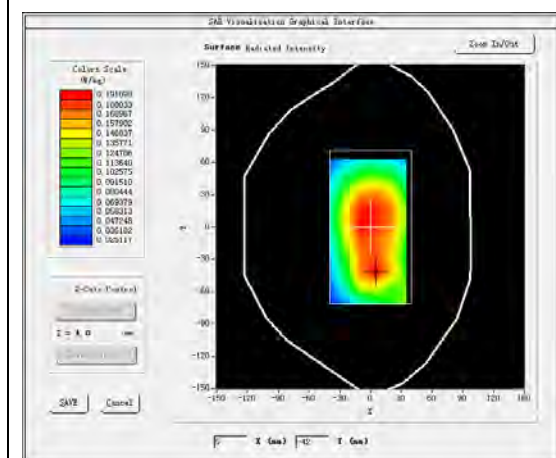


VOLUME SAR

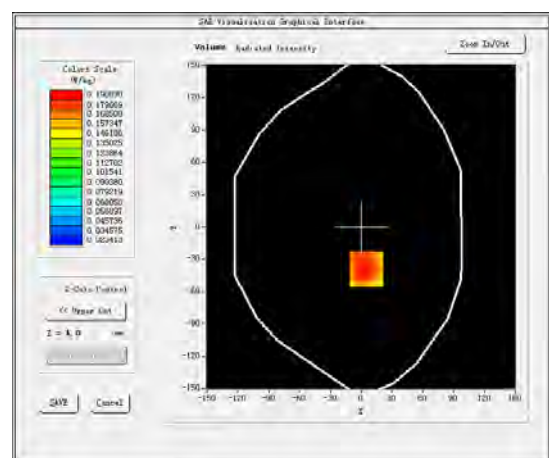


Maximum location: X=5.00, Y=-39.00

SAR Peak: 0.24 W/kg


SAR 10g (W/Kg)	0.143936
SAR 1g (W/Kg)	0.192311

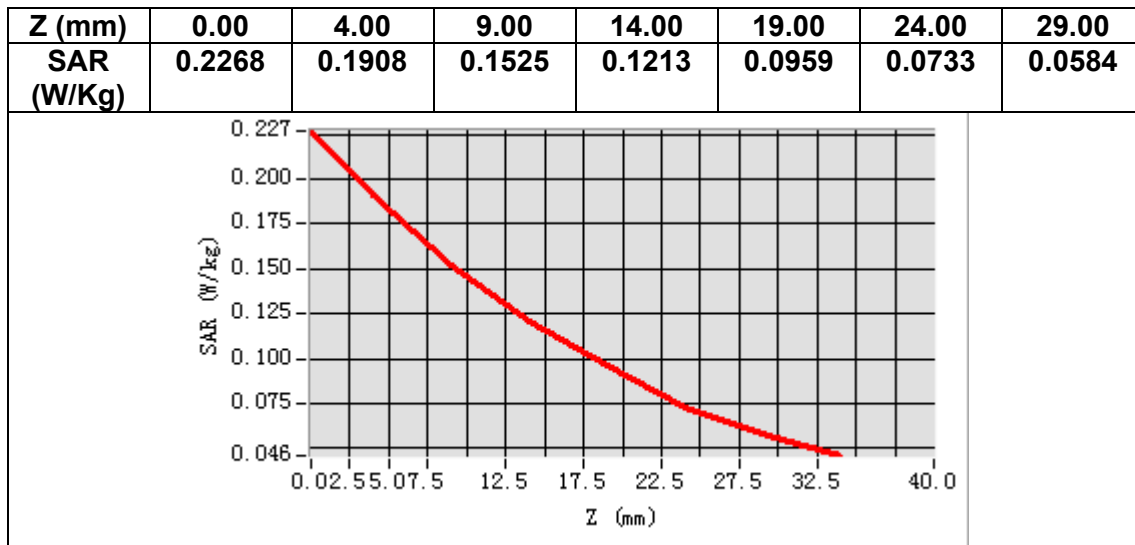

3D screen shot

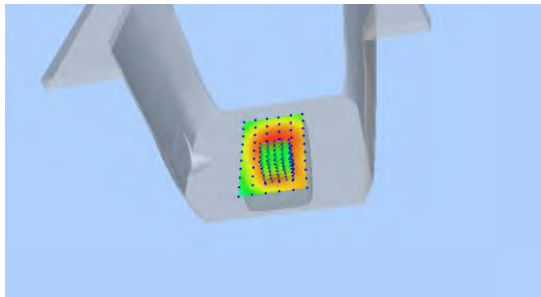

Hot spot position

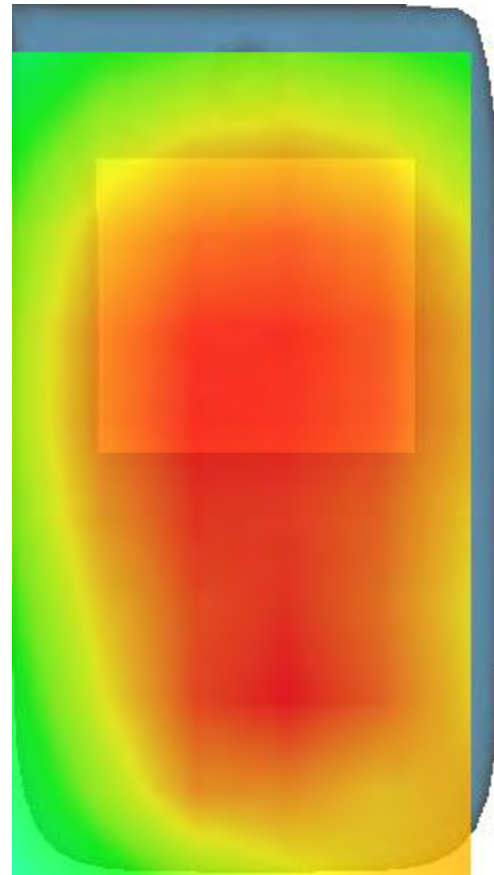

MEASUREMENT 27

Date of measurement: 9/8/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2535.000000
Relative permittivity (real part)	39.649396
Relative permittivity (imaginary part)	13.455765
Conductivity (S/m)	1.895020
Variation (%)	-1.790000

SURFACE SAR

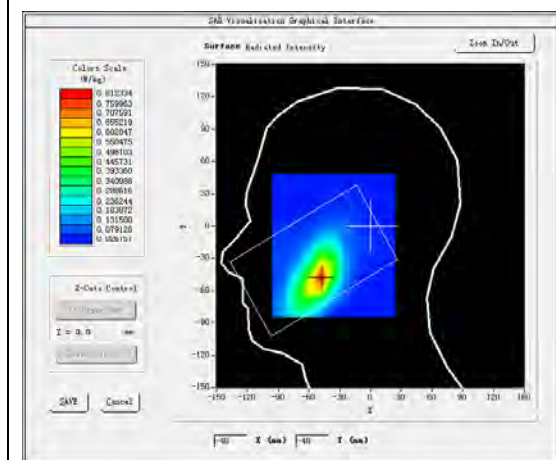



VOLUME SAR

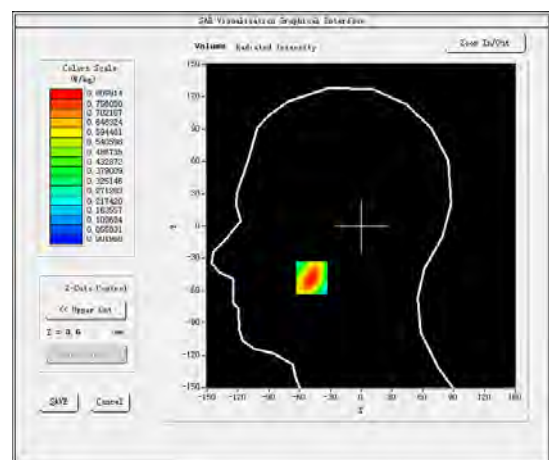

Maximum location: X=-48.00, Y=-48.00

SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.401238
SAR 1g (W/Kg)	0.607176

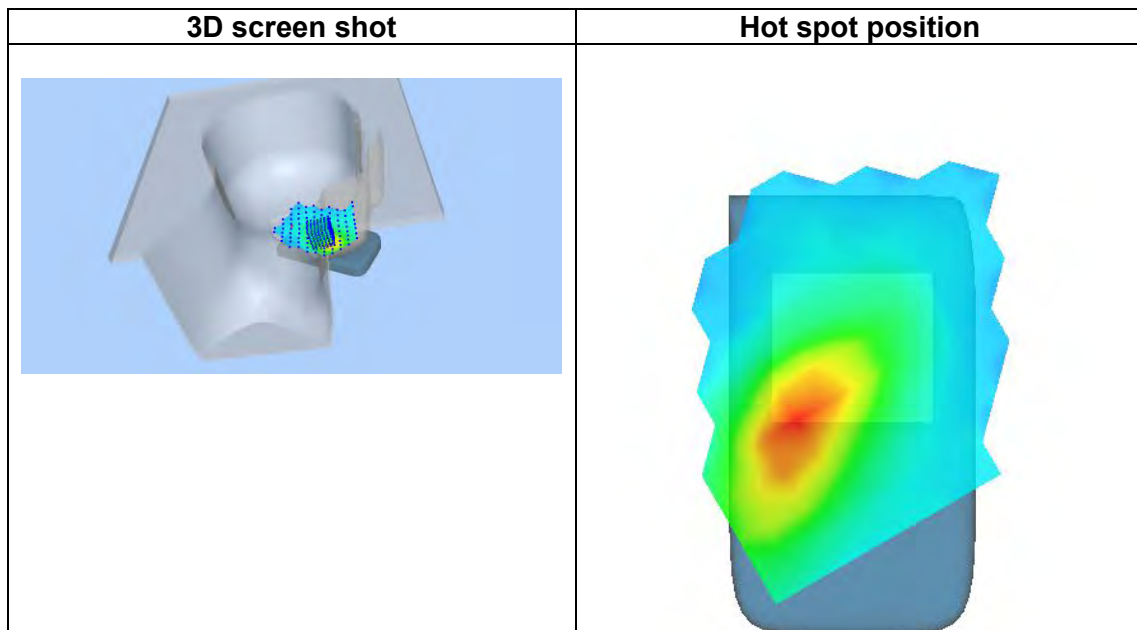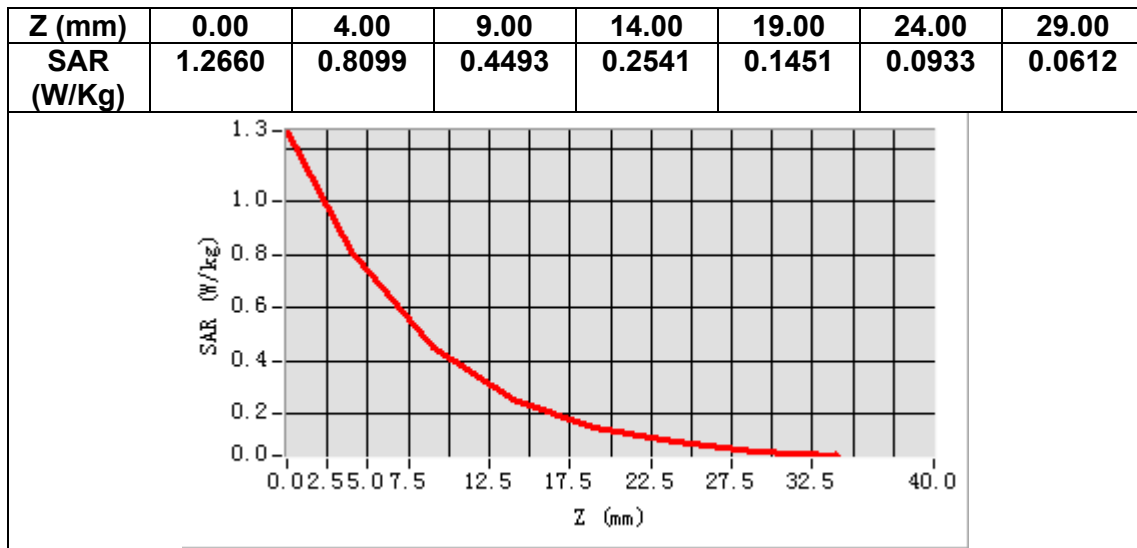

MEASUREMENT 28


Date of measurement: 9/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results


Frequency (MHz)	2535.000000
Relative permittivity (real part)	39.649396
Relative permittivity (imaginary part)	13.455765
Conductivity (S/m)	1.895020
Variation (%)	-0.380000

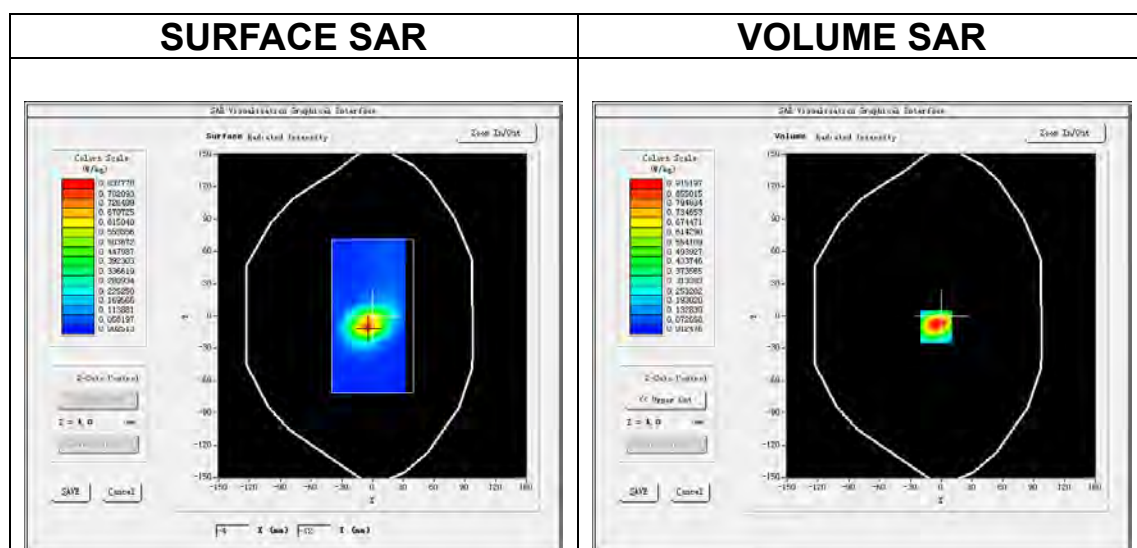


Maximum location: X=-5.00, Y=-10.00

SAR Peak: 1.60 W/kg


SAR 10g (W/Kg)	0.494951
SAR 1g (W/Kg)	0.870375

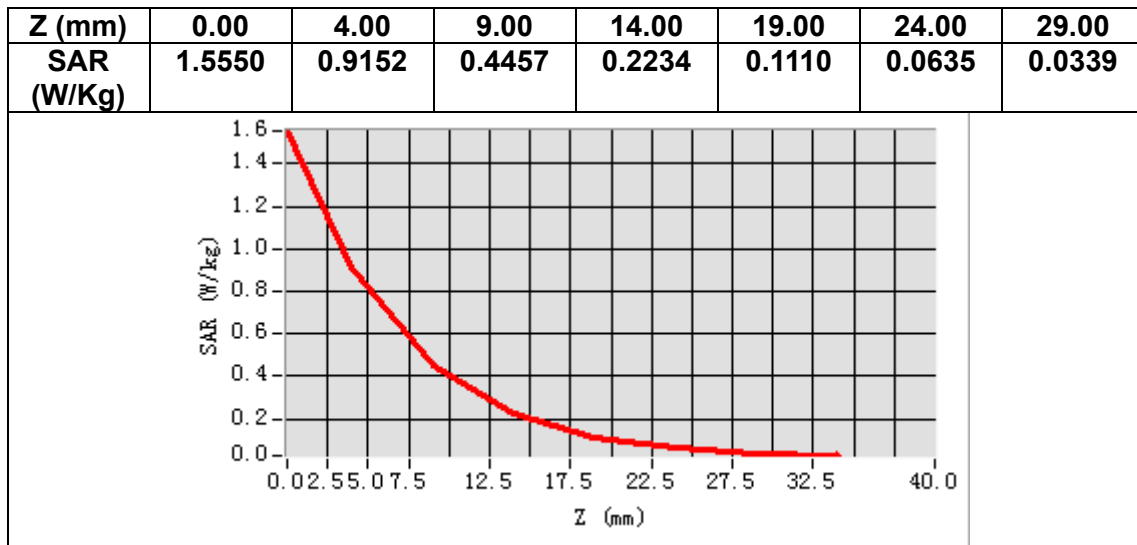

3D screen shot

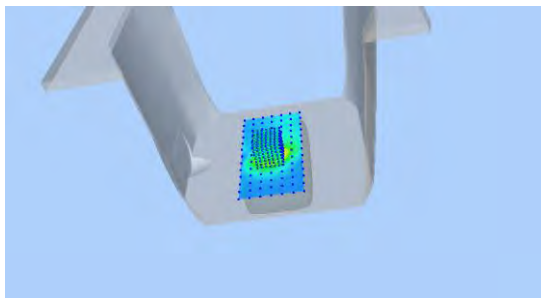

Hot spot position

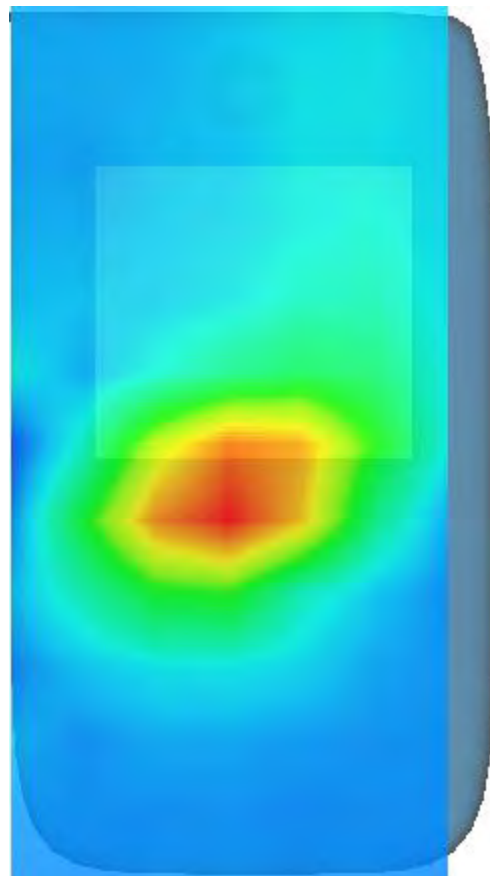

MEASUREMENT 29

Date of measurement: 26/7/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 12</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	707.500000
Relative permittivity (real part)	43.127599
Relative permittivity (imaginary part)	21.440704
Conductivity (S/m)	0.842740
Variation (%)	0.660000

SURFACE SAR

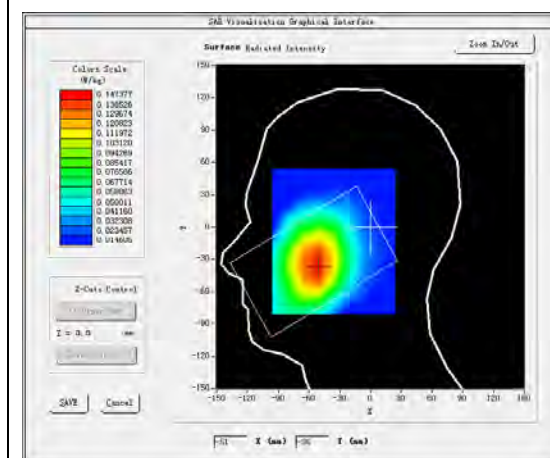


VOLUME SAR

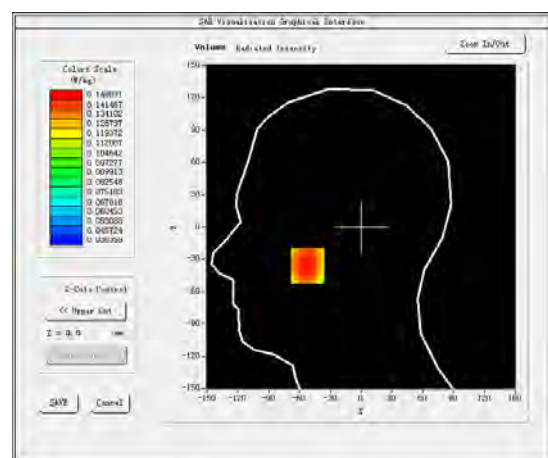


Maximum location: X=-52.00, Y=-36.00

SAR Peak: 0.16 W/kg


SAR 10g (W/Kg)	0.122216
SAR 1g (W/Kg)	0.144714

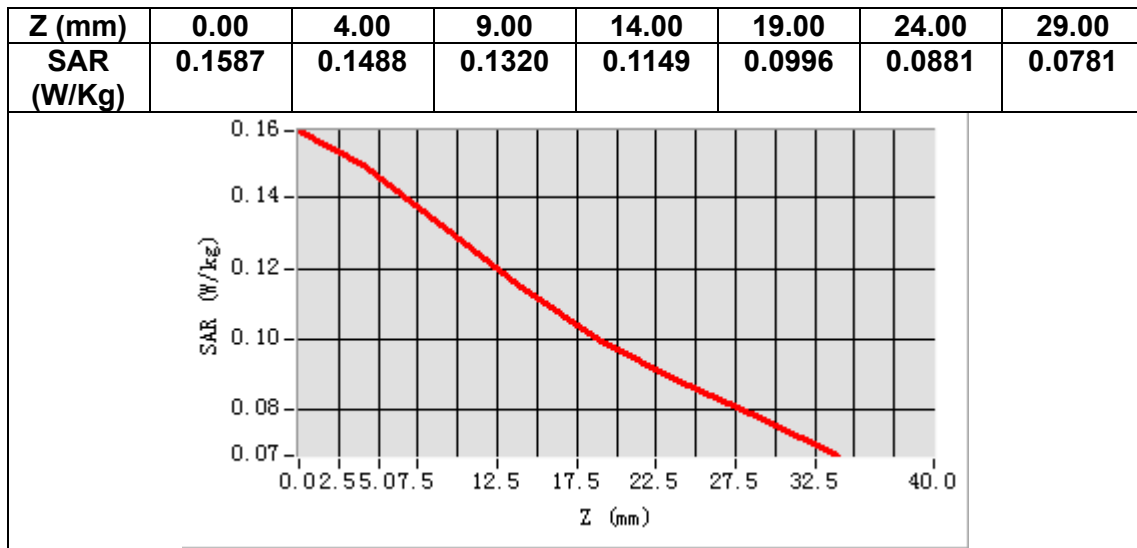

3D screen shot

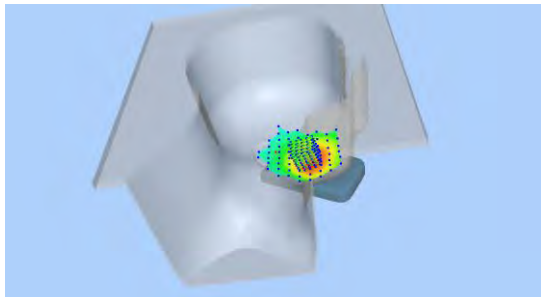

Hot spot position

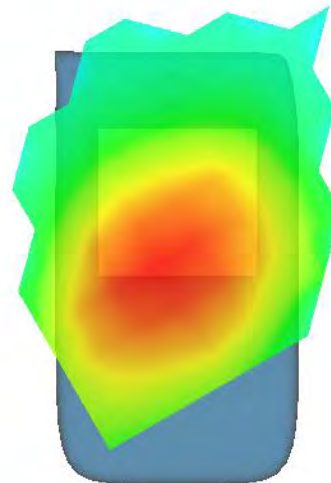

MEASUREMENT 30

Date of measurement: 26/7/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 12</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	707.500000
Relative permittivity (real part)	43.127599
Relative permittivity (imaginary part)	21.440704
Conductivity (S/m)	0.842740
Variation (%)	0.380000

SURFACE SAR

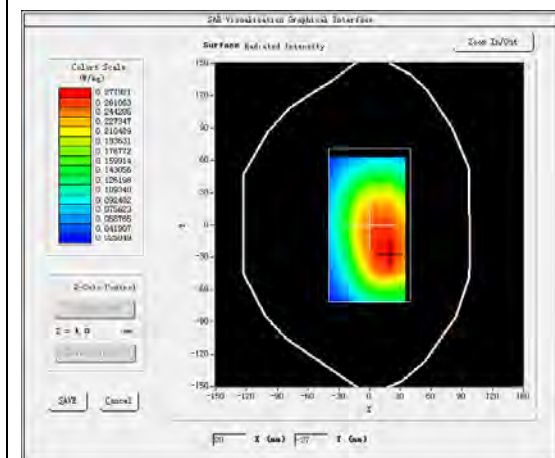


VOLUME SAR

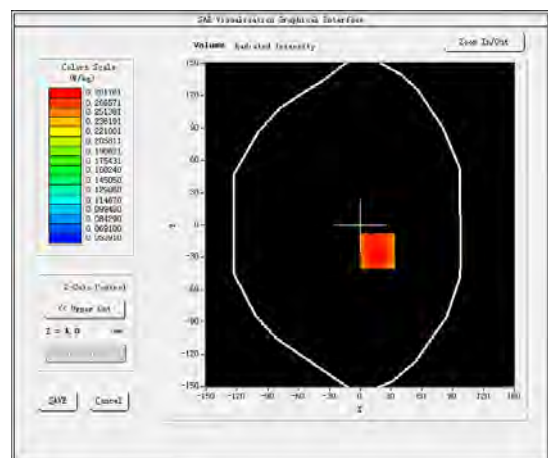


Maximum location: X=17.00, Y=-24.00

SAR Peak: 0.33 W/kg


SAR 10g (W/Kg)	0.220387
SAR 1g (W/Kg)	0.275718

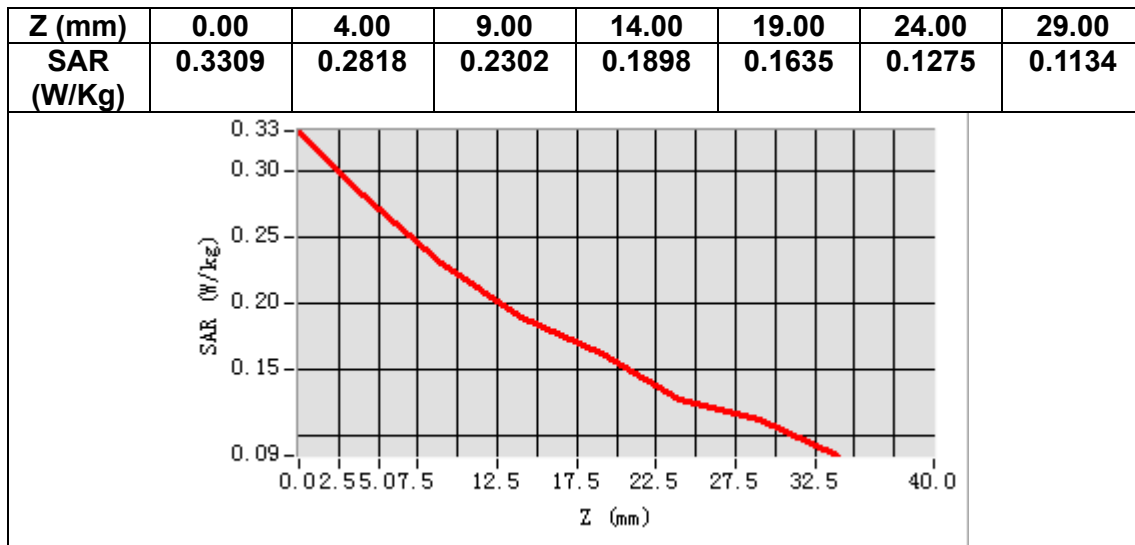

3D screen shot

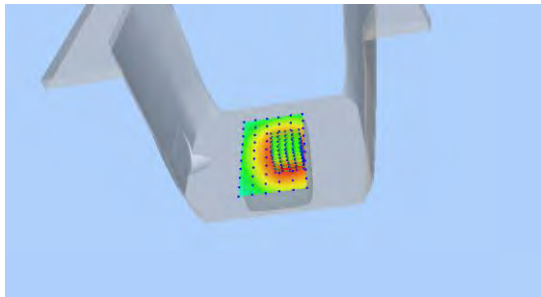

Hot spot position

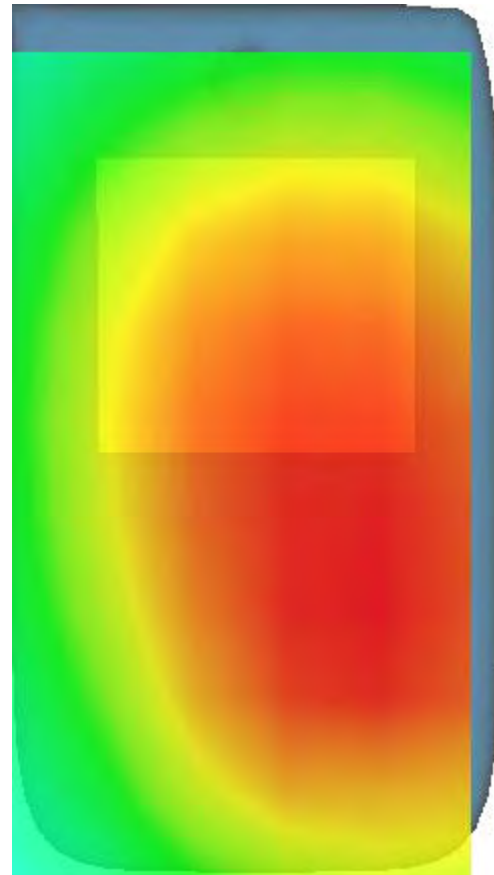

MEASUREMENT 31

Date of measurement: 26/7/2021


A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>LTE band 17</u>
Channels	<u>Middle</u>
Signal	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	710.000000
Relative permittivity (real part)	43.128399
Relative permittivity (imaginary part)	21.487104
Conductivity (S/m)	0.847547
Variation (%)	2.250000

SURFACE SAR

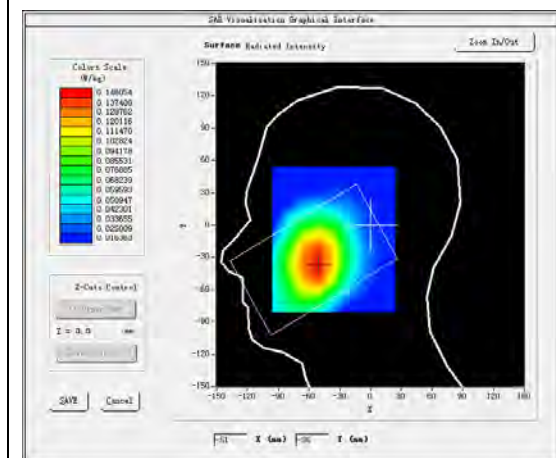



VOLUME SAR

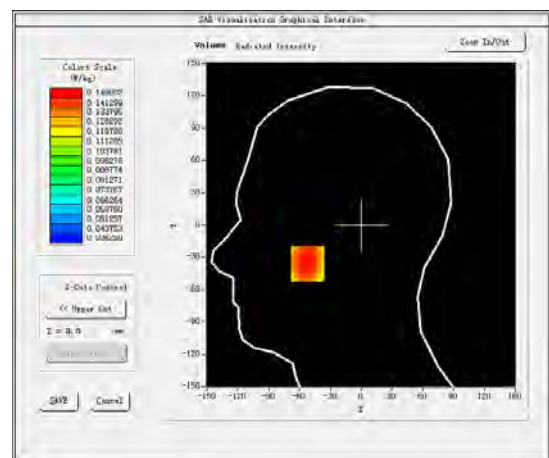

Maximum location: X=-52.00, Y=-36.00

SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.122390
SAR 1g (W/Kg)	0.145033

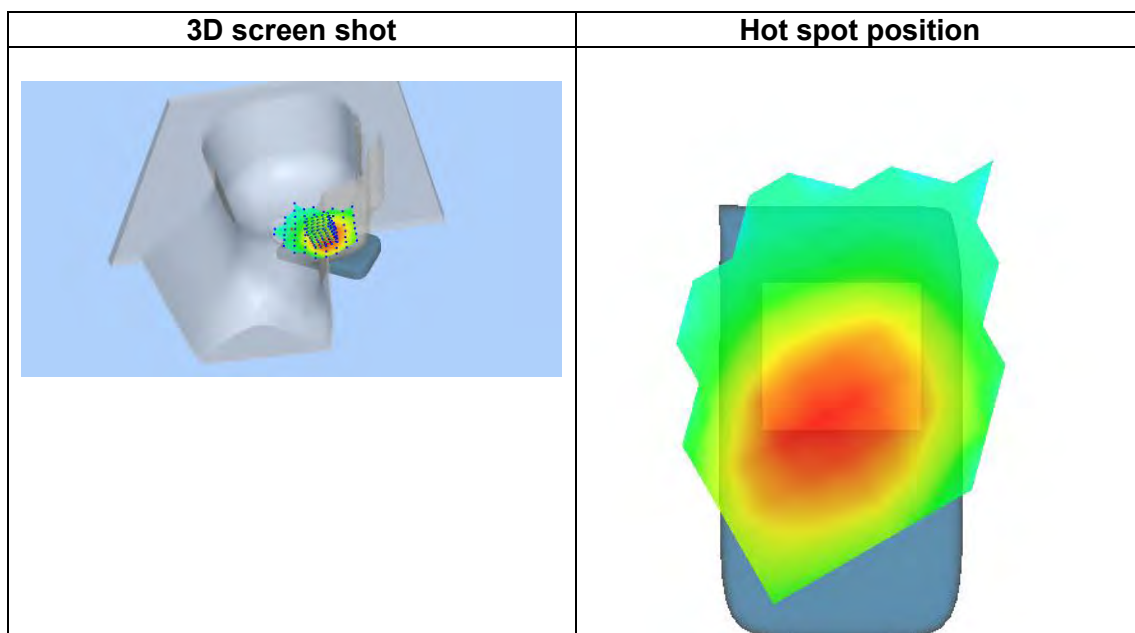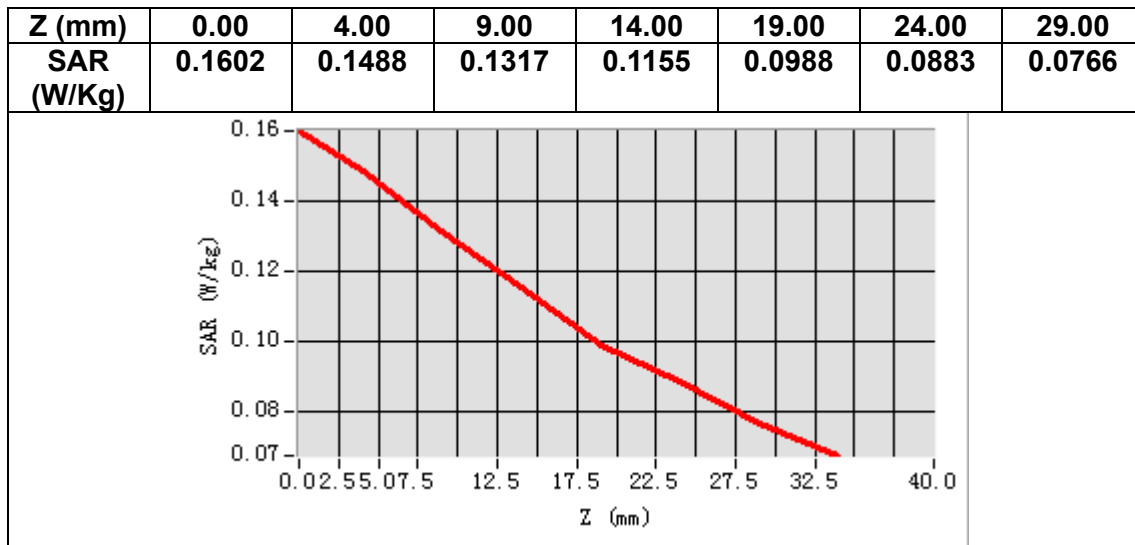

MEASUREMENT 32

Date of measurement: 26/7/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 17</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	710.000000
Relative permittivity (real part)	43.128399
Relative permittivity (imaginary part)	21.487104
Conductivity (S/m)	0.847547
Variation (%)	0.070000

SURFACE SAR

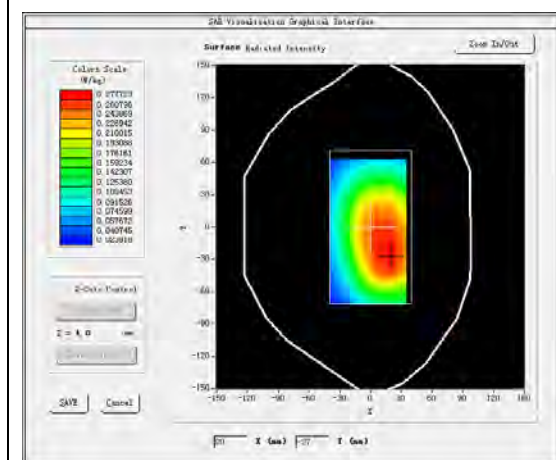


VOLUME SAR

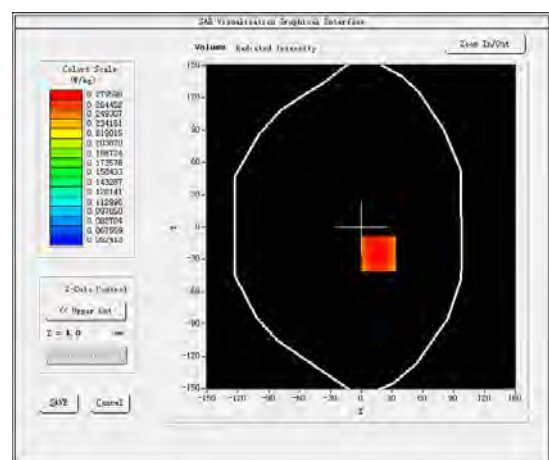


Maximum location: X=17.00, Y=-25.00

SAR Peak: 0.33 W/kg


SAR 10g (W/Kg)	0.219257
SAR 1g (W/Kg)	0.273657

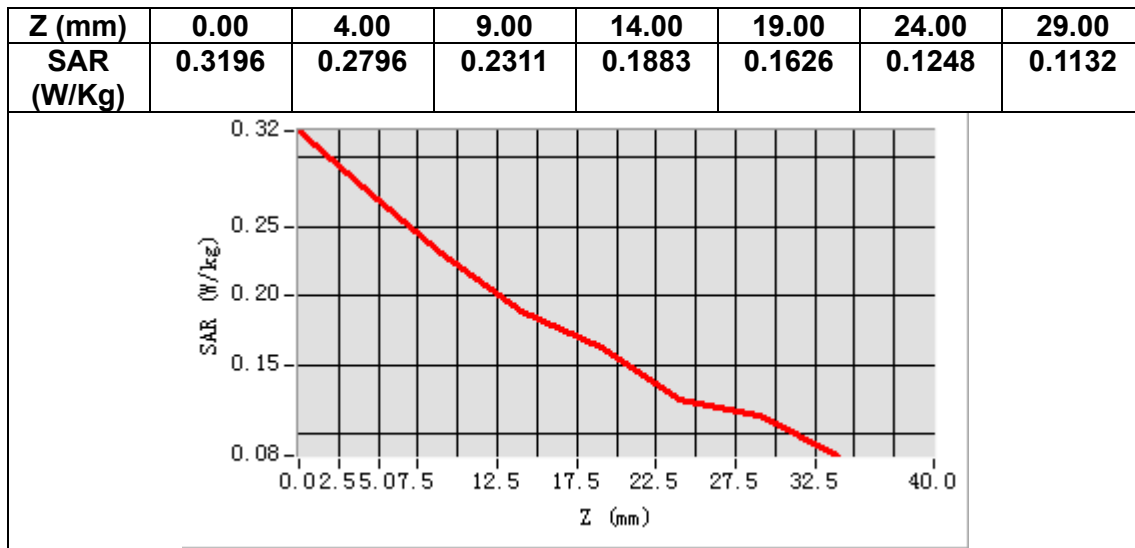

3D screen shot

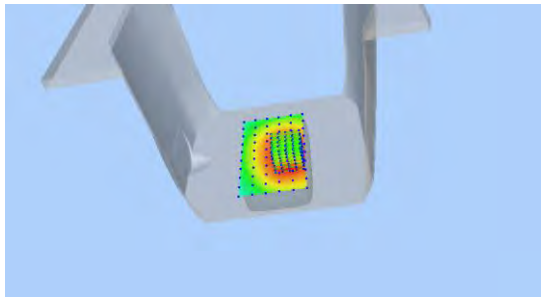

Hot spot position

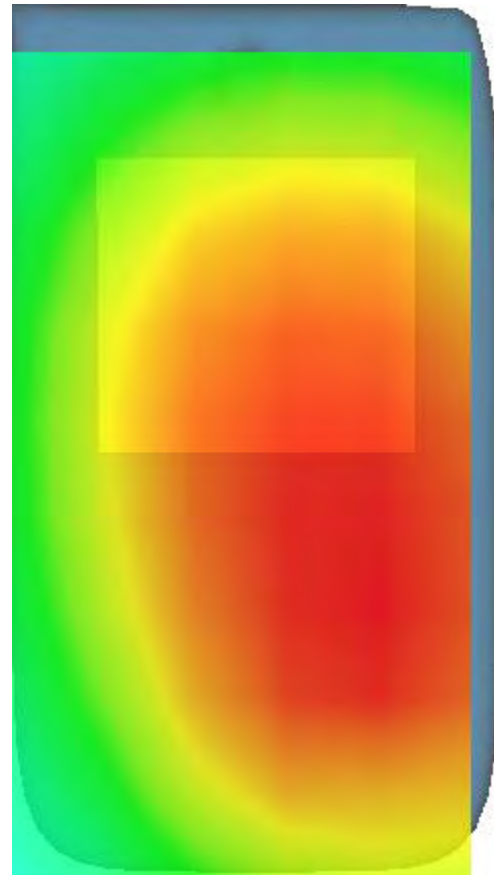

MEASUREMENT 33

Date of measurement: 12/8/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 25</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1882.500000
Relative permittivity (real part)	39.041346
Relative permittivity (imaginary part)	13.705201
Conductivity (S/m)	1.433336
Variation (%)	-2.370000

SURFACE SAR

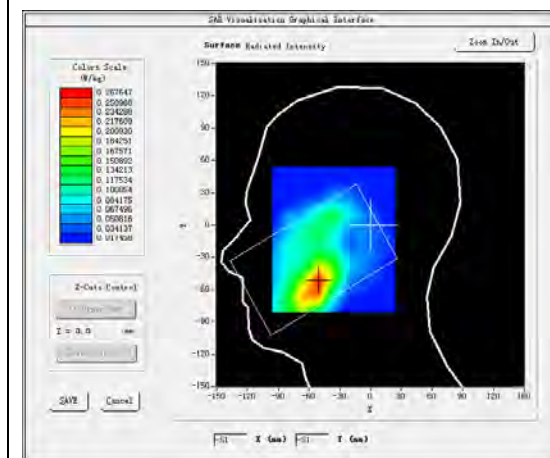


VOLUME SAR

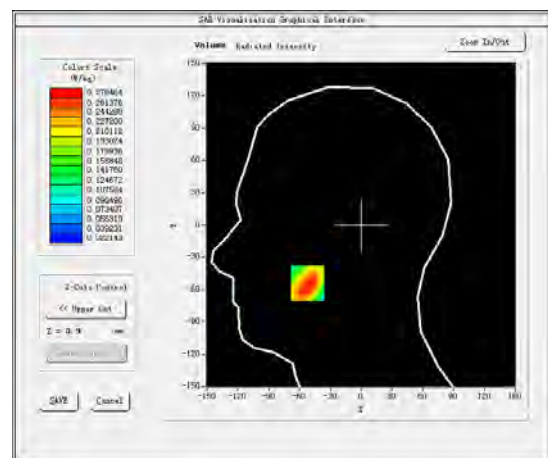


Maximum location: X=-52.00, Y=-54.00

SAR Peak: 0.41 W/kg


SAR 10g (W/Kg)	0.168250
SAR 1g (W/Kg)	0.273151

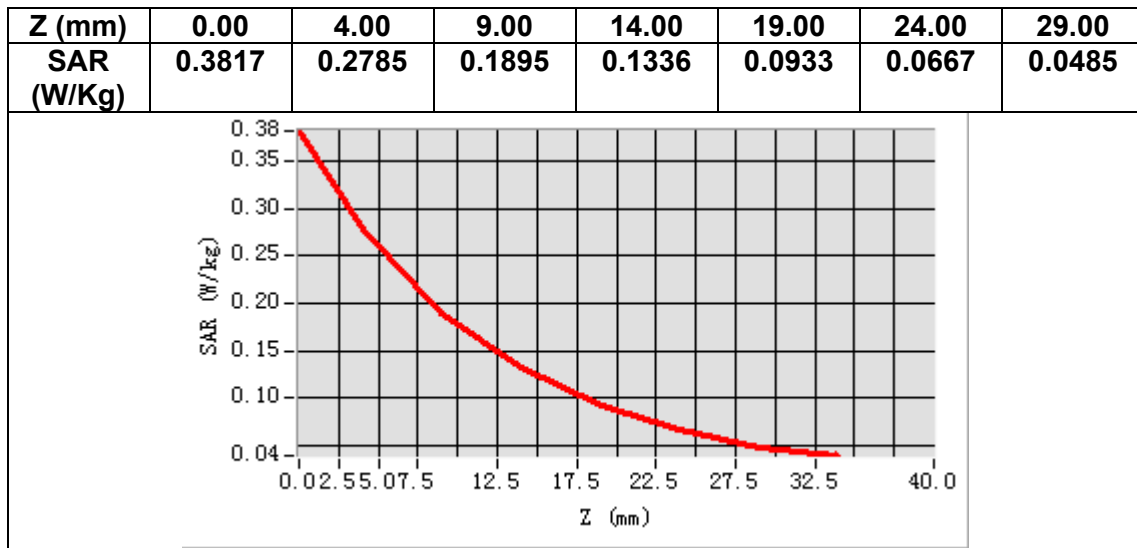

3D screen shot

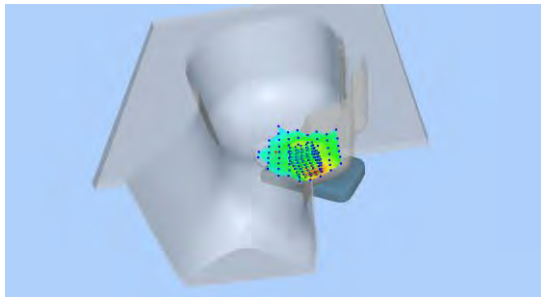

Hot spot position

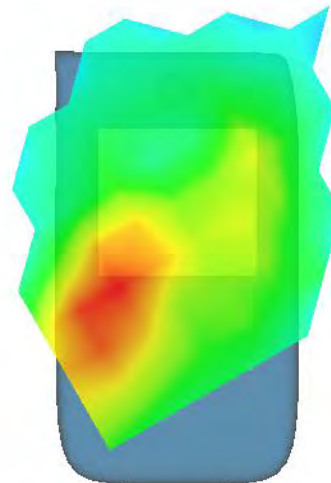

MEASUREMENT 34

Date of measurement: 12/8/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 25</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1882.500000
Relative permittivity (real part)	39.041346
Relative permittivity (imaginary part)	13.705201
Conductivity (S/m)	1.433336
Variation (%)	-0.030000

SURFACE SAR

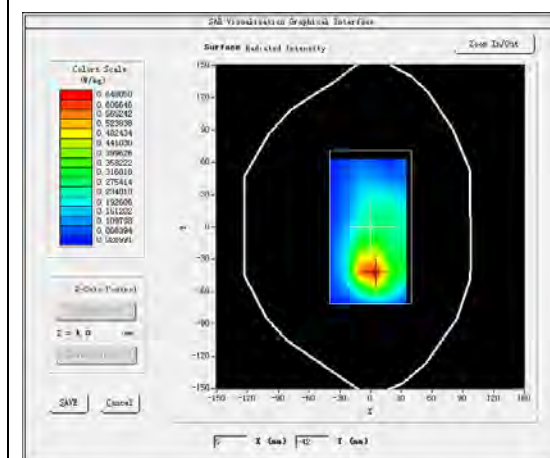


VOLUME SAR

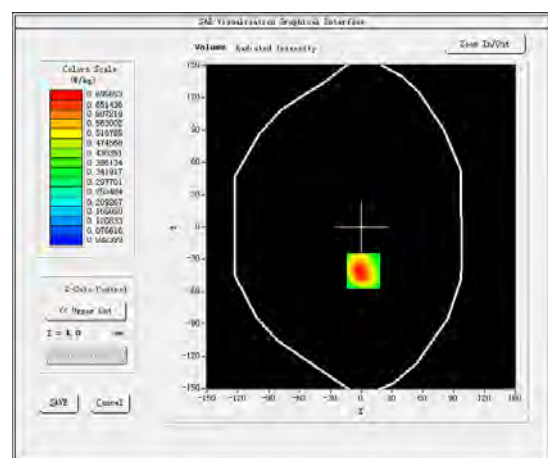


Maximum location: X=2.00, Y=-41.00

SAR Peak: 1.09 W/kg


SAR 10g (W/Kg)	0.382785
SAR 1g (W/Kg)	0.690639

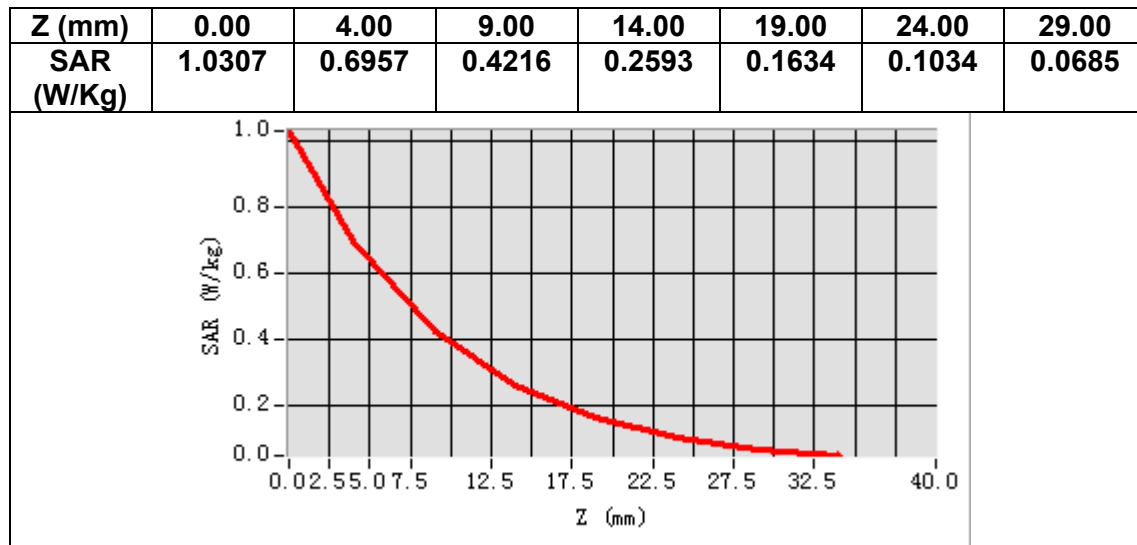

3D screen shot

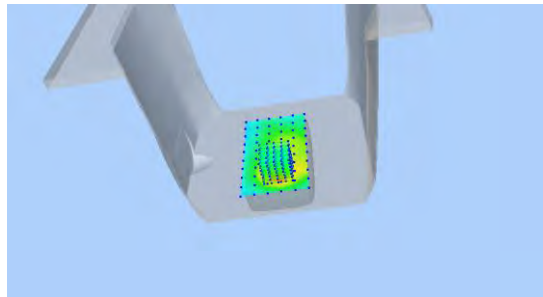

Hot spot position

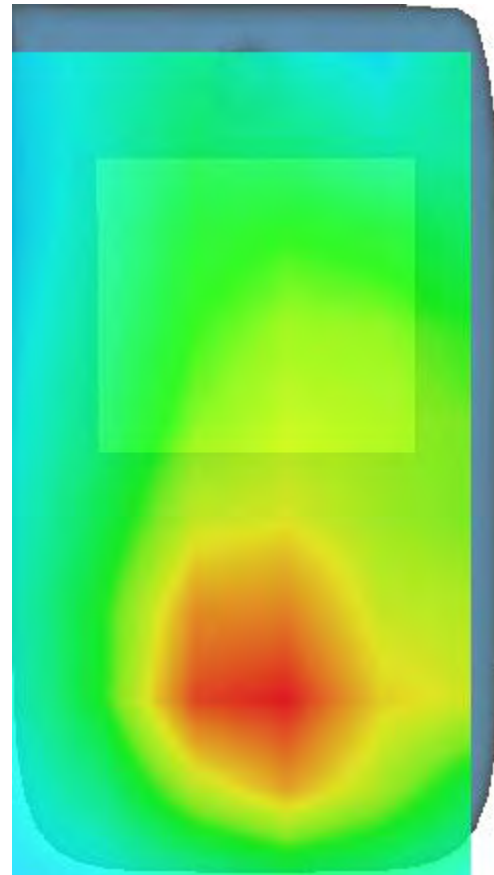

MEASUREMENT 35

Date of measurement: 28/7/2021


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 26A</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	819.000000
Relative permittivity (real part)	42.797552
Relative permittivity (imaginary part)	20.179803
Conductivity (S/m)	0.918181
Variation (%)	2.630000

SURFACE SAR

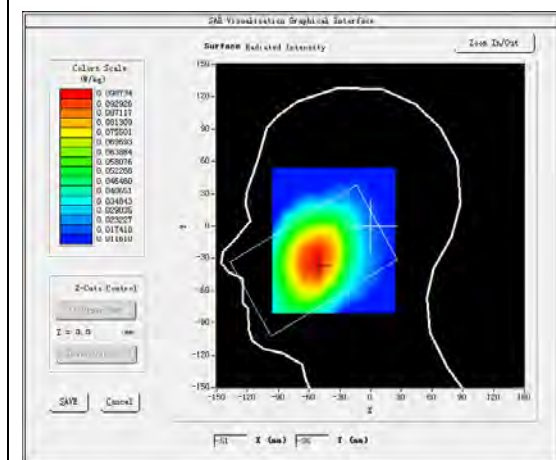



VOLUME SAR

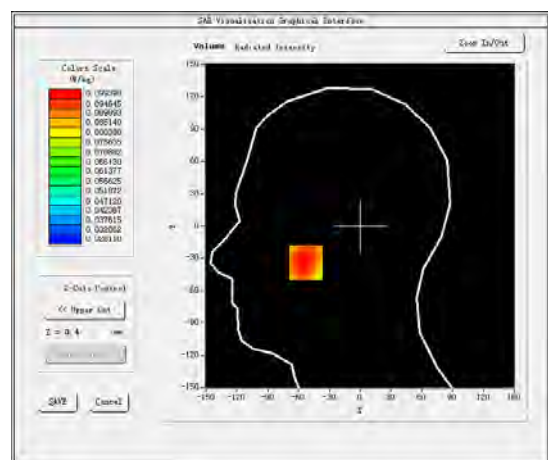

Maximum location: X=-53.00, Y=-34.00

SAR Peak: 0.12 W/kg

SAR 10g (W/Kg)	0.083305
SAR 1g (W/Kg)	0.098584

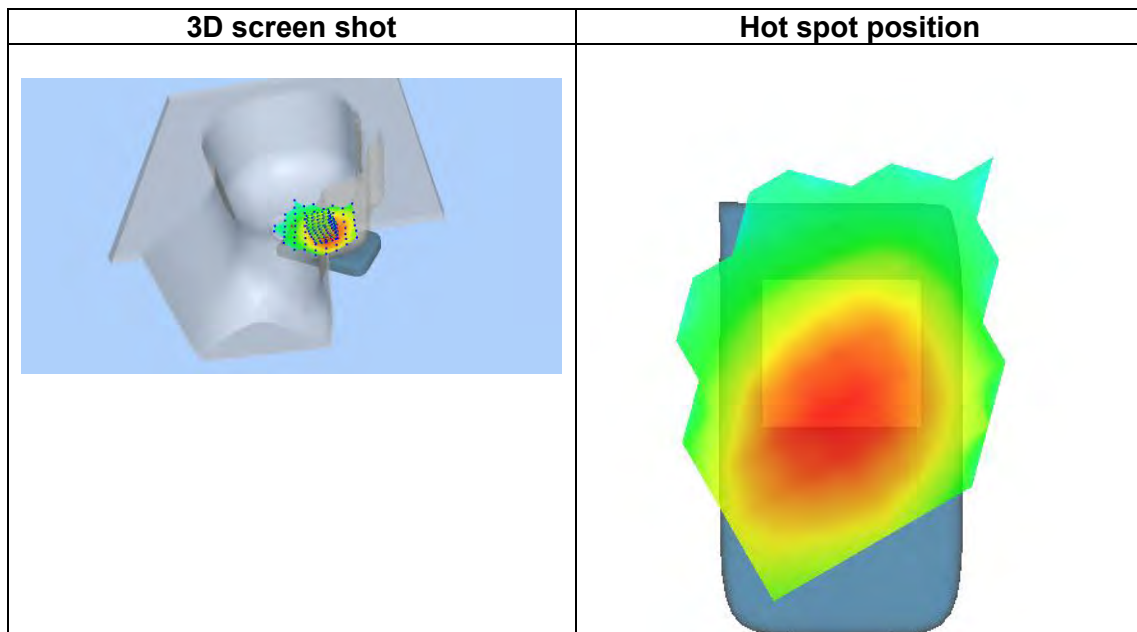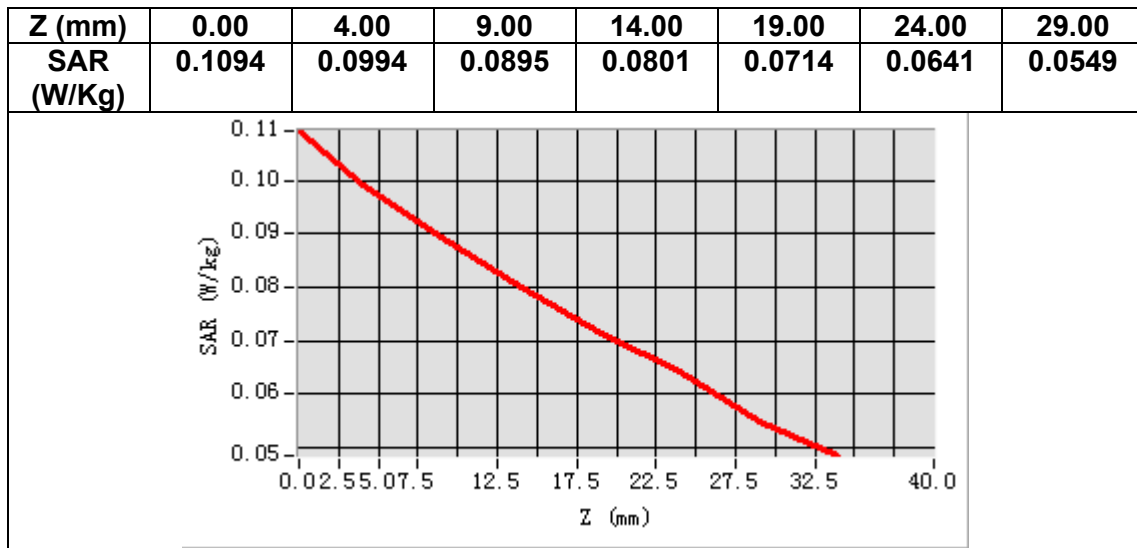

MEASUREMENT 36


Date of measurement: 28/7/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 26A</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results


Frequency (MHz)	819.000000
Relative permittivity (real part)	42.797552
Relative permittivity (imaginary part)	20.179803
Conductivity (S/m)	0.918181
Variation (%)	0.200000

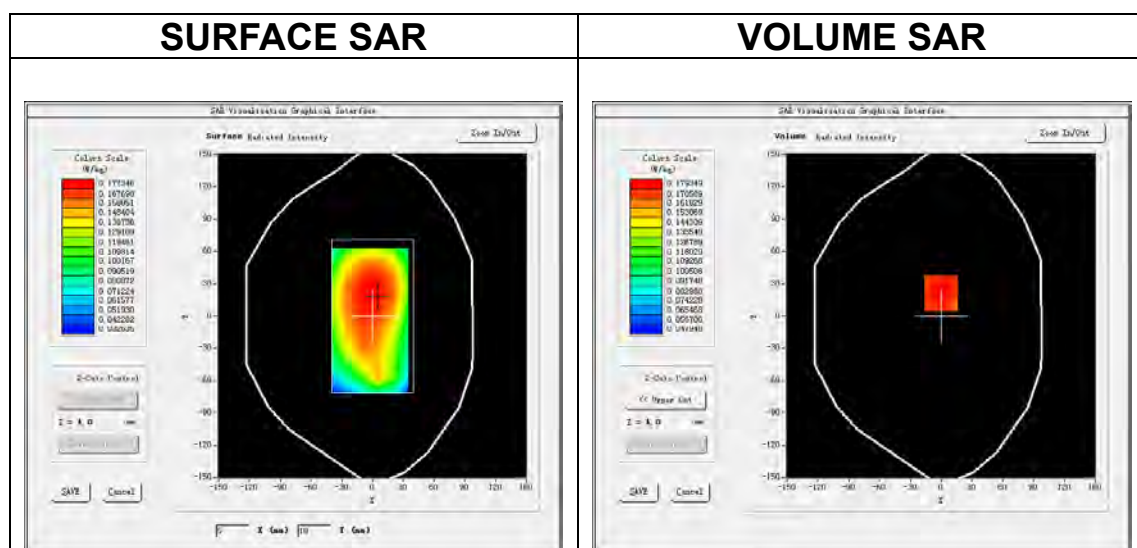


Maximum location: X=0.00, Y=21.00

SAR Peak: 0.21 W/kg


SAR 10g (W/Kg)	0.141882
SAR 1g (W/Kg)	0.175473

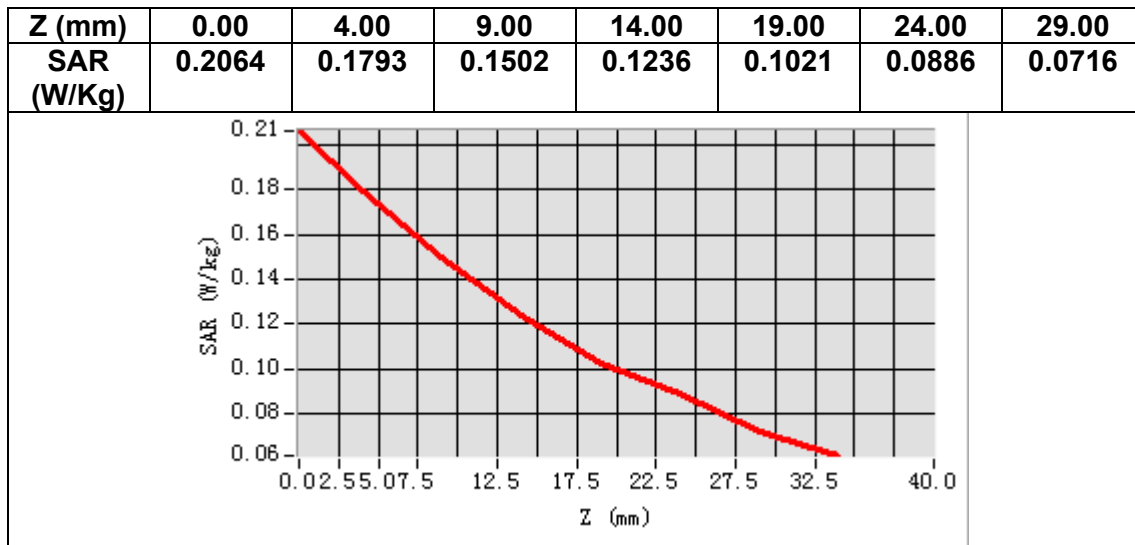

3D screen shot

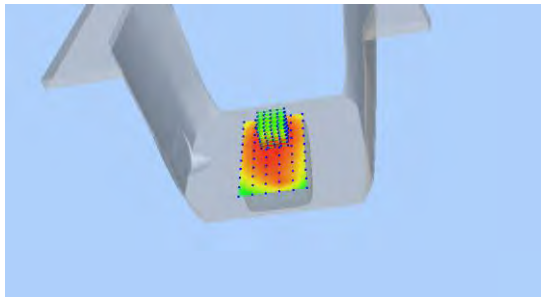

Hot spot position

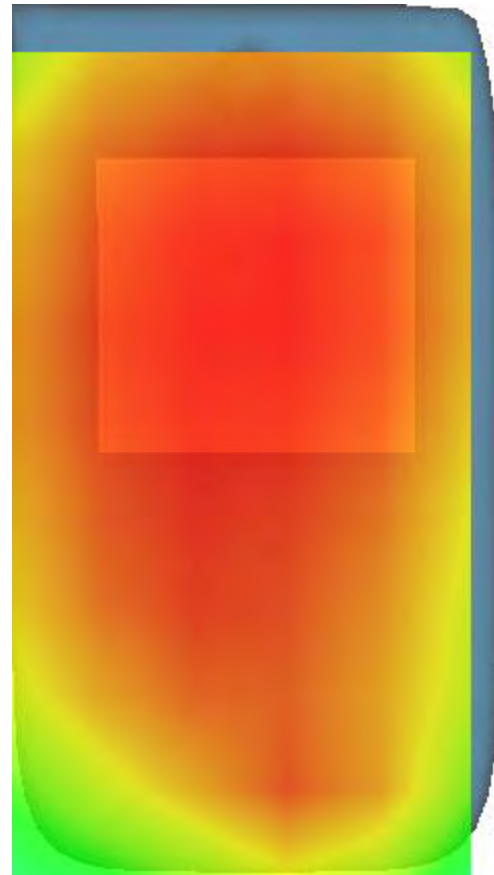

MEASUREMENT 37


Date of measurement: 28/7/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 26B</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	836.500000
Relative permittivity (real part)	42.543852
Relative permittivity (imaginary part)	20.189303
Conductivity (S/m)	0.938242
Variation (%)	1.150000

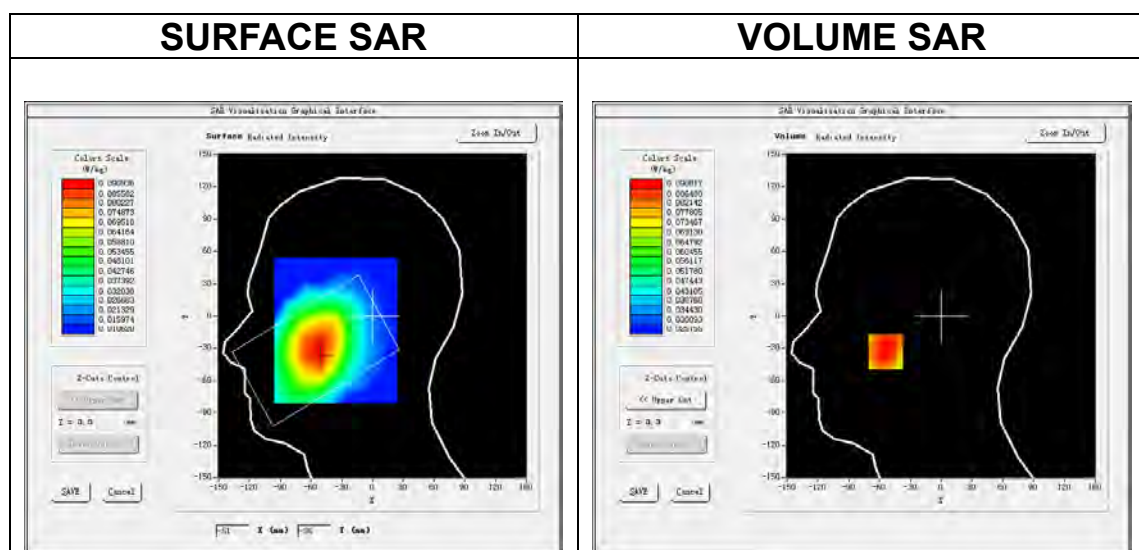

Maximum location: X=-54.00, Y=-33.00

SAR Peak: 0.11 W/kg

SAR 10g (W/Kg)	0.077095
SAR 1g (W/Kg)	0.090546

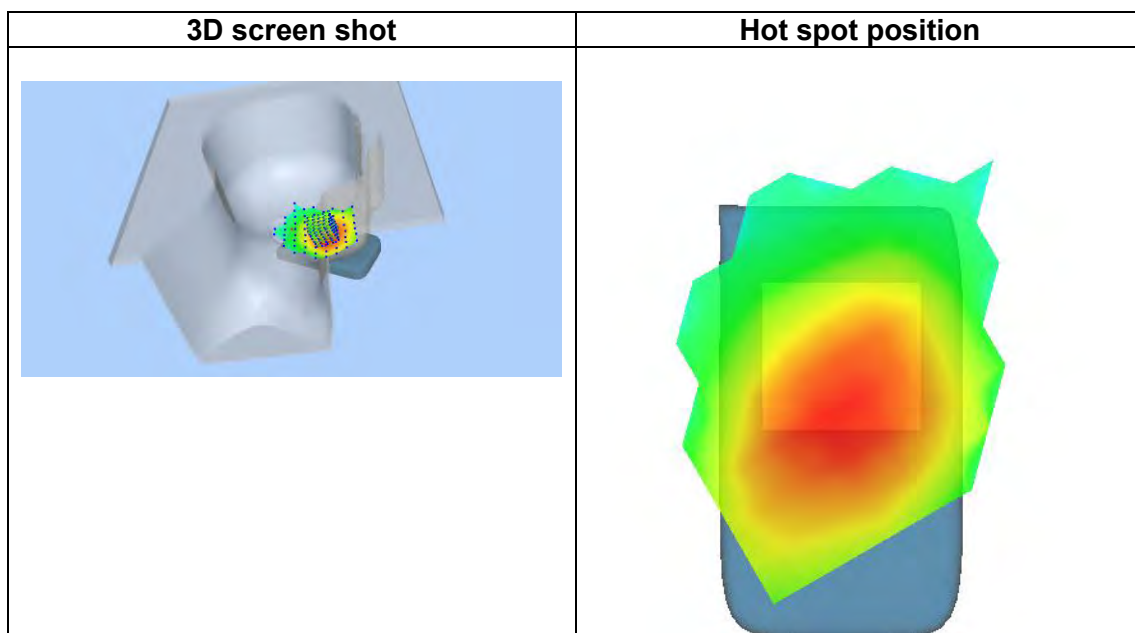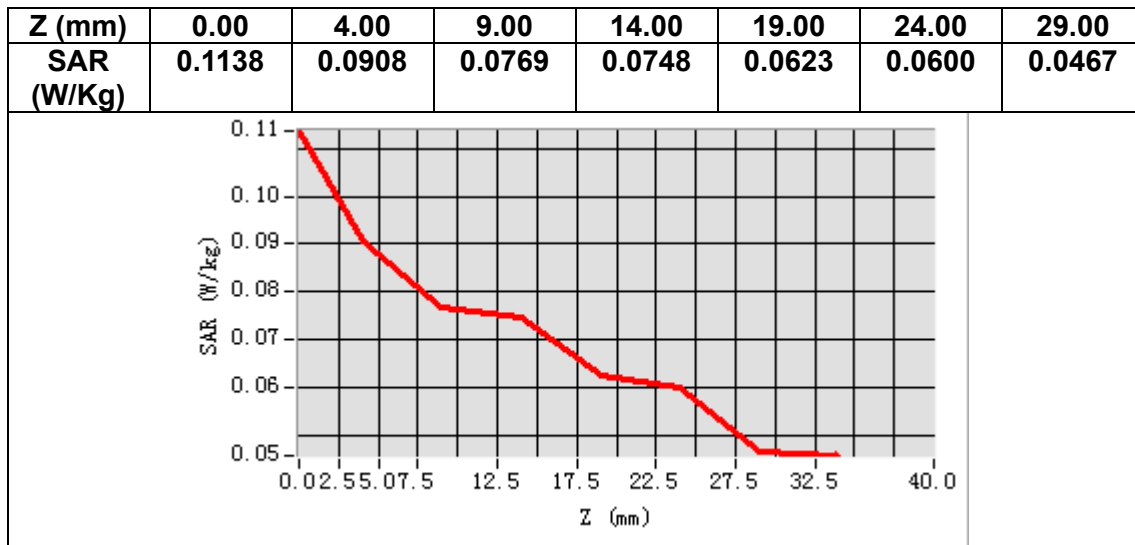

MEASUREMENT 38


Date of measurement: 28/7/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 26B</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results


Frequency (MHz)	836.500000
Relative permittivity (real part)	42.543852
Relative permittivity (imaginary part)	20.189303
Conductivity (S/m)	0.938242
Variation (%)	-1.120000

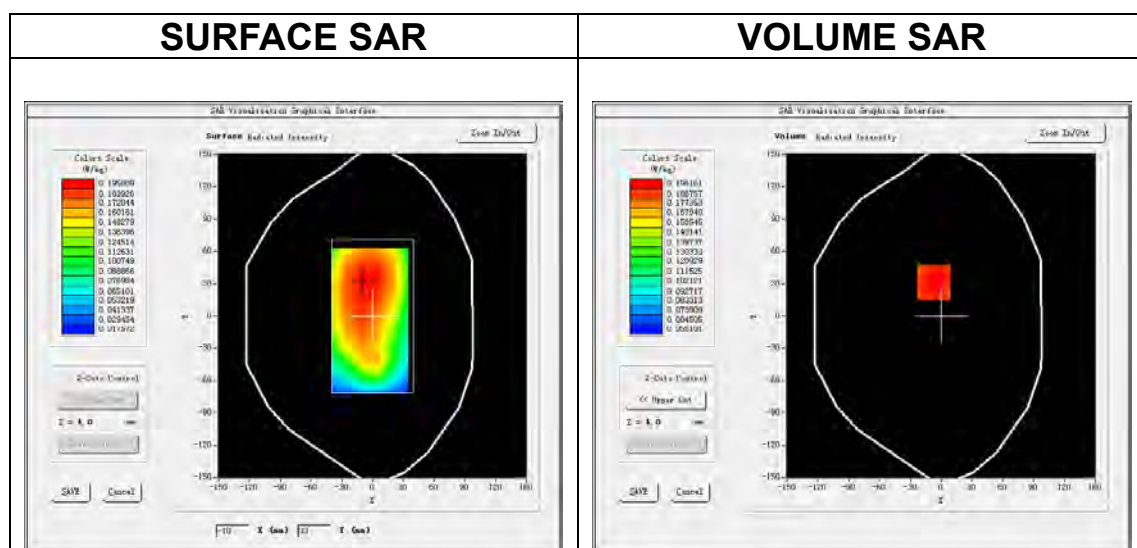


Maximum location: X=-7.00, Y=31.00

SAR Peak: 0.36 W/kg


SAR 10g (W/Kg)	0.154857
SAR 1g (W/Kg)	0.194406

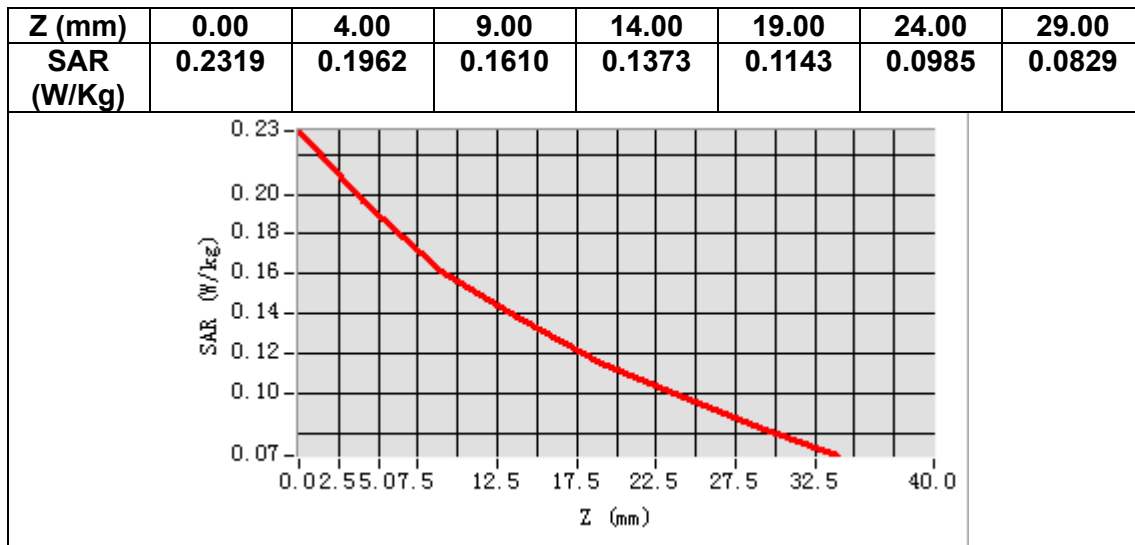

3D screen shot

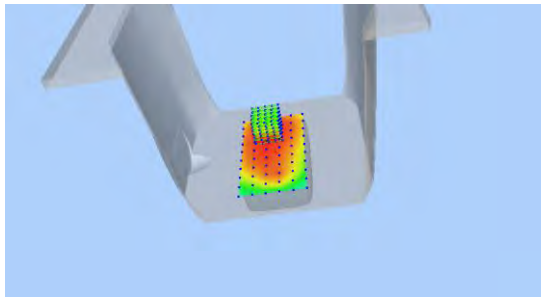

Hot spot position

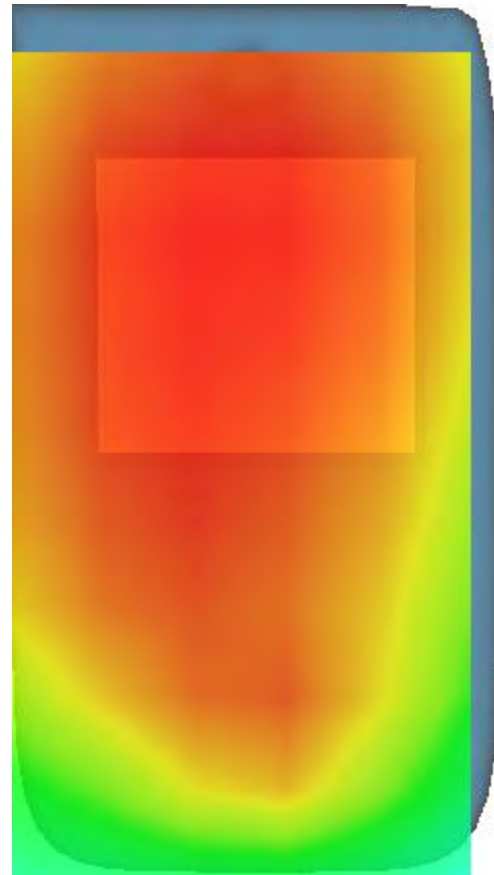

14. Appendix D. Calibration Certificate

Table of contents
E Field Probe - SN 08/16 EPGO287
750 MHz Dipole - SN 03/15 DIP 0G750-355
835 MHz Dipole - SN 03/15 DIP 0G835-347
1800 MHz Dipole - SN 03/15 DIP 1G800-349
1900 MHz Dipole - SN 03/15 DIP 1G900-350
2450 MHz Dipole - SN 03/15 DIP 2G450-352
2600 MHz Dipole - SN 03/15 DIP 2G600-356
5000-6000 MHz Dipole - SN 13/14 WGA 33



COMOSAR E-Field Probe Calibration Report

Ref : ACR.60.1.21.MVGB.A

SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR DOSIMETRIC E-FIELD PROBE
SERIAL NO.: SN 08/16 EPGO287

Calibrated at MVG

Z.I. de la pointe du diable

Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE

Calibration date: 03/01/2021



Accreditations #2-6789 and #2-6814
Scope available on www.cofrac.fr

Summary:

This document presents the method and results from an accredited COMOSAR E-Field Probe calibration performed at MVG, using the CALIPROBE test bench, for use with a MVG COMOSAR system only. The test results covered by accreditation are traceable to the International System of Units (SI).



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

	Name	Function	Date	Signature
Prepared by :	Jérôme Luc	Technical Manager	3/1/2021	
Checked by :	Jérôme Luc	Technical Manager	3/1/2021	
Approved by :	Yann Toutain	Laboratory Director	3/1/2021	

2021.03.0
 1 13:07:12
 +01'00'
 PHILIPS

	Customer Name
Distribution :	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

Issue	Name	Date	Modifications
A	Jérôme Luc	3/1/2021	Initial release



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

TABLE OF CONTENTS

1	Device Under Test	4
2	Product Description	4
2.1	General Information	4
3	Measurement Method	4
3.1	Linearity	4
3.2	Sensitivity	5
3.3	Lower Detection Limit	5
3.4	Isotropy	5
3.1	Boundary Effect	5
4	Measurement Uncertainty	6
5	Calibration Measurement Results	6
5.1	Sensitivity in air	6
5.2	Linearity	7
5.3	Sensitivity in liquid	8
5.4	Isotropy	9
6	List of Equipment	10



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

1 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	SN 08/16 EPGO287
Product Condition (new / used)	Used
Frequency Range of Probe	0.15 GHz-6GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.211 MΩ Dipole 2: R2=0.199 MΩ Dipole 3: R3=0.199 MΩ

2 PRODUCT DESCRIPTION**2.1 GENERAL INFORMATION**

MVG's COMOSAR E field Probes are built in accordance to the IEEE 1528, FCC KDB865664 D01, CENELEC EN62209 and CEI/IEC 62209 standards.



Figure 1 – MVG COMOSAR Dosimetric E field Dipole

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

3 MEASUREMENT METHOD

The IEEE 1528, FCC KDB865664 D01, CENELEC EN62209 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 to 360 degrees in 15-degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.1 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

The boundary effect uncertainty can be estimated according to the following uncertainty approximation formula based on linear and exponential extrapolations between the surface and $d_{be} + d_{step}$ along lines that are approximately normal to the surface:

$$SAR_{uncertainty} [\%] = \delta SAR_{be} \frac{(d_{be} + d_{step})^2}{2d_{step}} \frac{(e^{-d_{be}/\delta})}{\delta/2} \quad \text{for } (d_{be} + d_{step}) < 10 \text{ mm}$$

where

$SAR_{uncertainty}$	is the uncertainty in percent of the probe boundary effect
d_{be}	is the distance between the surface and the closest <i>zoom-scan</i> measurement point, in millimetre
Δ_{step}	is the separation distance between the first and second measurement points that are closest to the phantom surface, in millimetre, assuming the boundary effect at the second location is negligible
δ	is the minimum penetration depth in millimetres of the head tissue-equivalent liquids defined in this standard, i.e., $\delta \approx 14$ mm at 3 GHz;
ΔSAR_{be}	in percent of SAR is the deviation between the measured SAR value, at the distance d_{be} from the boundary, and the analytical SAR value.